

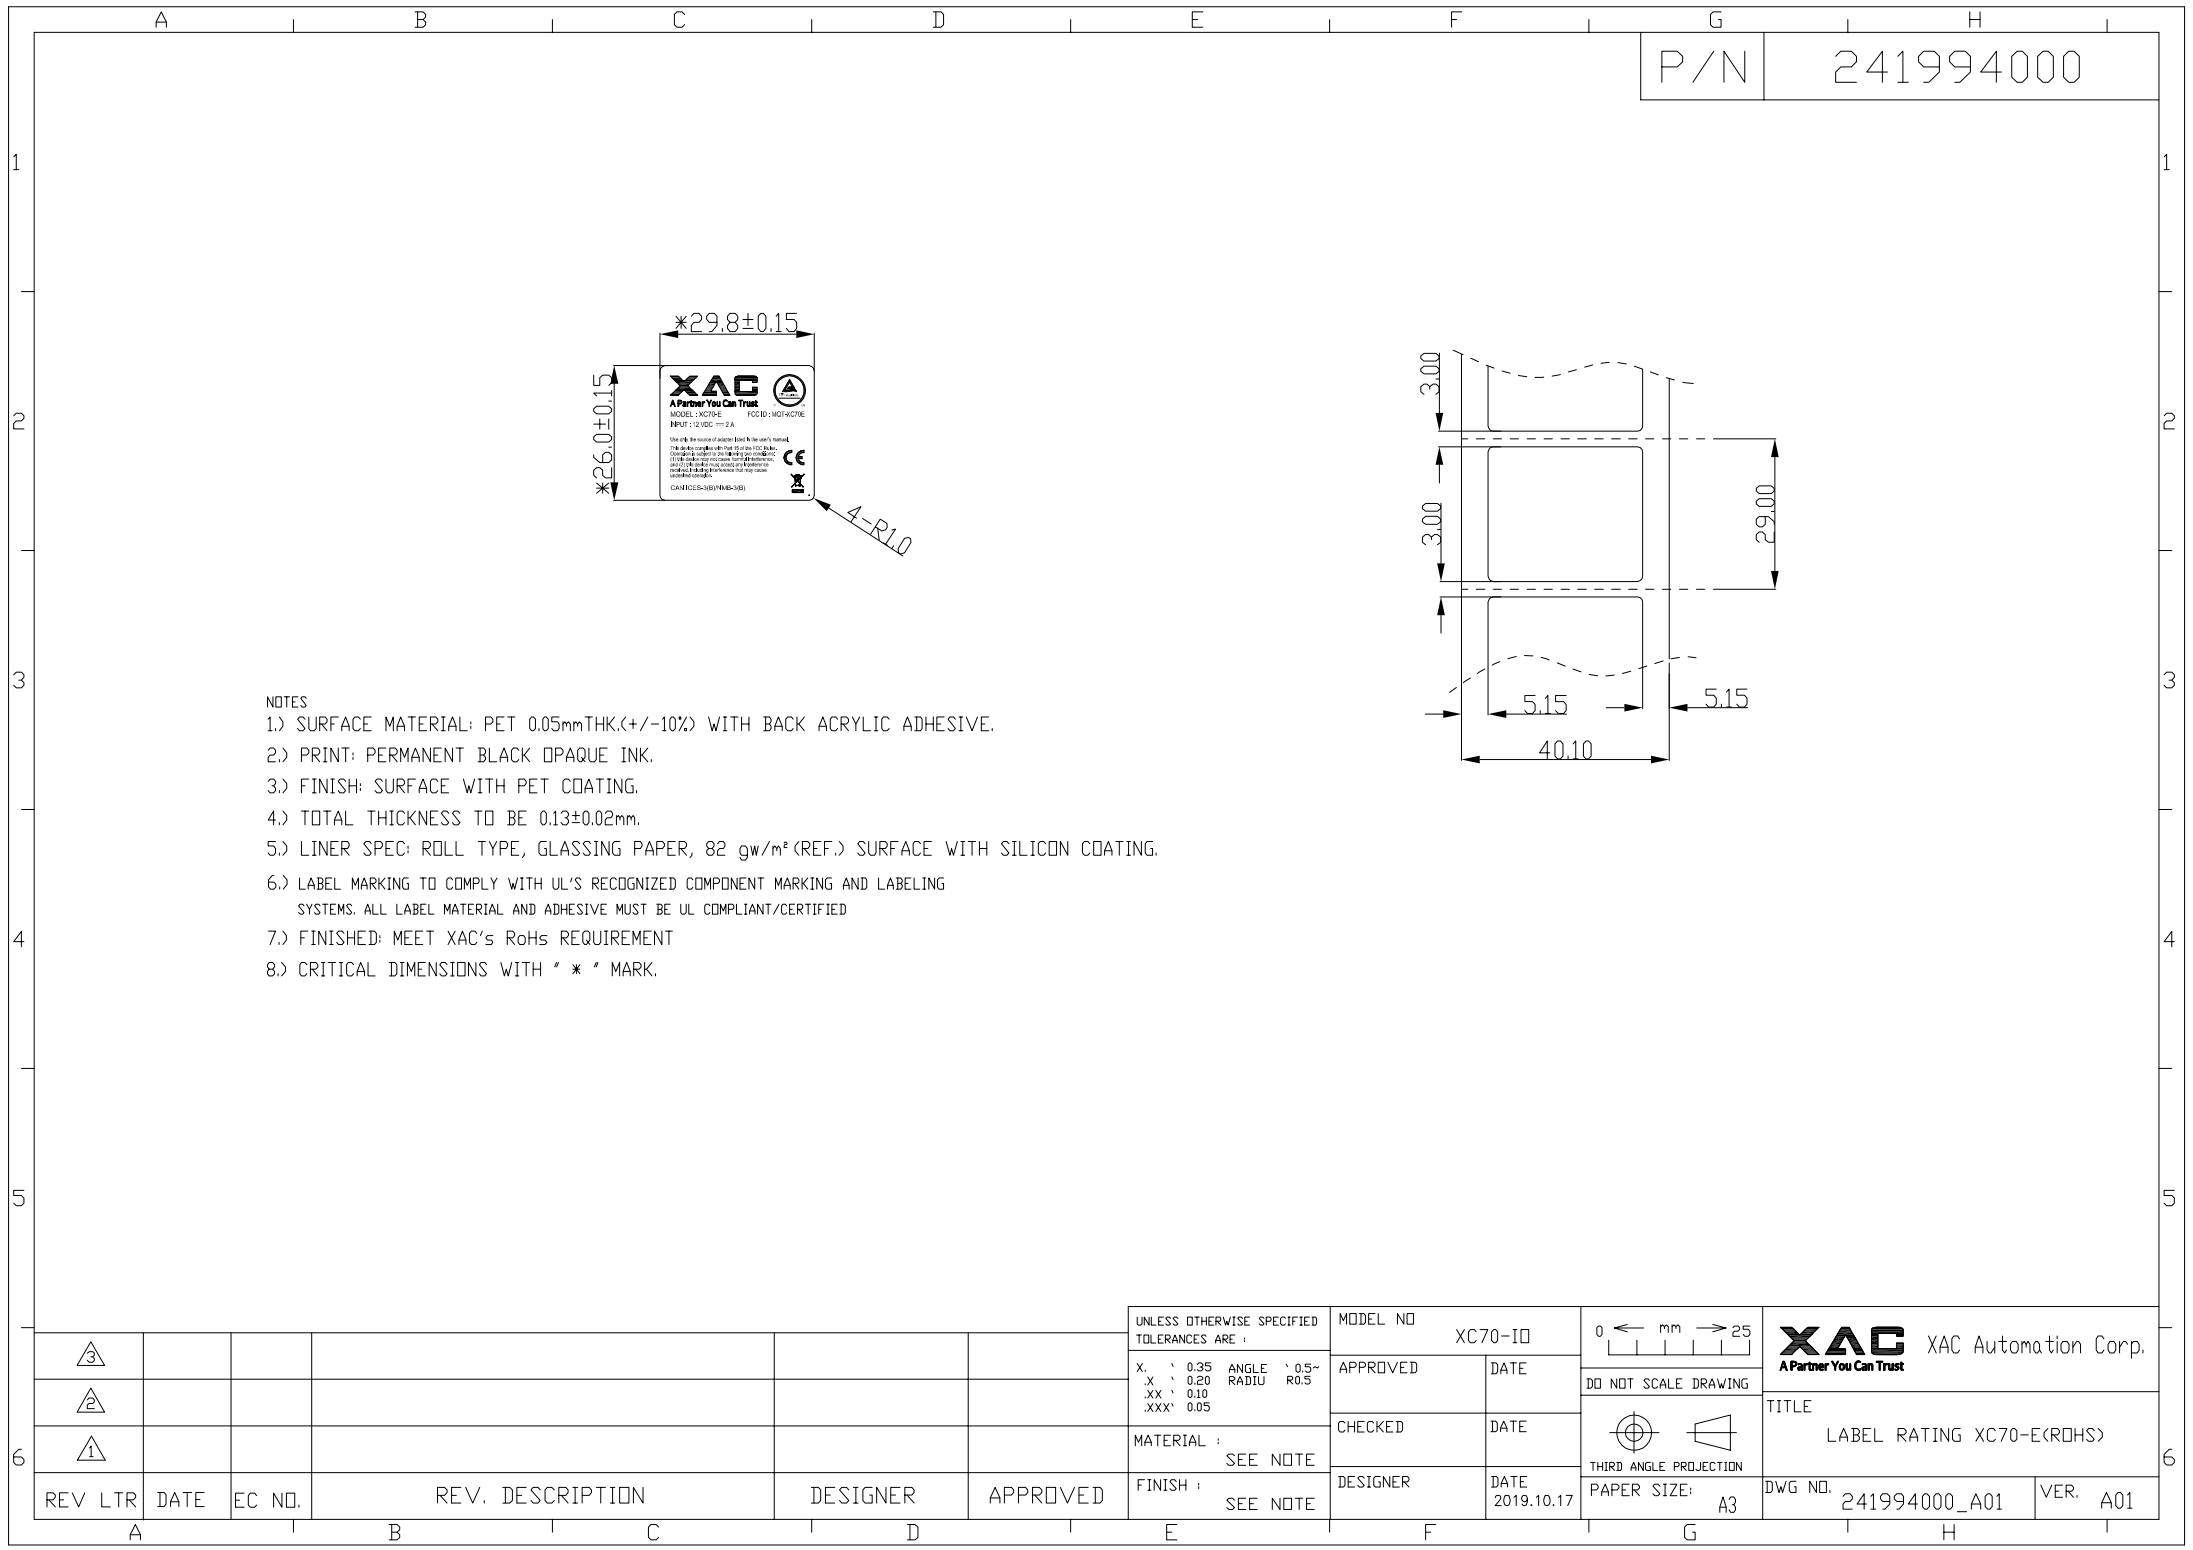


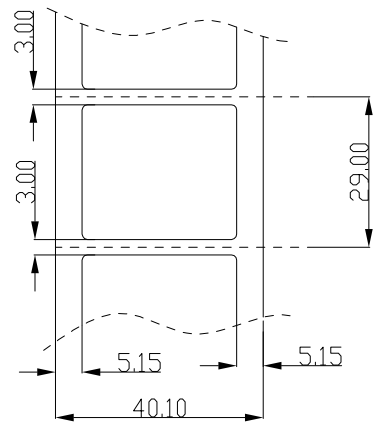

P/N 241994000



- NOTES
- 1.) SURFACE MATERIAL: PET 0.05mmTHK.(+/-10%) WITH BACK ACRYLIC ADHESIVE.
 - 2.) PRINT: PERMANENT BLACK OPAQUE INK.
 - 3.) FINISH: SURFACE WITH PET COATING.
 - 4.) TOTAL THICKNESS TO BE 0.13±0.02mm.
 - 5.) LINER SPEC: ROLL TYPE, GLASSING PAPER, 82 gw/m² (REF.) SURFACE WITH SILICON COATING.
 - 6.) LABEL MARKING TO COMPLY WITH UL'S RECOGNIZED COMPONENT MARKING AND LABELING SYSTEMS. ALL LABEL MATERIAL AND ADHESIVE MUST BE UL COMPLIANT/CERTIFIED
 - 7.) FINISHED: MEET XAC's RoHS REQUIREMENT
 - 8.) CRITICAL DIMENSIONS WITH " * " MARK.

△3						UNLESS OTHERWISE SPECIFIED TOLERANCES ARE : X. . 0.35 ANGLE . 0.5~ .X . 0.20 RADIUS R0.5 .XX . 0.10 .XXX. 0.05	MODEL NO XC70-ID	0 ← mm → 25	XAC XAC Automation Corp. A Partner You Can Trust		
△2						MATERIAL : SEE NOTE	APPROVED	DATE	DO NOT SCALE DRAWING		
△1							CHECKED	DATE	THIRD ANGLE PROJECTION		
REV	LTR	DATE	EC NO.	REV. DESCRIPTION	DESIGNER		APPROVED	DESIGNER	DATE 2019.10.17	PAPER SIZE: A3	TITLE LABEL RATING XC70-E(ROHS)
						FINISH : SEE NOTE			DWG NO.	241994000_A01	VER. A01