TEST REPORT

REPORT NO: **SATEL-TR-0045-LH**

TEST PERIOD: 08.09.2005

TEST SITE: Satel / R&D Dept., Salo

DEVICE UNDER TEST: **SATELLINE-3AS VHF**

TESTS PERFORMED:

- Sideband Spectrum of the transmitter
  #1: at 12.5 kHz channel spacing
  (page 2, figure 1)

TEST STANDARD: TIA/EIA-603, clause 2.2.11.

TESTS PERFORMED BY:

Lassi Hirvonen

ANNEXE: 1. Emission mask D, applied for the decive under test (page 3)

SATEL Oy, P.O.Box 142, FIN-24101 Salo, Finland
Street: Meriniitynkatu 17, FIN-24100 Salo, Finland
Tel: +358 2 777 7800, Fax: +358 2 777 7810, E-mail: info@satel.fi
www.satel.fi

TEST RESULTS

#1 Test at 12.5 kHz channel spacing

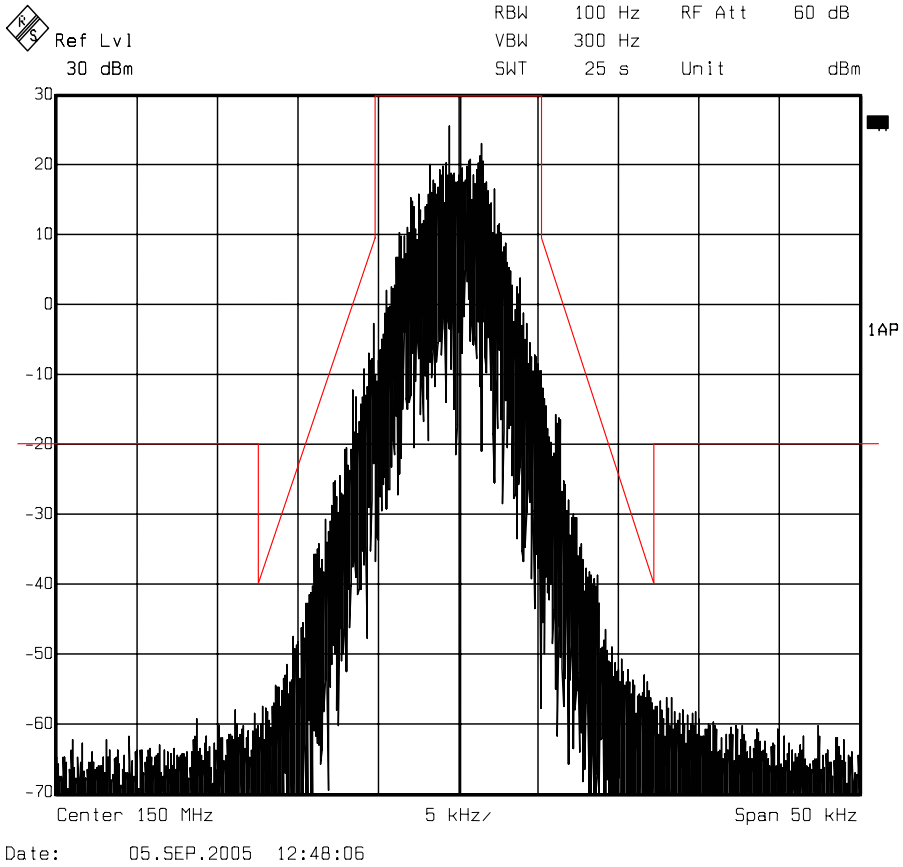

Figure 1. Sideband spectrum of the transmitter at 12.5 kHz channel spacing, showing compliance with the emission mask D.

ANNEXE

SATEL Oy, P.O.Box 142, FIN-24101 Salo, Finland
Street: Meriniitynkatu 17, FIN-24100 Salo, Finland
Tel: +358 2 777 7800, Fax: +358 2 777 7810, E-mail: info@satel.fi
www.satel.fi

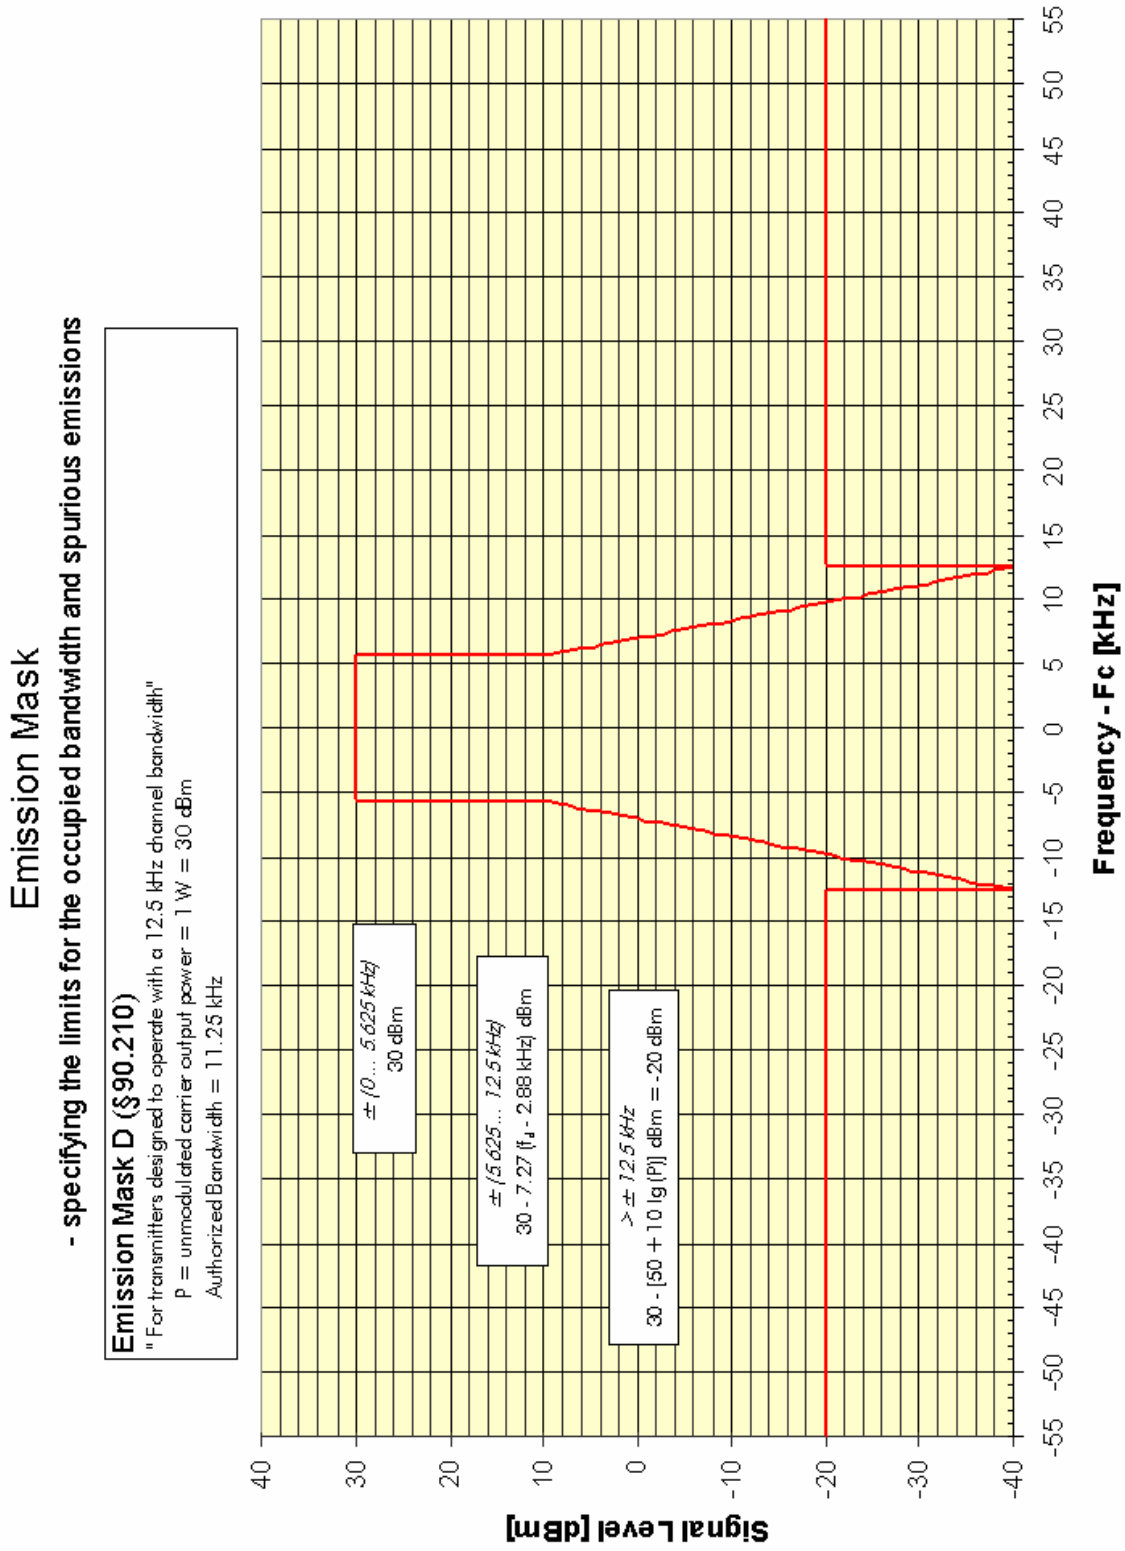

SATEL Oy, P.O.Box 142, FIN-24101 Salo, Finland
Street: Meriniitynkatu 17, FIN-24100 Salo, Finland
Tel: +358 2 777 7800, Fax: +358 2 777 7810, E-mail: info@satel.fi
www.satel.fi