

File Number **21/36403394_M1**



TEST REPORT

FCC/ISED Test Report

Petitioner's Reference: Sensata/Schrader Electronics

Customer Address: Schrader Electronics 11 Technology Park, Belfast Road
Antrim (Northern Ireland)
BT41 1QS
United Kingdom

Equipment: TPMS Tire-Pressure Monitoring System

Brand:	Schrader Electronics	Model:	AFFPK4
	DUT 1: 52FD7705		DUT 1: 11475/1
	DUT 2: 52FD76F1		DUT 2: 11475/2
S/N:	DUT 3: 52FD7684	Applus Id:	DUT 3: 11475/3
	DUT 4: 52FD7669		DUT 4: 11475/4
FCC Id:	MRXAFFPK4	IC:	2546A -AFFPK4

Result: compliant

It has been tested and complies the standard specifications Applicable / s.
See specifications applied on page 9.

Applicable Standards

FCC 47 CFR Part 15 Subpart C (October 2020)¹

¹The latest modifications of the standard, published at the date of the tests reported in this document, have been considered

Applicable Standard/s: **RSS-210 Issue 10**
RSS-Gen Issue 5 Amendment 2
ANSI C63.10:2013

Date of issue: Bellaterra, 10 December 2021

M1: This report replaces and annuls the report with certificate number 21/36403394 dated 06-10-2021.

Modifications performed: FCC Id and IC fields have been added since they were skipped in the previous report. Software version updated. OCBW uncertainty added. Pages 1, 4, 7 and 9 are affected. It is responsibility of the petitioner to replace the previous version with this one.

Fernando Rivas Fernández
Technical Manager
Electrical and Electronics
LGAI Technological Center S.A.

The results refer only and exclusively to the sample, product or material delivered for testing in "Received Material" section below. The equipment has been tested under conditions stipulated by standard(s) quoted in this document.
This document will not be reproduced otherwise than in full.
This is the first page of the document, which consists of 27 pages. Device ID photographs are included in Annex 1. Test Setup photographs are included in Annex 2.

INDEX

1. EQUIPMENT RECEIVED AND TESTED 4

1.1. TEST CONFIGURATION 5

1.2. AUXILIARY AND CONTROL EQUIPMENT 5

1.3. INPUT/OUTPUT WIRES..... 5

2. APPLICABLE STANDARDS 6

2.1. TEST APPLICABLE STANDARDS 6

2.1.1. Acceptance criteria for the test 6

2.2 TEST FACILITIES ID 6

2.3 MEASURING UNCERTAINTIES 7

2.4 FIELD STRENGTH CALCULATION..... 7

2.5 MODIFICATIONS..... 7

2.6 USED EQUIPMENT..... 8

2.7 ENVIRONMENTAL CONDITIONS 8

3. RESULT 9

4. ANNEXES 10

4.1. TEST RESULTS.....10

4.1.1. Antenna requirements.....10

4.1.2. Radiated emissions11

4.1.3. Occupied bandwidth21

4.1.4. Transmission time23

4.1.5. Duty cycle.....25

Competences and Guarantees

LGAI Technological Center, S.A. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 9/LE 894.

In order to assure the traceability to other national and international laboratories, Applus+ Laboratories has a calibration and maintenance program for its measurement equipment.

Applus+ Laboratories guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at Applus+ Laboratories at the time of performance of the test.

Applus+ Laboratories is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test. The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of Applus+ Laboratories.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of Applus+ Laboratories.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of Applus+ Laboratories and the Accreditation Bodies.

1. EQUIPMENT RECEIVED AND TESTED

EQUIPMENT: TPMS Tire-Pressure Monitoring System			
Brand:	SCHRADER ELECTRONICS	Model:	AFFPK4
S/N:	DUT 1: 52FD7705	Power Supply Range:	3 V battery
	DUT 2: 52FD76F1		
	DUT 3: 52FD7684		
	DUT 4: 52FD7669		
SW Version:	V 1.0	HW Version:	N.A.
FCC Id:	MRXAFFPK4	IC:	2546A -AFFPK4
Maximum internal frequency:	433.92 MHz		

Product description:

(Information declared by the manufacturer, Applus + is not responsible)

The product is a Tyre Pressure Monitoring System (TPMS) Transmitter installed to the valve stem in each tyre of a vehicle. The device measures tyre pressure periodically and transmits this information by 433.92 MHz RF communication to a receiver inside the vehicle. In addition, the TPMS Transmitter performs the following functions:

- Determines a temperature compensated pressure value.
- Determines any abnormal pressure variations in the wheel.
- Monitors the state of the Transmitters' internal battery and informs the receiver of a low battery condition.

DESCRIPTION OF AVAILABLE ANTENNAS

- **INTEGRATED ANTENNAS:**
Internal PCB antenna

WORST-CASE CONFIGURATION AND MODE

A pre-exploratory is performed for each sample in order to determinate the sample with the worst emissions. Moreover, the radiation measurements are performed in X, Y, Z axis positioning in order to determine the worst case.

Moreover, the operation mode is set with the radio module ON. The radio module has two modes of operations:

- CW mode: the DUT is continuously transmitting.
- Normal mode: the DUT is transmitting bursts periodically.

Test product reception:	06/09/2021
Test initial date:	29/09/2021
Test final date:	30/09/2021

1.1. Test configuration

Power Supply:	3 V DC battery
Set-up:	Table-top
Test exercise:	The DUT is operated in continuous transmitting mode in order to measure its largest emissions level. For the transmission time test and the duty cycle test, the DUT is set to normal mode for periodic operation.
Equipment size:	H80 x W10 x D30 mm (height x width x depth)

1.2. Auxiliary and control equipment

AFFPK4 LF tool to switch the transmitter mode, provided by the manufacturer.

1.3. Input/output wires

The equipment under test does not any have input-output wires.

1.4. Modification performed

No modifications were performed.

2. APPLICABLE STANDARDS

2.1. TEST APPLICABLE STANDARDS

Test Summary:

Basic standard: ANSI C63.10:2013

☒ Radiated emissions:

☒ Intentional radiated emissions (Radiated) (9kHz - 6 GHz): 15.231 (e), 15.205
RSS-GEN 7.1, 8.9, 8.10 / RSS-210, A1.4

☒ Unwanted emissions into Restricted Frequency Bands (Radiated) (9kHz -6 GHz): 15.231
(e), 15.209 (a) / 15.205 (a)
RSS-GEN 7.1, 8.9, 8.10 / RSS-210

Note 1: Conducted Emission referred in FCC rule part 15.207 Not Applicable, since the EUT has an internal battery.

Note 2: The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Basic standard: ANSI C63.10:2013

☒ Occupied Bandwidth (20dB and 99%): FCC 15.231 (c) and RSS-210, A1.3 / RSS-GEN 6.7

☒ Transmission Time: FCC 15.231 (e) and RSS-210, A1.4

☒ Duty Cycle: FCC 15.231 (e) and RSS-GEN 6.10.

Note 1: The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Basic standard: ANSI C63.10:2013

☒ Antenna Requirements: FCC 15.203 and RSS-GEN 6.8.

Note: The DUT uses an integrated antenna.

2.1.1. Acceptance criteria for the test

According to standard

FCC 47 CFR Part 15 Subpart C (October 2020)¹
RSS-210 Issue 10
RSS-Gen Issue 5 Amendment 2
ANSI C63.10:2013

2.2 Test facilities ID

FCC Test Firm Registration Number:	507478
ISED Assigned Code:	5766A

2.3 Measuring uncertainties

Radiated emission tests (9 kHz to 1 GHz)	±4.3 dB
Radiated emission tests above 1 GHz to 40 GHz	±4.3 dB
Duty-cycle	±1%
OCBW	±2.31 kHz

Expanded uncertainty measurement is obtained multiplying the typical uncertainty measurement with a coverage factor $k=2$, which corresponds to a confidence level of 95% for a normal distribution.

2.4 Field Strength Calculation

The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading.

The basic equation is as follow:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength (Level)

- RA = Receiver Amplitude (Meter Reading)
- AF = Antenna Factor
- CF = Cable Factor
- AG = Amplifier Gain

Margin value = Emission level – Limit value

Example:

RA: 14.0dBμV / AF: 16.5 dBm-1 / CF: 3.5dB / AG: 15dB

- Total factor: 5dBm-1
- Field level: 19.0dBμV/m (-21.0dB for margin if limit is 40dBμV/m)

2.5 Modifications

No modifications were performed

2.6 USED EQUIPMENT

RF RADIATED EMISSION					
INSTRUMENT	BRAND	MODEL	NUMBER	LAST CALIBRATION	NEXT CALIBRATION
EMI RECEIVER	R&S	ESW 26	1041791	09/07/2020	09/01/2022
LOOP ANTENNA	EMCO	6502	05-ER-019	05/07/2021	05/07/2022
BILOG ANTENNA	SCHAWARZBECK	VULB 9162	142229	14/12/2020	14/12/2021
HORN ANTENNA	EMCO	3115	05-ER-182	25/11/2020	25/11/2021
ATENUADOR 3 DB	HUBER/SUHNER	6803.17.B	1042020	10/08/2021	10/08/2022
CABLE	HUBER/SUHNER	SF103/11N/16N/4000MM	1041909	28/01/2021	28/01/2022
CABLE	HUBER/SUHNER	SF104 WITH FERRITE	1042526	29/06/2021	29/06/2022
RF CABLE (WALL PANEL),	--	--	104572	23/08/2021	23/08/2022
SEMIANECHOIC CHAMBER SAC2	EUROSHIELD	TC2	104563	17/09/2021	17/09/2022
TEST SOFTWARE	ROHDE & SCHWARZ	EMC32 v.10.50.00	104624	--	--
MAST-TABLE CONTROLLER	COMTEST	4630 - 100	104369	--	--

AUXILIARY EQUIPMENT					
EQUIPMENT	BRAND	MODEL	NUMBER	LAST CALIBRATION	NEXT CALIBRATION
THERMOHIGROMETER	TESTO	608-H1	1042506	28/01/2021	28/01/2022

2.7 Environmental conditions

See results sheets

3. RESULT

PRODUCT: TPMS Tire-Pressure Monitoring System			
Brand:	SCHRADER ELECTRONICS	Model:	AFFPK4
S/N:	DUT 1: 52FD7705	Internal Id:	DUT 1: 11475/1
	DUT 2: 52FD76F1		DUT 2: 11475/2
	DUT 3: 52FD7684		DUT 3: 11475/3
	DUT 4: 52FD7669		DUT 4: 11475/4
FCC Id:	MRXAFFPK4	IC:	2546A -AFFPK4
TESTING		RESULTS	NOTES
Antenna Requirements		Pass	Note: 4
Intentional radiated emissions		Pass	Note: 4
Unwanted emissions into Restricted Frequency Bands.		Pass	Note: 4
Occupied Bandwidth (20dB and 99%)		Pass	Note: 4
Transmission Time		Pass	Note: 4
Duty Cycle		Pass	Note: 4
The criteria to give conformity in those cases where it is not implicit in the standard or specification will be, for EMC emissions tests, a non-simple binary decision rule will be followed with a safety zone equal to the value of the uncertainty ($w = U$). In this case, the upper limit of the value of the probability of false acceptance, according to ILAC G8, is 2.5% and the criteria notes are: 1: The measured results are above the upper limit, even considering the uncertainty interval. 2: The measured results are above the specified limits, but within the uncertainty interval. It is therefore not possible to state compliance based on the 95% level of confidence. However, the results indicate that non-compliance is more probable than compliance 3: The measured results are below the specified limits, but within the uncertainty interval. It is therefore not possible to state compliance based on the 95% level of confidence. However, the results indicate that compliance is more probable than non-compliance 4: The measured results are within the limits, including the uncertainty interval.			

Service Quality Assurance

Applus+, guarantees that this work has been made in accordance with our Quality and Sustainability System, fulfilling the contractual conditions and legal norms.

Within our improvement program we would be grateful if you would send us any commentary that you consider opportune, to the person in charge who signs this document, or to the Quality Manager of Applus+, in the following e-mail address:

satisfaccion.cliente@applus.com

4. ANNEXES

4.1. Test Results

4.1.1. Antenna requirements

Standard applicable:

According to the subpart 15.203 of the FCC Rules/Regulations, an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

Test result: Pass

- The antenna of the Tire Pressure Monitoring System Sensor is permanently attached.
- The Tire Pressure Monitoring System Sensor unit complies with the requirement of §15.203

4.1.2. Radiated emissions

Standard applicable:

According to 15.231 (e), the field strength of emissions from intentional radiators shall not exceed the following limits:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emission (microvolts/meter)
40.66		
40.66-40.70	1.000	100
70-130	500	50
130-174	500 to 1.500 ¹	50 to 150 ¹
174-260	1.500	150
260-470	1.500 to 5.000 ¹	150 to 500 ¹
Above 470	5.000	500

¹Linear interpolations.

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in 15.209, whichever limit permits a higher field strength.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in part 15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements start below or at the lowest crystal frequency.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

For 15.205 requirement:

In case the emission fall within the restricted band specified on 15.205(a), shown in the following table, then the 15.209(a) limit has to be followed.

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.49 – 0.51 MHz.

Emission limits from an intentional radiator, specified in section 15.209 (a), follow:

Restricted Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log ($\mu\text{V/m}$)	300
0.490~1.705	2400/F(KHz)	20 log ($\mu\text{V/m}$)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3


For RSS-Gen Section 8.10 Requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.


Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (Hz)
0.090 - 0.110	16.42 - 16.423	1645.5 - 1646.5	9.0 - 9.2
0.495 - 0.505	16.69475 - 16.69525	1660 - 1710	9.3 - 9.5
2.1735 - 2.1905	16.80425 - 16.80475	1718.8-1722.2	10.6 - 12.7
3.020 - 3.026	25.5 - 25.67	2200 - 2300	13.25 - 13.4
4.125 - 4.128	37.5 - 38.25	2310 - 2390	14.47 - 14.5
4.17725 - 4.17775	73 - 74.6	2483.5 - 2500	15.35 - 16.2
4.17725 - 4.17775	73 - 74.6	2655 - 2900	17.7 - 21.4
5.677 - 5.683	108 - 138	3260 - 3267	22.01 - 23.12
6.215 - 6.218	149.9 - 150.05	3332 - 3339	23.6 - 24.0
6.26775 - 6.26825	156.52475 - 156.52525	3345.5 - 3358	31.2 - 31.8
6.31175 - 6.31225	156.7 - 156.9	3500 - 4400	36.43 - 36.5
8.291 - 8.294	162.0125 - 167.17	4500 - 5150	Above 38.6
8.362 - 8.366	167.72 - 173.2	5350 - 5460	
8.37625 - 8.38675	240 - 285	7250 - 7750	
8.41425 - 8.41475	322 - 335.4	8025 - 8500	
12.29 - 12.293	399.9 - 410		
12.51975 - 12.52025	608 - 614		
12.57675 - 12.57725	960 - 1427		
12.57675 - 12.57725	608 - 614		

Test Configuration


- **For radiated emissions below 30 MHz:**

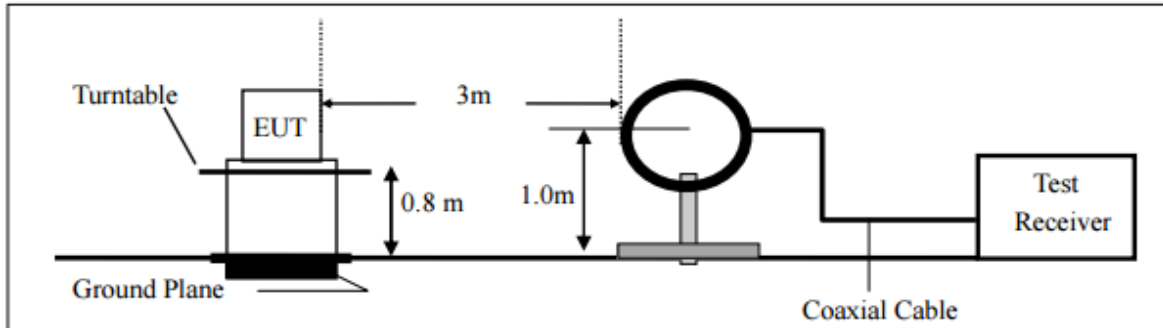

- **For radiated emissions from 30 MHz to 1000 MHz:**

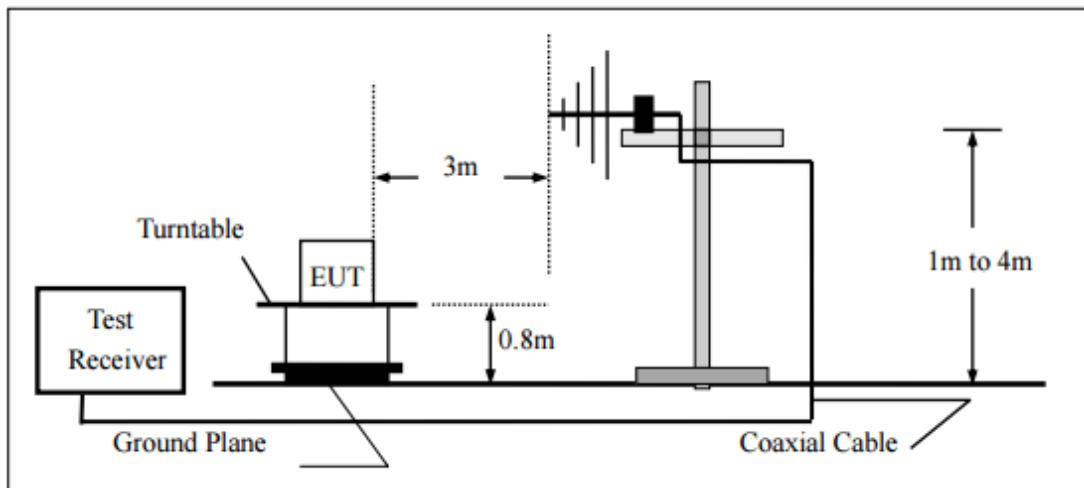

- **For radiated emissions above 1000 MHz:**

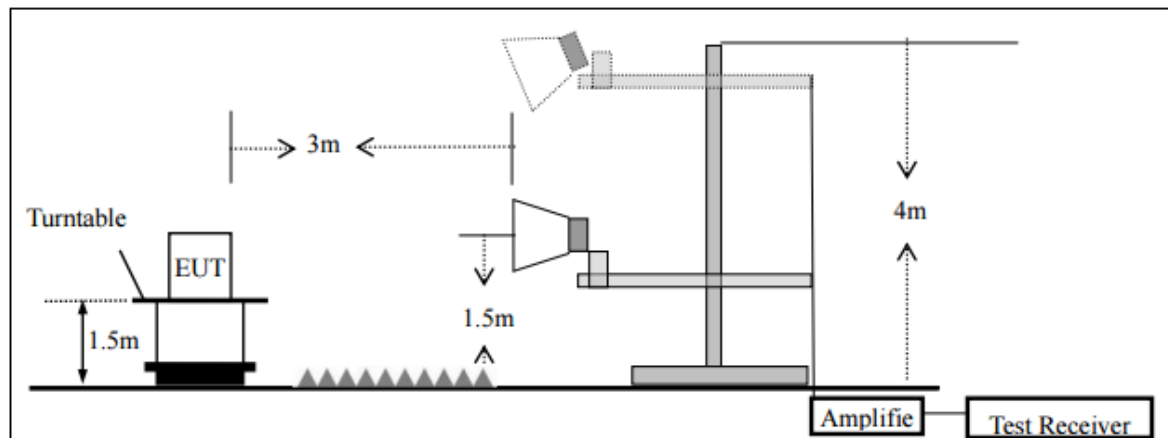

Test Procedures

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.231(e) and FCC Part 15.209 Limit.

The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.

The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The EUT was set to continuous mode of operation for convenience.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.


During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.


Test results:

RADIATED EMISSIONS (RADIATED)													
Technician: Jose M. Llauradó		Test Area: Semi-anechoic chamber, SAC-2											
Test date: 29/09/2021													
Basic standard: ANSI C63.10:2013													
<table border="1"> <tr> <td>Temperature:</td> <td>22.1</td> <td>°C</td> </tr> <tr> <td>Humidity:</td> <td>55.4</td> <td>%</td> </tr> <tr> <td>Atm. Pressure:</td> <td>997.8</td> <td>hPa</td> </tr> </table>					Temperature:	22.1	°C	Humidity:	55.4	%	Atm. Pressure:	997.8	hPa
Temperature:	22.1	°C											
Humidity:	55.4	%											
Atm. Pressure:	997.8	hPa											
EUT:	Test Area	Distance	Maximization	Evaluation									
Table-top	SAC2	3 m	Worst-case orientation	Individual									
RESULTS: Pass													
Identification	Emissions		Main emission source and type										
DUT: Device under test AUX: Auxiliary Devices SYS: DUT + AUX BB : Broad-band NB : Narrow-band QP: Quasi-peak	P < Limit - I AV < Limit - I I=Uncertainty		DUT, NB										
Comments:													

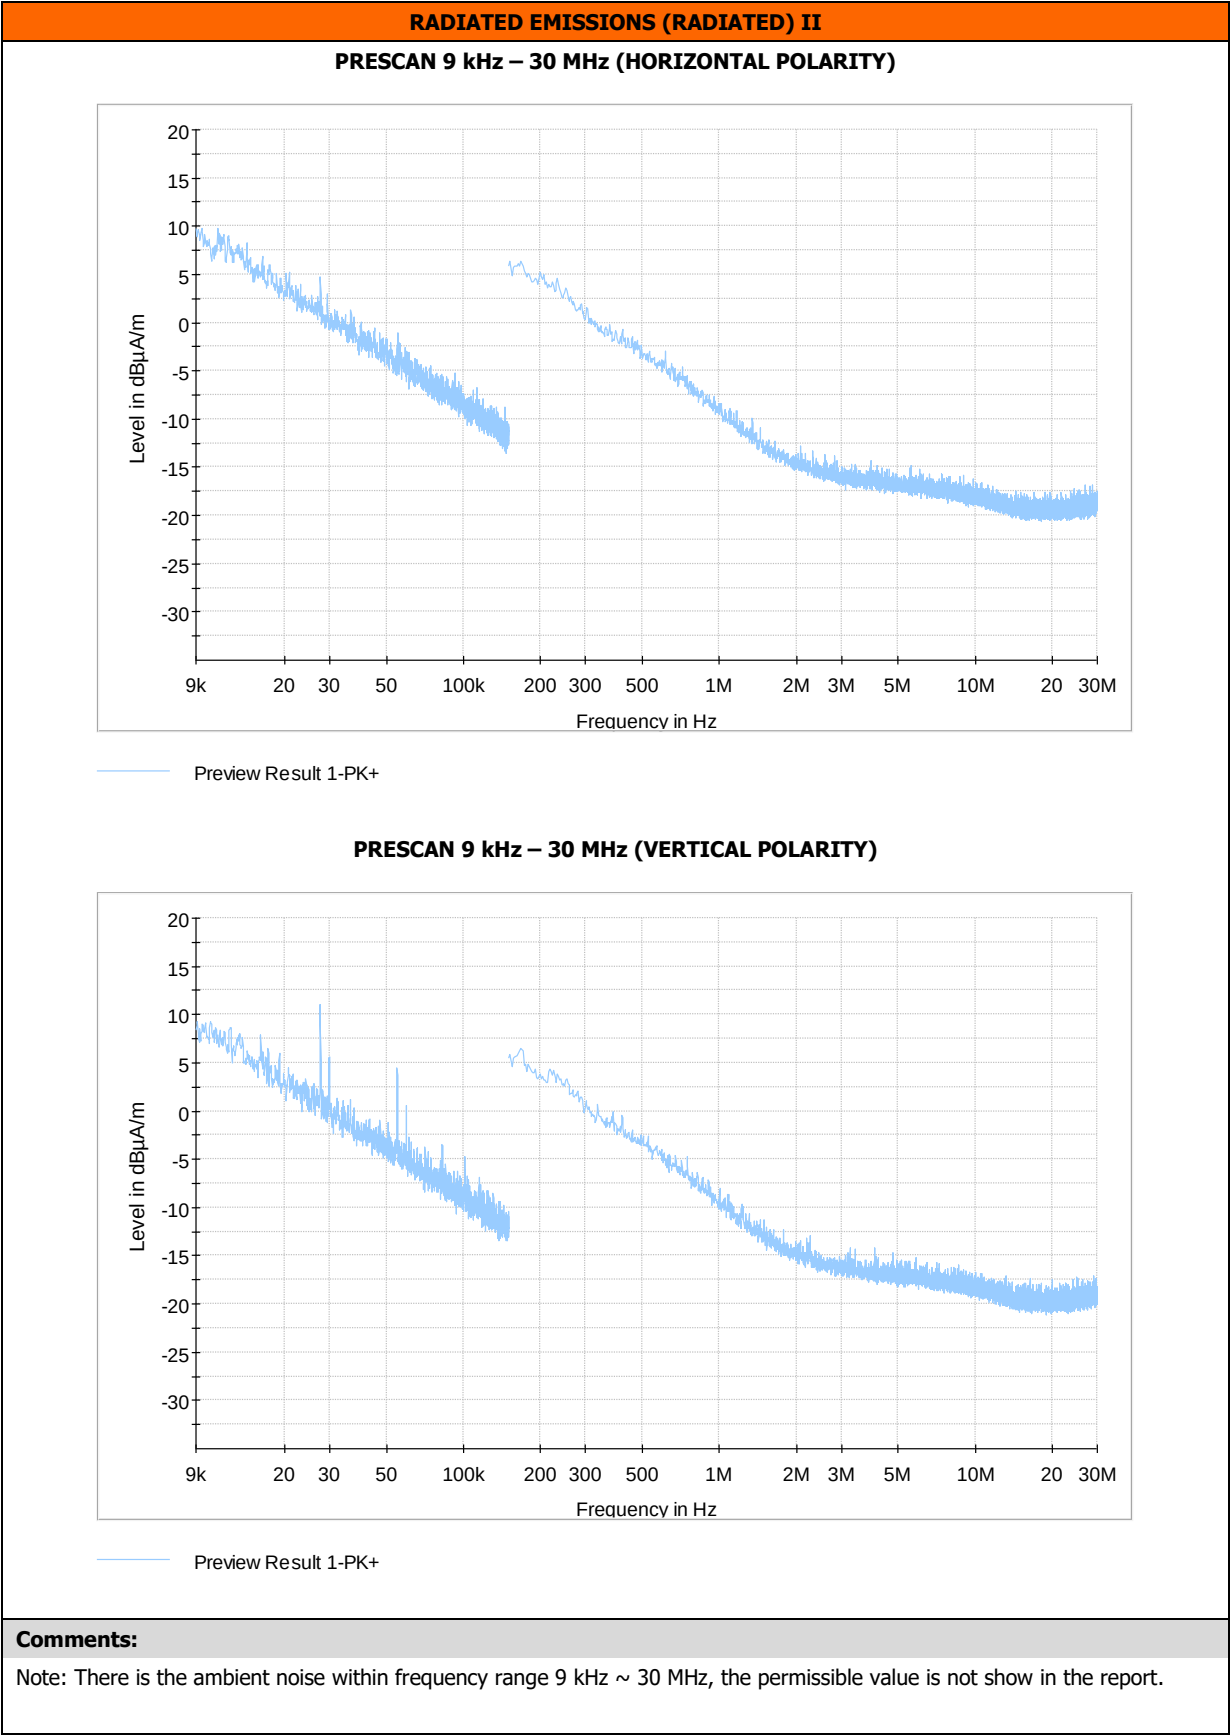

RADIATED EMISSIONS (RADIATED) III

PRESCAN 30 MHz - 1 GHz (HORIZONTAL POLARITY)

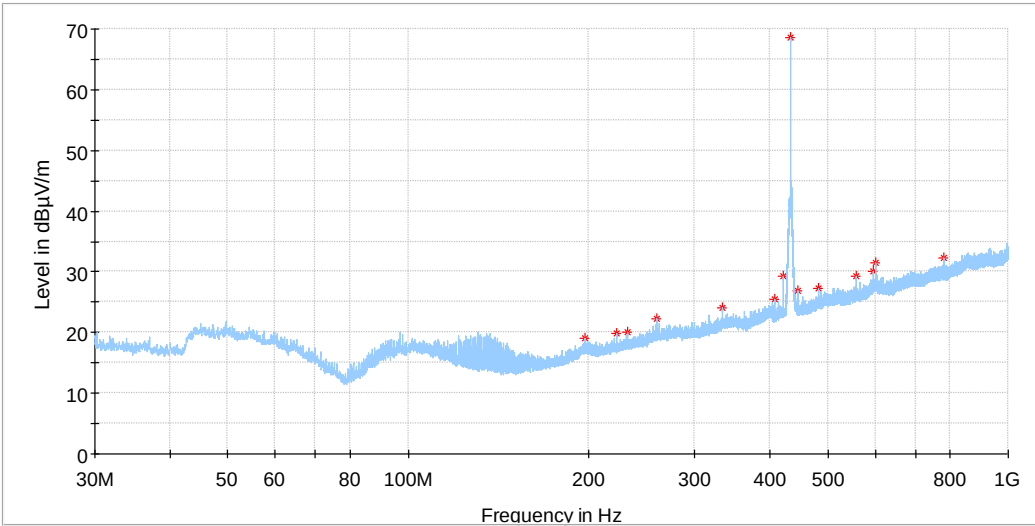

* PK+ Marker Preview Result 1-PK+

Comment

FINAL MEASUREMENTS

Frequency (MHz)	MaxPeak level (dBµV/m)	Duty Cycle Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Corr. (dB/m)	Type
433.890	68.56	N.A.	92.866	-24.306	145.0	H	21.8	PK
433.890	42.64	25.92	72.866	-30.226	145.0	H	21.8	AV
600.000	31.44	N.A.	72.866	-41.426	145.0	H	25.4	PK
600.000	5.52	25.92	52.866	-47.346	145.0	H	25.4	AV
781.020	32.28	N.A.	72.866	-40.586	145.0	H	27.6	PK
781.020	6.36	25.92	52.866	-46.506	145.0	H	27.6	AV

Comments:

N.A.: Not Applied


Note 1: All spurious emission limit applied according to the requirement 15.231 (e), corresponding to intentional radiators with the fundamental frequency at 433.92 MHz.

Note 2: The rest of spurious are not analysed in the table above because their peak level is lower and therefore, they fulfil the limit required in the standard 15.231 (e).

Emission Level = Measured Level + Correction Factor

RADIATED EMISSIONS (RADIATED) IV

PRESCAN 30 MHz - 1 GHz (VERTICAL POLARITY)

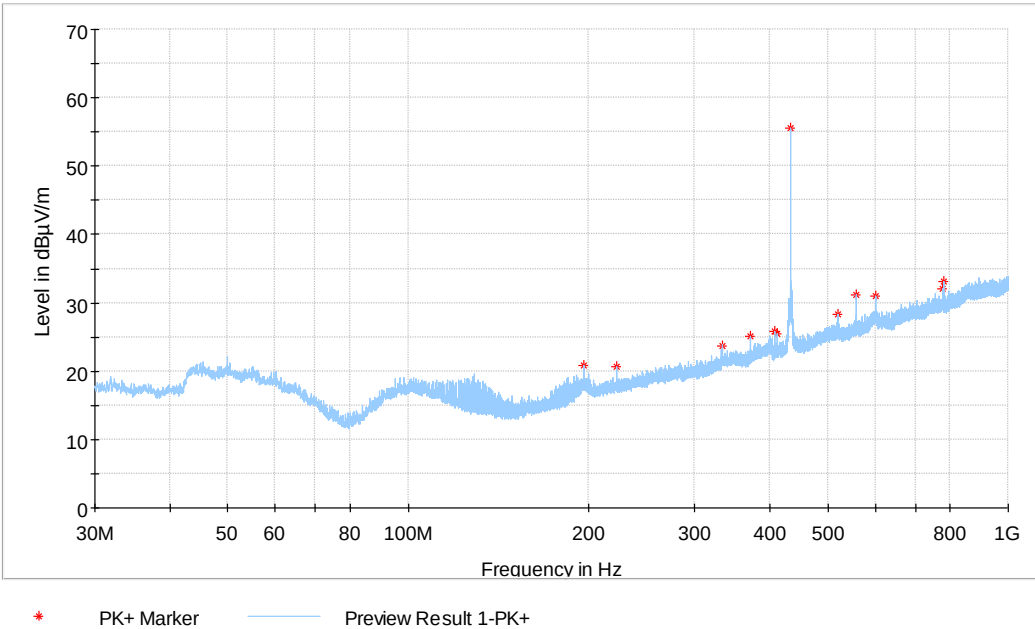

FINAL MEASUREMENTS

Frequency (MHz)	MaxPeak level (dBµV/m)	Duty Cycle Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Corr. (dB/m)	Type
433.890	55.57	N.A.	92.866	-37.296	145.0	V	21.8	PK
433.890	29.65	25.92	72.866	-43.216	145.0	V	21.8	AV
556.830	31.1	N.A.	72.866	-41.766	145.0	V	24.1	PK
556.830	5.18	25.92	52.866	-47.686	145.0	V	24.1	AV
600.000	31.07	N.A.	72.866	-41.796	145.0	V	25.4	PK
600.000	5.15	25.92	52.866	-47.716	145.0	V	25.4	AV
781.110	33.11	N.A.	72.866	-39.756	145.0	V	27.6	PK
781.110	7.19	25.92	52.866	-45.676	145.0	V	27.6	AV


Comments:

N.A.: Not Applied

Note 1: All spurious emission limit applied according to the requirement 15.231 (e), corresponding to intentional radiators with the fundamental frequency at 433.92 MHz.


Note 2: The rest of spurious are not analysed in the table above because their peak level is lower and therefore, they fulfil the limit required in the standard 15.231 (e).

Emission Level = Measured Level + Correction Factor

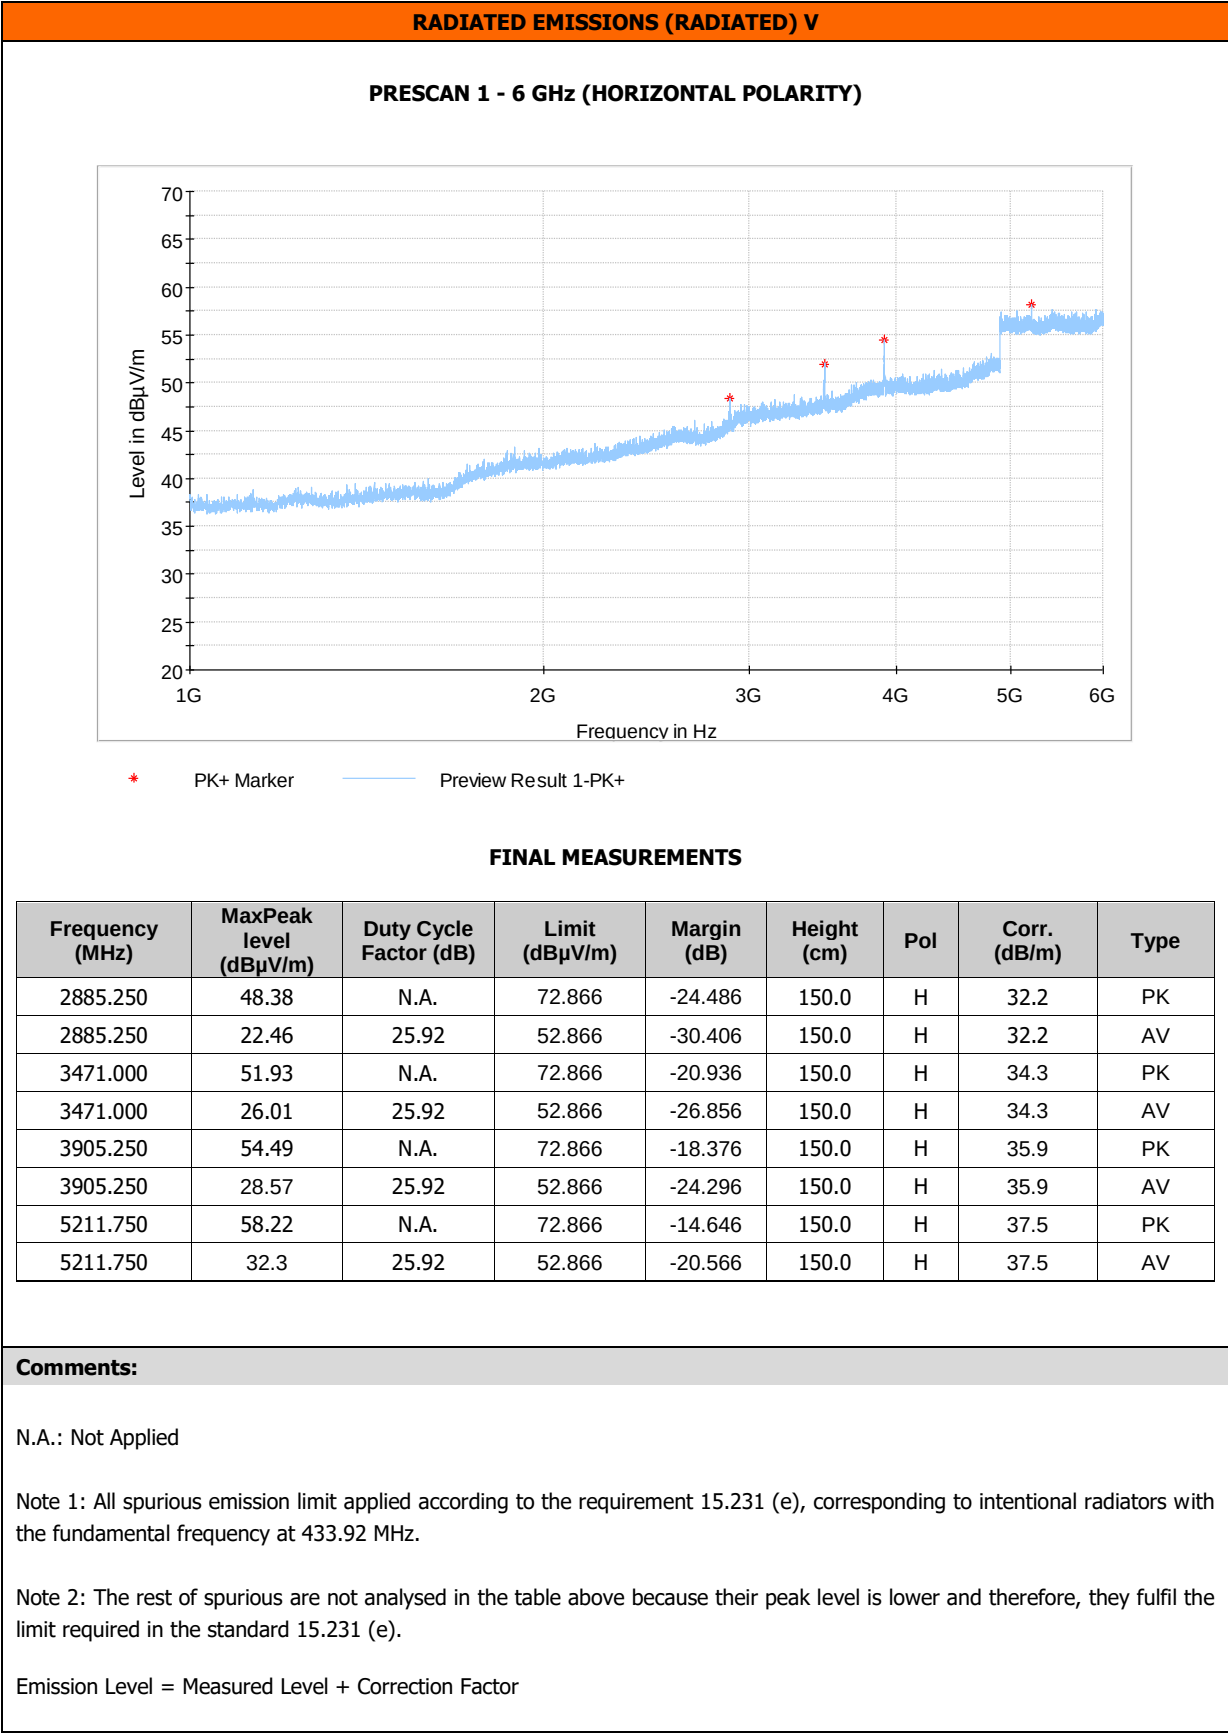

RADIATED EMISSIONS (RADIATED) VI

PRESCAN 1 - 6 GHz (VERTICAL POLARITY)

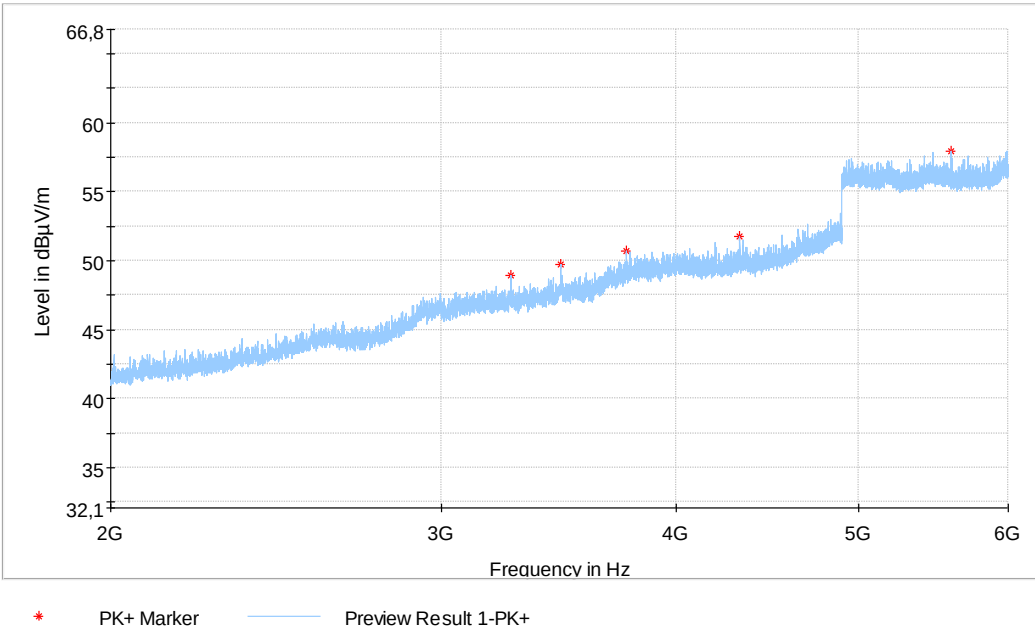

FINAL MEASUREMENTS

Frequency (MHz)	MaxPeak level (dBµV/m)	Duty Cycle Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Corr. (dB/m)	Type
3265.750	48.90	N.A.	72.866	-23.966	150.0	V	34.0	PK
3265.750	22.98	25.92	52.866	-29.886	150.0	V	34.0	AV
3471.000	49.76	N.A.	72.866	-23.106	150.0	V	34.3	PK
3471.000	23.84	25.92	52.866	-29.026	150.0	V	34.3	AV
4322.000	51.78	N.A.	72.866	-21.086	150.0	V	35.6	PK
4322.000	25.86	25.92	52.866	-27.006	150.0	V	35.6	AV
5595.500	57.92	N.A.	72.866	-14.946	150.0	V	38.1	PK
5595.500	32.00	25.92	52.866	-20.866	150.0	V	38.1	AV

Comments:

N.A.: Not Applied

Note 1: All spurious emission limit applied according to the requirement 15.231 (e), corresponding to intentional radiators with the fundamental frequency at 433.92 MHz.

Note 2: The rest of spurious are not analysed in the table above because their peak level is lower and therefore, they fulfil the limit required in the standard 15.231 (e).

Emission Level = Measured Level + Correction Factor

4.1.3.Occupied bandwidth


Standard applicable:

According to FCC Part 15.231(c), the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier

Test procedure

With the DUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band. The EUT was set to continuous mode of operation for convenience.

Test setup

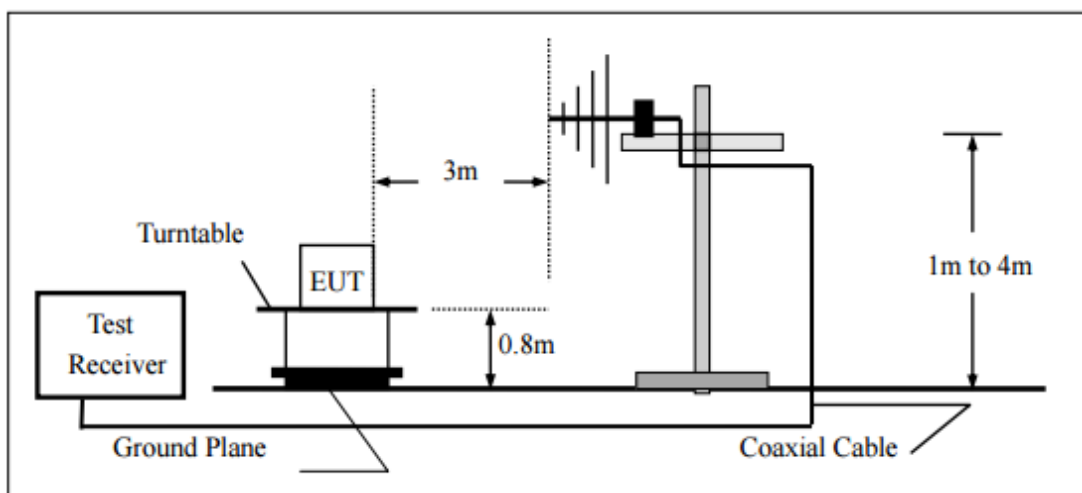

Note: relative measurements were performed at a different distance.

Occupied Bandwidth

Test Frequency (MHz)	20 dB BW (kHz)	99% BW (kHz)	Limit (kHz)	Result
433.90	0.520	0.440	≤ 1084.75	Pass

Limit = Fundamental Frequency * 0.25% = 433.90 MHz * 0.25% = 1084.75 kHz

433.92 MHz 99% and 20 dB - Bandwidth

MultiviewReceiverSpectrum

Ref Level -15.00 dBmAtt 10 dBInput 1 ACPS OffSWT 1 sVBW 1 kHzMode Auto SweepFrequency 433.9001364 MHz

1 Occupied Bandwidth

CF 433.9001364 MHz1001 pts200.0 Hz/Span 2.0 kHz

2 Marker Table

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		433.9001084 MHz	-41.69 dBm	Occ Bw	439.764610887 Hz
T1	1		433.89986804 MHz	-55.94 dBm	Occ Bw Centroid	433.900087923 MHz
T2	1		433.90030781 MHz	-56.01 dBm	Occ Bw Freq Offset	-48.477007806 Hz
M2	1		433.8998287 MHz	-61.55 dBm		
D3	M2	1	519.5 Hz	-0.37 dB		

Instrument warming up...Measuring...30.09.2021 14:16:20Ref LevelRBW

Comments:

4.1.4. Transmission time


Standard applicable:

According to FCC 15.231(e), devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

Test procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, then set the spectrum analyzer to Zero Span for the release time reading.

Test setup

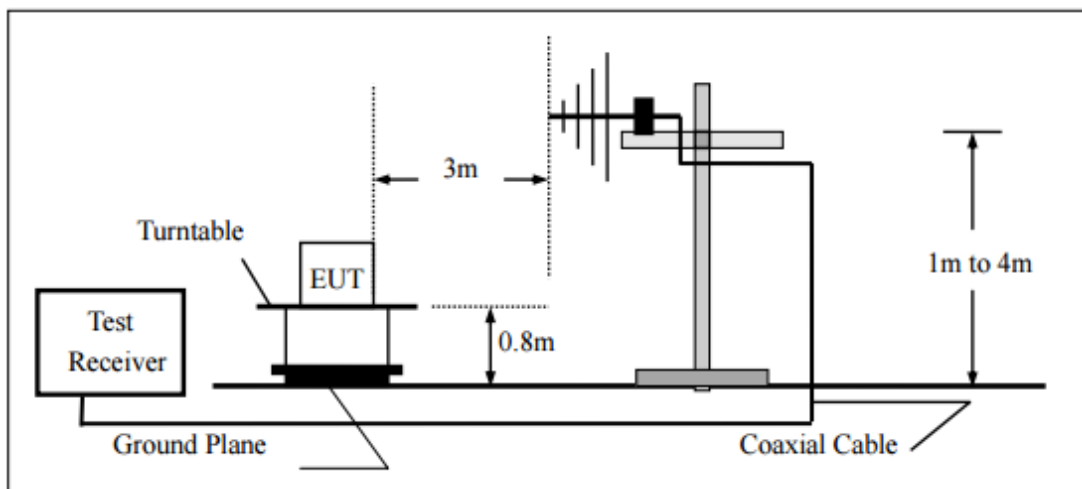


Test result:


TRANSMISSION TIME				
Test Frequency (MHz)	Item	Measured Value	Limit	Result
433.92	Transmission time	224.76 ms	≤ 1 s	Pass
	Silent Time	20.44 s	≥ 10 s	Pass
	Silent Time/Transmission time	90.94 s	≥ 30 times	Pass

Limit for Silent Time = 30 times * Duration of the transmission = 6.74 s

Silent Time for 433.92MHz

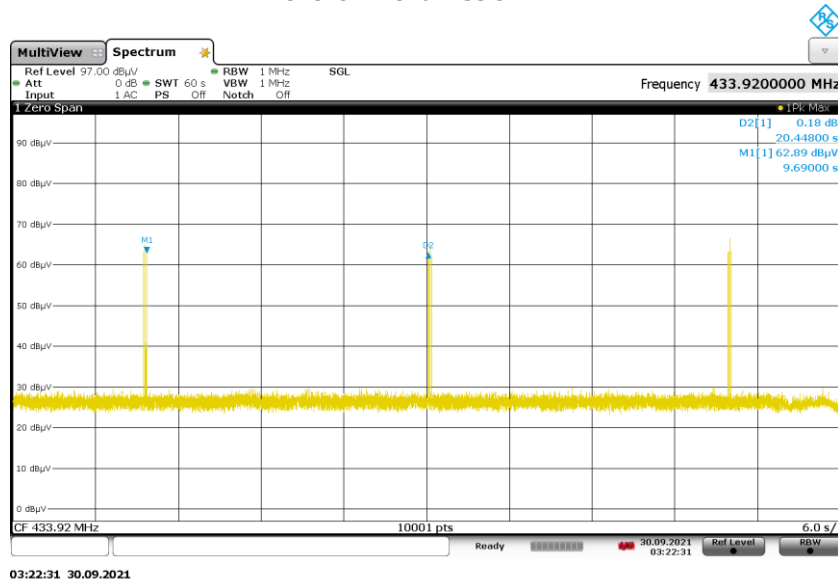

Transmission time for 433.92MHz

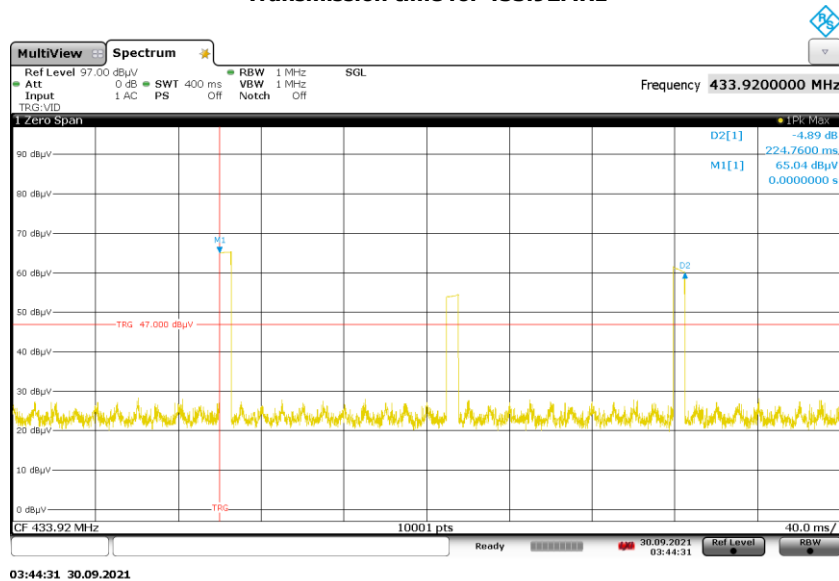

Comments:

Note 1: Radio module is ON.

4.1.5.Duty cycle


Standard applicable:

According to FCC Part 15.231(e) and 15.35(c), for pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.


Test procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to fundamental frequency, then set the spectrum analyzer to Zero Span for the release time reading.

Test setup

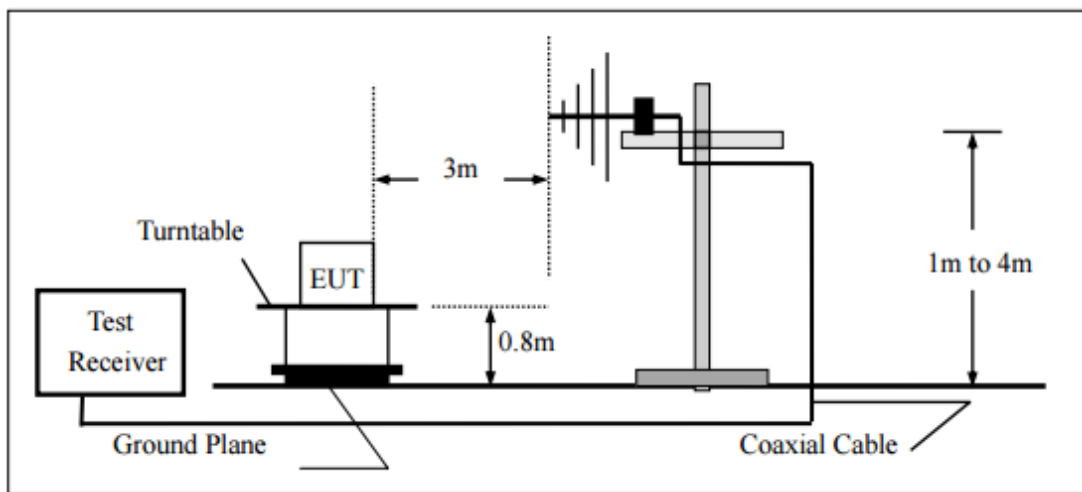

Test result:

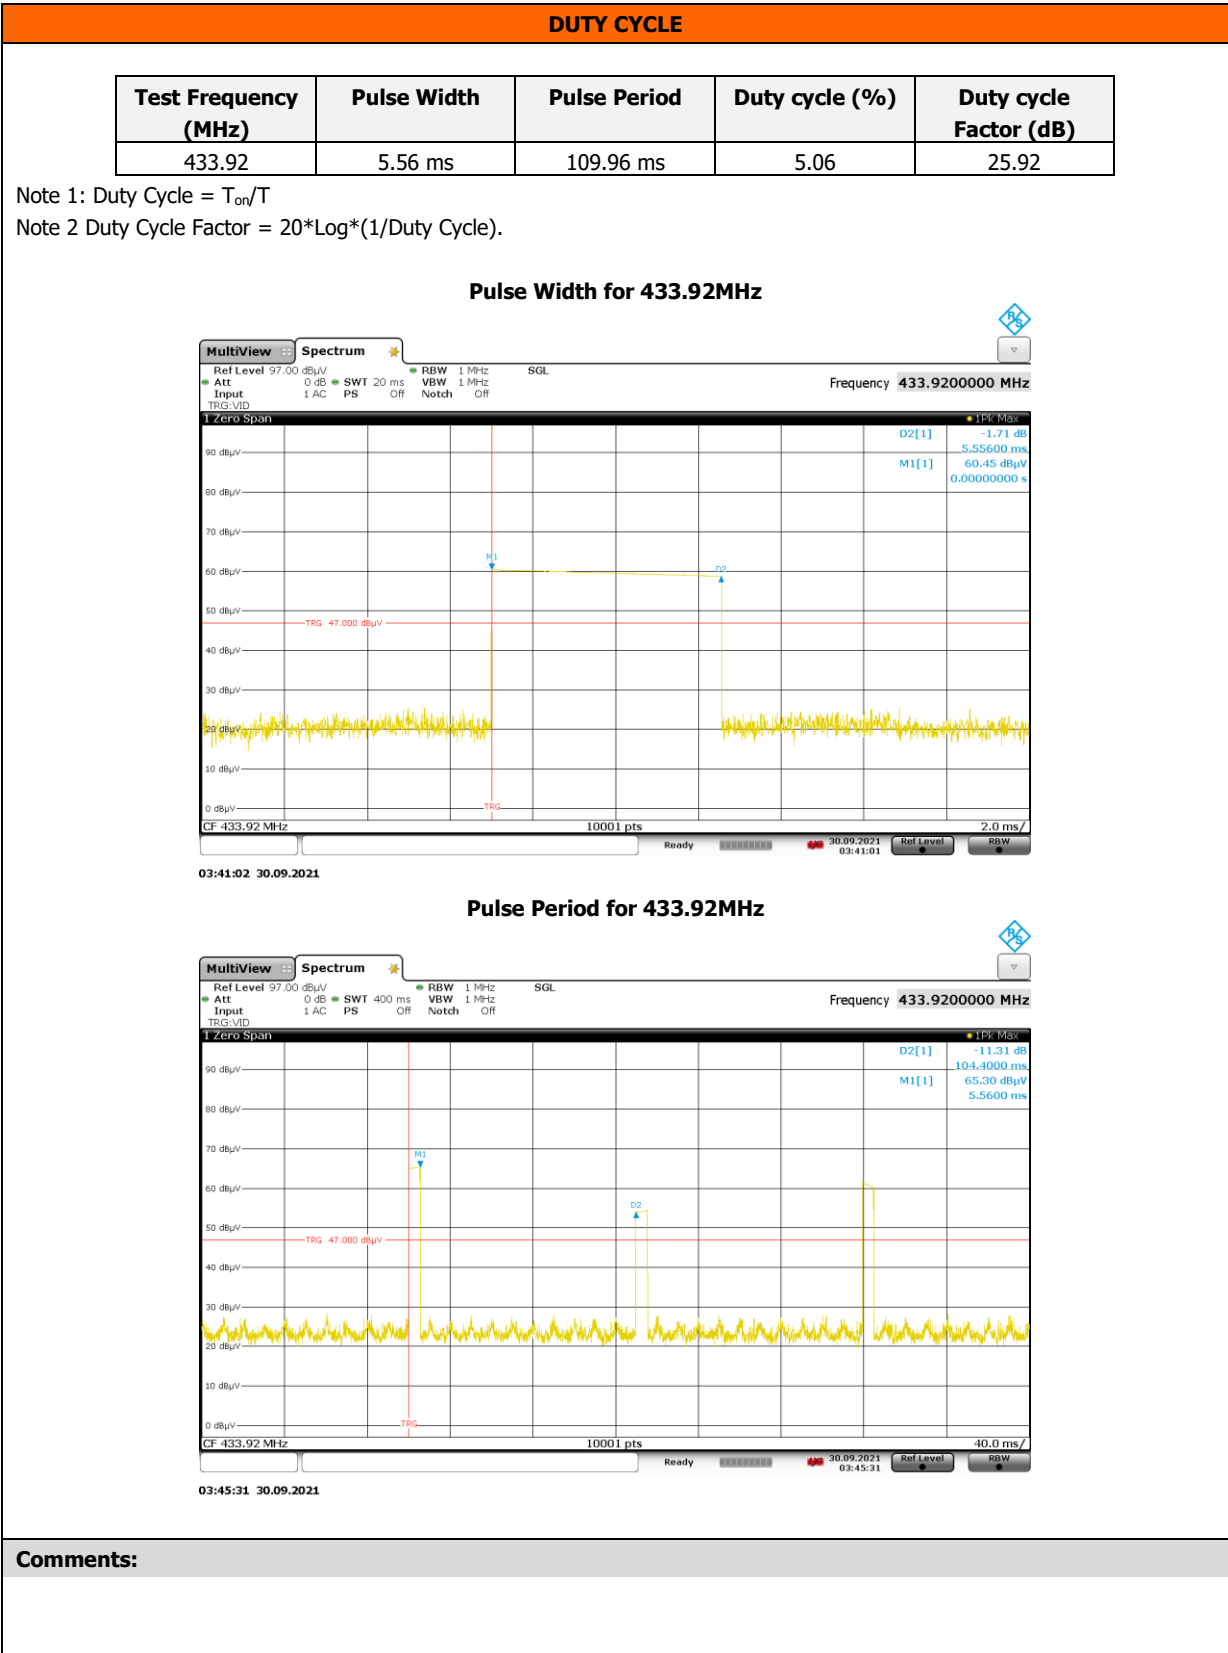

END OF TEST REPORT