



Willow Run Test Labs, LLC  
8501 Beck Road, Building 2227  
Belleville, Michigan 48111 USA  
Tel: (734) 252-9785  
Fax: (734) 926-9785  
e-mail: info@wrtest.com

Testing of  
**Electromagnetic Emissions**

per

**USA: CFR Title 47, Part 15.231(e)**  
**Canada: IC RSS-210/GENe**

are herein reported for

**Schrader Electronics**  
**AG6SP3-F, AG6SP3-D**

Test Report No.: 20140822-01r1  
Copyright © 2014

Applicant/Provider:  
Schrader Electronics

11 Technology Park, Belfast Road, Antrim Northern Ireland BT41 1QS United Kingdom  
Phone: +44 28 9448 3067, Fax: +44 28 9446 8440  
Contact Person: James Kyle; jakyle@schrader.co.uk


Measured by:

  
Dr. Joseph Brunett, EMC-002790-NE

Report Approved by:

  
Dr. Joseph Brunett, EMC-002790-NE

Report by:

  
Dr. Joseph Brunett, EMC-002790-NE

Report Date of Issue:

August 22, 2014

**Results of testing completed on (or before) August 22, 2014 are as follows.**

**Emissions:** The transmitter intentional emissions **COMPLY** with the regulatory limit(s) by no less than 12.1 dB.  
Transmit chain spurious harmonic emissions **COMPLY** by no less than 21.8 dB.

## Contents

|          |                                                                     |          |
|----------|---------------------------------------------------------------------|----------|
| <b>1</b> | <b>Test Specifications, General Procedures, and Location</b>        | <b>3</b> |
| 1.1      | Test Specification and General Procedures . . . . .                 | 3        |
| 1.2      | Test Location and Equipment Used . . . . .                          | 4        |
| <b>2</b> | <b>Configuration and Identification of the Equipment Under Test</b> | <b>5</b> |
| 2.1      | Description and Declarations . . . . .                              | 5        |
| 2.1.1    | EUT Configuration . . . . .                                         | 5        |
| 2.1.2    | Modes of Operation . . . . .                                        | 5        |
| 2.1.3    | Variants . . . . .                                                  | 6        |
| 2.1.4    | Test Samples . . . . .                                              | 6        |
| 2.1.5    | Functional Exerciser . . . . .                                      | 6        |
| 2.1.6    | Modifications Made . . . . .                                        | 6        |
| 2.1.7    | Production Intent . . . . .                                         | 6        |
| 2.1.8    | Declared Exemptions and Additional Product Notes . . . . .          | 6        |
| <b>3</b> | <b>Emissions</b>                                                    | <b>7</b> |
| 3.1      | General Test Procedures . . . . .                                   | 7        |
| 3.1.1    | Radiated Test Setup and Procedures . . . . .                        | 7        |
| 3.1.2    | Conducted Emissions Test Setup and Procedures . . . . .             | 9        |
| 3.1.3    | Power Supply Variation . . . . .                                    | 9        |
| 3.1.4    | Thermal Variation . . . . .                                         | 9        |
| 3.2      | Intentional Emissions . . . . .                                     | 10       |
| 3.2.1    | Fundamental Emission Pulsed Operation . . . . .                     | 10       |
| 3.2.2    | Fundamental Emission Bandwidth . . . . .                            | 13       |
| 3.2.3    | Fundamental Emission . . . . .                                      | 15       |
| 3.3      | Unintentional Emissions . . . . .                                   | 16       |
| 3.3.1    | Transmit Chain Spurious Emissions . . . . .                         | 16       |

## List of Tables

|   |                                                       |    |
|---|-------------------------------------------------------|----|
| 1 | Willow Run Test Labs, LLC Equipment List. . . . .     | 4  |
| 2 | EUT Declarations. . . . .                             | 5  |
| 3 | Pulsed Emission Characteristics (Duty Cycle). . . . . | 10 |
| 4 | Intentional Emission Bandwidth. . . . .               | 13 |
| 5 | Fundamental Radiated Emissions. . . . .               | 15 |
| 6 | Transmit Chain Spurious Emissions. . . . .            | 16 |

## List of Figures

|   |                                                       |    |
|---|-------------------------------------------------------|----|
| 1 | Photos of EUT. . . . .                                | 5  |
| 2 | EUT Test Configuration Diagram. . . . .               | 6  |
| 3 | Radiated Emissions Diagram of the EUT. . . . .        | 7  |
| 4 | Radiated Emissions Test Setup Photograph(s). . . . .  | 8  |
| 5 | Pulsed Emission Characteristics (Duty Cycle). . . . . | 11 |
| 5 | Pulsed Emission Characteristics (Duty Cycle). . . . . | 12 |
| 6 | Intentional Emission Bandwidth. . . . .               | 14 |

# 1 Test Specifications, General Procedures, and Location

## 1.1 Test Specification and General Procedures

The ultimate goal of Schrader Electronics is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Schrader Electronics AG6SP3-F, AG6SP3-D for compliance to:

| Country/Region | Rules or Directive          | Referenced Section(s)        |
|----------------|-----------------------------|------------------------------|
| United States  | Code of Federal Regulations | CFR Title 47, Part 15.231(e) |
| Canada         | Industry Canada             | IC RSS-210/GENe              |

In association with the rules and directives outlined above, the following specifications and procedures are followed herein.

|                 |                                                                                                                                        |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------|
| ANSI C63.4-2003 | "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" |
| Industry Canada | "The Measurement of Occupied Bandwidth"                                                                                                |

## 1.2 Test Location and Equipment Used

**Test Location** The EUT was fully tested by **Willow Run Test Labs, LLC**, 8501 Beck Road, Building 2227, Belleville, Michigan 48111 USA. The Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: 688478) and with Industry Canada, Ottawa, ON (File Ref. No: IC 8719A-1).

**Test Equipment** Pertinent test equipment used for measurements at this facility is listed in Table 1. The quality system employed at Willow Run Test Labs, LLC has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 1: Willow Run Test Labs, LLC Equipment List.

| Description                                  | Manufacturer/Model | SN         | Quality Number     | Last Cal By / Date Due   |
|----------------------------------------------|--------------------|------------|--------------------|--------------------------|
| <b>Antennas</b>                              |                    |            |                    |                          |
| Shielded Loop (9 kHz - 50 MHz)               | EMCO/6502          | 2855       | UMLOOP1            | UMRL / July-2015         |
| Dipole Set (20 MHz - 1000 MHz)               | EMCO/3121C         | 9504-1121  | DIPEMC001          | Liberty Labs / Sept-2016 |
| Bicone (20 MHz - 250 MHz)                    | JEF                | 1          | BICJEF001          | UMRL / July-2015         |
| Bicone (200 MHz - 1000 MHz)                  | JEF                | 1          | SBICJEF001         | UMRL / July-2015         |
| Log-Periodic Array (200 MHz - 1000 MHz)      | JEF/Isbell         | 1          | LOGJEF001          | UMRL / July-2015         |
| Ridge-Horn Antenna                           | Univ. of Michigan  | 5          | UMHORN005          | UMRL / July-2015         |
| L-Band                                       | JEF                |            | HRNL001            | WRTL / July-2015*        |
| LS-Band Horns                                | JEF/NRL            | 001, 002   | HRN15001, HRN15002 | WRTL / July-2015*        |
| S-Band Horns                                 | Scientific-Atlanta | 1854       | HRNSB001           | WRTL / July-2015*        |
| C-Band                                       | JEF/NRL            | 1          | HRNC001            | WRTL / July-2015*        |
| XN-Band Horns                                | JEF/NRL            | 001, 002   | HRNXN001, HRNXN002 | WRTL / July-2015*        |
| X-Band Horns                                 | JEF/NRL            | 001, 002   | HRNXB001, HRNXB002 | WRTL / July-2015*        |
| Ku-Band Horns                                | JEF/NRL            | 001, 002   | HRNKU001, HRNKU002 | WRTL / July-2015*        |
| Ka-Band Horns                                | JEF/NRL            | 001, 002   | HRNKA001, HRNKA002 | WRTL / July-2015*        |
| Quad-Ridge Horns                             | Condor AS-48461    | C35200     | QRH218001          | WRTL / July-2015         |
| <b>Analyzers &amp; Generators</b>            |                    |            |                    |                          |
| Spectrum Analyzer                            | HP/8593E           | 3649A02722 | HP8593E001         | DTI / Nov-2014           |
| Spectrum Analyzer                            | R&S/FSV30          | 101660     | RSFSV30001         | R&S / Mar-2015           |
| Radio Test Set                               | R&S/CMU200         | 100104     | RSCMU20001         | Not Necessary            |
| <b>Line Impedance Stabilization Networks</b> |                    |            |                    |                          |
| LISN                                         | EMCO               | 9304-2081  | LISNEM001          | WRTL / Jan-2015          |

\* Verification Only - Standard Gain Horn Antennas

## 2 Configuration and Identification of the Equipment Under Test

### 2.1 Description and Declarations

The equipment under test is a wireless tire pressure and temperature sensor. The EUT is approximately 50 x 70 x 30 mm in dimension, and is depicted in Figure 1. It is powered by a 3 VDC Lithium cell battery. In use, this device is permanently affixed inside the tire of a motor vehicle. Table 2 outlines provider declared EUT specifications.



Figure 1: Photos of EUT.

Table 2: EUT Declarations.

|                             |                   |                            |                                         |
|-----------------------------|-------------------|----------------------------|-----------------------------------------|
| <b>General Declarations</b> |                   |                            |                                         |
| <b>Equipment Type:</b>      | TPMS              | <b>Country of Origin:</b>  | UK                                      |
| <b>Nominal Supply:</b>      | 3 VDC             | <b>Oper. Temp Range:</b>   | -40° C to +125° C                       |
| <b>Frequency Range:</b>     | 314.6 – 315.4 MHz | <b>Antenna Dimension:</b>  | 1 cm loop (approx)                      |
| <b>Antenna Type:</b>        | PCB trace         | <b>Antenna Gain:</b>       | -27 dBi (approx)                        |
| <b>Number of Channels:</b>  | 1                 | <b>Channel Spacing:</b>    | Not Applicable                          |
| <b>Alignment Range:</b>     | Not Declared      | <b>Type of Modulation:</b> | ASK                                     |
| <b>United States</b>        |                   |                            |                                         |
| <b>FCC ID Number:</b>       | MRXAG6SP3         | <b>Classification:</b>     | DSC                                     |
| <b>Canada</b>               |                   |                            |                                         |
| <b>IC Number:</b>           | 2546A-AG6SP3      | <b>Classification:</b>     | Remote Control Device, Vehicular Device |

#### 2.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.

#### 2.1.2 Modes of Operation

This device is capable of three key modes of operation. Upon manually activated LF interrogation (through the use of special LF tool at a vehicle dealership), the EUT responds with a single ASK transmission containing a number of frames used to configure the device with the vehicle. When the EUT is placed in the vehicle tire and the vehicle drives, it can, in the worst case, periodically transmit where the duration of each transmission is always less than 1 second and the silent period between transmissions is at least 30 times the duration of the transmission, and never less than 10 seconds. In the case of an emergency condition, the EUT will transmit tire pressure and temperature information throughout the duration of the condition.

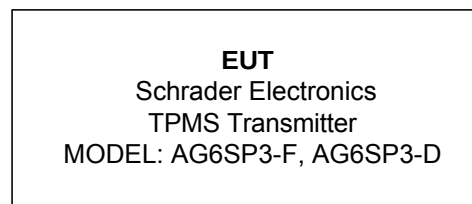


Figure 2: EUT Test Configuration Diagram.

### 2.1.3 Variants

There are two electrically identical variants of the EUT. Model AG6SP3-F employs a smaller plastic chassis. Model AG6SP3-D employs a slightly larger chassis with a metal ridge molded into it.

### 2.1.4 Test Samples

Six samples in total were provided. One sample programmed for periodic transmission, one normal operating sample capable of LEARN mode transmissions via LF interrogation, two test samples capable of CW transmission (one for each chassis variant), and two normal samples open for testing and photographs.

### 2.1.5 Functional Exerciser

Normal operating EUT functionality was verified by observation of transmitted signal.

### 2.1.6 Modifications Made

There were no modifications made to the EUT by this laboratory.

### 2.1.7 Production Intent

The EUT appears to be a production ready sample.

### 2.1.8 Declared Exemptions and Additional Product Notes

The EUT is permanently installed in a transportation vehicle. As such, digital emissions are exempt from US and Canadian digital emissions regulations (per FCC 15.103(a) and IC correspondence on ICES-003).

The EUT also employs some modes of operation that alert the vehicle user of sudden changes in tire pressure. Such alert modes fall under FCC 15.231(a)(4), and may operate during the pendency of the alarm condition. A detailed list of all operating modes is included in the Description of Operation exhibit included in this application.

### 3 Emissions

#### 3.1 General Test Procedures

##### 3.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first evaluated in our shielded fully anechoic chamber. Spectrum and modulation characteristics of all emissions are recorded, and emissions above 1 GHz are fully characterized. The anechoic chamber contains a set-up similar to that of our outdoor 3-meter site, with a turntable and antenna mast. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.2 are employed. After indoor pre-scans, emission measurements are made on our outdoor 3-meter Open Area Test Site (OATS). If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.4 / CISPR-22 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All

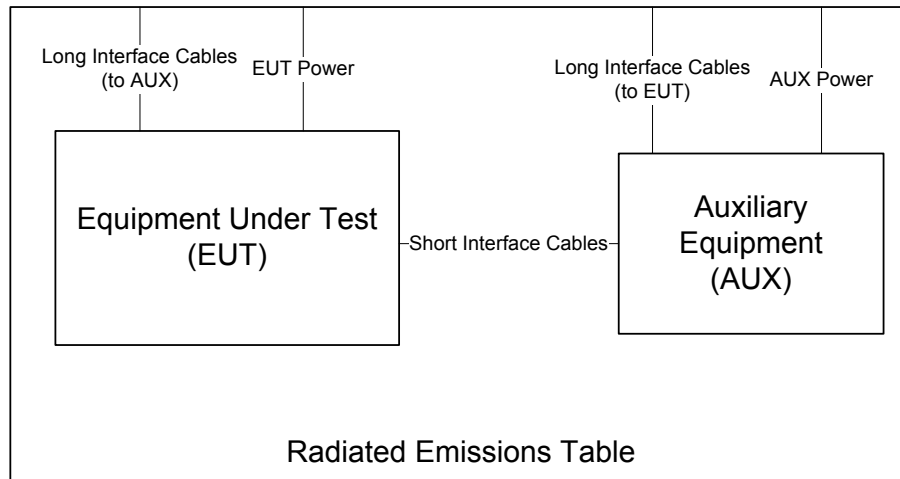


Figure 3: Radiated Emissions Diagram of the EUT.

intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded.

If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied. For devices with intentional emissions below 30 MHz, a shielded loop antenna is used as the test antenna. It is placed at a 1 meter receive height and appropriate low frequency magnetic field extrapolation to the regulatory limit distance is employed. Emissions between 30 MHz and 1 GHz are measured using tuned dipoles and/or calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain horn antennas or calibrated broadband ridge-horn antennas. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dBμV/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where  $P_R$  is the power recorded on spectrum analyzer, in dBm,  $K_A$  is the test antenna factor in dB/m,  $K_G$  is the combined pre-amplifier gain and cable loss in dB,  $K_E$  is duty correction factor (when applicable) in dB, and  $C_F$  is

a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is compute, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.



Figure 4: Radiated Emissions Test Setup Photograph(s).

### 3.1.2 Conducted Emissions Test Setup and Procedures

**Battery Power Conducted Spurious** The EUT is not subject to measurement of power line conducted emissions as it is powered solely by its internal battery.

### 3.1.3 Power Supply Variation

Tests at extreme supply voltages are made if required by the the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case the EUT is designed for operation from a battery power source, the extreme test voltages are evaluated over the range specified in the test standard; no less than  $\pm 10\%$  of the nominal battery voltage declared by the manufacturer. For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

### 3.1.4 Thermal Variation

Tests at extreme temperatures are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report. The provider has declared that the EUT is designed for operation over the temperature range  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . Before any temperature measurements are made, the equipment is allowed to reach a thermal balance in the test chamber, temperature and humidity are recorded, and thermal balance is verified via a thermocouple based probe.

## 3.2 Intentional Emissions

### 3.2.1 Fundamental Emission Pulsed Operation

The details and results of testing the EUT for pulsed operation are summarized in Table 3. Plots showing the measurements made to obtain these values are provided in Figure 5.

Table 3: Pulsed Emission Characteristics (Duty Cycle).

**Detector**    **Span**    **IF Bandwidth**    **Video Bandwidth**  
Pk            0            1 MHz            3 MHz

**Test Date:**    22-Aug-14  
**Test Engineer:**    Joseph Brunett  
**EUT:**    Schrader AG6SP3  
**EUT Mode:**    Modulated  
**Meas. Distance:**    10 cm

| FCC/IC |                                              |                            |                    |                                 |                                |                        |                                                                                                                                                                                                                              |                     |       |
|--------|----------------------------------------------|----------------------------|--------------------|---------------------------------|--------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------|
| #      | EUT Test Mode                                | Overall Transmission       |                    |                                 | Internal Frame Characteristics |                        |                                                                                                                                                                                                                              | Computed Duty Cycle |       |
|        |                                              | Min. Repetition Rate (sec) | Max. No. of Frames | Total Transmission Length (sec) | Max. Frame Length (ms)         | Min. Frame Period (ms) | Frame Encoding                                                                                                                                                                                                               | (%)                 | (dB)  |
| 1      | Worst-case ASK Learn Mode. See Subfigure (a) | Single                     | 16                 | 2.11                            | 28.3                           | >100                   | When manually actuated by encoded LF, the EUT transmits 16 frames of Manchester encoded ASK data (one of which may occur in any 100 ms window). Manchester encoding exhibits a 0.123 ms bit on time over a 0.241 ms period . | 14.4                | -16.8 |
| 3      | Worst-case Rolling Mode. See Subfigure (b)   | 58.4                       | 6                  | 0.75                            | 28.3                           | >100                   | Same Frames as above                                                                                                                                                                                                         | 14.4                | -16.8 |

Example Calculation: ASK Duty (%) =  $((28.3 \text{ ms} \times (0.123 \text{ ms} / 0.241 \text{ ms})) / 100 \text{ ms}) \times 100 = 14.4 \%$

Equipment Used: DIPEMC001, RSFSV30001

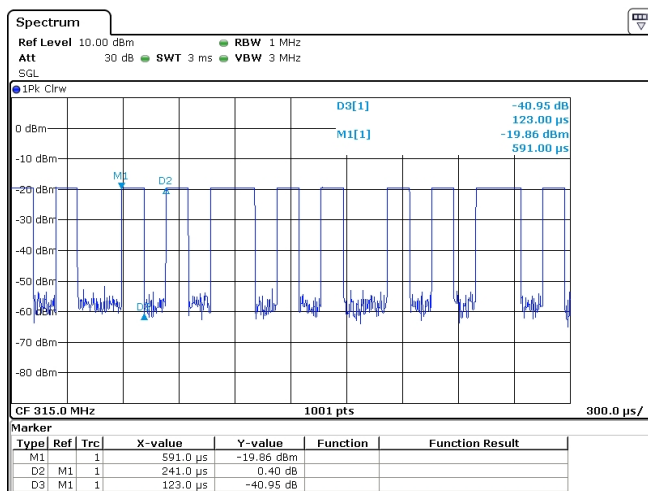
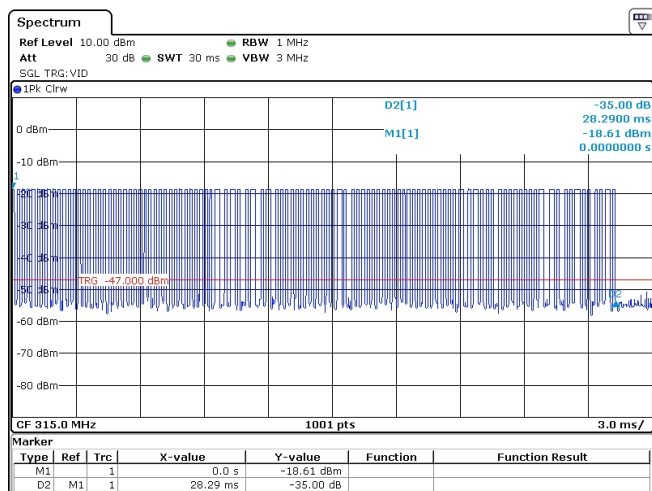
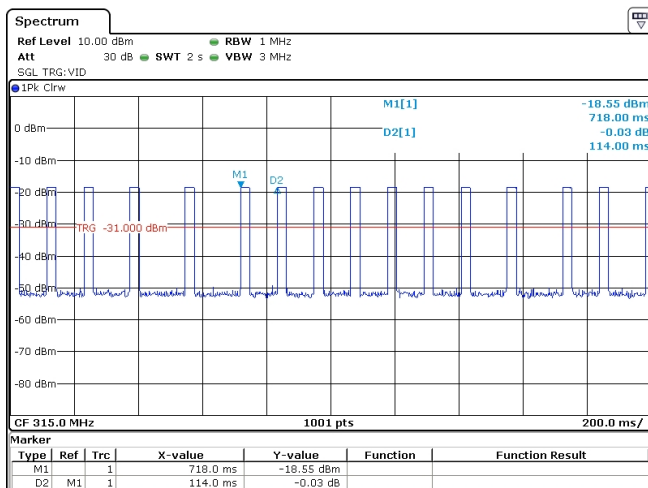
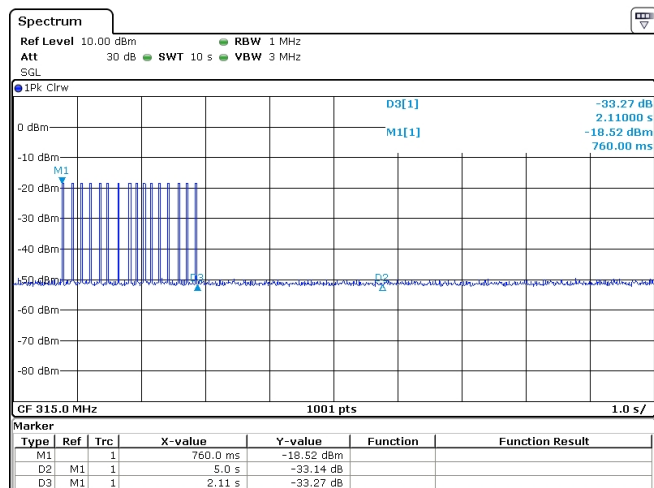


Figure 5(a): Pulsed Emission Characteristics (Duty Cycle).

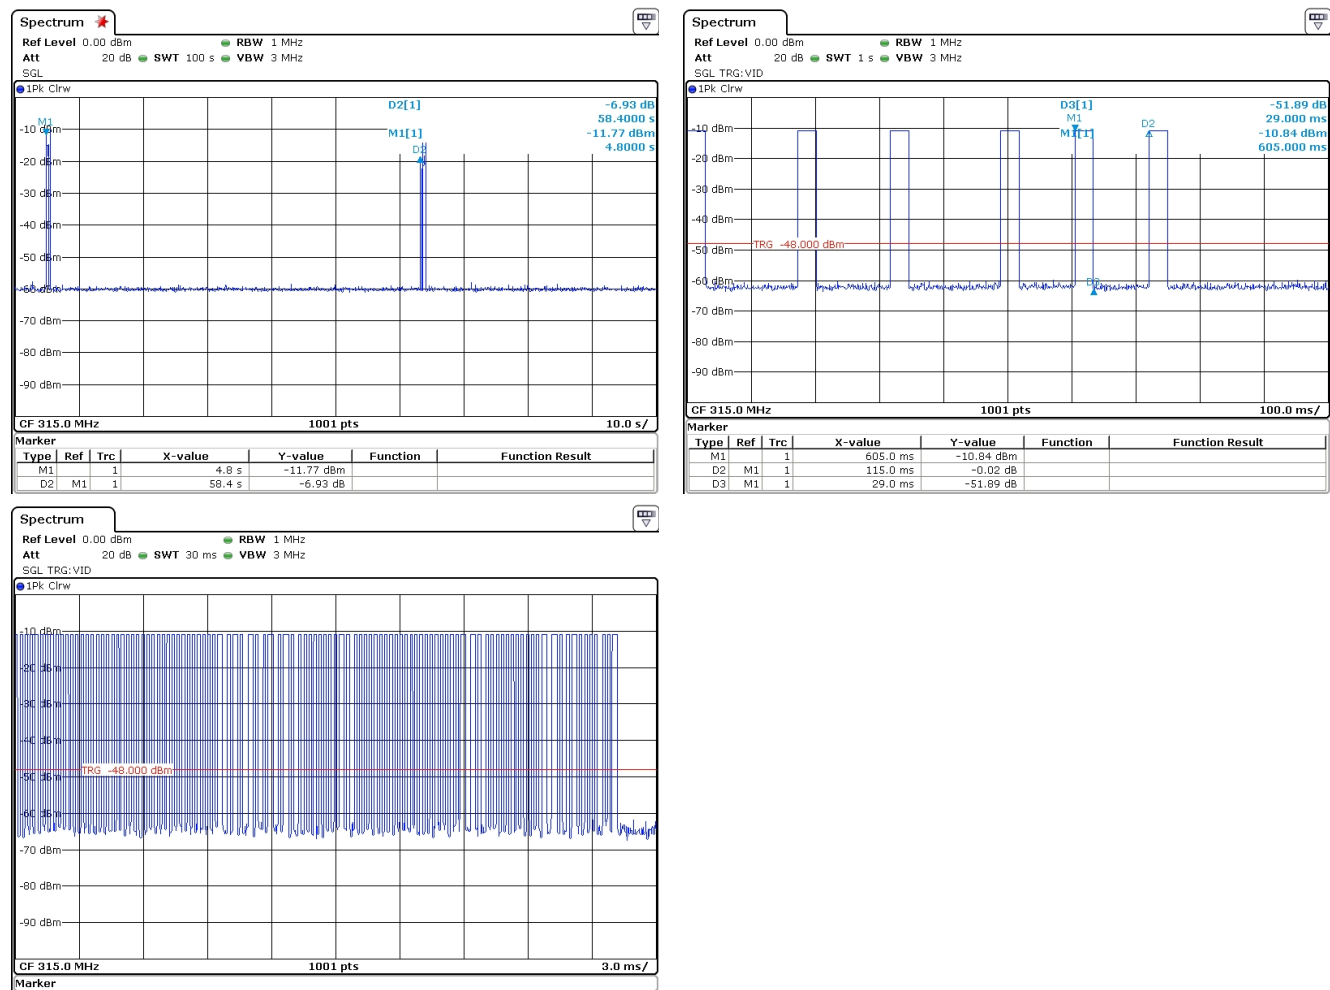


Figure 5(b): Pulsed Emission Characteristics (Duty Cycle).

### 3.2.2 Fundamental Emission Bandwidth

Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available frame length and minimum frame spacing. Radiated emissions are recorded following the test procedures listed in Section 1.1. The 20 dB EBW is measured as the max-held peak-detected signal when the IF bandwidth is greater than or equal to 1% of the receiver span. For complex modulations other than ASK and FSK, the 99% emission bandwidth per IC test procedures has a different result, and is also separately reported. The results of EBW testing are summarized in Table 4. Plots showing measurements employed to obtain the emission bandwidth reported are provided in Figure 6.

Table 4: Intentional Emission Bandwidth.

|                 |                     |                        |                        |                 |
|-----------------|---------------------|------------------------|------------------------|-----------------|
| <b>Detector</b> | <b>IF Bandwidth</b> | <b>Video Bandwidth</b> | <b>Test Date:</b>      | 22-Aug-14       |
| Pk              | 10 kHz              | 30 kHz                 | <b>Test Engineer:</b>  | Joseph Brunett  |
|                 |                     |                        | <b>EUT:</b>            | Schrader AG6SP3 |
|                 |                     |                        | <b>EUT Mode:</b>       | Modulated       |
|                 |                     |                        | <b>Meas. Distance:</b> | 10 cm           |

| FCC/IC |            |                           |                    |                    |  |  |
|--------|------------|---------------------------|--------------------|--------------------|--|--|
| #      | Modulation | Center Frequency<br>(MHz) | 20 dB EBW<br>(MHz) | EBW Limit<br>(MHz) |  |  |
| 1      | ASK        | 315                       | 0.0549             | 0.7875             |  |  |
| 2      |            |                           |                    |                    |  |  |

Equipment Used: DIPEMC001, RSFSV30001

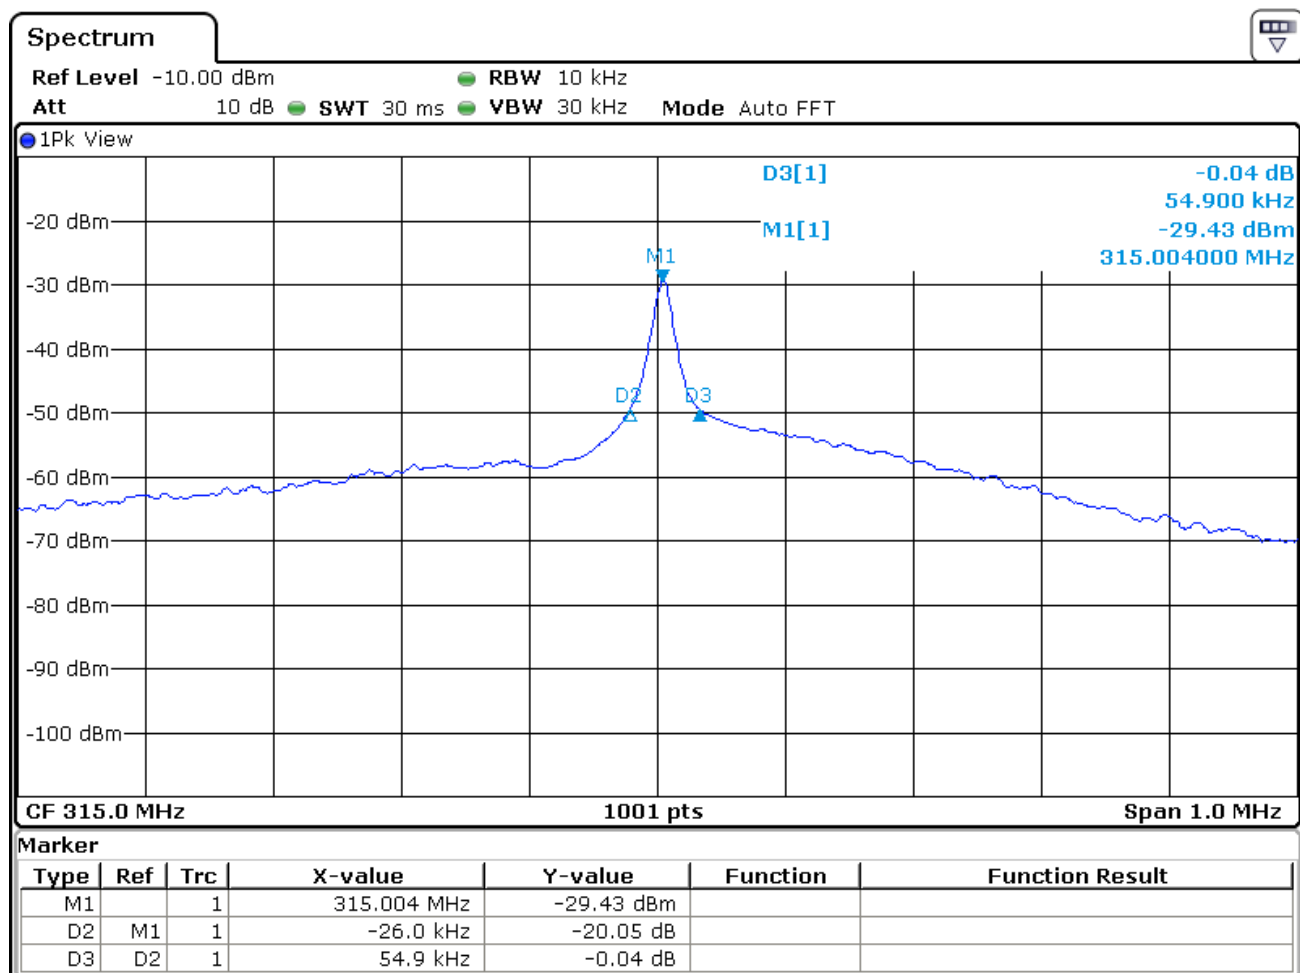


Figure 6: Intentional Emission Bandwidth.

### 3.2.3 Fundamental Emission

Following the test procedures listed in Section 1.1, radiated emissions measurements are made on the EUT for both Horizontal and Vertical polarized fields. Table 5 details the results of these measurements.

Table 5: Fundamental Radiated Emissions.

|                                  |            |                     |                        |                        |                 |
|----------------------------------|------------|---------------------|------------------------|------------------------|-----------------|
| <b>Frequency Range</b>           | <b>Det</b> | <b>IF Bandwidth</b> | <b>Video Bandwidth</b> | <b>Test Date:</b>      | 23-May-14       |
| 25 MHz $\leq$ f $\leq$ 1 000 MHz | Pk/QPk     | 120 kHz             | 300 kHz                | <b>Test Engineer:</b>  | Joseph Brunett  |
| f > 1 000 MHz                    | Pk         | 1 MHz               | 3MHz                   | <b>EUT:</b>            | Schrader AG6SP3 |
| f > 1 000 MHz                    | Avg        | 1 MHz               | 10kHz                  | <b>EUT Mode:</b>       | CW              |
|                                  |            |                     |                        | <b>Meas. Distance:</b> | 3 meters        |

| FCC/IC |                                   |                      |              |                           |                  |            |          |                   |                    |                                |             |          |
|--------|-----------------------------------|----------------------|--------------|---------------------------|------------------|------------|----------|-------------------|--------------------|--------------------------------|-------------|----------|
| #      | Freq.<br>MHz                      | Ant.<br>Used         | Ant.<br>Pol. | Pr (Pk)<br>dBm            | Pr (Avg)*<br>dBm | Ka<br>dB/m | Kg<br>dB | E3(Pk)<br>dBμ V/m | E3(Avg)<br>dBμ V/m | FCC/IC E3(Avg)<br>Lim. dBμ V/m | Pass<br>dB  | Comments |
| 1      | <b>AG6SP3-F (Smaller Housing)</b> |                      |              |                           |                  |            |          |                   |                    |                                |             |          |
| 2      | 315.0                             | Dip                  | H            | -23.0                     | -39.8            | 18.6       | 33.8     | 68.8              | 52.0               | 67.7                           | 15.7        | flat     |
| 3      | 315.0                             | Dip                  | V            | -21.5                     | -38.3            | 18.6       | 33.8     | 70.3              | 53.5               | 67.7                           | <b>14.2</b> | end      |
| 4      | <b>AG6SP3-D (Larger Housing)</b>  |                      |              |                           |                  |            |          |                   |                    |                                |             |          |
| 5      | 315.0                             | Dip                  | H            | -21.0                     | -37.8            | 18.6       | 33.8     | 70.8              | 54.0               | 67.7                           | 13.7        | side     |
| 6      | 315.0                             | Dip                  | V            | -19.4                     | -36.2            | 18.6       | 33.8     | 72.4              | 55.6               | 67.7                           | <b>12.1</b> | end      |
| #      | Freq.<br>MHz                      | DC Supply<br>Voltage |              | Relative Pr (Pk)<br>dBm** |                  |            |          |                   |                    |                                |             |          |
| 7      | 315.0                             | 2.60                 |              | -25.8                     |                  |            |          |                   |                    |                                |             |          |
| 8      | 315.0                             | 2.80                 |              | -24.5                     |                  |            |          |                   |                    |                                |             |          |
| 9      | 315.0                             | 3.00                 |              | -23.0                     |                  |            |          |                   |                    |                                |             |          |
| 10     | 315.0                             | 3.15                 |              | -21.5                     |                  |            |          |                   |                    |                                |             |          |
| 11     | 315.0                             | 3.30                 |              | -20.3                     |                  |            |          |                   |                    |                                |             |          |

\*Avg data computed from Peak Measured Data and EUT Duty Cycle. EUT in CW mode.

\*\* EUT in CW mode.

Equipment Used: DIPEMC001, RSFSV30001

### 3.3 Unintentional Emissions

#### 3.3.1 Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions at the nominal voltage and temperature are provided in Table 6. Measurements are performed to 10 times the highest fundamental operating frequency.

Table 6: Transmit Chain Spurious Emissions.

|                                  |            |                     |                        |                        |                 |
|----------------------------------|------------|---------------------|------------------------|------------------------|-----------------|
| <b>Frequency Range</b>           | <b>Det</b> | <b>IF Bandwidth</b> | <b>Video Bandwidth</b> | <b>Test Date:</b>      | 23-May-14       |
| 25 MHz $\leq$ f $\leq$ 1 000 MHz | Pk/QPk     | 120 kHz             | 300 kHz                | <b>Test Engineer:</b>  | Joseph Brunett  |
| f > 1 000 MHz                    | Pk         | 1 MHz               | 3 MHz                  | <b>EUT:</b>            | Schrader AG6SP3 |
| f > 1 000 MHz                    | Avg        | 1 MHz               | 10kHz                  | <b>EUT Mode:</b>       | CW              |
|                                  |            |                     |                        | <b>Meas. Distance:</b> | 3 meters        |

| Transmitter Unintentional Spurious Emissions |                                   |              |              |                |                  |            |          |                  |                   |                              |            | FCC/IC         |
|----------------------------------------------|-----------------------------------|--------------|--------------|----------------|------------------|------------|----------|------------------|-------------------|------------------------------|------------|----------------|
| #                                            | Freq.<br>MHz                      | Ant.<br>Used | Ant.<br>Pol. | Pr (Pk)<br>dBm | Pr (Avg)*<br>dBm | Ka<br>dB/m | Kg<br>dB | E3(Pk)<br>dBμV/m | E3(Avg)<br>dBμV/m | FCC/IC E3lim (Avg)<br>dBμV/m | Pass<br>dB | Comments       |
| 1                                            | <b>AG6SP3-F (Smaller Housing)</b> |              |              |                |                  |            |          |                  |                   |                              |            |                |
| 2                                            | 630.0                             | Dip          | H            | -67.7          | -84.5            | 24.4       | 30.5     | 33.2             | 16.4              | 47.7                         | 31.2       | flat           |
| 3                                            | 630.0                             | Dip          | V            | -71.0          | -87.8            | 24.4       | 30.5     | 29.9             | 13.1              | 47.7                         | 34.5       | max all, noise |
| 4                                            | 945.0                             | Dip          | H            | -78.9          | -95.7            | 28.8       | 27.5     | 29.4             | 12.6              | 47.7                         | 35.0       | max all, noise |
| 5                                            | 945.0                             | Dip          | V            | -80.1          | -96.9            | 28.8       | 27.5     | 28.2             | 11.4              | 47.7                         | 36.2       | max all, noise |
| 6                                            | 1260.0                            | R-Horn       | H            | -69.6          | -86.4            | 20.6       | 22.4     | 35.6             | 18.8              | 54.0                         | 35.2       | max all, noise |
| 7                                            | 1575.0                            | R-Horn       | H            | -67.8          | -84.6            | 21.5       | 29.2     | 31.4             | 14.6              | 54.0                         | 39.4       | max all, noise |
| 8                                            | 1890.0                            | R-Horn       | H            | -49.0          | -65.8            | 22.2       | 31.2     | 49.0             | 32.2              | 54.0                         | 21.8       | flat           |
| 9                                            | 2205.0                            | R-Horn       | H            | -58.5          | -75.3            | 23.0       | 30.9     | 40.5             | 23.7              | 54.0                         | 30.2       | max all, noise |
| 10                                           | 2520.0                            | R-Horn       | H            | -58.1          | -74.9            | 23.9       | 29.8     | 43.0             | 26.2              | 54.0                         | 27.8       | max all, noise |
| 11                                           | 2835.0                            | R-Horn       | H            | -64.6          | -81.4            | 24.8       | 28.6     | 38.6             | 21.8              | 54.0                         | 32.2       | max all, noise |
| 12                                           | 3150.0                            | R-Horn       | H            | -65.0          | -81.8            | 25.8       | 27.5     | 40.3             | 23.5              | 54.0                         | 30.4       | max all, noise |
| 13                                           | <b>AG6SP3-D (Larger Housing)</b>  |              |              |                |                  |            |          |                  |                   |                              |            |                |
| 14                                           | 630.0                             | Dip          | H            | -68.3          | -85.1            | 24.4       | 30.5     | 32.6             | 15.8              | 47.7                         | 31.8       | side           |
| 15                                           | 630.0                             | Dip          | V            | -70.4          | -87.2            | 24.4       | 30.5     | 30.5             | 13.7              | 47.7                         | 33.9       | flat           |
| 16                                           | 945.0                             | Dip          | H            | -81.0          | -97.8            | 28.8       | 27.5     | 27.3             | 10.5              | 47.7                         | 37.1       | max all, noise |
| 17                                           | 945.0                             | Dip          | V            | -79.3          | -96.1            | 28.8       | 27.5     | 29.0             | 12.2              | 47.7                         | 35.4       | max all, noise |
| 18                                           | 1260.0                            | R-Horn       | H            | -68.5          | -85.3            | 20.6       | 22.4     | 36.7             | 19.9              | 54.0                         | 34.1       | max all, noise |
| 19                                           | 1575.0                            | R-Horn       | H            | -67.0          | -83.8            | 21.5       | 29.2     | 32.2             | 15.4              | 54.0                         | 38.6       | max all, noise |
| 20                                           | 1890.0                            | R-Horn       | H            | -50.7          | -67.5            | 22.2       | 31.2     | 47.3             | 30.5              | 54.0                         | 23.5       | flat           |
| 21                                           | 2205.0                            | R-Horn       | H            | -56.6          | -73.4            | 23.0       | 30.9     | 42.4             | 25.6              | 54.0                         | 28.3       | max all, noise |
| 22                                           | 2520.0                            | R-Horn       | H            | -55.8          | -72.6            | 23.9       | 29.8     | 45.3             | 28.5              | 54.0                         | 25.5       | max all, noise |
| 23                                           | 2835.0                            | R-Horn       | H            | -65.3          | -82.1            | 24.8       | 28.6     | 37.9             | 21.1              | 54.0                         | 32.9       | max all, noise |
| 24                                           | 3150.0                            | R-Horn       | H            | -66.1          | -82.9            | 25.8       | 27.5     | 39.2             | 22.4              | 54.0                         | 31.5       | max all, noise |
| 25                                           |                                   |              |              |                |                  |            |          |                  |                   |                              |            |                |
| 26                                           |                                   |              |              |                |                  |            |          |                  |                   |                              |            |                |

\*Avg data computed from Peak Measured Data and EUT Duty Cycle. EUT in CW mode.

Equipment Used: DIPEMC001, UMHORN005, RSFSV30001