
Appendix B. Highest Measurement Data

Test Laboratory: DEKRA

Date: 2024/04/15

4_RF 2.4GHz_2.4G Wireless_CH19_Front_0mm_ANT Main_Left-ear**DUT: Bluetooth Headset; Type: A701**

Communication System: UID 0, RF 2.4GHz; Frequency: 2440 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2440$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.24$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(8.22, 8.22, 8.22) @ 2440 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (11x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.290 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.496 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 48.1%

Maximum value of SAR (measured) = 0.307 W/kg

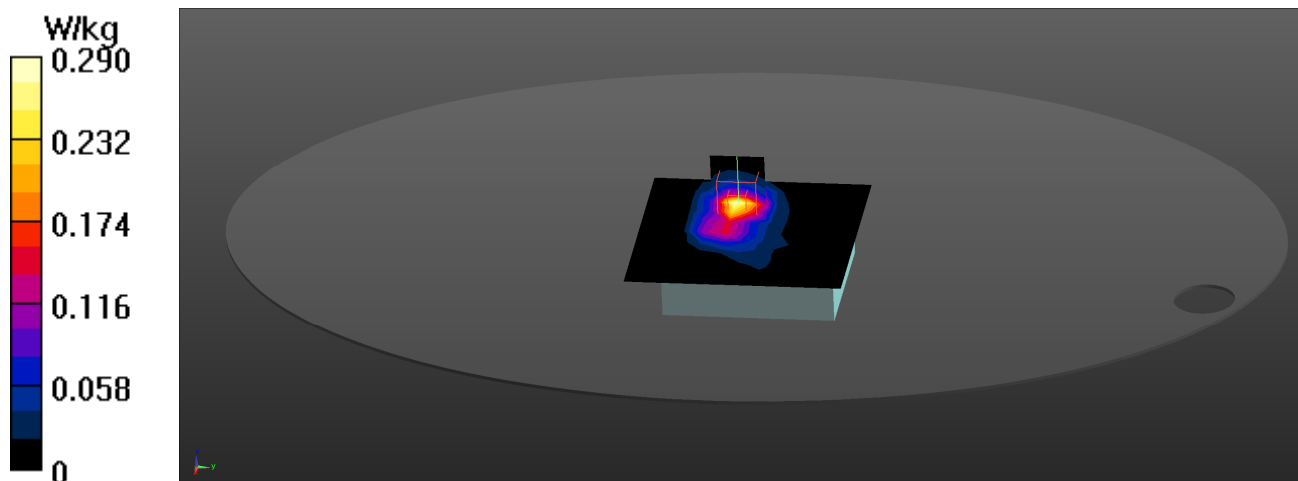

Test Laboratory: DEKRA

Date: 2024/04/15

1_Bluetooth_BLE_CH0_Front_0mm_ANT Main_Right-ear**DUT: Bluetooth Headset; Type: A701**

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2402 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 39.39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(8.22, 8.22, 8.22) @ 2402 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (10x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0436 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.8930 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.012 W/kgSmallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.0451 W/kg

