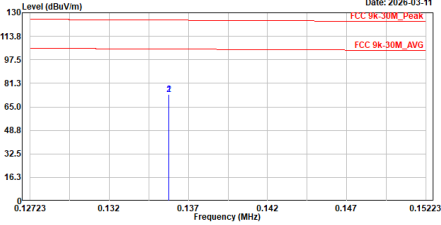
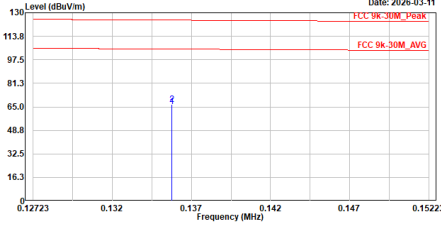


Appendix A. Test Result of AC Power Line Conducted Emission

WPT_TX_Line								WPT_TX_Neutral							
Site :HY-SR01 Condition :Line Mode :WPT_TX test by :Kevin Level (dBuV) 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 0.15 0.2 0.5 1 2 5 10 20 30 Frequency (MHz) Conduction(QP) Conduction(AV) Date: 2026-03-17								Site :HY-SR01 Condition :Neutral Mode :WPT_TX test by :Kevin Level (dBuV) 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 0.15 0.2 0.5 1 2 5 10 20 30 Frequency (MHz) Conduction(QP) Conduction(AV) Date: 2026-03-17							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB			MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.152	46.91	65.91	-19.00	37.34	9.57	QP	1	0.152	48.20	65.87	-17.67	38.64	9.56	QP
2	0.152	38.76	55.91	-25.15	21.19	9.57	Average	2	0.152	31.56	55.87	-24.31	22.80	9.56	Average
3	0.214	38.51	63.06	-24.55	28.95	9.56	QP	3	0.211	40.65	63.17	-22.52	31.87	9.58	QP
4	0.214	26.37	53.06	-26.69	16.81	9.56	Average	4	0.211	26.14	53.17	-27.03	16.56	9.58	Average
5	0.380	38.93	58.29	-19.36	29.35	9.58	QP	5	0.329	34.16	59.48	-25.32	24.58	9.58	QP
6	0.380	33.24	48.29	-15.05	23.66	9.58	Average	6	0.329	25.87	49.48	-23.61	16.29	9.58	Average
7	1.878	25.12	56.00	-30.88	15.42	9.70	QP	7	1.371	25.77	56.00	-30.23	16.11	9.66	QP
8	1.878	19.77	46.00	-26.23	10.67	9.70	Average	8	1.371	20.26	46.00	-25.74	10.60	9.66	Average
9	3.150	22.53	56.00	-33.47	12.66	9.87	QP	9	2.364	30.48	56.00	-25.52	20.72	9.76	QP
10	3.150	14.15	46.00	-31.85	4.28	9.87	Average	10	2.364	25.29	46.00	-20.71	15.53	9.76	Average
11	8.564	26.45	60.00	-33.55	16.30	10.15	QP	11	9.426	27.37	60.00	-32.63	17.15	10.22	QP
12	8.564	20.92	50.00	-29.08	10.77	10.15	Average	12	9.426	21.81	50.00	-28.19	11.59	10.22	Average
Note: 1. Level = Read Level + Factor 2. Factor = LISN Insertion loss + Cable loss 3. Over Limit = Level - Limit Line								Note: 1. Level = Read Level + Factor 2. Factor = LISN Insertion loss + Cable loss 3. Over Limit = Level - Limit Line							

Appendix B. Test Result of Radiated Emission

ANT: (M/N: INNOWAVE, P/N: F001N7414N91000)


TX_0.136MHz_H								TX_0.136MHz_V							
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_0.136MHz Test BY :Rock Date: 2026-03-11 								Site :HY-CB03 Condition :3m ,Vertical Mode :TX_0.136MHz Test BY :Rock Date: 2026-03-11 							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	0.136	73.39	104.93	-31.54	54.20	19.19	Average	1	0.136	65.31	104.93	-39.62	46.10	19.21	Average
2	0.136	73.79	124.93	-51.14	54.60	19.19	Peak	2	0.136	66.81	124.93	-58.12	47.60	19.21	Peak
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line								Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line							

ANT: (M/N: INPAQ, P/N: WPC-W-P-TX-FF-002)

TX_0.136MHz_H								TX_0.136MHz_V							
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_0.136MHz Test BY :Rock								Site :HY-CB03 Condition :3m ,Vertical Mode :TX_0.136MHz Test BY :Rock							
Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 0.126050.130.1340.1380.1420.14605 Frequency (MHz) Date: 2026-04-16 TLC 9K-30M_P200K FCC 9K-30M_AVG								Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 0.126050.130.1340.1380.1420.14605 Frequency (MHz) Date: 2026-04-16 TLC 9K-30M_P200K FCC 9K-30M_AVG							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	0.136	72.48	104.93	-32.45	53.30	19.18	Average	1	0.136	64.58	104.93	-40.35	45.40	19.18	Average
2	0.136	72.98	124.93	-51.95	53.80	19.18	Peak	2	0.136	65.48	124.93	-59.45	46.30	19.18	Peak
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line								Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line							

TX_0.136MHz_below 30MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_0.136MHz_below 30MHz
Test BY :Rock

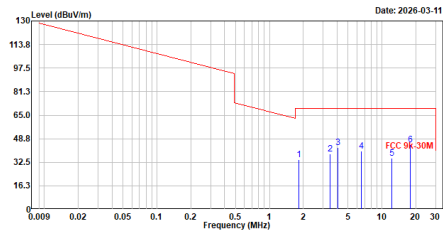


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1.837	34.56	69.50	-34.94	15.14	19.42	QP
2	3.465	38.14	69.50	-31.36	18.60	19.54	QP
3	4.052	42.54	69.50	-26.96	22.83	19.71	QP
4	6.529	40.22	69.50	-29.28	19.12	21.10	QP
5	12.242	35.47	69.50	-34.03	13.82	21.65	QP
6	17.880	44.80	69.50	-24.70	22.42	22.38	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

TX_0.136MHz_below 30MHz_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_0.136MHz_below 30MHz
Test BY :Rock

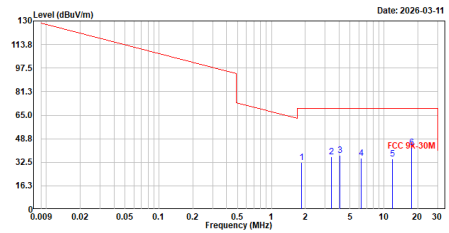


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1.842	32.53	69.50	-36.97	13.11	19.42	QP
2	3.420	36.30	69.50	-33.20	16.77	19.53	QP
3	4.052	37.51	69.50	-31.99	17.80	19.71	QP
4	6.300	35.08	69.50	-34.42	13.98	21.10	QP
5	11.928	34.65	69.50	-34.85	12.96	21.69	QP
6	17.606	42.53	69.50	-26.97	20.21	22.32	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

TX_0.136MHz_above 30MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_0.136MHz_above 30MHz
Test BY :Rock

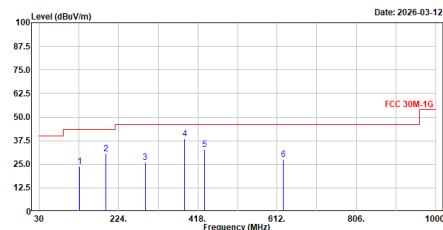


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	127.970	23.81	43.50	-19.69	49.54	-25.73	QP
2	192.863	30.58	43.50	-12.92	57.27	-26.69	QP
3	289.281	26.15	46.00	-19.85	49.48	-23.33	QP
4	385.796	38.52	46.00	-7.48	59.26	-20.74	QP
5	434.199	32.65	46.00	-13.35	52.19	-19.54	QP
6	626.647	27.69	46.00	-18.31	42.95	-15.26	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

TX_0.136MHz_above 30MHz_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_0.136MHz_above 30MHz
Test BY :Rock

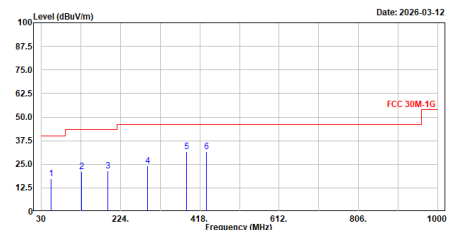

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	54.832	17.21	40.00	-22.79	40.94	-23.73	QP
2	127.970	21.20	43.50	-22.30	46.93	-25.73	QP
3	192.863	21.68	43.50	-21.82	48.37	-26.69	QP
4	289.378	24.31	46.00	-21.69	47.64	-23.33	QP
5	385.796	31.71	46.00	-14.29	52.45	-20.74	QP
6	434.102	31.84	46.00	-14.16	51.39	-19.55	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line