


Appendix A. Test Result of AC Power Line Conducted Emission

TX_BLE2M_2440MHz_Line

Site :HY-SR01
Condition :Line
Mode :TX_BLE2M_2440MHz
test by :Michael

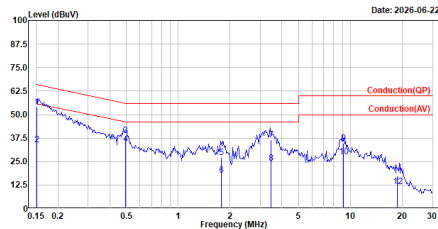


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.152	54.08	65.92	-11.84	44.45	9.63	QP
2	0.152	33.81	55.92	-22.11	24.18	9.63	Average
3	0.493	36.77	56.12	-17.35	29.11	9.66	QP
4	0.493	36.15	46.12	-11.97	24.49	9.66	Average
5	1.776	27.00	56.00	-29.00	17.30	9.70	QP
6	1.776	17.79	46.00	-28.21	8.09	9.70	Average
7	3.456	36.65	56.00	-19.35	26.71	9.94	QP
8	3.456	24.00	46.00	-22.00	14.06	9.94	Average
9	9.125	34.76	60.00	-25.24	24.57	10.19	QP
10	9.125	27.41	50.00	-22.59	17.22	10.19	Average
11	18.709	17.33	60.00	-42.67	7.45	9.88	QP
12	18.709	11.57	50.00	-38.43	1.69	9.88	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

TX_BLE2M_2440MHz_Neutral

Site :HY-SR01
Condition :Neutral
Mode :TX_BLE2M_2440MHz
test by :Michael

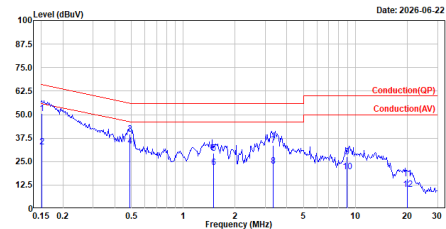


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.151	50.62	65.92	-15.30	40.98	9.64	QP
2	0.151	32.84	55.92	-23.08	23.20	9.64	Average
3	0.489	39.69	56.18	-16.49	30.83	9.66	QP
4	0.489	33.39	46.18	-12.88	23.64	9.66	Average
5	1.500	29.47	56.00	-26.53	19.79	9.68	QP
6	1.500	21.90	46.00	-24.10	12.22	9.68	Average
7	3.342	33.63	56.00	-22.37	23.70	9.93	QP
8	3.342	22.62	46.00	-23.38	12.69	9.93	Average
9	8.926	27.36	60.00	-32.64	17.18	10.18	QP
10	8.926	19.50	50.00	-30.50	9.32	10.18	Average
11	19.924	15.82	60.00	-44.18	5.89	9.93	QP
12	19.924	10.07	50.00	-39.93	0.14	9.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Charging mode_Line

Site :HY-SR01
Condition :Line
Mode :Charging mode
test by :Michael

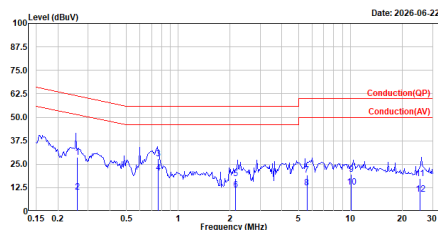


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.259	28.63	61.47	-32.84	18.98	9.65	QP
2	0.259	10.20	51.47	-41.27	0.55	9.65	Average
3	0.766	27.74	56.00	-28.26	18.07	9.67	QP
4	0.766	20.51	46.00	-25.49	10.84	9.67	Average
5	2.155	17.42	56.00	-38.58	7.67	9.75	QP
6	2.155	11.19	46.00	-34.81	1.44	9.75	Average
7	5.583	19.29	60.00	-40.71	9.18	10.11	QP
8	5.583	12.59	50.00	-37.41	2.40	10.11	Average
9	10.119	19.67	60.00	-40.33	9.47	10.20	QP
10	10.119	12.82	50.00	-37.18	2.62	10.20	Average
11	25.290	17.35	60.00	-42.65	7.45	9.90	QP
12	25.290	9.04	50.00	-40.96	-0.86	9.90	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Charging mode_Neutral

Site :HY-SR01
Condition :Neutral
Mode :Charging mode
test by :Michael

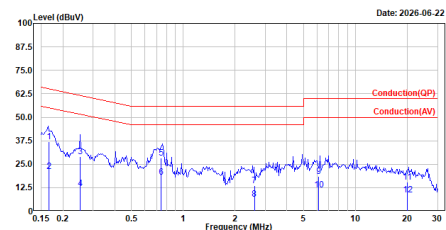


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.166	37.03	65.17	-28.14	27.39	9.64	QP
2	0.166	21.03	55.17	-34.14	11.39	9.64	Average
3	0.253	29.02	61.67	-32.65	19.36	9.66	QP
4	0.253	12.07	51.67	-39.60	2.41	9.66	Average
5	0.747	28.17	56.00	-27.83	18.51	9.66	QP
6	0.747	18.24	46.00	-27.76	8.58	9.66	Average
7	2.589	13.43	56.00	-42.57	3.62	9.81	QP
8	2.589	6.59	46.00	-39.41	-3.22	9.81	Average
9	6.131	18.62	60.00	-41.38	8.50	10.12	QP
10	6.131	11.41	50.00	-38.59	1.29	10.12	Average
11	19.922	15.45	60.00	-44.55	5.52	9.93	QP
12	19.922	8.75	50.00	-41.25	-1.18	9.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of Occupied Bandwidth & DTS Bandwidth

Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limit (MHz)	
				99% Occupied Bandwidth	DTS Bandwidth
GFSK (1Mbps)	2402	1.09	0.71	-	≥ 0.5
	2440	1.09	0.71	-	≥ 0.5
	2480	1.10	0.72	-	≥ 0.5
GFSK (2Mbps)	2404	2.12	1.25	-	≥ 0.5
	2440	2.12	1.29	-	≥ 0.5
	2478	2.12	1.24	-	≥ 0.5

For 99% Occupied Bandwidth:

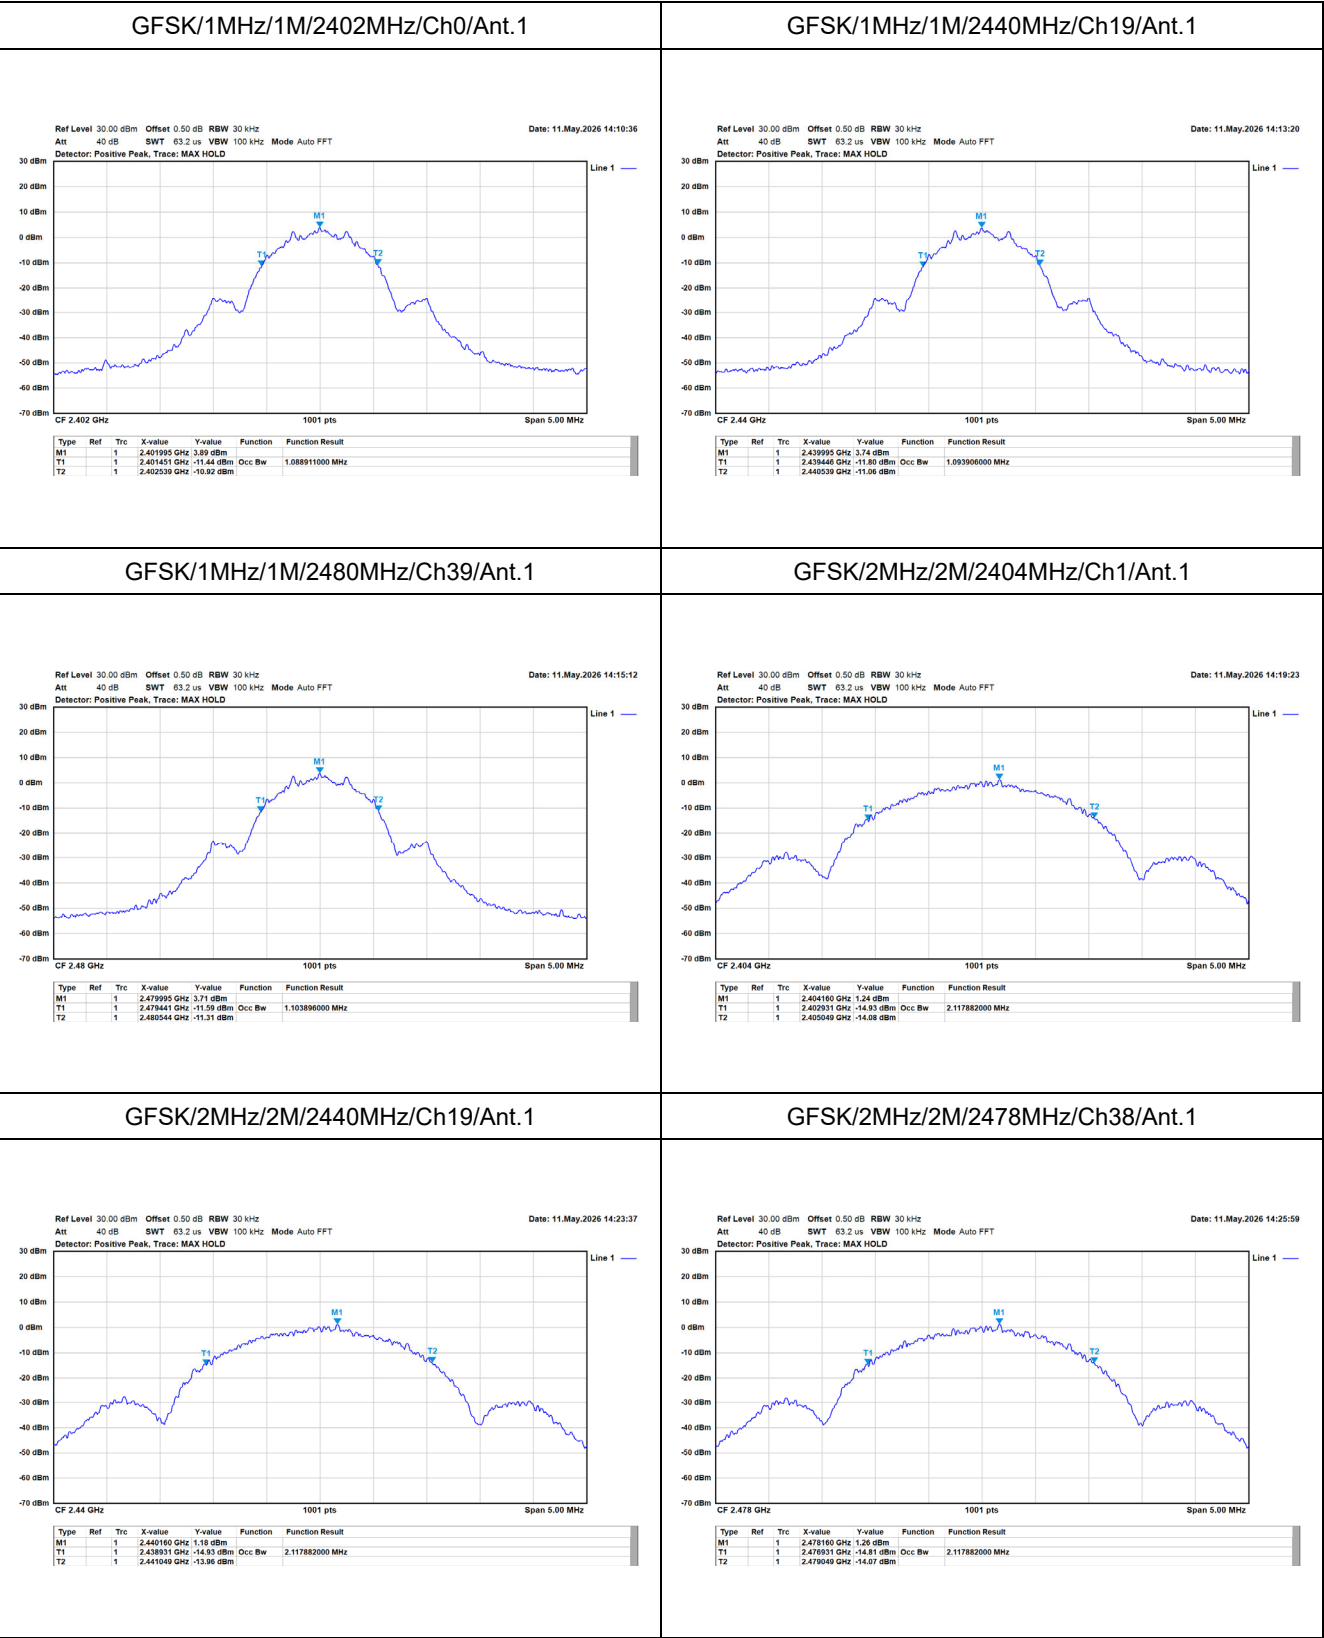

For DTS Bandwidth:

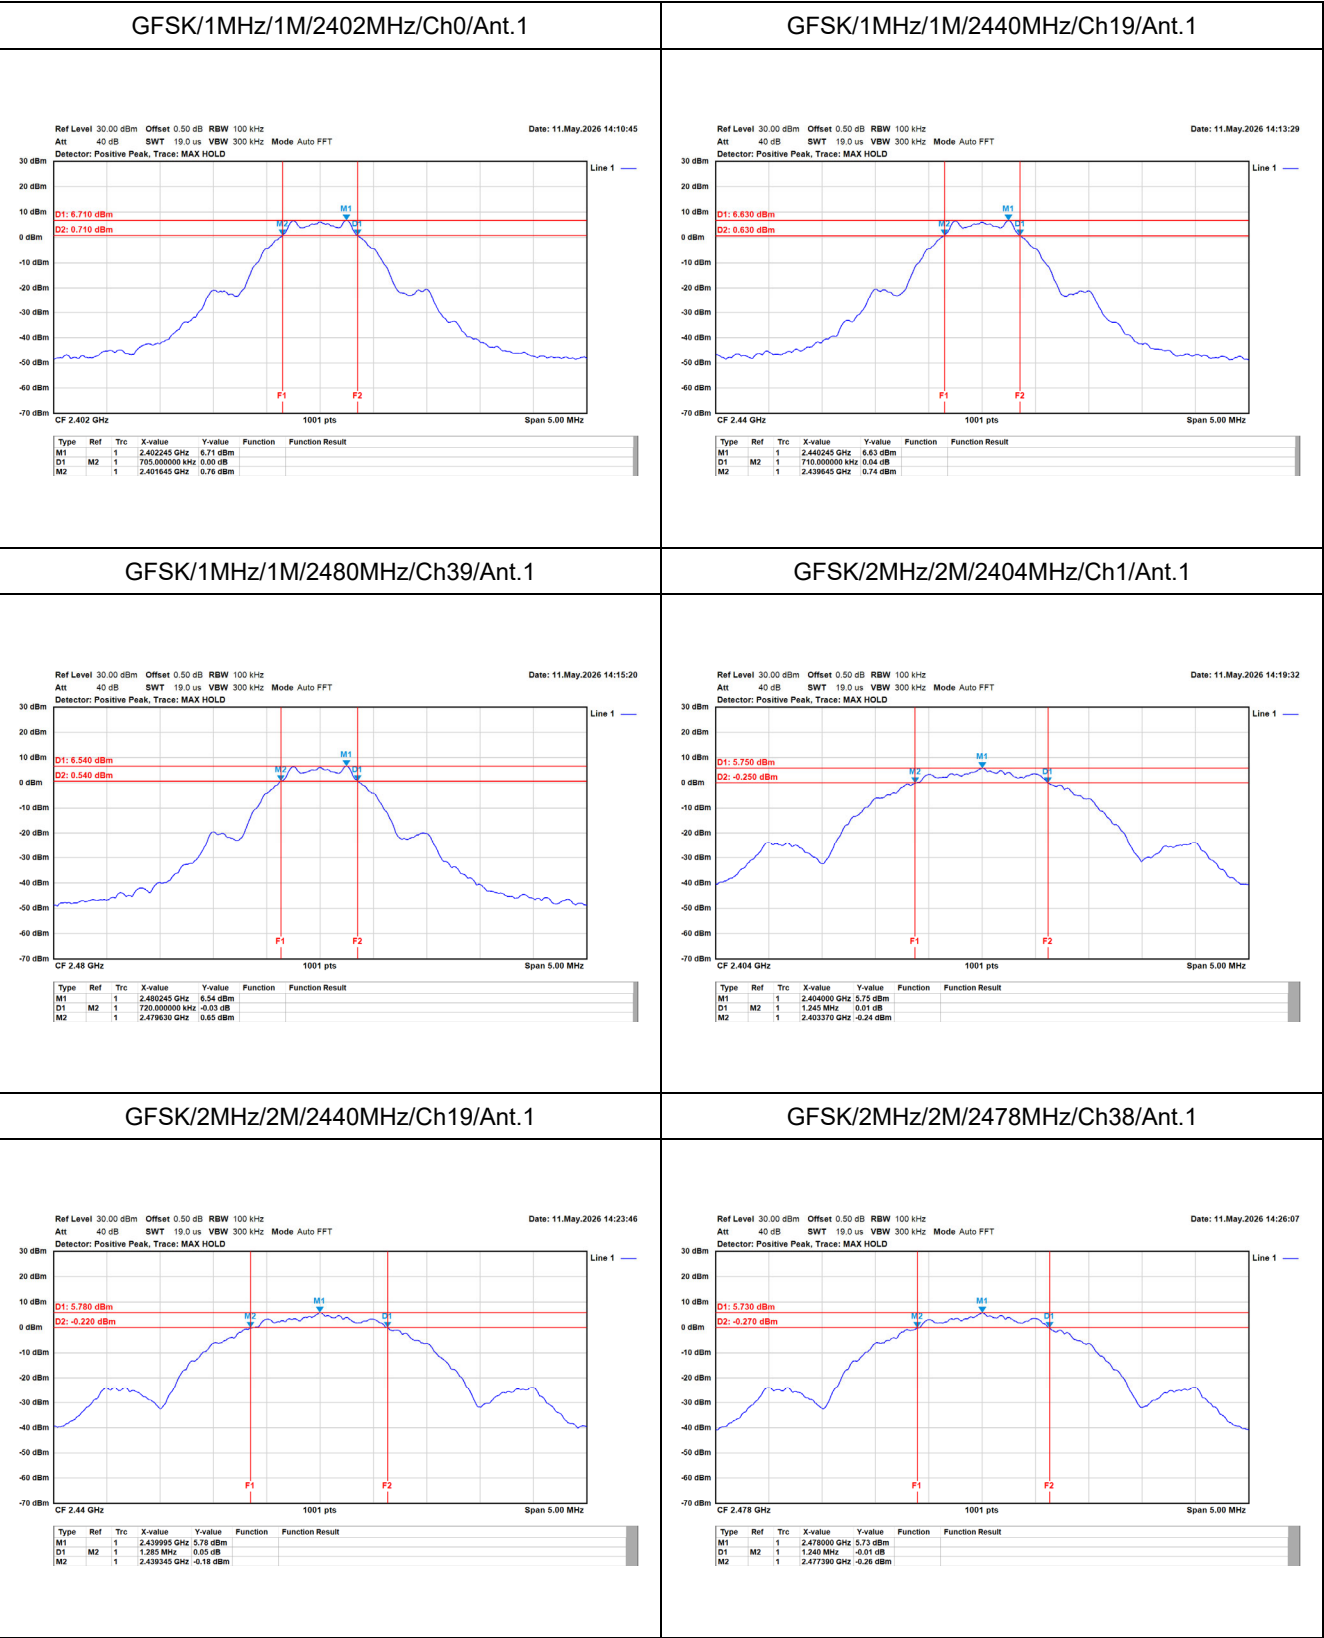


Appendix C. Test Result of Maximum Peak Conducted Output Power


Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	7.55	30.00	Pass
	2440	7.51	30.00	Pass
	2480	7.44	30.00	Pass
GFSK (2Mbps)	2404	7.56	30.00	Pass
	2440	7.50	30.00	Pass
	2478	7.44	30.00	Pass


Appendix D. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1Mbps)	2402	-4.94	8.00	Pass
	2440	-5.01	8.00	Pass
	2480	-5.09	8.00	Pass
GFSK (2Mbps)	2404	-8.79	8.00	Pass
	2440	-8.81	8.00	Pass
	2478	-8.90	8.00	Pass

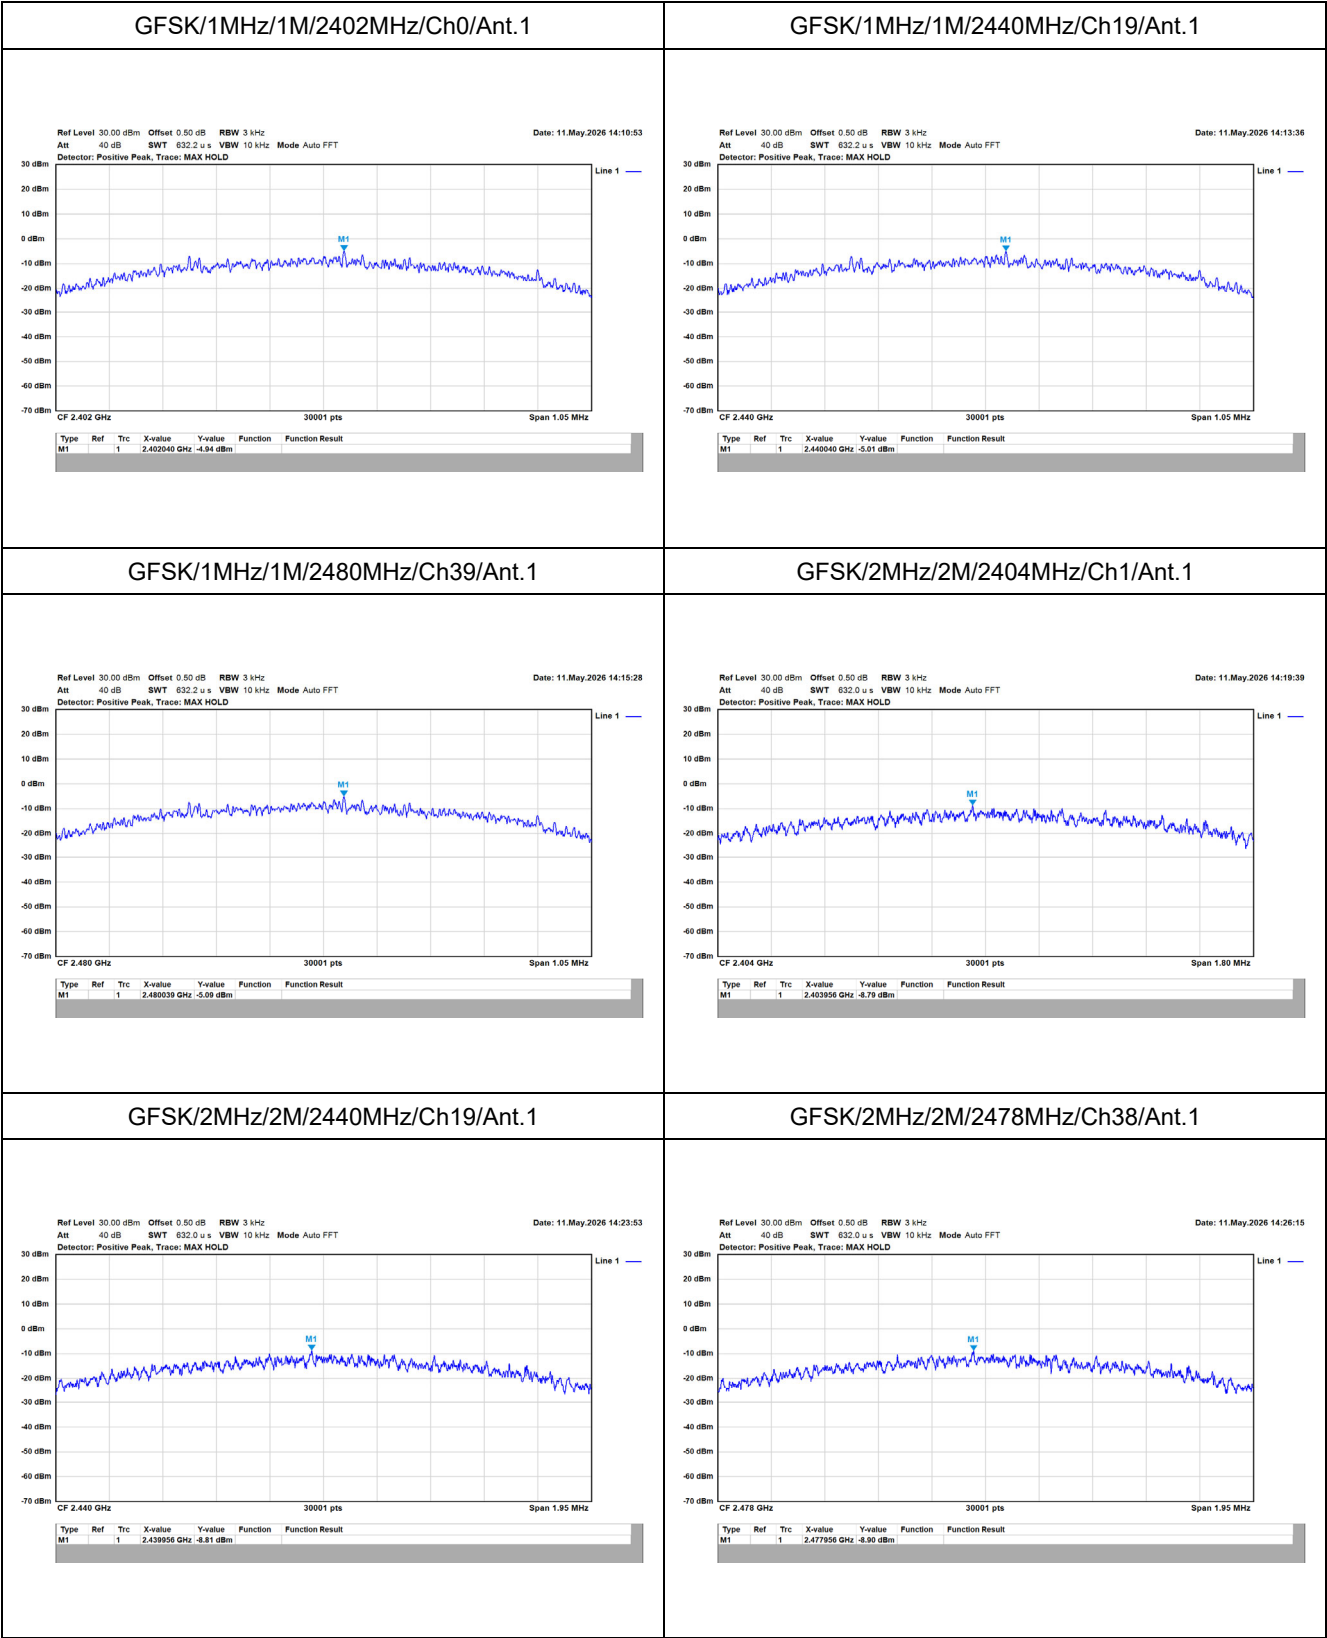

Appendix E. Test Result of Antenna Port Conducted Emission

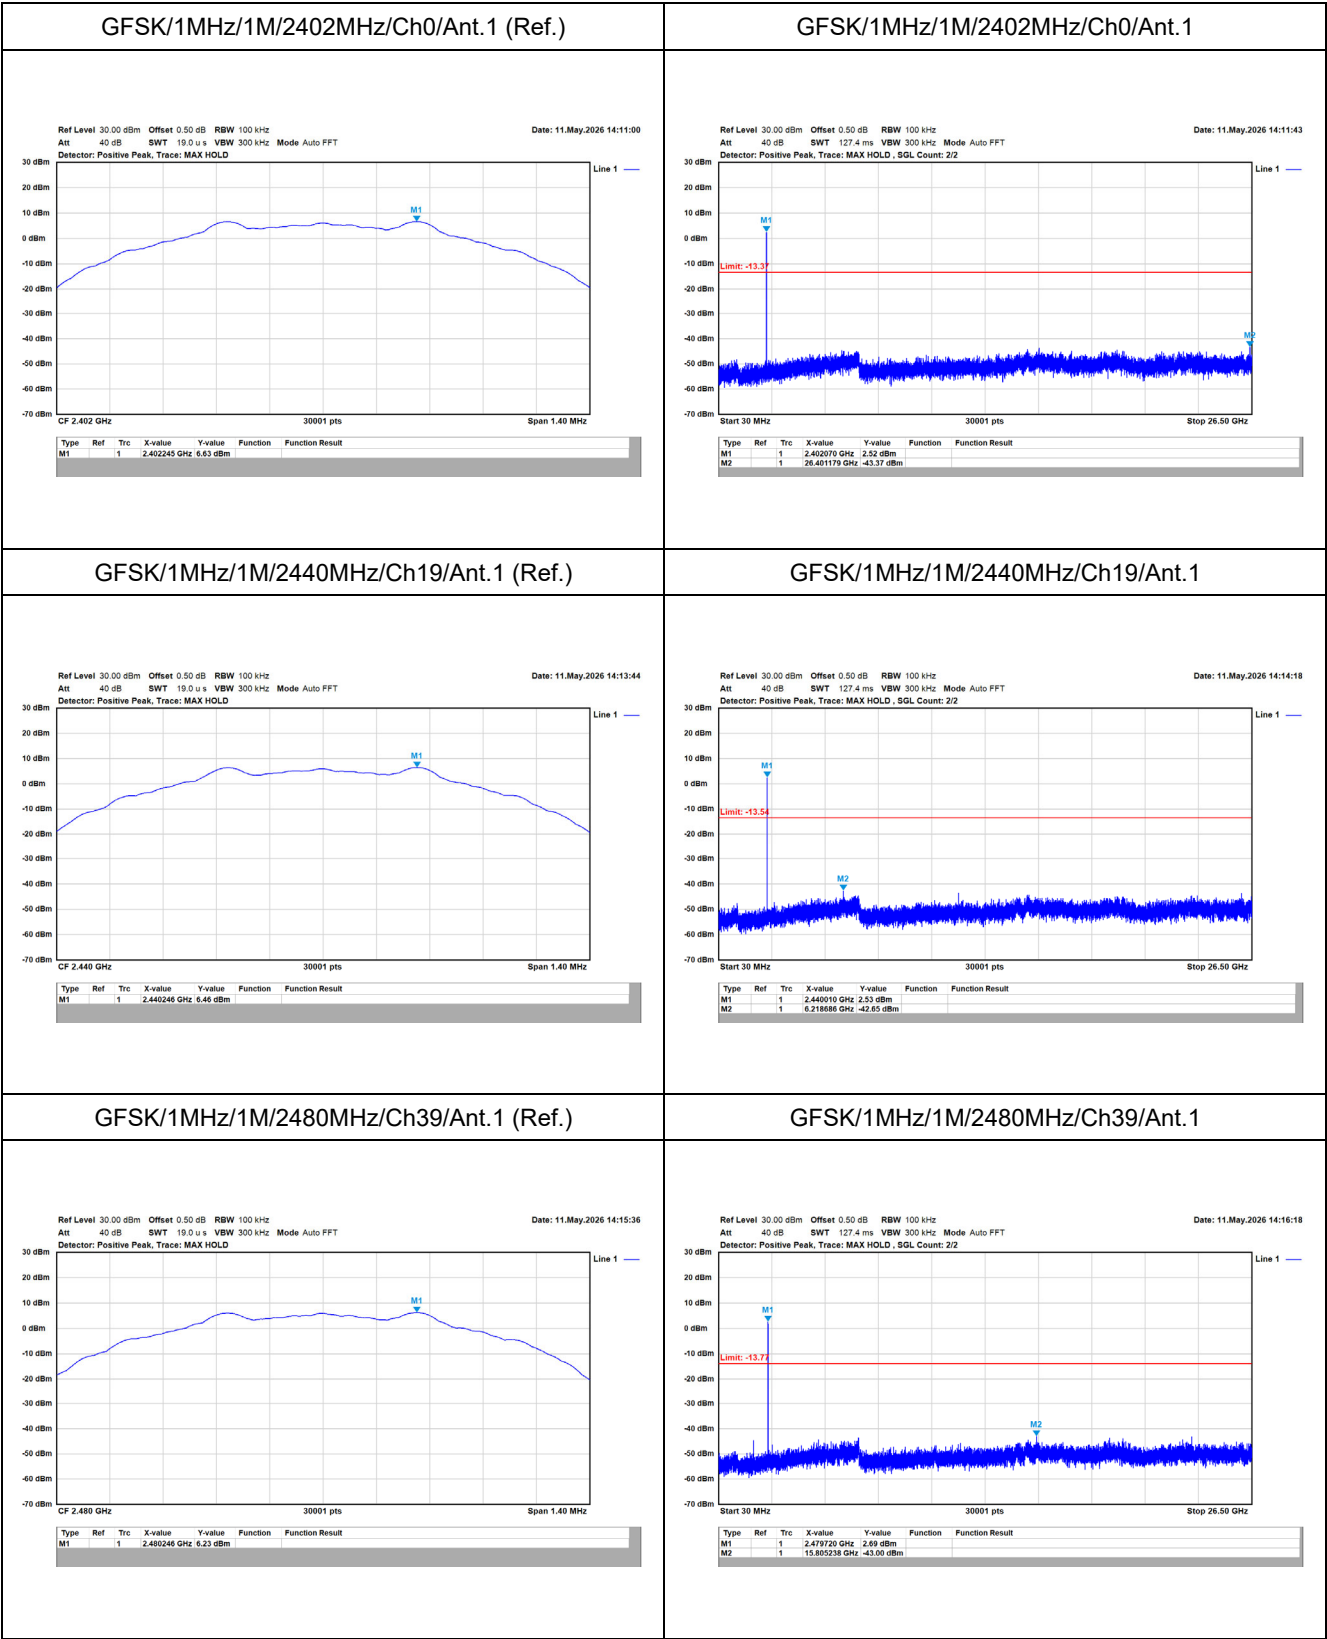

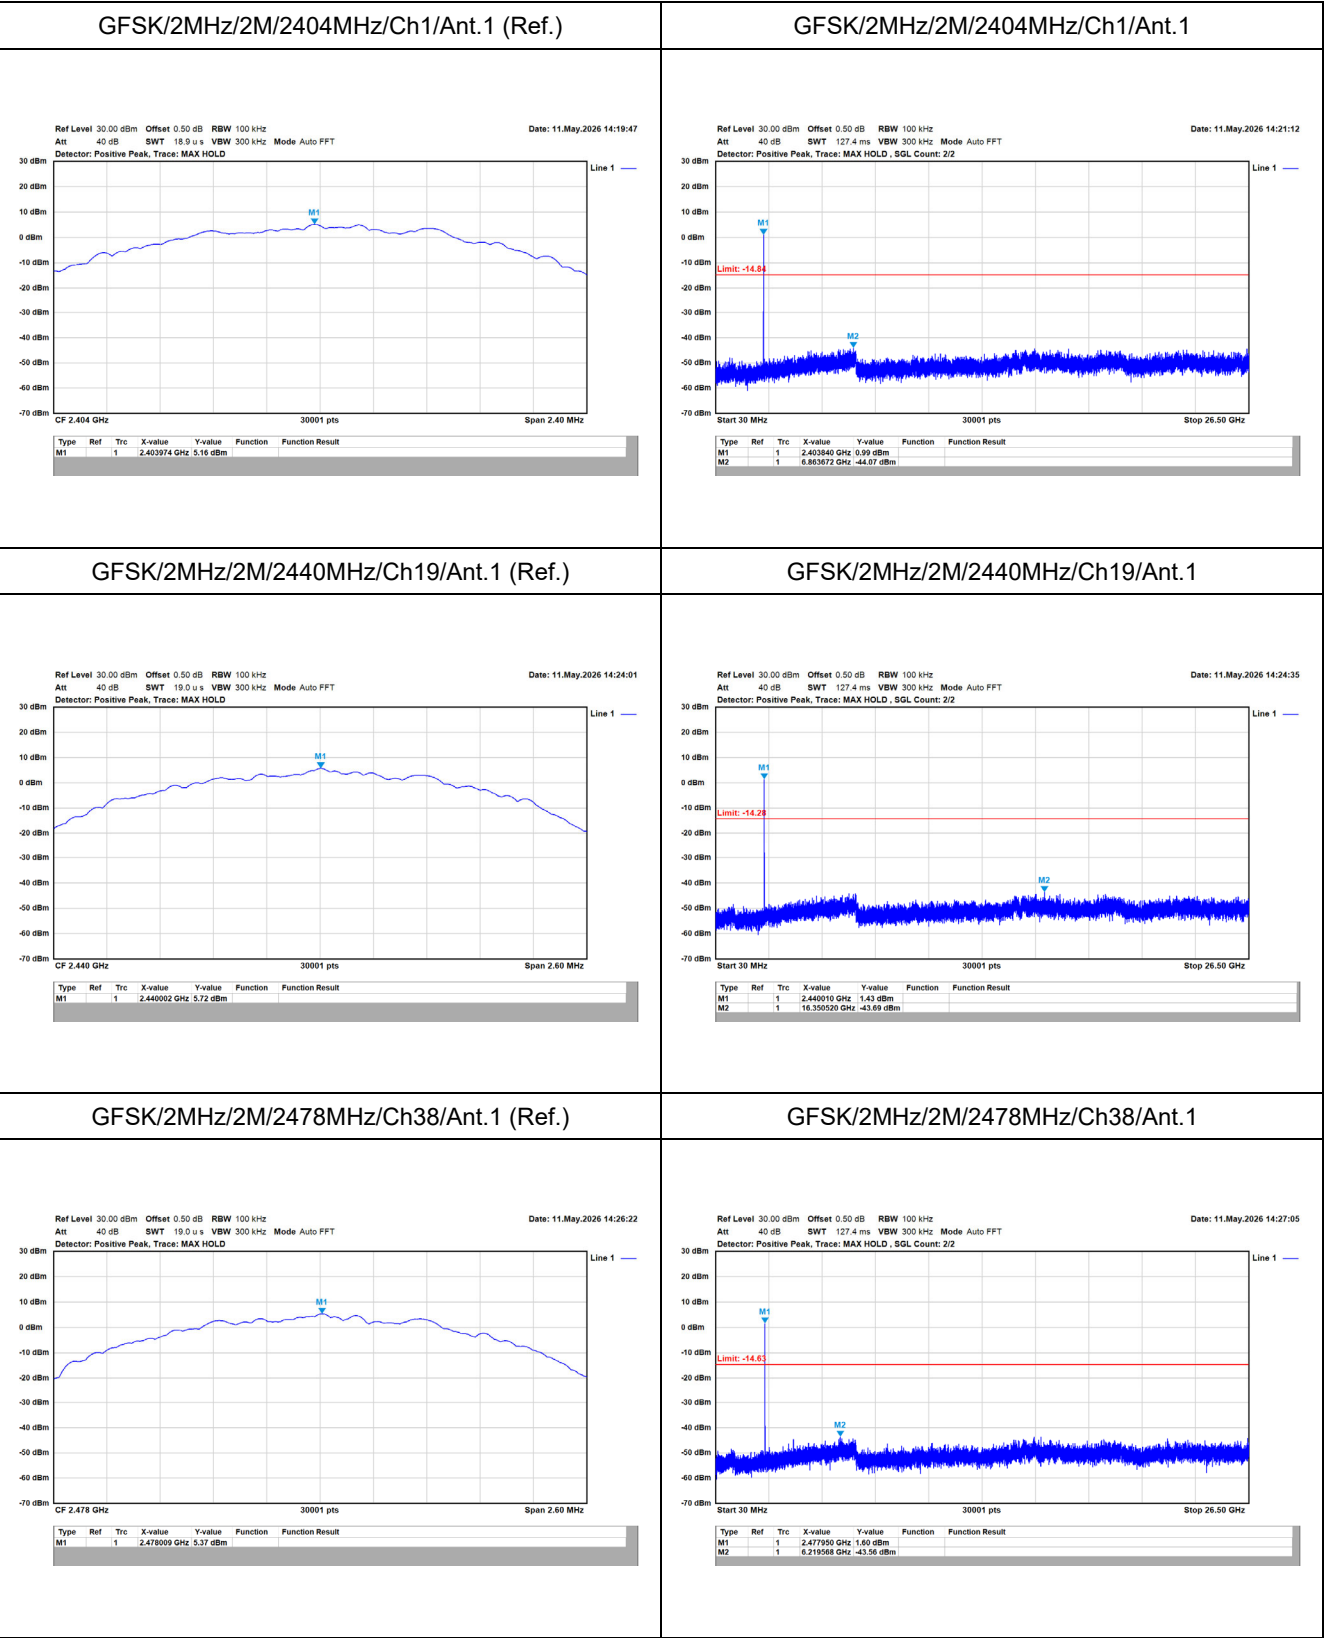




Appendix F. Test Result of Radiated Emission

TX_BLE1M_2402MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

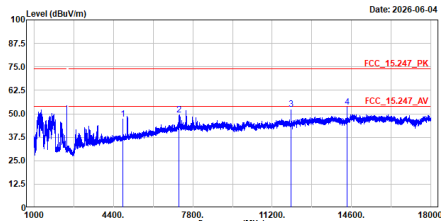


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	47.07	74.00	-26.93	61.80	-14.73	Peak
2	7206.000	49.40	74.00	-24.60	56.56	-7.16	Peak
3	12010.000	52.27	74.00	-21.73	53.80	-1.53	Peak
4	14412.000	53.60	74.00	-20.40	52.91	0.69	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

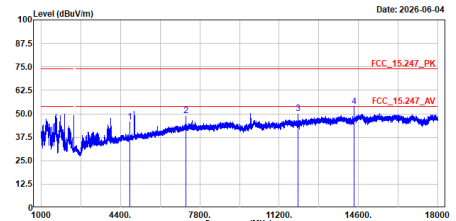


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	45.69	74.00	-28.31	60.42	-14.73	Peak
2	7206.000	48.89	74.00	-25.11	56.05	-7.16	Peak
3	12010.000	50.29	74.00	-23.71	51.82	-1.53	Peak
4	14412.000	54.09	74.00	-19.91	53.40	0.69	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2440MHz
Test BY :Rock

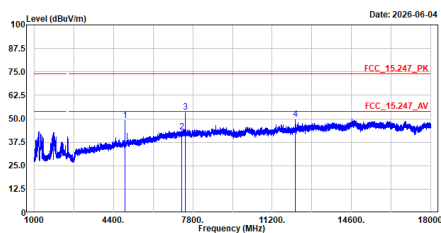


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	48.88	74.00	-25.12	63.34	-14.46	Peak
2	7320.000	42.92	74.00	-31.08	50.05	-7.11	Peak
3	7477.000	53.46	74.00	-20.54	60.58	-7.12	Peak
4	12200.000	49.90	74.00	-24.10	50.74	-0.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2440MHz
Test BY :Rock

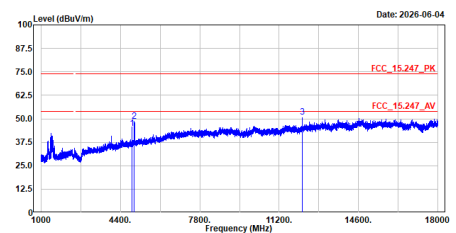


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	44.98	74.00	-29.02	59.44	-14.46	Peak
2	4983.950	48.74	74.00	-25.26	62.88	-14.14	Peak
3	12200.000	51.01	74.00	-22.99	51.85	-0.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

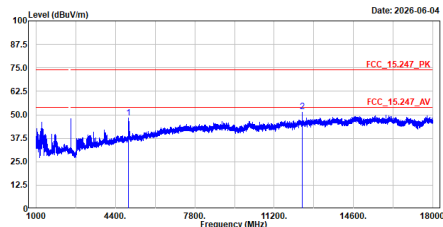


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4968.000	48.31	74.00	-25.69	62.53	-14.22	Peak
2	12400.000	51.56	74.00	-22.44	52.47	-0.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

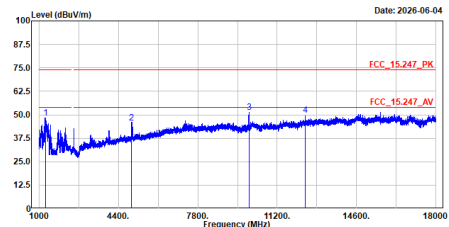


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1200.950	48.49	74.00	-25.51	74.16	-25.67	Peak
2	4960.000	45.58	74.00	-28.42	59.80	-14.22	Peak
3	9993.850	51.30	74.00	-22.70	56.91	-5.61	Peak
4	12400.000	49.98	74.00	-24.02	50.89	-0.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Rock

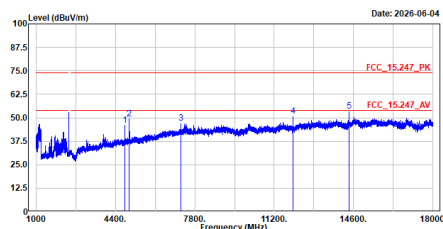


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4888.000	46.09	74.00	-27.91	60.81	-14.72	Peak
2	4994.150	49.49	74.00	-24.51	63.59	-14.10	Peak
3	7212.000	47.26	74.00	-26.74	54.44	-7.18	Peak
4	12020.000	50.98	74.00	-23.02	52.48	-1.50	Peak
5	14424.000	53.72	74.00	-20.28	53.03	0.69	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Rock

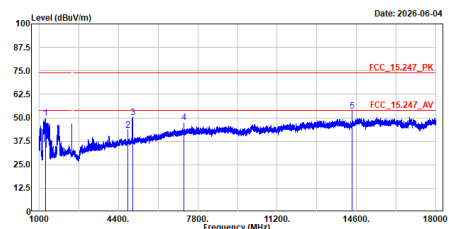


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1259.850	49.87	74.00	-24.13	75.54	-25.67	Peak
2	4888.000	43.40	74.00	-30.60	58.12	-14.72	Peak
3	4998.400	50.24	74.00	-23.76	64.32	-14.08	Peak
4	7212.000	47.38	74.00	-26.62	54.56	-7.18	Peak
5	14424.000	53.67	74.00	-20.33	52.98	0.69	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Rock

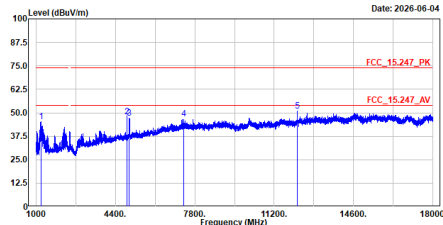


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1205.700	45.44	74.00	-28.56	71.23	-25.79	Peak
2	4880.000	47.93	74.00	-26.07	62.39	-14.46	Peak
3	4989.500	47.12	74.00	-26.88	61.24	-14.12	Peak
4	7320.000	46.84	74.00	-27.16	53.97	-7.13	Peak
5	12200.000	50.86	74.00	-23.14	51.70	-0.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Rock

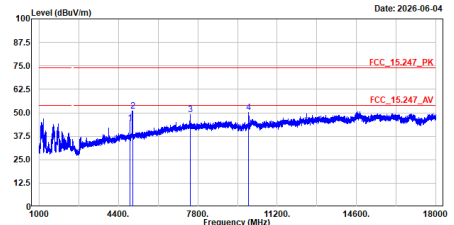


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	44.58	74.00	-29.42	59.84	-14.46	Peak
2	4999.250	51.13	74.00	-22.87	65.20	-14.07	Peak
3	7481.250	49.20	74.00	-24.80	56.33	-7.13	Peak
4	9961.550	50.02	74.00	-23.98	55.69	-5.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Rock

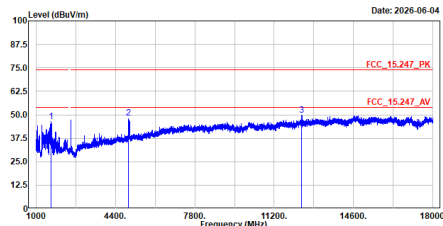


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1627.300	46.52	74.00	-27.48	71.95	-25.43	Peak
2	4956.000	48.22	74.00	-25.78	62.46	-14.24	Peak
3	12390.000	49.86	74.00	-24.14	50.77	-0.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2478MHz
Test BY :Rock

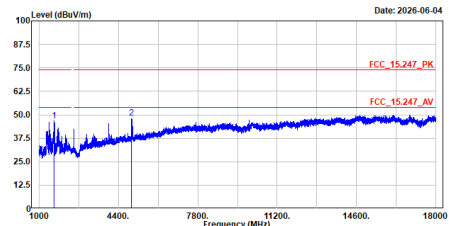


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1646.850	46.95	74.00	-27.05	72.30	-25.35	Peak
2	4956.000	48.34	74.00	-25.66	62.58	-14.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Rock

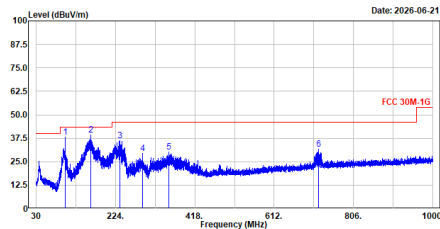


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	100.907	38.17	43.50	-5.33	66.34	-28.17	QP
2	163.181	39.31	43.50	-4.19	63.31	-24.00	QP
3	234.573	36.21	46.00	-9.79	61.67	-25.46	QP
4	289.669	29.25	46.00	-16.75	52.58	-23.33	QP
5	355.144	30.23	46.00	-15.77	52.19	-21.96	QP
6	720.155	31.63	46.00	-14.37	45.35	-13.72	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Rock

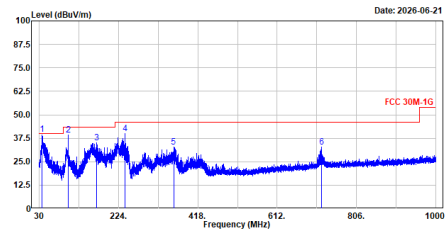


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	36.693	39.49	48.00	-8.51	64.81	-24.52	QP
2	100.907	39.20	43.50	-4.30	67.37	-28.17	QP
3	170.262	34.97	43.50	-8.53	59.34	-24.37	QP
4	240.005	39.91	46.00	-6.09	65.00	-25.09	QP
5	358.733	33.00	46.00	-13.00	54.89	-21.89	QP
6	720.349	32.79	46.00	-13.21	46.50	-13.71	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2402MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

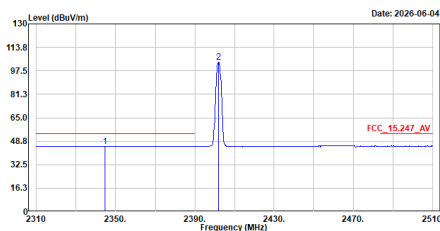


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2344.600	45.34	54.00	-8.66	14.82	30.52	Average
2	2402.000	103.73	-----	-----	73.36	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

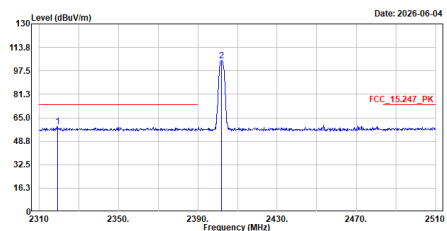


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2319.200	58.87	74.00	-15.13	28.30	30.57	Peak
2	2401.800	104.47	-----	-----	74.10	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

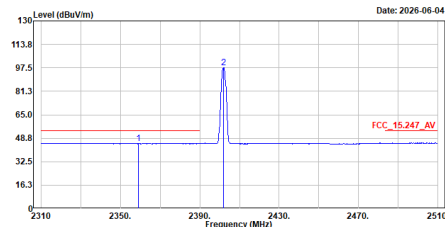


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2359.000	45.29	54.00	-8.71	14.81	30.48	Average
2	2402.000	97.51	-----	-----	67.14	30.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

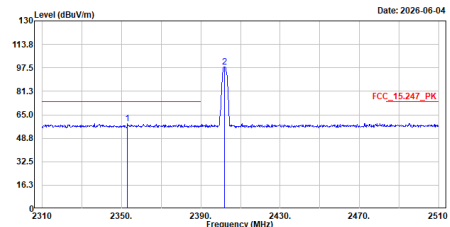


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2353.000	58.90	74.00	-15.10	28.42	30.48	Peak
2	2401.800	98.27	-----	-----	67.90	30.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

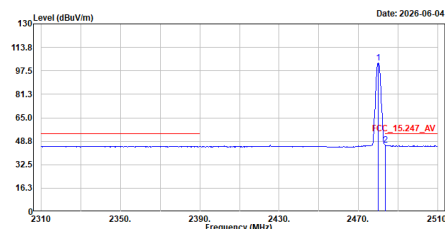


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	102.82	-----	-----	72.39	30.43	Average
2	2483.600	45.91	54.00	-8.09	15.48	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

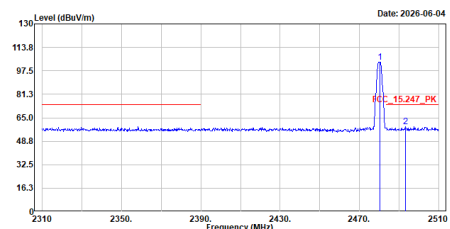


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.400	103.49	-----	-----	73.06	30.43	Peak
2	2493.200	58.72	74.00	-15.28	28.28	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

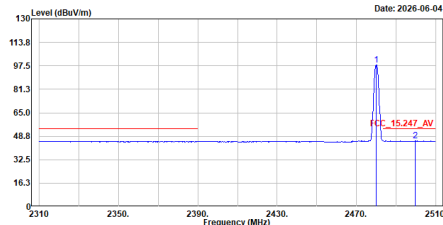


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2480.000	97.89	45.53	-8.47	67.46	30.43	Average
2	2499.000	45.53	45.53	-	15.08	30.45	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

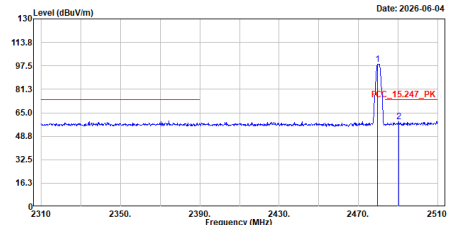


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2479.800	98.62	45.53	-15.22	68.19	30.43	Peak
2	2490.400	58.78	45.53	-	28.34	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Rock

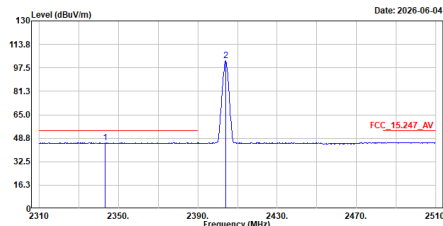


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2343.200	45.71	45.53	-8.29	15.17	30.54	Average
2	2404.000	102.34	45.53	-	71.99	30.35	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Rock

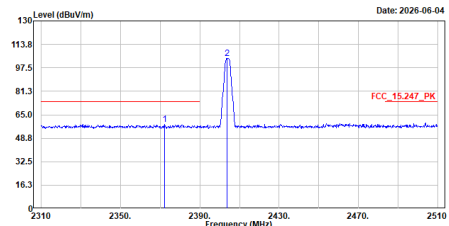


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2372.200	58.37	45.53	-15.63	27.89	30.48	Peak
2	2403.600	104.12	45.53	-	73.77	30.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Rock

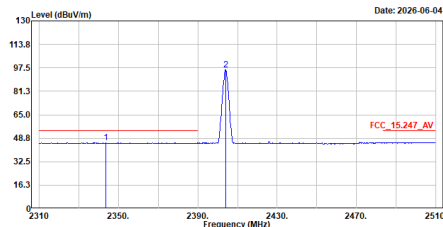


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2343.600	45.68	54.00	-8.32	15.15	30.53	Average
2	2404.000	96.22	-----	-----	65.87	30.35	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Rock

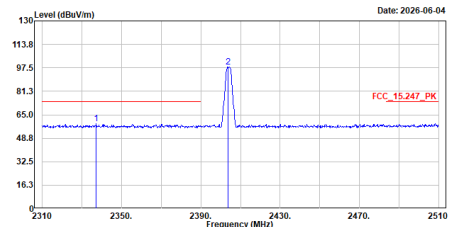


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2337.200	58.73	74.00	-15.27	28.16	30.57	Peak
2	2403.600	98.00	-----	-----	67.65	30.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Rock

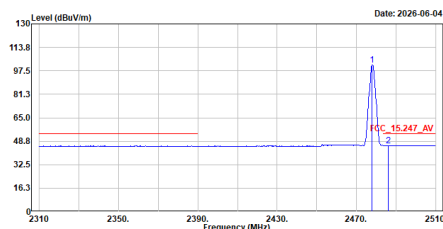


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2478.000	101.57	-----	-----	71.14	30.43	Average
2	2486.000	45.86	54.00	-8.14	15.43	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Rock

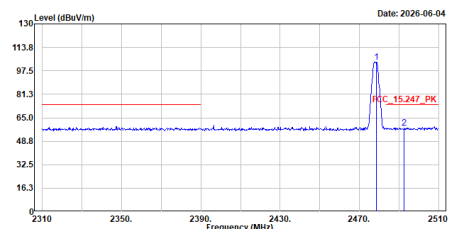


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2478.600	103.40	-----	-----	72.97	30.43	Peak
2	2492.600	58.09	74.00	-15.91	27.65	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2478MHz
Test BY :Rock

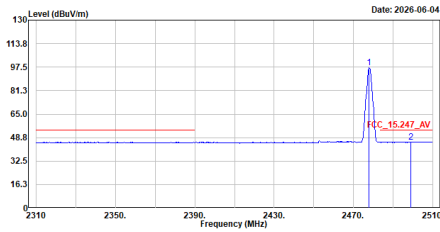


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2478.000	96.91	-----	-----	66.48	30.43	Average
2	2499.000	45.77	54.00	-8.23	15.33	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2478MHz
Test BY :Rock

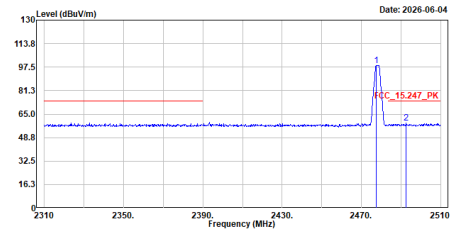


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2477.600	98.67	-----	-----	68.24	30.43	Peak
2	2492.600	59.11	74.00	-14.89	28.67	30.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Charging mode_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :Charging mode
Test BY :Rock

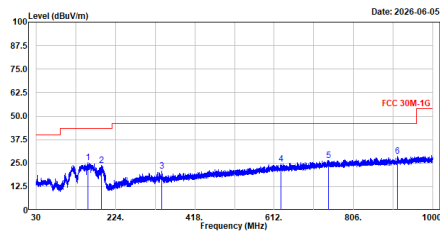


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	156.682	25.45	43.50	-18.05	49.35	-23.90	QP
2	189.080	23.71	43.50	-19.79	50.24	-26.53	QP
3	337.684	20.85	46.00	-25.15	42.87	-22.02	QP
4	628.102	24.61	46.00	-21.39	39.83	-15.22	QP
5	745.860	26.43	46.00	-19.57	39.50	-13.07	QP
6	913.282	28.62	46.00	-17.38	40.03	-11.41	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Charging mode_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :Charging mode
Test BY :Rock

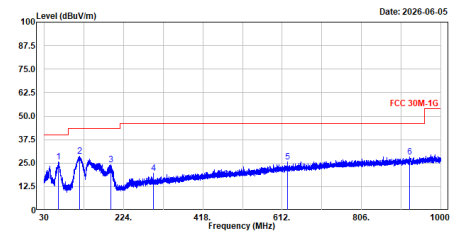

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	64.726	25.74	40.00	-14.26	51.02	-25.28	QP
2	115.748	28.50	43.50	-15.00	55.09	-26.59	QP
3	192.475	24.29	43.50	-19.21	50.91	-26.62	QP
4	297.041	19.68	46.00	-26.32	42.94	-23.26	QP
5	625.095	25.72	46.00	-20.28	41.01	-15.29	QP
6	924.340	28.37	46.00	-17.63	39.51	-11.14	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Worst-Case Emissions Above 18 GHz

