



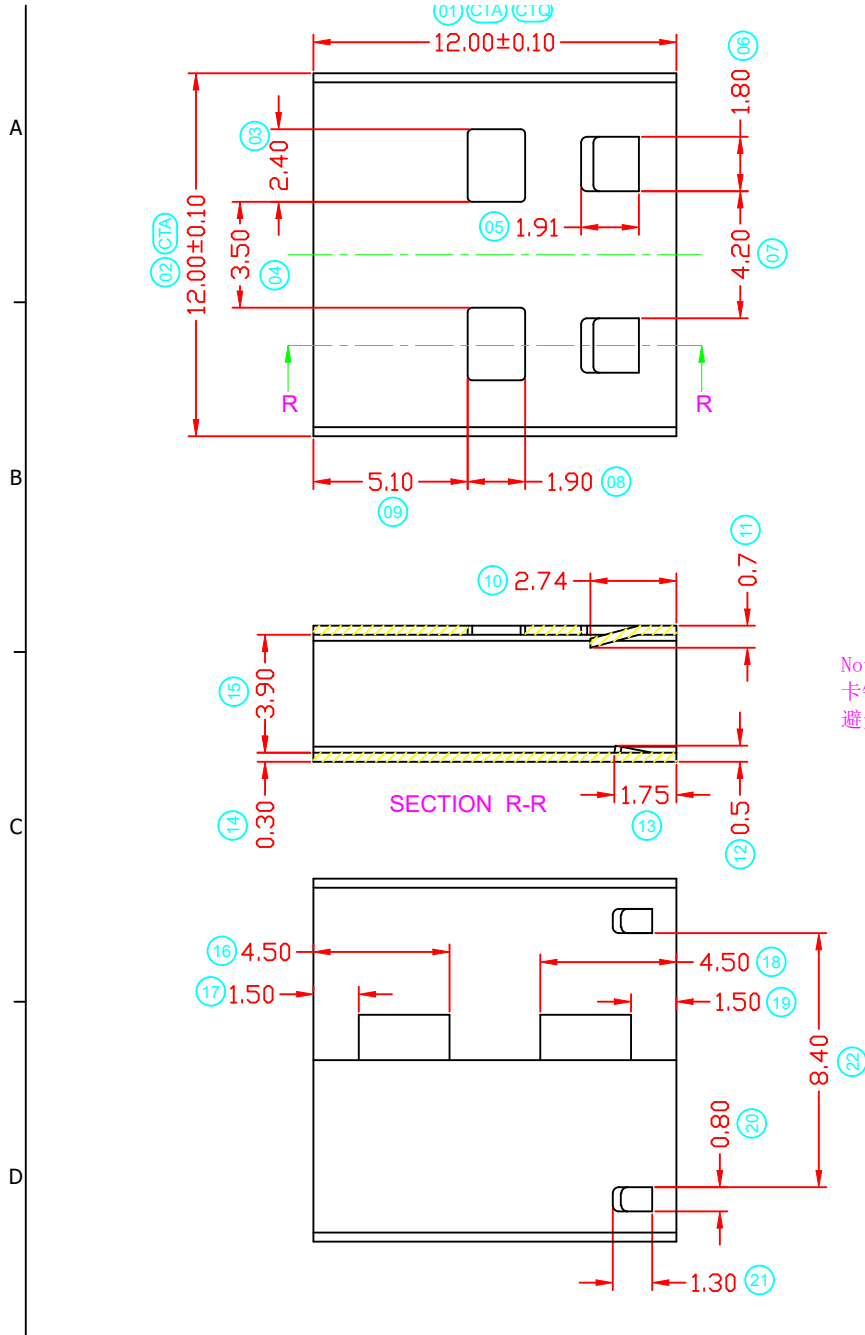

Note:
卡钩端面需有明显的直边结构，
避免卡扣功能失效

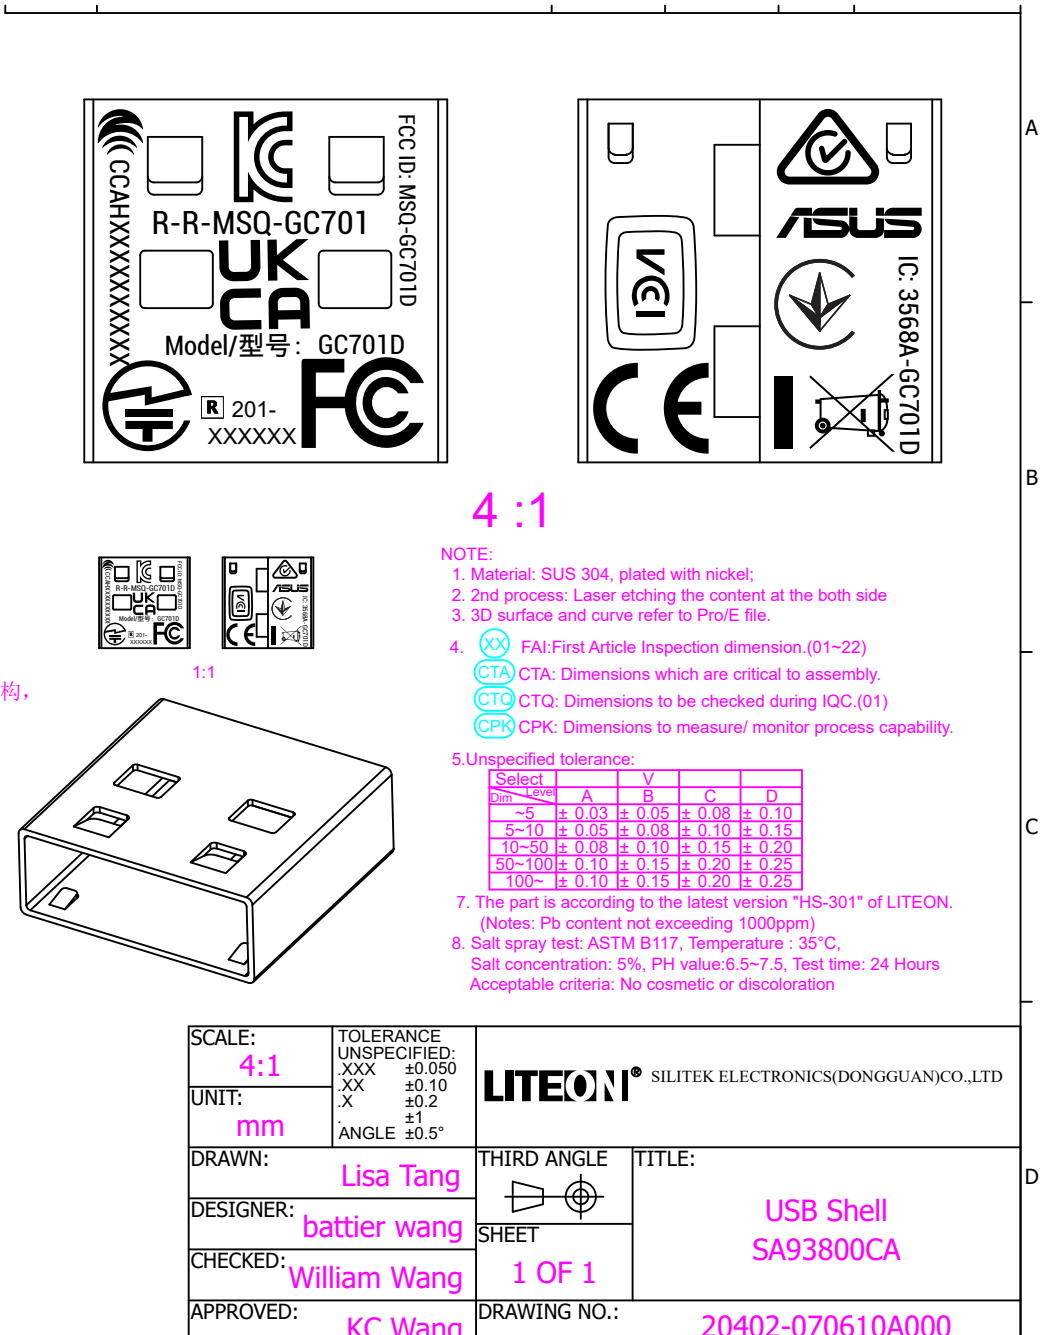

4:1

- NOTE:
1. Material: SUS 304, plated with nickel;
 2. 2nd process: Laser etching the content at the both side
 3. 3D surface and curve refer to Pro/E file.
 4. (XX) FAI: First Article Inspection dimension.(01~22)
 - (CTA) CTA: Dimensions which are critical to assembly.
 - (CTO) CTO: Dimensions to be checked during IQC.(01)
 - (CPK) CPK: Dimensions to measure/ monitor process capability.
 5. Unspecified tolerance:
- | Select Dim | Level | A | B | C | D |
|------------|-------|--------|--------|--------|--------|
| ~5 | | ± 0.03 | ± 0.05 | ± 0.08 | ± 0.10 |
| 5~10 | | ± 0.05 | ± 0.08 | ± 0.10 | ± 0.15 |
| 10~50 | | ± 0.08 | ± 0.10 | ± 0.15 | ± 0.20 |
| 50~100 | | ± 0.10 | ± 0.15 | ± 0.20 | ± 0.25 |
| 100~ | | ± 0.10 | ± 0.15 | ± 0.20 | ± 0.25 |
7. The part is according to the latest version "HS-301" of LITEON.
(Notes: Pb content not exceeding 1000ppm)
 8. Salt spray test: ASTM B117, Temperature : 35°C,
Salt concentration: 5%, PH value:6.5~7.5, Test time: 24 Hours
Acceptable criteria: No cosmetic or discoloration

SCALE: 4:1	TOLERANCE UNSPECIFIED: .XXX ±0.050 .XX ±0.10 .X ±0.2 ±1 ANGLE ±0.5°	LITEON [®] SILITEK ELECTRONICS(DONGGUAN)CO.,LTD	
UNIT: mm		THIRD ANGLE TITLE: USB Shell SA93800CA	
DRAWN: Lisa Tang	DESIGNER: battier wang	SHEET 1 OF 1	DRAWING NO.: 20402-070610A000
CHECKED: William Wang	APPROVED: KC. Wang		