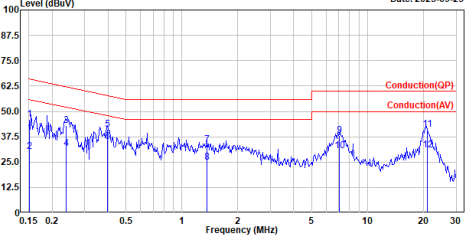
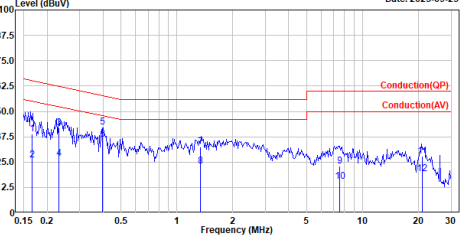
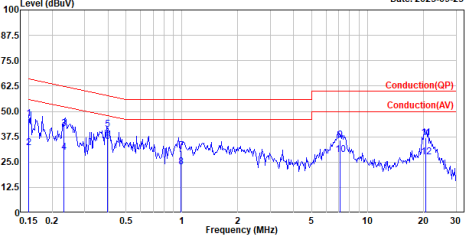
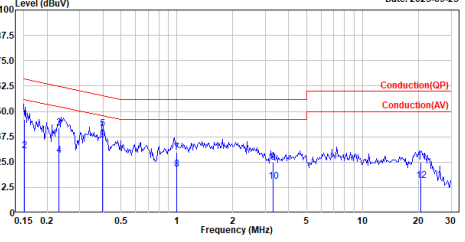


Appendix A. Test Result of AC Power Line Conducted Emission

TX_BLE2M_2440MHz_Line								TX_BLE2M_2440MHz_Neutral							
Site :HY-SR01 Condition :Line Mode :TX_BLE2M_2440MHz test by :Kevin Date: 2025-09-25								Site :HY-SR01 Condition :Neutral Mode :TX_BLE2M_2440MHz test by :Kevin Date: 2025-09-25							
															
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB			MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.151	46.05	65.95	-19.90	36.48	9.57	QP	1	0.167	38.75	65.12	-26.37	29.18	9.57	QP
2	0.151	30.32	55.95	-25.63	20.75	9.57	Average	2	0.167	25.98	55.12	-29.14	16.41	9.57	Average
3	0.239	43.10	62.12	-19.02	33.53	9.57	QP	3	0.232	41.75	62.39	-20.64	32.17	9.58	QP
4	0.239	31.74	52.12	-20.38	22.17	9.57	Average	4	0.232	26.70	52.39	-25.69	17.12	9.58	Average
5	0.396	41.01	57.93	-16.92	31.43	9.58	QP	5	0.399	42.25	57.07	-15.62	32.67	9.58	QP
6	0.396	35.14	47.93	-12.79	25.56	9.58	Average	6	0.399	36.37	47.87	-11.50	26.79	9.58	Average
7	1.369	33.56	56.00	-22.44	23.90	9.66	QP	7	1.337	32.34	56.00	-23.66	22.69	9.65	QP
8	1.369	24.77	46.00	-21.23	15.11	9.66	Average	8	1.337	23.16	46.00	-22.84	13.51	9.65	Average
9	7.021	38.23	60.00	-21.77	28.12	10.11	QP	9	7.550	23.09	60.00	-36.91	12.93	10.16	QP
10	7.021	30.48	50.00	-19.52	20.37	10.11	Average	10	7.550	15.54	50.00	-34.46	5.38	10.16	Average
11	20.882	41.07	60.00	-18.93	31.21	9.86	QP	11	20.870	28.07	60.00	-31.93	18.01	10.06	QP
12	20.882	31.00	50.00	-19.00	21.14	9.86	Average	12	20.870	19.16	50.00	-30.84	9.10	10.06	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = LISN insertion loss + Cable loss
 3. Over Limit = Level - Limit Line

Charge mode


Charge_Line								Charge_Neutral							
Site :HY-SR01 Condition :Line Mode :Charge test by :Kevin Date: 2025-09-25								Site :HY-SR01 Condition :Neutral Mode :Charge test by :Kevin Date: 2025-09-25							
															
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB			MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.150	46.26	65.99	-19.73	36.69	9.57	QP	1	0.151	45.86	65.92	-20.06	36.30	9.56	QP
2	0.150	31.92	55.99	-24.07	22.35	9.57	Average	2	0.151	30.50	55.92	-25.42	20.94	9.56	Average
3	0.231	41.43	62.43	-21.00	31.87	9.56	QP	3	0.233	41.85	62.35	-20.50	32.27	9.58	QP
4	0.231	29.64	52.43	-22.79	20.08	9.56	Average	4	0.233	28.34	52.35	-24.01	18.76	9.58	Average
5	0.396	41.22	57.93	-16.71	31.64	9.58	QP	5	0.398	41.54	57.89	-16.35	31.96	9.58	QP
6	0.396	34.94	47.93	-12.99	25.36	9.58	Average	6	0.398	35.88	47.89	-12.01	26.30	9.58	Average
7	0.990	30.63	56.00	-25.37	21.00	9.63	QP	7	0.995	29.92	56.00	-26.08	20.29	9.63	QP
8	0.990	22.60	46.00	-23.40	12.97	9.63	Average	8	0.995	21.66	46.00	-24.34	12.83	9.63	Average
9	7.081	35.93	60.00	-24.07	25.82	10.11	QP	9	3.294	24.86	56.00	-31.14	14.97	9.89	QP
10	7.081	28.74	50.00	-21.26	18.63	10.11	Average	10	3.294	15.34	46.00	-30.66	5.45	9.89	Average
11	20.494	36.88	60.00	-23.12	27.03	9.85	QP	11	20.642	24.84	60.00	-35.16	14.78	10.06	QP
12	20.494	27.57	50.00	-22.43	17.72	9.85	Average	12	20.642	15.88	50.00	-34.12	5.82	10.06	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = LISN insertion loss + Cable loss
 3. Over Limit = Level - Limit Line


Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK (1Mbps)	2402	0.67	≥ 0.50	Pass
	2440	0.66	≥ 0.50	Pass
	2480	0.67	≥ 0.50	Pass
GFSK (2Mbps)	2404	1.23	≥ 0.50	Pass
	2440	1.24	≥ 0.50	Pass
	2478	1.25	≥ 0.50	Pass


GFSK/1MHz/1M/2402MHz/Ch00/Ant.1

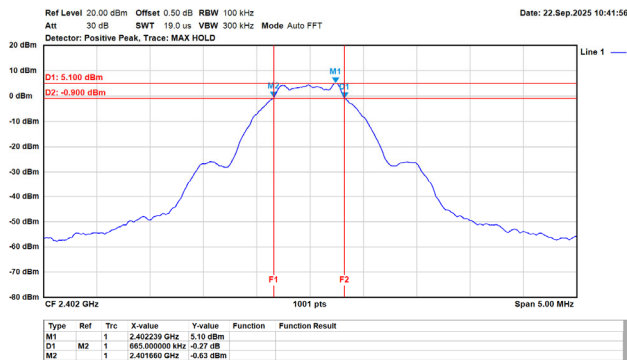


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

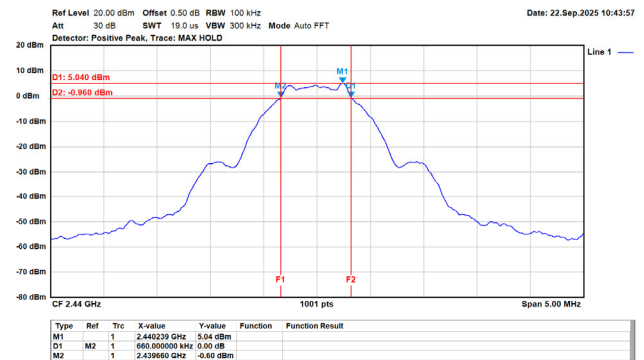


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

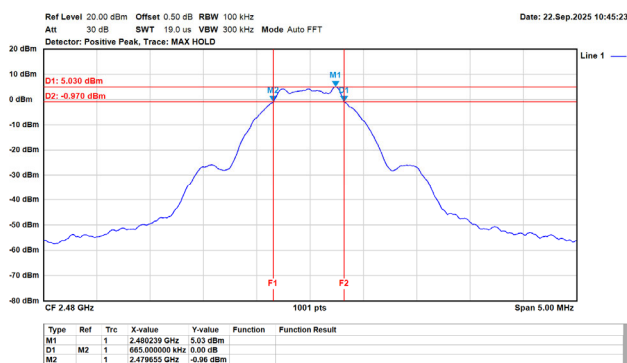


GFSK/2MHz/2M/2404MHz/Ch00/Ant.1

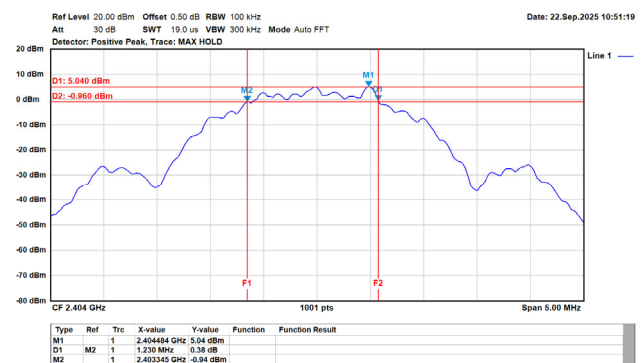

GFSK/2MHz/2M/2440MHz/Ch17/Ant.1

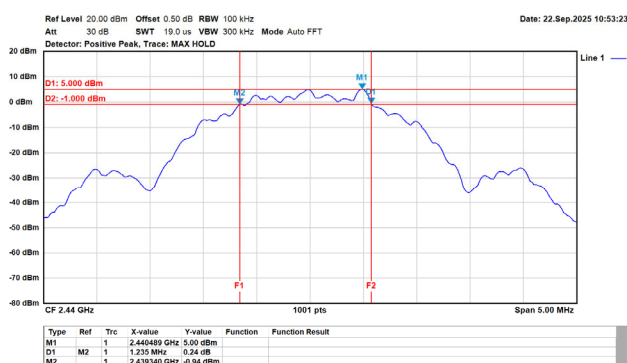

GFSK/2MHz/2M/2478MHz/Ch36/Ant.1

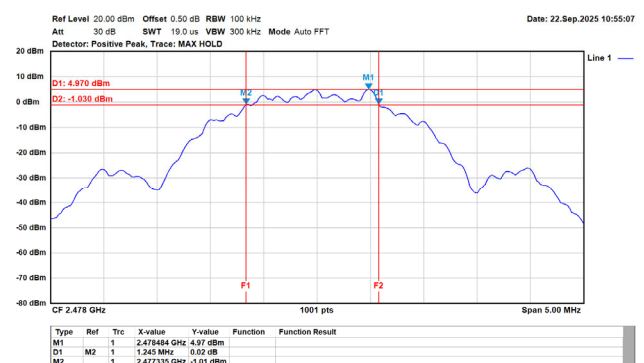


Appendix C. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	9.74	30.00	Pass
	2440	9.72	30.00	Pass
	2480	9.61	30.00	Pass
GFSK (2Mbps)	2404	9.76	30.00	Pass
	2440	9.71	30.00	Pass
	2478	9.62	30.00	Pass

Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1Mbps)	2402	-11.66	8.00	Pass
	2440	-11.68	8.00	Pass
	2480	-11.68	8.00	Pass
GFSK (2Mbps)	2404	-13.39	8.00	Pass
	2440	-13.51	8.00	Pass
	2478	-13.45	8.00	Pass

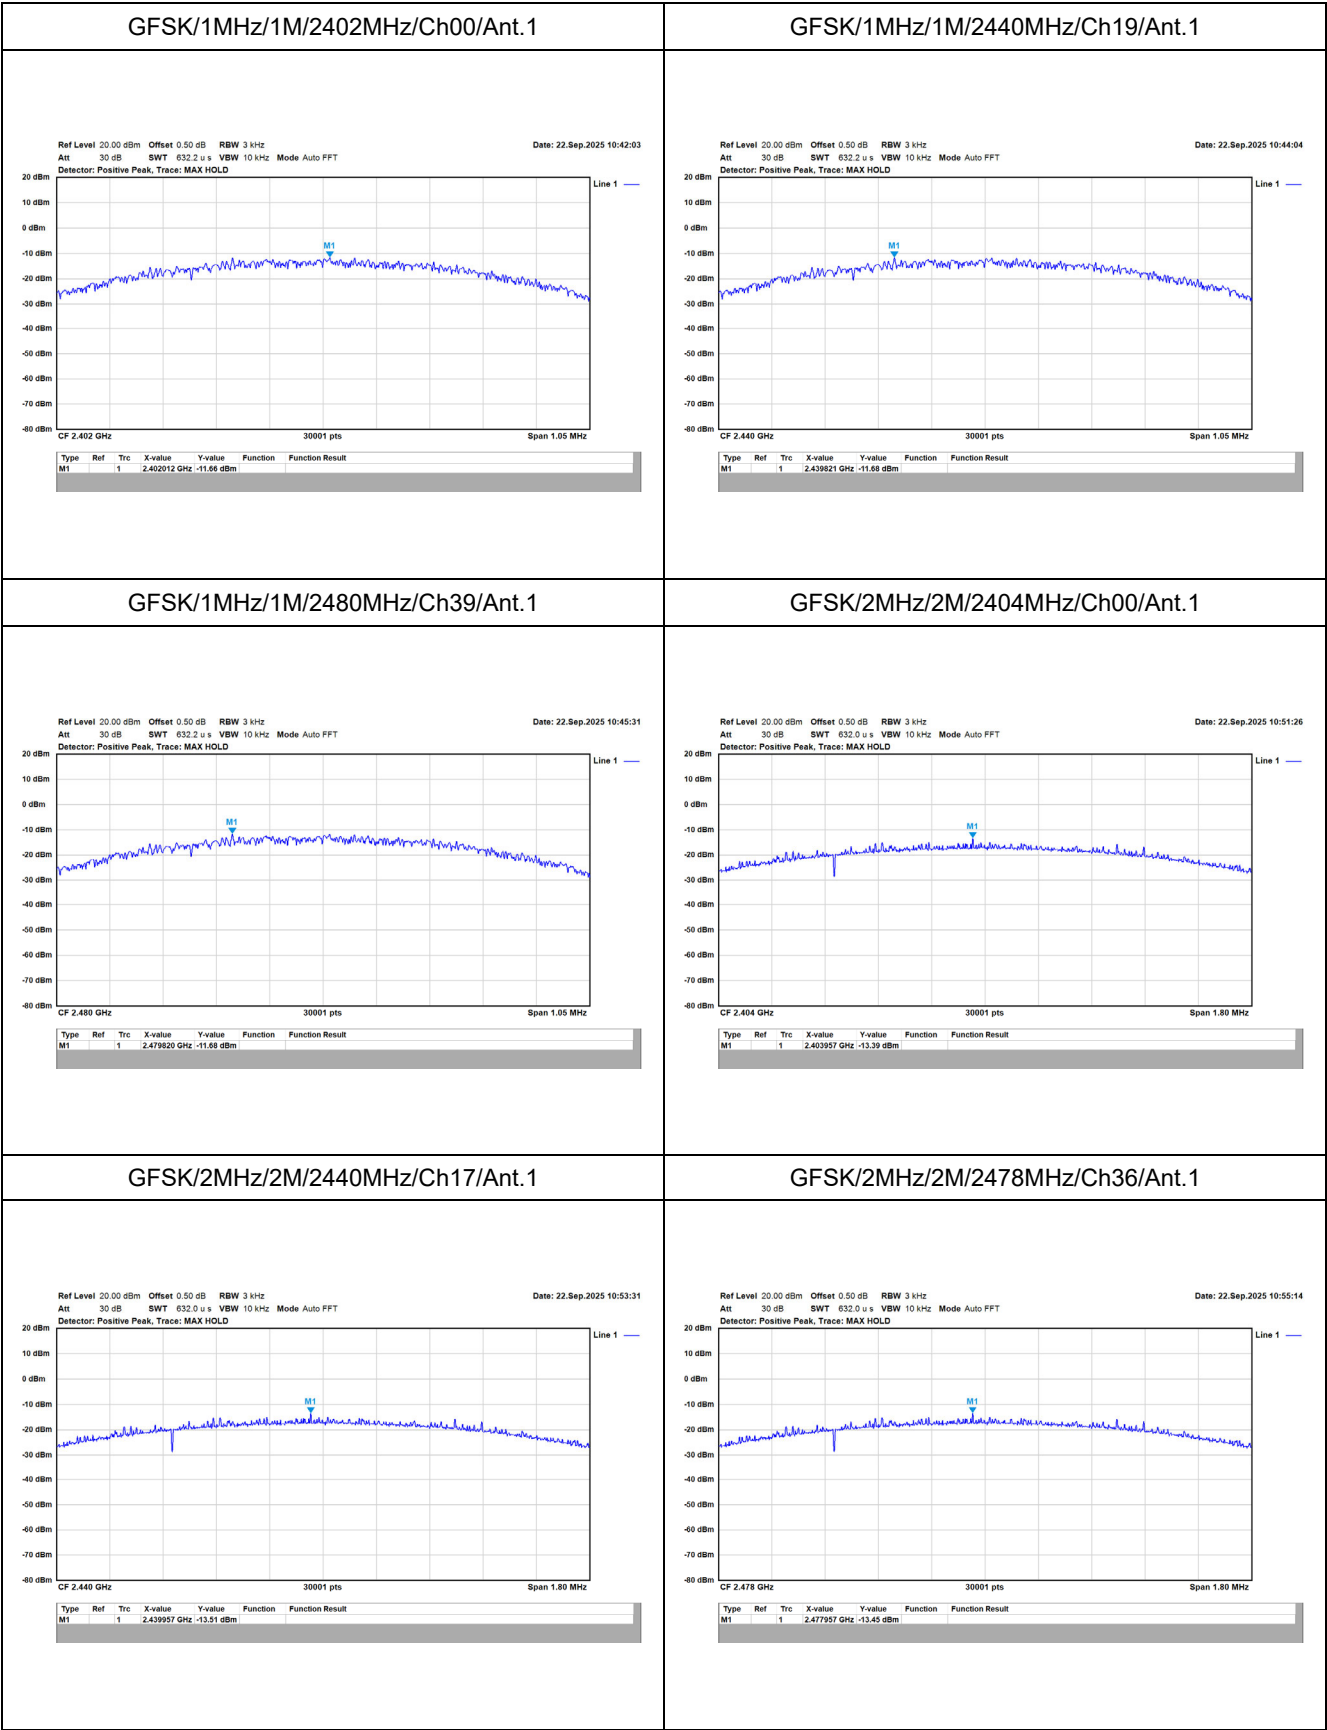


Appendix E. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS
GFSK (2 Mbps)	> 20	PASS


GFSK/1MHz/1M/2402MHz/Ch00/Ant.1 (Ref.)

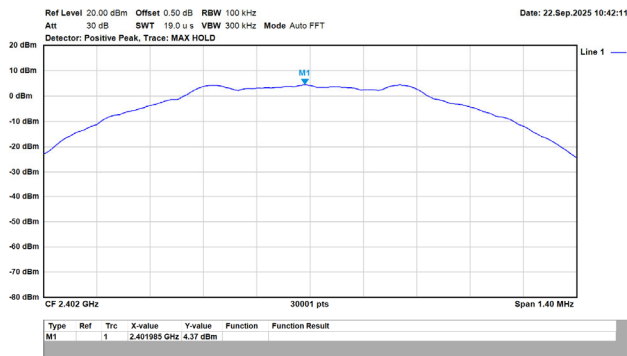


GFSK/1MHz/1M/2402MHz/Ch00/Ant.1

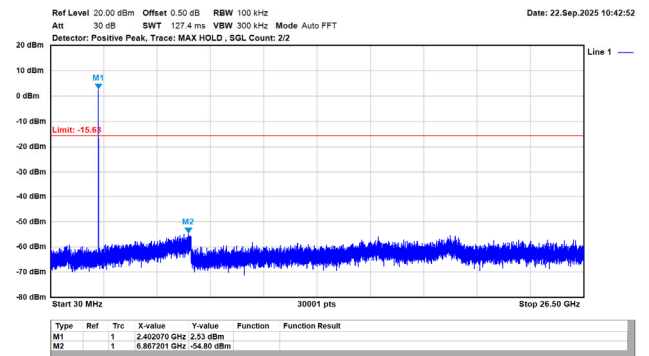


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1 (Ref.)

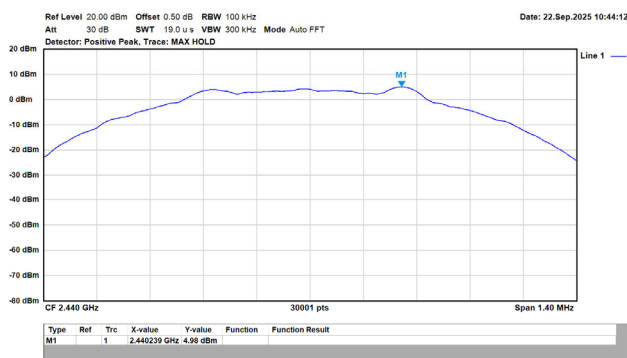


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

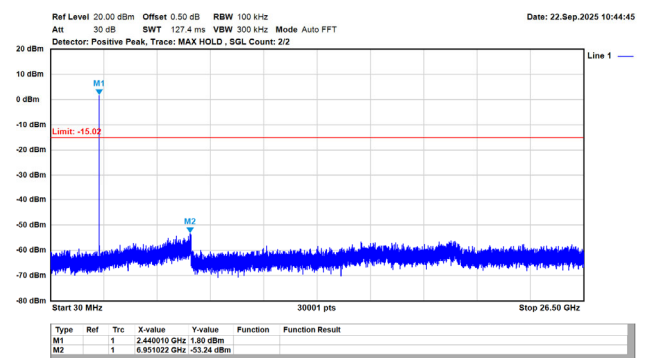


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1 (Ref.)

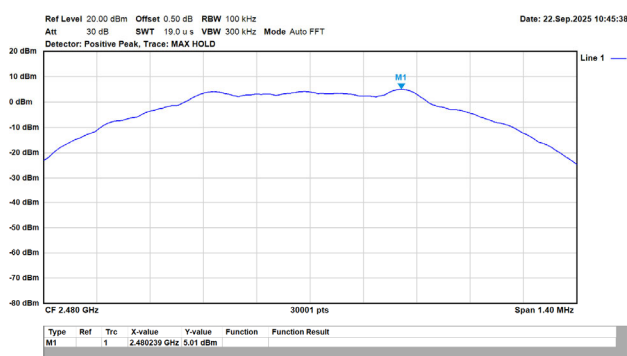


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

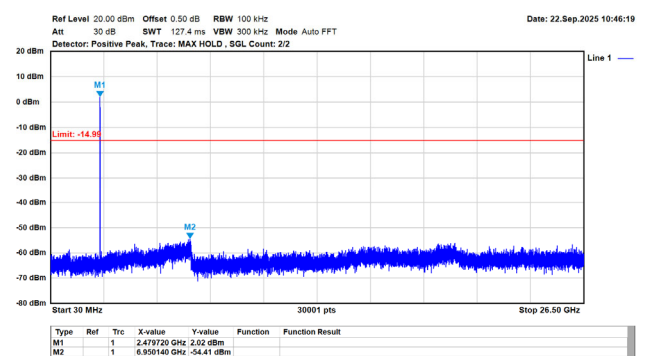


GFSK/2MHz/2M/2404MHz/Ch00/Ant.1 (Ref.)

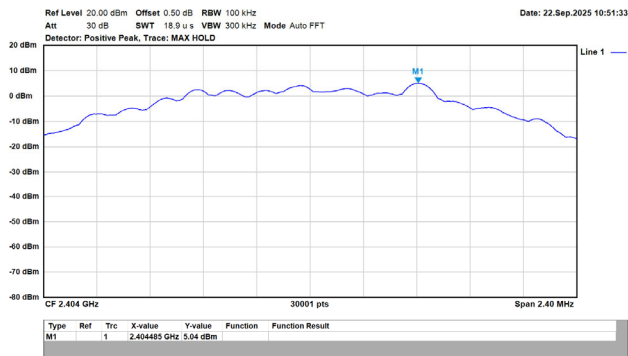


GFSK/2MHz/2M/2404MHz/Ch00/Ant.1

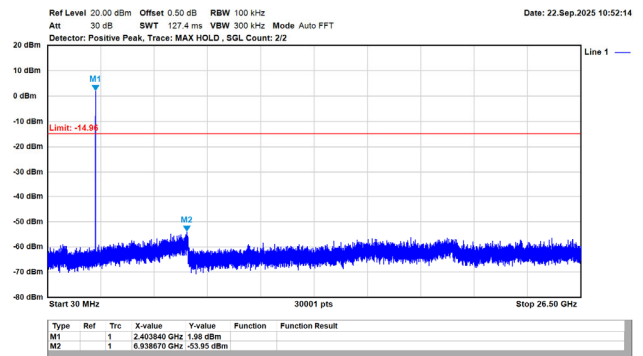


GFSK/2MHz/2M/2440MHz/Ch17/Ant.1 (Ref.)

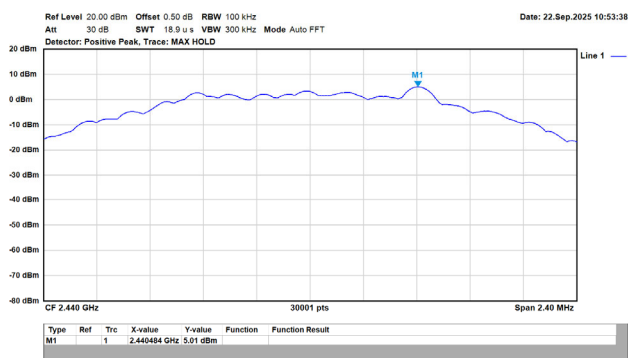


GFSK/2MHz/2M/2440MHz/Ch17/Ant.1

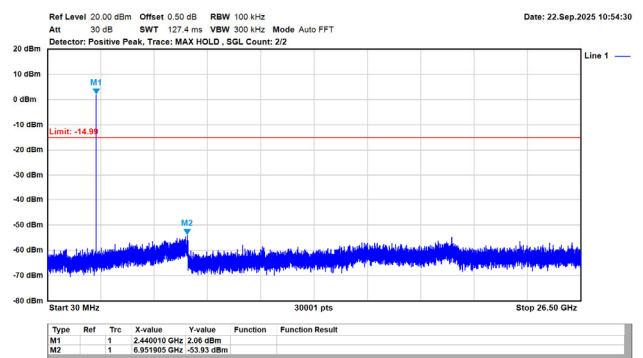


GFSK/2MHz/2M/2478MHz/Ch36/Ant.1 (Ref.)

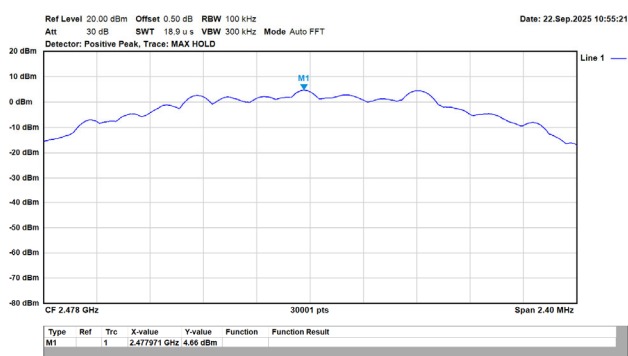


GFSK/2MHz/2M/2478MHz/Ch36/Ant.1

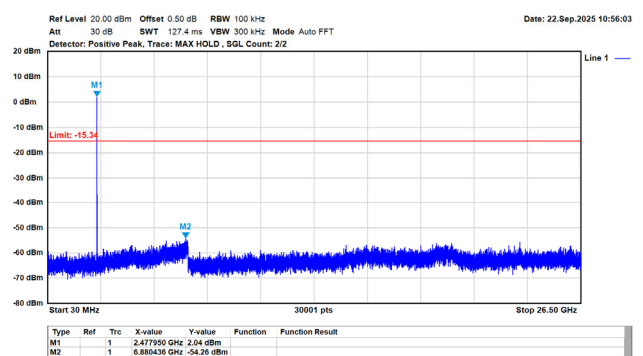


GFSK/1MHz/1M/2402MHz/Ch00/Ant.1(Band Edge)

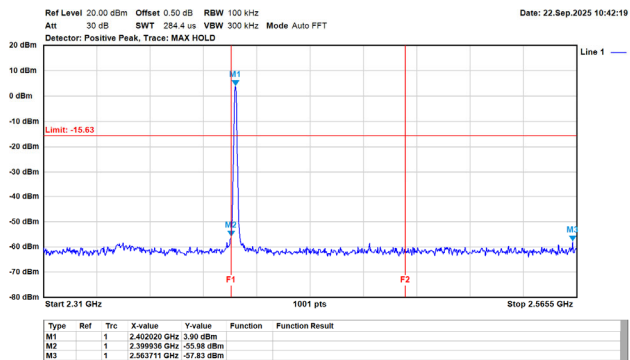


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1(Band Edge)

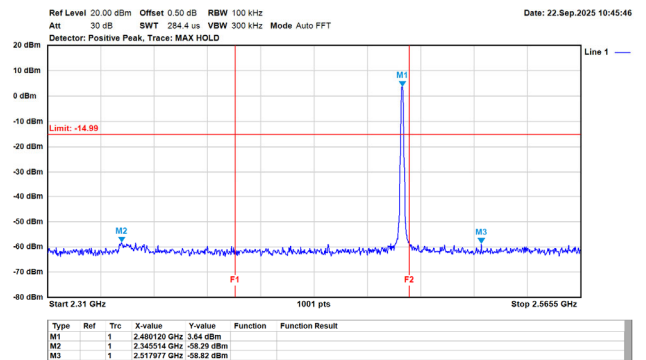

GFSK/2MHz/2M/2404MHz/Ch00/Ant.1(Band Edge)

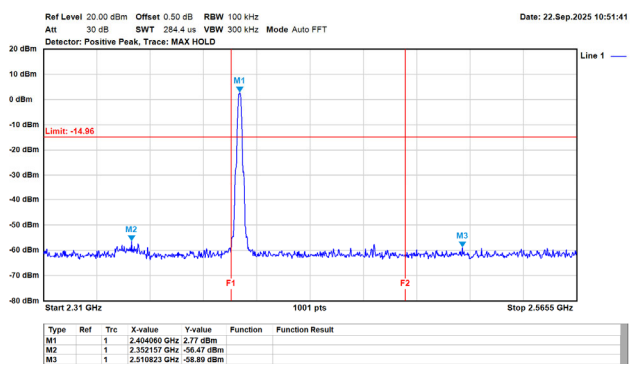

GFSK/2MHz/2M/2478MHz/Ch36/Ant.1(Band Edge)

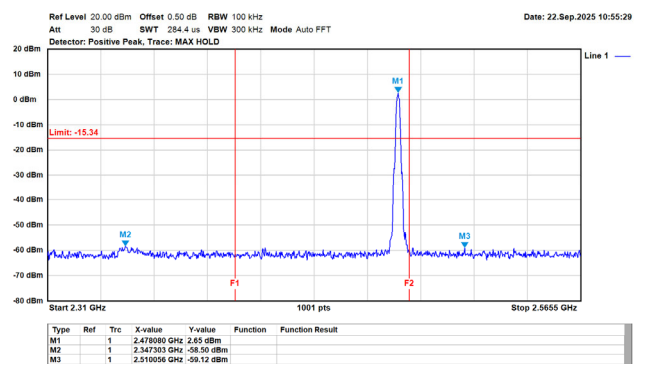


Appendix F. Test Result of Radiated Emission

TX_BLE1M_2402MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE1M_2402MHz Test BY :Bob Level (dBuV/m) Date: 2025-09-23 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4804.000</td><td>37.30</td><td>74.00</td><td>-36.70</td><td>52.25</td><td>-14.95</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4804.000	37.30	74.00	-36.70	52.25	-14.95	Peak	TX_BLE1M_2402MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE1M_2402MHz Test BY :Bob Level (dBuV/m) Date: 2025-09-23 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4804.000</td><td>37.60</td><td>74.00</td><td>-36.40</td><td>52.55</td><td>-14.95</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4804.000	37.60	74.00	-36.40	52.55	-14.95	Peak
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4804.000	37.30	74.00	-36.70	52.25	-14.95	Peak																																										
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4804.000	37.60	74.00	-36.40	52.55	-14.95	Peak																																										
TX_BLE1M_2440MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE1M_2440MHz Test BY :Bob Level (dBuV/m) Date: 2025-09-23 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4880.000</td><td>36.96</td><td>74.00</td><td>-37.04</td><td>51.55</td><td>-14.59</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4880.000	36.96	74.00	-37.04	51.55	-14.59	Peak	TX_BLE1M_2440MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE1M_2440MHz Test BY :Bob Level (dBuV/m) Date: 2025-09-23 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4880.000</td><td>37.33</td><td>74.00</td><td>-36.67</td><td>51.92</td><td>-14.59</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4880.000	37.33	74.00	-36.67	51.92	-14.59	Peak
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4880.000	36.96	74.00	-37.04	51.55	-14.59	Peak																																										
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4880.000	37.33	74.00	-36.67	51.92	-14.59	Peak																																										

TX_BLE1M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

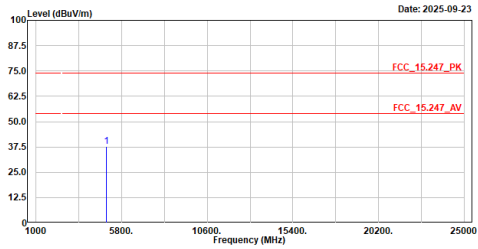


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	37.79	74.00	-36.21	52.01	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

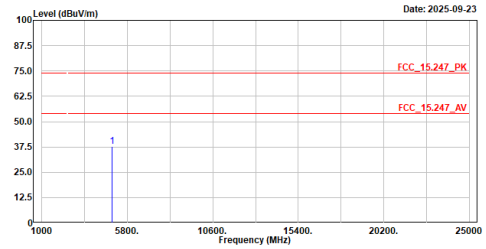


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	37.62	74.00	-36.38	51.84	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Bob

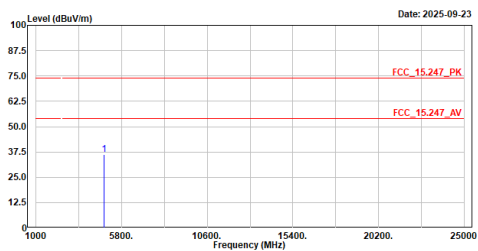


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4808.000	36.29	74.00	-37.71	51.23	-14.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Bob

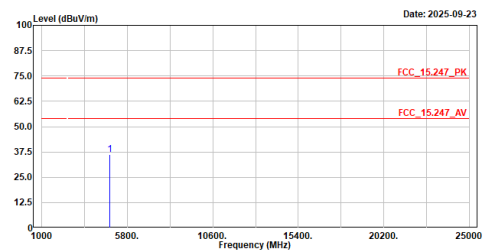


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4808.000	36.37	74.00	-37.63	51.31	-14.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Bob

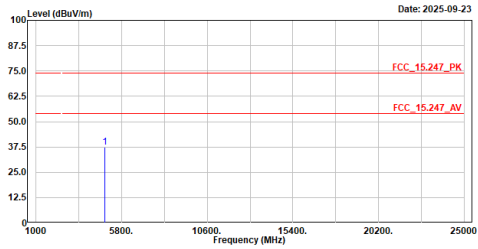


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	37.44	74.00	-36.56	52.03	-14.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Bob

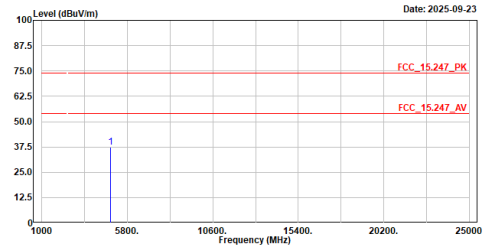


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	37.18	74.00	-36.82	51.77	-14.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Bob

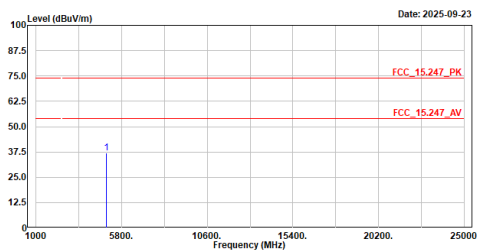


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4956.000	36.81	74.00	-37.19	51.04	-14.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2478MHz
Test BY :Bob

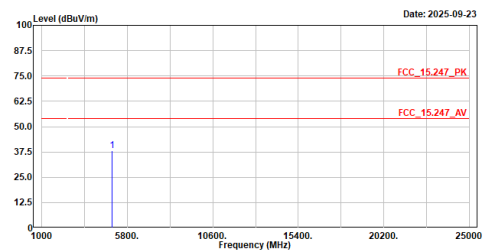


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4956.000	38.14	74.00	-35.86	52.37	-14.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Bob

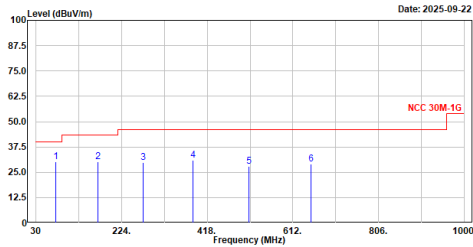


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	74.620	30.01	40.00	-9.99	57.64	-27.63	QP
2	169.680	30.17	43.50	-13.33	54.65	-24.48	QP
3	273.470	29.96	46.00	-16.04	54.03	-24.07	QP
4	385.990	30.80	46.00	-15.20	51.67	-20.87	QP
5	513.060	28.05	46.00	-17.95	45.99	-17.94	QP
6	653.710	29.19	46.00	-16.81	44.20	-15.81	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE2M_2440MHz_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Bob

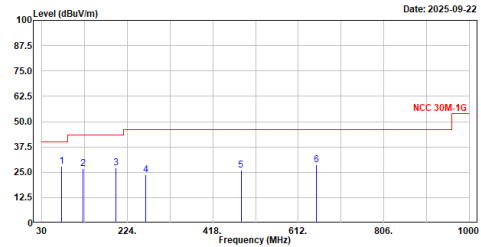


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	74.620	27.90	40.00	-12.10	55.53	-27.63	QP
2	124.090	26.86	43.50	-16.64	52.97	-26.11	QP
3	198.780	27.27	43.50	-16.23	54.12	-26.85	QP
4	266.680	23.65	46.00	-22.35	48.08	-24.43	QP
5	482.020	26.13	46.00	-19.87	44.84	-18.71	QP
6	653.710	28.69	46.00	-17.31	43.70	-15.81	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Charge_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :Charge
Test BY :Bob

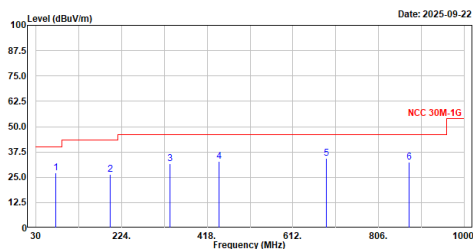


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	74.620	27.16	40.00	-12.84	54.79	-27.63	QP
2	198.780	26.39	43.50	-17.11	53.24	-26.85	QP
3	333.610	31.57	46.00	-14.43	53.75	-22.18	QP
4	445.160	32.90	46.00	-13.10	52.15	-19.25	QP
5	687.660	34.37	46.00	-11.63	48.91	-14.54	QP
6	875.840	32.40	46.00	-13.60	44.44	-12.04	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Charge_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :Charge
Test BY :Bob

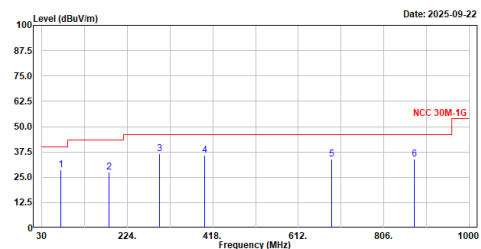


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	72.680	28.64	40.00	-11.36	55.62	-26.98	QP
2	182.290	27.56	43.50	-15.94	53.49	-25.93	QP
3	296.750	36.79	46.00	-9.21	60.20	-23.41	QP
4	399.570	35.72	46.00	-10.28	56.36	-20.64	QP
5	687.660	33.94	46.00	-12.06	48.48	-14.54	QP
6	875.840	33.78	46.00	-12.22	45.82	-12.04	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2402MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Bob

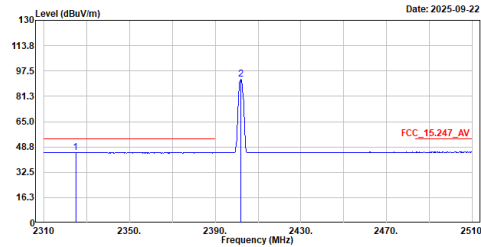


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2324.800	45.36	54.00	-8.64	14.80	30.56	Average
2	2402.000	92.84	-----	-----	61.58	30.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Bob

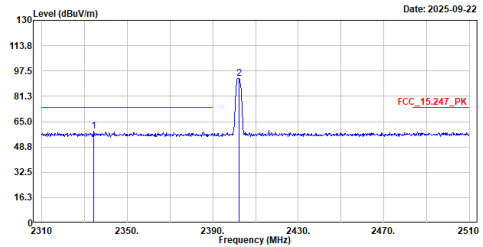


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2334.400	58.78	74.00	-15.22	28.31	30.47	Peak
2	2402.200	92.72	-----	-----	62.26	30.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Bob

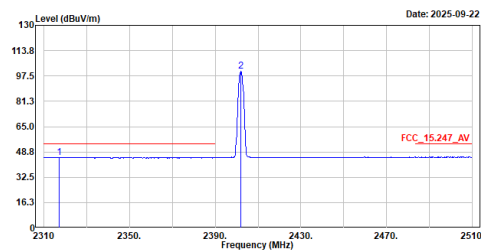


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2317.000	45.35	54.00	-8.65	14.74	30.61	Average
2	2402.000	100.39	-----	-----	69.93	30.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Bob

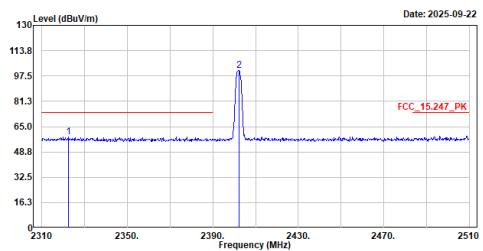


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2322.400	58.43	74.00	-15.57	27.84	30.59	Peak
2	2402.200	101.03	-----	-----	70.57	30.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

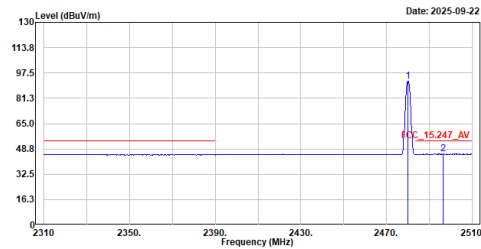


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	92.12	-----	-----	61.73	30.39	Average
2	2496.400	45.60	54.00	-8.40	15.09	30.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

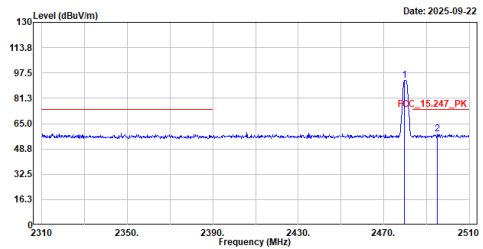


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2479.800	92.91	-----	-----	62.52	30.39	Peak
2	2495.200	58.29	74.00	-15.71	27.78	30.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

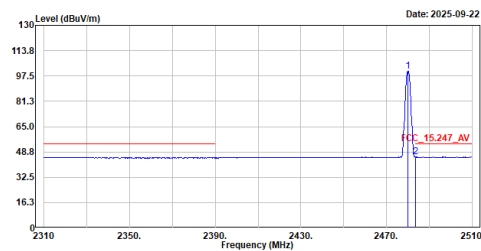


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	100.50	-----	-----	70.11	30.39	Average
2	2483.600	45.52	54.00	-8.48	15.08	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

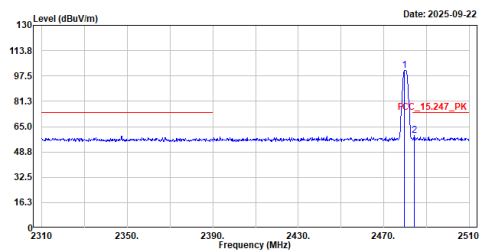


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2479.800	101.26	-----	-----	70.87	30.39	Peak
2	2484.400	59.12	74.00	-14.88	28.68	30.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Bob

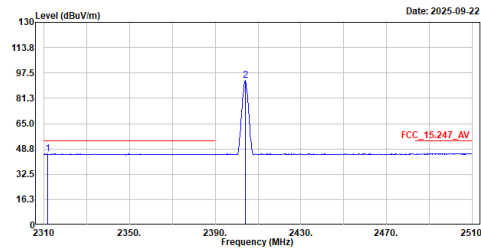


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2311.600	45.68	54.00	-8.32	15.07	30.61	Average
2	2404.000	92.48	-----	-----	61.99	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Bob

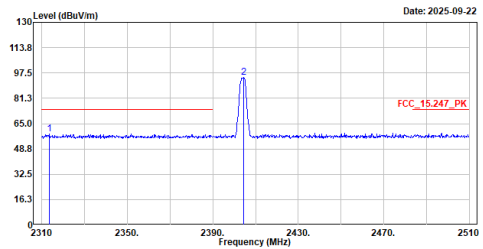


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2313.600	58.17	74.00	-15.83	27.56	30.61	Peak
2	2404.600	94.49	-----	-----	63.99	30.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Bob

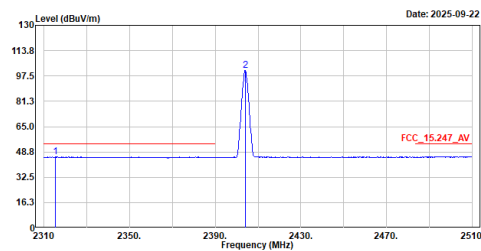


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2315.400	45.52	54.00	-8.48	14.91	30.61	Average
2	2404.000	101.20	-----	-----	70.71	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Bob

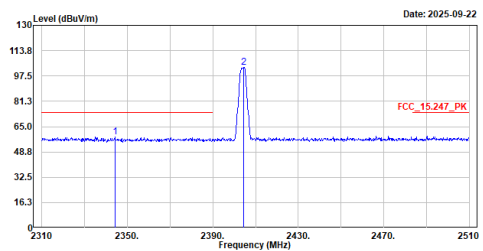


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2344.200	58.28	74.00	-15.72	27.86	30.42	Peak
2	2404.600	103.15	-----	-----	72.65	30.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Bob

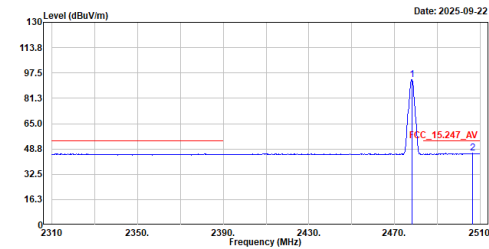


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2478.200	93.10	-----	-----	62.71	30.39	Average
2	2506.400	45.90	54.00	-8.10	15.39	30.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Bob

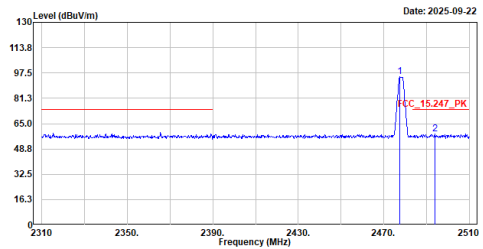


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2477.600	94.97	-----	-----	64.58	30.39	Peak
2	2493.800	58.18	74.00	-15.82	27.68	30.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2478MHz
Test BY :Bob

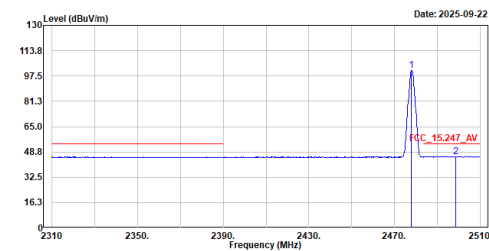


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2478.000	101.15	-----	-----	70.76	30.39	Average
2	2498.600	45.77	54.00	-8.23	15.26	30.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2478MHz
Test BY :Bob

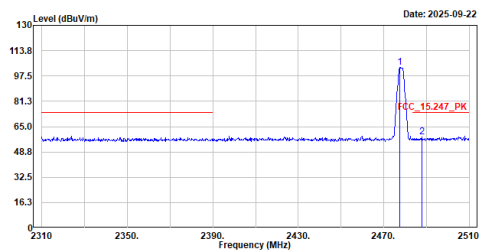

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2477.600	102.92	-----	-----	72.53	30.39	Peak
2	2487.800	58.32	74.00	-15.68	27.84	30.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.