


THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT© 2026 INVENTEC CORPORATION .

LEGEND


PART NO	REV	VARIATION
6060B4085903	A01	As Shown

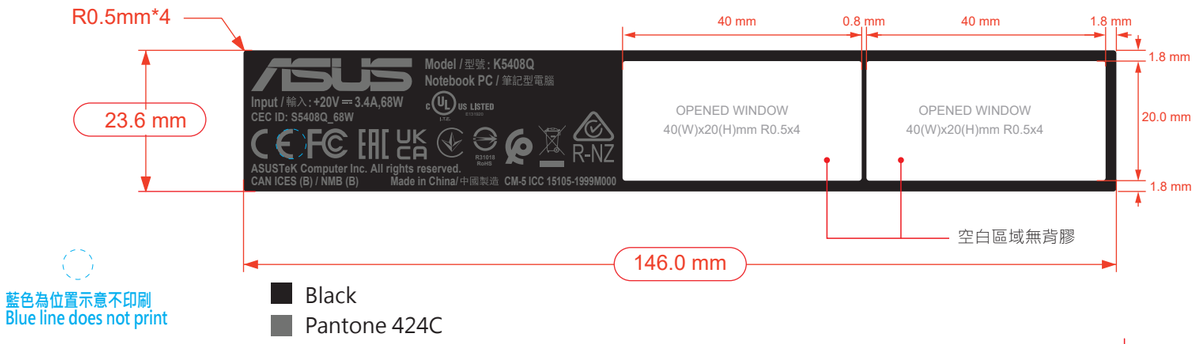

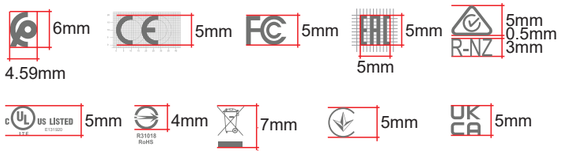


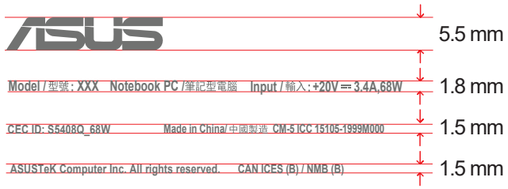

出標樣式/佈膠示意圖

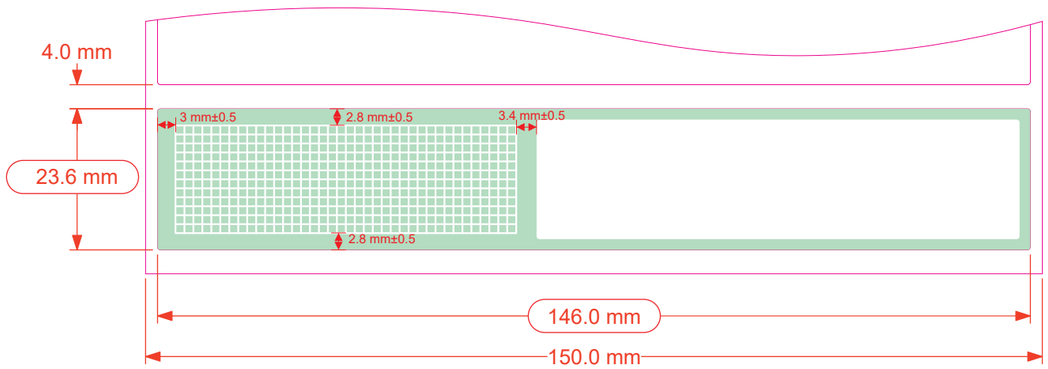

卷芯要有以下資訊(Must be shown inside the reel)

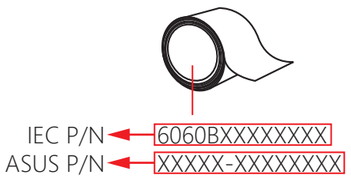

離型紙後請印刷以下資訊(Must be shown on the liner)



★注意：ASUS PN和Vendor code用英文半型 " - " 分開
Separate ASUS PN and Vendor Code with "-" (no space allowed)

NOTE:
(1) THE () CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
(2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
(3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
(4) MATERIAL:
A: 1.面材 Facestock (Code): Lexan 8010 polycarbonate film(PC G11)
2.表面處理TopCoat (Code) :霧油(Matte Varnish)
3.膠性Adhesives Pattern : 平膠(flat)+網格膠(grid glue)
or equivalent material.(the material spec as same as Q-Form spec)
B.ADHESIVE: 3M-SP7533
C.THICKNESS: 0.195mm(面材0.125mm+霧油+黑底+水膠)(Facestock+adhesive)
D.RAW MATERIAL COLOR: Transparent
E.NEED UL CERTIFICATION: YES, 正永-Material UL Code :CM-100-011
(5) INK COLOR: 底色 (background color): Black C, 圖文 (graphics): Pantone 424C
(6) THERMAL TRANSFER RIBBON/ NEED UL CERTIFICATION:N/A
*Agency requirement: UL & cUL Recognized Component Marking and Labeling System (PGDQ2 or PGDQ8) or UL & cUL Recognized Component Printing Materials (PGJI2/PGJI8).
*Agency requirement: CSA Approved Manufacturer of Accepted Adhesive Type Name Plates. CSA Identifier will be appear on the label (If the label is CSA approved).
(7) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
(8) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR" AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

	公差 Tolerance
材料Material	Dimension
Label W*H	-0.4mm
Labe Facestock+Adhesive	±0.02mm

測試規範

Eraser Model	Usage Times	Weight	Length	Cleaning	Testing Standards
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm	N/A	1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

Label Criteria

	Paste Location	GlueType	Paste Method	Peel off Method	Test Criteria	Remark
	Carton	一般膠 General Glue	食指推平 Flatten with index finger	No	1. 不脫落 Does not peel off 2. 不翹起 Does not lift up 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑, Air bubbles within a 5*5cm area do not exceed two, each bubble <5mm in diameter	環測結束需靜置12hr, Must rest for 12 hours after Storge testing completion
✓	Cover	一般膠 General Glue	食指推平 Flatten with index finger	No	同上 Same as the above table	
		R膠 R Glue	食指推平 Flatten with index finger	任一角以90°(慢慢撕下) Peel off any corner of the label slowly at a 90° angle	1. 不脫落 Does not peel off 2. 不可殘膠No adhesive residue allowed (輕微可用3M擦拭布擦拭後無殘膠 Light residue can be cleaned off with a 3M cleaning cloth without leaving residue) 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑, Air bubbles within a 5*5cm area do not exceed two, each bubble <5mm in diameter 4. 如呈浮貼狀需可再貼回則為接受 If the label can be re-adhered after lifting, it is acceptable 5. 呈捲、曲、翹 狀則不予接受 If the label curls, bends, or lifts, it is unacceptable	

REVISION HISTORY

DESIGNER	CHANGE NO.	DOC REV	DATE dd/mm/yyyy
-	INITIAL	A	

MODEL	S5408QA		
DESIGNER	Olivia Lan	D:04 M:05 Y:26	
MANAGER	Jane Lee	D:04 M:05 Y:26	
THIRD AHGLE PROJECTION	DO NOT SCALE DRAWING		
LINEAR mm	X	X.X	X.XX
INCH			

Inventec CORPORATION CONFIDENTIAL

TITLE: K5408Q RATING LABEL (WO/3C) V1.0 68W(S5408QA) BLK

DOCUMENT NUMBER

SIZE	CODE	NUMBER	REV	VER
B	PS	6060-B40859-03-AI	A	0

SCALE: 1:1 | UNIT:mm | SHEET:1OF1

FILE NAME: K5408Q-l-rating_WO3C_15105-1999M000_6060B4085903