




THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2026 INVENTEC CORPORATION.

LEGEND


PART NO	REV	VARIATION
6060B4085403	A01	As Shown

NOTE:

- (1) THE  CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC
(IF NOT SPECIFIED).
- (4) MATERIAL:
- A: 1. 面材 Facestock (Code): Lexan 8010 polycarbonate film (PC G11)
2. 表面處理 Top Coat (Code): 霧油 (Matte Varnish)
3. 膠性 Adhesives Pattern: 平膠 (flat) + 網格膠 (grid glue)
or equivalent material. (the material spec as same as Q-Form spec)
- B. ADHESIVE: 3M-SP7533
- C. THICKNESS: 0.195mm (面材 0.125mm + 霧油 + 黑底 + 水膠) (Facestock + adhesive)
- D. RAW MATERIAL COLOR: Transparent
- E. NEED UL CERTIFICATION: YES, 正永-Material UL Code: CM-100-011
- (5) INK COLOR: 底色 (background color): Black C, 圖文 (graphics): Pantone 424C
- (6) THERMAL TRANSFER RIBBON/ NEED UL CERTIFICATION: N/A
- *Agency requirement: UL & cUL Recognized Component Marking and Labeling System (PGDQ2 or PGDQ8) or UL & cUL Recognized Component Printing Materials (PGJ12/PGJ18).
- *Agency requirement: CSA Approved Manufacturer of Accepted Adhesive Type Name Plates.
CSA Identifier will be appear on the label (If the label is CSA approved).
- (7) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (8) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR"
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL. (內文有製造年份時需定義年份轉換規則)

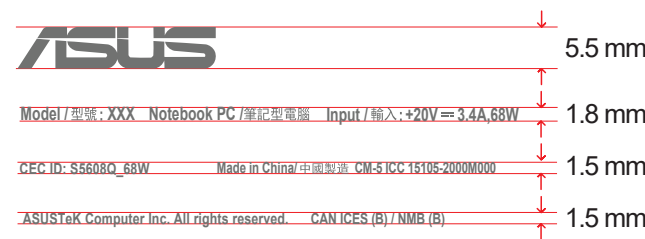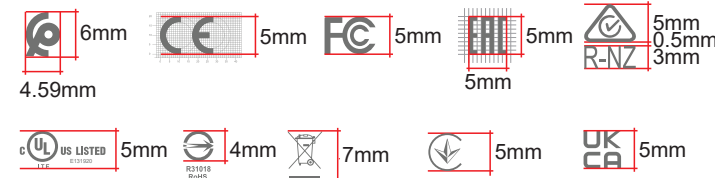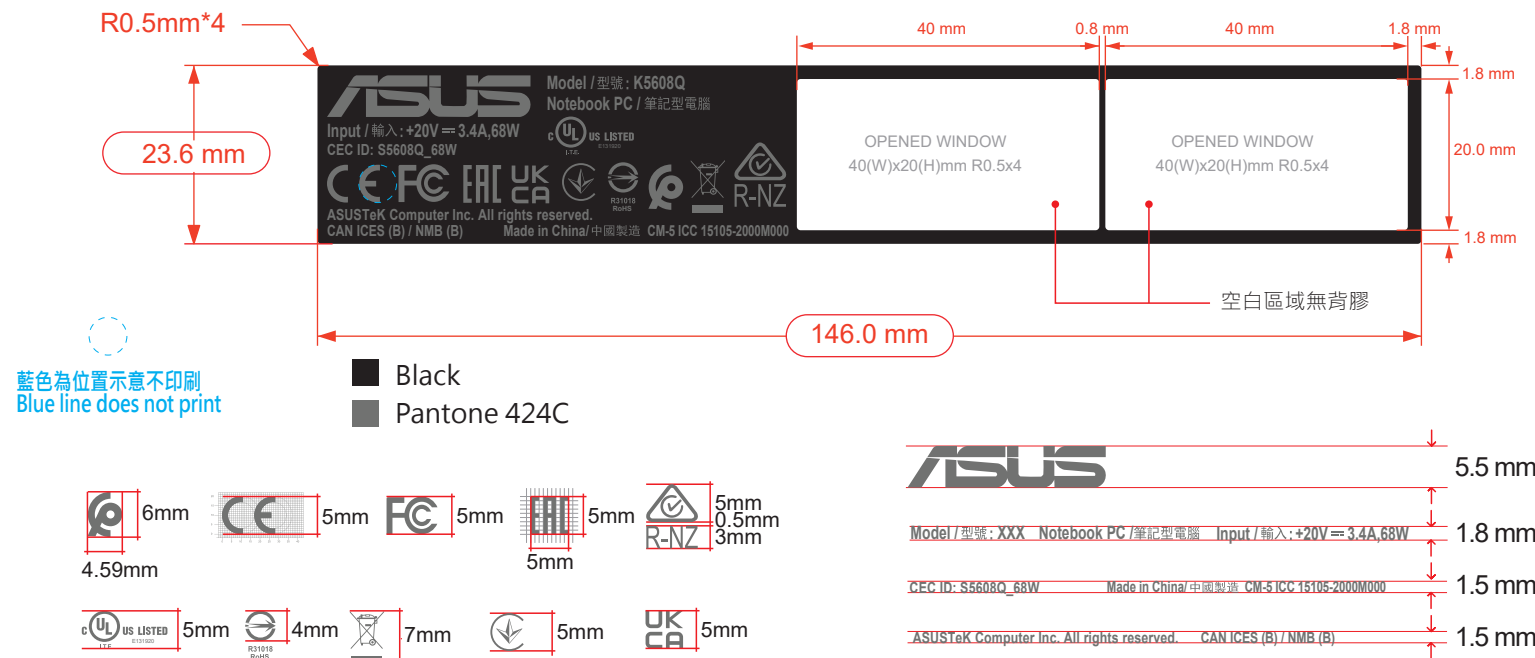


出標樣式/佈膠示意圖

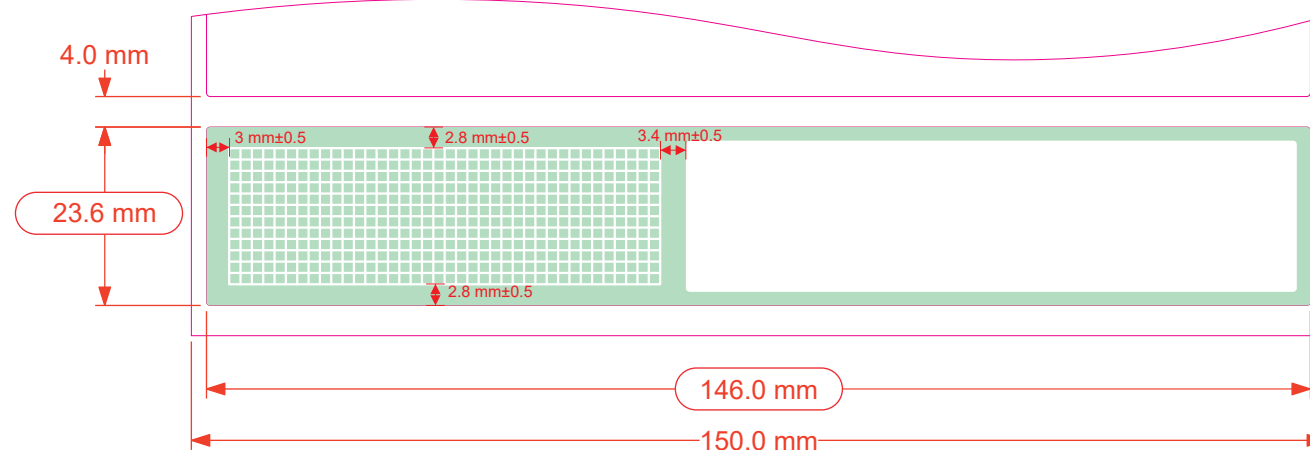

Output direction

REVISION HISTORY			
DESIGNER	CHANGE NO.	DOC REV	DATE dd/mm/yyyy
-	INITIAL	A	

卷芯要有以下資訊(Must be shown inside the reel)



IEC P/N ← 6060BXXXXXXXXX
ASUS P/N ← XXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊(Must be shown on the liner)

IEC PN 圖紙版本(VER) 廠商代碼 Vendor code(Name)



★注意：ASUS PN和Vendor code用英文半型“-”分開
Separate ASUS PN and Vendor Code with “-” (no space allowed)

測試規範

Eraser Model	Usage Times	Weight	Length	Cleaning	Testing Standards
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm	N/A	1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

Label Criteria						
	Paste Location	GlueType	Paste Method	Peel off Method	Test Criteria	Remark
	Carton	一般膠 General Glue	食指推平 Flatten with index finger	No	1. 不脫落 Does not peel off 2. 不翹起 Does not lift up 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑。 Air bubbles within a 5*5cm area do not exceed two, each bubble <5mm in diameter	環測結束後靜置12hr, Must rest for 12 hours after Storage testing completion
✓		一般膠 General Glue	食指推平 Flatten with index finger	No	同上 Same as the above table	
	Cover	R膠 R Glue	食指推平 Flatten with index finger	任一角以90° (慢慢撕下) Peel off any corner of the label slowly at a 90° angle	1. 不脫膠 Does not peel off 2. 不可殘膠No adhesive residue allowed (輕微可用3M擦拭布擦拭後無殘膠 Light residue can be cleaned off with a 3M cleaning cloth without leaving residue) 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑。 Air bubbles within a 5*5cm area do not exceed two, each bubble <5mm in diameter 4. 如呈浮貼狀態需可再貼回則為接受 If the label can be re-adhered after lifting, it is acceptable 5. 呈捲、曲、翹 狀則不予接受 If the label curls, bends, or lifts, it is unacceptable	

MODEL		S5608QA		Inventec CORPORATION		CONFIDENTIAL	
DESIGNER		Una Chien		D:05 M:05 Y:26		TITLE	
MANAGER		Jane Lee		D:05 M:05 Y:26		K5608Q RATING LABEL (WO/3C) V1.0 68W(S5608QA) BLK	
				DOCUMENT NUMBER			
 THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SIZE		CODE	
				B		PS	
				6060-B40854-03-AI		REV	
				A		0	
LINEAR		X		X.X		X.XX	
mm							
INCH							
				SCALE: 1:1		UNIT:mm	
				SHEET:1OF1			
				FILE NAME			
				K5608Q-I-rating_WO3C_15105-2000M000_6060B4085403			