

FCC Test Report

Report No.: RF150202C14-1

FCC ID: MSQ-RT1D00

Test Model: RT-AC1200

Series Model: RT-N600

Received Date: Feb. 02, 2015

Test Date: Apr. 13 ~ May 06, 2015

Issued Date: May 18, 2015

Applicant: ASUSTeK COMPUTER INC.

Address: 4F, NO. 150, Li-Te Rd. Peitou, Taipei Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standard	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedure	17
4.1.4 Deviation from Test Standard	17
4.1.5 Test Setup	18
4.1.6 EUT Operating Condition	18
4.1.7 Test Results	19
4.2 Conducted Emission Measurement	30
4.2.1 Limits of Conducted Emission Measurement	30
4.2.2 Test Instruments	30
4.2.3 Test Procedure	31
4.2.4 Deviation from Test Standard	31
4.2.5 Test Setup	31
4.2.6 EUT Operating Condition	31
4.2.7 Test Results	32
4.3 Transmit Power Measurement	36
4.3.1 Limits of Transmit Power Measurement	36
4.3.2 Test Setup	36
4.3.3 Test Instruments	36
4.3.4 Test Procedure	37
4.3.5 Deviation from Test Standard	37
4.3.6 EUT Operating Condition	37
4.3.7 Test Result	38
4.4 Peak Power Spectral Density Measurement	43
4.4.1 Limits of Peak Power Spectral Density Measurement	43
4.4.2 Test Setup	43
4.4.3 Test Instruments	43
4.4.4 Test Procedure	43
4.4.5 Deviation from Test Standard	43
4.4.6 EUT Operating Condition	43
4.4.7 Test Results	44
4.5 Frequency Stability Measurement	47
4.5.1 Limits of Frequency Stability Measurement	47
4.5.2 Test Setup	47
4.5.3 Test Instruments	47
4.5.4 Test Procedure	47
4.5.5 Deviation from Test Standard	47
4.5.6 EUT Operating Condition	47



4.5.7 Test Results 48

5 Pictures of Test Arrangements..... 49

Appendix – Information on the Testing Laboratories 50



A D T

Release Control Record

Issue No.	Description	Date Issued
RF150202C14-1	Original release.	May 18, 2015

1 Certificate of Conformity

Product: Wireless-AC1200 Dual Band USB Router

Brand: ASUS

Test Model: RT-AC1200

Series Model: RT-N600

Sample Status: Engineering sample


Applicant: ASUSTeK COMPUTER INC.

Test Date: Apr. 13 ~ May 06, 2015

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :


Pettie Chen / Senior Specialist

Date:

May 18, 2015

Approved by :



Ken Liu / Senior Manager

Date:

May 18, 2015

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (SECTION 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.69dB at 0.41016MHz.
15.407(b)(1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 5150.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6dB bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RSMA not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless-AC1200 Dual Band USB Router
Brand	ASUS
Test Model	RT-AC1200
Series Model	RT-N600
Model Difference	Marketing purpose
Status of EUT	Engineering sample
Power Supply Rating	12Vdc (adapter)
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	OFDM
Transfer Rate	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	5180 ~ 5240MHz
Number of Channel	4 for 802.11a, 802.11n (20MHz), 802.11ac (20MHz) 2 for 802.11n (40MHz), 802.11ac (40MHz) 1 for 802.11ac (80MHz)
Output Power	802.11a: Chain 0: 147.571mW, Chain 1: 167.109mW, Total Power: 314.680mW 802.11n (HT20): Chain 0: 151.008mW, Chain 1: 165.196mW, Total Power: 316.204mW 802.11n (HT40): Chain 0: 155.597mW, Chain 1: 162.930mW, Total Power: 318.527mW 802.11ac (VHT80): Chain 0: 55.590mW, Chain 1: 57.677mW, Total Power: 113.267mW
Antenna Type	Dipole antenna with 5dBi gain
Antenna Connector	RSMA
Accessory Device	Adapter
Data Cable Supplied	NA

Note:

- The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	TX Function
802.11a	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX
802.11ac (VHT80)	2TX

- All models are listed as below.

Brand	Model	Difference
ASUS	RT-AC1200	All models are electrically identical, different model names are for marketing purpose.
	RT-N600	

*Model: RT-AC1200 is for the final tests.

3. The EUT uses following adapters.

Adapter 1	
Brand	Shenzhen Gongjin Electronics Co., Ltd.
Model	S18B72-120A150-0K
Input Power	100-240Vac~ 50/60Hz, Max.0.7A
Output Power	12Vdc/ 1.5A
Power Line	1.4m non-shielded without core

Adapter 2	
Brand	Ruide Electronical Industrial Shenzhen Co., Ltd.
Model	RD1201500-C55-1MG
Input Power	100-240Vac~ 50/60Hz, 0.6A Max
Output Power	12Vdc/ 1.5A
Power Line	1.5m non-shielded without core

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (80MHz):

Channel	Frequency
58	5290MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from adapter 1
B	-	√	√	-	Power from adapter 2

Where **RE≥1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
A	802.11n (HT40)		38 to 46	38, 46	OFDM	BPSK	15.0
A	802.11ac (VHT80)		42	42	OFDM	BPSK	65.0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (HT20)	5180-5240	36 to 48	40	OFDM	BPSK	7.2

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (HT20)	5180-5240	36 to 48	40	OFDM	BPSK	7.2

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
A	802.11n (HT40)		38 to 46	38, 46	OFDM	BPSK	15.0
A	802.11ac (VHT80)		42	42	OFDM	BPSK	65.0

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Ted Chang
RE $<$ 1G	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
PLC	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
APCM	25deg. C, 60%RH	120Vac, 60Hz	Jun Wu

3.3 Duty Cycle of Test Signal

5.0GHz Band:

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11a: Duty cycle = $1.433/1.461 = 0.981$


802.11n (HT20): Duty cycle = $1.342/1.363 = 0.985$

Duty cycle of test signal is $< 98\%$, duty factor shall be considered.


802.11n (HT40): Duty cycle = $0.666/0.683 = 0.975$, Duty factor = $10 * \log(1/0.975) = 0.11$

802.11ac (VHT80): Duty cycle = $0.335/0.35 = 0.957$, Duty factor = $10 * \log(1/0.957) = 0.19$


802.11a

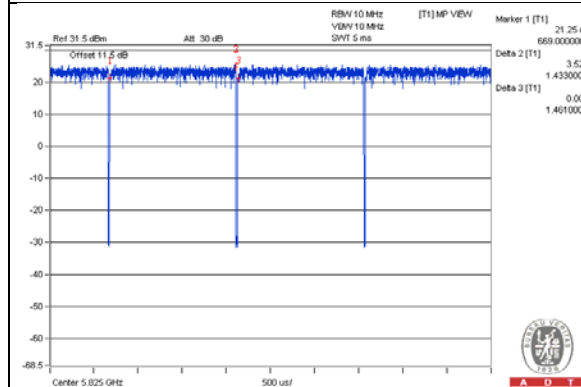


802.11n (HT20)

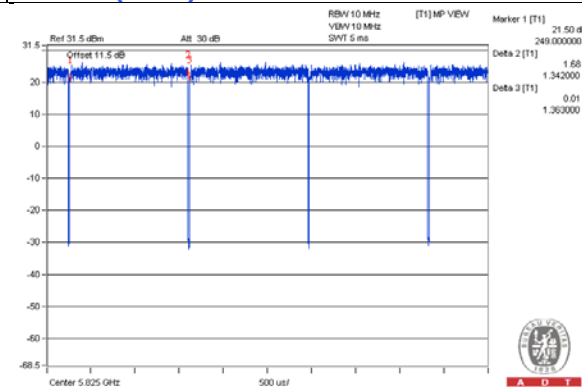

802.11n (HT40)

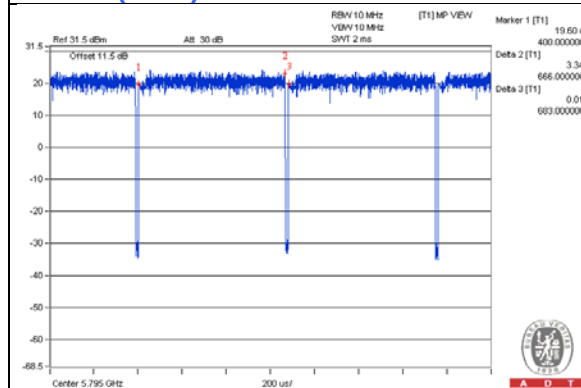

802.11ac (VHT80)

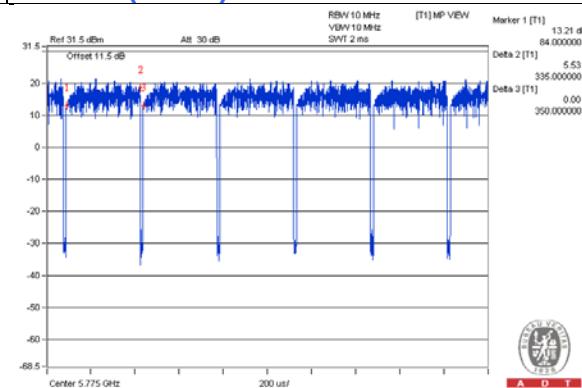

3.4 Description of Support Units

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	D531	CN-0XM006-48643-81 U-2973	QDS-BRCM1020	-
B.	Dongle	SANDISK	SDCZ6-1024	N/A	NA	-
C.	Load	NA	NA	NA	NA	-


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items A acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45	1	10	N	0	-
2.	RJ45	3	1.8	N	0	-

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

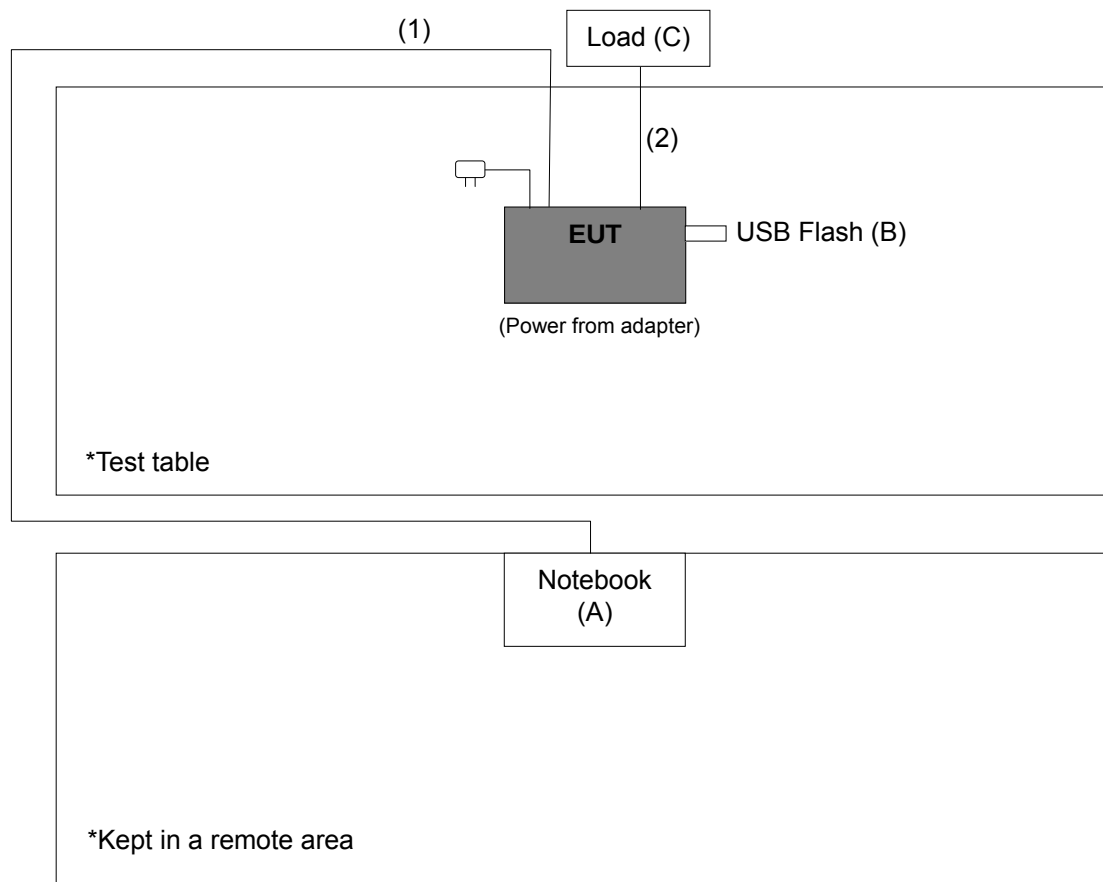

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedure New Rules v01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedure New Rules v01	FIELD STRENGTH AT 3m	
	PK:74 (dBuV/m)	AV:54 (dBuV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) ^{*1} PK:-17 (dBm/MHz) ^{*2}	PK: 68.2(dBuV/m) ^{*1} PK:78.2 (dBuV/m) ^{*2}

NOTE: ^{*1} beyond 10MHz of the band edge ^{*2} within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 06, 2014	Oct. 05, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jul. 25, 2014	Jul. 24, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 06, 2015	Feb. 05, 2016
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Feb. 05, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 09, 2015	Feb. 08, 2016
Preamplifier Agilent	8449B	3008A01960	Aug. 09, 2014	Aug. 08, 2015
Preamplifier Agilent	8447D	2944A10631	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 09, 2014	Aug. 08, 2015
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100.	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2014	Oct. 17, 2015
High Speed Peak Power Meter	ML2495A	0824011	Jul. 26, 2014	Jul. 25, 2015
Power Sensor	MA2411B	0738171	Jul. 26, 2014	Jul. 25, 2015

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 460141.
5. The IC Site Registration No. is IC7450F-4.

4.1.3 Test Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. For emission measurements above 1 GHz, the EUT shall be placed at a height of 1.5 m above the ground at 3 meter chamber room for test
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
6. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

<Frequency Range below 1GHz>

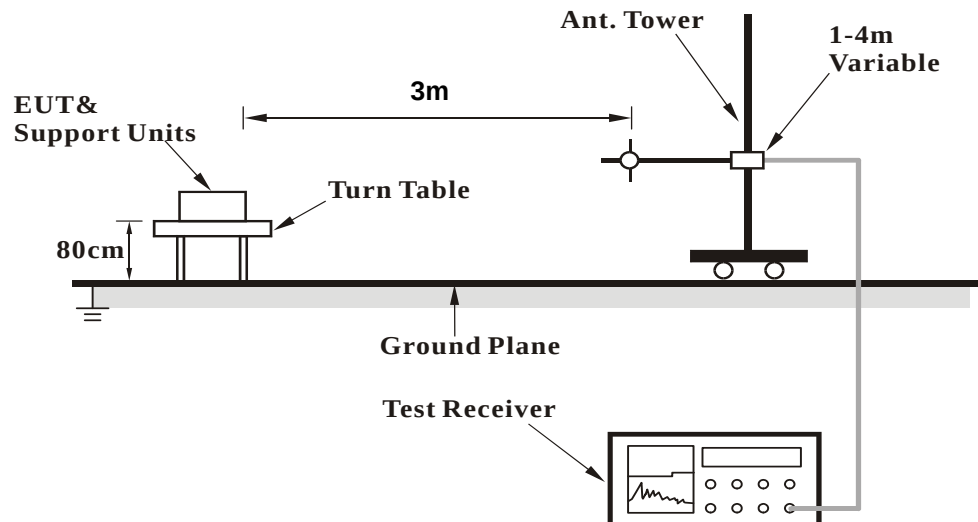

<Frequency Range above 1GHz>

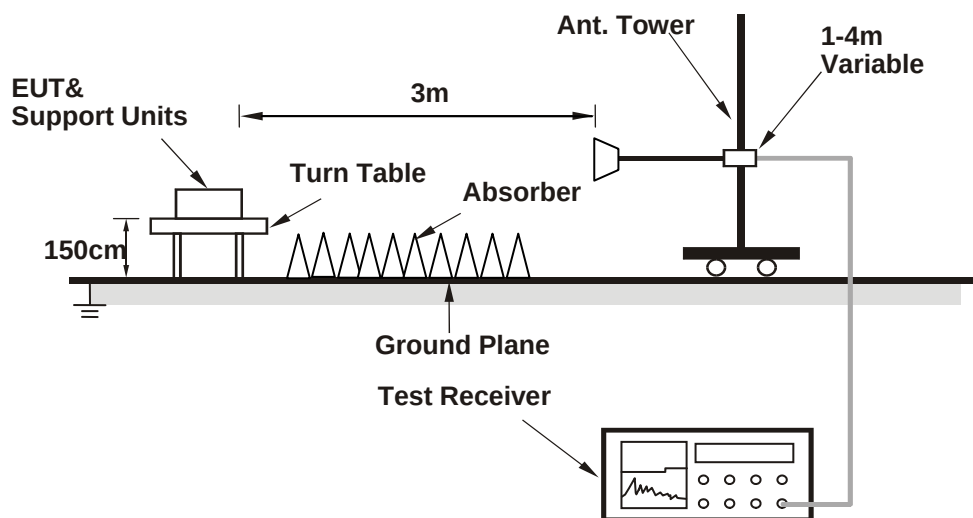

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- Placed the EUT on the testing table.
- Prepared a notebook to act as communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

ABOVE 1GHz DATA :

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.9 PK	74.0	-17.1	1.05 H	54	54.90	2.00
2	5150.00	43.5 AV	54.0	-10.5	1.05 H	54	41.50	2.00
3	*5180.00	97.6 PK			1.02 H	195	57.60	40.00
4	*5180.00	87.5 AV			1.02 H	195	47.50	40.00
5	#10360.00	60.2 PK	74.0	-13.8	1.05 H	24	45.20	15.00
6	#10360.00	47.5 AV	54.0	-6.5	1.05 H	24	32.50	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.7 PK	74.0	-4.3	1.07 V	213	67.70	2.00
2	5150.00	52.8 AV	54.0	-1.2	1.07 V	213	50.80	2.00
3	*5180.00	113.3 PK			1.32 V	210	73.30	40.00
4	*5180.00	103.5 AV			1.32 V	210	63.50	40.00
5	#10360.00	60.6 PK	74.0	-13.4	1.05 V	64	45.60	15.00
6	#10360.00	47.5 AV	54.0	-6.5	1.05 V	64	32.50	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.9 PK	74.0	-18.1	1.06 H	195	53.90	2.00
2	5150.00	43.5 AV	54.0	-10.5	1.06 H	195	41.50	2.00
3	*5200.00	99.6 PK			1.06 H	195	59.50	40.10
4	*5200.00	89.9 AV			1.06 H	195	49.80	40.10
5	#10360.00	59.6 PK	74.0	-14.4	1.05 H	34	44.60	15.00
6	#10360.00	47.5 AV	54.0	-6.5	1.05 H	34	32.50	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.0 PK	74.0	-10.0	1.26 V	234	62.00	2.00
2	5150.00	48.0 AV	54.0	-6.0	1.26 V	234	46.00	2.00
3	*5200.00	114.4 PK			1.31 V	210	74.30	40.10
4	*5200.00	104.2 AV			1.31 V	210	64.10	40.10
5	#10400.00	62.2 PK	74.0	-11.8	1.00 V	36	47.20	15.00
6	#10400.00	48.0 AV	54.0	-6.0	1.00 V	36	33.00	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	99.8 PK			1.00 H	194	59.70	40.10
2	*5240.00	89.8 AV			1.00 H	194	49.70	40.10
3	5350.00	57.0 PK	74.0	-17.0	1.00 H	195	55.00	2.00
4	5350.00	43.5 AV	54.0	-10.5	1.00 H	195	41.50	2.00
5	#10480.00	60.1 PK	74.0	-13.9	1.41 H	55	45.00	15.10
6	#10480.00	46.3 AV	54.0	-7.7	1.41 H	55	31.20	15.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	114.1 PK			1.44 V	209	74.00	40.10
2	*5240.00	104.3 AV			1.44 V	209	64.20	40.10
3	5350.00	58.6 PK	74.0	-15.4	1.44 V	51	56.60	2.00
4	5350.00	44.5 AV	54.0	-9.5	1.44 V	51	42.50	2.00
5	#10480.00	60.1 PK	74.0	-13.9	1.05 V	64	45.00	15.10
6	#10480.00	47.6 AV	54.0	-6.4	1.05 V	64	32.50	15.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.0 PK	74.0	-17.0	1.30 H	15	55.00	2.00
2	5150.00	43.5 AV	54.0	-10.5	1.30 H	15	41.50	2.00
3	*5180.00	96.3 PK			1.30 H	15	56.30	40.00
4	*5180.00	86.6 AV			1.30 H	15	46.60	40.00
5	#10360.00	60.2 PK	74.0	-13.8	1.45 H	360	45.20	15.00
6	#10360.00	46.2 AV	54.0	-7.8	1.45 H	360	31.20	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.5 PK	74.0	-1.5	1.19 V	212	70.50	2.00
2	5150.00	52.9 AV	54.0	-1.1	1.19 V	212	50.90	2.00
3	*5180.00	115.1 PK			1.32 V	187	75.10	40.00
4	*5180.00	105.0 AV			1.32 V	187	65.00	40.00
5	#10360.00	61.0 PK	74.0	-13.0	1.05 V	64	46.00	15.00
6	#10360.00	46.5 AV	54.0	-7.5	1.05 V	64	31.50	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.8 PK	74.0	-18.2	1.08 H	199	53.80	2.00
2	5150.00	43.9 AV	54.0	-10.1	1.08 H	199	41.90	2.00
3	*5200.00	99.7 PK			1.05 H	88	59.60	40.10
4	*5200.00	90.0 AV			1.05 H	88	49.90	40.10
5	#10360.00	59.8 PK	74.0	-14.2	1.05 H	64	44.80	15.00
6	#10360.00	47.5 AV	54.0	-6.5	1.05 H	64	32.50	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.1 PK	74.0	-9.9	1.26 V	155	62.10	2.00
2	5150.00	48.1 AV	54.0	-5.9	1.26 V	155	46.10	2.00
3	*5200.00	114.6 PK			1.32 V	211	74.50	40.10
4	*5200.00	104.4 AV			1.32 V	211	64.30	40.10
5	#10400.00	62.1 PK	74.0	-11.9	1.05 V	34	47.10	15.00
6	#10400.00	47.8 AV	54.0	-6.2	1.05 V	34	32.80	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	100.2 PK			1.00 H	84	60.10	40.10
2	*5240.00	90.3 AV			1.00 H	84	50.20	40.10
3	5350.00	57.9 PK	74.0	-16.1	1.05 H	34	55.90	2.00
4	5350.00	44.1 AV	54.0	-9.9	1.05 H	34	42.10	2.00
5	#10480.00	60.7 PK	74.0	-13.3	1.04 H	84	45.60	15.10
6	#10480.00	47.3 AV	54.0	-6.7	1.04 H	84	32.20	15.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	114.2 PK			1.45 V	211	74.10	40.10
2	*5240.00	104.3 AV			1.45 V	211	64.20	40.10
3	5350.00	58.8 PK	74.0	-15.2	1.44 V	151	56.80	2.00
4	5350.00	44.3 AV	54.0	-9.7	1.44 V	151	42.30	2.00
5	#10480.00	60.3 PK	74.0	-13.7	1.05 V	32	45.20	15.10
6	#10480.00	47.7 AV	54.0	-6.3	1.05 V	32	32.60	15.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.0 PK	74.0	-18.0	1.22 H	0	54.00	2.00
2	5150.00	43.5 AV	54.0	-10.5	1.22 H	0	41.50	2.00
3	*5190.00	97.0 PK			1.22 H	0	57.00	40.00
4	*5190.00	86.8 AV			1.22 H	0	46.80	40.00
5	#10380.00	61.0 PK	74.0	-13.0	1.05 H	360	46.00	15.00
6	#10380.00	45.5 AV	54.0	-8.5	1.05 H	360	30.50	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	73.0 PK	74.0	-1.0	1.49 V	5	71.00	2.00
2	5150.00	52.0 AV	54.0	-2.0	1.49 V	5	50.00	2.00
3	*5190.00	110.7 PK			1.41 V	6	70.70	40.00
4	*5190.00	99.7 AV			1.41 V	6	59.70	40.00
5	#10380.00	58.5 PK	74.0	-15.5	1.05 V	64	43.50	15.00
6	#10380.00	46.5 AV	54.0	-7.5	1.05 V	64	31.50	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.4 PK	74.0	-17.6	1.04 H	218	54.40	2.00
2	5150.00	43.5 AV	54.0	-10.5	1.04 H	218	41.50	2.00
3	*5230.00	100.2 PK			1.05 H	218	60.10	40.10
4	*5230.00	90.7 AV			1.05 H	218	50.60	40.10
5	5350.00	55.7 PK	74.0	-18.3	1.04 H	218	53.70	2.00
6	5350.00	43.5 AV	54.0	-10.5	1.04 H	218	41.50	2.00
7	#10460.00	61.0 PK	74.0	-13.0	1.05 H	84	46.00	15.00
8	#10460.00	47.5 AV	54.0	-6.5	1.05 H	84	32.50	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	1.00 V	195	56.30	2.00
2	5150.00	52.7 AV	54.0	-1.3	1.00 V	195	50.70	2.00
3	*5230.00	114.7 PK			1.32 V	5	74.60	40.10
4	*5230.00	105.2 AV			1.32 V	5	65.10	40.10
5	5350.00	62.1 PK	74.0	-11.9	1.01 V	194	60.10	2.00
6	5350.00	47.3 AV	54.0	-6.7	1.01 V	194	45.30	2.00
7	#10460.00	65.1 PK	74.0	-8.9	1.00 V	332	50.10	15.00
8	#10460.00	49.2 AV	54.0	-4.8	1.00 V	332	34.20	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.7 PK	74.0	-16.3	1.08 H	233	55.70	2.00
2	5150.00	44.5 AV	54.0	-9.5	1.08 H	233	42.50	2.00
3	*5210.00	94.0 PK			1.08 H	233	53.90	40.10
4	*5210.00	84.1 AV			1.08 H	233	44.00	40.10
5	#10420.00	60.2 PK	74.0	-13.8	1.05 H	34	45.20	15.00
6	#10420.00	46.5 AV	54.0	-7.5	1.05 H	34	31.50	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.1 PK	74.0	-3.9	1.58 V	15	68.10	2.00
2	5150.00	52.6 AV	54.0	-1.4	1.58 V	15	50.60	2.00
3	*5210.00	107.5 PK			1.48 V	208	67.40	40.10
4	*5210.00	96.8 AV			1.48 V	208	56.70	40.10
5	#10420.00	58.5 PK	74.0	-15.5	1.05 V	64	43.50	15.00
6	#10420.00	46.5 AV	54.0	-7.5	1.05 V	64	31.50	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

BELOW 1GHz WORST-CASE DATA

802.11n (HT20)

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.58	22.5 QP	40.0	-17.5	2.00 H	109	37.10	-14.60
2	161.92	31.6 QP	43.5	-11.9	1.01 H	209	45.70	-14.10
3	480.08	31.1 QP	46.0	-14.9	2.00 H	50	40.20	-9.10
4	827.34	40.4 QP	46.0	-5.6	2.00 H	271	42.80	-2.40
5	920.46	29.0 QP	46.0	-17.0	1.01 H	276	29.80	-0.80
6	961.20	49.1 QP	54.0	-4.9	1.01 H	183	49.30	-0.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.82	35.3 QP	40.0	-4.7	1.00 V	103	50.90	-15.60
2	94.02	32.2 QP	43.5	-11.3	1.00 V	249	51.70	-19.50
3	97.90	31.8 QP	43.5	-11.7	1.00 V	277	51.10	-19.30
4	148.34	31.9 QP	43.5	-11.6	1.00 V	190	46.10	-14.20
5	906.88	29.7 QP	46.0	-16.3	1.99 V	8	30.90	-1.20
6	961.20	49.1 QP	54.0	-4.9	1.00 V	154	49.30	-0.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.72	27.3 QP	43.5	-16.2	1.50 H	281	45.60	-18.30
2	580.96	29.9 QP	46.0	-16.1	1.50 H	37	36.90	-7.00
3	821.52	29.1 QP	46.0	-16.9	1.00 H	158	31.60	-2.50
4	873.90	28.6 QP	46.0	-17.4	1.00 H	81	30.50	-1.90
5	918.52	30.2 QP	46.0	-15.8	1.00 H	104	31.00	-0.80
6	961.20	46.7 QP	54.0	-7.3	1.50 H	306	46.90	-0.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.82	34.9 QP	40.0	-5.1	1.00 V	114	50.50	-15.60
2	62.98	33.6 QP	40.0	-6.4	1.00 V	23	48.80	-15.20
3	103.72	33.2 QP	43.5	-10.3	1.00 V	290	51.50	-18.30
4	142.52	31.5 QP	43.5	-12.0	1.00 V	44	46.10	-14.60
5	901.06	31.8 QP	46.0	-14.2	1.00 V	44	33.10	-1.30
6	961.20	47.7 QP	54.0	-6.3	1.00 V	72	47.90	-0.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 11, 2014	Nov. 10, 2015
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 26, 2014	Dec. 25, 2015
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 02, 2015	Mar. 01, 2016
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 21, 2014	Jul. 20, 2015
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

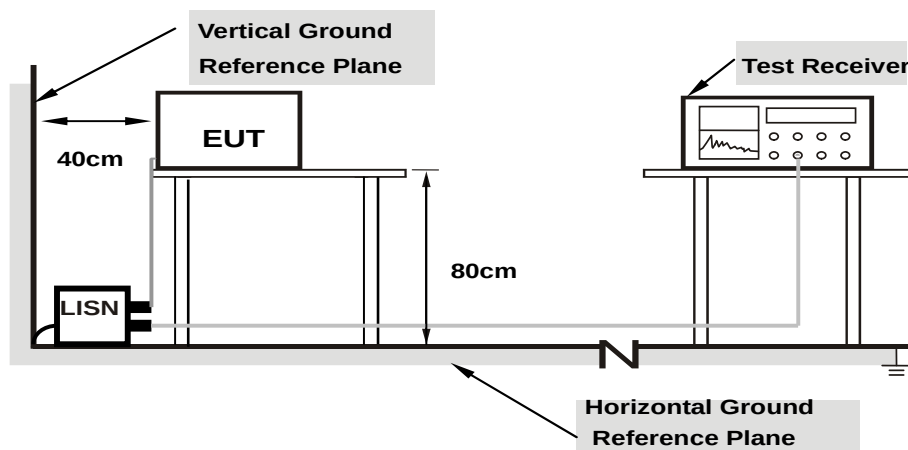

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16526	0.05	54.81	40.88	54.86	40.93	65.20	55.20	-10.33	-14.26
2	0.20474	0.06	49.18	36.23	49.24	36.29	63.42	53.42	-14.18	-17.13
3	0.24796	0.06	47.71	33.79	47.77	33.85	61.83	51.83	-14.06	-17.98
4	0.43122	0.06	49.34	38.01	49.40	38.07	57.23	47.23	-7.83	-9.16
5	0.89290	0.08	38.18	28.92	38.26	29.00	56.00	46.00	-17.74	-17.00
6	19.05094	0.86	30.86	25.55	31.72	26.41	60.00	50.00	-28.28	-23.59

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

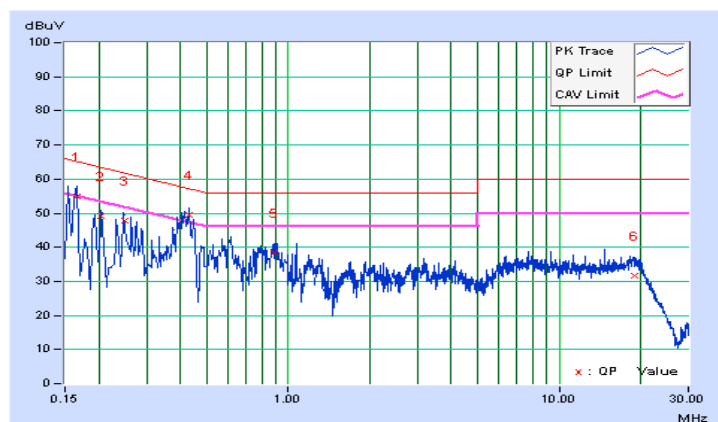


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	0.05	53.80	42.07	53.85	42.12	65.37	55.37	-11.52	-13.25
2	0.20511	0.05	47.72	35.10	47.77	35.15	63.40	53.40	-15.63	-18.25
3	0.24384	0.05	47.07	35.68	47.12	35.73	61.96	51.96	-14.84	-16.23
4	0.41016	0.06	51.45	41.89	51.51	41.95	57.65	47.65	-6.13	-5.69
5	0.89290	0.08	37.83	28.74	37.91	28.82	56.00	46.00	-18.09	-17.18
6	19.10177	0.70	29.10	23.63	29.80	24.33	60.00	50.00	-30.20	-25.67

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

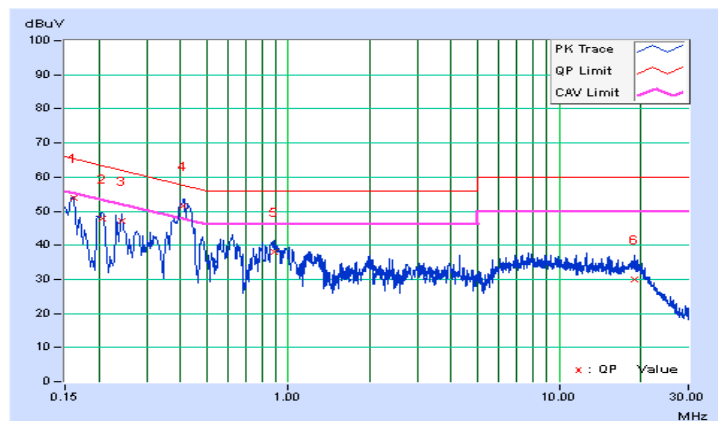


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16955	0.05	49.41	36.90	49.46	36.95	64.98	54.98	-15.52	-18.03
2	0.21256	0.06	47.24	36.21	47.30	36.27	63.10	53.10	-15.80	-16.83
3	0.25526	0.06	48.96	39.15	49.02	39.21	61.58	51.58	-12.56	-12.37
4	0.28288	0.06	47.14	37.27	47.20	37.33	60.73	50.73	-13.53	-13.40
5	0.70522	0.07	39.87	28.47	39.94	28.54	56.00	46.00	-16.06	-17.46
6	6.25742	0.29	33.47	27.50	33.76	27.79	60.00	50.00	-26.24	-22.21

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

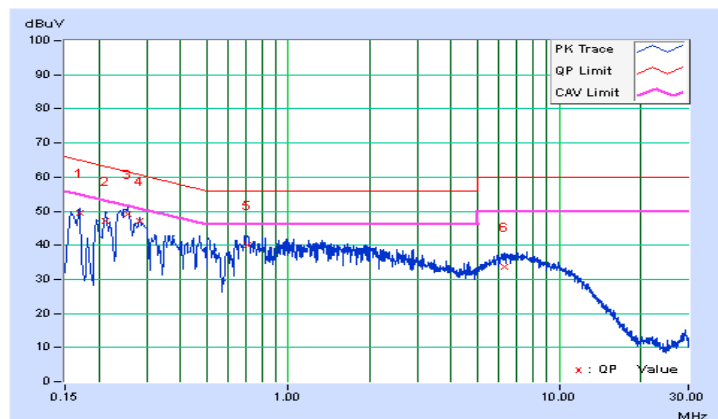


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16569	0.05	49.64	38.16	49.69	38.21	65.17	55.17	-15.48	-16.96
2	0.22024	0.05	47.03	30.30	47.08	30.35	62.81	52.81	-15.73	-22.46
3	0.24775	0.05	51.39	41.81	51.44	41.86	61.83	51.83	-10.39	-9.97
4	0.29120	0.05	48.42	37.83	48.47	37.88	60.49	50.49	-12.02	-12.61
5	0.70131	0.07	40.65	28.64	40.72	28.71	56.00	46.00	-15.28	-17.29
6	6.95731	0.30	32.96	28.12	33.26	28.42	60.00	50.00	-26.74	-21.58

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

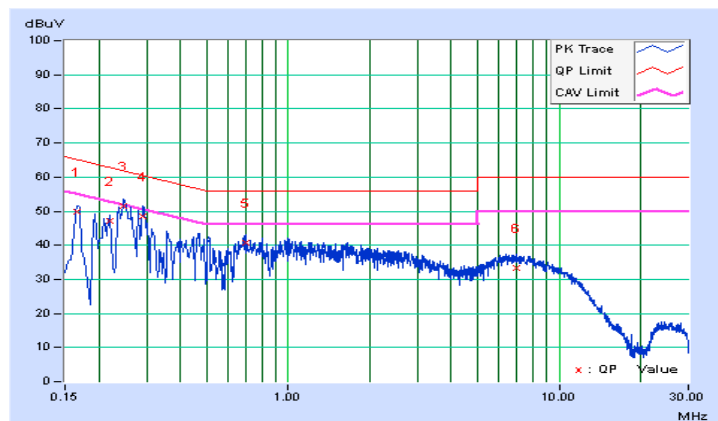

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	---		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup

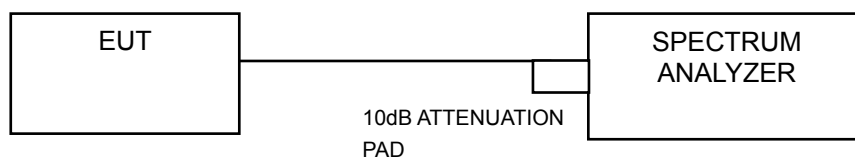

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

FOR AVERAGE POWER MEASUREMENT

For 802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- 1) Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- 2) Set sweep trigger to "free run".
- 3) Set RBW = 1 MHz.
- 4) Set VBW $\geq$ 3 MHz
- 5) Number of points in sweep $\geq$ 2 Span / RBW.
- 6) Sweep time $\leq$ (number of points in sweep) * T
- 7) Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- 8) Detector = RMS.
- 9) Trace mode = max hold.
- 10) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

POWER OUTPUT:

802.11a

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Maximum Conducted Power (mW)	Maximum Conducted Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	21.19	19.95	230.377	23.62	30	Pass
40	5200	21.81	21.67	298.598	24.75	30	Pass
48	5240	21.69	22.23	314.680	24.98	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Maximum Conducted Power (mW)	Maximum Conducted Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	21.13	19.94	228.346	23.59	30	Pass
40	5200	21.79	22.18	316.204	25.00	30	Pass
48	5240	21.85	22.05	313.434	24.96	30	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Maximum Conducted Power (mW)	Maximum Conducted Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	18.58	18.51	143.069	21.56	30	Pass
46	5230	21.92	22.12	318.527	25.03	30	Pass

802.11ac (VHT80)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Maximum Conducted Power (mW)	Maximum Conducted Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	17.45	17.61	113.267	20.54	30	Pass

26dB BANDWIDTH:

802.11a

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	25.27	25.88	Pass
40	5200	41.09	39.09	Pass
48	5240	37.77	38.49	Pass

802.11n (HT20)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	33.57	27.71	Pass
40	5200	41.64	44.04	Pass
48	5240	43.10	45.89	Pass

802.11n (HT40)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
38	5190	41.89	47.42	Pass
46	5230	87.85	92.92	Pass



802.11ac (VHT80)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
42	5210	81.98	81.98	Pass

SPECTRUM PLOT OF WORST VALUE



802.11a

802.11n (HT20)

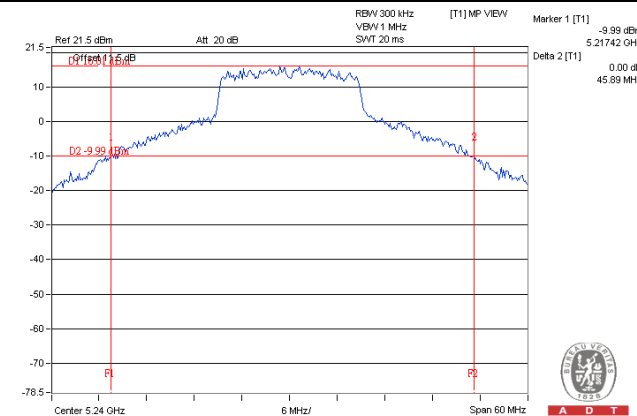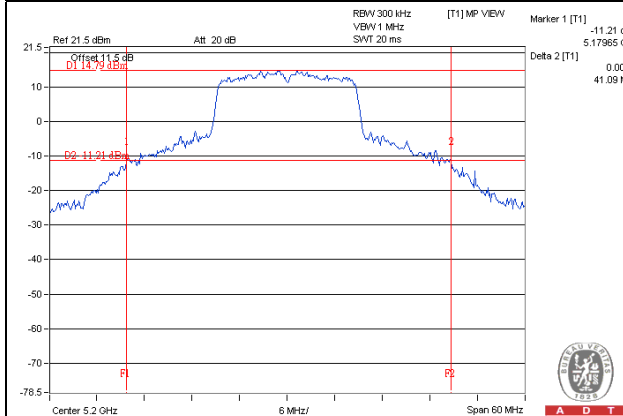

802.11n (HT40)

802.11ac (VHT80)

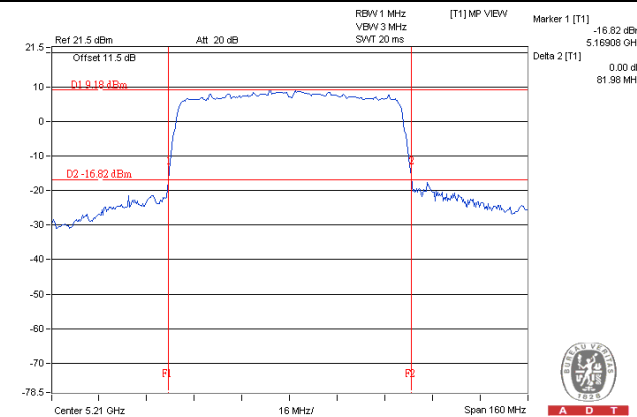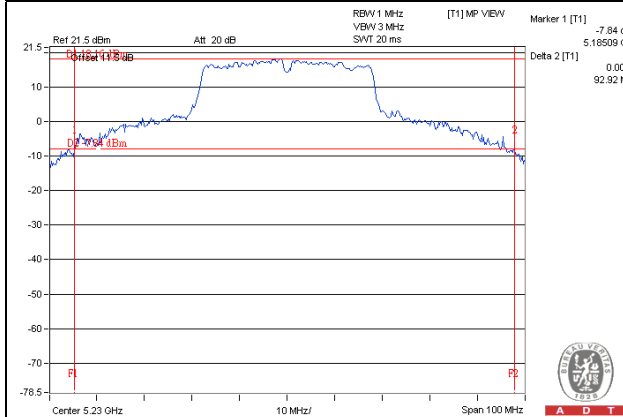

OCCUPIED BANDWIDTH:

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	17.83	16.96	Pass
40	5200	21.00	25.92	Pass
48	5240	17.57	18.78	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	18.12	17.88	Pass
40	5200	22.08	27.36	Pass
48	5240	18.26	18.61	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
38	5190	36.24	36.36	Pass
46	5230	39.13	38.61	Pass


802.11ac (VHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
42	5210	75.13	75.12	Pass


SPECTRUM PLOT OF WORST VALUE

802.11a

802.11n (HT20)

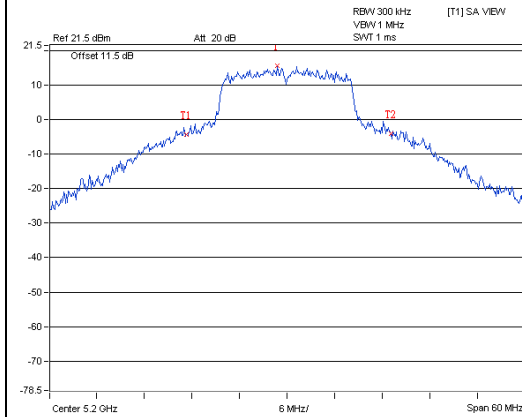


A D T

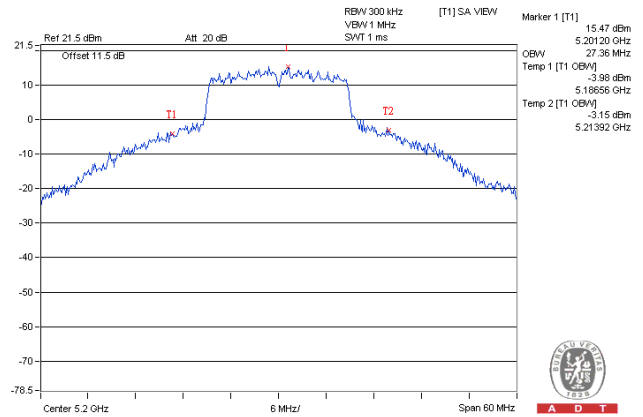


A D T

802.11n (HT40)

802.11ac (VHT80)

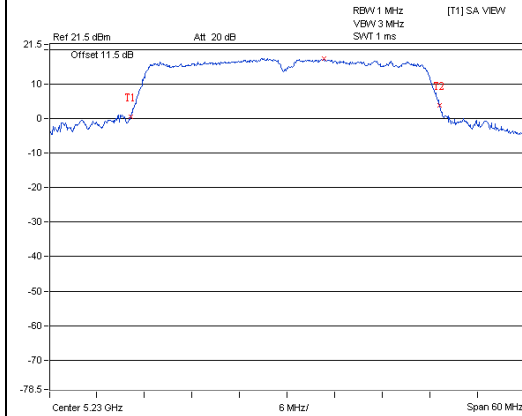

A D T

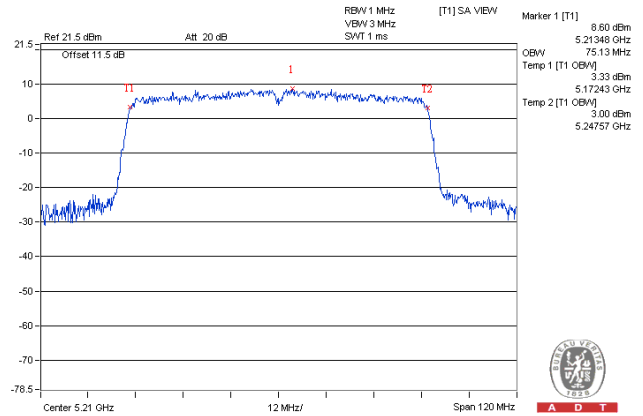


A D T

4.4 Peak Power Spectral Density Measurement

4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A	---		11dBm/ MHz
U-NII-2C	---		11dBm/ MHz
U-NII-3	---		30dBm/ 500kHz

4.4.2 Test Setup

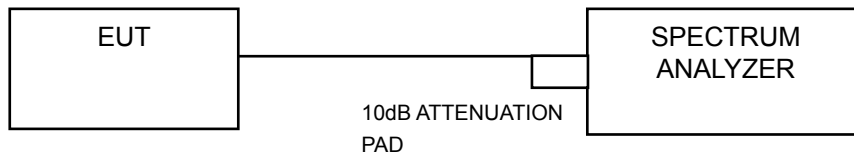

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedure

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Condition

Same as Item 4.3.6.

4.4.7 Test Results

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm)		Total Power Density (dBm)	Max. Limit (dBm)	Pass / Fail
		CHAIN 0	CHAIN 1			
36	5180	7.53	6.84	10.21	14.99	PASS
40	5200	9.44	10.45	12.98	14.99	PASS
48	5240	10.07	10.66	13.39	14.99	PASS

NOTE: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. For U-NII-1 Band:

Directional gain = 5dBi + 10log(2) = 8.01dBi > 6dBi , so the power density limit shall be reduced to 17-(8.01-6) = 14.99dBm.

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm)		Total Power Density (dBm)	Max. Limit (dBm)	Pass / Fail
		CHAIN 0	CHAIN 1			
36	5180	8.10	6.52	10.39	14.99	PASS
40	5200	8.94	9.61	12.30	14.99	PASS
48	5240	9.79	10.69	13.27	14.99	PASS

NOTE: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. For U-NII-1 Band:

Directional gain = 5dBi + 10log(2) = 8.01dBi > 6dBi , so the power density limit shall be reduced to 17-(8.01-6) = 14.99dBm.

802.11n (HT40)

Channel	Frequency (MHz)	PSD (dBm)		Total PSD w/o Duty Factor (dBm)	Duty Factor	Total PSD with Duty Factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
38	5190	1.50	2.00	4.77	0.11	4.88	14.99	Pass
46	5230	6.18	6.45	9.33	0.11	9.44	14.99	Pass

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. **For U-NII-1 Band:**
Directional gain = 5dBi + 10log(2) = 8.01dBi > 6dBi , so the power density limit shall be reduced to 17-(8.01-6) = 14.99dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)


Channel	Frequency (MHz)	PSD (dBm)		Total PSD w/o Duty Factor (dBm)	Duty Factor	Total PSD with Duty Factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
42	5210	-2.40	-2.31	0.66	0.19	0.85	14.99	Pass

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. **For U-NII-1 Band:**
Directional gain = 5dBi + 10log(2) = 8.01dBi > 6dBi , so the power density limit shall be reduced to 17-(8.01-6) = 14.99dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.


SPECTRUM PLOT OF WORST VALUE

802.11a

802.11n (HT20)

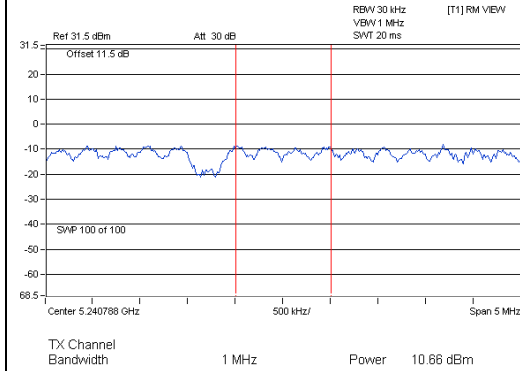


A D T

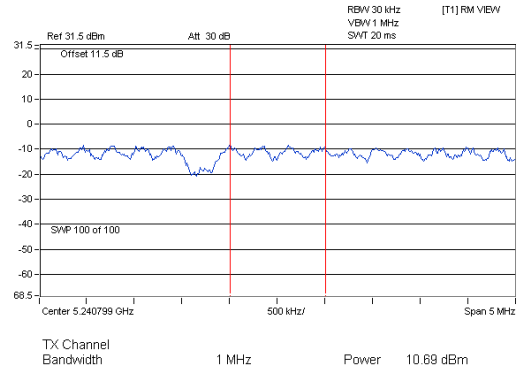


A D T

802.11n (HT40)

802.11ac (VHT80)

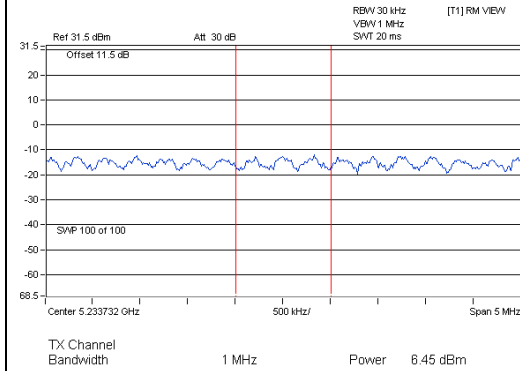

A D T

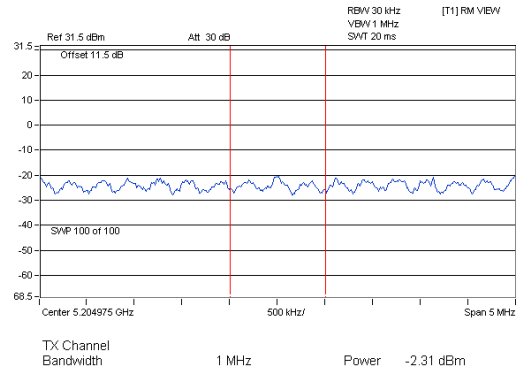


A D T

4.5 Frequency Stability Measurement

4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 Test Setup

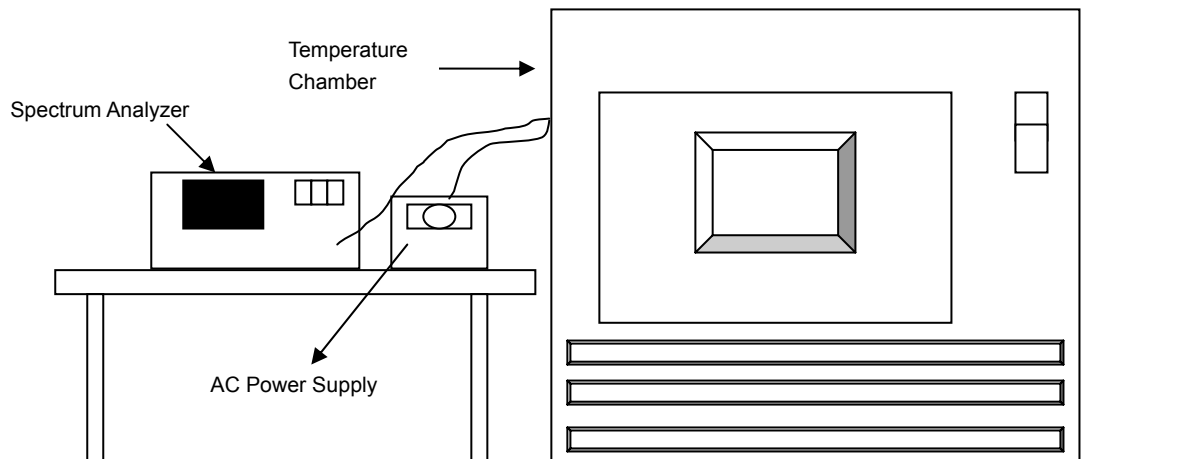

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.5.7 Test Results

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5200MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5200.0188	0.00036	5200.0174	0.00033	5200.0181	0.00035	5200.0203	0.00039
40	120	5200.0240	0.00046	5200.0242	0.00047	5200.0235	0.00045	5200.0256	0.00049
30	120	5200.0034	0.00007	5200.0022	0.00004	5200.0017	0.00003	5200.0061	0.00012
20	120	5199.9841	-0.00031	5199.9844	-0.00030	5199.9817	-0.00035	5199.9821	-0.00034
10	120	5199.9848	-0.00029	5199.9832	-0.00032	5199.9872	-0.00025	5199.9866	-0.00026
0	120	5199.9971	-0.00006	5199.9976	-0.00005	5199.9980	-0.00004	5199.9958	-0.00008
-10	120	5199.9737	-0.00051	5199.9764	-0.00045	5199.9766	-0.00045	5199.9776	-0.00043
-20	120	5200.0150	0.00029	5200.0107	0.00021	5200.0147	0.00028	5200.0106	0.00020
-30	120	5200.0043	0.00008	5200.0026	0.00005	5200.0067	0.00013	5200.0062	0.00012

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5200MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5199.9837	-0.00031	5199.9845	-0.00030	5199.9818	-0.00035	5199.9831	-0.00032
	120	5199.9841	-0.00031	5199.9844	-0.00030	5199.9817	-0.00035	5199.9821	-0.00034
	102	5199.9847	-0.00029	5199.9846	-0.00030	5199.9816	-0.00035	5199.9817	-0.00035

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---