

LYNwave Technology

Antenna & Thermal solution provider

Antenna Field Test Report

Project Name: RT-AX50 GO

Model Name: Ant.1 : ALX23M-222AAA

Ant.2 : ALX23M-222AA9

Type: PIFA


Date	Owner	Check	Revision	History
2024/02/16	Peter	Michael	v0.1	1. Antenna sample measurement
2024/02/29	Peter	Michael	v0.1	1. Update 3D radiation pattern
2025/02/20	Jason	Michael	v0.2	1. Antenna passive measurement using Satimo Lab
2025/02/25	Jason	Michael	v0.3	1. Antenna passive measurement using Satimo Lab
2025/08/20	Jason	Michael	v0.3	1. Add antenna information sources, θ and ϕ angles, and radiation patterns on the plane of maximum gain.

Table of Contents

- A. Antenna RF Characteristics
 - 1. Antenna Placement
 - 2. S-Parameters
 - 3. Coordinate Definition
 - 4. Gain Table
 - 5. Isolation Table
 - 6. Radiation Patterns
 - 7. Summary

Antenna Placement

No.	Function	Material	Dimension(mm)	Frequency(MHz)	Remark
Ant.1	Wi-Fi Dual-Band	Metal	25.9*1.4*12.9mm	2400 – 2500 5150 – 5850	
Ant.2	Wi-Fi Dual-Band	Metal	28.7*1.4*12.9mm	2400 – 2500 5150 – 5850	

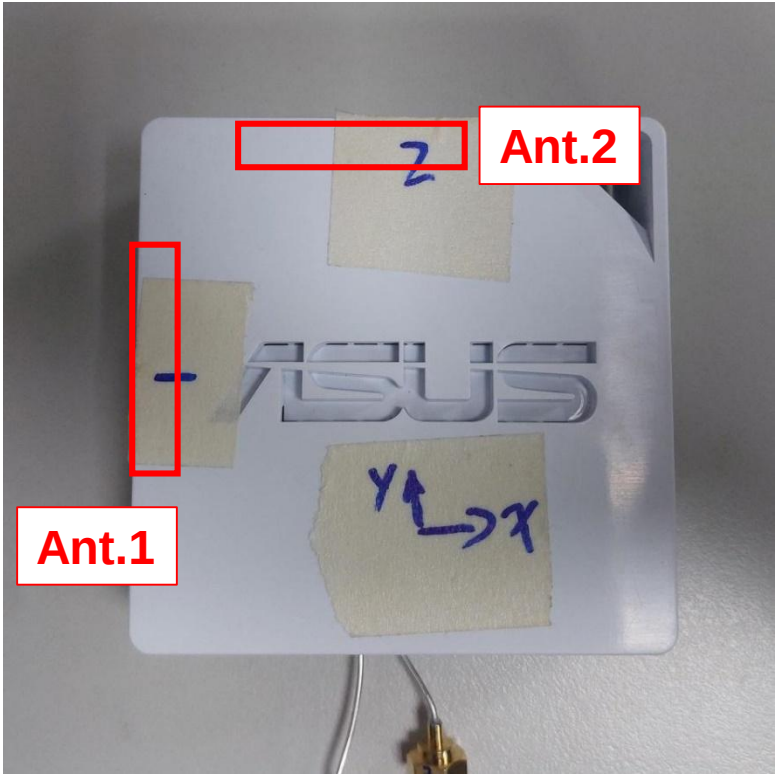

Return loss – Ant.1~Ant.2 (Wi-Fi Dual-band)



Coordinate Definition
Equipment: Satimo - STARLAB



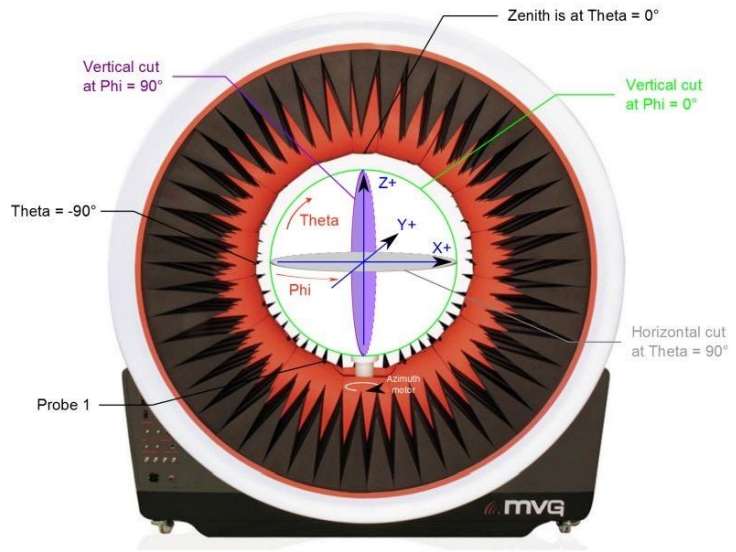


Figure 3.12: StarLab spherical coordinate system

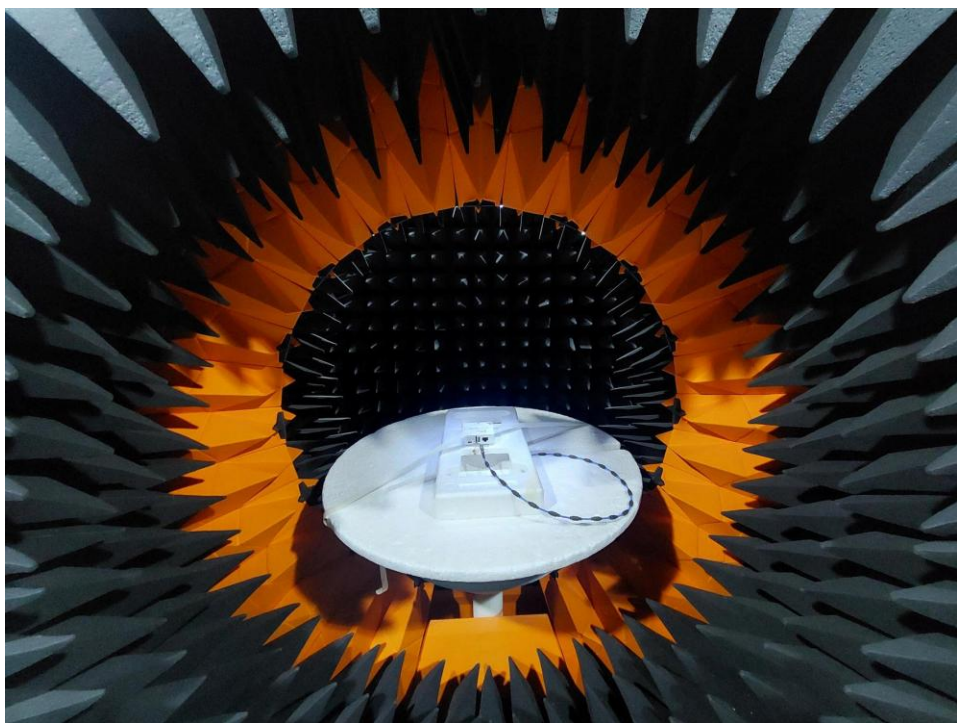

Gain Table

No.	Frequency(MHz)	2400	2450	2500	5150	5550	5850
Ant.1	Peak Gain(dBi)	2.0	2.3	1.9	4.8	4.4	4.0
	Efficiency(%)	60	60	61	77	76	74
Ant.2	Peak Gain(dBi)	0.8	1.6	1.9	4.0	4.1	3.3
	Efficiency(%)	63	67	70	78	76	69


2D Radiation Pattern

Ant.1 (Wi-Fi Dual-band)


Frequency(MHz) : 2400-2500

Radiation Pattern :


Azimuth Plane
theta = 90



Elevation Plane
phi = 0




Elevation Plane
phi = 90



— 2400.00 MHz
— 2450.00 MHz
— 2500.00 MHz


Setup :

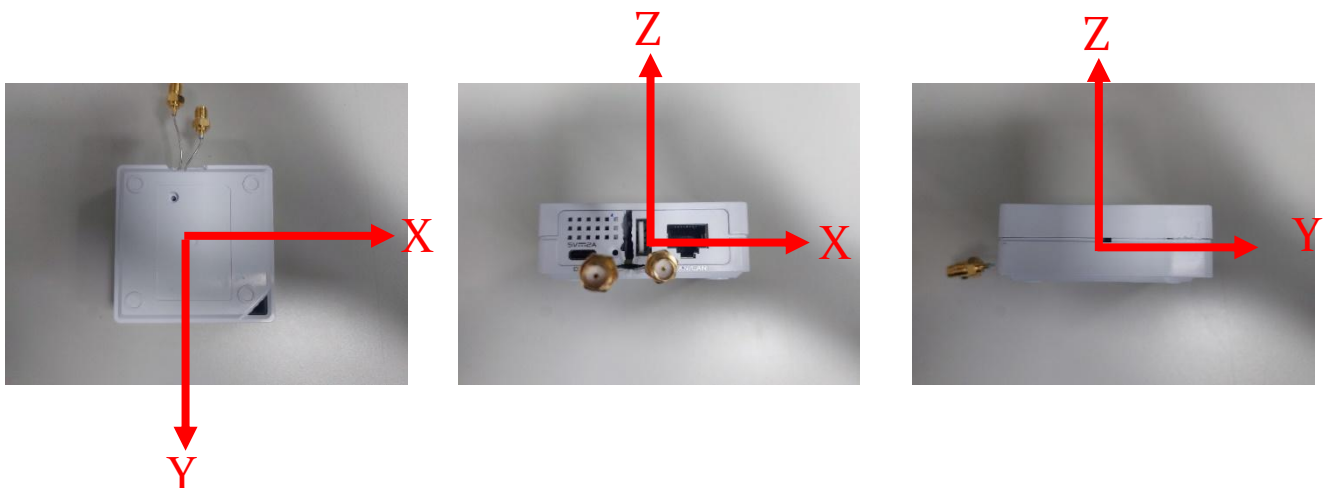


2D Radiation Pattern
Ant.1 (Wi-Fi Dual-band)
Frequency(MHz) : 2400-2500

Radiation Pattern :





Azimuth Plane
theta = 90

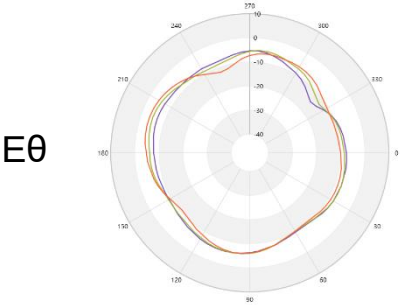

Elevation Plane
phi = 0




Elevation Plane
phi = 90

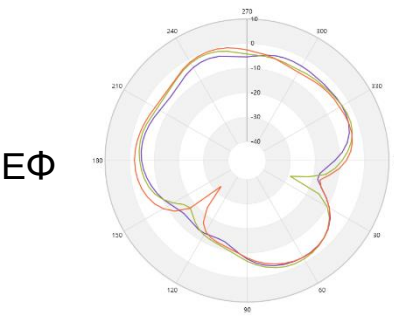

- 2400.00 MHz
- 2450.00 MHz
- 2500.00 MHz

Setup :

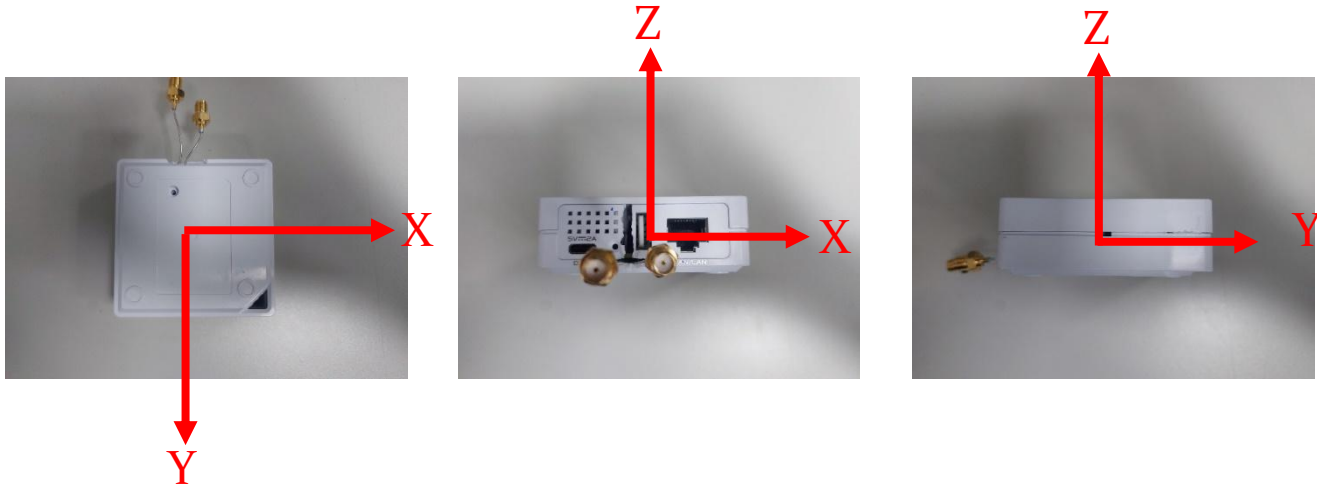


2D Radiation Pattern

Ant.1 (Wi-Fi Dual-band)


Frequency(MHz) : 5150-5850

Radiation Pattern :


Azimuth Plane
theta = 90



Elevation Plane
phi = 0




Elevation Plane
phi = 90



— 5150.00 MHz
— 5550.00 MHz
— 5850.00 MHz


Setup :

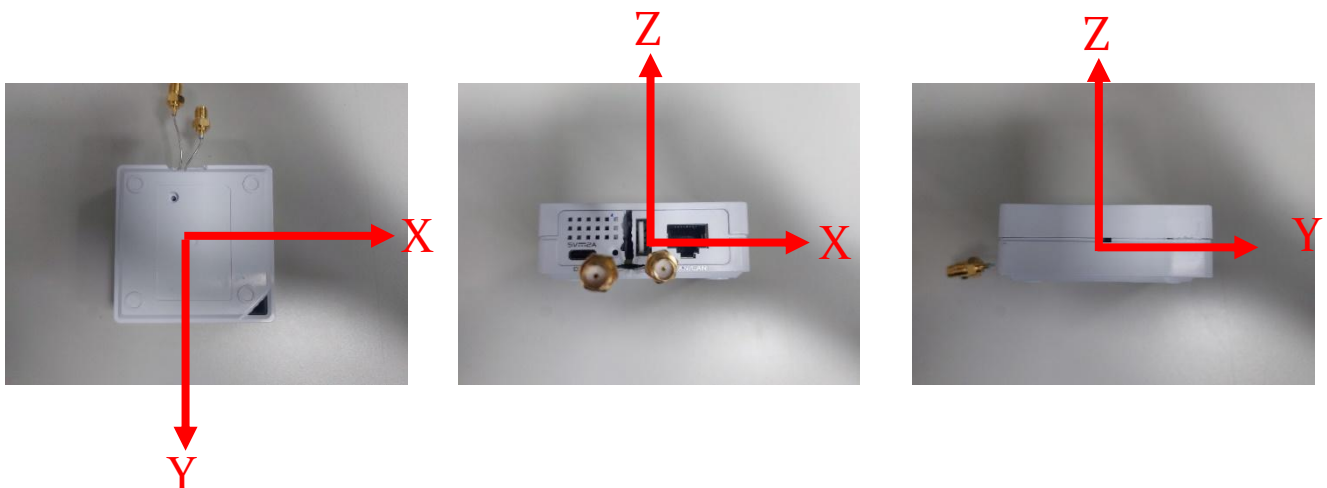


2D Radiation Pattern
Ant.1 (Wi-Fi Dual-band)
Frequency(MHz) : 5150-5850

Radiation Pattern :





Azimuth Plane
theta = 90

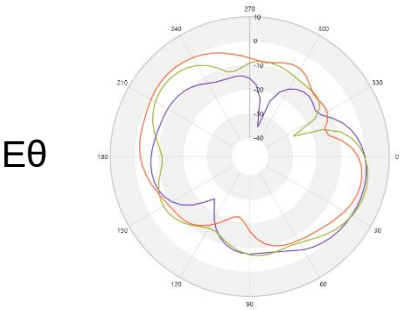

Elevation Plane
phi = 0




Elevation Plane
phi = 90

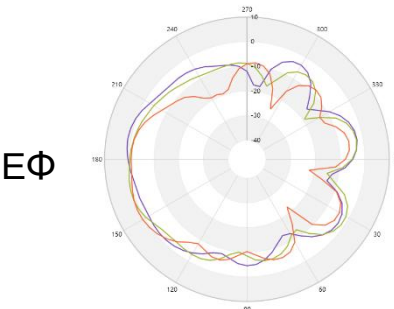

- 5150.00 MHz
- 5550.00 MHz
- 5850.00 MHz

Setup :

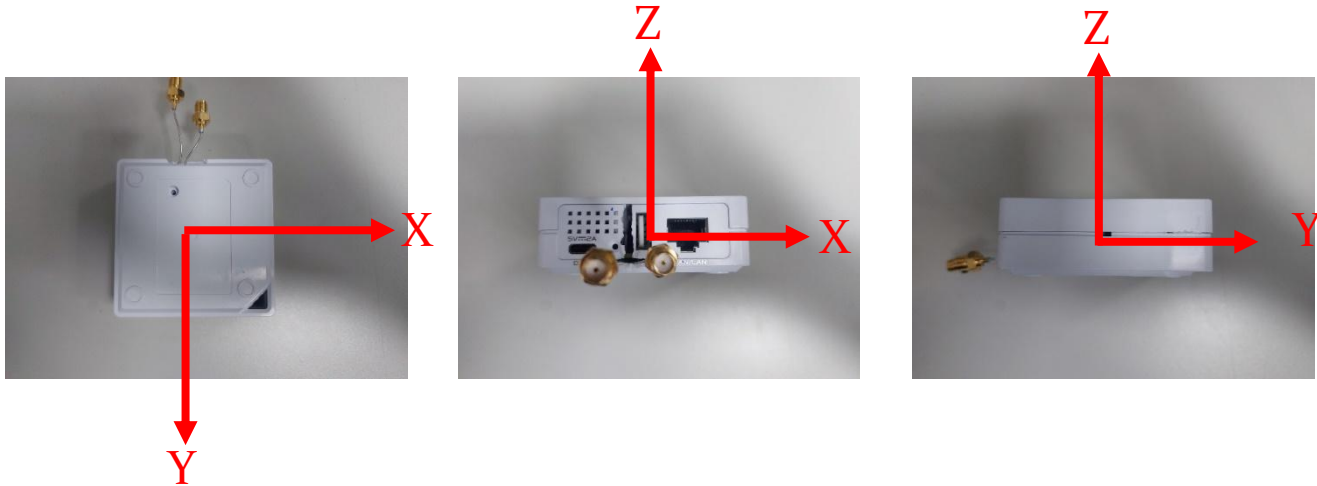


2D Radiation Pattern

Ant.2 (Wi-Fi Dual-band)


Frequency(MHz) : 2400-2500

Radiation Pattern :


Azimuth Plane
theta = 90



Elevation Plane
phi = 0




Elevation Plane
phi = 90



— 2400.00 MHz
— 2450.00 MHz
— 2500.00 MHz


Setup :

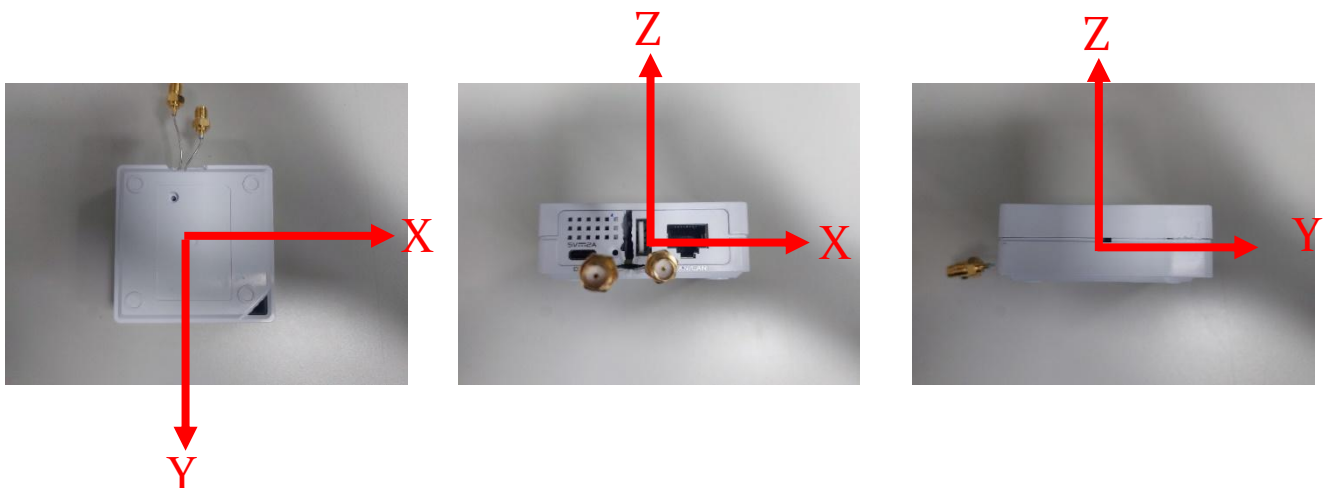


2D Radiation Pattern
Ant.2 (Wi-Fi Dual-band)
Frequency(MHz) : 2400-2500

Radiation Pattern :





Azimuth Plane
theta = 90

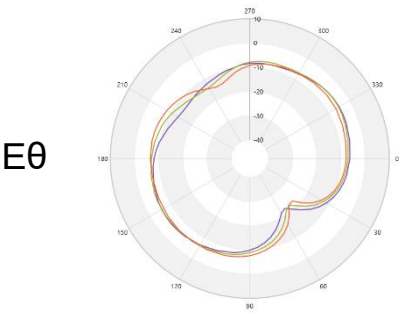

Elevation Plane
phi = 0




Elevation Plane
phi = 90

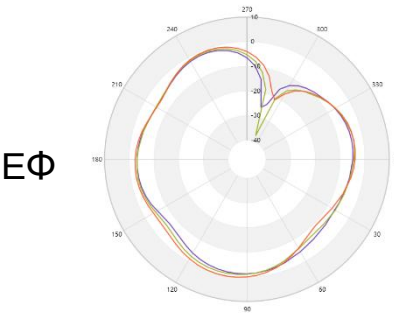

- 2400.00 MHz
- 2450.00 MHz
- 2500.00 MHz


Setup :

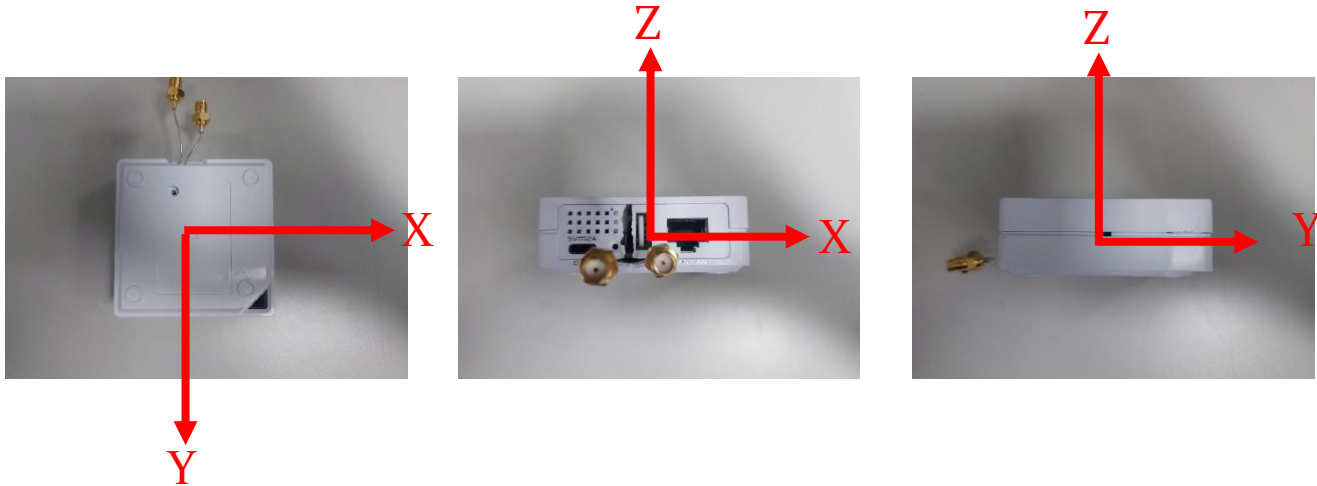


2D Radiation Pattern
Ant.2 (Wi-Fi Dual-band)
Frequency(MHz) : 5150-5850

Radiation Pattern :


Azimuth Plane
 $\theta = 90$



Elevation Plane
 $\phi = 0$




Elevation Plane
 $\phi = 90$



- 5150.00 MHz
- 5550.00 MHz
- 5850.00 MHz


Setup :

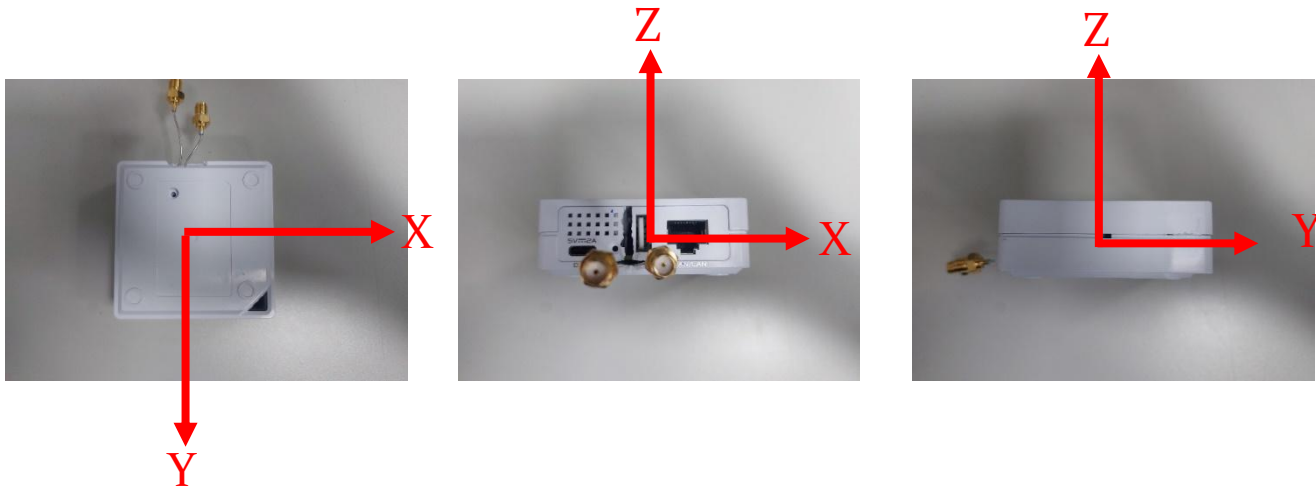


2D Radiation Pattern
Ant.2 (Wi-Fi Dual-band)
Frequency(MHz) : 5150-5850

Radiation Pattern :





Azimuth Plane
theta = 90

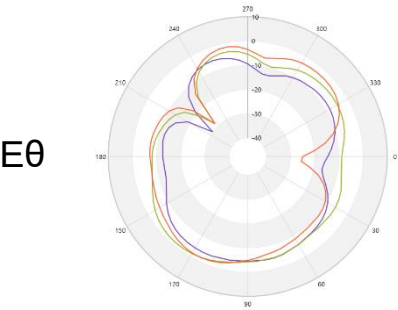

Elevation Plane
phi = 0




Elevation Plane
phi = 90

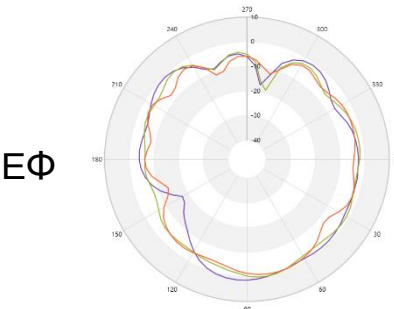

- 5150.00 MHz
- 5550.00 MHz
- 5850.00 MHz


Setup :

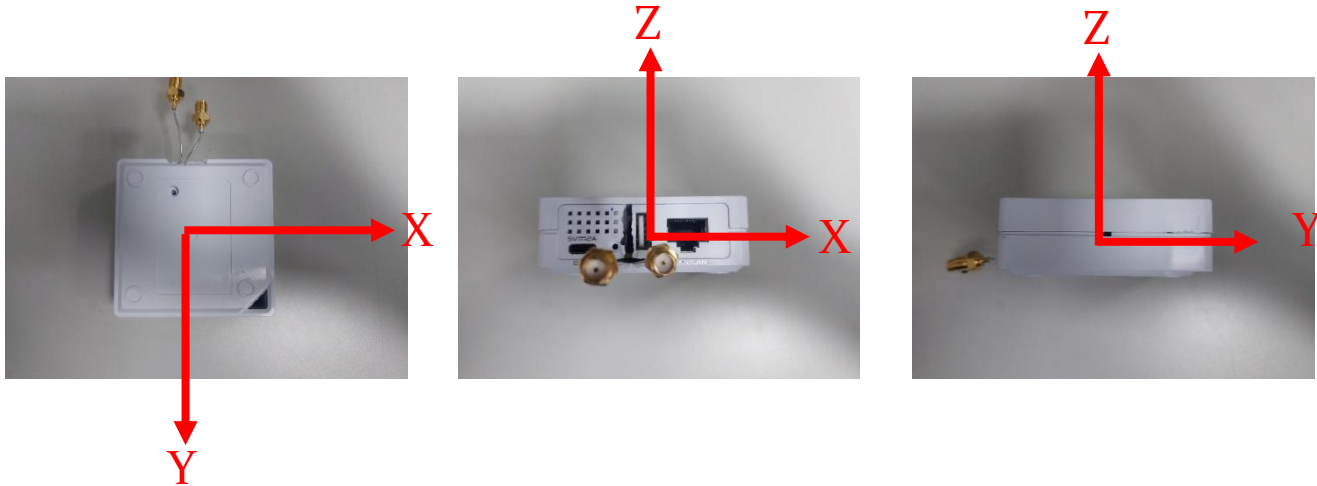


Ant.1_3D Radiation Pattern

Frequency(MHz) : 2450&5550

Radiation Pattern :

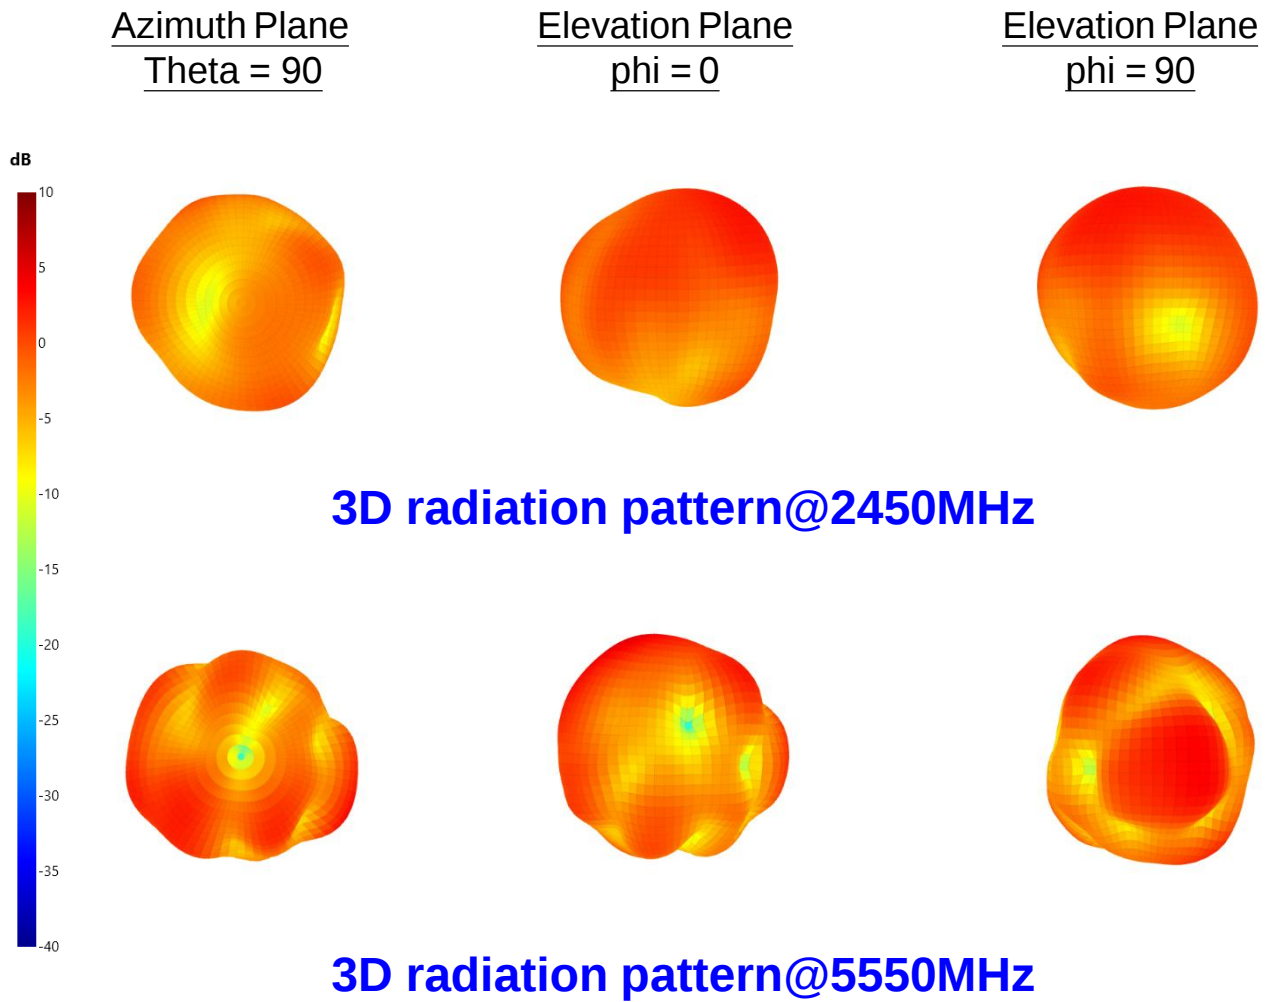


Setup :

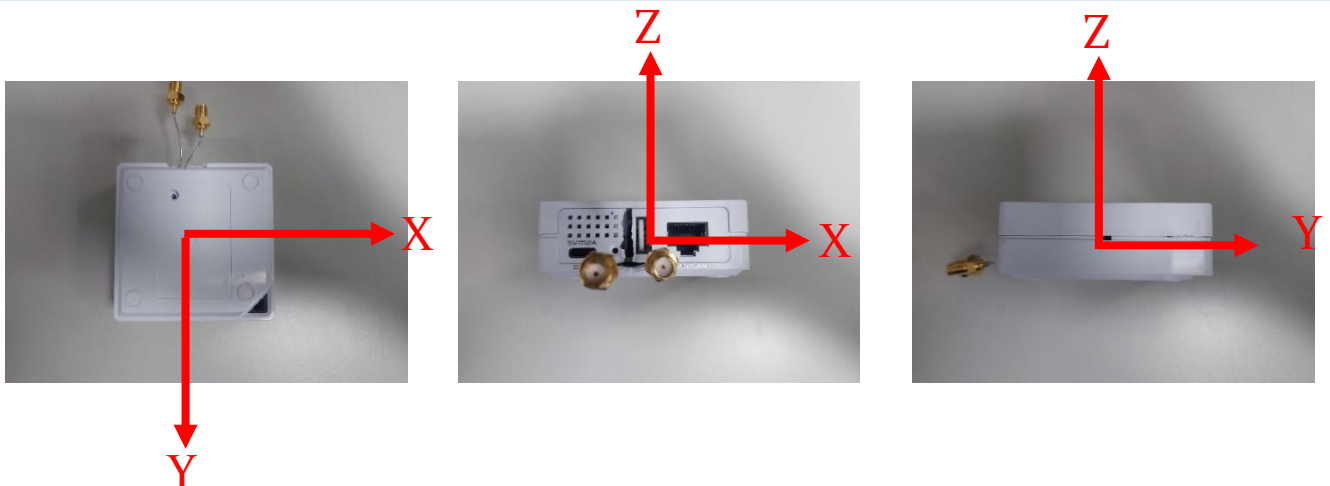


Ant.2_3D Radiation Pattern

Frequency(MHz) : 2450&5550

Radiation Pattern :

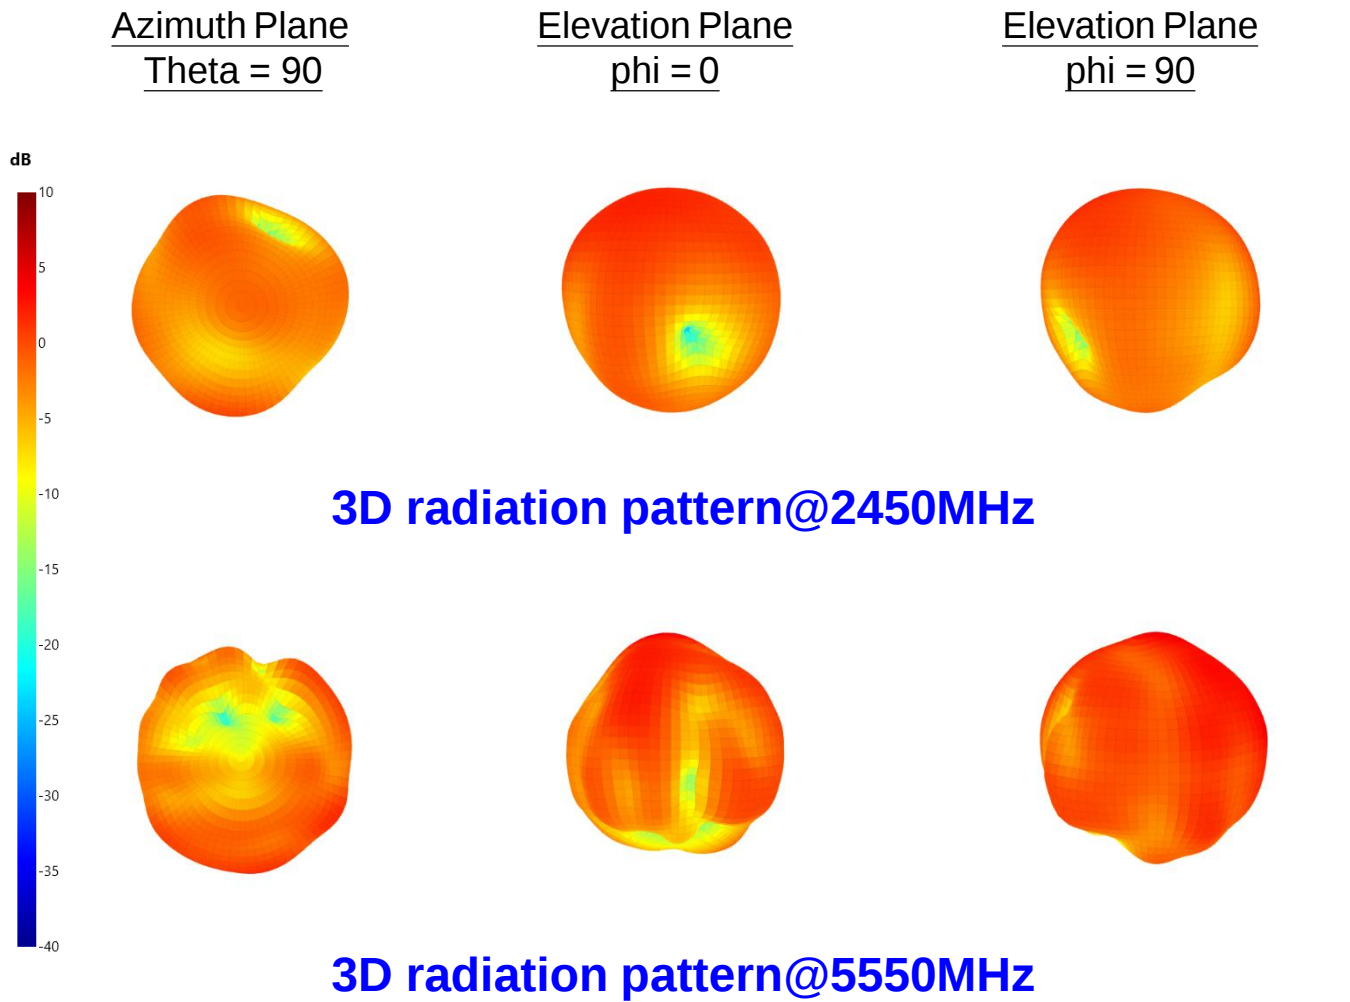

Setup :

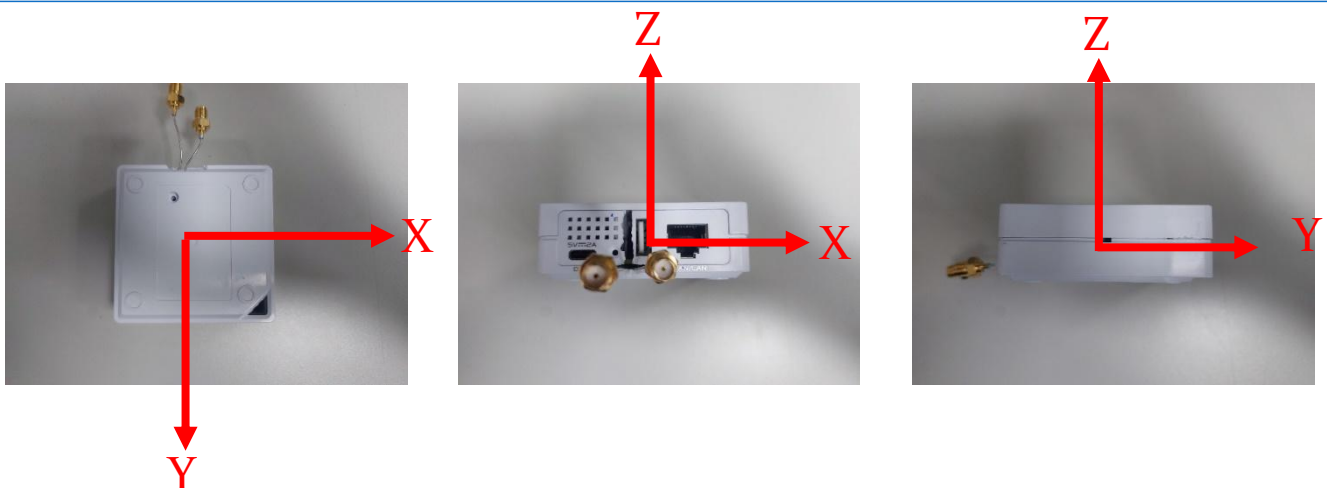

Summary

- The antenna tested is all good.

Summary	Ant.1	Ant.2	Remark
Return Loss – 2.4GHz	< -10dB	< -10dB	
Return Loss – 5GHz	< -10dB	< -10dB	
Efficiency – 2.4GHz	> 60%	> 60%	
Efficiency – 5GHz	> 70%	> 65%	
Peak Gain – 2.4GHz	1.9 – 2.3dBi	0.8 – 1.9dBi	
Peak Gain – 5GHz	4.0 – 4.8dBi	3.3 – 4.1dBi	

www.lynwave.com



<https://www.facebook.com/LYNwaveTechnology/>



<https://www.linkedin.com/company/lynwave-technology-ltd./>



<https://lynwave.en.alibaba.com/>