



FCC Part 96.47 TEST REPORT

FCC ID : MSQAI2201
Equipment : ASUS Phone(Mobile Phone)
Brand Name : ASUS
Model Name : ASUS_AI2201_F
ASUS_AI2201_D
Applicant : ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan
Manufacturer : ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan
Standard : FCC Part 96.47
RF Interface : NR n48

The product was received on Jun 14, 2022 and testing was performed from Jun 28, 2022 to Jun 29, 2022. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (USA) Inc., the test report shall not be reproduced except in full.



Approved by: Neil Kao

Sporton International (USA) Inc.
1175 Montague Expressway, Milpitas, CA 95035



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Laboratory.....	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Connection Diagram of Test System.....	7
3 End User Device additional requirement	8
3.1 Test Requirement	8
3.2 Test Procedure	8
3.3 Test Result.....	9
4 List of Measuring Equipment.....	11
Appendix A. Test Setup Photo	



History of this test report

Report No.	Version	Description	Issue Date
FG220523001	01	Initial issue of report	Jul. 28, 2022
FG220523001	02	Revise Applicable Standards	Aug. 08, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3	96.47	End User Device additional requirement	Pass	-

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11a/ax, NFC, and GNSS

Product Fecture	
Sample 1	SKU 1
Sample 2	SKU 2
Antenna Type	WWAN: PIFA Antenna WLAN <Ant. 4>: PIFA Antenna <Ant. 5>: PIFA Antenna <Ant. 6>: PIFA Antenna Bluetooth <Ant. 4>: PIFA Antenna <Ant. 5>: PIFA Antenna <Ant. 6>: PIFA Antenna GPS/Glonass/BDS/Galileo/SBAS: PIFA Antenna NFC: Loop Antenna

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.
2. All the tests were performed by Sample 2



Sample Information		
SKU	SKU 1	SKU 2
Build Stage	PR	
Config.	WW-High (with LGF)	WW-High (with PMOLED)
RF module board	WW-High(Entry)	WW-PRO
LCD + Touch front frame	AI2201 FRONT CASE ASSY WW	AI2201 FRONT CASE ASSY WW
DDR	16G (Samsung) LPDDR5 SAMSUNG/K3LK6K60BM-BGCP	18G(HYNIX) LPDDR5 HYNIX/H58GU6MK6HX042
UFS	512G (HYNIX) HYNIX HN8T25DEHKX077	512G (HYNIX) HYNIX HN8T25DEHKX077
MB	AI2201_MB	AI2201_MB
Battery	SCUD/C21P2101	SWD/C21P2101
Rear Camera 50+13M	PRIMAX/50-704JQASC8	TRIPLEWIN/CASAF-001A
Front Camera 12M	TSPRECISION/TNBF1166	LUXVISIONS/FRA-00000658
Rear Camera 5M	SHINE PHOTICS/BF515B	TSPRECISION/O5F9323 VERA1
PCB	COMPEQ	COMPEQ
CPU	QUALCOMM MPSP1518B / SM-8475-1 MPSP1518B ES	QUALCOMM MPSP1518B / SM-8475-1 MPSP1518B ES

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Laboratory

Test Site	Sporton International (USA) Inc.
Test Site Location	1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300
Test Site No.	Sporton Site No.
	TH01-CA
Test Engineer	David Hung
Temperature	23 °C
Relative Humidity	44 %


1.4 Applicable Standards

- ♦ FCC Part 96.47
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
- ♦ WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Connection Diagram of Test System

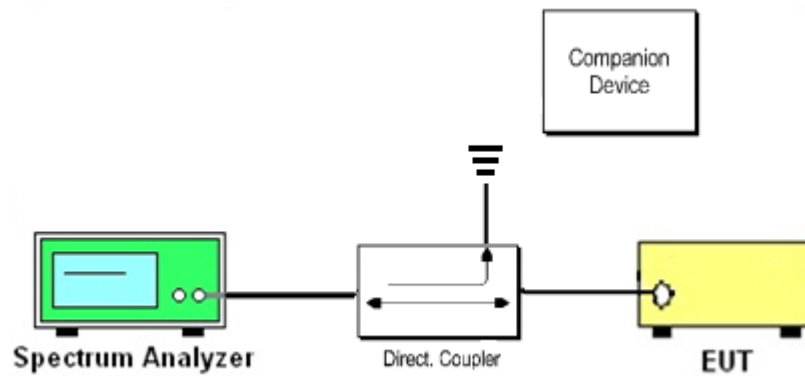

The companion device is certified NR CBSD (FCC ID: PIDAS2900)

3 End User Device additional requirement

3.1 Test Requirement

FCC Part 96.47

(a) End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

(1) An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

3.2 Test Procedure


Following procedure can be done by applying WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification, use the certified Airspan NR CBSD (FCC ID: PIDAS2900) as companion device to show compliance with Part 96.47 requirement for End User Device (EUD):

1. Setup with frequency 3570-3590MHz and power level 34dBm/MHz
2. Enable CBSD service from Airspan ACP management
3. Check EUD Tx Frequency and power
4. Disable CBSD service from Airspan ACP management
 - a. Check EUD stops transmission within 10seconds.
5. Setup with frequency 3670-3690MHz and power level 34dBm/MHz
6. Enable CBSD service from Airspan ACP management
7. Check EUD Tx Frequency and power
8. Disable CBSD service from Airspan ACP management
 - a. Check EUD stops transmission within 10seconds.

3.3 Test Result


[Step 1] Setup with frequency 3570-3590MHz and power level 34dBm/MHz

[Step 3] Check EUD Tx Frequency and power

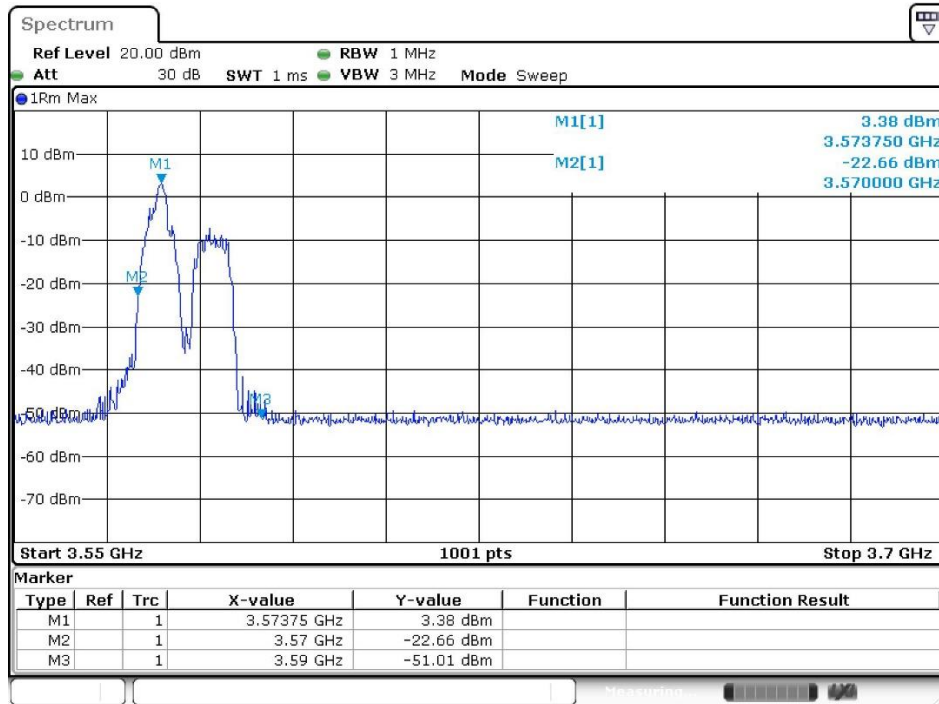

Date: 29.JUN.2022 02:54:42


[Step 4.a.] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.

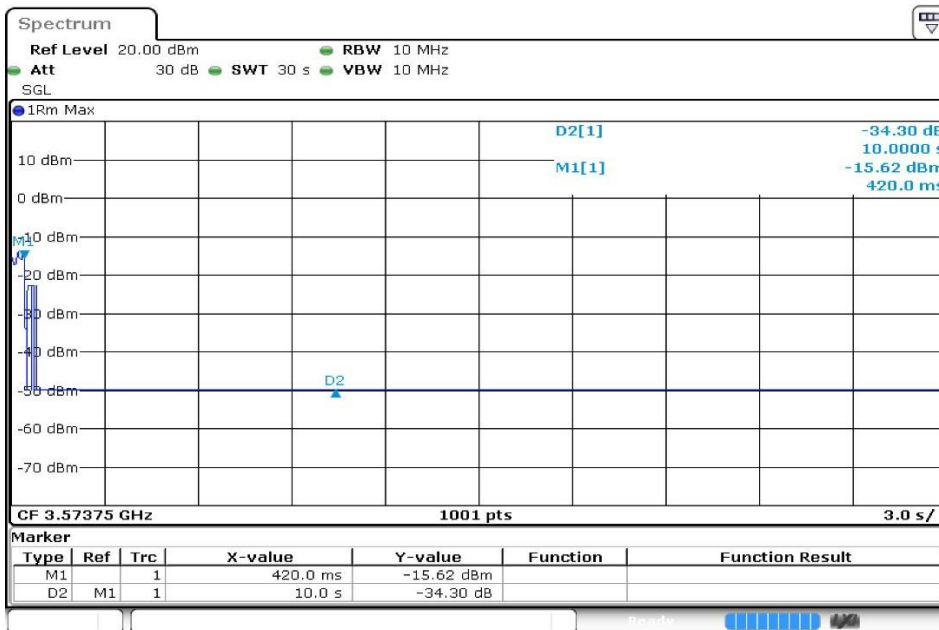

Date: 29.JUN.2022 02:57:17

[Step 5] Setup with 3670-3690MHz & power level 34dBm/MHz


[Step 7] Check EUD Tx Frequency and power

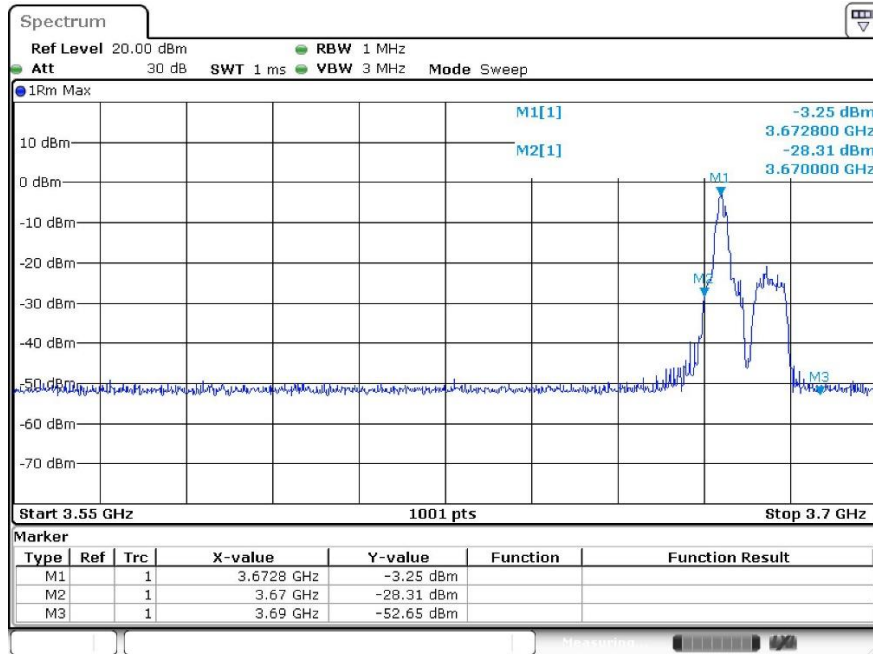

Date: 29 JUN.2022 03:11:20

[Step 8.a.] After changing the frequency and power level,

The module (EUT) discontinues operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD. Test result is PASS.

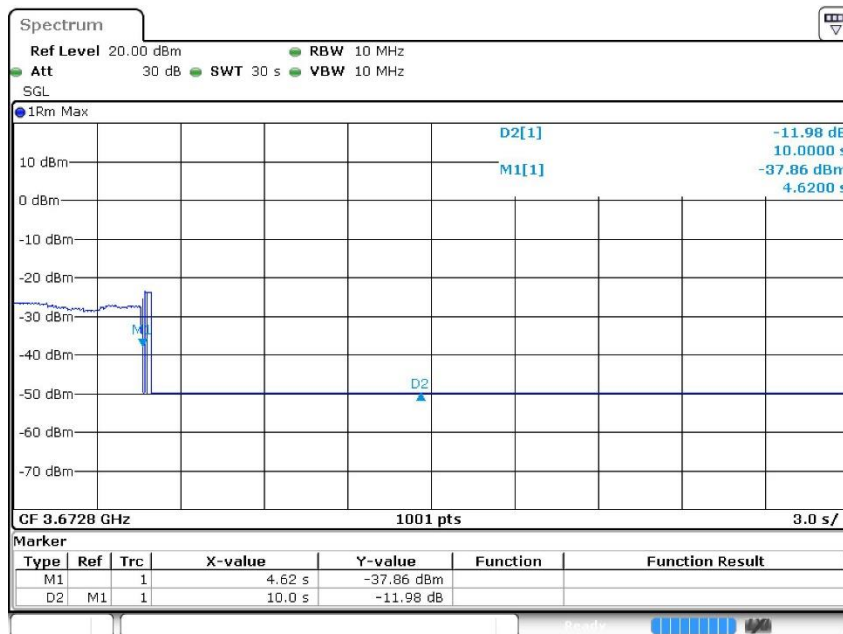

Date: 29 JUN.2022 03:13:47



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSW43	104042	2Hz~43GHz	Nov. 18, 2021	Jun. 28, 2022~ Jun. 29, 2022	Nov. 17, 2022	TH01-CA
Spectrum Analyzer	R&S	FSV40	101089	10Hz~40GHz	Jun. 01, 2022	Jun. 28, 2022~ Jun. 29, 2022	May 31, 2023	TH01-CA