

FCC RF Test Report

APPLICANT : ASUSTeK COMPUTER INC.
EQUIPMENT : ASUS Phone (Mobile Phone)
BRAND NAME : ASUS
MODEL NAME : ASUS_AI2205_E, ASUS_AI2205_F
FCC ID : MSQAI2205
STANDARD : 47 CFR Part 2, Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Feb. 05, 2023 ~ Feb. 14, 2023

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Maximum EIRP and Emission Designator	7
1.7 Testing Site	7
1.8 Test Software	8
1.9 Applied Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	12
3.1 Measuring Instruments	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test	12
3.4 Conducted Output Power Measurement	13
3.5 Peak-to-Average Ratio	14
3.6 EIRP	15
3.7 Occupied Bandwidth	16
3.8 Conducted Band Edge Measurement	17
3.9 Conducted Spurious Emission Measurement	18
3.10 Frequency Stability Measurement	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	21
4.4 Radiated Spurious Emission Measurement	22
5 LIST OF MEASURING EQUIPMENT	23
6 UNCERTAINTY OF EVALUATION	24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG2D3005N	Rev. 01	Initial issue of report	Apr. 12, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 16.82 dB at 9222.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

ASUSTeK COMPUTER INC.

1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.2 Manufacturer

ASUSTeK COMPUTER INC.

1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	ASUS Phone (Mobile Phone)
Brand Name	ASUS
Model Name	ASUS_AI2205_E, ASUS_AI2205_F
FCC ID	MSQAI2205
IMEI Code	Conducted : 355156850100810/355156850100828 Radiation : 355156850101156/355156850101164
HW Version	R2.0
SW Version	Android 13
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four SKUs of EUT for this project. The differences between them are summary below,
According to the difference, we evaluate SKU1 (ASUS_AI2205_F) to perform RF test.

Sample list				
	SKU1	SKU2	SKU3	SKU4
Model name	ASUS_AI2205_F	ASUS_AI2205_E	ASUS_AI2205_F	ASUS_AI2205_E
Config.	US(Pro)	US(Entry)	US(Pro)	US(Entry)
RF module board	US(Pro)	US(Entry)	US(Pro)	US(Entry)
LCD+Touch front frame	AI2205 FRONT CASE ASSY WW	AI2205 FRONT CASE ASSY WW	AI2205 FRONT CASE ASSY WW	AI2205 FRONT CASE ASSY WW
DDR	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B
UFS	512G(Kioxia)(UFS4.0) Kioxia / THGJFJT2T85BAT0	512G(Samsung)(UFS4.0) Samsung /KLUF8RHHD-B0G1	512G(Kioxia)(UFS4.0) Kioxia / THGJFJT2T85BAT0	512G(Samsung)(UFS4.0) Samsung /KLUF8RHHD-B0G1
MB	AI2205_MB	AI2205_MB	AI2205_MB	AI2205_MB
Back cover	WW-Dark-Ult	WW-Light-Entry	WW-Dark-Ult	WW-Light-Entry
Battery	SCUD / C21P2101	SWD / C21P2101	SWD / C21P2101	SCUD / C21P2101
Rear Camera	SHINETECH/CDN60B	TRIPLEWIN/CASDA-002A	TRIPLEWIN/CASDA-002A	SHINETECH/CDN60B

50+13M		1	1	
Front Camera 32M	TSPRECISION/TVHF2170	SHINETECH/ST-CMG07B	SHINETECH/ST-CMG07B	TSPRECISION/TVHF2170
Rear Camera 5M	HUNAN KINGCOME/KBFE378	TSPRECISION/TV8F2224	TSPRECISION/TV8F2224	HUNAN KINGCOME/KBFE378
PCB	COMPEQ	COMPEQ	COMPEQ	COMPEQ
CPU	QUALCOMM MPSP1581 / SM-8550 MPSP1581 CS	QUALCOMM MPSP1581 / SM-8550 MPSP1581 CS	QUALCOMM MPSP1581 / SM-8550 MPSP1581 CS	QUALCOMM MPSP1581 / SM-8550 MPSP1581 CS

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n77: 3450 MHz ~ 3550 MHz
Bandwidth	20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 80MHz / 90MHz / 100MHz
SCS	30kHz
Antenna Type	PIFA Antenna
Antenna Gain	<Ant. 7> : n77: -2.08 dBi <Ant. 8> : n77: -4.31 dBi, <Ant. 9> : n77: -1.39 dBi, <Ant. 10> : n77: -3.38 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from output power and antenna gain, only the maximum EIRP of Ant. 9 is shown in the report.
2. The device supports n77 (1T4R) SRS resources on Ant.7/8/9/10, only the worst test data of Ant. 8 is showed in the report.
3. The device supports HPUE for SA mode only.
4. 5G NR support SA mode and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode for conducted test items.
5. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
6. The EN-DC mode combination could be referred to the product spec.
7. when temperature lower than -10 °C, EUT will be shut down automatically, thus Frequency Stability item only test -10~50 °C.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP and Emission Designator

5G NR n77		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3460.02 ~ 3540.00	0.2742	18M3G7D	0.2188	18M2W7D
30	3465.00 ~ 3534.99	0.2805	27M8G7D	0.2291	27M9W7D
40	3470.01 ~ 3529.98	0.2871	37M9G7D	0.2280	37M9W7D
50	3475.02 ~ 3525.00	0.2844	47M4G7D	0.2270	47M5W7D
60	3480.00 ~ 3519.99	0.2723	57M9G7D	0.2198	57M9W7D
80	3490.02 ~ 3510.00	0.2594	77M7G7D	0.2113	77M6W7D
90	3495.00 ~ 3504.99	0.2754	87M4G7D	0.2203	87M6W7D
100	3500.01	0.2877	97M5G7D	0.2270	97M5W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission (Z plane).

Test Items	5G NR	Bandwidth (MHz)										Modulation					RB #		Test Channel			
		10	15	20	30	40	50	60	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H	
Max. Output Power	n77	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Peak-to-Average Ratio	n77	-	-	v								v	v				v	v	v	v	v	
26dB and 99% Bandwidth	n77	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v		v		v		
Conducted Band Edge	n77	-	-	v				v			v	v	v				v	v	v		v	
Conducted Spurious Emission	n77	-	-	v				v			v	v	v				v		v	v	v	
Frequency Stability	n77	-	-	v									v					v		v		
E.I.R.P	n77	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Radiated Spurious Emission	n77	Worst Case																			v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 7.78V ; Low Voltage =7.30V. ; High Voltage =8.70V																					

2.2 Connection Diagram of Test System

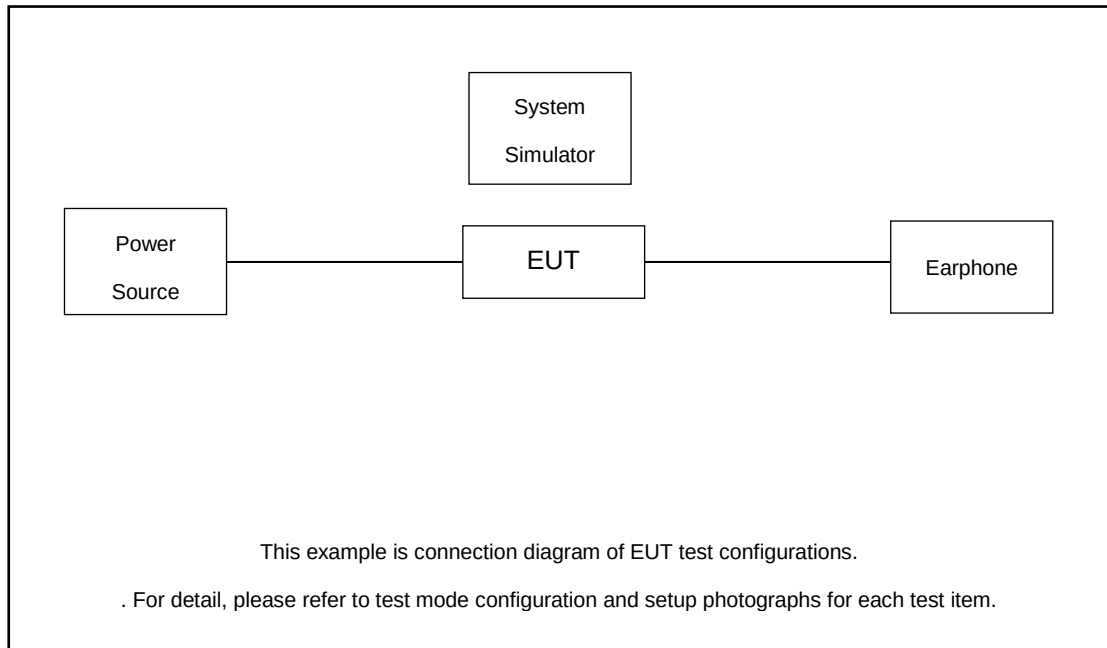

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.7dB.

Example :

Offset(dB) = RF cable loss(dB).

= 8.7 (dB)

2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

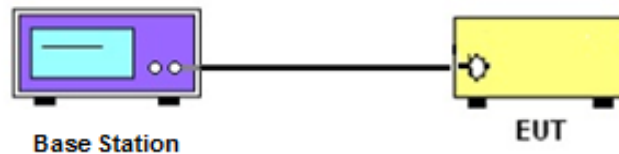

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

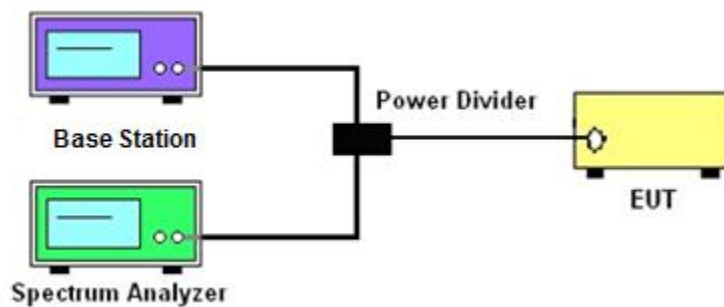

3.2.3 Frequency Stability

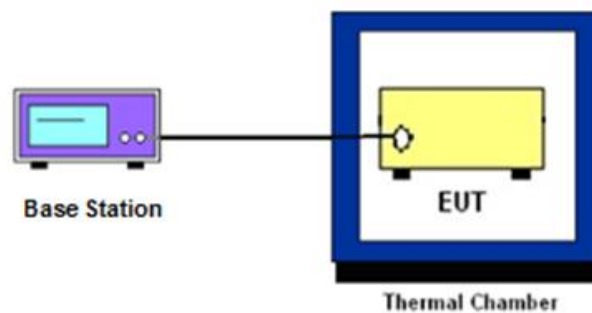

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500 KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -10°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

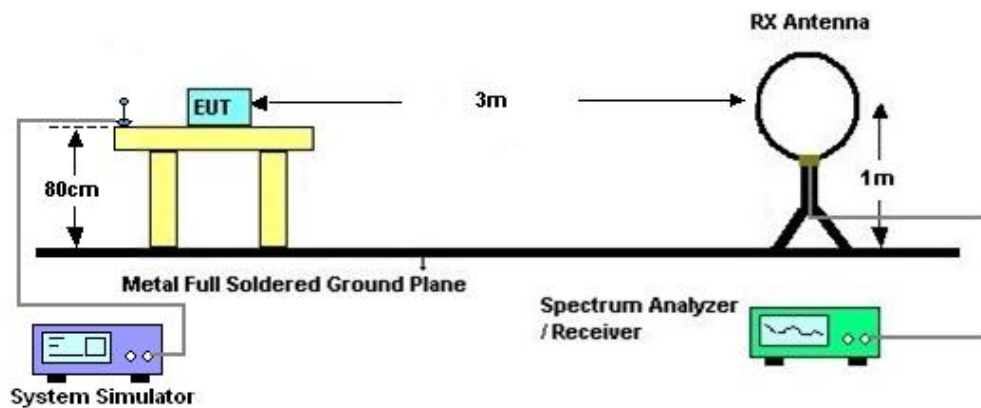

4.2.2 For radiated test from 30MHz to 1GHz

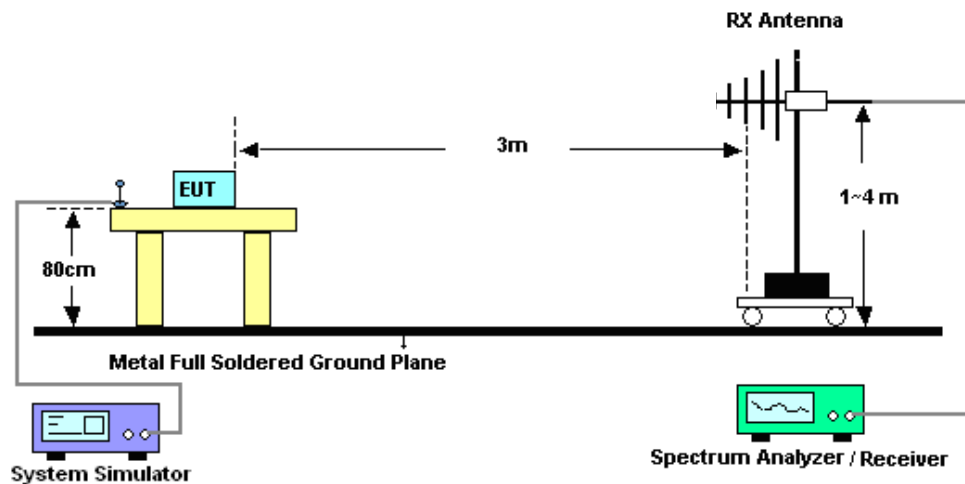

4.2.3 For radiated test above 1GHz

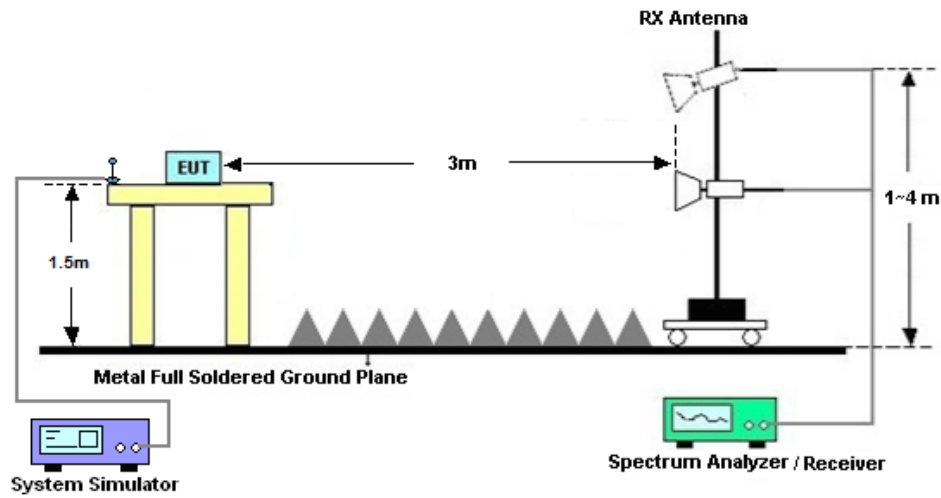

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Feb. 05, 2023~ Feb. 14, 2023	Apr. 06, 2023	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V, 3A	Oct. 17, 2022	Feb. 05, 2023~ Feb. 14, 2023	Oct. 16, 2023	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2022	Feb. 05, 2023~ Feb. 14, 2023	Dec. 24, 2023	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhonggroup	LP-150U	H2014081803	-40~+150°C	Jul. 07, 2022	Feb. 05, 2023~ Feb. 14, 2023	Jul. 06, 2023	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 26, 2022	Feb. 10, 2023	Dec. 25, 2023	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Feb. 10, 2023	Jul. 27, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct.19, 2022	Feb. 10, 2023	Oct.18, 2023	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Sep. 28, 2021	Feb. 10, 2023	Sep. 27, 2023	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Feb. 10, 2023	Jul. 06, 2023	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 10, 2022	Feb. 10, 2023	Apr. 09, 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Feb. 10, 2023	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Feb. 10, 2023	Oct. 18, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 06, 2022	Feb. 10, 2023	Jul. 05, 2023	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Nov.10.2022	Feb. 10, 2023	Nov.09.2023	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 10, 2023	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 10, 2023	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.48dB
--	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.53dB
--	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.02dB
--	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Kuo	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N77-Ant 9

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-1.39dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	25.77	24.38	0.2742
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	24.71	23.32	0.2148
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.76	24.37	0.2735
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.79	23.4	0.2188
77	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	25.73	24.34	0.2716
77	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	24.74	23.35	0.2163
77	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	25.83	24.44	0.2780
77	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	24.92	23.53	0.2254
77	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.87	24.48	0.2805
77	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.88	23.49	0.2234
77	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	25.84	24.45	0.2786
77	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	24.99	23.6	0.2291
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	25.82	24.43	0.2773
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	24.89	23.5	0.2239
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.9	24.51	0.2825
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.92	23.53	0.2254
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	25.97	24.58	0.2871
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	24.97	23.58	0.2280
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	25.89	24.5	0.2818

77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	24.9	23.51	0.2244
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.86	24.47	0.2799
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.93	23.54	0.2259
77	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	25.93	24.54	0.2844
77	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	24.95	23.56	0.2270
77	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	25.71	24.32	0.2704
77	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	24.71	23.32	0.2148
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.74	24.35	0.2723
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.74	23.35	0.2163
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	25.72	24.33	0.2710
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	24.81	23.42	0.2198
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	25.44	24.05	0.2541
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	24.4	23.01	0.2000
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.44	24.05	0.2541
77	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.51	23.12	0.2051
77	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	25.53	24.14	0.2594
77	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	24.64	23.25	0.2113
77	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	25.77	24.38	0.2742
77	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	24.78	23.39	0.2183
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.79	24.4	0.2754
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.82	23.43	0.2203
77	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	25.66	24.27	0.2673
77	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	24.71	23.32	0.2148
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	25.89	24.5	0.2818

77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.98	24.59	0.2877
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	25.68	24.29	0.2685
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	25.73	24.34	0.2716
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.87	24.48	0.2805
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	25.65	24.26	0.2667
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	24.7	23.31	0.2143
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.95	23.56	0.2270
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	24.7	23.31	0.2143
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	23.23	21.84	0.1528
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	23.39	22	0.1585
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	23.17	21.78	0.1507
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	21.25	19.86	0.0968
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	21.17	19.78	0.0951
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	21.03	19.64	0.0920
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	24.25	22.86	0.1932
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	24.29	22.9	0.1950
77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	24.06	22.67	0.1849

FR1 N77-Ant 8

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-4.31dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	25.92	21.61	0.1449
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	24.91	20.6	0.1148
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.95	21.64	0.1459
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.93	20.62	0.1153
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@1	25.91	21.6	0.1445
77	30	20	636000	3540.0	DFT-s-OFDM 16 QAM	1@1	24.92	20.61	0.1151
77	30	30	631000	3465.0	DFT-s-OFDM QPSK	1@1	25.97	21.66	0.1466
77	30	30	631000	3465.0	DFT-s-OFDM 16 QAM	1@1	25.04	20.73	0.1183
77	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.99	21.68	0.1472
77	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.06	20.75	0.1189
77	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	26.02	21.71	0.1483
77	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	25.14	20.83	0.1211
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	25.97	21.66	0.1466
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	25.05	20.74	0.1186
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.08	21.77	0.1503
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.02	20.71	0.1178
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	26.08	21.77	0.1503
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	25.13	20.82	0.1208
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@1	25.83	21.52	0.1419
77	30	60	632000	3480.0	DFT-s-OFDM 16 QAM	1@1	24.81	20.5	0.1122

77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.87	21.56	0.1432
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.89	20.58	0.1143
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	25.89	21.58	0.1439
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	24.96	20.65	0.1161
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	25.55	21.24	0.133
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	24.59	20.28	0.1067
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.58	21.27	0.134
77	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.67	20.36	0.1086
77	30	80	634000	3510.0	DFT-s-OFDM QPSK	1@1	25.69	21.38	0.1374
77	30	80	634000	3510.0	DFT-s-OFDM 16 QAM	1@1	24.79	20.48	0.1117
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	25.61	21.3	0.1349
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.62	21.31	0.1352
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	25.4	21.09	0.1285
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	25.5	21.19	0.1315
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.61	21.3	0.1349
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	25.36	21.05	0.1274
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	24.48	20.17	0.104
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.68	20.37	0.1089
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	24.44	20.13	0.103
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	22.99	18.68	0.0738
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	23.1	18.79	0.0757
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	22.96	18.65	0.0733
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	21.04	16.73	0.0471
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	20.97	16.66	0.0463

77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	20.79	16.48	0.0445
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	23.96	19.65	0.0923
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	24.05	19.74	0.0942
77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	23.84	19.53	0.0897


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0060	PASS	NV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0049	PASS	LV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0041	PASS	HV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0049	PASS	-10°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0045	PASS	0°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0045	PASS	10°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0060	PASS	20°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0034	PASS	30°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0029	PASS	40°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0030	PASS	50°C


Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	50@0	6.9	13	PASS
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@0	8.62	13	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	50@0	7.56	13	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	6.97	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	6.9	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@0	8.56	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	7.54	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	7.5	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM PI/2 BPSK	50@0	6.94	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM PI/2 BPSK	1@0	7.09	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	50@0	7.54	13	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	7.51	13	PASS


N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

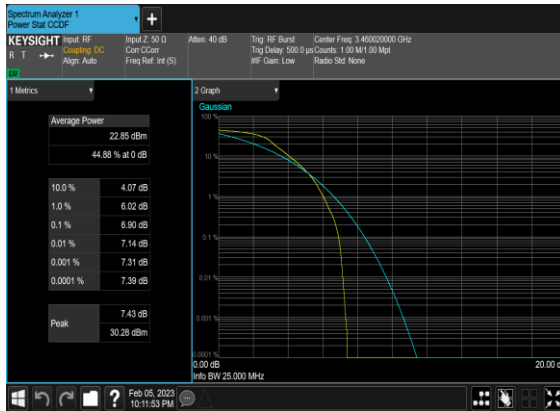


N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

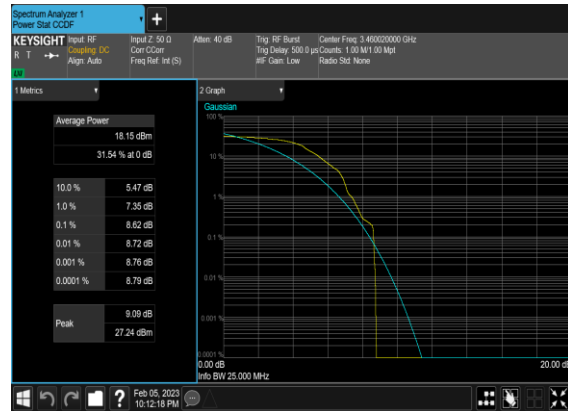


N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

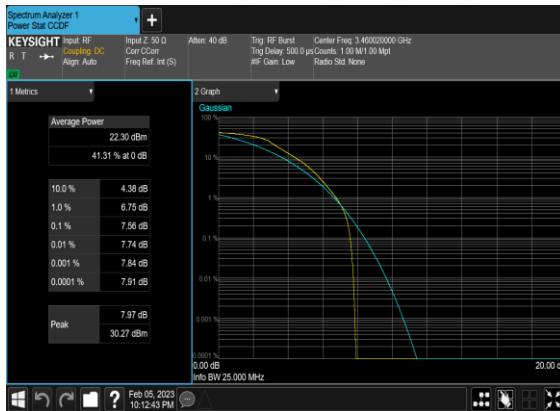

N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

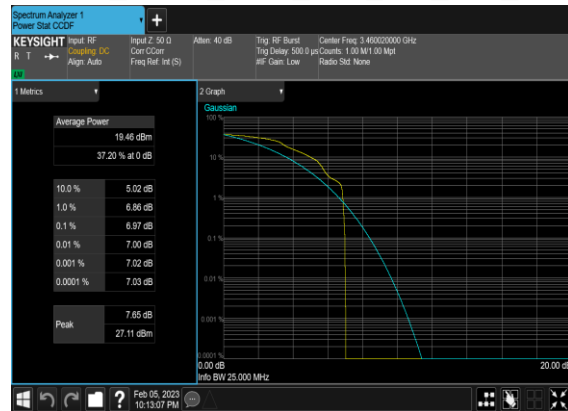


N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

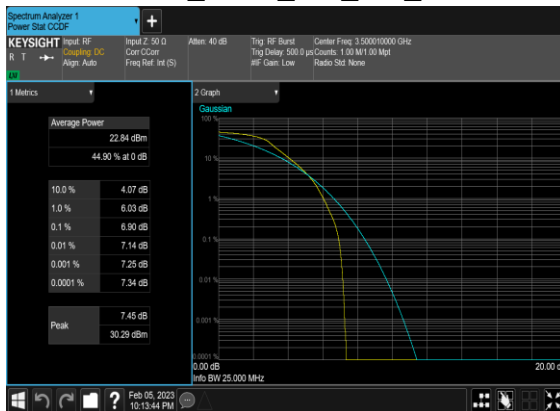


N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH




N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

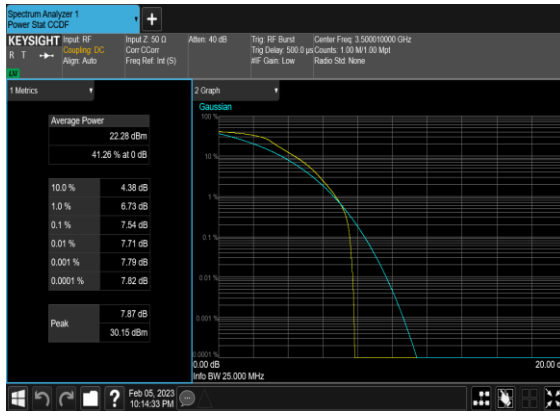


N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

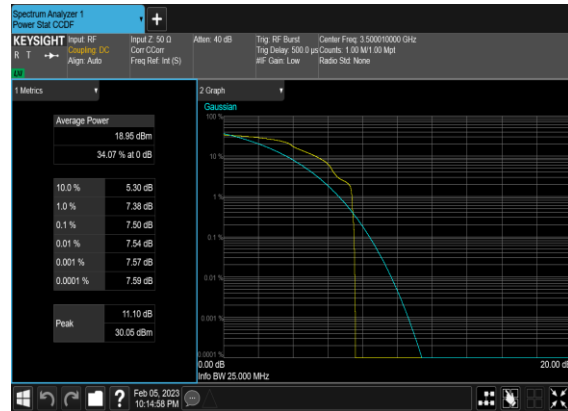


N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_High_CH

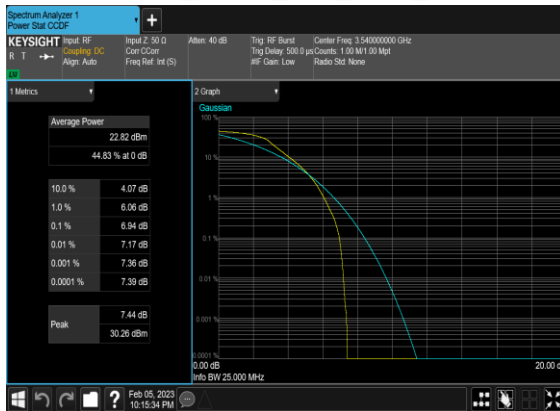

N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_High_CH

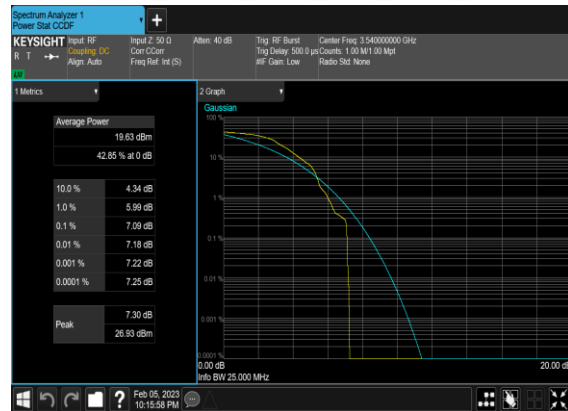

N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

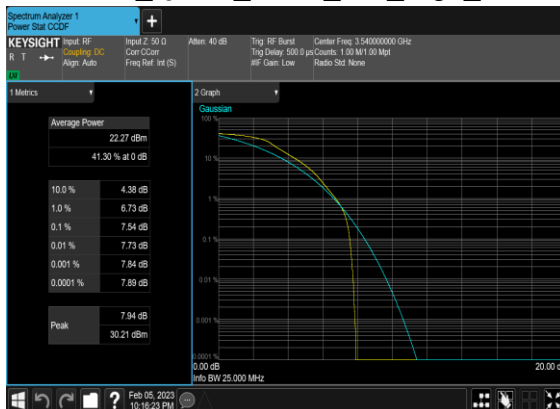

N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH




Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	17.793	18.88
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	17.8	18.78
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	18.259	19.27
77	30	20	633334	3500.01	CP-OFDM 16 QAM	51@0	18.21	19.35
77	30	20	633334	3500.01	CP-OFDM 64 QAM	51@0	18.201	19.29
77	30	20	633334	3500.01	CP-OFDM 256 QAM	51@0	18.183	19.5
77	30	30	633334	3500.01	DFT-s-OFDM PI/2 BPSK	75@0	26.654	27.89
77	30	30	633334	3500.01	DFT-s-OFDM QPSK	75@0	26.749	27.81
77	30	30	633334	3500.01	CP-OFDM QPSK	78@0	27.783	29.73
77	30	30	633334	3500.01	CP-OFDM 16 QAM	78@0	27.831	29.54
77	30	30	633334	3500.01	CP-OFDM 64 QAM	78@0	27.829	29.15
77	30	30	633334	3500.01	CP-OFDM 256 QAM	78@0	27.865	29.13
77	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	100@0	35.75	37.37
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	100@0	35.698	37.44
77	30	40	633334	3500.01	CP-OFDM QPSK	106@0	37.883	39.49
77	30	40	633334	3500.01	CP-OFDM 16 QAM	106@0	37.831	39.31
77	30	40	633334	3500.01	CP-OFDM 64 QAM	106@0	37.725	39.31
77	30	40	633334	3500.01	CP-OFDM 256 QAM	106@0	37.862	39.25
77	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	128@0	45.665	47.87
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	128@0	45.556	47.19
77	30	50	633334	3500.01	CP-OFDM QPSK	133@0	47.379	49.47
77	30	50	633334	3500.01	CP-OFDM 16 QAM	133@0	47.417	49.04
77	30	50	633334	3500.01	CP-OFDM 64 QAM	133@0	47.536	49.32
77	30	50	633334	3500.01	CP-OFDM 256 QAM	133@0	47.305	49.36

77	30	60	633334	3500.01	DFT-s-OFDM PI/2 BPSK	162@0	57.865	59.83
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	162@0	57.803	59.89
77	30	60	633334	3500.01	CP-OFDM QPSK	162@0	57.698	59.85
77	30	60	633334	3500.01	CP-OFDM 16 QAM	162@0	57.766	60.11
77	30	60	633334	3500.01	CP-OFDM 64 QAM	162@0	57.81	59.77
77	30	60	633334	3500.01	CP-OFDM 256 QAM	162@0	57.92	59.81
77	30	80	633334	3500.01	DFT-s-OFDM PI/2 BPSK	216@0	77.119	79.6
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	216@0	77.071	79.64
77	30	80	633334	3500.01	CP-OFDM QPSK	217@0	77.657	79.9
77	30	80	633334	3500.01	CP-OFDM 16 QAM	217@0	77.287	80.07
77	30	80	633334	3500.01	CP-OFDM 64 QAM	217@0	77.611	80.0
77	30	80	633334	3500.01	CP-OFDM 256 QAM	217@0	77.407	79.83
77	30	90	633334	3500.01	DFT-s-OFDM PI/2 BPSK	240@0	85.904	88.76
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	240@0	85.873	88.7
77	30	90	633334	3500.01	CP-OFDM QPSK	245@0	87.406	90.31
77	30	90	633334	3500.01	CP-OFDM 16 QAM	245@0	87.469	90.38
77	30	90	633334	3500.01	CP-OFDM 64 QAM	245@0	87.419	90.17
77	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.608	90.32
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	270@0	96.559	99.55
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	270@0	96.737	99.56
77	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.451	100.6
77	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	97.524	100.6
77	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	97.41	100.5
77	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.467	100.6


N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

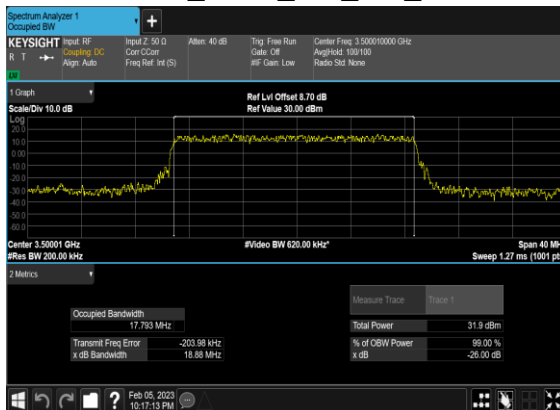


N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

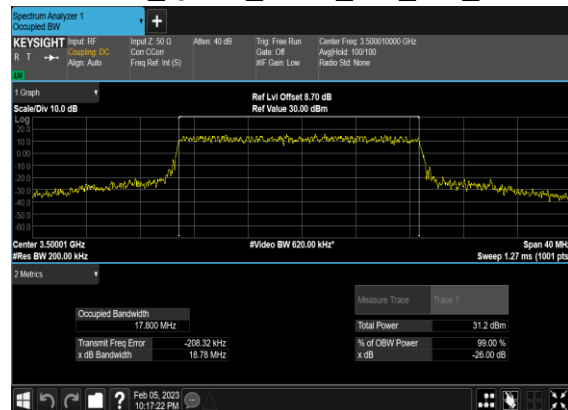


N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

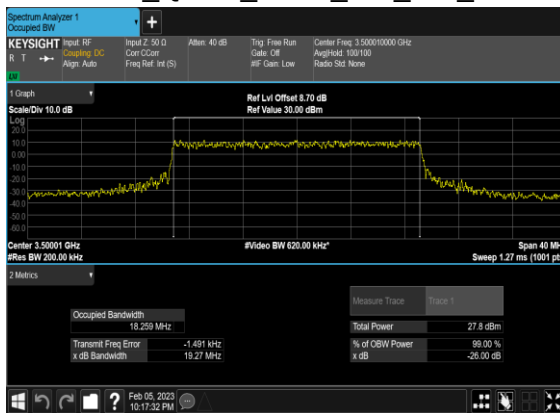


N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

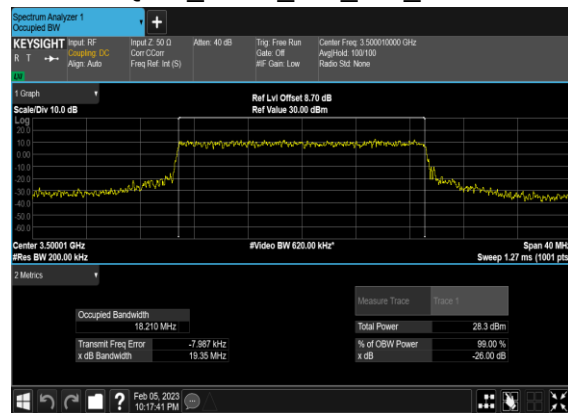


N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

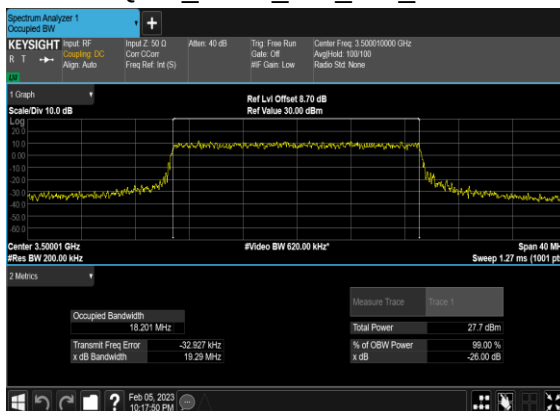


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

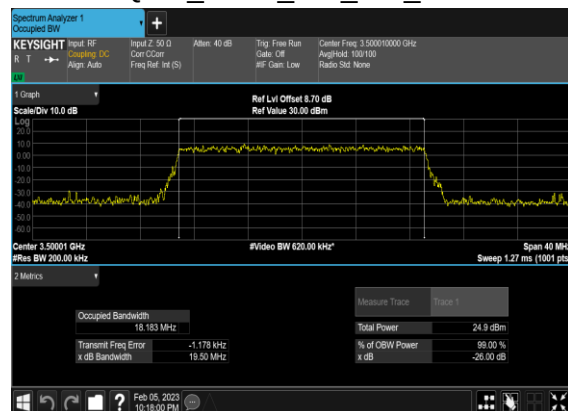


N77(30M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

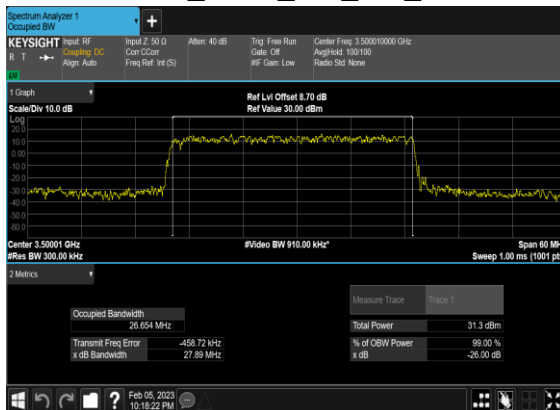


N77(30M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

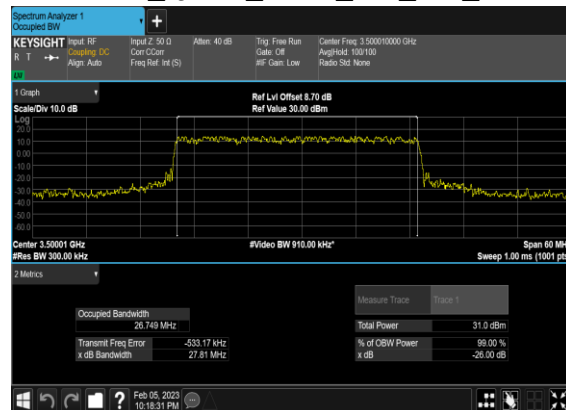


N77(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

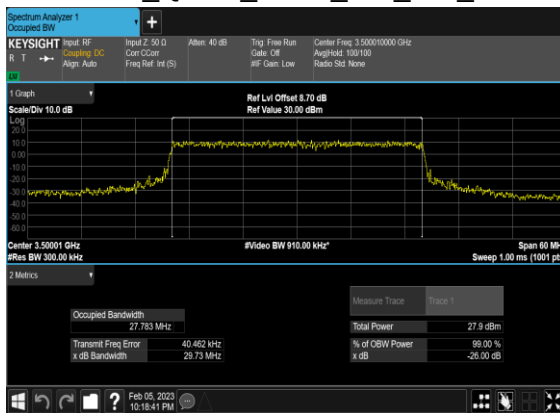


N77(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

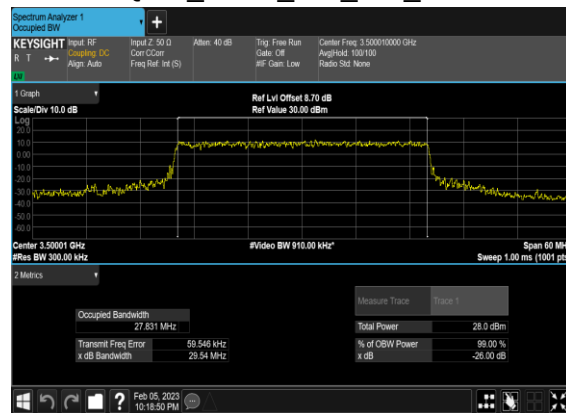


N77(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

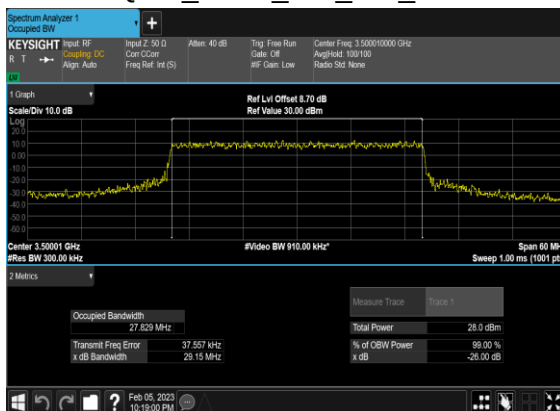


N77(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

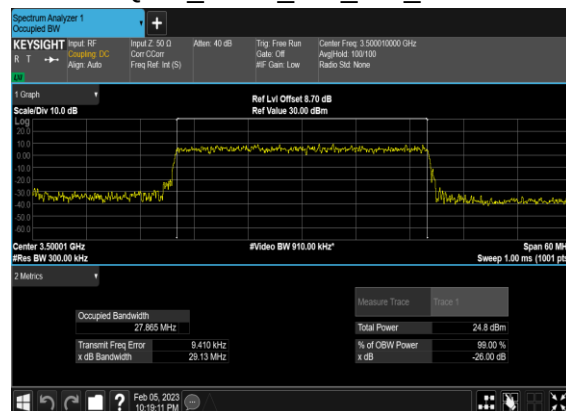


N77(40M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

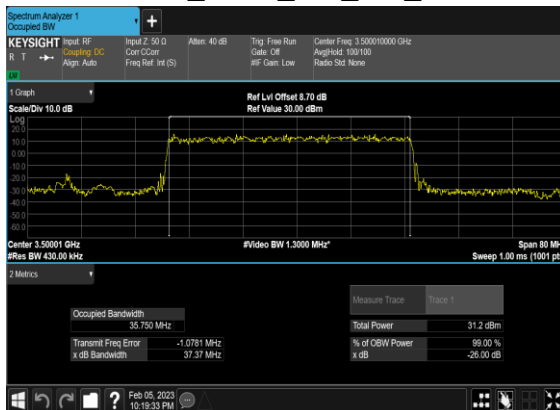


N77(40M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

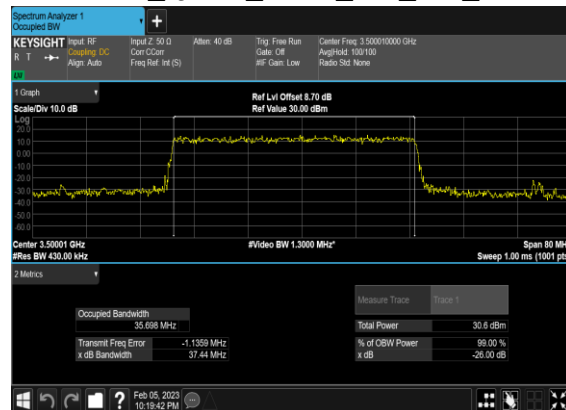


N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

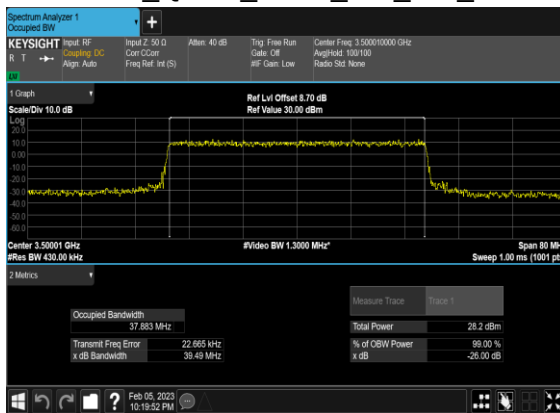


N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

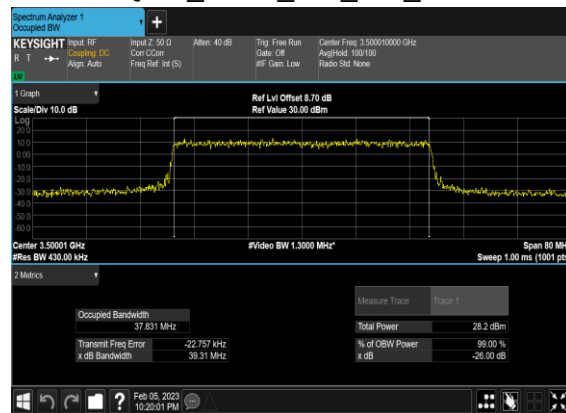


N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

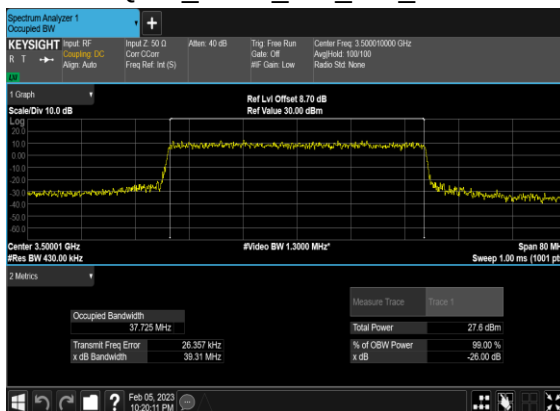


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

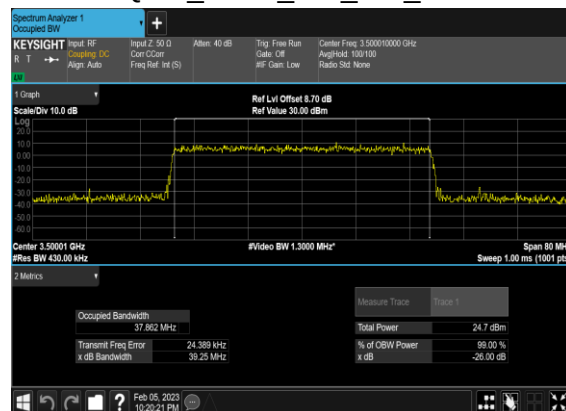


N77(50M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

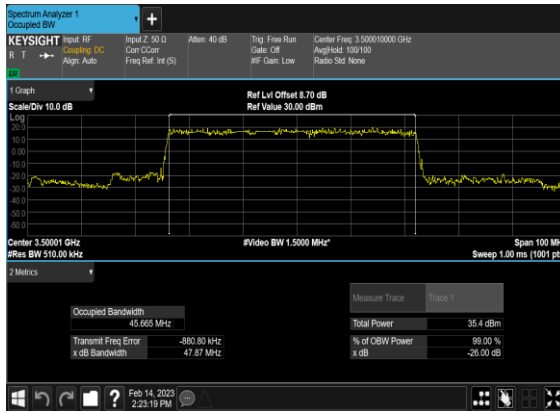


N77(50M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

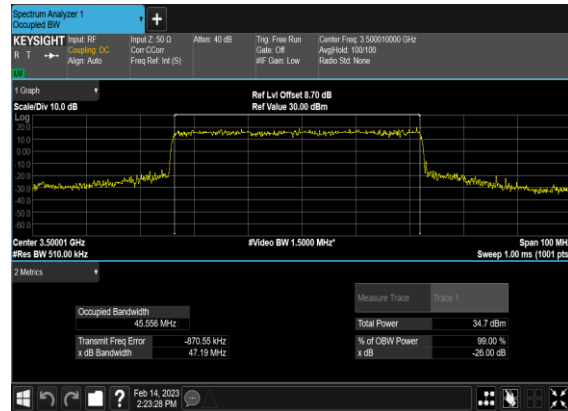


N77(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

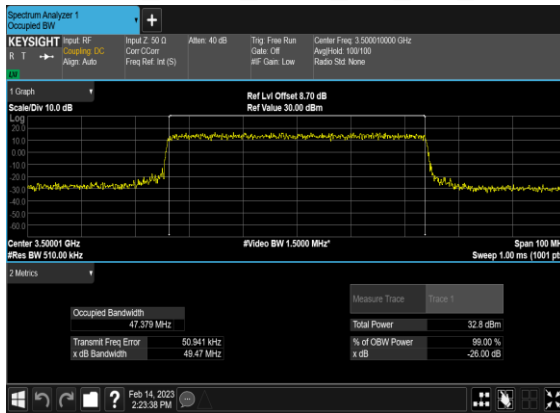


N77(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

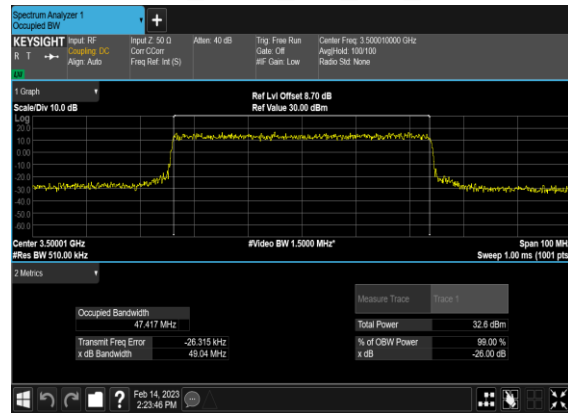


N77(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

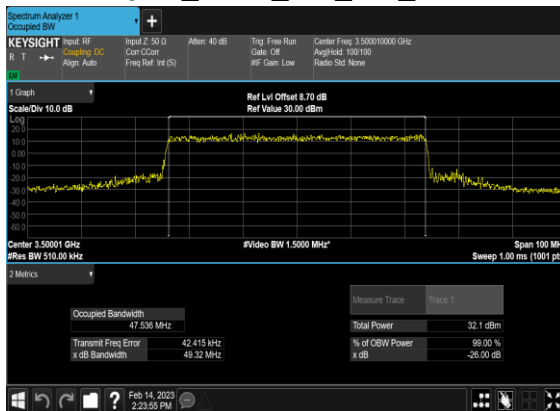


N77(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

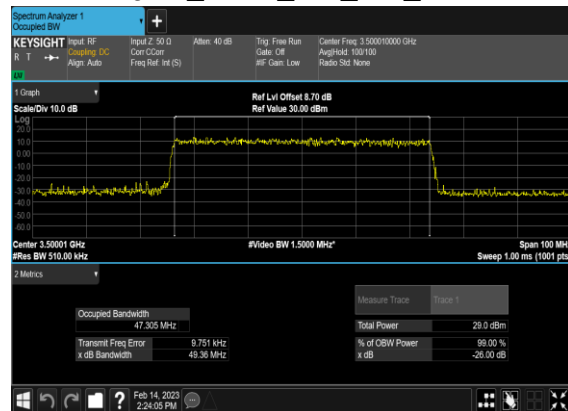


N77(60M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

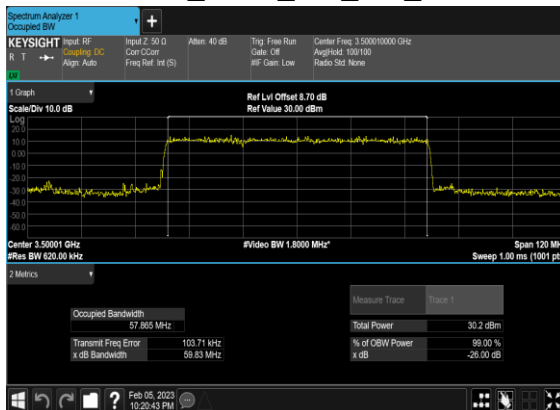


N77(60M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

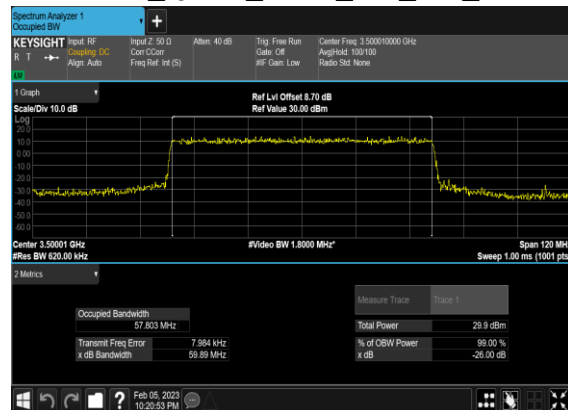


N77(60M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

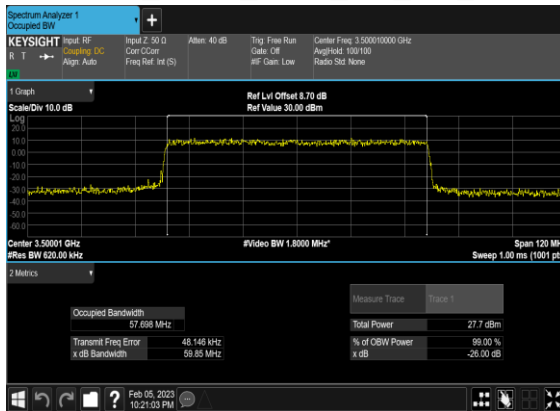


N77(60M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

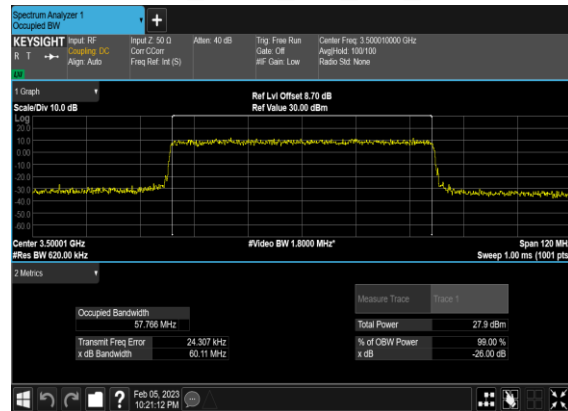


N77(60M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

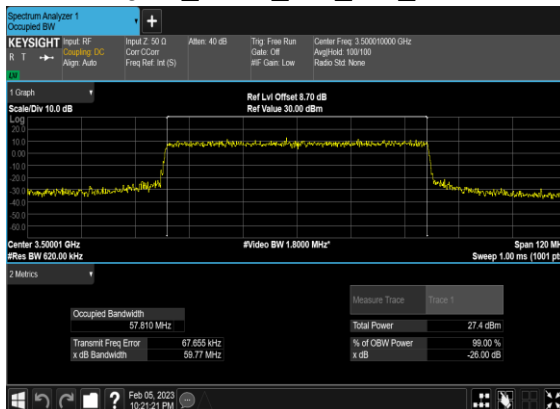


N77(60M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

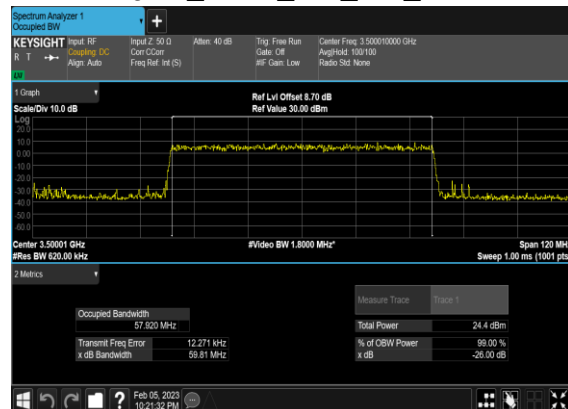


N77(80M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

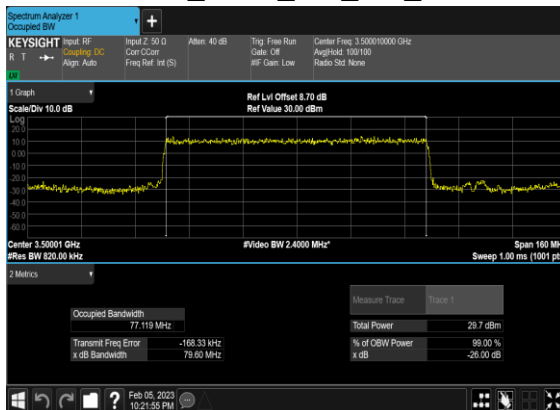


N77(80M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

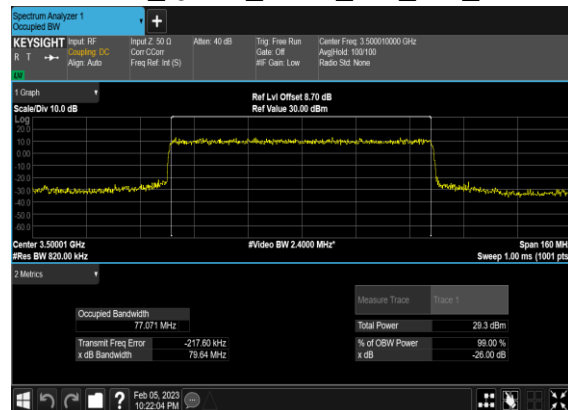


N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

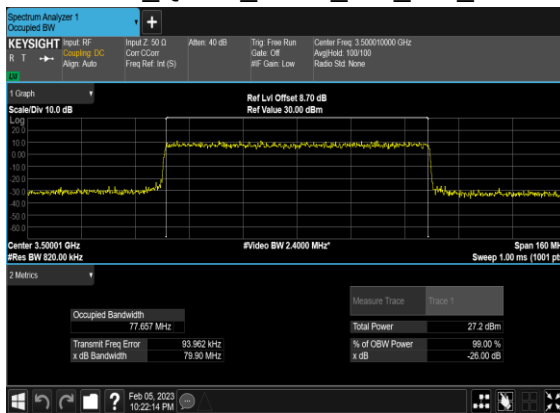


N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

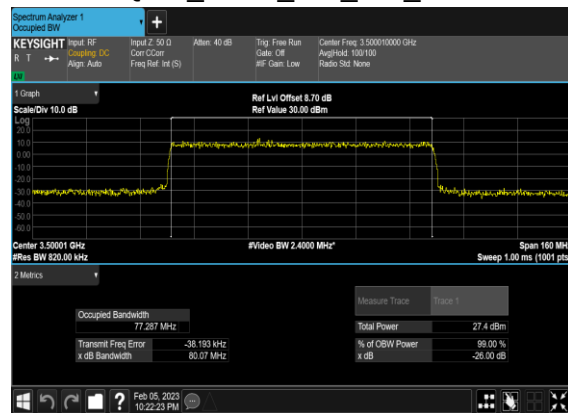


N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

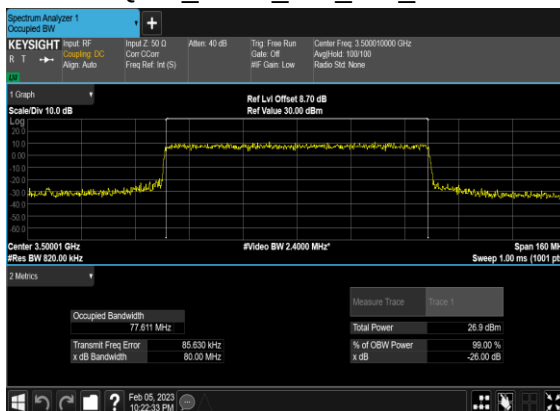


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

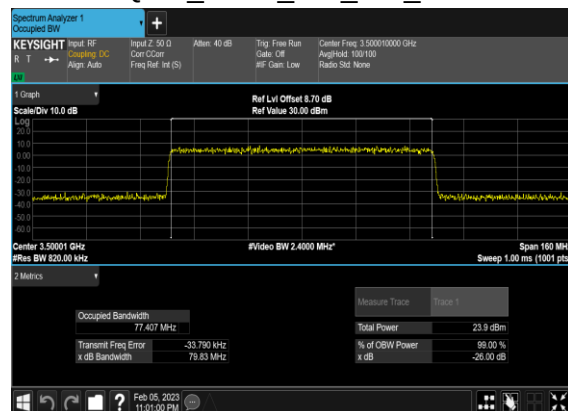


N77(90M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

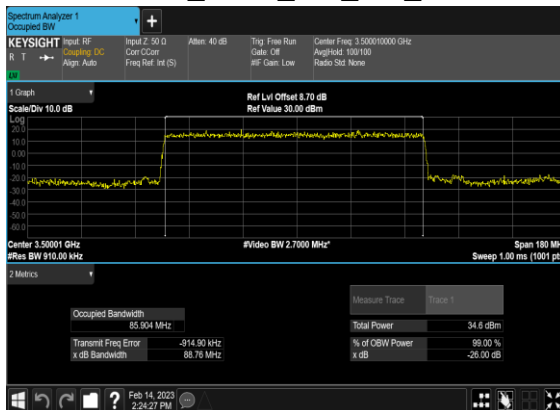


N77(90M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

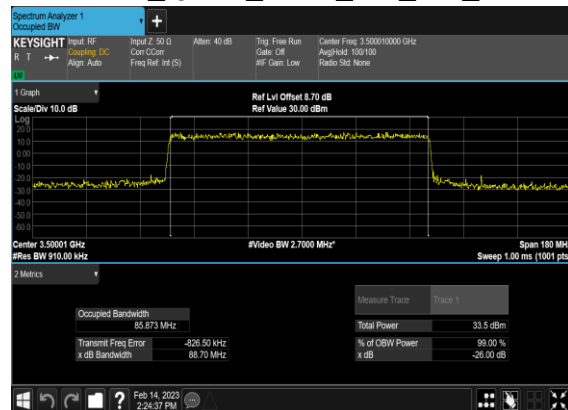


N77(90M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

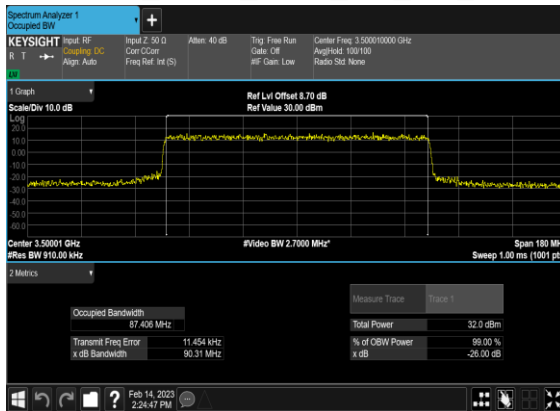


N77(90M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

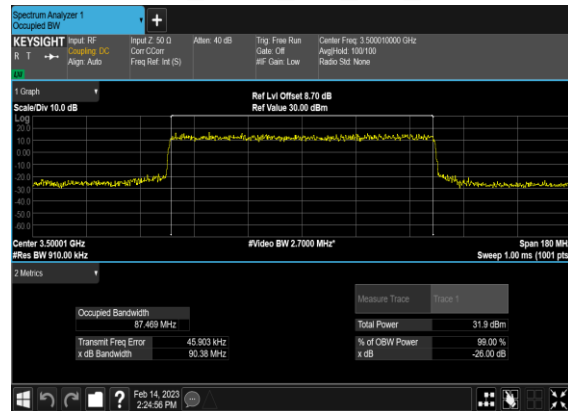


N77(90M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

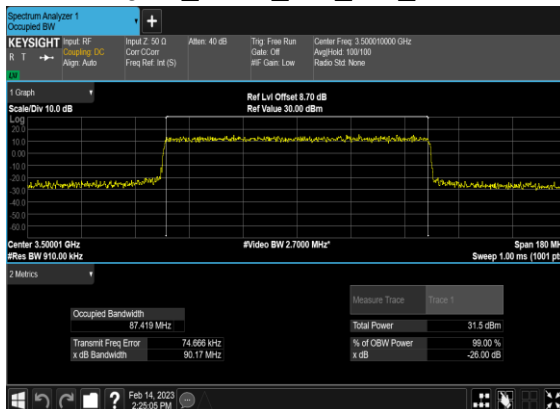


N77(90M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

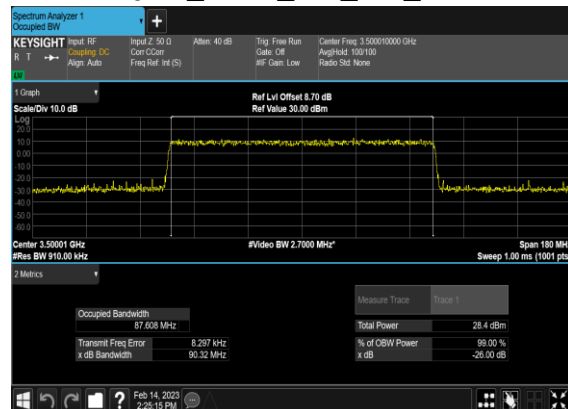


N77(100M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

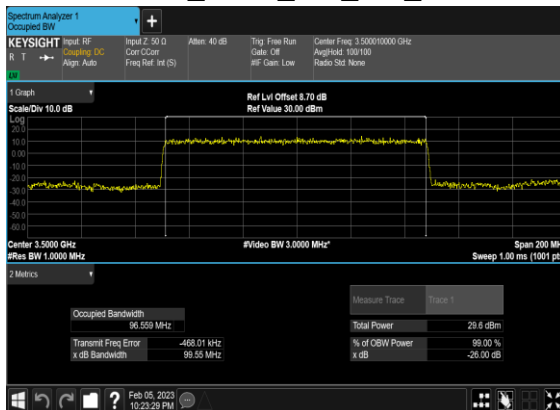


N77(100M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

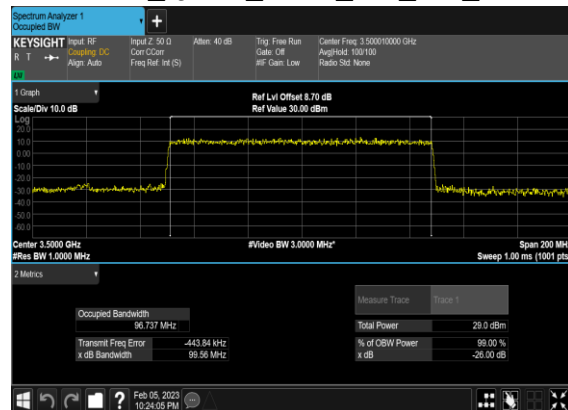


N77(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

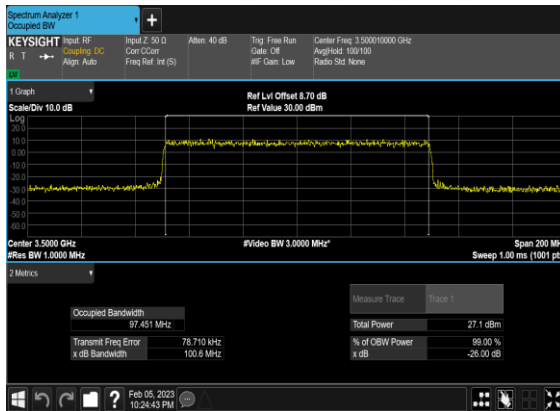


N77(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

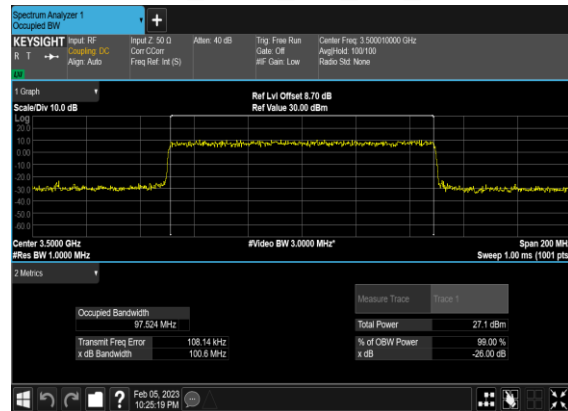

N77(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

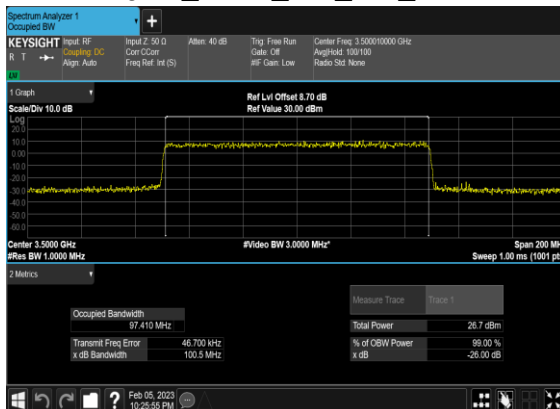

N77(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

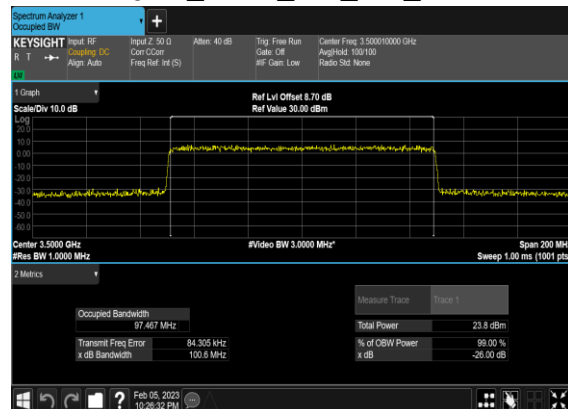


Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	---

77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

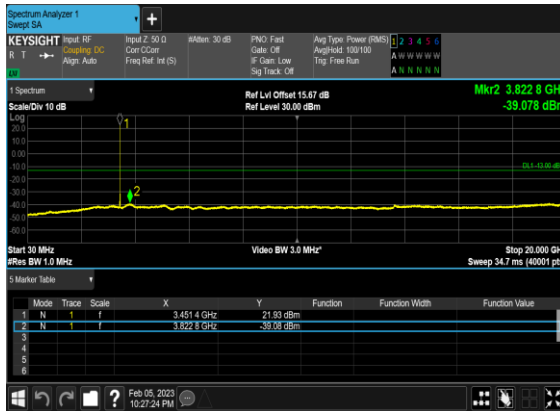


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

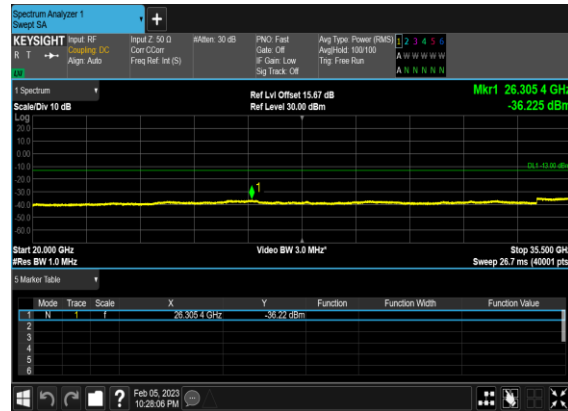


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

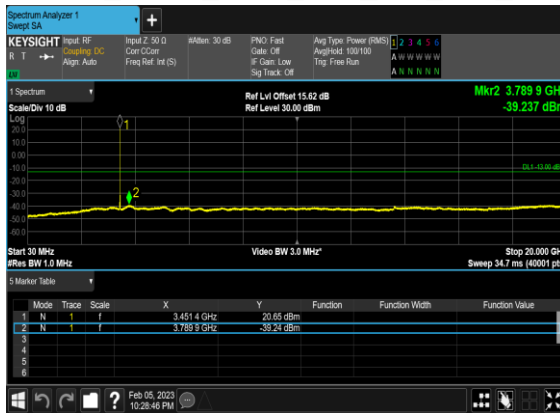


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

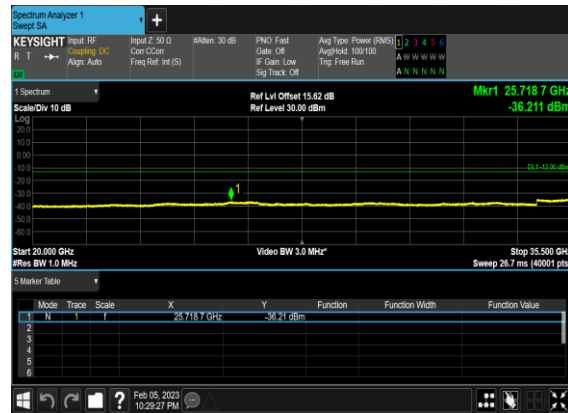


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

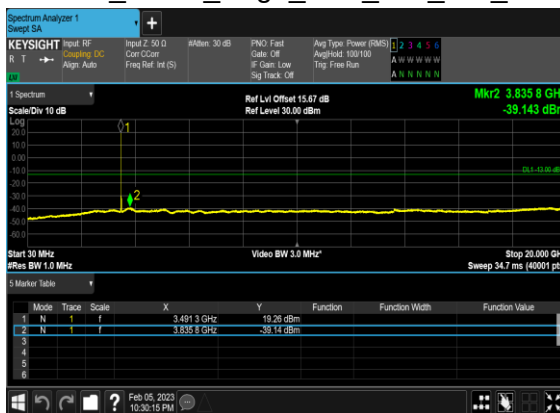


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

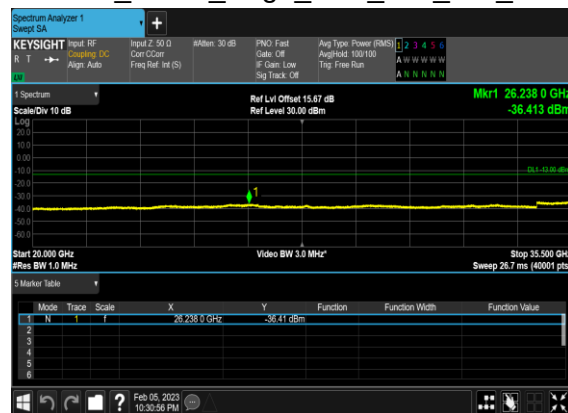


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

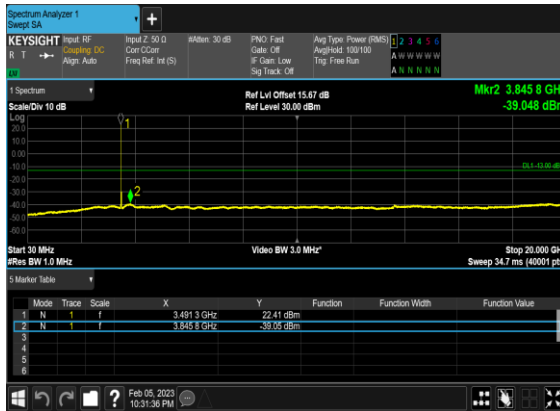


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

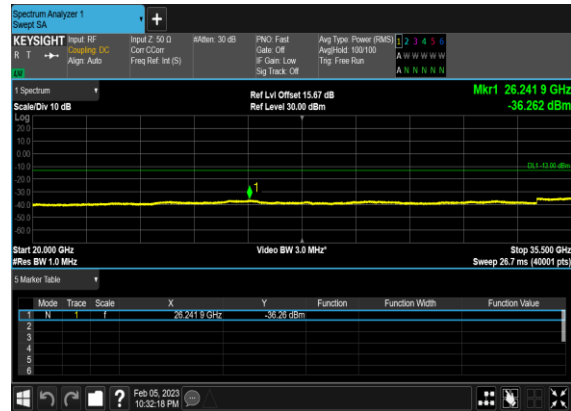


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

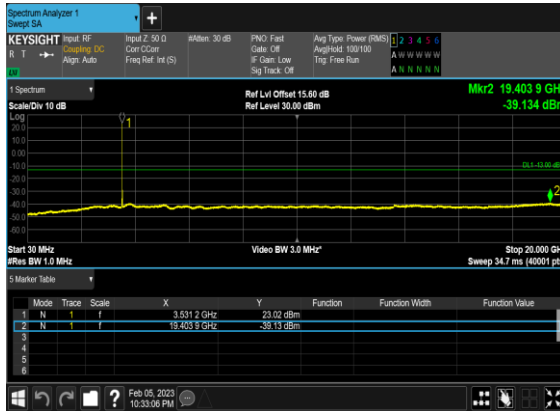


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

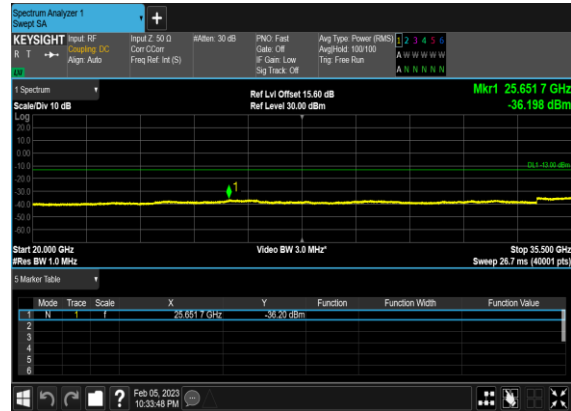


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

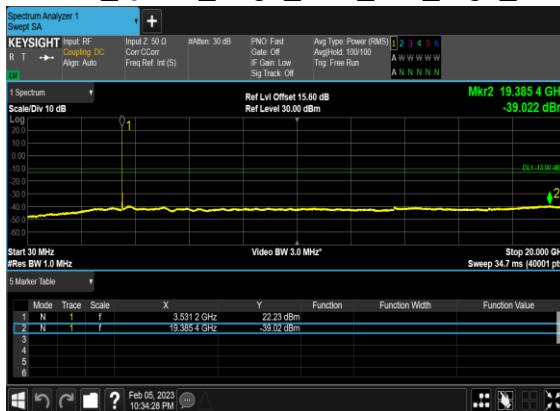


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

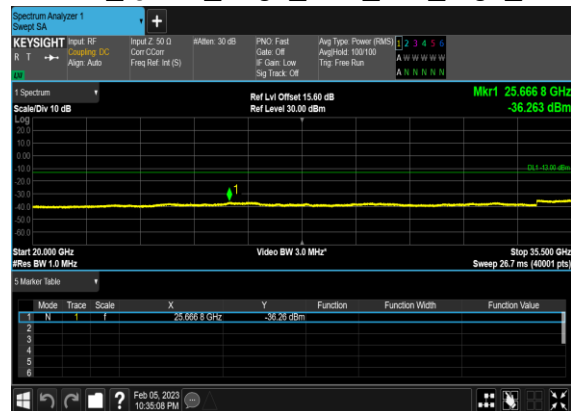


N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

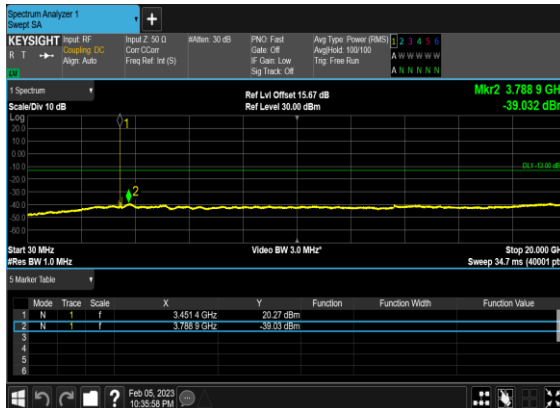


N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

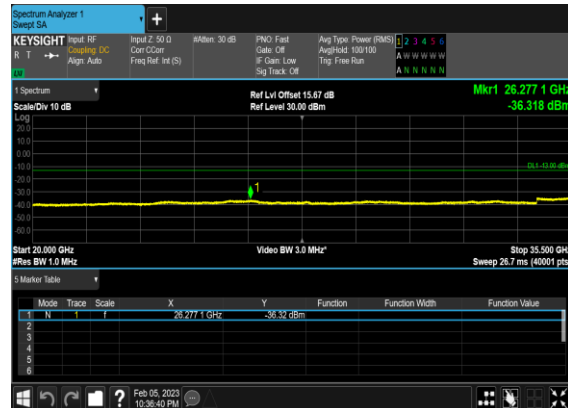

N77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

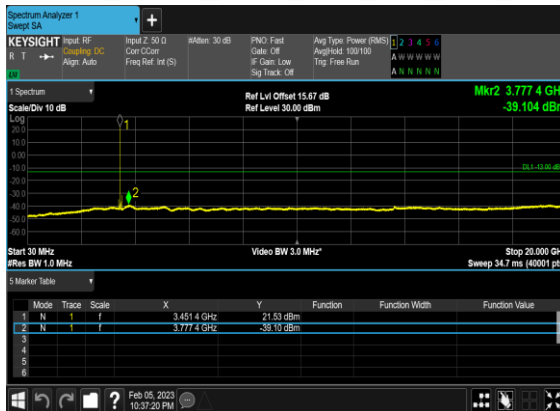


N77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

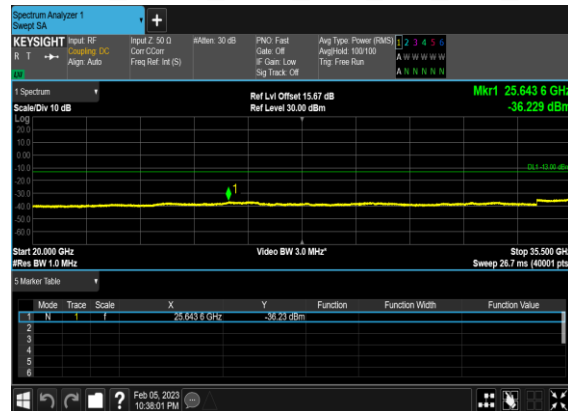


N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH




N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

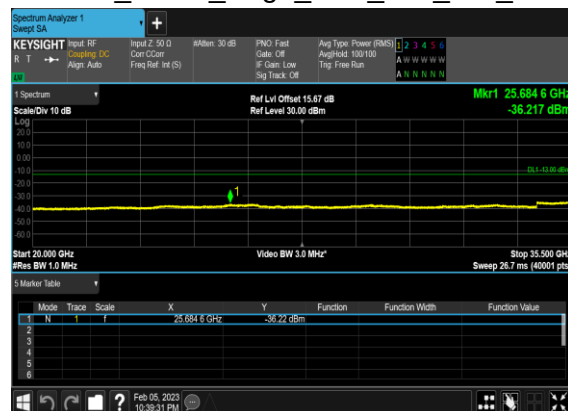


N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

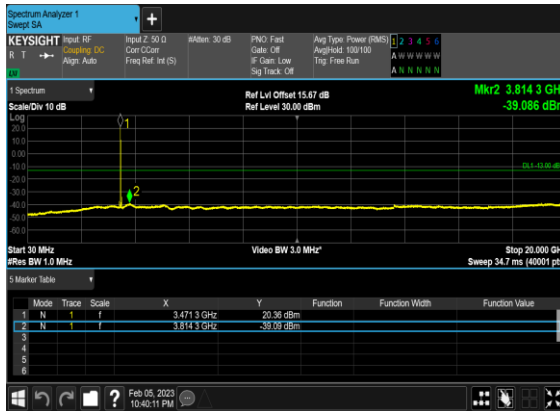

N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

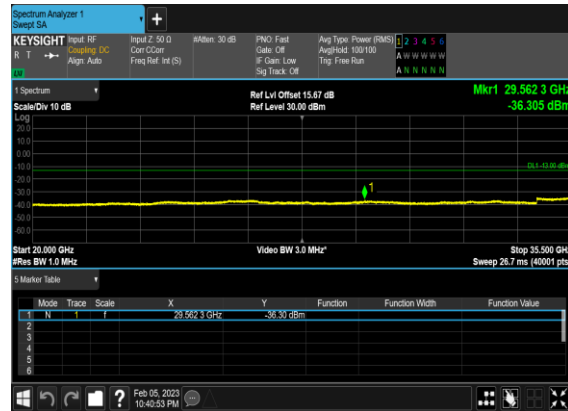


N77(60M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

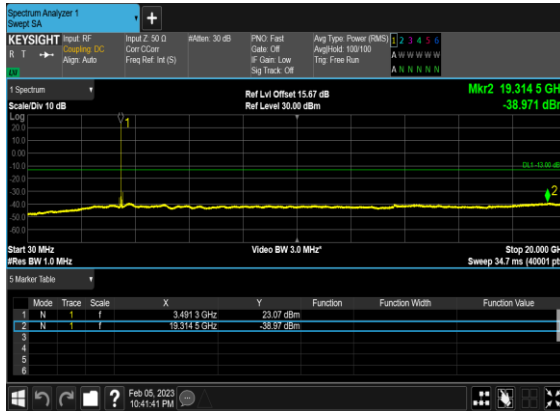

N77(60M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH



N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

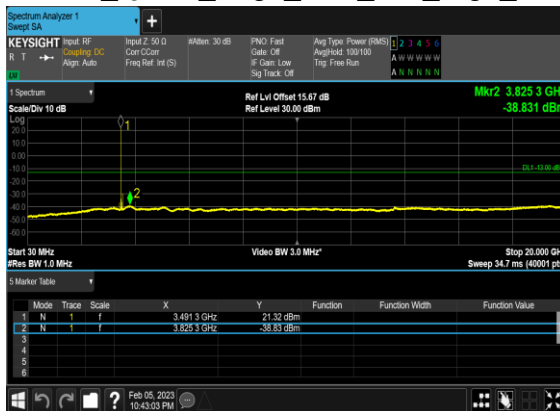

N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

