

THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT© 2024 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3804303	A01	As Shown

NOTE:

(1) THE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.

(2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.

(3) OTHERS: A CCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).

(4) MATERIAL:

A: 1.面材 (Code): 正永+Lexan 8010 polycarbonate film
2.表面處理 (Code): 霧油
3.膠性: 平膠
or equivalent material.(the material spec as same as Q-Form spec)

B. ADHESIVE: 3M-SP7533

C.THICKNESS: 0.125mm

D. RAW MATERIAL COLOR: Transparent



(5) INK COLOR: Black, Pantone Cool Gray 7U

(6) THERMAL TRANSFER RIBBON: N/A


(7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material, UL Code : CM-100-011

(8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.

(9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

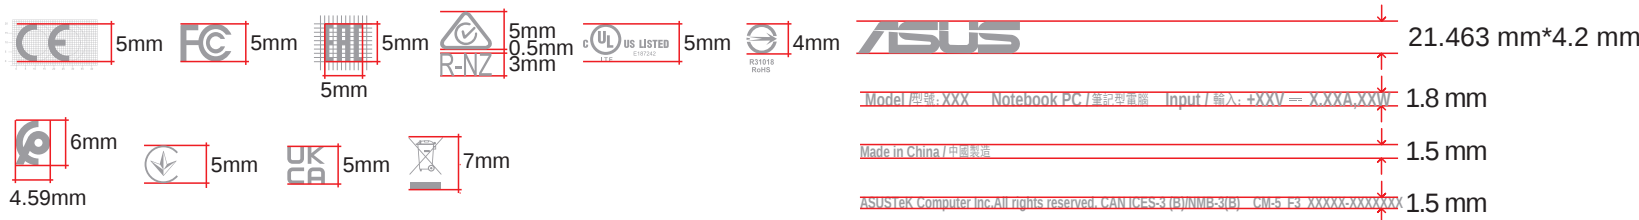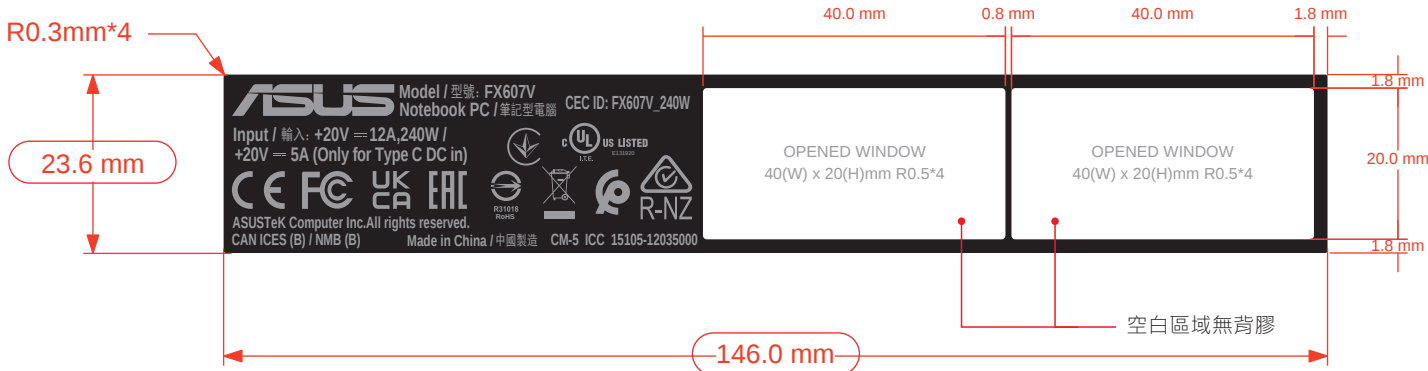

出標樣式

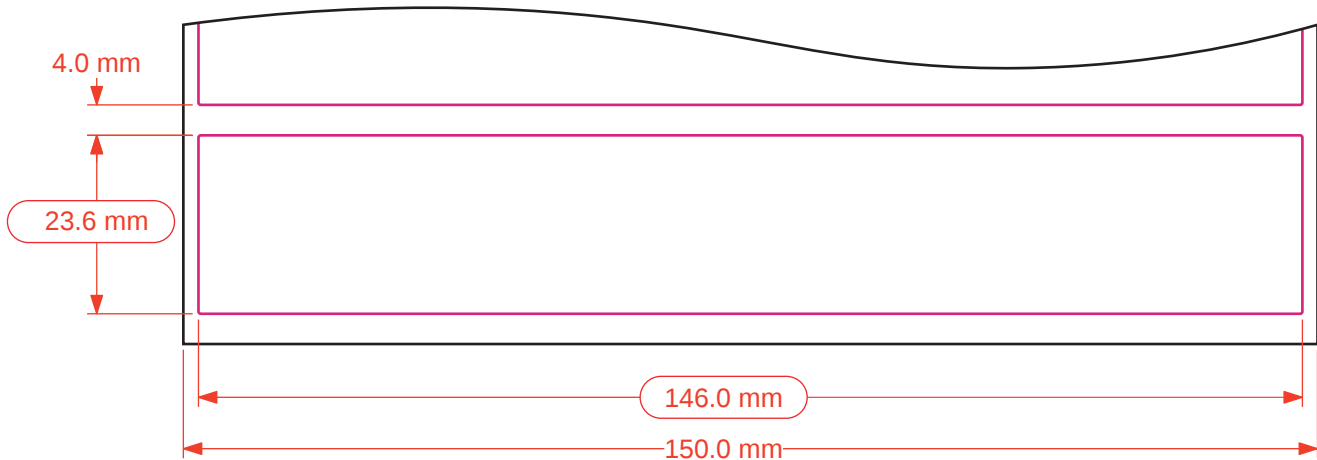

材 料	公 差
Label長寬	-0.4mm
Label面材+膠材	±0.02mm


測試規範

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles/sec 300 cycles	500g	5cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

Label Criteria						
勾 選	Paste Location	Glue Type	Paste method	Peel off method	Test Criteria	Remark
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不翹起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
✓	Cover	一般膠	食指推平	No	同上	
	Cover	R膠	食指推平	任一角以90°C	1. 不脫落 2. 不可殘膠 (輕微可用3M擦拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑 4. 如呈浮貼狀需可再貼回則為接受 5. 呈捲、曲、翹 狀則不予接受	

REVISION HISTORY		DOC	DATE
DESIGNER	CHANGE NO.	REV	dd/mm/yyyy
		A	

卷芯要有以下資訊



IEC PN ← 6060BXXXXXX
ASUS PN ← XXXXX-XXXXXXXX

離型紙後請印刷以下資訊

IEC PN 圖紙版本 廠商代碼
6060BXXXXXXXXX-V0-XXXX
Barcode內容同下方顯示文字
151XX-XXXXXXXX-XXXX
ASUS PN Vendor code(數字)



★注意：ASUS PN和Vendor code只能用“- ” 分開

MODEL FX607V				InventecCORPORATION CONFIDENTIAL			
DESIGNER Jady Chen			D:22	TITLE FX607V RATING LABEL (WO/3C)			
			M:08				
			Y:24				
MANAGER Jane Lee			D:22	DOCUMENT NUMBER			
			M:08				
			Y:24				
THIRD ANGLE PROJECTION DO NOT SCALE DRAWING		SIZE	CODE	NUMBER		REV	VER
		B	PS	6060-B38043-03-AI		A	0
		SCALE: 1:1		UNIT:mm		SHEET:10F1	
LINEAR				FILE NAME			
mm		X	X.X	X.XX	FX607V-I-rating_WO 3C_15105-12035000_6060B3804303		
INCH							


THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT© 2024 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3804304	A01	As Shown

- NOTE:
- (1) THE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS: A CCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
- A: 1.面材 (Code): 正永+Lexan 8010 polycarbonate film
2.表面處理 (Code): 霧油
3.膠性: 平膠
or equivalent material.(the material spec as same as Q-Form spec)
- B. ADHESIVE: 3M-SP7533
- C.THICKNESS: 0.125mm
- D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON: N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material, UL Code : CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

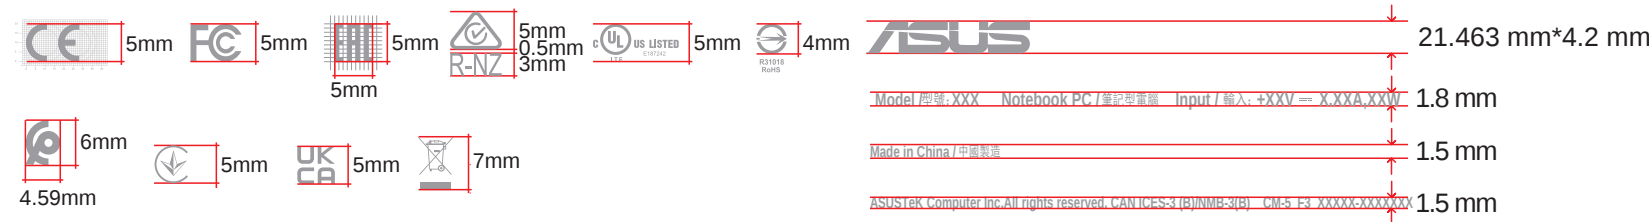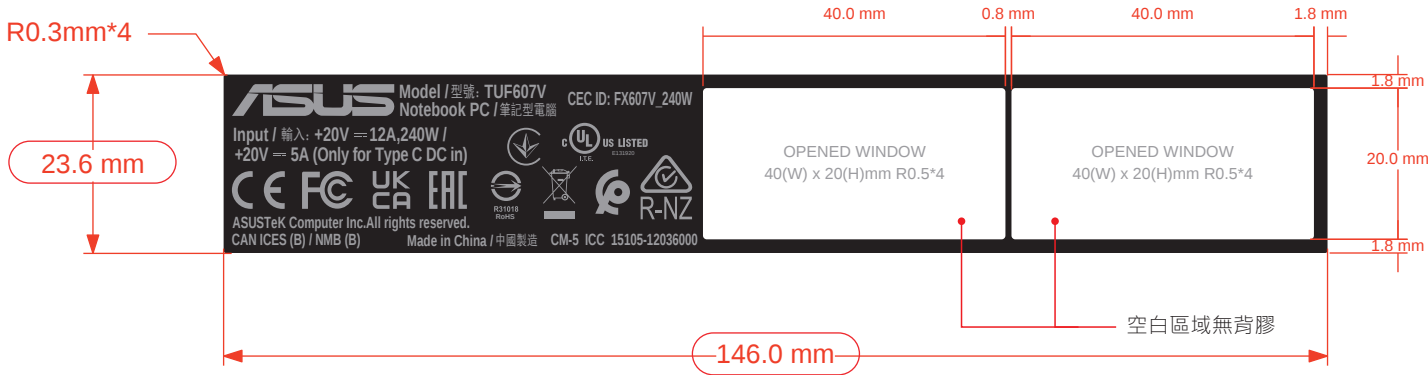

出標樣式

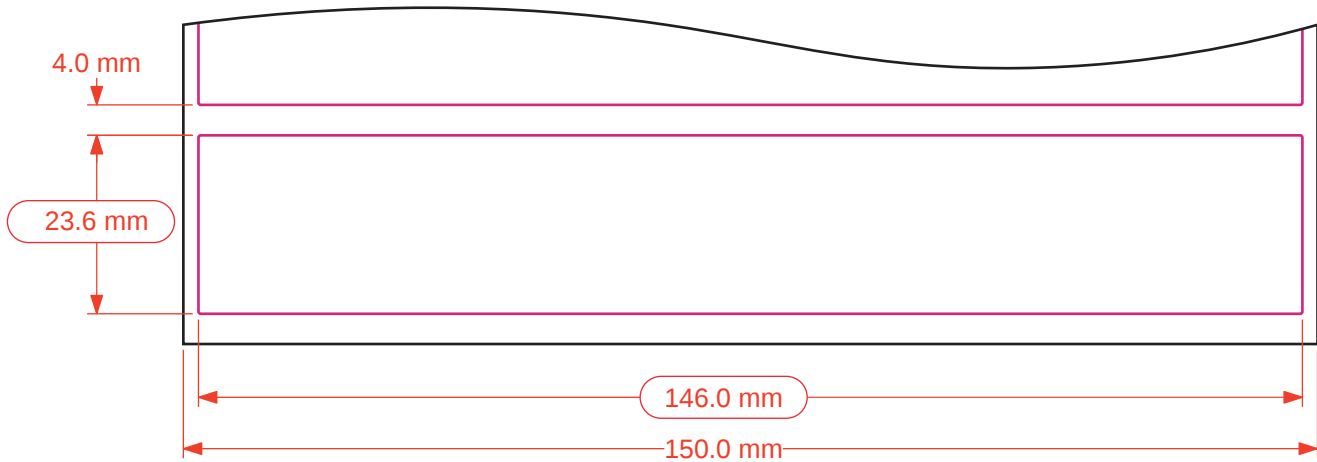

材 料	公 差
Label長寬	-0.4mm
Label面材+膠材	±0.02mm


測試規範

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles/sec 300 cycles	500g	5cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

Label Criteria						
勾 選	Paste Location	Glue Type	Paste method	Peel off method	Test Criteria	Remark
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不翹起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束 需靜置12hr
✓	Cover	一般膠	食指推平	No	同上	
	Cover	R膠	食指推平	任一角以90°C	1. 不脫落 2. 不可殘膠 (輕微可用3M擦拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑 4. 如呈浮貼狀需可再貼回則為接受 5. 呈捲、曲、翹 狀則不予接受	

REVISION HISTORY		DOC	DATE
DESIGNER	CHANGE NO.	REV	dd/mm/yyyy
		A	
		INITIAL	

卷芯要有以下資訊



IEC PN ← 6060BXXXXXX
ASUS PN ← XXXXX-XXXXXXXX

離型紙後請印刷以下資訊

IEC PN 圖紙版本 廠商代碼
6060BXXXXXXXXX-V0-XXXX
Barcode內容 同下方顯示文字
151XX-XXXXXXXX-XXXX
ASUS PN Vendor code(數字)

★注意：ASUS PN和Vendor code只能用“- ” 分開

MODEL TUF607V				InventecCORPORATION CONFIDENTIAL					
DESIGNER Jady Chen			D:03	TITLE TUF607V RATING LABEL (WO/3C)					
			M:09						
			Y:24						
MANAGER Jane Lee			D:09	DOCUMENT NUMBER					
			M:09						
			Y:24						
 THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SIZE	CODE	NUMBER		REV	VER
				B	PS	6060-B38043-04-AI		A	0
SCALE: 1:1		UNIT:mm		SHEET:10F1					
FILE NAME									
FX607V-I-rating_WO 3C_15105-12036000_6060B3804304									

THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT© 2024 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3804305	A01	As Shown

NOTE:

(1) THE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.

(2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.

(3) OTHERS: A CCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).

(4) MATERIAL:

A: 1.面材 (Code): 正永+Lexan 8010 polycarbonate film
2.表面處理 (Code): 霧油
3.膠性: 平膠
or equivalent material.(the material spec as same as Q-Form spec)

B. ADHESIVE: 3M-SP7533

C.THICKNESS: 0.125mm

D. RAW MATERIAL COLOR: Transparent



(5) INK COLOR: Black, Pantone Cool Gray 7U

(6) THERMAL TRANSFER RIBBON: N/A


(7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material, UL Code : CM-100-011

(8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.

(9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

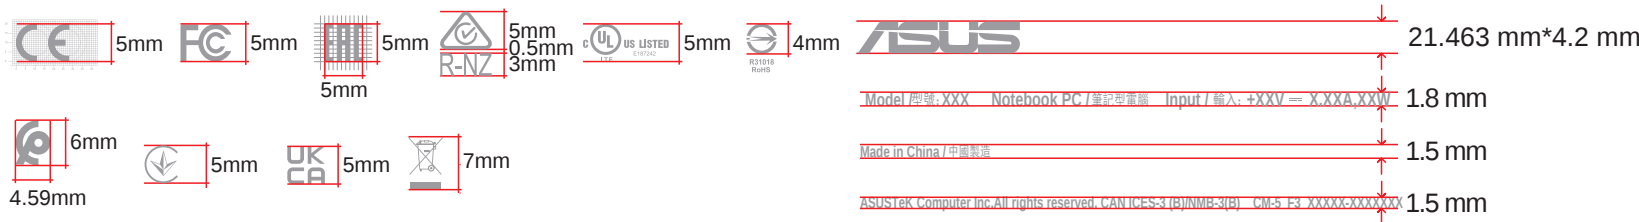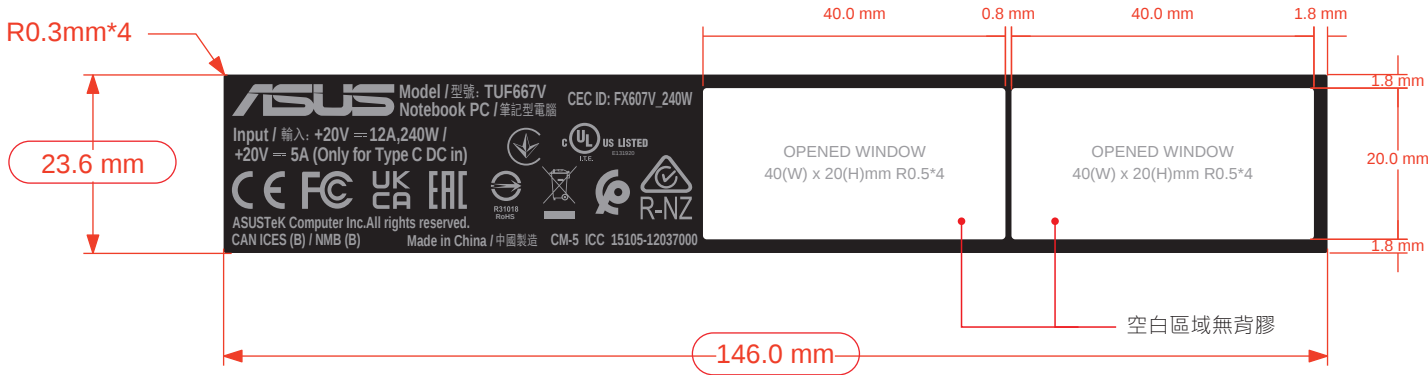

出標樣式

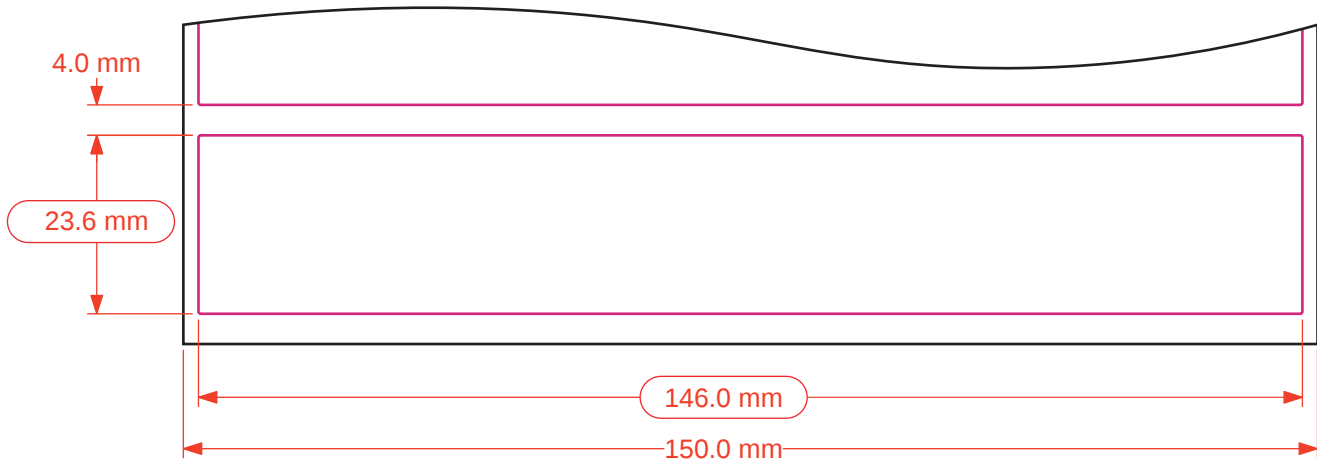

材 料	公 差
Label長寬	-0.4mm
Label面材+膠材	±0.02mm


測試規範

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles/sec 300 cycles	500g	5cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

Label Criteria						
勾 選	Paste Location	Glue Type	Paste method	Peel off method	Test Criteria	Remark
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不翹起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
✓	Cover	一般膠	食指推平	No	同上	
	Cover	R膠	食指推平	任一角以90°C	1. 不脫落 2. 不可殘膠 (輕微可用3M擦拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑 4. 如呈浮貼狀需可再貼回則為接受 5. 呈捲、曲、翹 狀則不予接受	

REVISION HISTORY		DOC	DATE
DESIGNER	CHANGE NO.	REV	dd/mm/yyyy
		INITIAL	A

卷芯要有以下資訊




IEC PN ← 6060BXXXXXX
ASUS PN ← XXXXX-XXXXXXXX

離型紙後請印刷以下資訊

IEC PN 圖紙版本 廠商代碼
6060BXXXXXXXXX-V0-XXXX
Barcode內容同下方顯示文字
151XX-XXXXXXXX-XXXX
ASUS PN Vendor code(數字)

★注意：ASUS PN和Vendor code只能用“- ” 分開

MODEL TUF667V				InventecCORPORATION CONFIDENTIAL					
DESIGNER Jady Chen			D:03	TITLE TUF667V RATING LABEL (WO/3C)					
			M:09						
MANAGER Jane Lee			Y:24						
			D:09						
			M:09	DOCUMENT NUMBER					
			Y:24	SIZE	CODE	NUMBER		REV	VER
 THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		B	PS	6060-B38043-04-AI		A	0
				SCALE: 1:1		UNIT:mm		SHEET:10F1	
				FILE NAME					
				FX607V-I-rating_WO 3C_15105-12037000_6060B3804305					
LINEAR	X	X.X	X.XX						
mm									
INCH									

