



THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3656702	A01	As Shown

- NOTE:
- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
- A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
- 2.表面處理 (Code):霧油
- 3.膠性：平膠
- or equivalent material.(the material spec as same as Q-Form spec)
- B.ADHESIVE: 3M-SP7533
- C.THICKNESS: 0.125mm
- D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
- AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

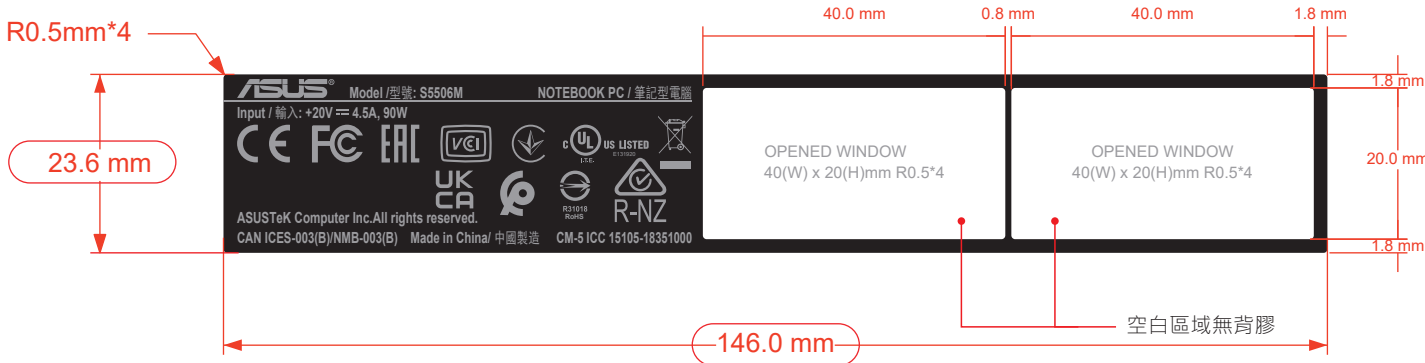

出標樣式

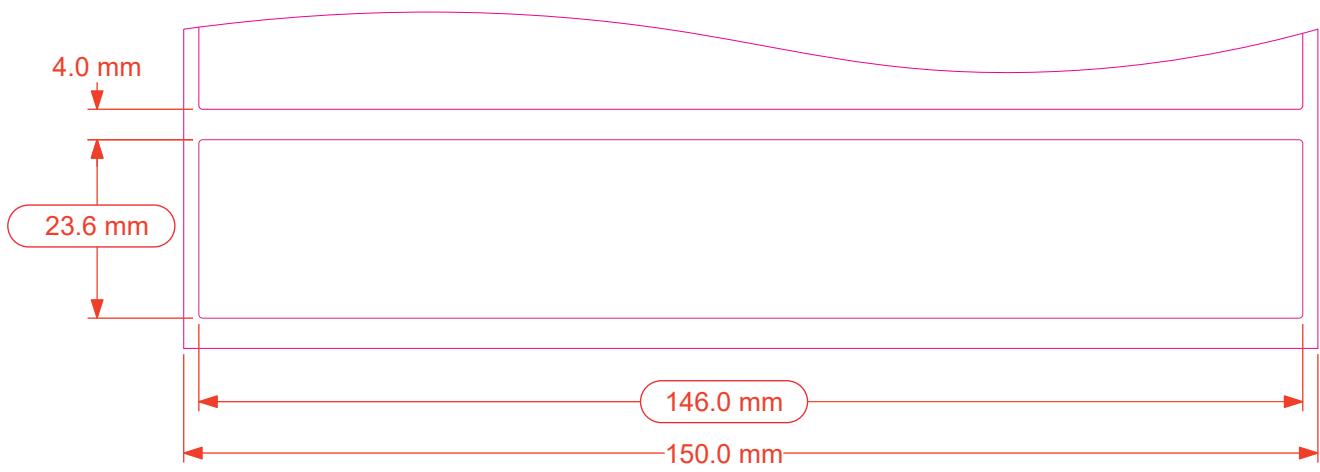

Output direction

測試規範


勾選	Label Criteria					Remark
	Paste Location	Glue method	Paste method	Peel off method	Test Criteria	
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
V		一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
	Cover	R 膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3.氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑 4. 如足浮貼狀態可再貼回則為接受 5. 呈摺、曲、龜裂則不予接受	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible


	公 差
材 料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm

REVISION HISTORY		DOC	DATE
DESIGNER	CHANGE NO.	REV	dd/mm/yyyy
	INITIAL	A	

卷芯要有以下資訊

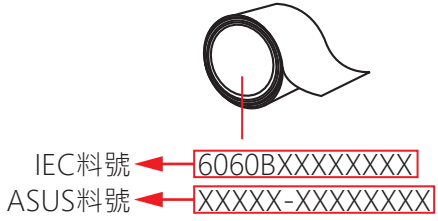

離型紙後請印刷以下資訊

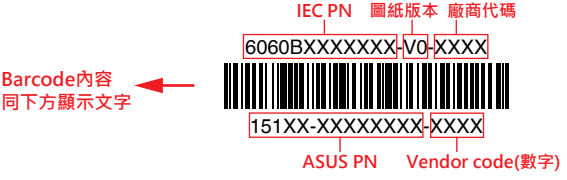


★注意：ASUS PN和Vendor code用英文半型“-”分開

MODEL S5506MA				Inventec CORPORATION CONFIDENTIAL			
DESIGNER Jane Chien			D:27	TITLE S5506M RATING LABEL (WO/3C+JP) V1.0 90W(S5506MA) DOCUMENT NUMBER			
			M:11				
			Y:23				
MANAGER Jane Lee			D:27	SIZECODENUMBERREVVER BPS6060-B36567-02-AIA0			
			M:11				
			Y:23				
 THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SCALE: 1:1UNIT:mmSHEET:10F1 FILE NAME S5506M-I-rating_WO3C_15105-18351000_6060B3656702			
LINEAR	X	X.X	X.XX				
mm							
INCH							


THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3657302	A01	As Shown

- NOTE:
- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
- A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
- 2.表面處理 (Code):霧油
- 3.膠性：平膠
- or equivalent material.(the material spec as same as Q-Form spec)
- B.ADHESIVE: 3M-SP7533
- C.THICKNESS: 0.125mm
- D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
- AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

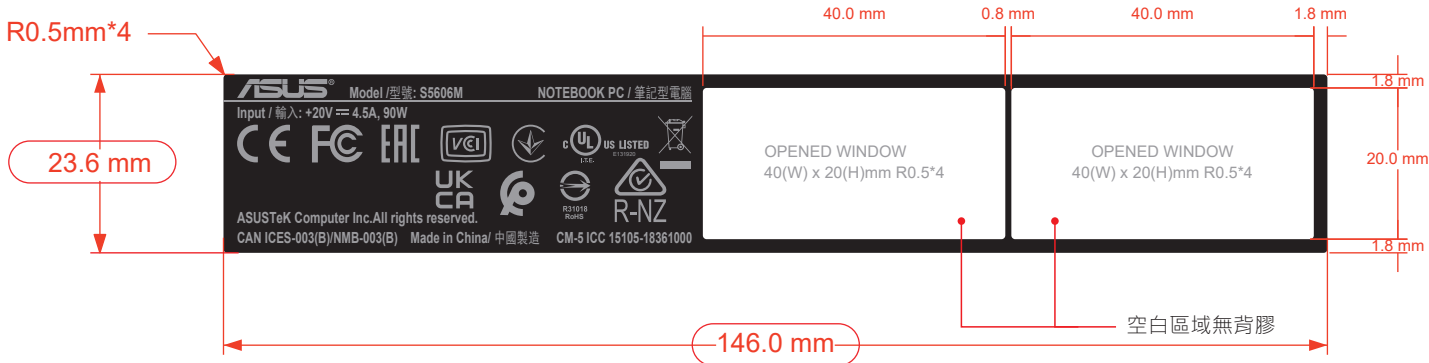

出標樣式

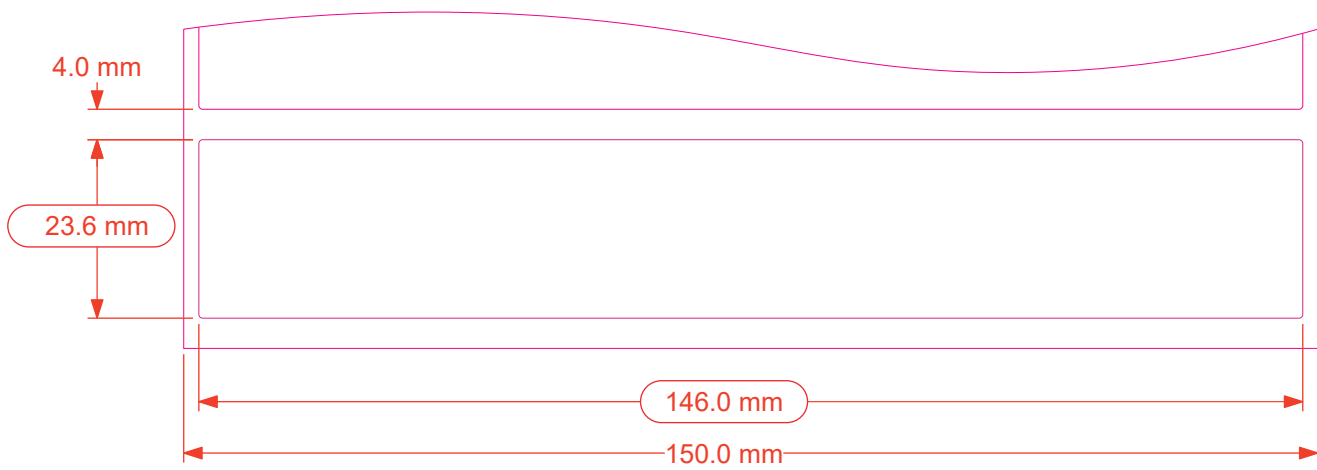

Output direction

測試規範


勾選	Label Criteria				Test Criteria	Remark
	Paste Location	Glue method	Paste method	Peel off method		
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
V		一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
	Cover	R 膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑 4. 如足浮貼狀態可再貼回則為接受 5. 呈摺、曲、鬆 軟則不予接受	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible


公差
Dimension
Label長寬
-0.4mm
Label面材+膠材
±0.02mm

REVISION HISTORY		DOC	DATE
DESIGNER	CHANGE NO.	REV	dd/mm/yyyy
		INITIAL	A

卷芯要有以下資訊

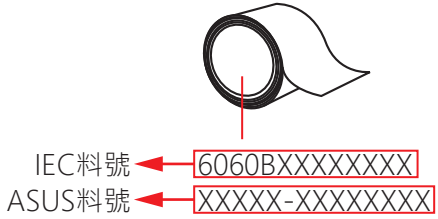

離型紙後請印刷以下資訊

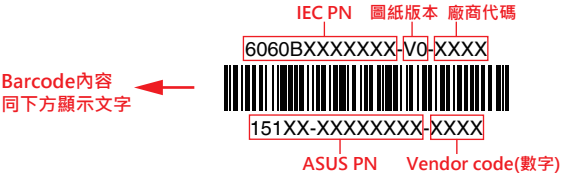


★注意：ASUS PN和Vendor code用英文半型“-”分開

MODEL S5606MA				InventecCORPORATION CONFIDENTIAL			
DESIGNER Jane Chien		D:27		TITLE S5606M RATING LABEL (WO/3C+JP) V1.0 90W(S5606MA) DOCUMENT NUMBER			
		M:11					
		Y:23					
MANAGER Jane Lee		D:27		SIZECODENUMBERREVVER BPS6060-B36573-02-AIA0			
		M:11					
		Y:23					
 THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SCALE: 1:1UNIT:mmSHEET:10F1			
LINEAR	X	X.X	X.XX	FILE NAME			
mm				S5606M-I-rating_W 3C_15105-18361000_6060B3657302			
INCH							


THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3656704	A01	As Shown

- NOTE:
- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
- A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
- 2.表面處理 (Code):霧油
- 3.膠性：平膠
- or equivalent material.(the material spec as same as Q-Form spec)
- B.ADHESIVE: 3M-SP7533
- C.THICKNESS: 0.125mm
- D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
- AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

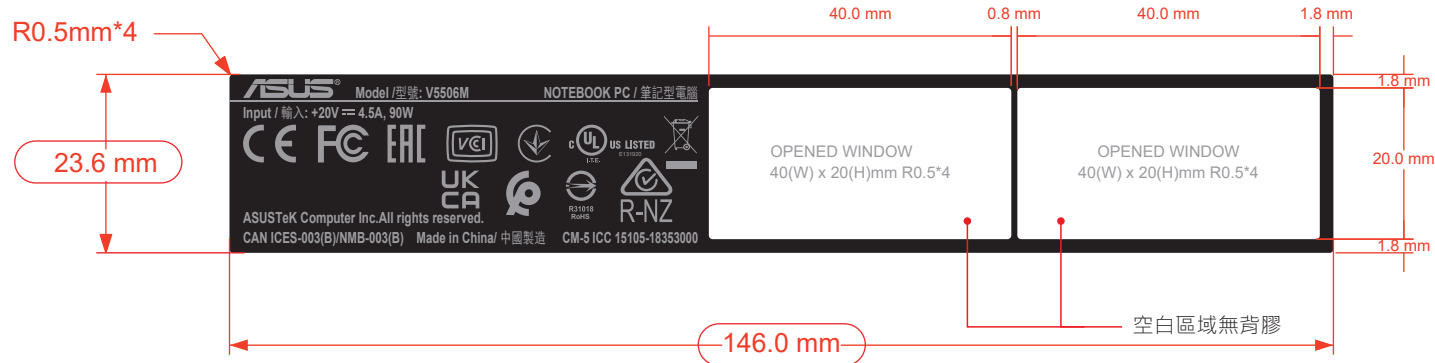

出標樣式

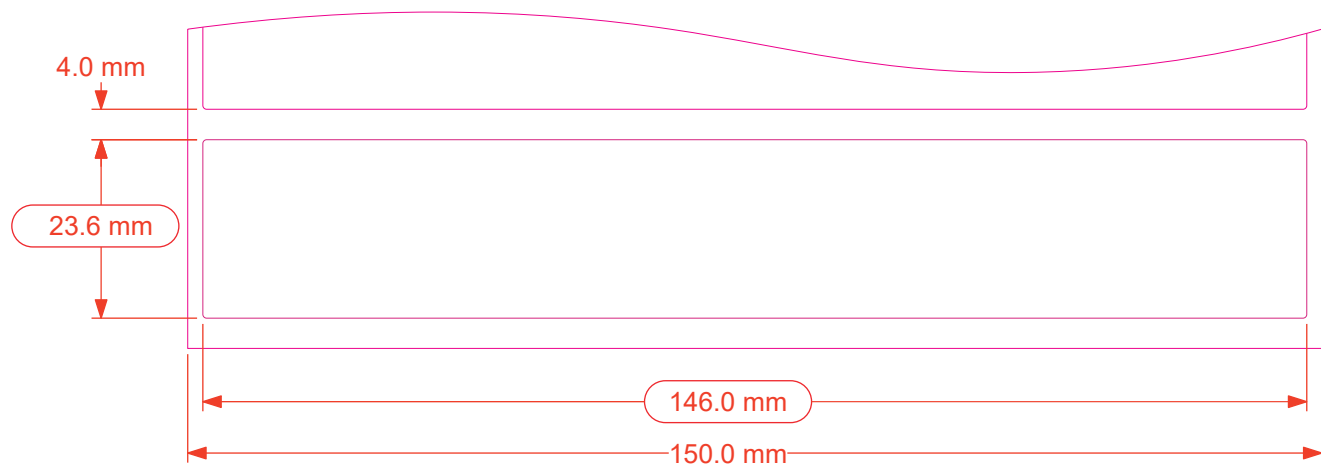

Output direction

測試規範


勾選	Label Criteria				Test Criteria	Remark
	Paste Location	Glue method	Paste method	Peel off method		
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
V		一般膠	食指推平	No	1. 不脫落 2. 不龜起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
	Cover	R 膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3.氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑 4. 如足浮貼狀態可再貼回則為接受 5. 呈摺、曲、鬆 軟則不予接受	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

	公差
材 料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm


REVISION HISTORY		DOC	DATE
DESIGNER	CHANGE NO.	REV	dd/mm/yyyy
	INITIAL	A	

卷芯要有以下資訊



IEC料號 ← 6060BXXXXXXXXX
ASUS料號 ← XXXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊

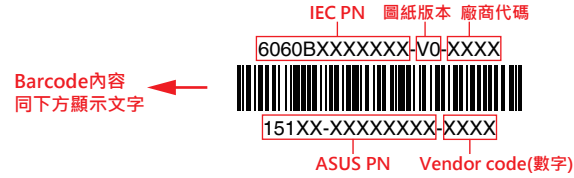



★注意：ASUS PN和Vendor code用英文半型“-”分開

MODEL S5506MA				InventecCORPORATION CONFIDENTIAL						
DESIGNER Jane Chien			D:27 M:11 Y:23	TITLE V5506M RATING LABEL (WO/3C+JP) V1.0 90W(S5506MA) DOCUMENT NUMBER						
MANAGER Jane Lee			D:27 M:11 Y:23							
		THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SIZE B	CODE PS	NUMBER 6060-B36567-04-AI	REV A	VER 0
LINEAR mm	X	X.X	X.XX	SCALE: 1:1		UNIT:mm		SHEET:10F1		
INCH				FILE NAME K5506M-l-rating_WO3C_15105-18353000_6060B3656704						

THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2022 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3657304	A01	As Shown

- NOTE:
- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
- A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
- 2.表面處理 (Code):霧油
- 3.膠性：平膠
- or equivalent material.(the material spec as same as Q-Form spec)
- B.ADHESIVE: 3M-SP7533
- C.THICKNESS: 0.125mm
- D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
- AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

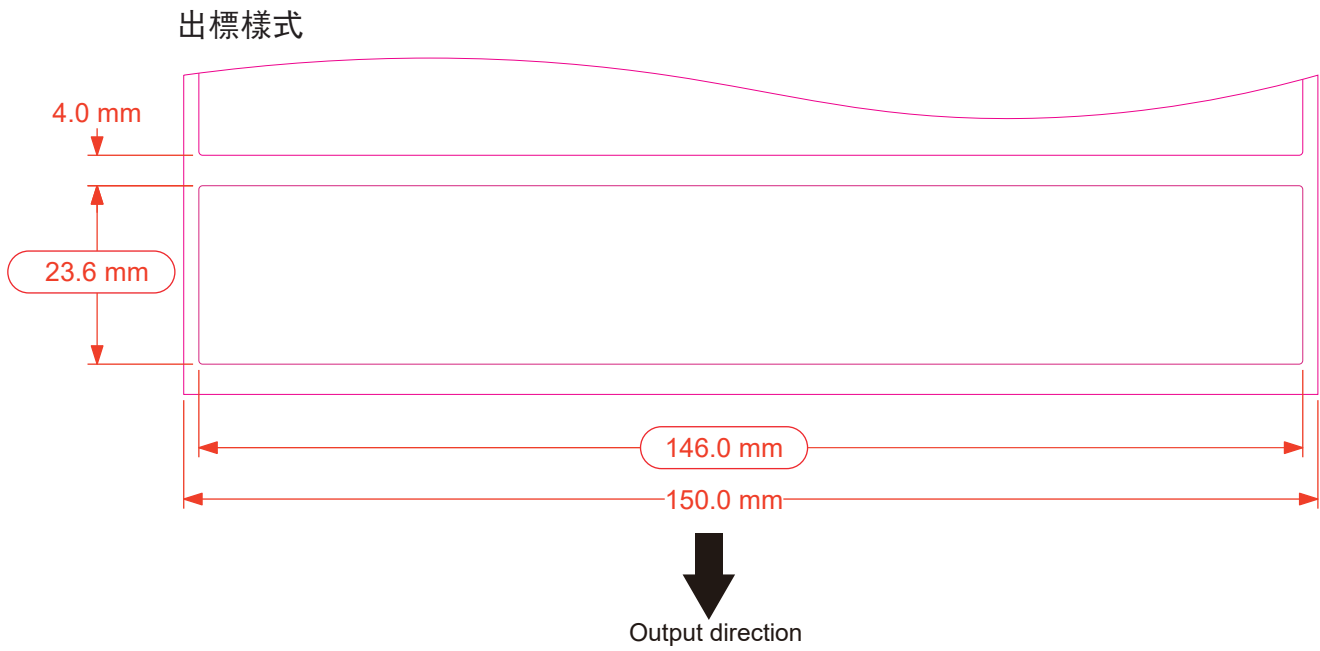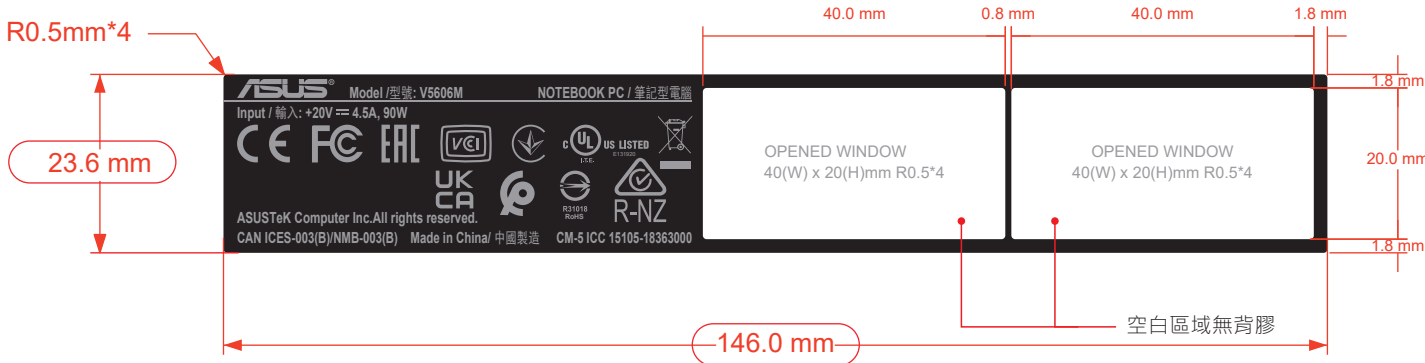


測試規範

勾選	Label Criteria				Test Criteria	Remark
	Paste Location	Glue method	Paste method	Peel off method		
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
V		一般膠	食指推平	No	1. 不脫落 2. 不龜起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
	Cover	R 膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3.氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑 4. 如足浮貼狀態可再貼回則為接受 5. 呈摺、曲、鬆 軟則不予接受	


橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

REVISION HISTORY		DOC	DATE
DESIGNER	CHANGE NO.	REV	dd/mm/yyyy
	INITIAL	A	

卷芯要有以下資訊

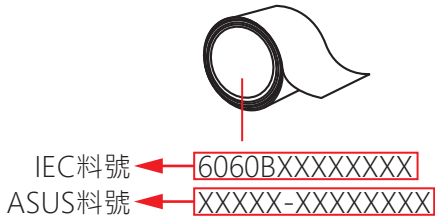

離型紙後請印刷以下資訊

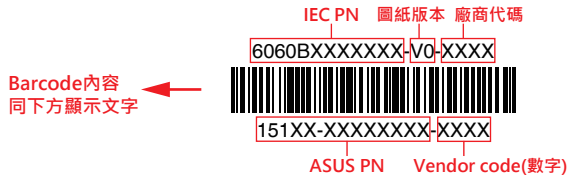


★注意：ASUS PN和Vendor code用英文半型“-”分開

MODEL S5606MA				InventecCORPORATION CONFIDENTIAL			
DESIGNER Jane Chien			D:28	TITLE V5606M RATING LABEL (WO/3C+JP) V1.0 90W(S5606MA) DOCUMENT NUMBER			
			M:11				
			Y:23				
MANAGER Jane Lee			D:28	SIZECODENUMBERREVVER BPS6060-B36573-04-AIA0			
			M:11				
			Y:23				
 THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SCALE: 1:1UNIT:mmSHEET:10F1			
LINEAR	X	X.X	X.XX	FILE NAME			
mm				V5606M-I-rating_WO3C_15105-18363000_6060B3657304			
INCH							


THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3656703	A01	As Shown

- NOTE:
- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
- A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
- 2.表面處理 (Code):霧油
- 3.膠性：平膠
- or equivalent material.(the material spec as same as Q-Form spec)
- B.ADHESIVE: 3M-SP7533
- C.THICKNESS: 0.125mm
- D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
- AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

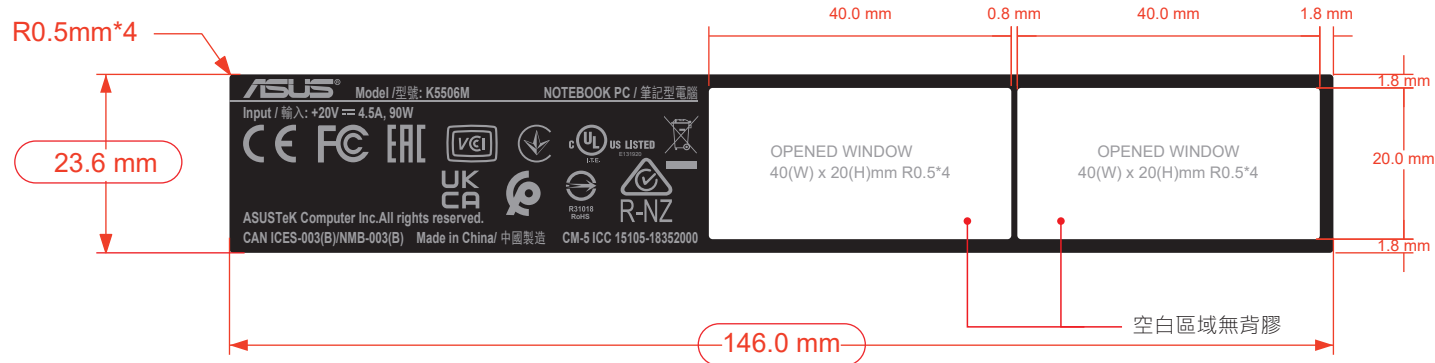

出標樣式

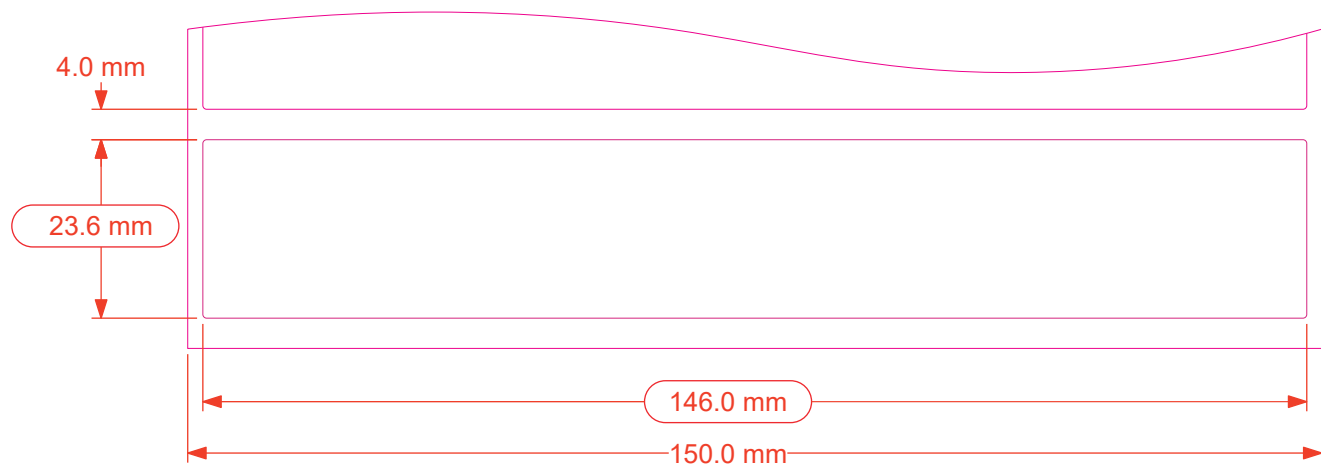

Output direction

測試規範


勾選	Label Criteria				Test Criteria	Remark
	Paste Location	Glue method	Paste method	Peel off method		
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
V		一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
	Cover	R 膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3.氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑 4. 如足浮貼狀態可再貼回則為接受 5. 呈摺、曲、鬆 軟則不予接受	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

公差
Dimension
Label長寬
-0.4mm
Label面材+膠材
±0.02mm


REVISION HISTORY		DOC	DATE
DESIGNER	CHANGE NO.	REV	dd/mm/yyyy
		INITIAL	A

卷芯要有以下資訊



IEC料號 6060BXXXXXXXXX
ASUS料號 XXXXXX-XXXXXXXXX

離型紙後請印刷以下資訊

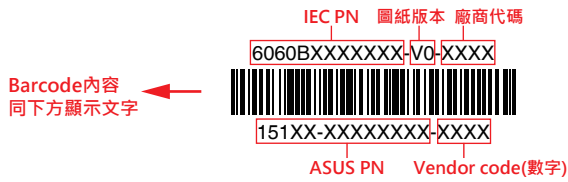


★注意：ASUS PN和Vendor code用英文半型“-”分開

MODEL S5506MA		Inventec CORPORATION			
DESIGNER Jane Chien		D:27 M:11 Y:23		TITLE K5506M RATING LABEL (WO/3C+JP) V1.0 90W(S5506MA)	
MANAGER Jane Lee		D:27 M:11 Y:23		DOCUMENT NUMBER	
THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SIZE CODE	REV VER
B PS		NUMBER 6060-B36567-03-AI		A	0
SCALE: 1:1		UNIT:mm		SHEET:10F1	
LINEAR mm		X X.X X.XX		FILE NAME	
INCH				K5506M-I-rating_WO3C_15105-18352000_6060B3656703	


THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3657303	A01	As Shown

- NOTE:
- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
- A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
- 2.表面處理 (Code):霧油
- 3.膠性：平膠
- or equivalent material.(the material spec as same as Q-Form spec)
- B.ADHESIVE: 3M-SP7533
- C.THICKNESS: 0.125mm
- D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
- AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

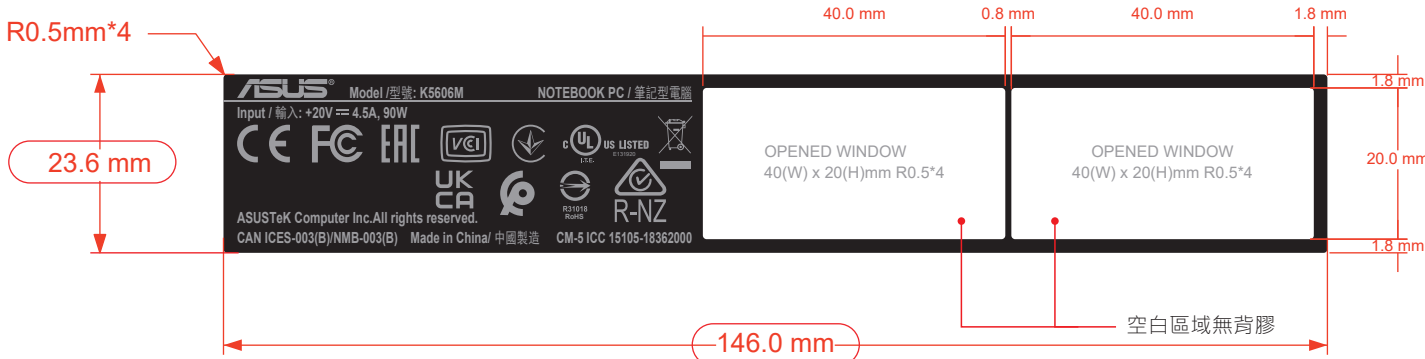

出標樣式

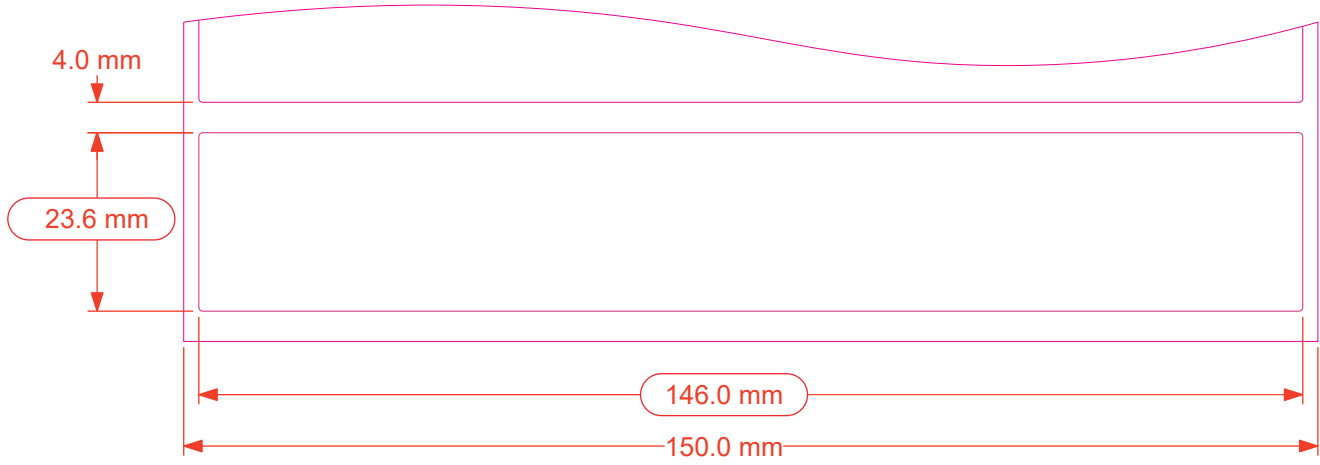

Output direction

測試規範


勾選	Label Criteria				Test Criteria	Remark
	Paste Location	Glue method	Paste method	Peel off method		
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
V		一般膠	食指推平	No	1. 不脫落 2. 不龜起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
	Cover	R 膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3.氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑 4. 如足浮貼狀態可再貼回則為接受 5. 呈摺、曲、鬆 軟則不予接受	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible


公差
Dimension
Label長寬
-0.4mm
Label面材+膠材
±0.02mm

REVISION HISTORY		DOC	DATE
DESIGNER	CHANGE NO.	REV	dd/mm/yyyy
	INITIAL	A	

卷芯要有以下資訊

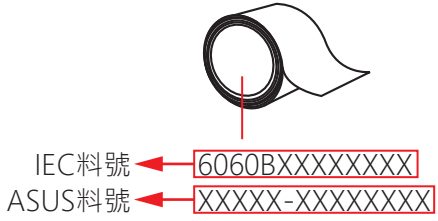

離型紙後請印刷以下資訊

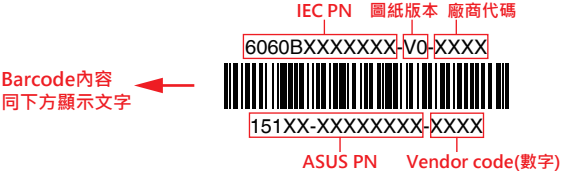


★注意：ASUS PN和Vendor code用英文半型“-”分開

MODEL S5606MA		Inventec CORPORATION			
DESIGNER Jane Chien		D:28 M:11 Y:23	TITLE K5606M RATING LABEL (WO/3C+JP) V1.0 90W(S5606MA)		
MANAGER Jane Lee		D:28 M:11 Y:23	DOCUMENT NUMBER		
THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING	SIZE B	CODE PS	NUMBER 6060-B36573-03-AI
LINEAR mm		X X.X X.XX	SCALE: 1:1	UNIT:mm	REV A
INCH			SHEET:10F1	VER 0	
FILE NAME K5606M-I-rating_W 3C_15105-18351000_6060B3657303					


THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3656705	A01	As Shown

- NOTE:
- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
- A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
- 2.表面處理 (Code):霧油
- 3.膠性：平膠
- or equivalent material.(the material spec as same as Q-Form spec)
- B.ADHESIVE: 3M-SP7533
- C.THICKNESS: 0.125mm
- D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
- AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

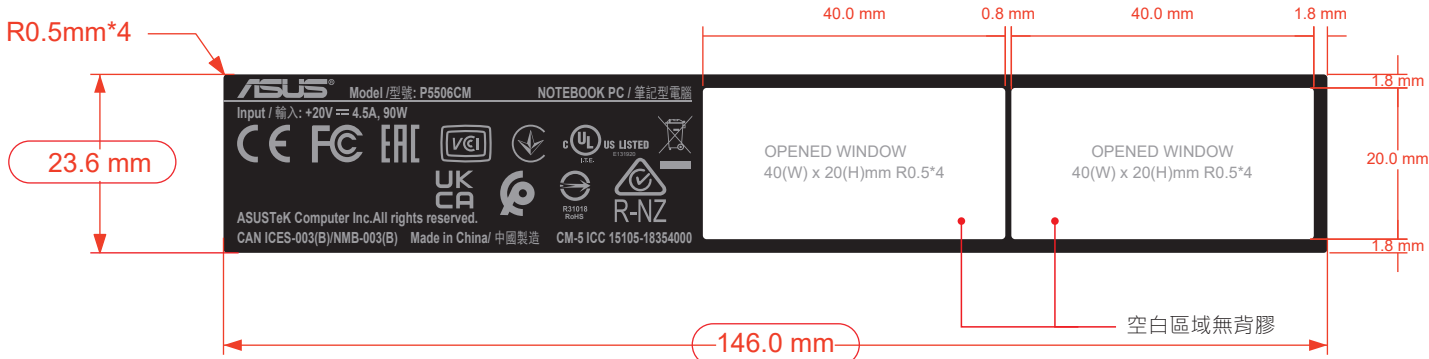

出標樣式

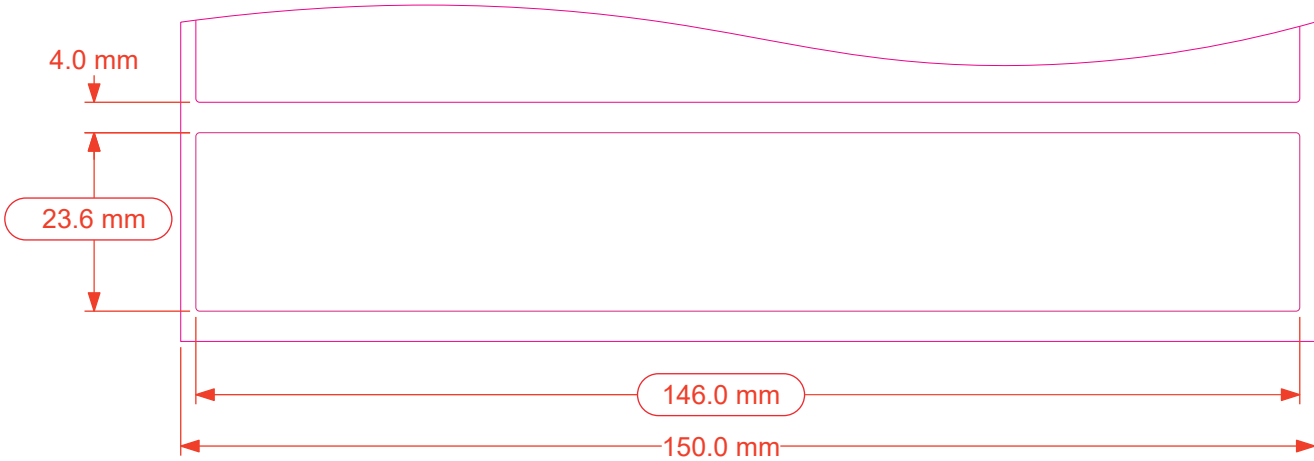

Output direction

測試規範


勾選	Label Criteria				Test Criteria	Remark
	Paste Location	Glue method	Paste method	Peel off method		
	Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
V		一般膠	食指推平	No	1. 不脫落 2. 不龜起 3. 氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑	環測結束需靜置12hr
	Cover	R 膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3.氣泡在5*5cm 或以下面積範圍內，不超過兩個<5mm 直徑 4. 如足浮貼狀態可再貼回則為接受 5. 呈摺、曲、鬆 軟則不予接受	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible


	公差
材 料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm

REVISION HISTORY		DOC	DATE
DESIGNER	CHANGE NO.	REV	dd/mm/yyyy
	INITIAL	A	

卷芯要有以下資訊

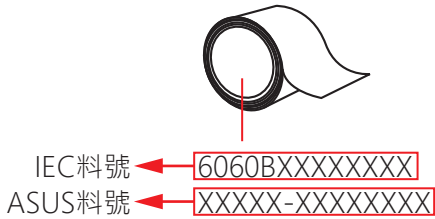

離型紙後請印刷以下資訊

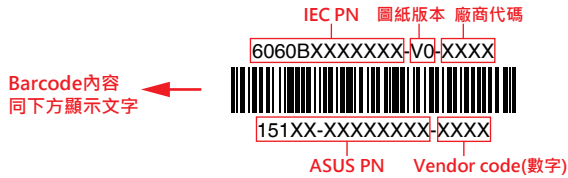

★注意：ASUS PN和Vendor code用英文半型“-”分開

MODEL S5506MA		Inventec CORPORATION CONFIDENTIAL			
DESIGNER Jane Chien		D:27 M:11 Y:23		TITLE P5506CM RATING LABEL (WO/3C+JP) V1.0 90W(S5506MA)	
MANAGER Jane Lee		D:27 M:11 Y:23		DOCUMENT NUMBER	
THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SIZE CODE	REV VER
B		PS		NUMBER 6060-B36567-05-AI	A 0
SCALE: 1:1		UNIT:mm		SHEET:10F1	
LINEAR		X		FILE NAME	
mm		X.X		P5506CM-l-rating_WO3C_15105-18354000_6060B3656705	
INCH		X.XX			


THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION.

LEGEND


PART NO	REV	VARIATION
6060B3657305	A01	As Shown

NOTE:

- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
 - (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
 - (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC
(IF NOT SPECIFIED).
 - (4) MATERIAL:
 - A: 1. 面材 (Code): Lexan 8010 polycarbonate film (PC G11)
 2. 表面處理 (Code): 霧油
 3. 膠性 : 平膠or equivalent material. (the material spec as same as Q-Form spec)
 - B. ADHESIVE: 3M-SP7533
 - C. THICKNESS: 0.125mm
 - D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON: N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code : CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR"
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL. (內文有製造年份時需定義年份轉換規則)

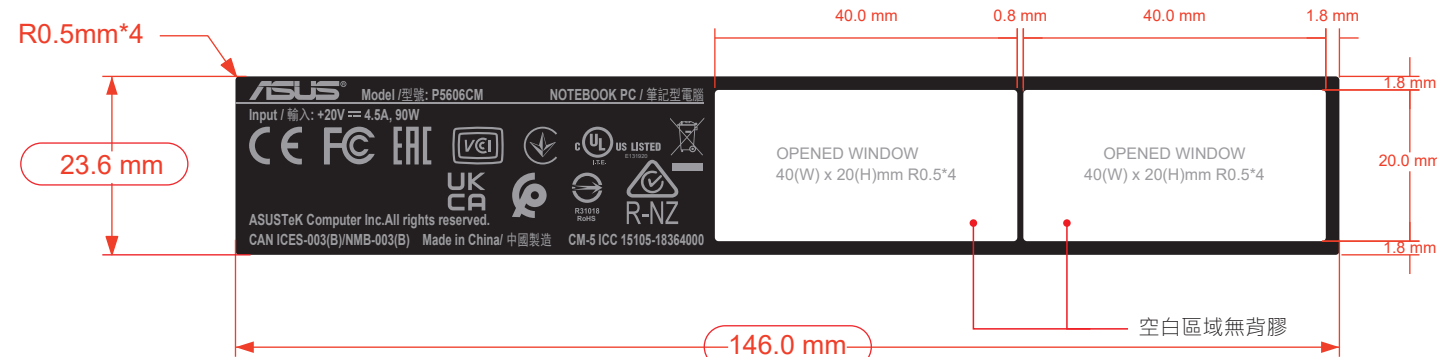

出標樣式

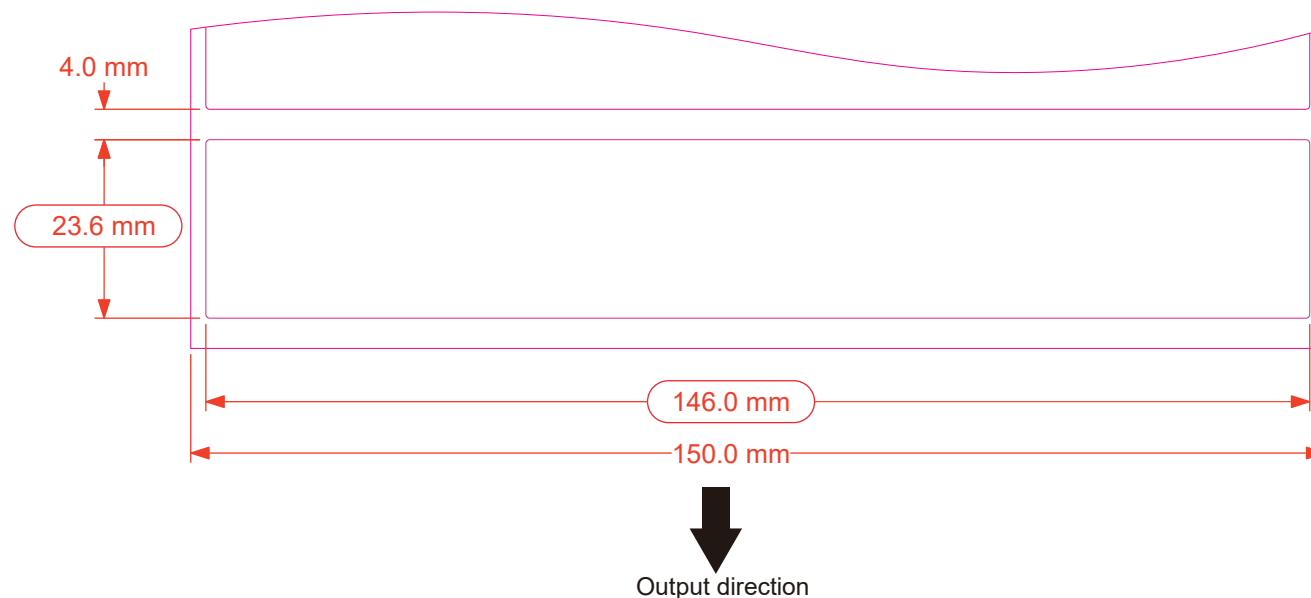

測試規範


勾選	Label Criteria					
	Paste Location	Glue method	Paste method	Peel off method	Test Criteria	Remark
V	Carton	一般膠	食指推平	No	1. 不脫落	環測結束需靜置12hr
					2. 不龜起	
					3. 氣泡在5*5cm 或以下面積範圍內 不超過兩個<5mm 直徑	
		一般膠	食指推平	No	1. 不脫落	環測結束需靜置12hr
					2. 不龜起	
					3. 氣泡在5*5cm 或以下面積範圍內 不超過兩個<5mm 直徑	
	Cover	R 膠	食指推平	任一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (經檢可用3M原狀布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內 不超過兩個<5mm 直徑 4. 如呈浮貼狀尚可再貼回則為接受 5. 呈泡、曲、皺、折則不干接受	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible.
	300cycles				2. The substrate or Undercoating is not visible

	公差
材 料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm

REVISION HISTORY			
DESIGNER	CHANGE NO.	DOC REV	DATE dd/mm/yyyy
-	INITIAL	A	

卷芯要有以下資訊



IEC料號 ← 6060BXXXXXXXXX
ASUS料號 ← XXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊



Barcode內容
同下方顯示文字

★注意：ASUS PN和Vendor code用英文半型“-”分開


MODEL				S5606MA				Inventec CORPORATION CONFIDENTIAL								
DESIGNER			Jane Chien		D:28 M:11 Y:23		TITLE P5606CM RATING LABEL (WO/3C+JP) V1.0 90W(S5606MA)									
MANAGER			Jane Lee		D:28 M:11 Y:23											
THIRD AHGLE PROJECTION					DO NOT SCALE DRAWING		SIZE		CODE		NUMBER		REV		VER	
B		PS		6060-B36573-05-AI								A		0		
SCALE: 1:1				UNIT:mm				SHEET:1OF1								
FILE NAME																
P5606CM-l-rating_WO3C_15105-18354000_6060B3657305																

THIS DRAWING AND SPECIFICATIONS , HEREIN , ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2024 INVENTEC CORPORATION .

LEGEND		
PART NO	REV	VARIATION
6060B3668503	A01	As show

NOTE:

- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
(2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
(3) OTHERS:ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
(4) MATERIAL:
A: 1.面材 (Code) : 25#白色PET (BW0128)
2.表面處理 (Code): 霧P (PPATM(T)(30)(N))
3.膠性 : 平膠
B. ADHESIVE: NA
C. THICKNESS: 0.084mm (面材+膠材)
D. RAW MATERIAL COLOR: WHITE
(5) INK COLOR: 黑底白字
(6) THERMAL TRANSFER RIBBON:NA
(7) MATERIAL AND RIBBON NEED UL CERTIFICATION: NA
(8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
(9) MUST CHECK WITH INVENTEC TO UPDATE “MANUFACTURE YEAR”
AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL. 內文有製造年份時需定義年份轉換規則

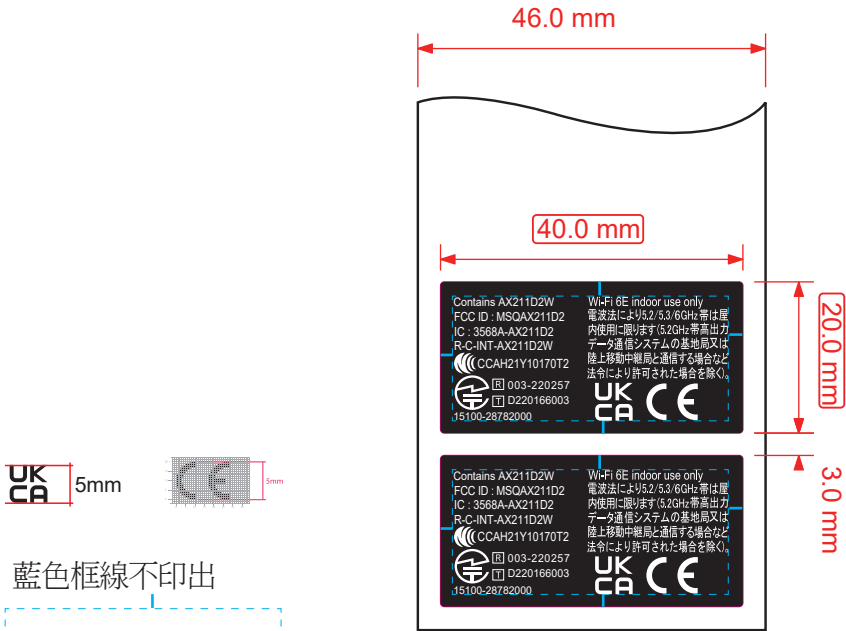

印刷色 : 黑底+白字

藍色框線不印出




Output direction

材 料	公 差
Label長寬	±0.2mm
Label面材+膠材	±0.02mm

IEC
MERD
正式圖面

REVISION HISTORY		DOC	DATE
DESIGNER	CHANGE NO.	REV	dd/mm/yyyy
		INITIAL	A

卷芯要有以下資訊



IEC PN ← 6060BXXXXXX
ASUS PN ← XXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊

IEC PN 圖紙版本 廠商代碼
6060BXXXXXXXXX-V0-XXXX
Barcode內容 同下方顯示文字
151XX-XXXXXXXXXX-XXXX
ASUS PN Vendor code(數字)

★注意 : ASUS PN和Vendor code只能用“-” 分開

MODEL S5406MA		Inventec CORPORATION <i>CONFIDENTIAL</i>			
DESIGNER Fair Wu		D:27 M:12 Y:23		TITLE RF LB_INTEL AX211.D2WG.NV 999M5T BLK// WIFI6E V1.0 COMBO 5G 40*20MM MSQ	
MANAGER Jane Lee		D:27 M:12 Y:23		DOCUMENT NUMBER	
THIRD AHGLE PROJECTION		DO NOT SCALE DRAWING		SIZE B	CODE PS
LINEAR mm		X	X.X	X.XX	NUMBER 6060-B36685-03-AI
INCH					REV A
					VER 0
		SCALE: 1:1		UNIT:mm	SHEET:1OF1
		FILE NAME s5406ma-l-RF_15100-28782000_6060B3668503			