Experimental Analysis SAR Report

Subject: **Specific Absorption Rate (SAR) Hand and Body Report**

Product: Asus Notebook

Model: M3000N

Client: AsusTek Computer Inc
No. 150, Li-Te Road.
Peitou, Taipei, Taiwan

Applicant: Intel Corporation
2300 Corporate Center Drive
Thousand Oaks, CA 91320

Manufacturer: AsusTek Computer Inc

Project #: ITLB-ASUS-4030

Prepared by: APREL Laboratories
51 Spectrum Way
Nepean, Ontario
K2R 1E6

Approved by _____ Date: 27 June 2003
Stuart Nicol
Director Product Development, Dosimetric R&D

Submitted by _____ Date: June 27, 2003
Jay Sarkar
Technical Director of Standards & Certification

Released by _____ Date: June 27/03
Dr. Jacek J. Wojcik, P. Eng.

LICENSED PROFESSIONAL ENGINEER J.J. WOJCIK PROVINCE OF ONTARIO

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002

Applicant:	Intel Corporation
Manufacturer:	AsusTek Computer Inc
FCC ID:	MSQM3000N
Equipment:	Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A inside the AsusTeck notebook
Model:	M3000N
Serial Number:	N/A
Received Status:	Production Unit Pre-release
Standard:	FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation

ENGINEERING SUMMARY

This report contains the results of the engineering evaluation performed on the Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A located inside the Asus M3000N notebook. The analysis was carried out in accordance with the requirements of FCC 96-326, “Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation” in accordance with Supplement C and, using methodologies contained within IEEE P-1528. The Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A located inside the Asus M3000N notebook was evaluated for compliance to the RF exposure requirements contained in section 2 “Applicable Documents”. The Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A was operating while located inside the Asus M3000N notebook and was assessed for SAR at the **maximum power level set** at 17.3dBm while operating with the **duty cycle set at 100%**.

The Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A operates while located inside the Asus M3000N notebook and utilizes a Mini PCI type B form factor. The Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A located inside the Asus M3000N notebook has been assessed for body, bystander, and direct contact SAR.

Intel provided APREL laboratories with one pre-production model of the Asus M3000N notebook. The M3000N notebook incorporates a diverse dual band PCB antenna as supplied by YAGO (Phicomp). The Tx (main) antenna is housed internally within the laptop chassis and is located near or around the **Bottom Right Hand Side** of the laptop near the **Palm Rest Area**, below the keyboard on the main body of the laptop.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

For the purpose of the SAR analysis executed and subsequent report the Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A located inside the Asus M3000N notebook will not be labeled as the DUI (Device Under Investigation). For the purpose of this test report the DUI is the Asus notebook model number M3000N.

The Intel dual band Mini PCI Type 3B Wireless LAN Adapter model WM3B2100A located inside the Asus notebook M3000N was evaluated on the 802.11a operating band for both body exposure and direct contact SAR (extremities) at low (ch#36), middle (ch#52) and high (ch#64) for the frequency range of 5180MHz to 5320MHz.

The conservative 10g average for direct contact SAR for the DUI was found to be **0.76 W/kg for the peak RF output power of the mid channel (ch#52, f=5260MHz)** at the keyboard up position of DUI. For body SAR analysis the conservative 1 g SAR was found to be **0.56 W/kg for the peak RF output power of the Mid channel (ch#52, f=5260MHz)** at Right Hand Side position

Evaluation data and graphs are presented in this report. All analysis conducted and documented in this report were performed while the Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A was located inside the Asus notebook model M3000N.

For the purpose of the SAR assessment the AC power source was used, and the conservative SAR position and frequency for each of the Test Case Scenarios was reassessed using the battery supply. It was found that the conservative SAR presented in this report was measured while using the AC supply.

Based on the measured results and on how the Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A while located inside the Asus notebook model M3000N will be marketed and used, it is certified that the DUI meets the requirements as set forth in the specifications, for the RF exposure environment contained within this report.

The results presented in this report relate only to the sample evaluated.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

TABLE OF CONTENTS

ENGINEERING SUMMARY 2
1. Introduction 5
2. Applicable Documents 5
3. Test Case Scenarios 6
4. Test Equipment 11
5. SET Up 12
6. Test Results 19
6.1. TRANSMITTER CHARACTERISTICS 19
6.2. SAR MEASUREMENTS 20
6.3. DIRECT CONTACT SAR 21
6.4. BODY EXPOSURE 22
7. Conclusions 24
Appendix A: Graphic Plots FROM SAR Measurements 24
Appendix B: Pictures of the evaluation setup 49
Appendix C: Validation Scan 56
Appendix D: Uncertainty Budget 59
Appendix E: Probe Calibration Certificate 60
Appendix F: Dipole Calibration Certificate 71

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

1. INTRODUCTION

Tests were conducted to determine the Specific Absorption Rate (SAR) for a sample Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A located inside the Asus M3000N notebook while operating with a YAGO (Phicomp) antenna. These tests were conducted at APREL Laboratories facility located at 51 Spectrum Way, Nepean, Ontario, Canada.

2. APPLICABLE DOCUMENTS

The following documents are applicable to the evaluation performed:

1) FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation

2) ANSI/IEEE C95.1-1999, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

3) ANSI/IEEE C95.3-1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.

4) OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields".

5) IEEE P-1528 Draft "Recommended Practice for Determining the Peak Spatial Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communication Devices: Experimental Techniques."

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

3. Test Case Scenarios

Intel provided APREL Laboratories with a sample Asus M3000N notebook which acts as the host for the Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A for the purpose of the SAR evaluation. The evaluations performed on the Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A while located inside the Asus M3000N notebook were to establish the conservative SAR value for both 1 and 10g averages while the Mini PCI card was transmitting at the set power below the saturation point.

The DUI (device under test) is the Asus M3000N notebook which uses the Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A.

Device Tested Keyboard Up

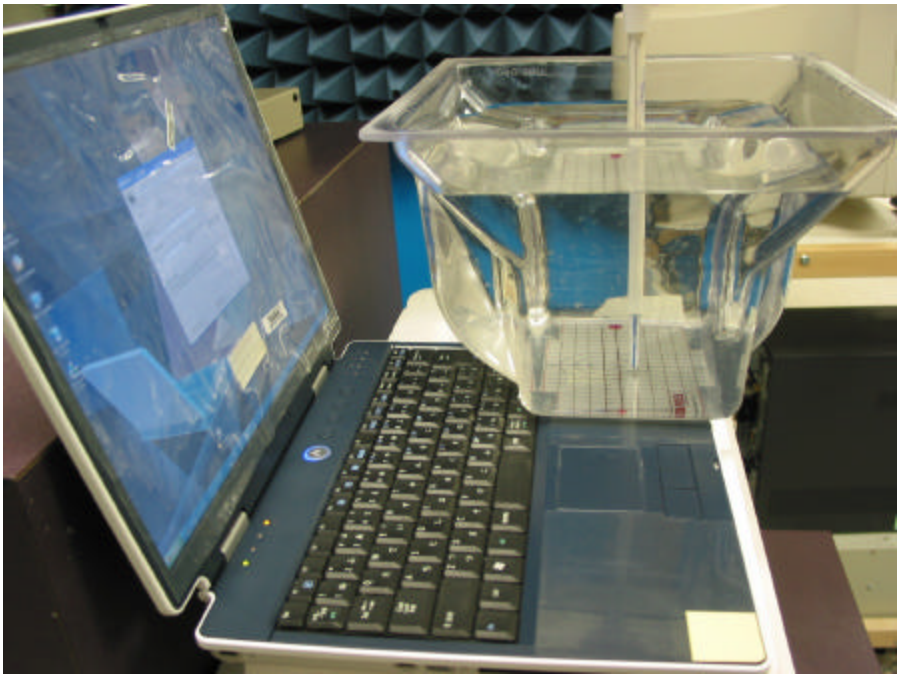

Asus M3000N notebook with Yageo 2.45/5GHz M3N Dual Band Antenna

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Device Tested Keyboard Down

Asus M3000N notebook with Yageo 2.45/5GHz M3N Dual Band Antenna

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Device Tested Left Hand Side

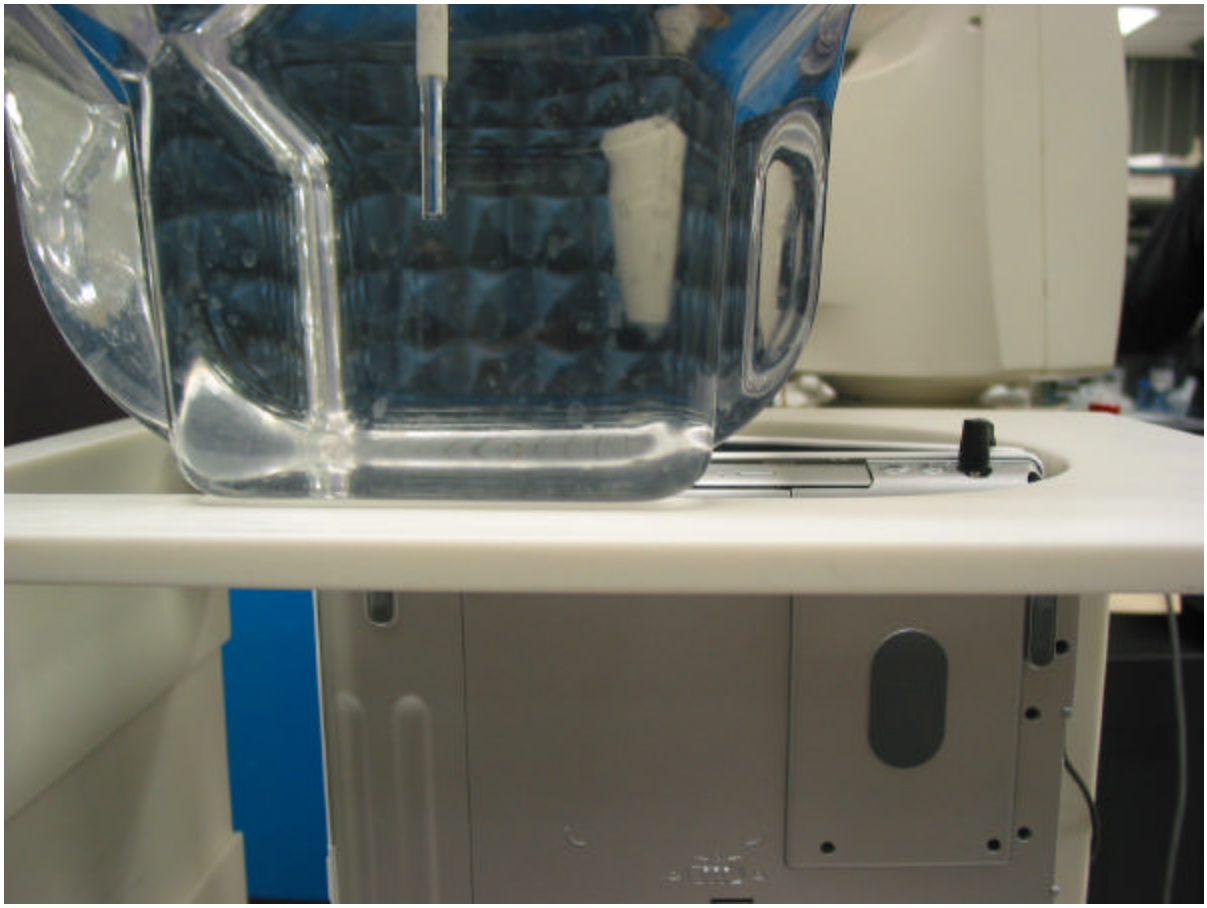

Asus M3000N notebook with Yageo 2.45/5GHz M3N Dual Band Antenna

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Device Tested Right Hand Side

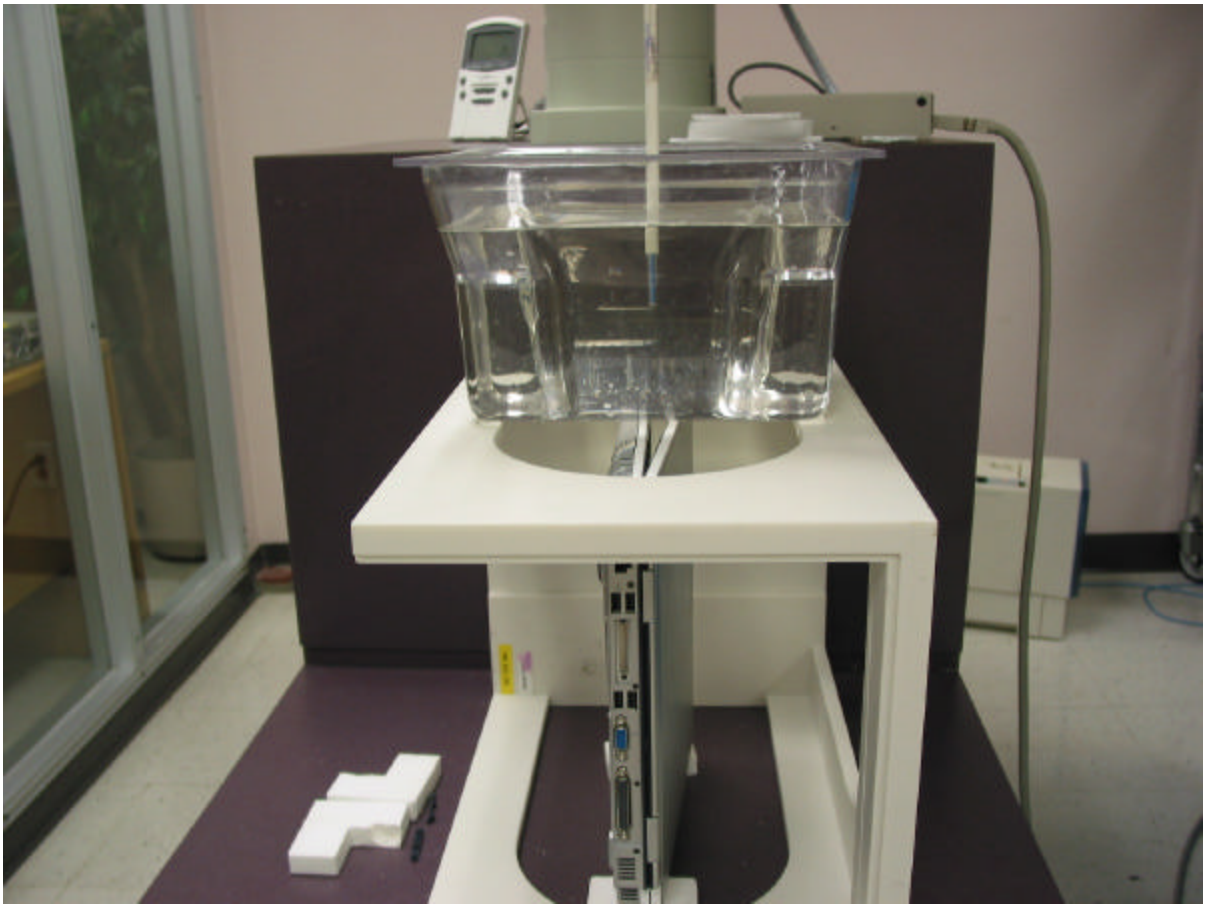

Asus M3000N notebook with Yageo 2.45/5GHz M3N Dual Band Antenna

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Device Tested LCD Closed

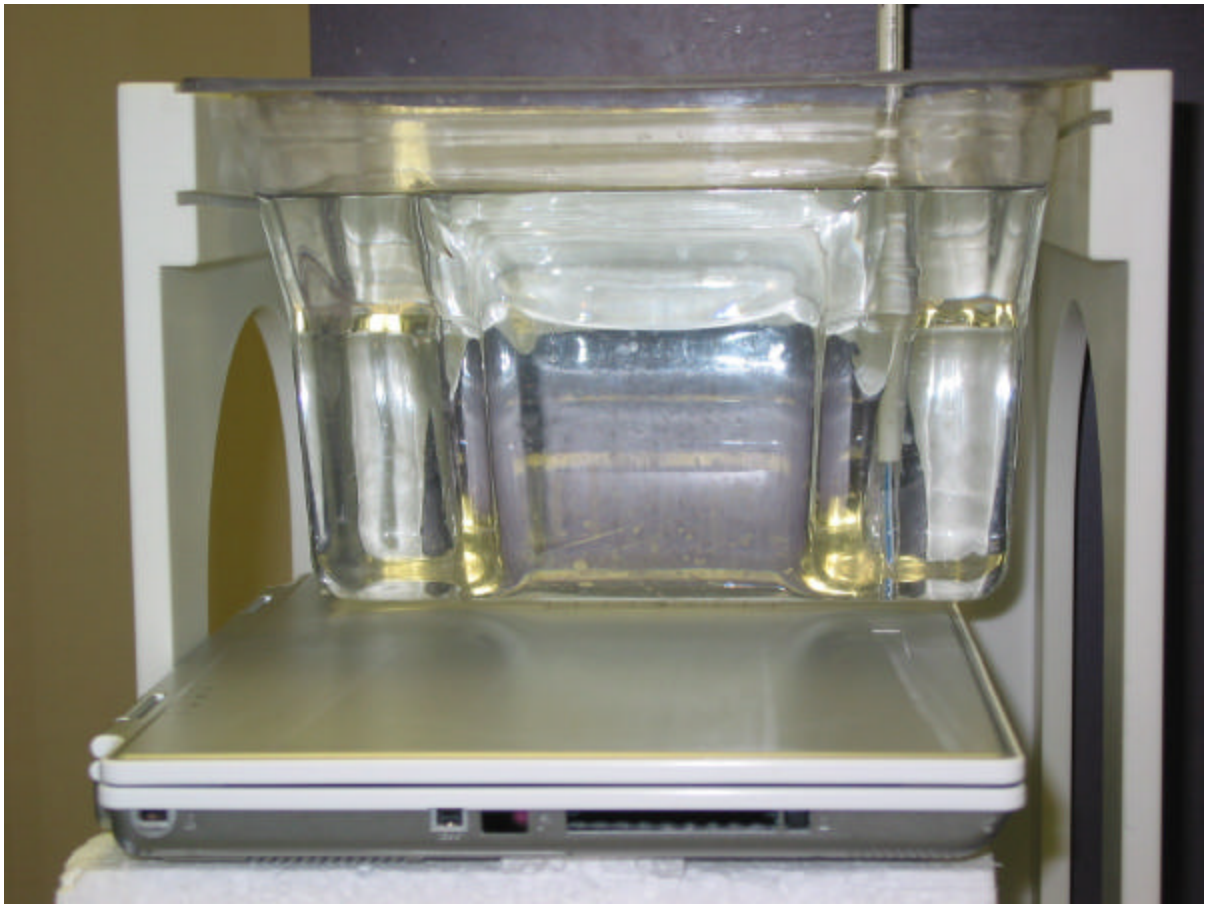

Asus M3000N notebook with Yageo 2.45/5GHz M3N Dual Band Antenna

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

4. TEST EQUIPMENT

- APREL Triangular Dosimetric Probe Model E-010, s/n 163
- ALIDX-500 Dosimetric SAR Measurement System
- APREL flat Phantom F1, Part # P-V-G8 (overall shell thickness 2mm)
- APREL 5240MHz Dipole
- APREL RF Amplifier
- Hewlett Packard Microwave Amplifier
- Hewlett Packard Signal Generator Asset
- Gigatronics Power Meter
- Gigatronics Power Sensor (peak detection mode)
- Hewlett Packard Dual Directional Coupler

Table 2: Instrumentation

Instrument	Calibration Due	Asset Number/Serial Number
E-010 Probe	May 2003	163
ALIDX-500	March 2004	N/A
APREL Flat Phantom	N/A	APL-001
APREL UniPhantom	N/A	APL-085
APREL 5240MHz Dipole	CBT	301460
APREL RF Amplifier	CBT	301467
HP-Signal Generator	September 2003	301468
Gigatronics Power Meter	September 2003	301393
Gigatronics Power Sensor	April 2004	301394
HP Directional Coupler	October 2003	100251
HP Microwave Amplifier	CBT	100952

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

5. SET UP

5.1 ALIDX-500 Measurement System

The image below shows the laboratory along with the ALIDX-500 Measurement system.

The ALIDX-500 Dosimetric SAR Measurement System was developed jointly with APREL Laboratories and IDX Robotics for use within wireless development and the compliance environment. The system consists of a six axis articulated arm, and controller for precise probe positioning (0.05 mm repeatability). Custom software has been developed to enable communications between the robot controller software and the host operating system.

An amplifier is located on the articulated arm, which is isolated from the custom designed end effector and robot arm. The end effector provides the mechanical touch detection functionality and probe connection interface. The amplifier is functionally validated within the manufacturers site and calibrated at NCL Calibration Laboratories. A Data Acquisition Card (DAC) is used to collect the signal as detected by the isotropic e-field probe. The DAC manufacturer calibrates the DAC to NIST standards. A formal validation is executed using all mechanical and electronic components to prove conformity of the measurement platform as a whole.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

The ALIDX-500 has been designed to measure devices within the compliance environment to meet all recognized standards. The system also conforms to standards, which are currently being developed by the scientific and manufacturing community.

The course scan resolution is defined by the operator and reflects the requirements of the standard to which the device is being tested. Precise measurements are made within the predefined course scan area and the values are logged.

The user predefines the sample rate for which the measurements are made so as to ensure that the full duty-cycle of a pulse modulation device is covered during the sample. The following algorithm is an example of the function used by the system for linearization of the output for the probe.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

The APREL E-Field probe is evaluated to establish the diode compression point.

A complex algorithm is then used to calculate the values within the measured points down to a resolution of 1mm. The data from this process is then used to provide the co-ordinates from which the cube scan is created for the determination of the 1 g and 10 g averages.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Cube scan averaging consists of a number of complex algorithms, which are used to calculate the one, and ten gram averages. The basis for the cube scan process is centered on the location where the maximum measured SAR value was found. When a secondary peak value is found which is within 60% of the initial peak value, the system will report this back to the operator who can then asses the need for further analysis of both the peak values prior to the one and ten-gram cube scan averaging process. The algorithm consists of 3D cubic Spline, and Lagrange extrapolation to the surface, which form the matrix for calculating the measurement output for the one and ten gram average values. The resolution for the physical scan integral is user defined with a final calculated resolution down to 1mm.

In-depth analysis for the differential of the physical scanning resolution for the cube scan analysis has been carried out, to identify the optimum setting for the probe positioning steps, and this has been determined at 8mm increments on the X, & Y planes. The reduction of the physical step increment increased the time taken for analysis but did not provide a better uncertainty or return on measured values.

Prior to the measurement process the operator can insert the parameters for which the physical measurements are made, defining the X, Y, and Z probe movement integrals. For the FCC compliance process both OET 65 “Supplement C” and the IEEE draft standard “P-1528” were used to define the measurement parameters used during the assessment of the device.

The final output from the system provides data for the area scan measurements, physical and splined (1mm resolution) cube scan with physical and calculated values (1mm resolution).

The overall uncertainty for the methodology and algorithms the ALIDX500 used during the SAR calculation was evaluated using the data from IEEE P-1528 f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

The probe used during the measurement process has been assessed to provide values for diode compression. These values are calculated during the probe calibration exercise and are used in the mathematical calculations for the assessment of SAR.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

5.2 Validation

A full system validation was run prior to the SAR testing. The methodology used for the system validation was taken from IEEE P-1528 section 7 (where applicable). Further details of the tissue used during the system validation are provided in section 6.3 Simulated Tissue. The results from the system validation are provided in Appendix C Validation Results.

The image below shows the setup used for the system validation.

NOTE:

The full analysis of the Device as tested was completed within a 24hr period.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

5.3 Body & Bystander Analysis

Measurements were made on each of the Test Case Scenarios using the APREL Universal Phantom, on the low, mid, and high channels. Each Test Case Scenario was assessed for SAR in the keyboard up, keyboard down, left hand side, right hand side with the LCD open and closed. The separation distance used was 0mm for the conservative SAR assessment. The results from this exercise are presented in section 6 test results.

The image below shows part of the setup used for body measurements.

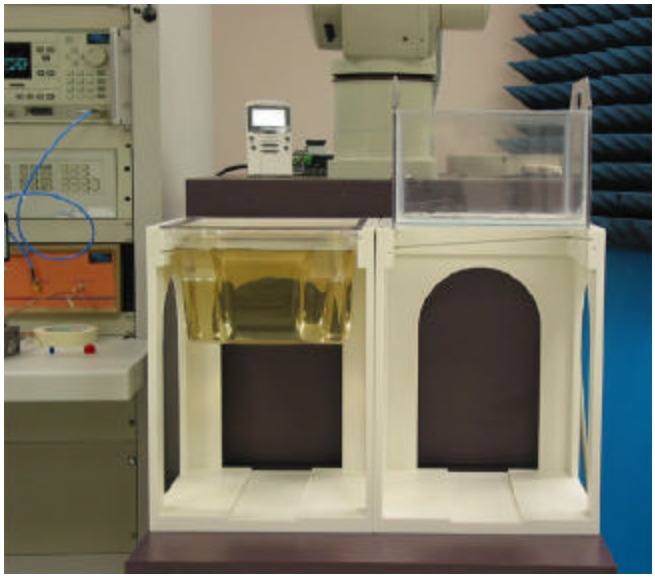

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

5.4 Simulated Tissue

The recipes used to make the simulated tissue were based on those presented in OET Supplement C. APREL Laboratories have provided the FCC with a copy of the simulated tissue manufacturing procedure.

The density used to determine SAR from the measurements was the recommended 1.0 kg/m^3 found in Appendix C of "Supplement C OET Bulletin 65, Edition 01-01".

Dielectric parameters of the simulated tissue material were determined using an Anritsu 37347A Vector Network Analyzer, and the APREL Dielectric Probe.

For the system validation the tissue was calibrated at 5240 MHz.

Table 3: Properties for Tissue used in Validation executed 30th May 03

BODY Tissue	APREL	Target Value	D (%)
Dielectric constant, ε_r	44	45	2
Conductivity, σ [S/m]	6.6	5.85	13
Tissue Conversion Factor,	3.0	-	-
Tissue Temperature (ºC)	21.0	-	-
Ambient Temperature (◦C)	22.5	-	-

Table 4: Tissue Calibration Instrumentation

Instrument	Calibration Due	Asset Number/Serial Number
Anritsu VNA	CBT	301382
APREL Dielectric Probe	CBT	-

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

5.5 Methodology

1. The test methodology utilized in the analysis of the Test Case Scenarios complies with the requirements of FCC 96-326 and ANSI/IEEE C95.3-1992.

2. The E-field is measured with a small isotropic probe (output voltage proportional to E^2).

$$SAR = \frac{\sigma \left|\mathbf{E}\right|^2}{\rho}$$

3. The probe is moved precisely from one point to the next using the robot (10 mm increments for wide area scanning and 8 mm increments for zoom scanning in the X, Y directions) and (5.0 mm increments for the final depth profile measurement in the Z direction).

4. The probe travels in the homogeneous liquid simulating human tissue (body).

   Section 5.4 contains information about the properties of the simulated tissue used for these measurements.

5. The liquid is contained in a manikin simulating a portion of the human body with an overall shell thickness of 2 mm.

6. The DUI is positioned with the surface under investigation against the phantom with no separation distance for an initial conservative analysis.

7. All tests were performed with the highest power available from the sample DUI under transmit conditions.

More detailed descriptions of the test method are given in Section 6 where appropriate.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

6. TEST RESULTS

6.1. TRANSMITTER CHARACTERISTICS

The Intel Pro/Wireless 2100 WLAN Mini-PCI Type 3B Adapter was integrated by Intel. The Intel Pro/Wireless 2100 WLAN Mini-PCI Type 3B Adapter was then set to transmit, using the software, which was supplied by Intel, with a 100% duty cycle (modulated mode). During the SAR measurement process a spectrum analyzer was setup to measure the radiated power.

The Intel Mini PCI Type 3B 802.11a/b Wireless LAN Adapter model WM3B2100A located inside the Asus M3000N notebook has been developed to operate with both the AC and, battery cell in the laptop. The DUI was analyzed and conducted power measurements were made on the Tx output port for the DUI using both battery and AC supply. The power measurement exercise showed that **no measurable difference could be made** when comparing battery and AC power modes.

The DUI then had a further assessment executed while transmitting using the AC supply over a period of 40 minutes. During this period conducted power measurements were made to assess any measurable drift. Table six contains the results from this exercise.

Note

The power measurements taken were conducted and measured using a power meter, and broadband power sensor (peak detection mode).

Table 5: Conducted power measurement before and after the scanning

Type of Exposure	Scan Type Equivalent	Power Readings (dBm)		DP_{TX} (dB)
		Initial	After 40 Minutes	
Direct Contact Exposure	Area	17.3	17.3	0
	Fine/Zoom	17.3	17.3	0
Body Exposure	Area	17.3	17.3	0
	Fine/Zoom	17.3	17.3	0

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

6.2. SAR MEASUREMENTS

1) RF exposure is expressed as Specific Absorption Rate (SAR). SAR is calculated from the E-field, measured in a grid of test points. SAR is expressed as RF power per kilogram of mass, averaged in 10 grams of tissue for the extremities and 1 gram of tissue elsewhere. The equation below is a representation of how SAR can theoretically equate.

$$SAR = \frac{d}{dt}\left(\frac{dW}{dm}\right) = \frac{d}{dt}\left(\frac{dW}{\rho dV}\right)$$

2) The DUI was put into test mode for the SAR measurements via test software supplied by the manufacturer running on the host platform. This control software set the DUI channel and operating TX mode/frequency.

3) Table 6, provides the details in tabular form of the full measurement analysis (Test Case Scenarios), which was performed on the DUI. Appendix A provides contour plots of the SAR measurements super imposed on the DUI.

4) Area/Zoom scans were performed for the low, middle and high channels of the DUI. These scans were repeated for the keyboard up, keyboard down, and vertical, positions of the DUI. The DUI was operating with maximum output power and a duty cycle of 100%. The DUI was placed up against the phantom during the test process. The phantom shell thickness is 2 mm overall.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

6.3. DIRECT CONTACT SAR

All subsequent testing for the direct contact SAR was performed on three channels (low: 5180MHz, middle: 5260MHz, high: 5320MHz) using all test scenarios where applicable. The results are presented in table 6.

1) The device had an initial area scan executed to establish the location of the maximum peak SAR. A calculated resolution of 1 mm was used to determine the location for the peak SAR.
2) The device was then explored on a refined 32 mm grid (Cube, Zoom Scan) in three dimensions (X, Y & Z) measuring at 8 mm integrals X & Y and 5 mm integrals in the Z plane so as to create a physical measured point matrix. The system then runs a series of complex algorithms, which completes the matrix of calculated and measured values equivalent to a 1 mm resolution in the X, & Y planes.
3) The software runs a series of Lagrange functions to provide the data for the Z plane, which is inserted into the matrix.
4) To complete the calculated matrix (1 mm resolution) a fourth-order polynomial extrapolation is used to compute the surface values and the 1 and 10-gram averages are then calculated.
5) Where two (or more) peaks with similar values are measured the location of the peaks is recorded. A refined grid is then created to asses each peak location individually, and the maximum value from the assessment is used to record conservative SAR for this report.
6) The highest conservative SAR value averaged over 10 grams for the direct contact exposure analysis was found to be **0.76 W/kg at the mid channel 5260MHz Keyboard UP** (Table 6).

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

6.4. BODY EXPOSURE

All subsequent testing for body exposure SAR was performed on three channels (low: 5180MHz, middle: 5260MHz, high: 5320MHz) using all test scenarios where applicable. The results are presented in table 6.

1) The device had an initial area scan executed to establish the location of the maximum peak SAR. A calculated resolution of 1mm was used to determine the location for the peak SAR.
2) The device was then explored on a refined 32 mm grid (Cube, Fine Scan) in three dimensions (X, Y & Z) measuring at 8 mm integrals X & Y and 5 mm integrals in the Z plane so as to create a physical measured point matrix. The system then runs a series of complex algorithms, which completes the matrix of calculated and measured values equivalent to a 1 mm resolution in the X, & Y planes.
3) The software runs a series of Lagrange functions to provide the data for the Z plane, which is inserted into the matrix.
4) To complete the calculated matrix (1mm resolution) a fourth order polynomial is used to extrapolate the surface values and the 1 and 10-gram averages are then calculated.
5) Where two (or more) peaks with similar values are measured the location of the peaks is recorded. A refined grid is then created to asses each peak location individually, and the maximum value from the assessment is used to record conservative SAR for this report.
6) The highest conservative SAR value averaged over 1 gram for body exposure analysis was found to be **0.56 W/kg at the mid channel 2437MHz (Table 7) for the DUI located at the right hand side** position.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Table 6:
Test results 1 g and 10 g SAR values for the C110

Assessment Type	Position Separation mm	Channel	Channel Number	Frequency MHz	1g SAR W/kg	10g SAR W/kg
Keyboard Up	0	Low	36	5180	-	0.57
Keyboard Up	**0**	**Mid**	**52**	**5260**	**-**	**0.76**
Keyboard Up	0	High	64	5320	-	0.48
LCD Closed	0	Mid	52	5260	0.33	-
Keyboard Down	0	Mid	52	5260	0.34	-
Right Side	**0**	**Mid**	**52**	**5260**	**0.56**	**-**

NOTE:
Tests were executed on the left side, where no antenna is present. These results were equivalent to the noise level.

All Tests Executed 30th May 2003

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

7. CONCLUSIONS

The maximum Specific Absorption Rate (SAR) averaged over 10 grams, was found to be while the device was in the **Keyboard Up position**, where the conservative SAR was measured on the **mid channel 5260MHz at 0.76 W/kg** (direct contact SAR for the exposed extremities – hands, wrists, feet and ankles). The overall margin of uncertainty for this measurement is **±19.1% (**Appendix D).

SAR Limit Direct Contact	Conservative Measured SAR
4.0 W/kg 10 gram Average	0.76 W/kg 10 gram Average

The maximum Specific Absorption Rate (SAR) averaged over 1 gram, was found on the **right hand side**, where the conservative SAR was measured on the **Mid channel 5260MHz at 0.56 W/kg** (Body SAR) with a separation distance of 10mm. The overall margin of uncertainty for this measurement is **±20.6% (**Appendix D).

SAR Limit Body	Conservative Measured SAR
1.6 W/kg 1 gram Average	0.65 W/kg 1 gram Average

Considering the above, this unit as tested, and as it will be marketed and used, is found to be compliant with the FCC 96-326 requirements.

Telecommunications Approval Board - Spectrum Sciences Institute - SAR Certified APREL Laboratories

Tested by: Yiyi Chen

Date: 30th May, 2003

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Appendix A

TEST GRAPHIC PLOTS

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

GRAPH 1

Direct contact SAR (10g)
Keyboard Up
Distance 0 mm
Mid Channel
Frequency: 5260 MHz
Duty Cycle 1

Date	Dielectric Constant ε_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp (ºC)	10g SAR (W/kg)	Power Drift
30/05/03	44	6.6	3.0	22	0.76	0

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

SAR DATA REPORT
START : 30-MAY-03 02:52:56 AM
END : 30-MAY-03 02:58:44 AM
CODE VERSION : 4.12
ROBOT VERSION: 4.08

PRODUCT DATA:
TYPE : ASUS LAPTOP
FREQUENCY : 5260 MHZ
ANTENNA TYPE : END FED
ANTENNA POSN. : INTERNAL

MEASUREMENT DATA:
PHANTOM NAME : ONKEYBOARD
PHANTOM TYPE : UNIPHANTOM
TISSUE TYPE : MUSCLE
TISSUE DIELECTRIC : 44.000
TISSUE CONDUCTIVITY : 6.600
TISSUE DENSITY : 1.000
CREST FACTOR : 1.000
ROBOT NAME : CRS

PROBE DATA:
PROBE NAME : 163
PROBE TYPE : E FLD TRIANGLE
FREQUENCY : 5245 MHZ
TISSUE TYPE : MUSCLE
CALIBRATED DIELECTRIC : 44.000
CALIBRATED CONDUCTIVITY : 6.600
PROBE OFFSET : 2.500 MM
CONVERSION FACTOR : 3.000
DIODE COMPRESSION PT : 76.0 MV
PROBE SENSITIVITY : 0.580 0.580 0.580 MV/(MW/CM^2)
AMPLIFIER GAINS : 20.00 20.00 20.00
CHAN. OFFSET (MV) : -5.03 3.39 -0.64

SAMPLE:
RATE: 6000 SAMPLES/SEC
COUNT: 1000 SAMPLES
NIDAQ GAIN: 5
SCAN TIME: 166.7 MSEC

COMMENTS:
KEYBOARD, 0MM

AREA SCAN - MAX LOCAL SAR VALUE AT X=20.0 Y=-21.0 = 3.04 W/KG
ZOOM SCAN - MAX LOCAL SAR VALUE AT X=20.0 Y=-22.0 Z=0.0 = 14.03 W/KG
MAX 1G SAR AT X=20.0 Y=-21.0 Z=0.0 = 4.03 W/KG
MAX 10G SAR AT X=20.0 Y=-24.0 Z=0.0 = 0.76 W/KG

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Z AXIS SCAN DIRECT CONTACT SAR 10G KEYBOARD UP

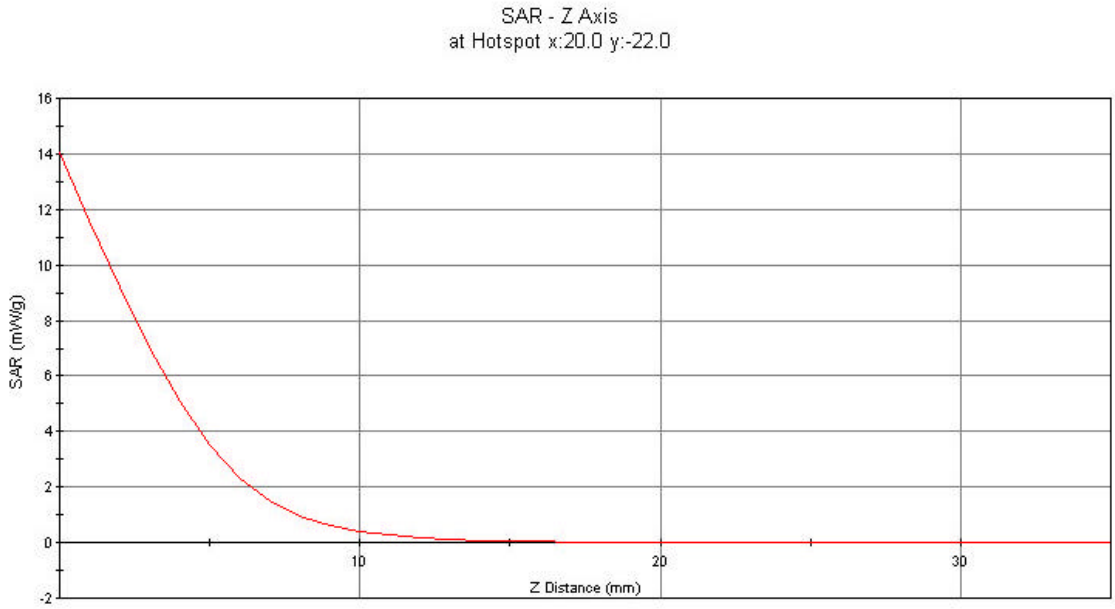

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

GRAPH 2

Body SAR (1g)
LCD Closed
Distance 0 mm
High Channel
Frequency: 5260 MHz
Duty Cycle 1

Date	Dielectric Constant ε_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp (ºC)	1g SAR (W/kg)	Power Drift
30/05/03	44	6.6	3.0	22	0.33	0

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

SAR DATA REPORT

START : 30-MAY-03 11:30:11 PM
END : 30-MAY-03 11:41:06 PM
CODE VERSION : 4.12
ROBOT VERSION: 4.08

PRODUCT DATA:
TYPE : ASUS LAPTOP
FREQUENCY : 5260 MHZ
ANTENNA TYPE : END FED
ANTENNA POSN. : INTERNAL

MEASUREMENT DATA:
PHANTOM NAME : LAPTOP_EDGE
PHANTOM TYPE : UNIPHANTOM
TISSUE TYPE : MUSCLE
TISSUE DIELECTRIC : 44.000
TISSUE CONDUCTIVITY : 6.600
TISSUE DENSITY : 1.000
CREST FACTOR : 1.000
ROBOT NAME : CRS

PROBE DATA:
PROBE NAME : 163
PROBE TYPE : E FLD TRIANGLE
FREQUENCY : 5245 MHZ
TISSUE TYPE : MUSCLE
CALIBRATED DIELECTRIC : 44.000
CALIBRATED CONDUCTIVITY : 6.600
PROBE OFFSET : 2.500 MM
CONVERSION FACTOR : 3.000
DIODE COMPRESSION PT : 76.0 MV
PROBE SENSITIVITY : 0.580 0.580 0.580 MV/(MW/CM^2)
AMPLIFIER GAINS : 20.00 20.00 20.00
CHAN. OFFSET (MV) : -5.03 3.39 -0.64

SAMPLE:
RATE: 6000 SAMPLES/SEC
COUNT: 1000 SAMPLES
NIDAQ GAIN: 5
SCAN TIME: 166.7 MSEC

COMMENTS:
0MM

AREA SCAN - MAX LOCAL SAR VALUE AT X=-18.0 Y=1.0 = 0.36 W/KG
ZOOM SCAN - MAX LOCAL SAR VALUE AT X=-16.0 Y=2.0 Z=0.0 = 1.68 W/KG
MAX 1G SAR AT X=-16.0 Y=3.0 Z=0.0 = 0.56 W/KG
MAX 10G SAR AT X=-16.0 Y=3.0 Z=0.0 = 0.16 W/KG

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Z AXIS SCAN

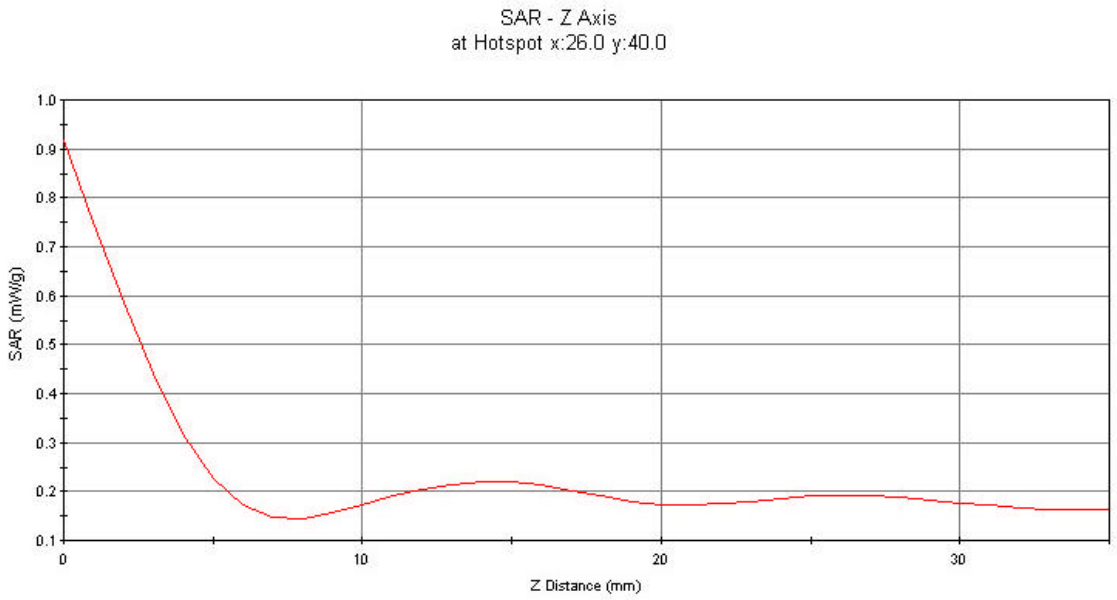

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

GRAPH 3

Body SAR (1g)
Keyboard Down
Distance 0 mm
Mid Channel
Frequency: 5260 MHz
Duty Cycle 1

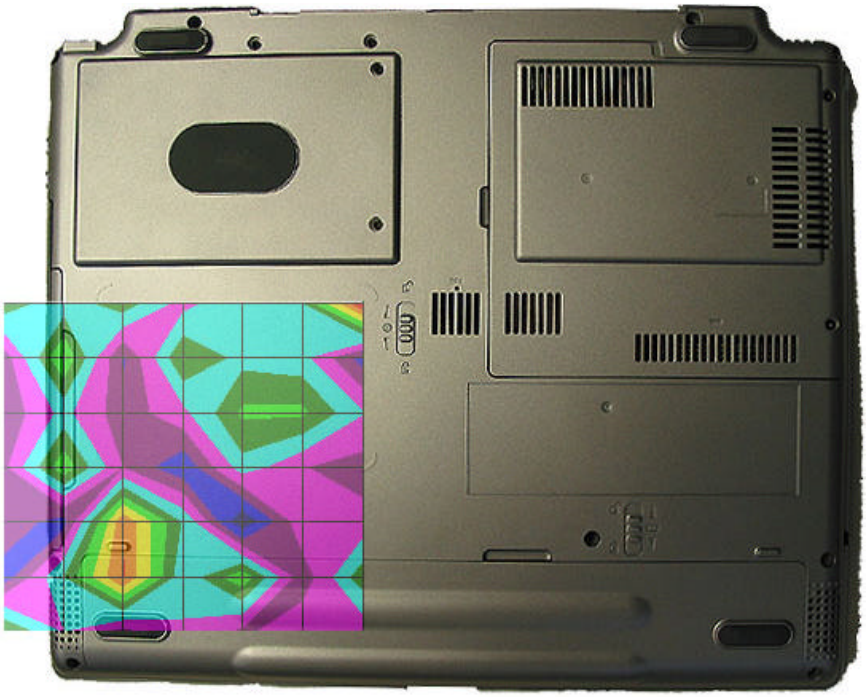

Date	Dielectric Constant ε_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp (ºC)	1g SAR (W/kg)	Power Drift
30/05/03	44	6.6	3.0	22	0.34	0

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

SAR DATA REPORT
START : 30-MAY-03 11:44:36 PM
END : 30-MAY-03 11:50:31 PM
CODE VERSION : 4.12
ROBOT VERSION: 4.08

PRODUCT DATA:
TYPE : ASUS LAPTOP
FREQUENCY : 5260 MHZ
ANTENNA TYPE : END FED
ANTENNA POSN. : INTERNAL

MEASUREMENT DATA:
PHANTOM NAME : APREL-UNI
PHANTOM TYPE : UNIPHANTOM
TISSUE TYPE : MUSCLE
TISSUE DIELECTRIC : 44.000
TISSUE CONDUCTIVITY : 6.600
TISSUE DENSITY : 1.000
CREST FACTOR : 1.000
ROBOT NAME : CRS

PROBE DATA:
PROBE NAME : 163
PROBE TYPE : E FLD TRIANGLE
FREQUENCY : 5245 MHZ
TISSUE TYPE : MUSCLE
CALIBRATED DIELECTRIC : 44.000
CALIBRATED CONDUCTIVITY : 6.600
PROBE OFFSET : 2.500 MM
CONVERSION FACTOR : 3.000
DIODE COMPRESSION PT : 76.0 MV
PROBE SENSITIVITY : 0.580 0.580 0.580 MV/(MW/CM^2)
AMPLIFIER GAINS : 20.00 20.00 20.00
CHAN. OFFSET (MV) : -5.39 3.09 -1.09

SAMPLE:
RATE: 6000 SAMPLES/SEC
COUNT: 1000 SAMPLES
NIDAQ GAIN: 5
SCAN TIME: 166.7 MSEC

COMMENTS:
BACK 0MM

AREA SCAN - MAX LOCAL SAR VALUE AT X=16.0 Y=-54.0 = 0.26 W/KG
ZOOM SCAN - MAX LOCAL SAR VALUE AT X=26.0 Y=-49.0 Z=0.0 = 1.01 W/KG
MAX 1G SAR AT X=27.0 Y=-49.0 Z=0.0 = 0.34 W/KG
MAX 10G SAR AT X=11.0 Y=-59.0 Z=1.0 = 0.20 W/KG

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Z AXIS SCAN

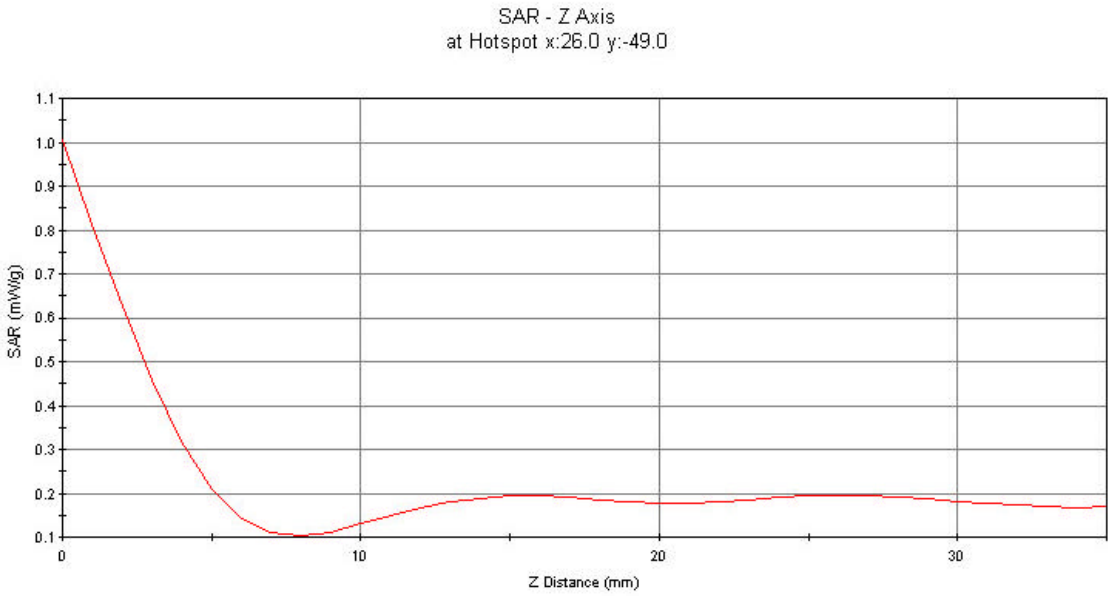

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

GRAPH 4

Direct Contact SAR (10g)
Right Hand Side
Distance 0 mm
Mid Channel
Frequency: 5260 MHz
Duty Cycle 1

Date	Dielectric Constant ε_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp (ºC)	10g SAR (W/kg)	Power Drift
30/05/03	44	6.6	3.0	22	0.16	0

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

GRAPH 5

Body SAR (1g)
Right Hand Side
Distance 0 mm
Mid Channel
Frequency: 5260 MHz
Duty Cycle 1

Date	Dielectric Constant ε_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp (ºC)	1g SAR (W/kg)	Power Drift
30/05/03	44	6.6	3.0	22	0.56	0

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

SAR Data Report

Start : 30-May-03 11:30:11 pm
End : 30-May-03 11:41:06 pm
Code Version : 4.12
Robot Version: 4.08

Product Data:
Type : ASUS Laptop
Frequency : 5260 MHz
Antenna Type : End Fed
Antenna Posn. : Internal

Measurement Data:
Phantom Name : Laptop_edge
Phantom Type : Uniphantom
Tissue Type : Muscle
Tissue Dielectric : 44.000
Tissue Conductivity : 6.600
Tissue Density : 1.000
Crest Factor : 1.000
Robot Name : CRS

Probe Data:
Probe Name : 163
Probe Type : E Fld Triangle
Frequency : 5245 MHz
Tissue Type : Muscle
Calibrated Dielectric : 44.000
Calibrated Conductivity : 6.600
Probe Offset : 2.500 mm
Conversion Factor : 3.000
Diode Compression Pt : 76.0 mV
Probe Sensitivity : 0.580 0.580 0.580 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00
Chan. Offset (mV) : -5.03 3.39 -0.64

Sample:
Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5
Scan Time: 166.7 msec

Comments:
0mm

Area Scan - Max Local SAR Value at x=-18.0 y=1.0 = 0.36 W/kg
Zoom Scan - Max Local SAR Value at x=-16.0 y=2.0 z=0.0 = 1.68 W/kg
Max 1g SAR at x=-16.0 y=3.0 z=0.0 = 0.56 W/kg
Max 10g SAR at x=-16.0 y=3.0 z=0.0 = 0.16 W/kg

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Z Axis Scan

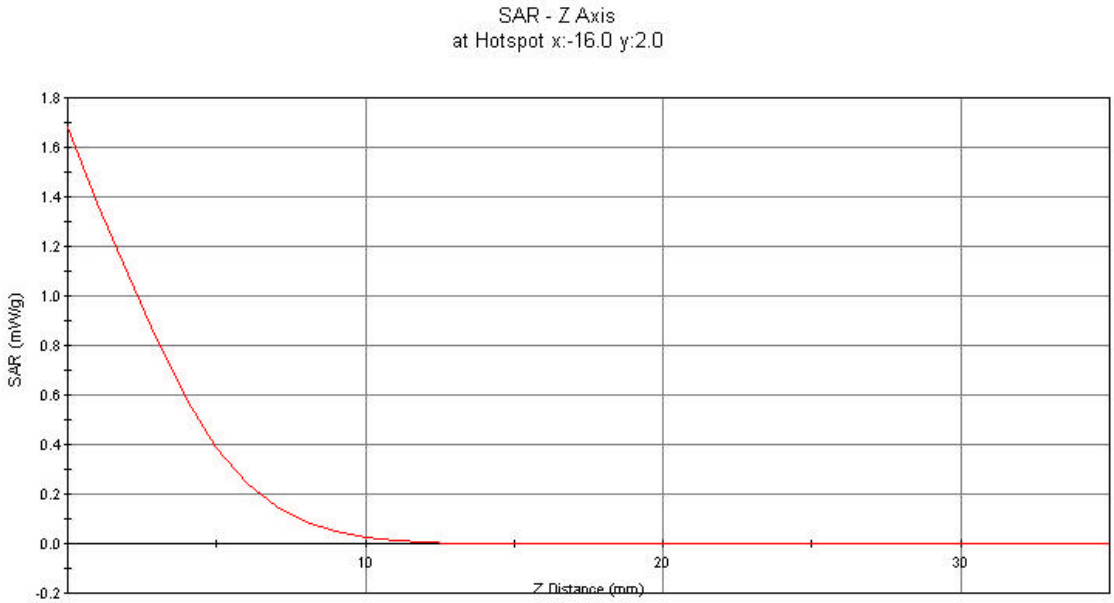

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

APPENDIX B

SETUP PICTURES

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

PICTURE 1

LCD CLOSED

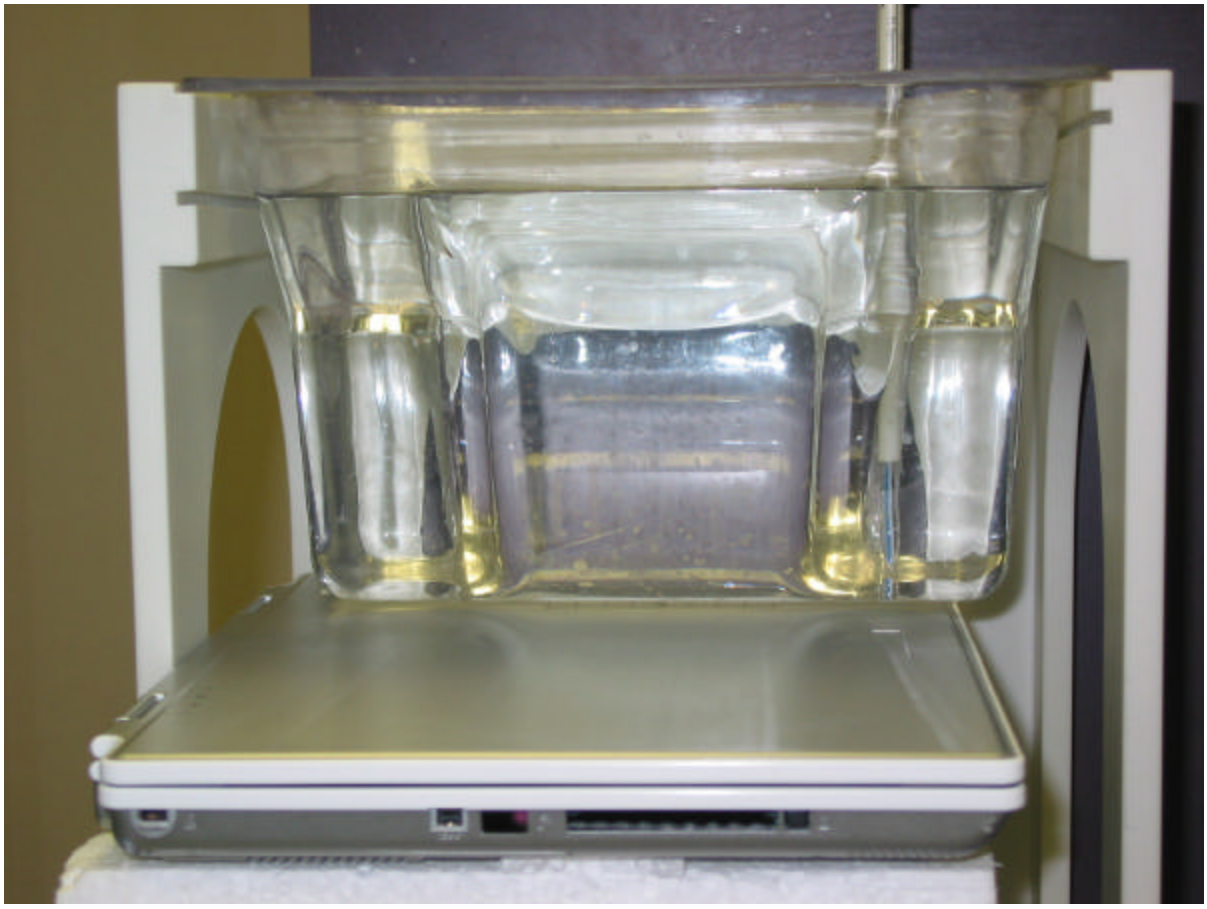

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

PICTURE 2

Keyboard Up

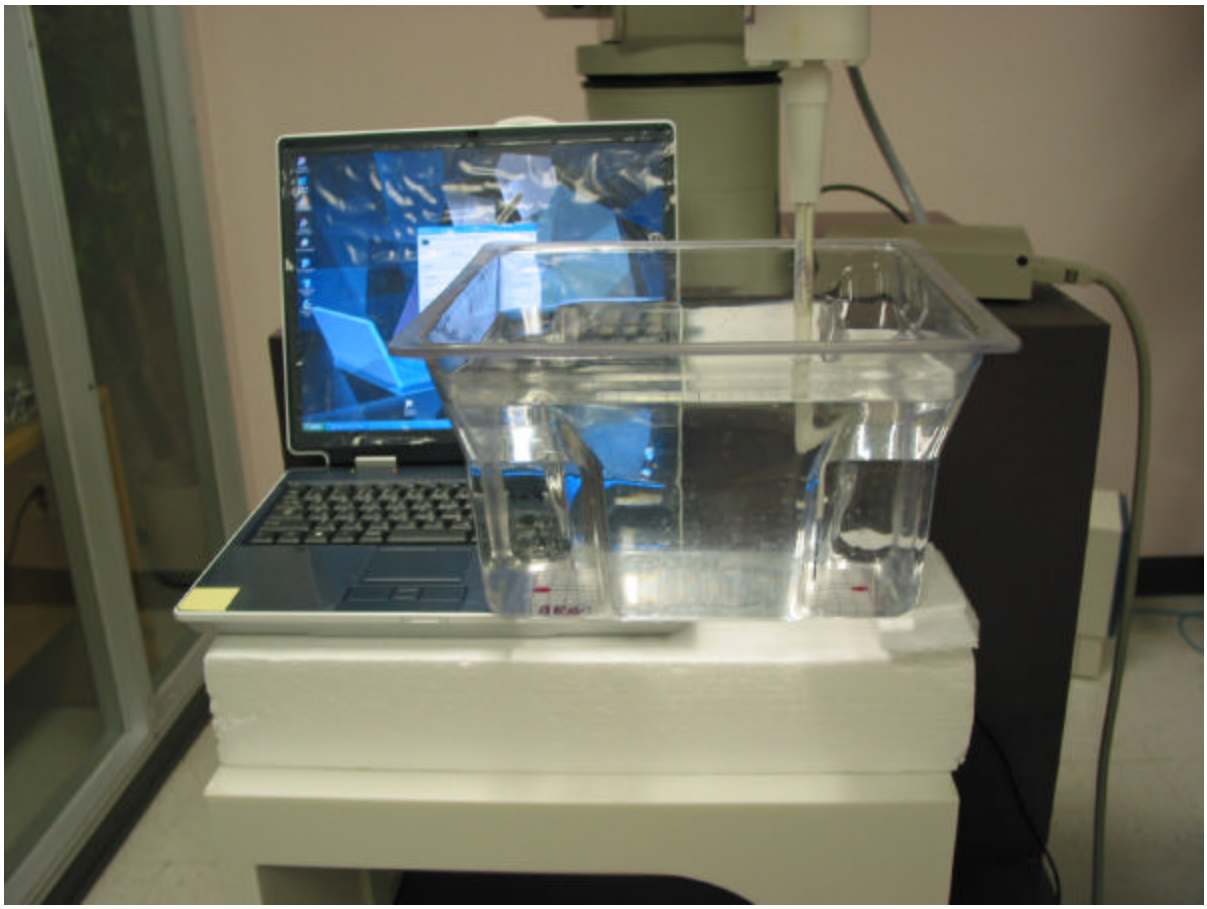

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

PICTURE 3

Keyboard Down

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

PICTURE 4

LHS Left Hand Side

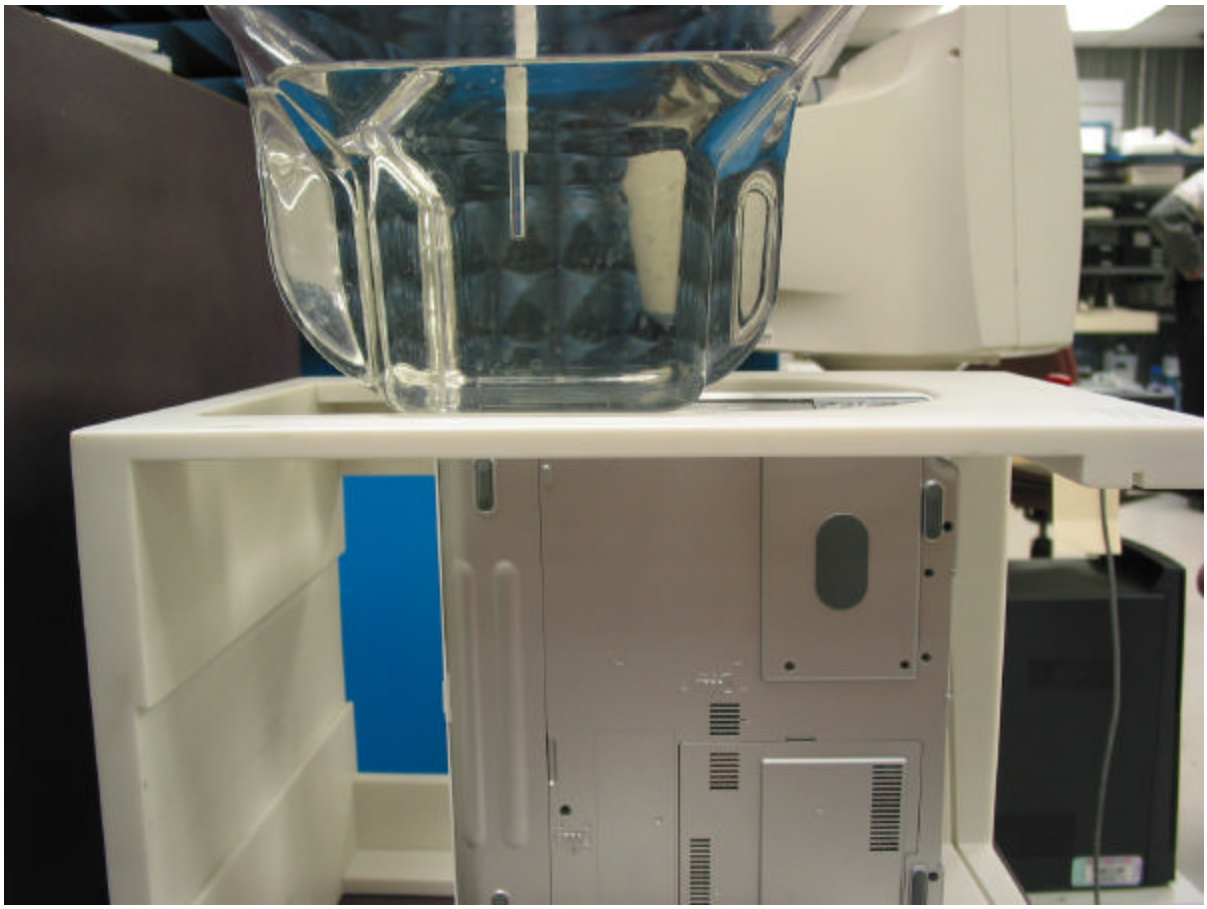

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

PICTURE 5

RHS Right Hand Side

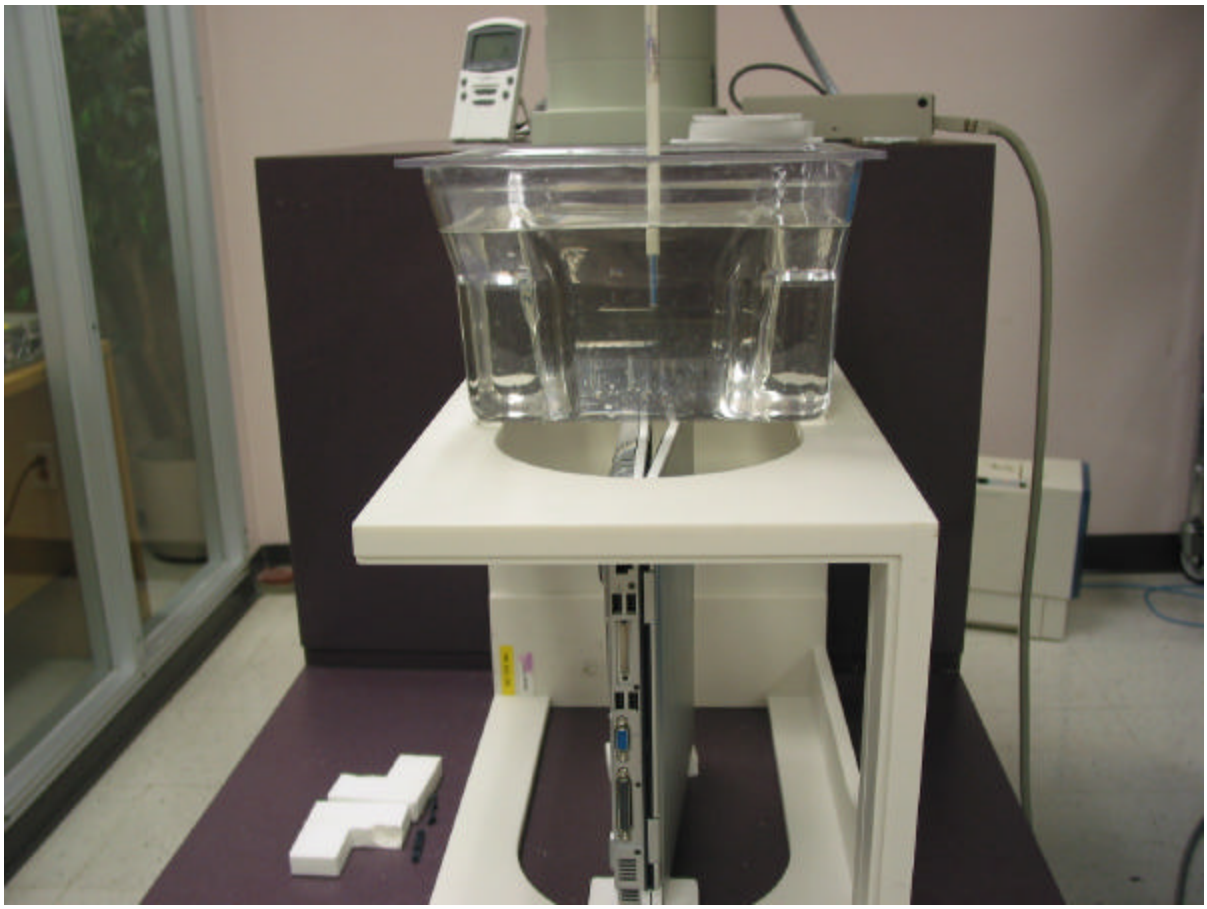

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Appendix C

Validation Scan Results

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

VALIDATION SCAN

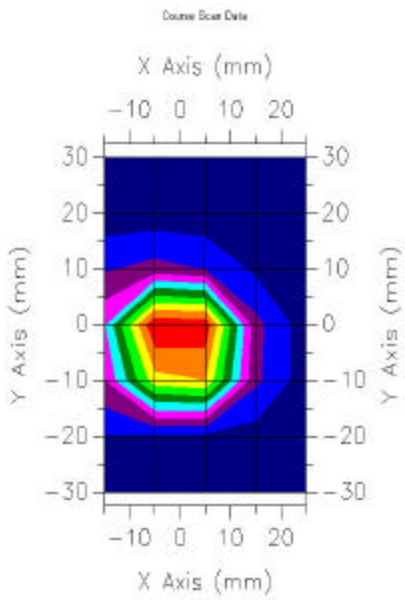

Date:30th May 2003
Frequency: 5240 MHz
Tissue Type: Muscle
Epsilon: 44.0
Sigma: 6.60
Tissue Calibration Date: 30th May 2003
Conversion Factor: 3.0
Input Power to Dipole: 0.1 W (Normalized to 1W)
Duty Cycle: 1
Distance from Dipole to Tissue: 10 mm
Tissue Temperature: 21◦C
Tissue Depth: 15 cm

Measured 1 Gram SAR (W/Kg)	Target 1 Gram SAR (W/Kg)	Delta (%)
115.8	119.2	+/-2.0

Measured 10 Gram SAR (W/Kg)	Target 10 Gram SAR (W/Kg)	Delta (%)
33.4	35.3	+/-5

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Appendix d: Uncertainty Budget

Intel dual band Mini PCI Type 3B Wireless LAN Adapter model WM3B2100A located inside the Acer Travelmate laptop C110

Source of Uncertainty	Description (Annex)	Tolerance Value	Probability Distribution	Divisor	c_i^1 (1-g)	c_i^1 (10-g)	Standard Uncertainty (1-g)	Standard Uncertainty (10-g)	v_i^2 or v_{eff}
Measurement System									
Probe Calibration	E1.1	3.5	normal	1	1	1	3.5	3.5	
Axial Isotropy	E1.2	3.7	rectangular	3	$(1\text{-cp})^{1/2}$	(1-cp)1/2	1.5	1.5	
Hemispherical Isotropy	E1.2	10.9	rectangular	3	cp	cp	4.4	4.4	
Boundary Effect	E1.3	1.0	rectangular	3	1	1	0.6	0.6	
Linearity	E1.4	4.7	rectangular	3	1	1	2.7	2.7	
Detection Limit	E1.5	1.0	rectangular	3	1	1	0.6	0.6	
Readout Electronics	E1.6	1.0	normal	1	1	1	1.0	1.0	
Response Time	E1.7	0.8	rectangular	3	1	1	0.5	0.5	
Integration Time	E1.8	1.7	rectangular	3	1	1	1.0	1.0	
RF Ambient Condition	E5.1	3.0	rectangular	3	1	1	1.7	1.7	
Probe Positioner Mech. Restrictions	E5.2	0.4	rectangular	3	1	1	0.2	0.2	
Probe Positioning with respect to Phantom Shell	E5.3	2.9	rectangular	3	1	1	1.7	1.7	
Extrapolation and Integration	E4.2	3.7	rectangular	3	1	1	2.1	2.1	
Test Sample Positioning	E3.1.3	4.0	normal	1	1	1	4.0	4.0	11
Device Holder Uncertainty	E3.1.2	2.0	normal	1	1	1	2.0	2.0	8
Drift of Output Power	Section 5.6.2	0.0	rectangular	3	1	1	0.0	0.0	
Phantom and Setup									
Phantom Uncertainty (shape and thickness tolerance)	E2.1	3.4	rectangular	3	1	1	2.0	2.0	
Liquid Conductivity (target)	E2.2	13.0	rectangular	3	0.7	0.5	5.3	3.8	
Liquid Conductivity (meas.)	E2.2	2.0	rectangular	3	0.7	0.5	0.8	0.6	
Liquid Permittivity (target)	E2.2	2.0	rectangular	3	0.6	0.5	0.7	0.6	
Liquid Permittivity (meas.)	E2.2	2.0	rectangular	3	0.6	0.5	0.7	0.6	
Combined Uncertainty			RSS				10.3	9.5	
Combined Uncertainty **(coverage factor = 2)**			Normal (k=2)				20.6	19.1	

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Appendix E

Probe Calibration Certificate

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

NCL CALIBRATION LABORATORIES

Calibration File No.: CP-255

C E R T I F I C A T E O F C A L I B R A T I O N

It is certified that the equipment identified below has been calibrated in the **NCL CALIBRATION LABORATORIES** by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe 5240 MHz

Manufacturer: APREL Laboratories
Model No.: E-010
Serial No.: 163

Calibration Procedure: SSI/DRB-TP-D01-032
Project No: Internal Project

Calibrated: 2 December 2002
Released on: 2 December 2002

In accordance with ISO-17025 this calibration certificate is only valid when presented or reproduced with the full calibration report.

Released By: _____

NCL CALIBRATION LABORATORIES

51 SPECTRUM WAY
NEPEAN, ONTARIO
CANADA K2R 1E6

Division of APREL Lab.
TEL: (613) 820-4988
FAX: (613) 820-4161

© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

INTRODUCTION

This Calibration Report reproduces the results of the calibration performed in line with the SSI/DRB-TP-D01-032 E-Field Probe Calibration Procedure. The results contained within this report are for APREL E-Field Probe E-010 168.

REFERENCES

SSI/DRB-TP-D01-032 E-Field Probe Calibration Procedure
IEEE P-1528 *DRAFT* "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"
SSI-TP-011 Tissue Calibration Procedure

Conditions

Probe 163 was a new probe taken from stock prior to calibration.

Ambient Temperature of the Laboratory: 21.5 °C +/- 0.5 °C
Temperature of the Tissue: 20.5 °C +/- 0.5 °C

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

CALIBRATION RESULTS SUMMARY

Probe Type: E-Field Probe E-010

Serial Number: 163

Frequency: 5240 MHz

Sensor Offset: 3.0 mm

Sensor Length: **3.0 mm**

Tip Enclosure: **Glass***

Tip Diameter: **7 mm**

Tip Length: **40 mm**

Total Length: **290 mm**

*Resistive to recommended tissue recipes per IEEE-P1528

SENSITIVITY IN AIR

Channel X: 0.58 ìV/(V/m)^2
Channel Y: 0.58 ìV/(V/m)^2
Channel Z: 0.58 ìV/(V/m)^2

Diode Compression Point: 76 mV

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

SENSITIVITY IN BODY TISSUE

Frequency: 5240 MHz

Epsilon: 45.0 (+/-10%) **Sigma:** 5.85 S/m (+/-10%)

ConvF

Channel X: 3.0

Channel Y: 3.0

Channel Z: 3.0

Tissue sensitivity values were calculated using a load impedance of 5 MΩ.

Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2% for the distance between the tip of the probe and the tissue boundary, when less than 2.6mm.

Spatial Resolution:

The measured probe tip diameter is 7 mm (+/- 0.01 mm) and therefore meets the requirements of SSI/DRB-TP-D01-032 for spatial resolution.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

RECEIVING PATTERN 5240 MHZ (AIR)

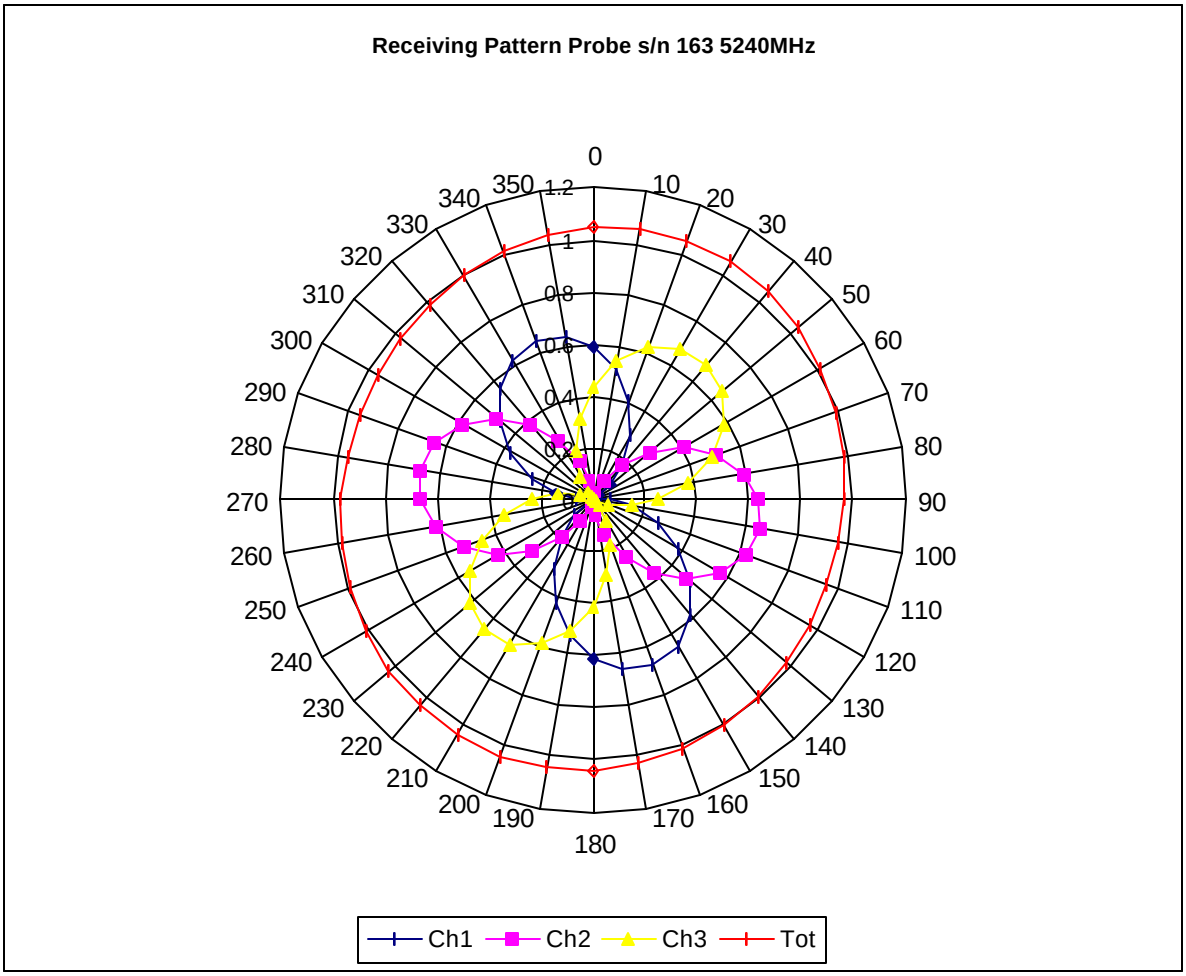

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

ISOTROPY ERROR 5240 MHZ (AIR)

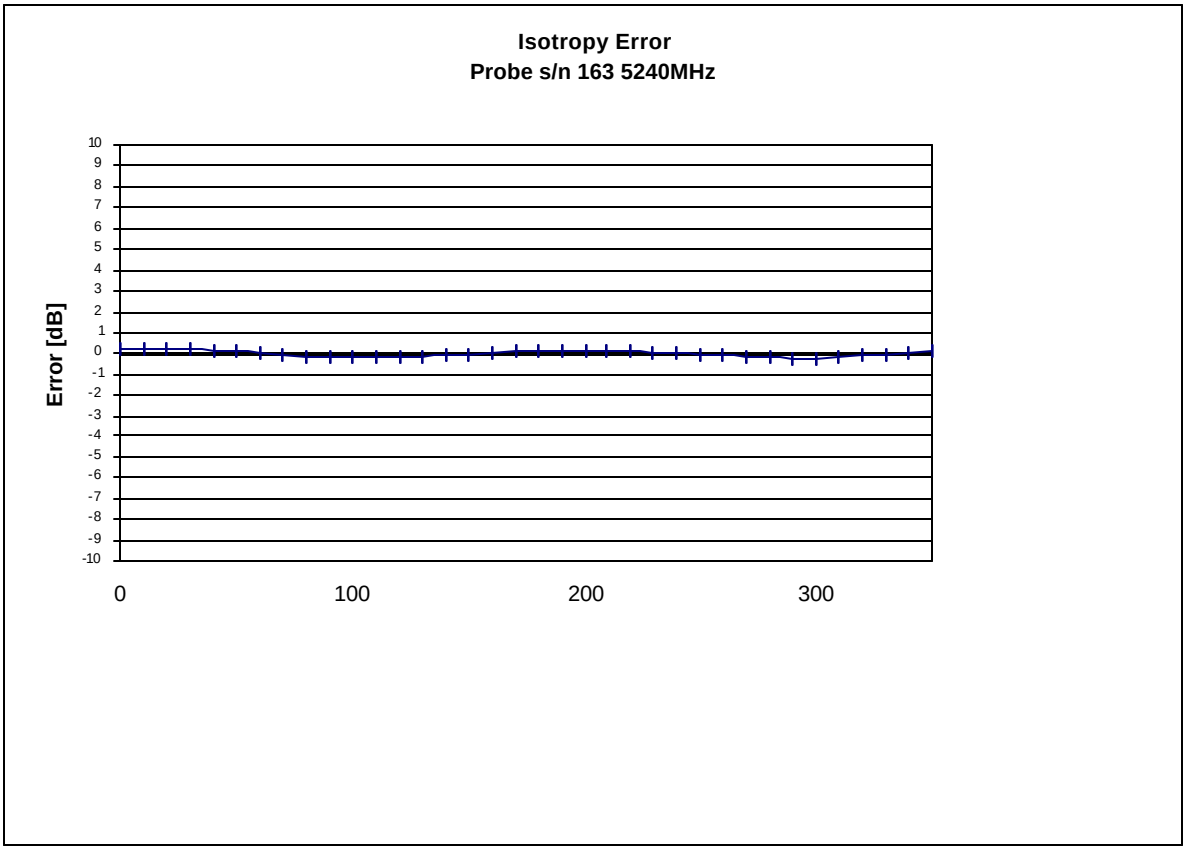

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

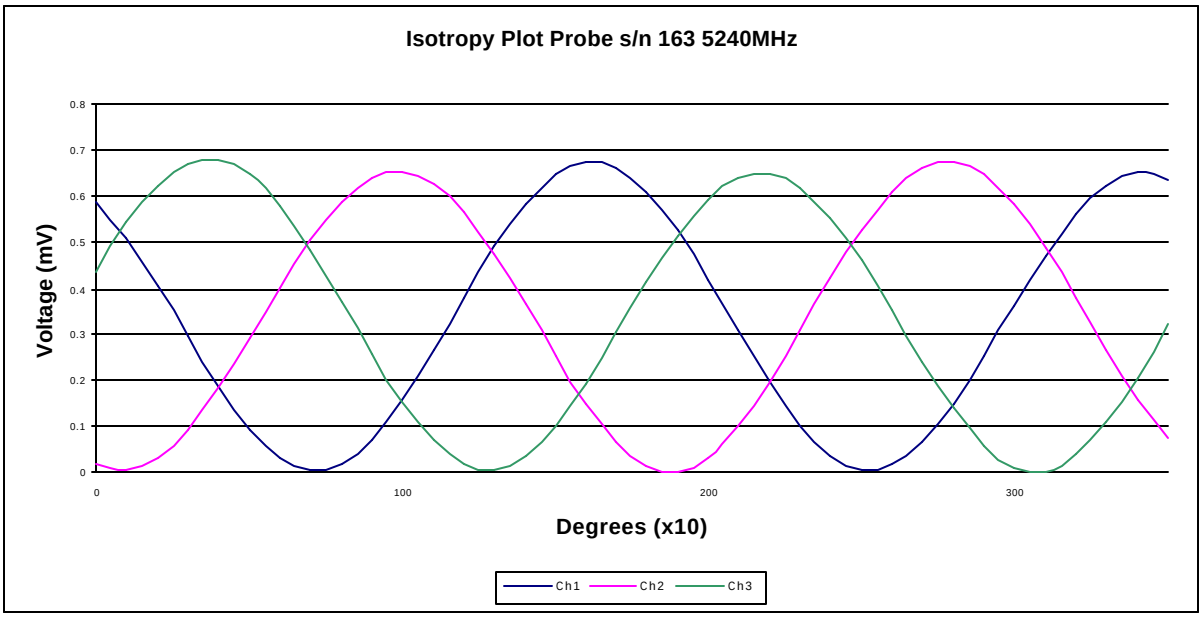

Isotropicity: 0.12 dB

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

DYNAMIC RANGE

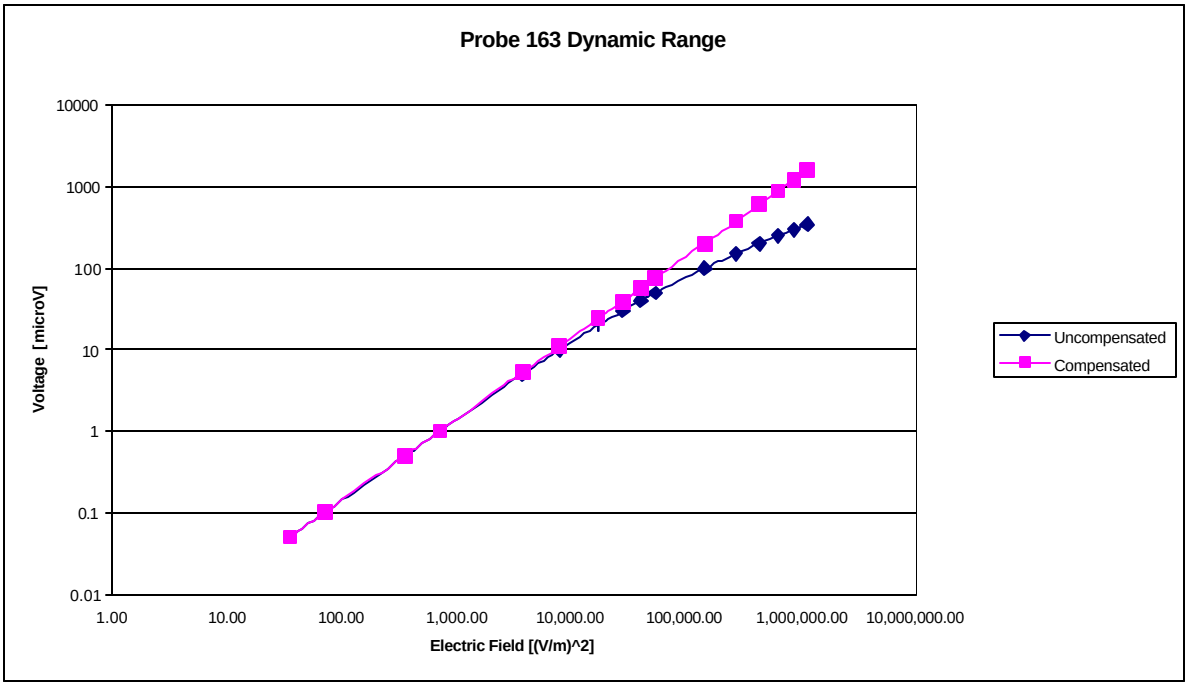

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com
Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Video Bandwidth

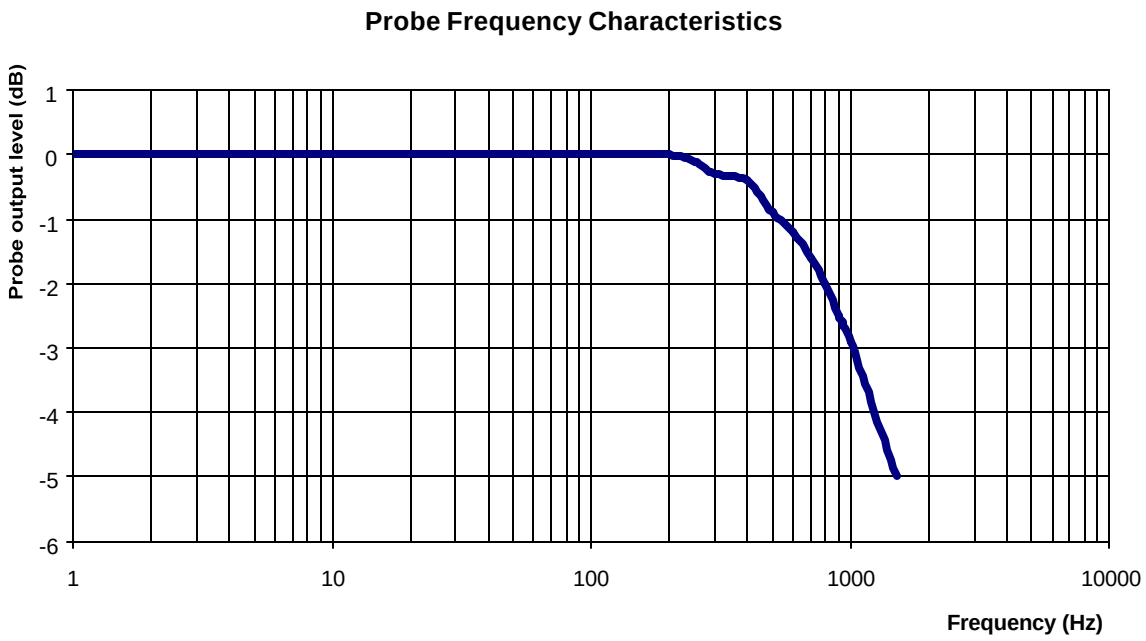

Video Bandwidth at 500 Hz 1 dB
Video Bandwidth at 1.02 KHz: 3 dB

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

CONVERSION FACTOR UNCERTAINTY ASSESSMENT

Frequency: 5240MHz

Epsilon: 45.0 (+/-5%) **Sigma:** 5.85 S/m (+/-10%)

ConvF

Channel X: **3.0** **7%(K=2)**

Channel Y: **3.0** **7%(K=2)**

Channel Z: 3.0 7%(K=2)

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 MΩ.

Boundary Effect:

FOR A DISTANCE OF 2.6MM THE EVALUATED UNCERTAINTY **(INCREASE IN THE PROBE SENSITIVITY)** IS LESS THAN 2%.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

TEST EQUIPMENT

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2003.

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

Appendix F

Dipole Calibration Certificate

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

NCL CALIBRATION LABORATORIES

Calibration File No: DC-0254
Project Number: Internal

C E R T I F I C A T E O F C A L I B R A T I O N

It is certified that the equipment identified below has been calibrated in the **NCL CALIBRATION LABORATORIES** by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

APREL Validation Dipole

Manufacturer: APREL Laboratories
Part number: D-5240-S-1
Frequency: 5.24 GHz
Serial No: 301460

Customer: APREL

Calibrated: 1 December 2002
Released on: 1 December 2002

Released By: _____

NCL CALIBRATION LABORATORIES

51 SPECTRUM WAY
NEPEAN, ONTARIO
CANADA K2R 1E6

Division of APREL Lab.
TEL: (613) 820-4988
FAX: (613) 820-4161

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories

CALIBRATION RESULTS SUMMARY

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Electrical Specification

SWR: 1.21U
Return Loss: -17.9 dB
Impedance: 45.175

System Validation Results

Frequency	1 Gram	10 Gram
5240 GHz	119.2	35.3

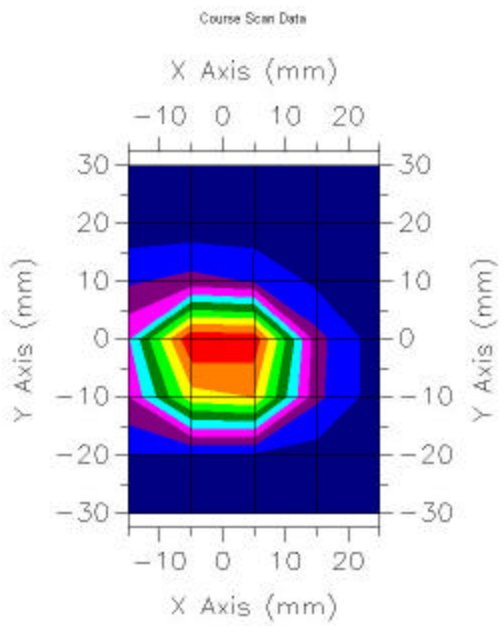

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com
Tel. (613) 820-2730
Fax (613) 820 4161
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories.

INTRODUCTION

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018. The results contained within this report are for Validation Dipole 301532 at 5.8 GHz. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the IEEE mechanical specification. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALIDX-500, along with the APREL Reference E-010 130 MHz to 26 GHz E-Field Probe Serial Number 163.

REFERENCES

SSI-TP-018 Dipole Calibration Procedure
SSI-TP-016 Tissue Calibration Procedure
IEEE P-1528 *DRAFT* "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

Conditions

Dipole 301532 was a new Dipole taken from stock prior to calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5 °C
Temperature of the Tissue: 21 °C +/- 0.5 °C

51 Spectrum Way Tel. (613) 820-2730
Nepean, Ontario, K2R 1E6 Fax (613) 820 4161
e-mail: info@aprel.com
© APREL 2002
This report shall not be reproduced, except in full, without the express written approval of APREL Laboratories.