Testing Laboratory
3023

Test Report No:
2530733R-RFUSV01S-B

TEST REPORT
FCC Rules & Regulations

Product Name	Module
Brand Name	ASUS
Model No.	MPRFMODULE2
FCC ID	MSQMPRFMODULE2
Applicant´s Name / Address	ASUSTeK Computer Inc 1F, No. 15, Lide Rd, Beitou, Taipei, 112 Taiwan
Manufacturer's Name	ASUSTeK COMPUTER INC.
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10-2013
Verdict Summary	IN COMPLIANCE
Documented By April Chen	April Chen
Tested By Bill Lin	Bill Lin
Approved By Steven Tsai	Steven Tsai
Date of Receipt	2025/03/24
Date of Issue	2025/04/28
Report Version	V1.0

INDEX

page

Competences and Guarantees 4
General Conditions 4
Revision History 5
Summary of Test Result 6
1. General Information 7
1.1. EUT Description 7
1.2. EUT Information 9
1.3. Testing Location Information 9
1.4. Measurement Uncertainty 10
1.5. List of Test Equipment 11
2. Test Configuration of EUT 12
2.1. Test Condition 12
2.2. Test Frequency Mode 12
2.3. Duty Cycle 13
2.4. Measurement Configuration 14
2.5. Tested System Details 15
2.6. Configuration of Tested System 15
2.7. EUT Operating Procedures 15
3. AC Power Line Conducted Emission 16
3.1. Test Setup 16
3.2. Test Limit 16
3.3. Test Procedure 16
3.4. Test Result of AC Power Line Conducted Emission 16
4. 6dB Bandwidth 17
4.1. Test Setup 17
4.2. Test Limit 17
4.3. Test Procedures 17
4.4. Test Result of 6dB Bandwidth 17
5. Maximum Peak Conducted Output Power 18
5.1. Test Setup 18
5.2. Test Limit 18
5.3. Test Procedures 18
5.4. Test Result of Maximum Peak Conducted Output Power 18
6. Power Spectral Density 19
6.1. Test Setup 19
6.2. Test Limit 19

6.3. Test Procedures 19
6.4. Test Result of Power Spectral Density 19
7. Antenna Port Conducted Emission 20
7.1. Test Setup 20
7.2. Test Limit 20
7.3. Test Procedure 20
7.4. Test Result of Antenna Port Conducted Emission 20
8. Radiated Emission 21
8.1. Test Setup 21
8.2. Test Limit 22
8.3. Test Procedure 22
8.4. Test Result of Radiated Emission 22
Appendix A. Test Result of AC Power Line Conducted Emission
Appendix B. Test Result of 6dB Bandwidth
Appendix C. Test Result of Maximum Peak Conducted Output Power
Appendix D. Test Result of Power Spectral Density
Appendix E. Test Result of Antenna Port Conducted Emission
Appendix F. Test Result of Radiated Emission
Appendix G. Test Setup Photograph

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.
In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	2025/04/28

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
3	AC Power Line Conducted Emission	PASS	-
4	6dB Bandwidth	PASS	-
5	Maximum Peak Conducted Output Power	PASS	-
6	Power Spectral Density	PASS	-
7	Antenna Port Conducted Emission	PASS	-
8	Radiated Emission	PASS	-

Comments and Explanations
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1. General Information

1.1. EUT Description

Frequency Range	2400 ~ 2483.5 MHz
Operating Frequency / Channel Number	2.4 GHz Wireless (2 Mbps):2402 ~ 2479 MHz / 78 Channels 2.4 GHz Wireless (4 Mbps):2403 ~ 2477 MHz / 75 Channels
Mode	2.4 GHz Wireless
Type of Modulation	GFSK (2 Mbps, 4 Mbps)

Antenna Information				
Item.	Brand Name	Part No.	Type	Gain (dBi)
1	ASUS	20LT0-000UZ000	PIFA	3.88

Channel List for 2.4 GHz Wireless (2 Mbps)

Working Frequency of Each Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	01	2403	02	2404	03	2405
04	2406	05	2407	06	2408	07	2409
08	2410	09	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	--	--	--	--

Channel List for 2.4 GHz Wireless (4 Mbps)

Working Frequency of Each Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2403	01	2404	02	2405	03	2406
04	2407	05	2408	06	2409	07	2410
08	2411	09	2412	10	2413	11	2414
12	2415	13	2416	14	2417	15	2418
16	2419	17	2420	18	2421	19	2422
20	2423	21	2424	22	2425	23	2426
24	2427	25	2428	26	2429	27	2430
28	2431	29	2432	30	2433	31	2434
32	2435	33	2436	34	2437	35	2438
36	2439	37	2440	38	2441	39	2442
40	2443	41	2444	42	2445	43	2446
44	2447	45	2448	46	2449	47	2450
48	2451	49	2452	50	2453	51	2454
52	2455	53	2456	54	2457	55	2458
56	2459	57	2460	58	2461	59	2462
60	2463	61	2464	62	2465	63	2466
64	2467	65	2468	66	2469	67	2470
68	2471	69	2472	70	2473	71	2474
72	2475	73	2476	74	2477	--	--

1.2. EUT Information

EUT Power Type	From DC 5 V

1.3. Testing Location Information

USA	FCC Designation Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No. 85, Wenlin St., Linkou Dist., New Taipei City 244017, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist.,Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual	Test Date
AC Power Line Conducted Emission	Temperature (°C)	10~40 °C	25.5 °C	2025/04/10
	Humidity (%RH)	10~90 %	58.5 %	
Radiated Emission	Temperature (°C)	10~40 °C	24.6 °C	2025/03/31~2025/04/08
	Humidity (%RH)	10~90 %	57.1 %	
RF Conducted Emission	Temperature (°C)	10~40 °C	24.3 °C	2025/04/09
	Humidity (%RH)	10~90 %	51.5 %	

1.4. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
AC Power Line Conducted Emission	±3.50 dB
6dB Bandwidth	±1580.61 Hz
Maximum Peak Conducted Output Power	Spectrum Analyzer: ±2.13 dB Power Meter: ±1.07 dB
Power Spectral Density	±2.13 dB
Antenna Port Conducted Emission	±2.13 dB
Radiated Emission	9 kHz~30 MHz: ±3.30 dB 30 MHz~1 GHz: ±4.79 dB 1 GHz~18 GHz: ±4.17 dB 18 GHz~40 GHz: ±3.32 dB
Duty Cycle	±0.51 %

1.5. List of Test Equipment

For Conduction Measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2024/06/24	2025/06/23
V	Two-Line V-Network	R&S	ENV216	101306	2024/04/01	2026/03/31
V	Two-Line V-Network	R&S	ENV216	101307	2023/08/17	2025/08/16
V	Coaxial Cable	SUHNER	RG400_BNC	RF001	2025/01/10	2026/01/09

Note:
1. Two-Line V-Network is calibrated every two years, the other equipment is calibrated every year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103466	2024/12/18	2025/12/17
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000539	2024/05/07	2025/05/06
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240002	2024/05/08	2025/05/07
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240003	2024/05/08	2025/05/07

Note:
1. All equipment is calibrated every year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version : DTC_RF_Tool_Release V100

For Radiated Measurements /HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	TESEQ	HLA6121	49611	2025/02/18	2026/02/17
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-0675	2023/08/09	2025/08/08
V	Horn Antenna	Com-Power	AH-840	101101	2023/12/04	2025/12/03
V	Horn Antenna	RF SPIN	DRH18-E	210507A18ES	2024/05/15	2025/05/14
V	Pre-Amplifier	SGH	SGH0301-9	20211007-11	2025/01/10	2026/01/09
V	Pre-Amplifier	SGH	PRAMP118	20200701	2025/01/10	2026/01/09
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2025/01/10	2026/01/09
V	Pre-Amplifier	EMCI	EMC184045SE	980369	2025/01/10	2026/01/09
V	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160311	2025/01/10	2026/01/09
V	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242	2025/01/10	2026/01/09
V	Filter	MICRO TRONICS	BRM20887	G003	2025/01/05	2026/01/04
	Filter	MICRO TRONICS	BRM50716	G196	2025/01/05	2026/01/04
V	EMI Test Receiver	R&S	ESR3	102793	2024/12/06	2025/12/05
V	Spectrum Analyzer	R&S	FSV3044	101114	2025/02/26	2026/02/25
V	Coaxial Cable	SGH	SGH18	2021005-1	2025/01/10	2026/01/09
V	Coaxial Cable	SGH	SGH18	202108-4	2025/01/10	2026/01/09
V	Coaxial Cable	SGH	HA800	GD20110223-1	2025/01/10	2026/01/09
V	Coaxial Cable	SGH	HA800	GD20110222-8	2025/01/10	2026/01/09

Note:
1. Bi-Log Antenna and Horn Antenna (AH-840) are calibrated every two years, the other equipment is calibrated every year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition	
Testing Voltage	DC 5 V (Power by Test Fixture)

2.2. Test Frequency Mode

Test Software Version	ASUSTek / Version 1.03

Modulation	Frequency (MHz)	Power Setting
GFSK (2 Mbps)	2402	5
	2440	5
	2479	5
GFSK (4 Mbps)	2403	5
	2440	5
	2477	5

2.3. Duty Cycle

Modulation	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	VBW (Hz)
GFSK (2 Mbps)	0.1980	0.6260	31.63	5.00	10000
GFSK (4 Mbps)	0.1040	0.6260	16.61	7.80	10000

GFSK (2 Mbps)

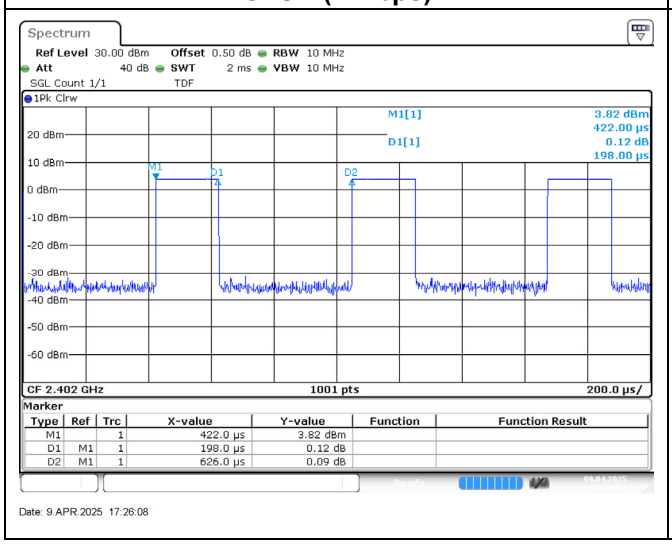

GFSK (4 Mbps)

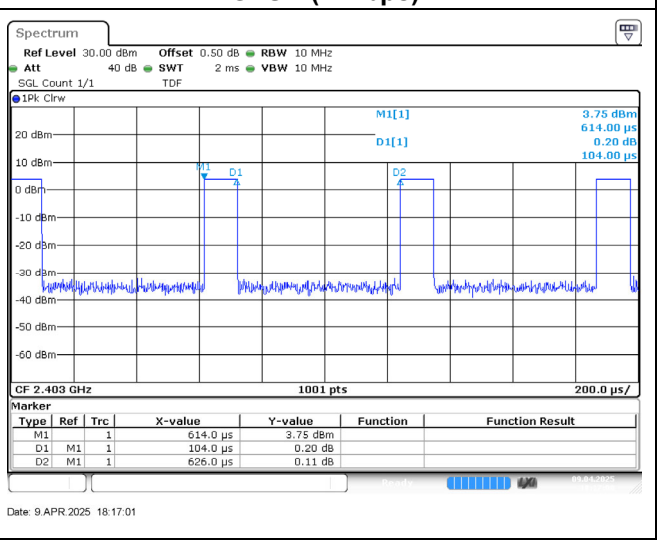

2.4. Measurement Configuration

Test Mode	Mode 1 (Transmit)	GFSK (2 Mbps)
		GFSK (4 Mbps)

Note:

1. Determining compliance shall be based on the results of the compliance measurement, without taking measurement instrumentation uncertainty into account.

2.5. Tested System Details

No.	Equipment	Brand Name	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	Latitude E5440	FS9TK32	N/A
2	Test Fixture	SHENZHEN HENGBAOSHI P.C.B	54H20_SW_debug-V02	N/A	N/A

2.6. Configuration of Tested System

Connection Diagram

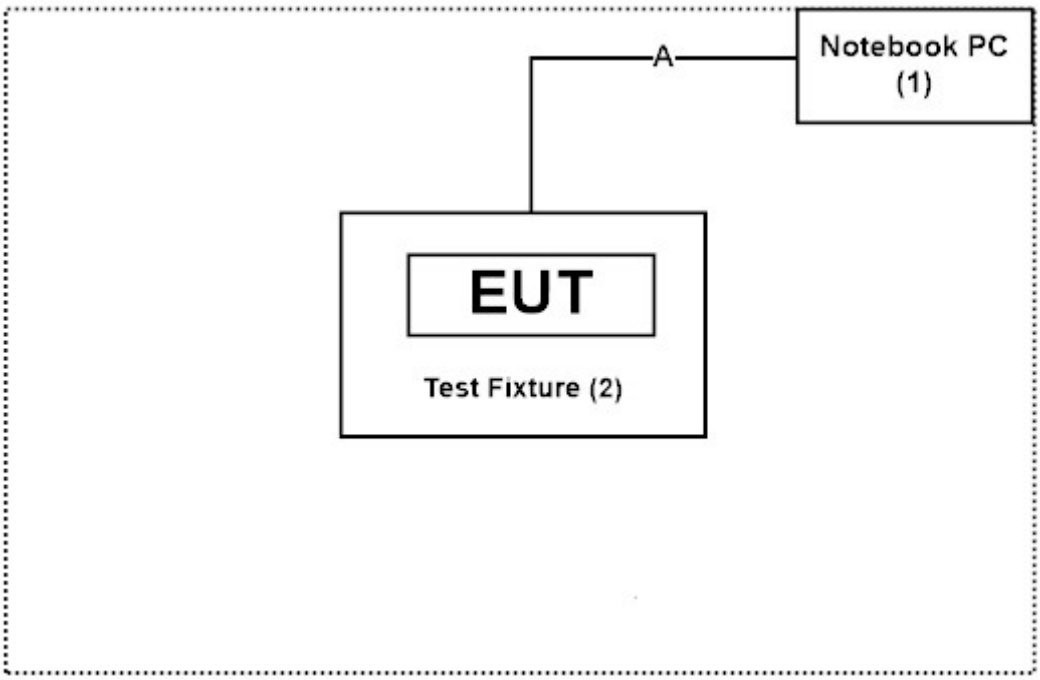

Signal Cable Type		Signal Cable Description
A	USB Cable	Shielded, 0.5 m

2.7. _EUT Operating Procedures

1	Setup the EUT as shown in Section 2.6.
2	Execute software “ASUSTek / Version 1.03” on the Notebook PC.
3	Configure the test mode, the test channel, and the data rate.
4	Press “OK” to start the continuous Transmit.
5	Verify that the EUT works properly.

3. AC Power Line Conducted Emission

3.1. Test Setup

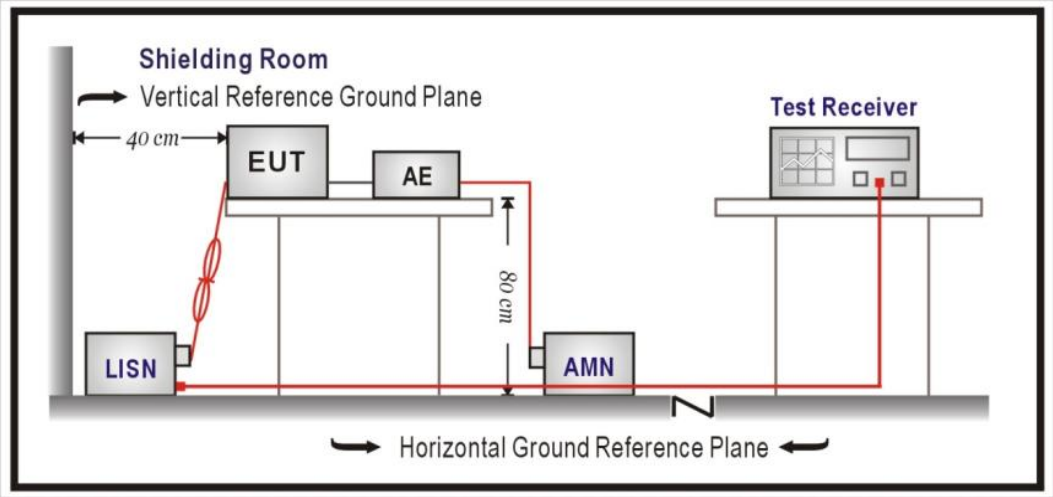

3.2. Test Limit

Frequency (MHz)	QP (dBμV)	AV (dBμV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 for AC Power Line Conducted Emissions.

3.4. Test Result of AC Power Line Conducted Emission

Refer as Appendix A

4. 6dB Bandwidth

4.1. Test Setup

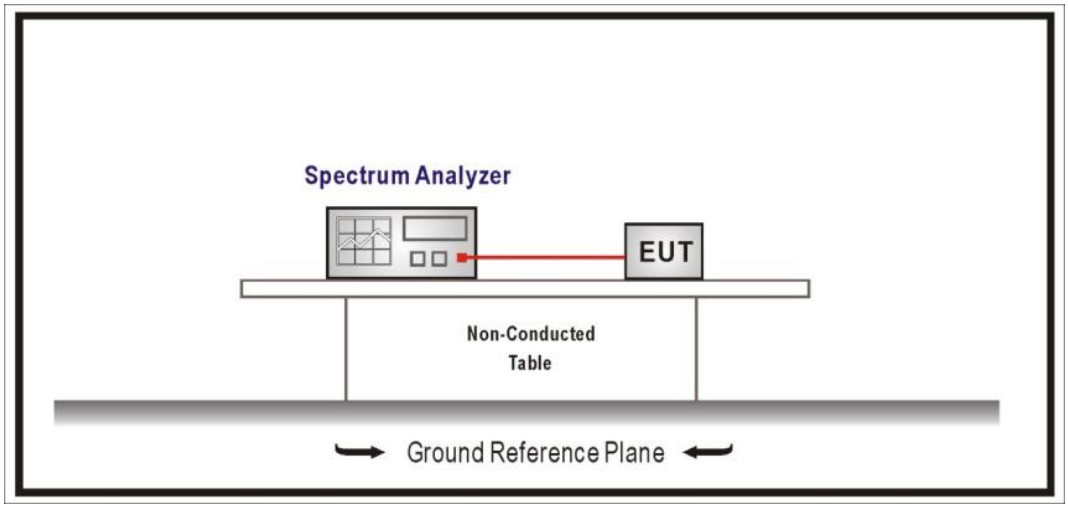

4.2. Test Limit

The 6 dB bandwidth: ≧ 500 kHz.

4.3. Test Procedures

The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

4.4. Test Result of 6dB Bandwidth

Refer as Appendix B

5. Maximum Peak Conducted Output Power

5.1. Test Setup

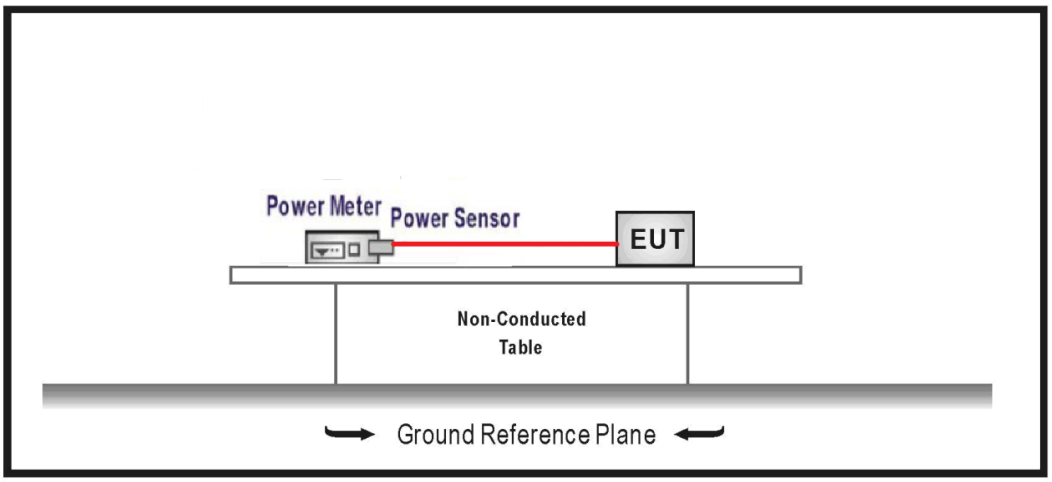

5.2. Test Limit

The Maximum Peak Conducted Output Power shall be less 1 Watt.

5.3. Test Procedures

The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

5.4. Test Result of Maximum Peak Conducted Output Power

Refer as Appendix C

6. Power Spectral Density

6.1. Test Setup

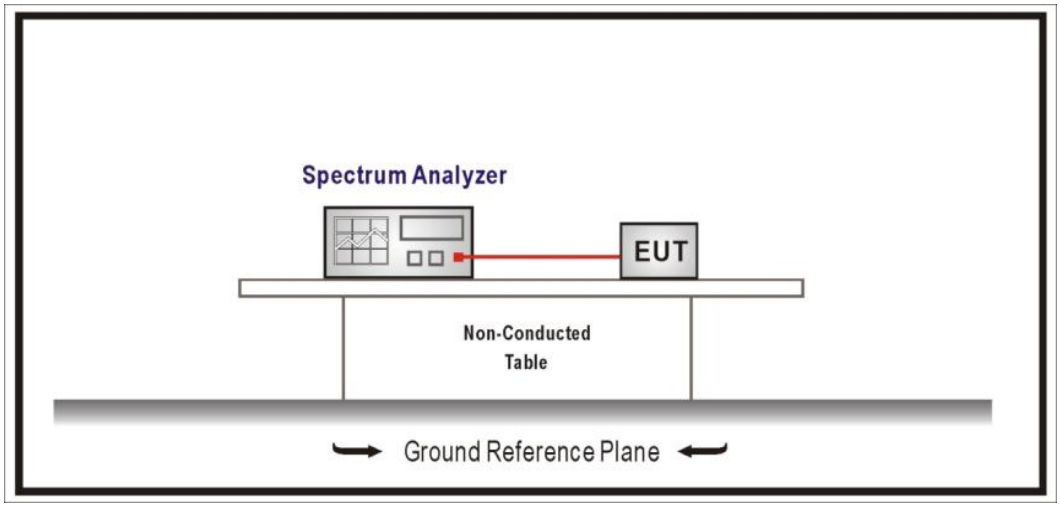

6.2. Test Limit

The power spectral density conducted from the intentional radiated to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedures

The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

6.4. Test Result of Power Spectral Density

Refer as Appendix D

7. Antenna Port Conducted Emission

7.1. Test Setup

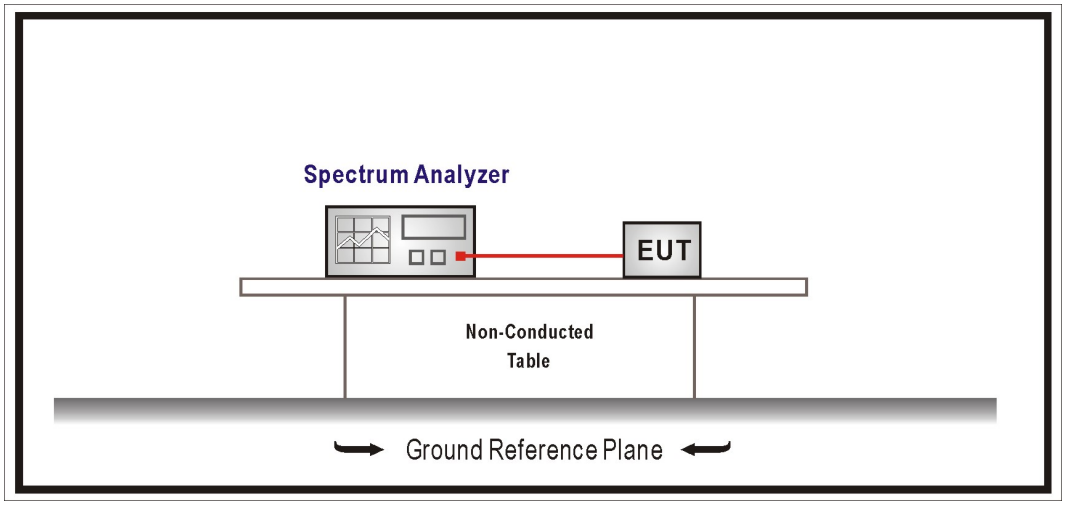

7.2. Test Limit

RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30

Remarks:

1. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limit.
2. If the transmitter complies with the conducted power limit based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074.

7.4. Test Result of Antenna Port Conducted Emission

Refer as Appendix E

8. Radiated Emission

8.1. Test Setup

9 kHz ~ 30 MHz

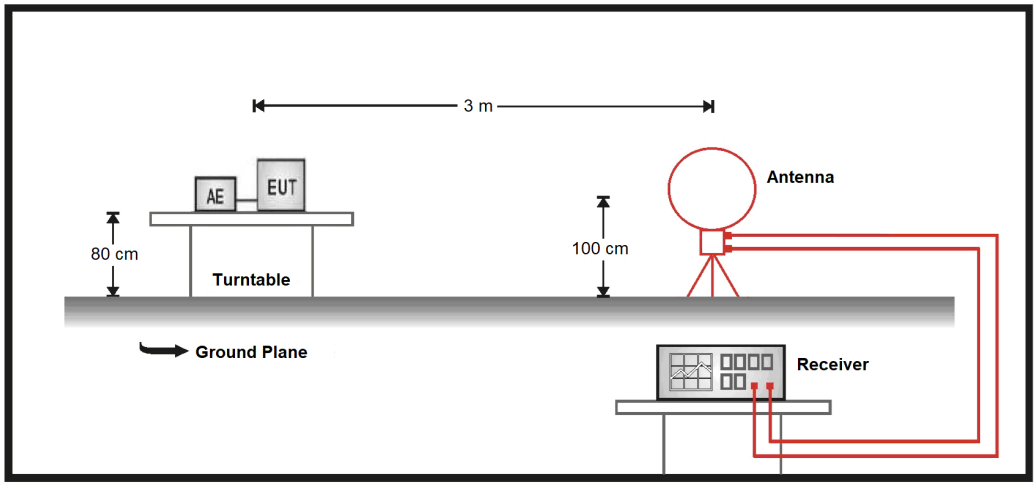

30 MHz ~ 1 GHz

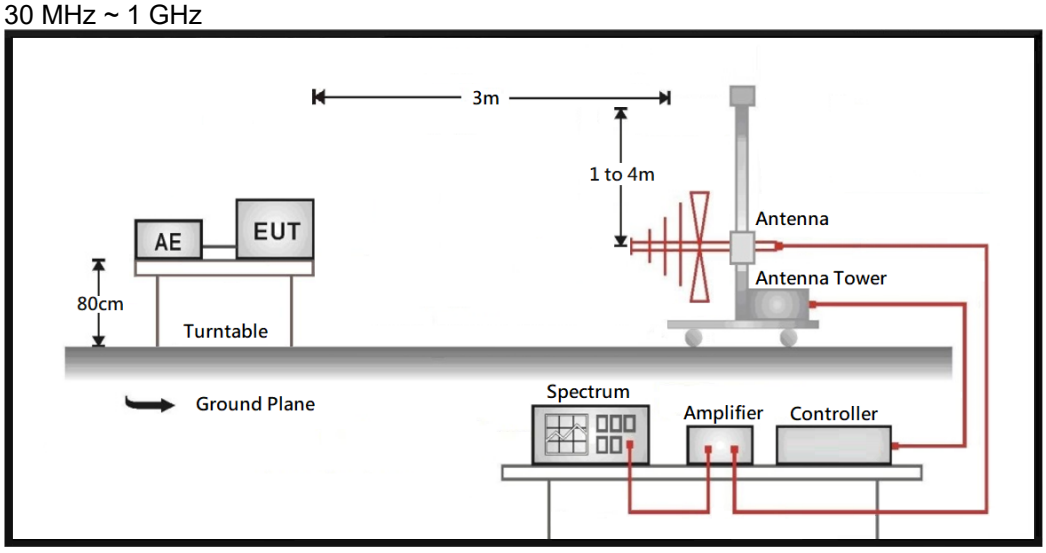

Above 1 GHz

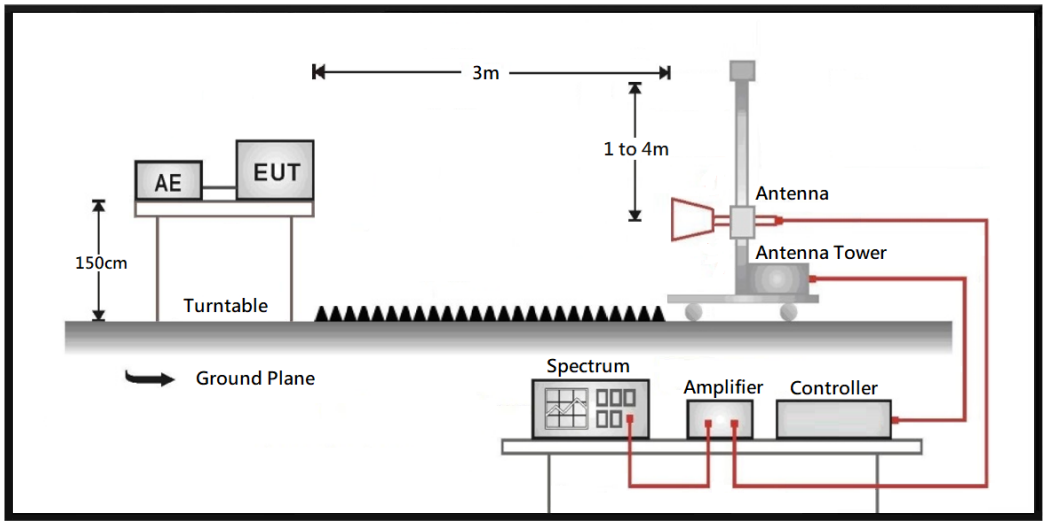

8.2. Test Limit

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBμV/m) = 20 log Field strength (μV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074.

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

On any frequency or frequencies form 9 kHz(inculde The the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limit shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limit shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz and above 1 GHz is 1 MHz.

8.4. Test Result of Radiated Emission

Refer as Appendix F