


APPENDIX A: TEST DATA

Liquid Level Photo

MSL 2450MHz D=151mm



MSL 5800MHz D=150mm

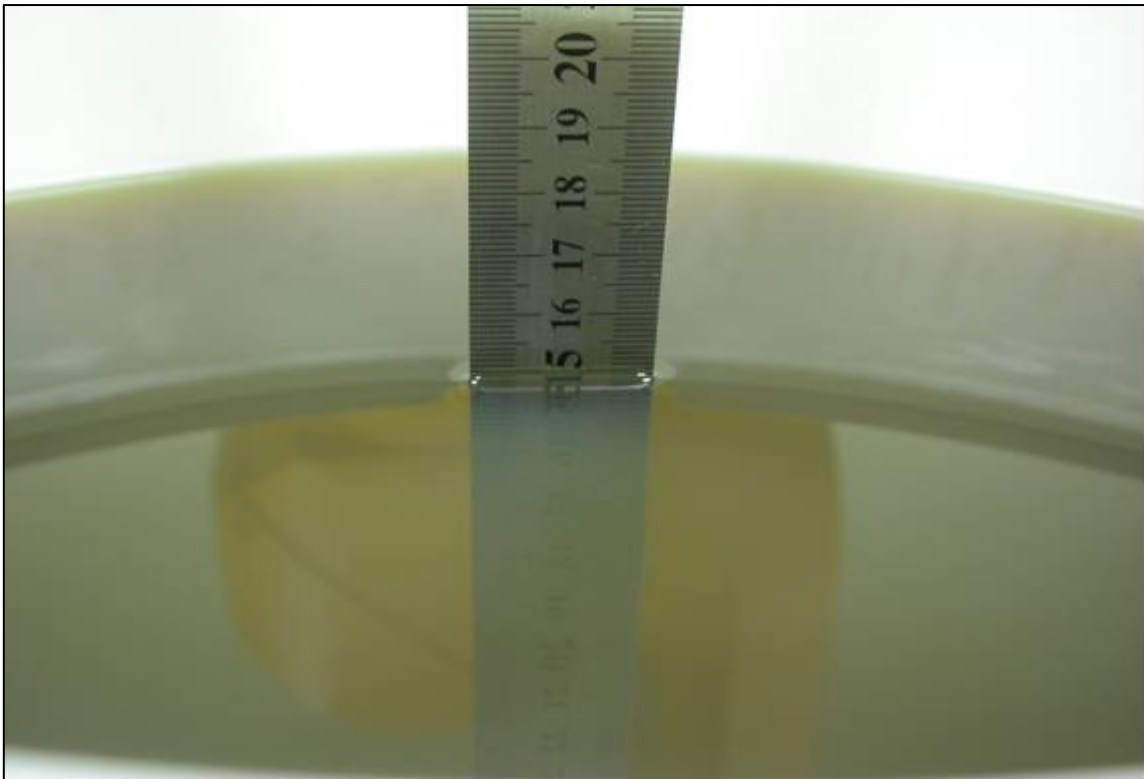

Date/Time: 2006/3/8 10:26:19

Test Laboratory: Advance Data Technology

R1F-11b-Ch1-Mode 1

DUT: Tablet PC ; Type: R1F ; Test Frequency: 2412 MHz

Communication System: 802.11b ; Frequency: 2412 MHz ; Duty Cycle: 1:1 ; Modulation type: CCK
Medium: MSL2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³ ; Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)

Antenna type : PIFA Antenna ; Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Low Channel 1/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.403 mW/g


Low Channel 1/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.434 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

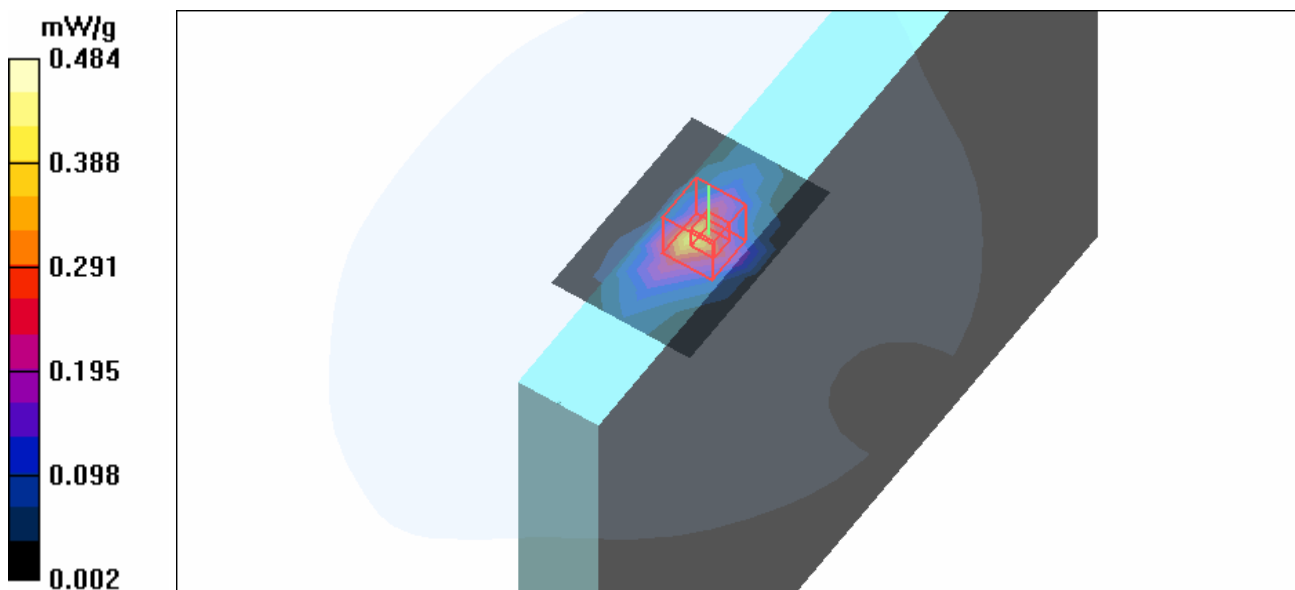

Date/Time: 2006/3/8 10:41:16

Test Laboratory: Advance Data Technology

R1F-11b-Ch6-Mode 1

DUT: Tablet PC ; Type: R1F ; Test Frequency: 2437 MHz

Communication System: 802.11b ; Frequency: 2437 MHz ; Duty Cycle: 1:1 ; Modulation type: CCK
Medium: MSL2450 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.99 \text{ mho/m}$; $\epsilon_r = 51$; $\rho = 1000 \text{ kg/m}^3$; Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)

Antenna type : PIFA Antenna ; Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 6/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.449 mW/g


Mid Channel 6/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.8 V/m

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 0.658 mW/g

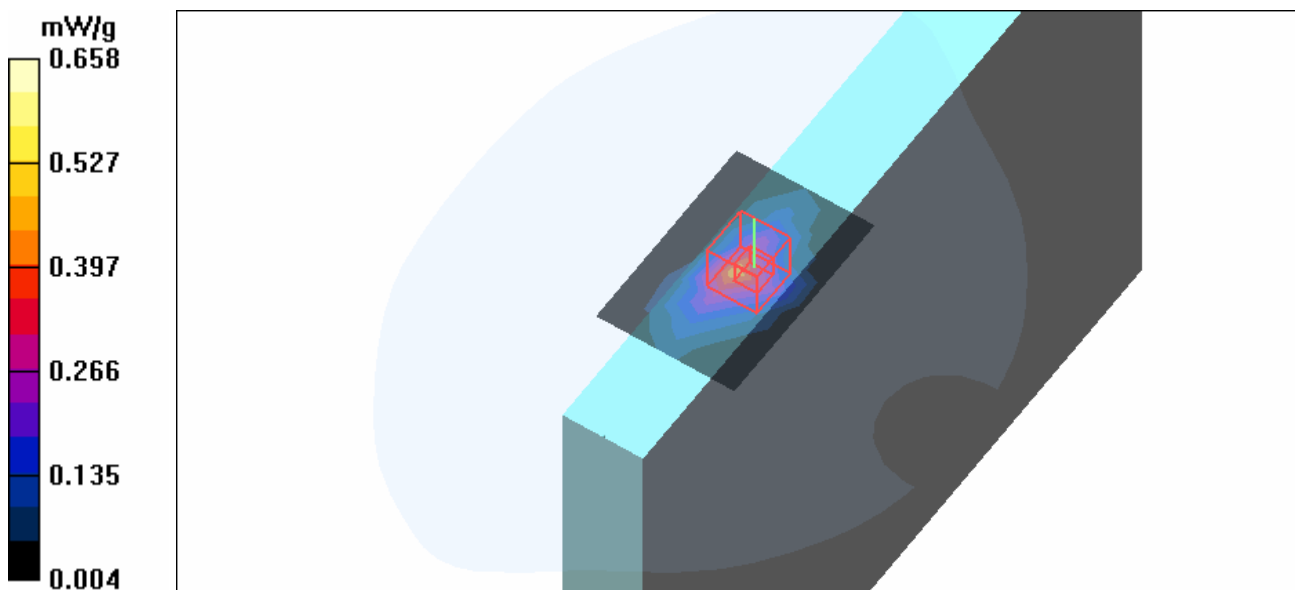

Date/Time: 2006/3/8 10:55:54

Test Laboratory: Advance Data Technology

R1F-11b-Ch11-Mode 1

DUT: Tablet PC ; Type: R1F ; Test Frequency: 2462 MHz

Communication System: 802.11b ; Frequency: 2462 MHz ; Duty Cycle: 1:1 ; Modulation type: CCK
Medium: MSL2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³ ; Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)

Antenna type : PIFA Antenna ; Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

High Channel 11/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.548 mW/g


High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 13.3 V/m

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.258 mW/g

Maximum value of SAR (measured) = 0.679 mW/g

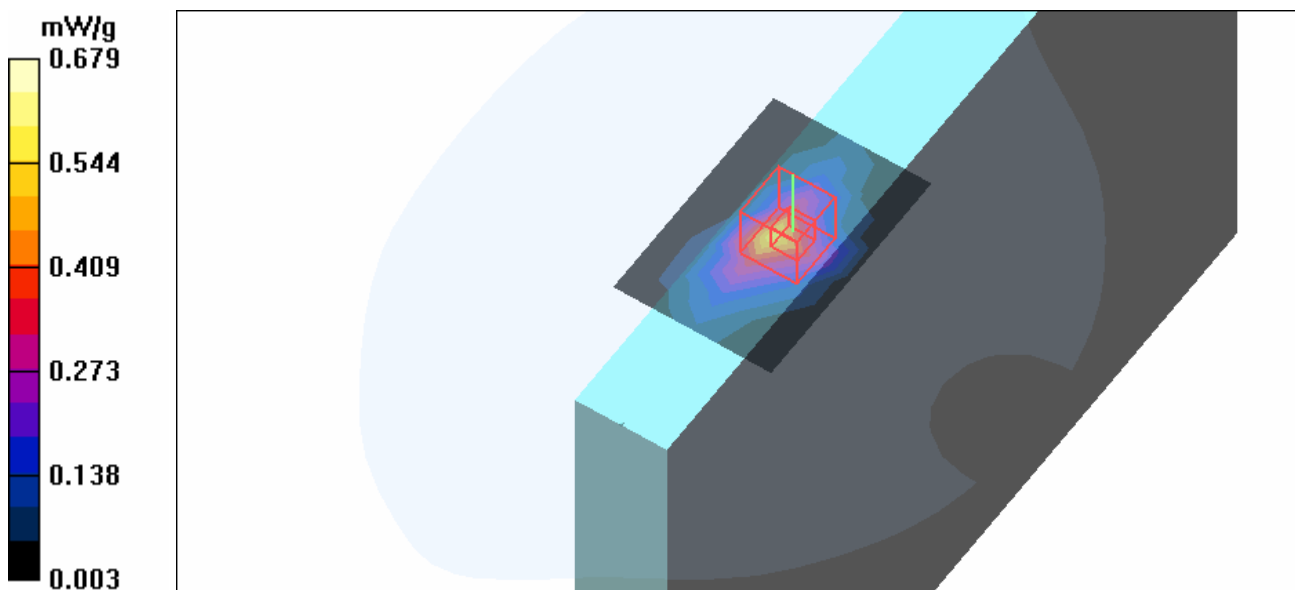

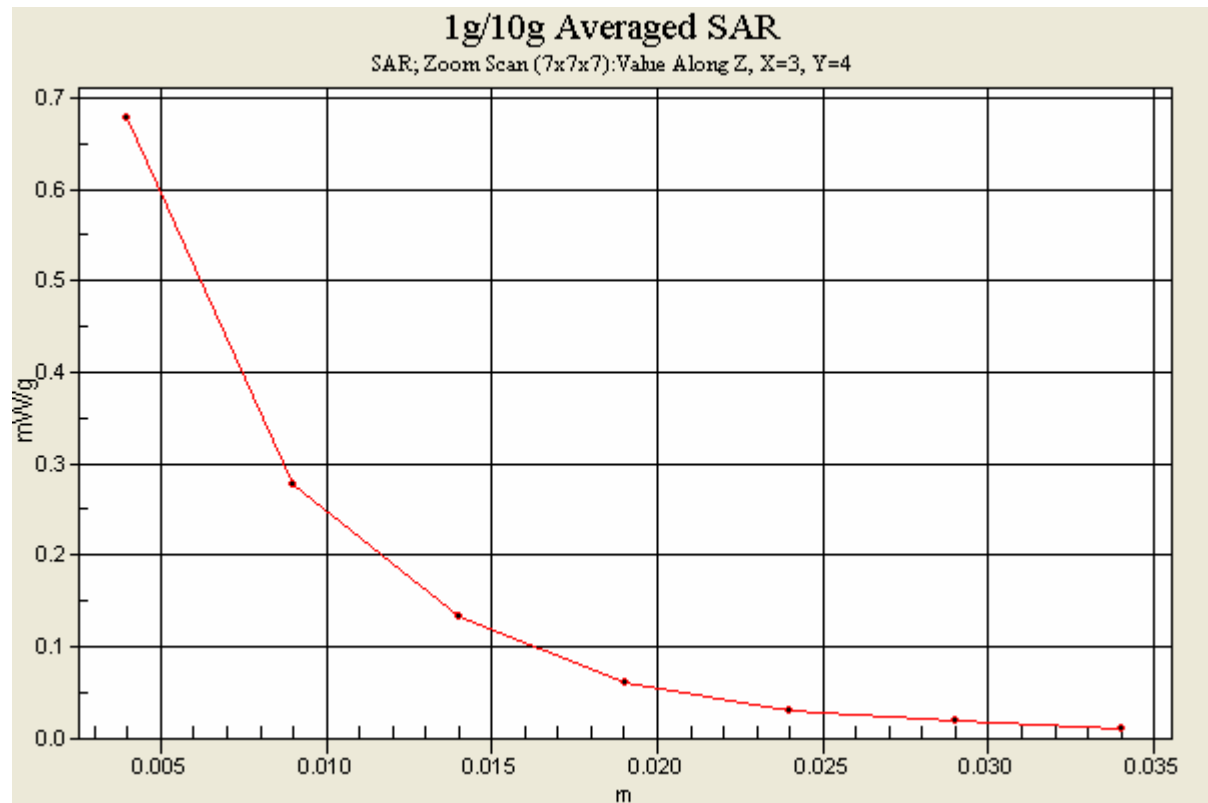

Date/Time: 2006/3/8 11:12:43

Test Laboratory: Advance Data Technology

R1F-11g-Ch11-Mode 2

DUT: Tablet PC ; Type: R1F ; Test Frequency: 2462 MHz

Communication System: 802.11g ; Frequency: 2462 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
 Medium: MSL2450 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2.03 \text{ mho/m}$; $\epsilon_r = 50.9$; $\rho = 1000 \text{ kg/m}^3$; Liquid level : 151 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

High Channel 11/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.228 mW/g


High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.54 V/m

Peak SAR (extrapolated) = 0.726 W/kg

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.283 mW/g

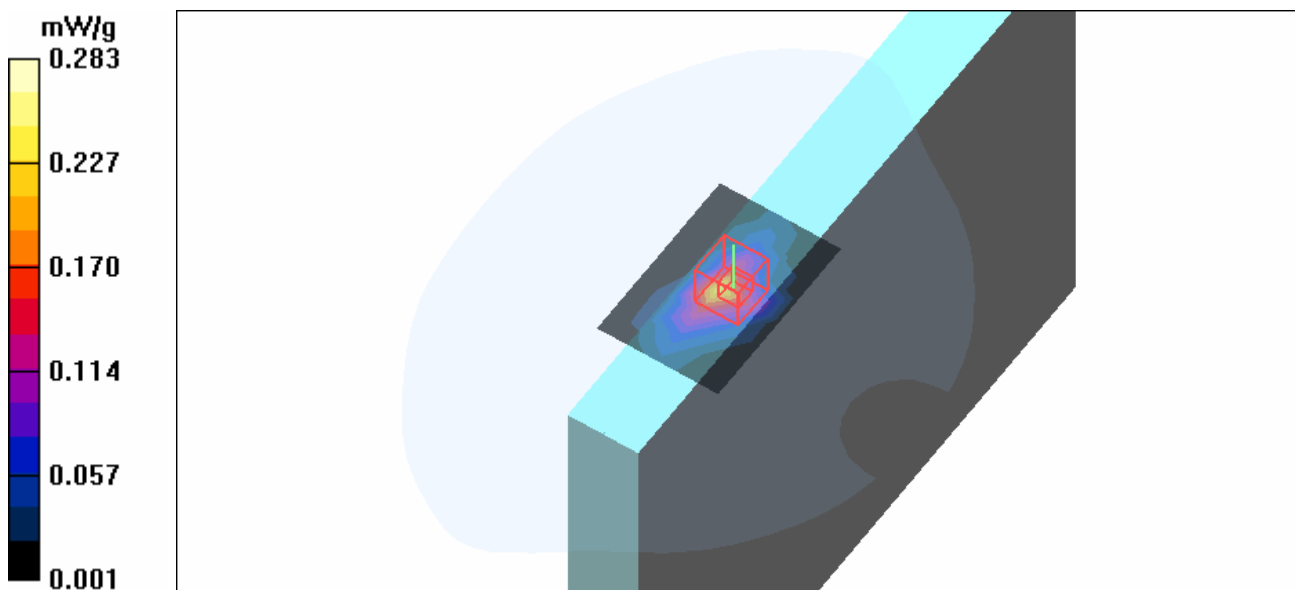

Date/Time: 2006/3/8 11:41:04

Test Laboratory: Advance Data Technology

R1F-AUX ANT-11b-Ch11-Mode 3

DUT: Tablet PC ; Type: R1F ; Test Frequency: 2462 MHz

Communication System: 802.11b ; Frequency: 2462 MHz ; Duty Cycle: 1:1 ; Modulation type: CCK
Medium: MSL2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³ ; Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)

Antenna type : PIFA Antenna ; Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

High Channel 11/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.666 mW/g


High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.597 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.698 mW/g

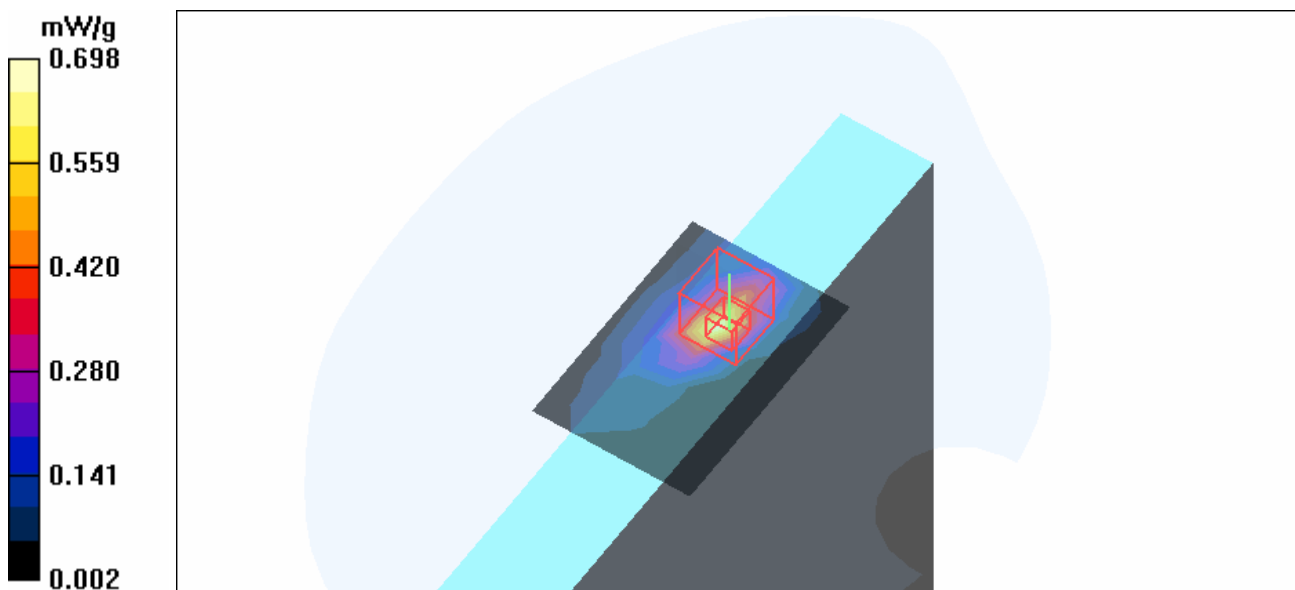

Date/Time: 2006/3/8 12:16:14

Test Laboratory: Advance Data Technology

R1F-11b-Ch11-Mode 4

DUT: Tablet PC ; Type: R1F ; Test Frequency: 2462 MHz

Communication System: 802.11b ; Frequency: 2462 MHz ; Duty Cycle: 1:1 ; Modulation type: CCK

Medium: MSL2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$

kg/m^3 ; Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The bottom side of the EUT to the Phantom)

Antenna type : PIFA Antenna ; Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17

- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202

- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

High Channel 11/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.005 mW/g

High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.22 V/m

Peak SAR (extrapolated) = 0.012 W/kg

SAR(1 g) = 0.000549 mW/g; SAR(10 g) = 0.000134 mW/g

Maximum value of SAR (measured) = 0.012 mW/g


High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.22 V/m

Peak SAR (extrapolated) = 0.013 W/kg

SAR(1 g) = 0.000364 mW/g; SAR(10 g) = 7.34e-005 mW/g

Maximum value of SAR (measured) = 0.013 mW/g

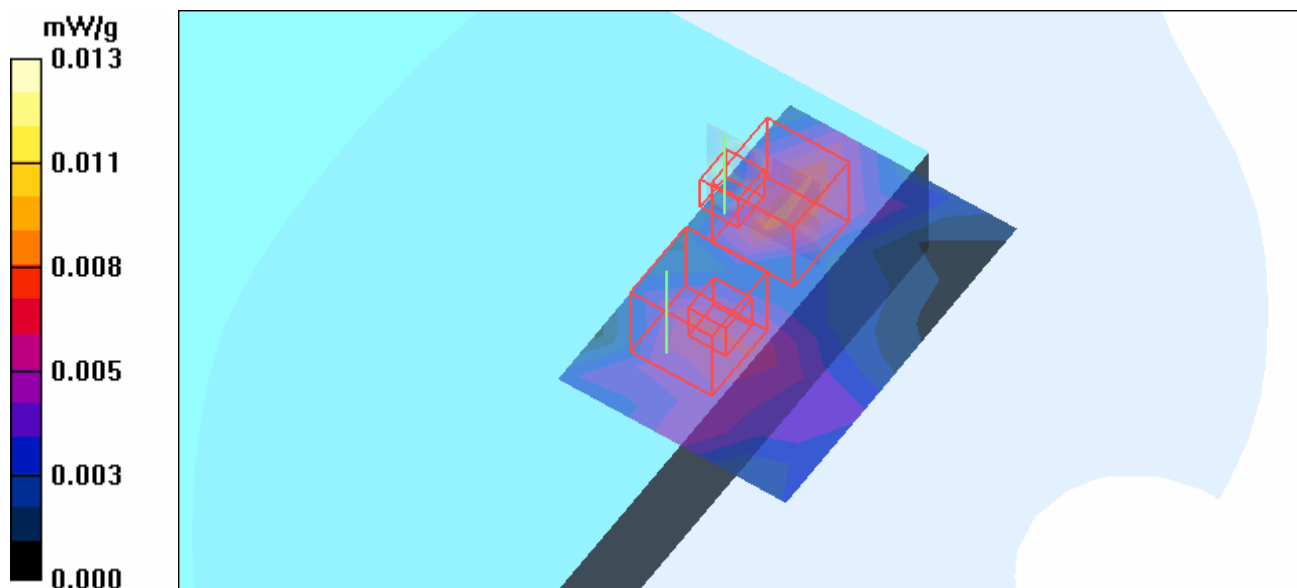

Date/Time: 2006/3/8 13:02:39

Test Laboratory: Advance Data Technology

R1F-GFSK-Ch39-Mode 5

DUT: Tablet PC ; Type: R1F ; Test Frequency: 2441 MHz

Communication System: Bluetooth ; Frequency: 2441 MHz ; Duty Cycle: 1:1 ; Modulation type: GFSK
 Medium: MSL2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³ ; Liquid level : 151 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 39/Area Scan (5x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.012 mW/g


Mid Channel 39/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.68 V/m

Peak SAR (extrapolated) = 0.060 W/kg

SAR(1 g) = 0.010 mW/g; SAR(10 g) = 0.00284 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

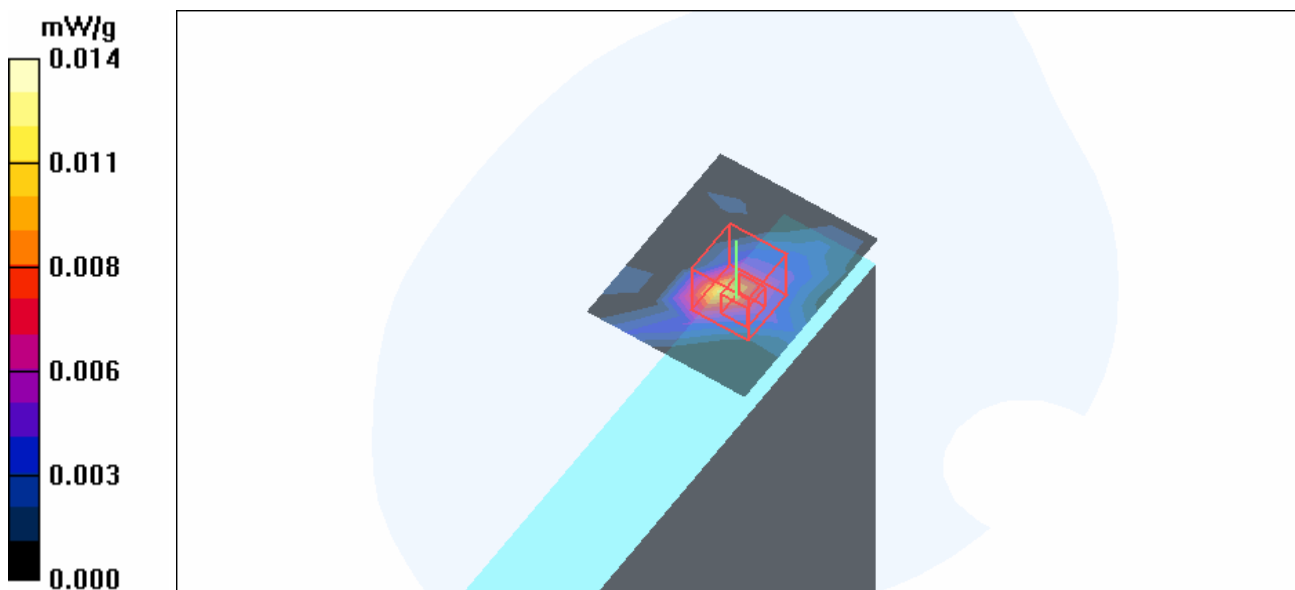

Date/Time: 2006/3/8 13:27:00

Test Laboratory: Advance Data Technology

R1F-8PSK-Ch0-Mode 6

DUT: Tablet PC ; Type: R1F ; Test Frequency: 2402 MHz

Communication System: Bluetooth ; Frequency: 2402 MHz ; Duty Cycle: 1:1 ; Modulation type: 8PSK
 Medium: MSL2450 Medium parameters used: $f = 2402 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$; Liquid level : 151 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Low Channel 0/Area Scan (5x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.003 mW/g


Low Channel 0/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.875 V/m

Peak SAR (extrapolated) = 0.014 W/kg

SAR(1 g) = 0.000471 mW/g; SAR(10 g) = 8.18e-005 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

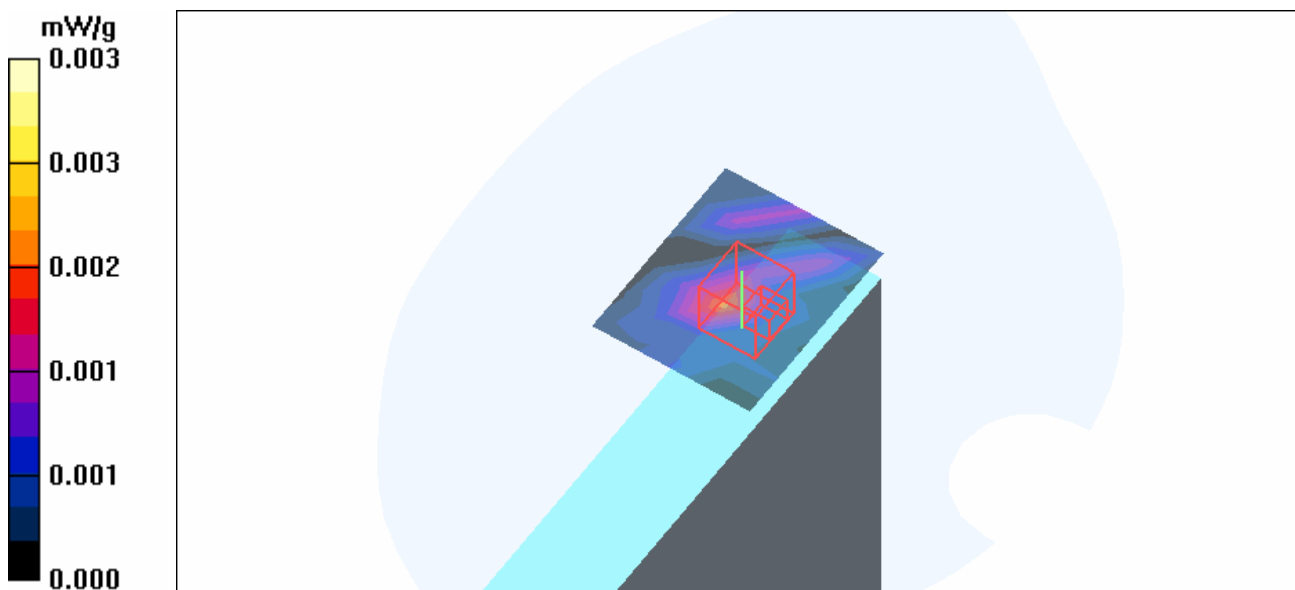

Date/Time: 2006/3/8 13:53:51

Test Laboratory: Advance Data Technology

R1F-GFSK-Ch39-Mode 7

DUT: Tablet PC ; Type: R1F ; Test Frequency: 2441 MHz

Communication System: Bluetooth ; Frequency: 2441 MHz ; Duty Cycle: 1:1 ; Modulation type: GFSK
 Medium: MSL2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³ ; Liquid level : 151 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The bottom side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 39/Area Scan (5x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.004 mW/g


Mid Channel 39/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.24 V/m

Peak SAR (extrapolated) = 0.013 W/kg

SAR(1 g) = 0.000478 mW/g; SAR(10 g) = 0.000111 mW/g

Maximum value of SAR (measured) = 0.013 mW/g

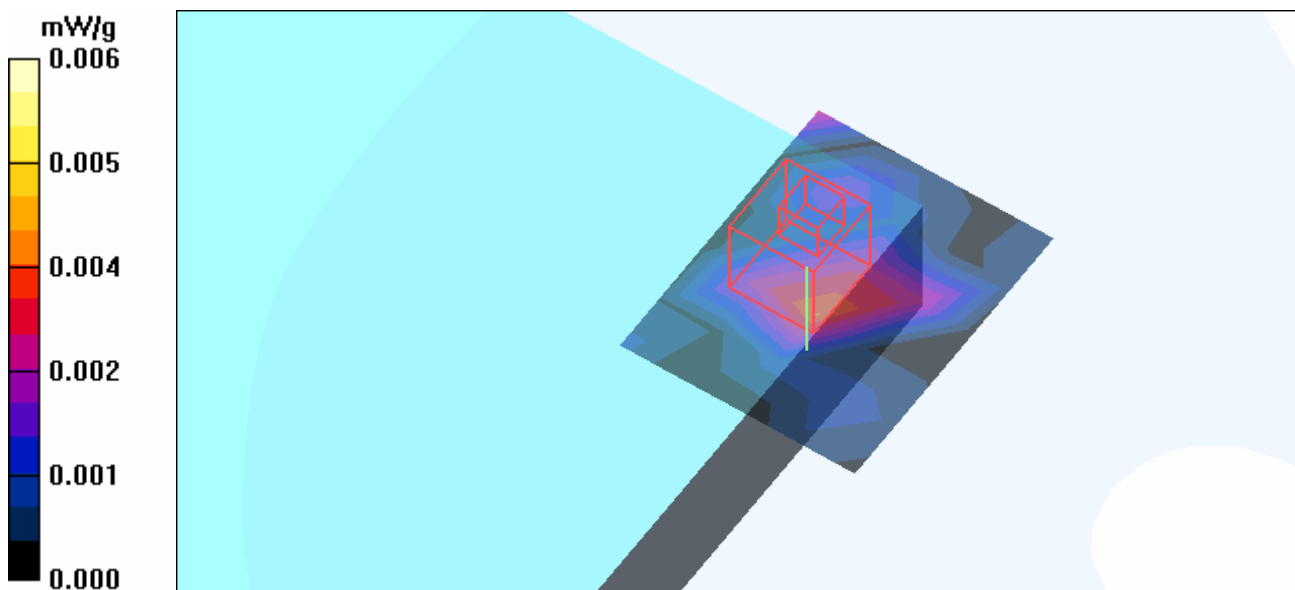

Date/Time: 2006/3/8 14:21:38

Test Laboratory: Advance Data Technology

R1F-11b-Ch11+GFSK-Ch39-Mode 8

DUT: Tablet PC ; Type: R1F ; Test Frequency: 2462 MHz

Communication System: 802.11b ; Frequency: 2462 MHz ; Duty Cycle: 1:1 ; Modulation type: CCK
Medium: MSL2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³ ; Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)

Antenna type : PIFA Antenna ; Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

High Channel 11/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.555 mW/g


High Channel 11/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.598 mW/g; SAR(10 g) = 0.253 mW/g

Maximum value of SAR (measured) = 0.673 mW/g

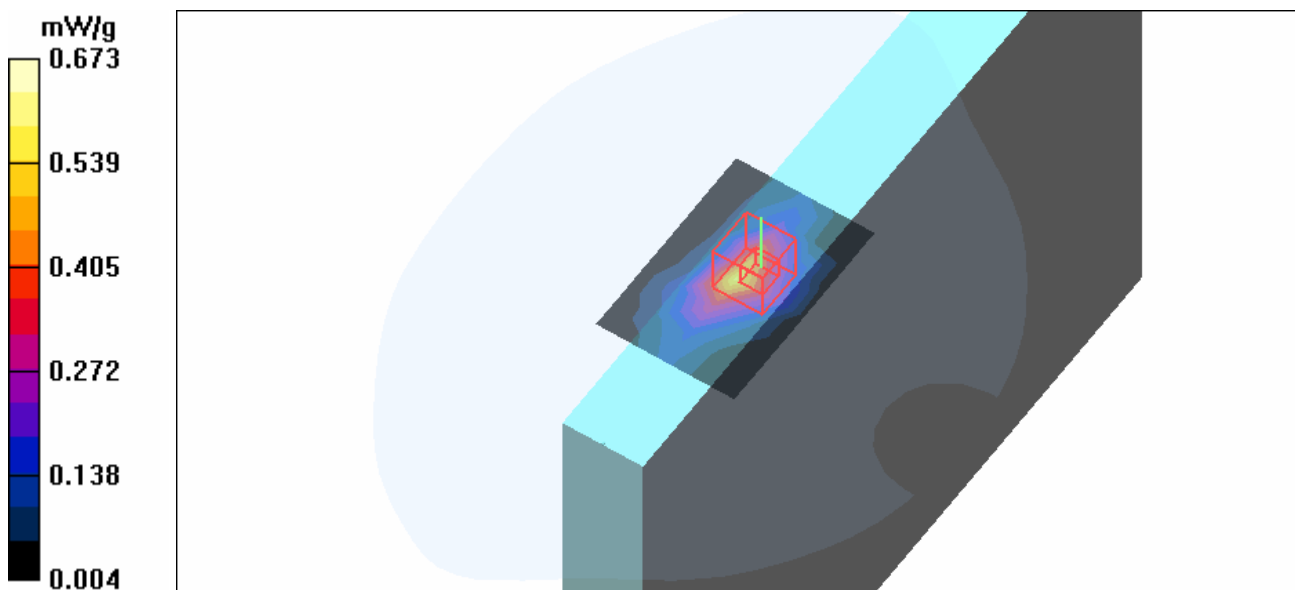

Date/Time: 2006/3/9 11:29:51

Test Laboratory: Advance Data Technology

R1F-11a-Ch36-Mode 9

DUT: Tablet PC ; Type: R1F ; Test Frequency: 5180 MHz

Communication System: 802.11a ; Frequency: 5180 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
 Medium: MSL5800 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.35$ mho/m; $\epsilon_r = 49.6$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.57, 4.57, 4.57) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Low Channel 36/Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.288 mW/g


Low Channel 36/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.38 V/m

Peak SAR (extrapolated) = 0.753 W/kg

SAR(1 g) = 0.198 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.330 mW/g

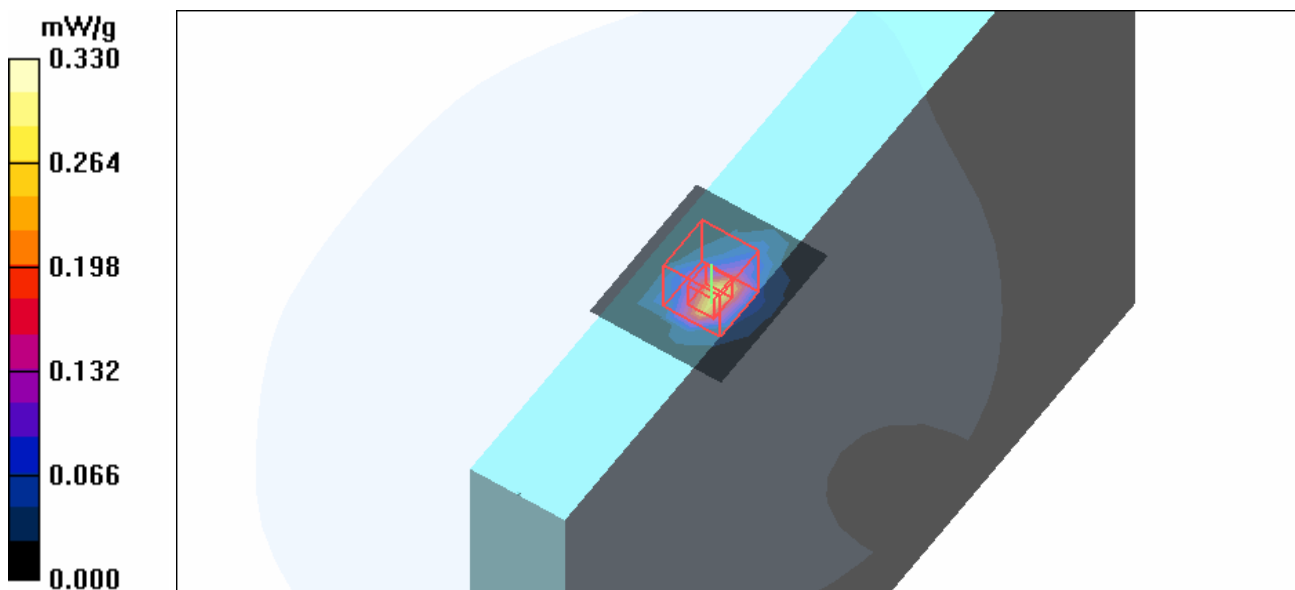

Date/Time: 2006/3/9 11:51:12

Test Laboratory: Advance Data Technology

R1F-11a-Ch48-Mode 9

DUT: Tablet PC ; Type: R1F ; Test Frequency: 5240 MHz

Communication System: 802.11a ; Frequency: 5240 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
 Medium: MSL5800 Medium parameters used: $f = 5240$ MHz; $\sigma = 5.38$ mho/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.57, 4.57, 4.57) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 48/Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.298 mW/g


Mid Channel 48/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.27 V/m

Peak SAR (extrapolated) = 0.775 W/kg

SAR(1 g) = 0.204 mW/g; SAR(10 g) = 0.058 mW/g

Maximum value of SAR (measured) = 0.347 mW/g

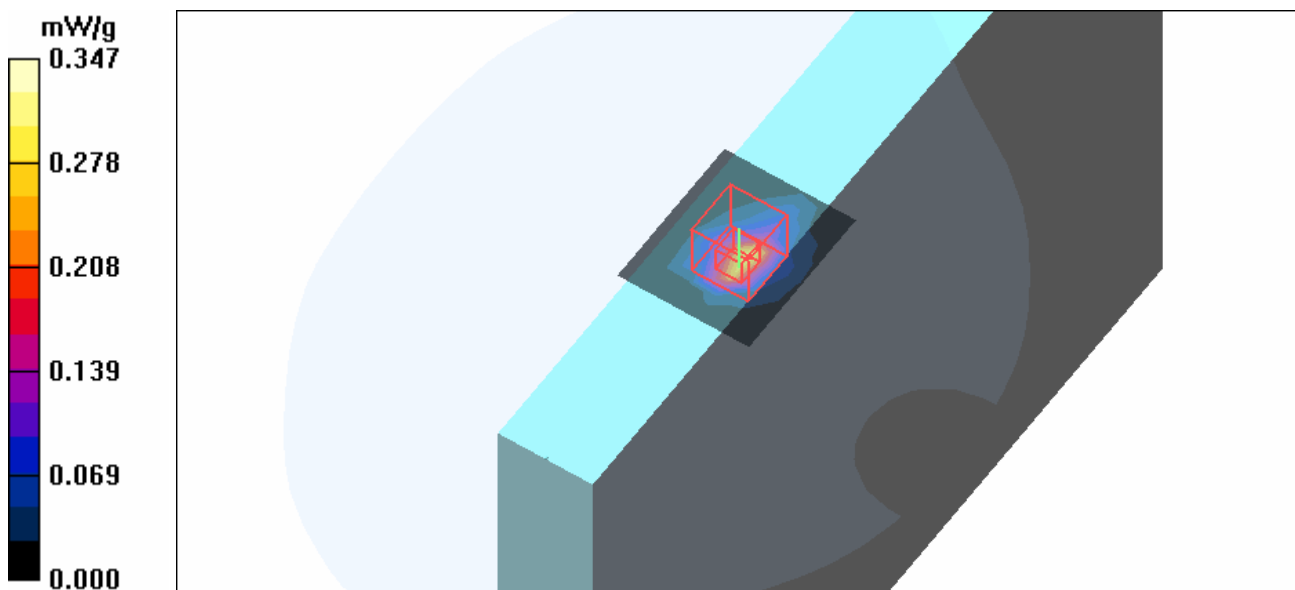

Date/Time: 2006/3/9 12:11:01

Test Laboratory: Advance Data Technology

R1F-11a-Ch52-Mode 9

DUT: Tablet PC ; Type: R1F ; Test Frequency: 5260 MHz

Communication System: 802.11a ; Frequency: 5260 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
 Medium: MSL5800 Medium parameters used: $f = 5260$ MHz; $\sigma = 5.39$ mho/m; $\epsilon_r = 49.1$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.57, 4.57, 4.57) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 52/Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.311 mW/g


Mid Channel 52/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.39 V/m

Peak SAR (extrapolated) = 0.863 W/kg

SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.393 mW/g

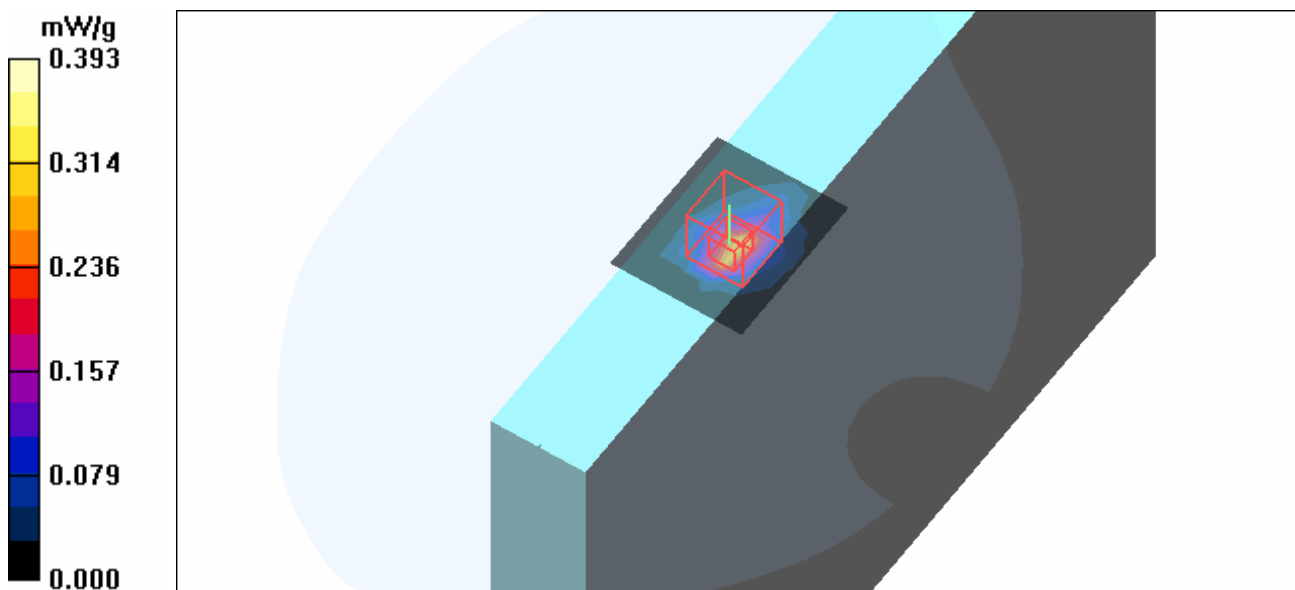

Date/Time: 2006/3/9 12:30:52

Test Laboratory: Advance Data Technology

R1F-11a-Ch64-Mode 9

DUT: Tablet PC ; Type: R1F ; Test Frequency: 5320 MHz

Communication System: 802.11a ; Frequency: 5320 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
 Medium: MSL5800 Medium parameters used: $f = 5320$ MHz; $\sigma = 5.57$ mho/m; $\epsilon_r = 49.3$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.57, 4.57, 4.57) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 64/Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.292 mW/g


Mid Channel 64/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 1.41 V/m

Peak SAR (extrapolated) = 0.763 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.357 mW/g

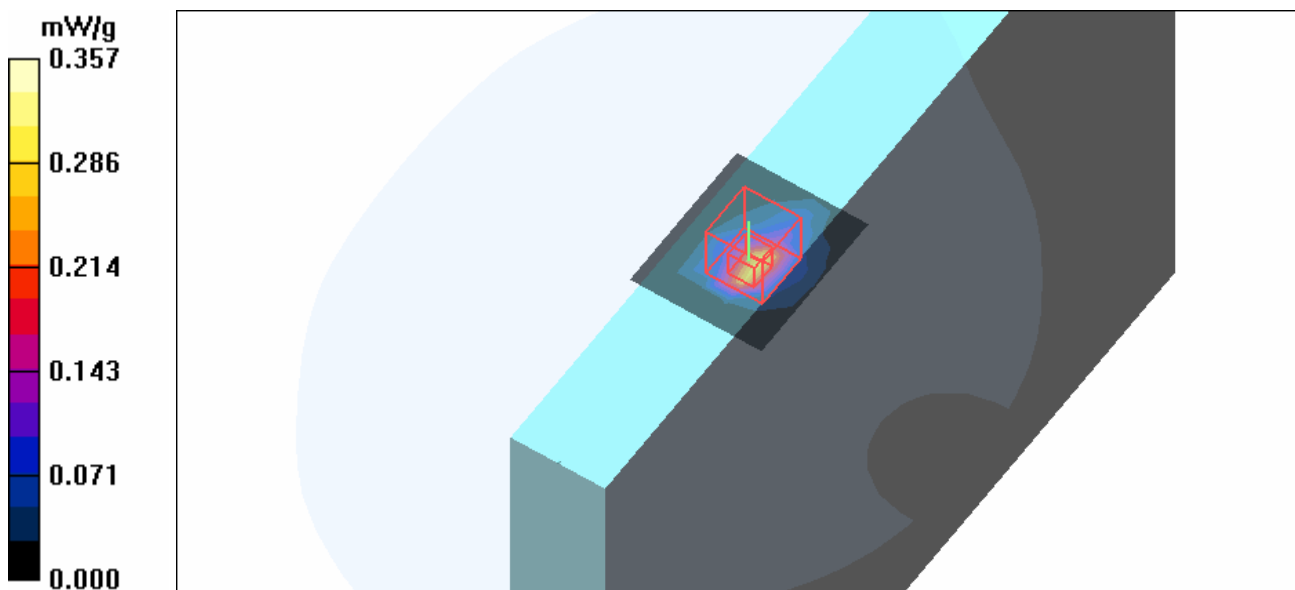

Date/Time: 2006/3/9 12:51:40

Test Laboratory: Advance Data Technology

R1F-11a-Ch149-Mode 9

DUT: Tablet PC ; Type: R1F ; Test Frequency: 5745 MHz

Communication System: 802.11a ; Frequency: 5745 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
 Medium: MSL5800 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.14 \text{ mho/m}$; $\epsilon_r = 48.4$; $\rho = 1000 \text{ kg/m}^3$; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.19, 4.19, 4.19) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 149/Area Scan (6x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.724 mW/g


Mid Channel 149/Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4.3\text{mm}$, $dy=4.3\text{mm}$, $dz=3\text{mm}$

Reference Value = 2.81 V/m

Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.901 mW/g

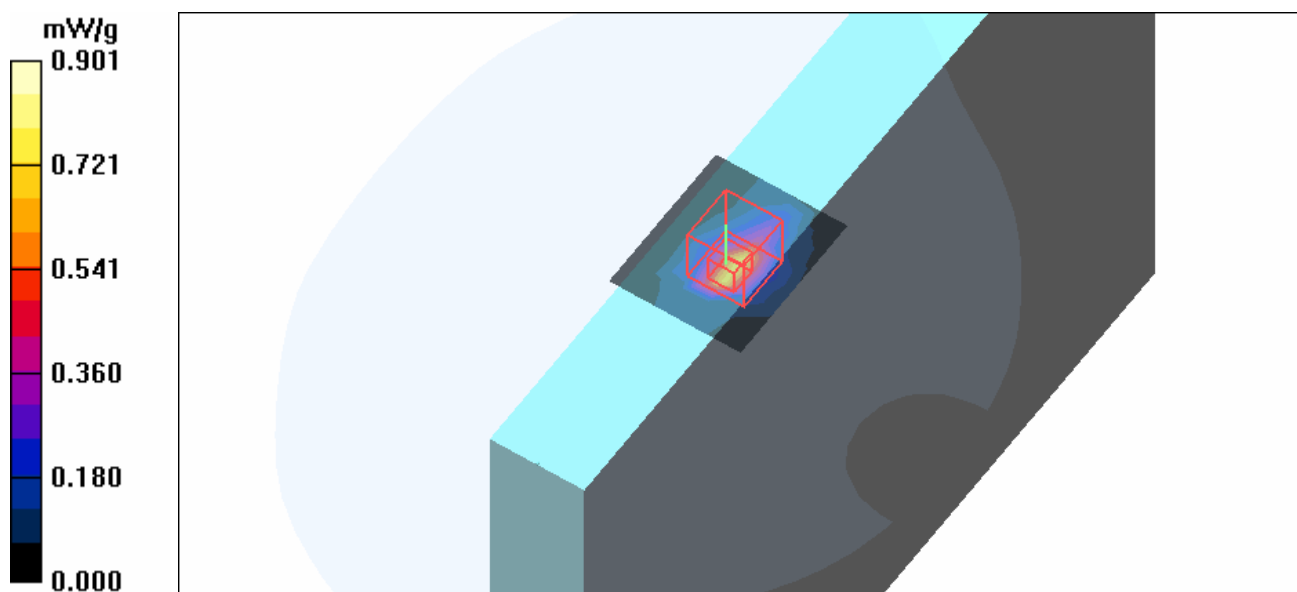

Date/Time: 2006/3/9 13:11:50

Test Laboratory: Advance Data Technology

R1F-11a-Ch157-Mode 9

DUT: Tablet PC ; Type: R1F ; Test Frequency: 5785 MHz

Communication System: 802.11a ; Frequency: 5785 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
 Medium: MSL5800 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.3 \text{ mho/m}$; $\epsilon_r = 48.3$; $\rho = 1000 \text{ kg/m}^3$; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.19, 4.19, 4.19) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 157/Area Scan (6x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.898 mW/g


Mid Channel 157/Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4.3\text{mm}$, $dy=4.3\text{mm}$, $dz=3\text{mm}$


Reference Value = 3.21 V/m

Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 0.684 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 1.24 mW/g

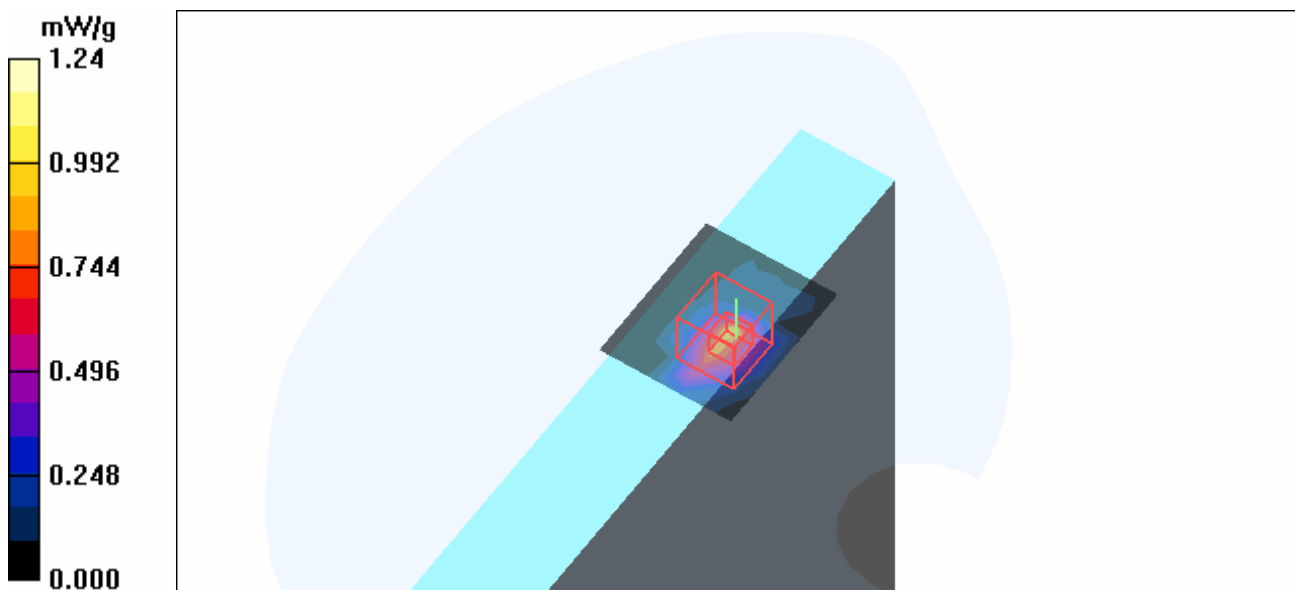

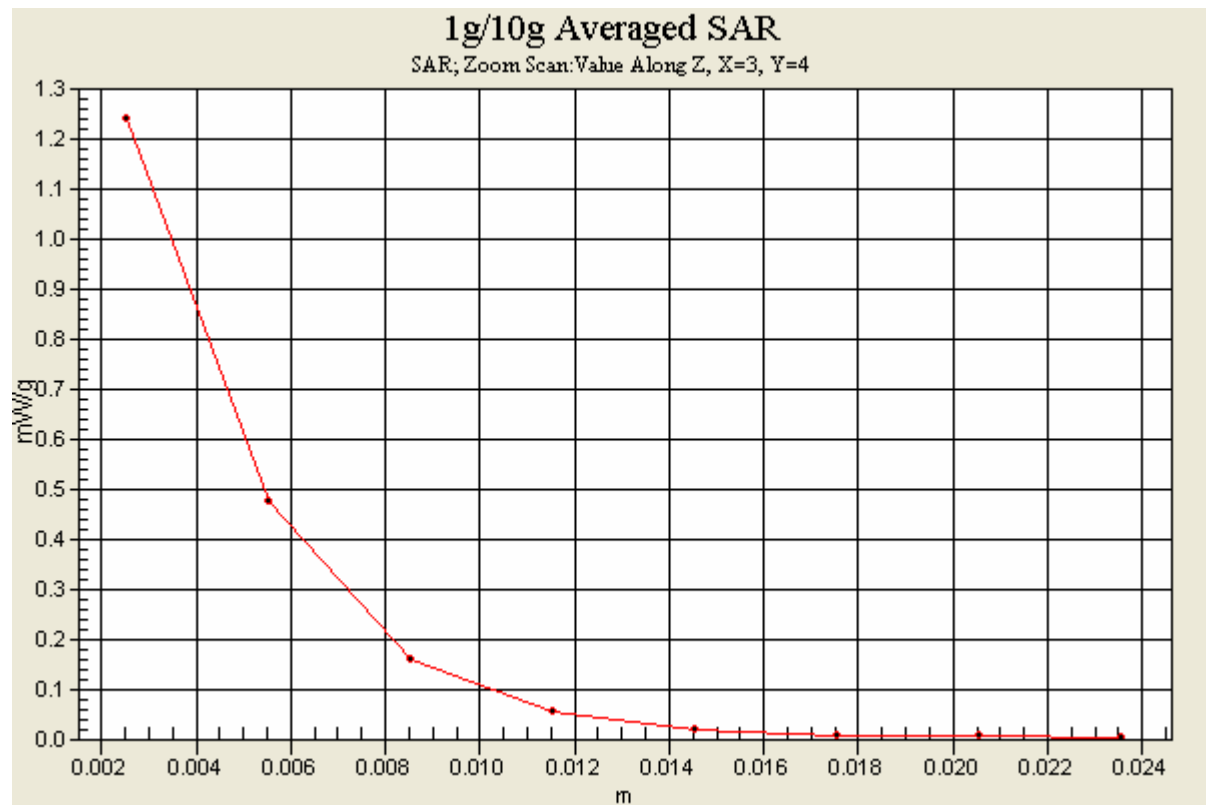

Date/Time: 2006/3/9 13:31:54

Test Laboratory: Advance Data Technology

R1F-11a-Ch165-Mode 9

DUT: Tablet PC ; Type: R1F ; Test Frequency: 5825 MHz


Communication System: 802.11a ; Frequency: 5825 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
Medium: MSL5800 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.3$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm
Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
Antenna type : PIFA Antenna ; Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.19, 4.19, 4.19) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

High Channel 165/Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.829 mW/g

High Channel 165/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm
Reference Value = 2.87 V/m
Peak SAR (extrapolated) = 2.55 W/kg
SAR(1 g) = 0.574 mW/g; SAR(10 g) = 0.162 mW/g
Maximum value of SAR (measured) = 1.06 mW/g

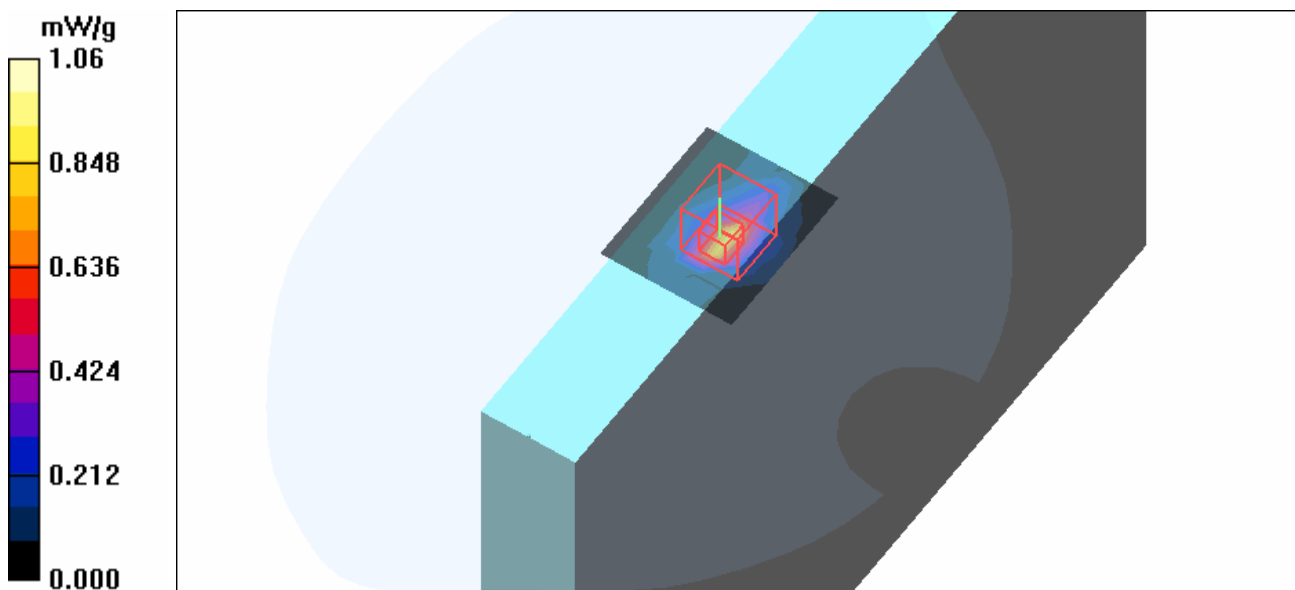

Date/Time: 2006/3/9 13:46:51

Test Laboratory: Advance Data Technology

R1F-11a-Ch157-Mode 10

DUT: Tablet PC ; Type: R1F ; Test Frequency: 5785 MHz

Communication System: 802.11a ; Frequency: 5785 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM

Medium: MSL5800 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.3 \text{ mho/m}$; $\epsilon_r = 48.3$; $\rho = 1000$

kg/m^3 ; Liquid level : 150 mm

Phantom section: Flat Section ; Separation distance : 0 mm (The bottom side of the EUT to the Phantom)

Antenna type : PIFA Antenna ; Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.19, 4.19, 4.19) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 157/Area Scan (7x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.012 mW/g


Mid Channel 157/Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4.3\text{mm}$, $dy=4.3\text{mm}$, $dz=3\text{mm}$

Reference Value = 0.790 V/m

Peak SAR (extrapolated) = 0.078 W/kg

SAR(1 g) = 0.0087 mW/g; SAR(10 g) = 0.00305 mW/g

Maximum value of SAR (measured) = 0.013 mW/g

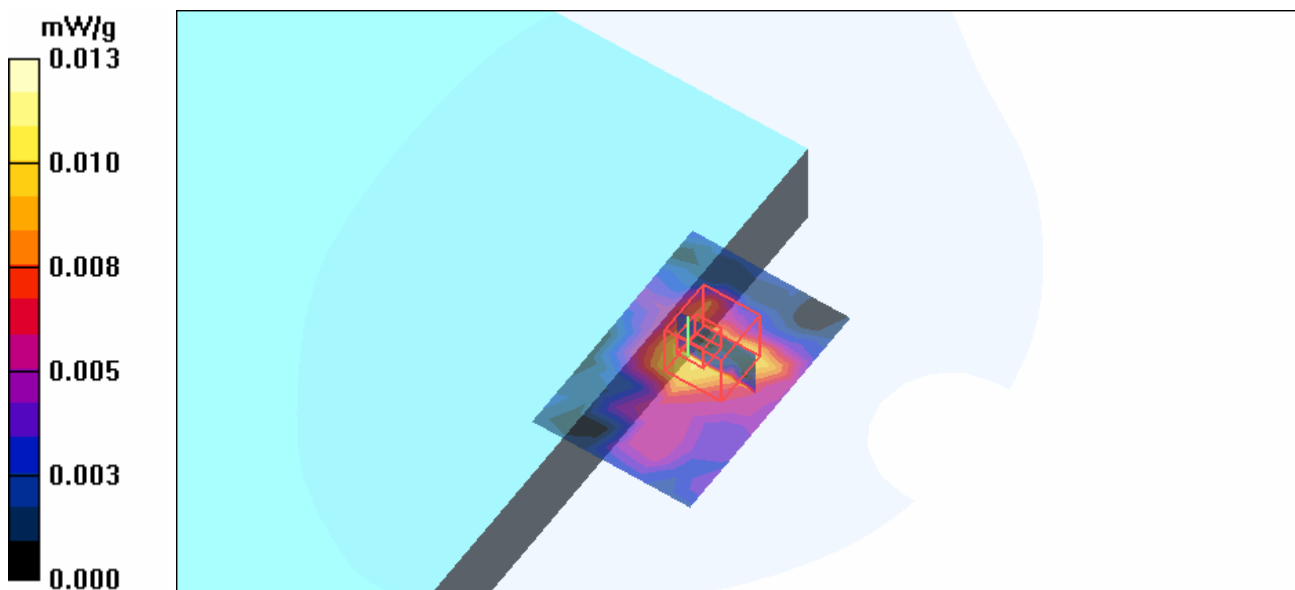

Date/Time: 2006/3/9 14:21:58

Test Laboratory: Advance Data Technology

R1F-AUX ANT-11a-Ch157-Mode 11

DUT: Tablet PC ; Type: R1F ; Test Frequency: 5785 MHz

Communication System: 802.11a ; Frequency: 5785 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
 Medium: MSL5800 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.3 \text{ mho/m}$; $\epsilon_r = 48.3$; $\rho = 1000 \text{ kg/m}^3$; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.19, 4.19, 4.19) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 157/Area Scan (6x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.891 mW/g


Mid Channel 157/Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4.3\text{mm}$, $dy=4.3\text{mm}$, $dz=3\text{mm}$

Reference Value = 3.06 V/m

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 0.620 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

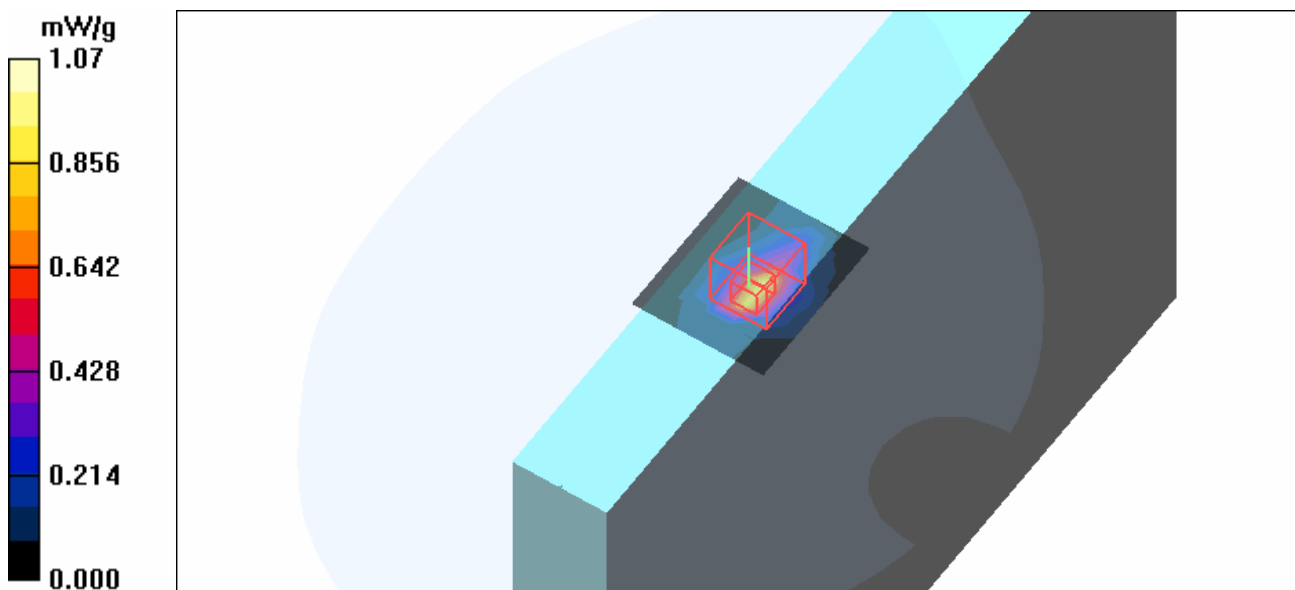

Date/Time: 2006/3/9 14:56:54

Test Laboratory: Advance Data Technology

R1F-11a-Ch157+GFSK-Ch39-Mode 12

DUT: Tablet PC ; Type: R1F ; Test Frequency: 5785 MHz

Communication System: 802.11a ; Frequency: 5785 MHz ; Duty Cycle: 1:1 ; Modulation type: OFDM
 Medium: MSL5800 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.3 \text{ mho/m}$; $\epsilon_r = 48.3$; $\rho = 1000 \text{ kg/m}^3$; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 0 mm (The edge side of the EUT to the Phantom)
 Antenna type : PIFA Antenna ; Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.19, 4.19, 4.19) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510 ; Calibrated: 2005/8/17
- Phantom: SAM 12 ; Type: SAM V4.0 ; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23 ; Postprocessing SW: SEMCAD, V1.8 Build 161

Mid Channel 157/Area Scan (6x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.876 mW/g


Mid Channel 157/Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4.3\text{mm}$, $dy=4.3\text{mm}$, $dz=3\text{mm}$

Reference Value = 3.03 V/m

Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 0.590 mW/g; SAR(10 g) = 0.167 mW/g

Maximum value of SAR (measured) = 0.994 mW/g

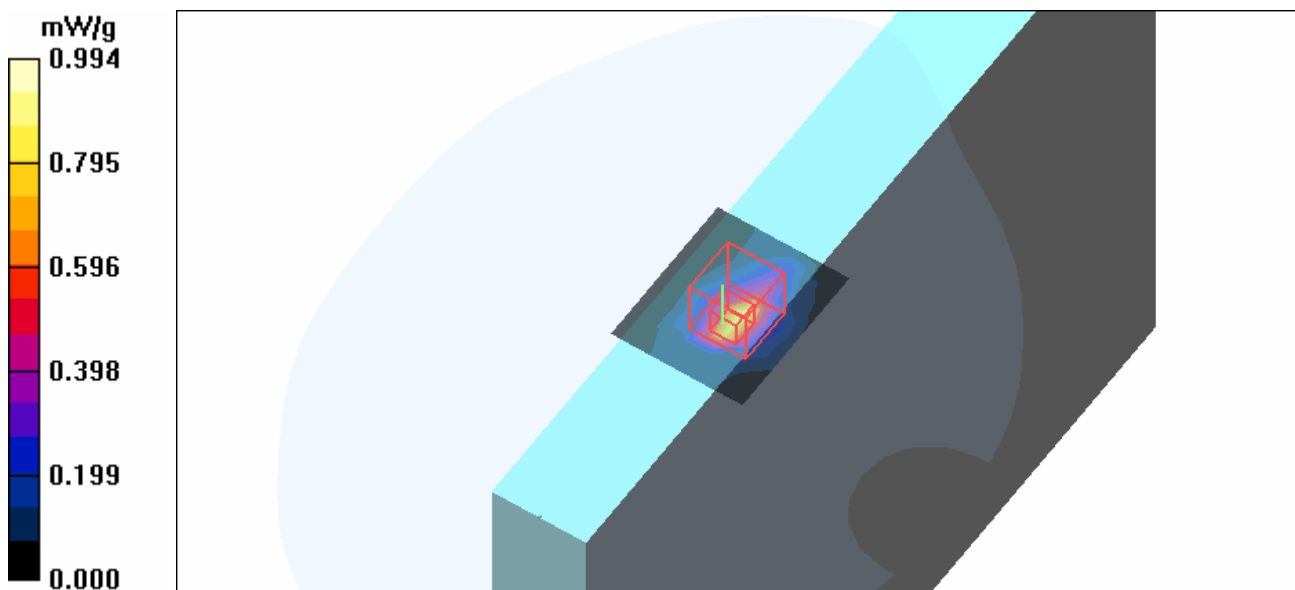

Date/Time: 2006/3/8 09:42:03

Test Laboratory: Advance Data Technology

System Validation Check-MSL 2450MHz

DUT: Dipole 2450 MHz ; Type: D2450V2 ; Serial: 716 ; Test Frequency: 2450 MHz

Communication System: CW ; Frequency: 2450 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: MSL2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³ ; Liquid level : 151 mm
 Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)
 Air temp. : 22.3 degrees ; Liquid temp. : 21.2 degrees

DASY4 Configuration:

- Probe: ET3DV6 - SN1790 ; ConvF(4.35, 4.35, 4.35) ; Calibrated: 2004/12/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2005/8/17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=10mm, Pin=250mW/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 13.9 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.1 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 12.8 mW/g; SAR(10 g) = 5.81 mW/g

Maximum value of SAR (measured) = 14.2 mW/g

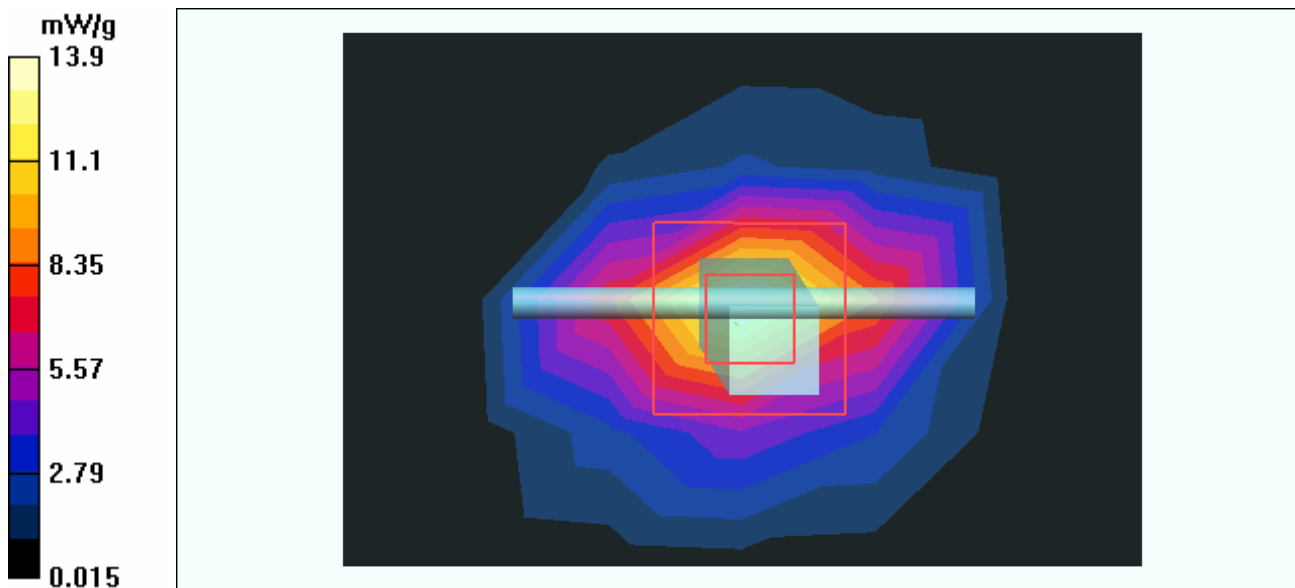

Date/Time: 2006/3/9 10:10:19

Test Laboratory: Advance Data Technology

System Validation Check-MSL 5GHz

DUT: Dipole 5 GHz ; Type: D5GHzV2 ; Serial: 1019 ; Test Frequency: 5200 MHz

Communication System: CW ; Frequency: 5200 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: MSL5800; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.37$ mho/m; $\epsilon_r = 49.6$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)
 Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.57, 4.57, 4.57) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2005/8/17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

f=5200, d=10mm, Pin=250mW/Area Scan (6x6x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 18.3 mW/g


f=5200, d=10mm, Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 84.0 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 61.1 W/kg

SAR(1 g) = 17.8 mW/g; SAR(10 g) = 4.98 mW/g

Maximum value of SAR (measured) = 29.5 mW/g

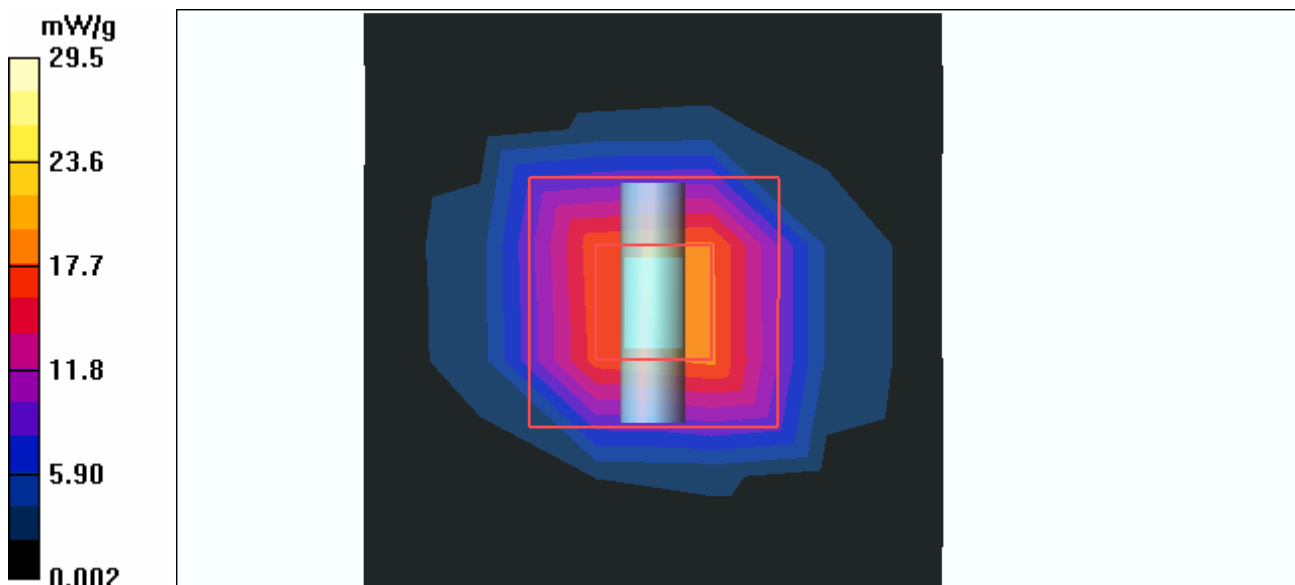

Date/Time: 2006/3/9 10:32:49

Test Laboratory: Advance Data Technology

System Validation Check-MSL 5GHz

DUT: Dipole 5 GHz ; Type: D5GHzV2 ; Serial: 1019 ; Test Frequency: 5800 MHz

Communication System: CW ; Frequency: 5800 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: MSL5800; Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.3 \text{ mho/m}$; $\epsilon_r = 48.3$; $\rho = 1000 \text{ kg/m}^3$;
 Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)
 Air temp. : 22.1 degrees ; Liquid temp. : 21.1 degrees

DASY4 Configuration:

- Probe: EX3DV3 - SN3506 ; ConvF(4.19, 4.19, 4.19) ; Calibrated: 2004/3/19
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2005/8/17
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

f=5800, d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 33.1 mW/g

f=5800, d=10mm, Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 75.4 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 68.9 W/kg

SAR(1 g) = 16.7 mW/g; SAR(10 g) = 4.64 mW/g

Maximum value of SAR (measured) = 27.4 mW/g

