



FCC TEST REPORT

For 47 CFR Part 24E

FCC ID:	MSQV66S
Equipment:	V66S Multimedia Mobile Phone (GSM850/PCS Dual Band)
Tx Frequency:	1850.2 MHz ~ 1909.8 MHz
Report No:	05-0602-E
Test date:	10.17-10.21.2005
Applicant:	ASUSTeK Computer Inc. (華碩電腦股份有限公司)
Address:	No.150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.
Model No:	V66S

The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 24 and IC standard RSS-133.

This report shall not be reproduced except in full, without the written approval of **ATL**. This document may be altered or revised by **ATL Techno. Corp.** EMC Testing Lab. personnel only, and shall be noted in the revision section of the document.

CONTENTS

1. <u>LABORATORY INFORMATION</u>	4
2. <u>CUSTOMER INFORMATION</u>	4
3. <u>SUMMARY OF TEST RESULTS</u>	5
4. <u>EUT INFORMATION</u>	6
4.1 <u>EUT description</u>	7
4.2 <u>EUT TEST SETUPS</u>	8
5. <u>APPLICABLE STANDARDS</u>	8
6. <u>RADIATED RF OUTPUT POWER</u>	9
6.1 <u>Test setup</u>	9
6.2 <u>Test method</u>	10
6.3 <u>EUT operation modes</u>	10
6.4 <u>Limit</u>	10
6.5 <u>Results</u>	11
7. <u>CONDUCTED SPURIOUS EMISSION</u>	12
7.1 <u>Test setup</u>	12
7.2 <u>Test method</u>	12
7.3 <u>EUT operation modes</u>	13
7.4 <u>Limit</u>	13
7.5 <u>Results</u>	14
8. <u>RADIATED SPURIOUS EMISSION</u>	26
8.1 <u>Test setup</u>	26
8.2 <u>Test method</u>	26
8.3 <u>EUT operation modes</u>	27
8.4 <u>Limit</u>	27
8.5 <u>Results</u>	28
9. <u>FREQUENCY STABILITY, TEMPERATURE VARIATION</u>	34
9.1 <u>Test setup</u>	34
9.2 <u>Test method</u>	34
9.3 <u>EUT operation modes</u>	34
9.4 <u>Limit</u>	35
9.5 <u>Results</u>	35
10. <u>FREQUENCY STABILITY, VOLTAGE VARIATION</u>	36
10.1 <u>Test setup</u>	36

10.2	Test method	36
10.3	EUT operation modes	36
10.4	Limit	37
10.5	Results	37
11.	99% OCCUPIED BANDWIDTH	38
11.1	Test setup	38
11.2	EUT operation modes	38
11.3	Limit	38
11.4	Results	38
11.5	Screen shots	39
12.	BANDEDGE COMPLIANCE	45
12.1	Test setup	45
12.2	EUT operation modes	45
12.3	Limit	45
12.4	Results	46
13.	TEST EQUIPMENT	48
13.1	EQUIPMENT	48
14.	Measurement Uncertainty	49
14.1	Uncertainty	49



1. LABORATORY INFORMATION

Test laboratory	A Test Lab Techno. Corp. EMC Testing Lab. Tel: 886-(0)2-82122828 Fax : 886-(0)2-82122828
Lab Location:	No. 99, An-Chung Rd, Hsin-Tien City, Taipei Hsien, Taiwan R.O.C.

2. CUSTOMER INFORMATION

Client:	ASUSTeK Computer Inc.
Contact person:	Mf Chen
Receipt of EUT:	09.23.2005
Date of testing:	10.17-10.21.2005
Date of report:	11.08.2005

Contents approved:

A handwritten signature in blue ink, appearing to read 'Eddie Chen', is written over a horizontal line.

Eddie Chen

2005/11/08



3. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC 47 CFR Part 24 & Part 2 / IC RSS-133			
Standard Section	Test Type and Limit	Result	REMARK
2.1047(d)	Modulation Characteristics	PASS	NA
2.1046, 24.232	Maximum Peak Output Power Limit: max.2 watts e.i.r.p peak power	PASS	Meet the requirement of limit Minimum passing margin is 4.19 (33-28.81) dBm at 1909.80MHz
2.1055, 24.235	Frequency Stability AFC Freq. Error vs. Voltage AFC Freq. Error vs. Temperature Limit: max. ± 0.1 ppm	PASS	Meet the requirement of limit
2.1049, 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit
24.238(b)	Band Edge Measurements	PASS	NA
2.1051, 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit Minimum passing margin is -17.80dB at 1692.861MHz
2.1053, 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit Minimum passing margin is -17.20dB at 3820MHz



4. EUT INFORMATION

1. The EUT was tested with the following adapter

BRAND:	ASUSTeK Computer Inc.
MODEL:	V66S
INPUT:	100-240Vac,50-60Hz
UOTPUT:	5.2Vdc, 430mA

- 2.IMEI Code: 010714000000194

3. The hardware version: R1.03

4. The software version: V2.0.0.D

5. The above EUT information was declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.





4.1 EUT description

Product	Dual-band Mobile Phone	
Model NO.	V66S	
POWER SUPPLY	3.7Vdc from Battery 5.2Vdc from AC Adapter	
MODULATION TYPE	GMSK	
FREQUENCY RANGE	Tx Frequency : 1850.2MHz~1909.8MHz(PCS band) Rx Frequency : 1930.2MHz~1989.8MHz (PCS band)	
Conducted output power (EUT RF output connector)	Channel	Power(dBm)
	512	29.25
	661	29.25
	810	29.25
NUMBER OF CHANNEL	299	
MAX. RADITED EIRP PEAK OUTPUT POWER	28.81dBm(0.76watts)	
ANTENNA TYPE	Internal Antenna	
DATA CABLE	NA	
I/O PORTS	NA	
ASSOCIATED DEVICES	Earphone plus Microphone	
EUT Extreme Vol. Range	3.55Vdc to 4.2Vdc	



4.2 EUT TEST SETUPS

For each test the EUT was exercised to find out the worst case of operation modes and device configuration.

5. APPLICABLE STANDARDS

The EUT is a Dual-band Mobile Phone. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

IC RSS-133

EIA/TIA 603


All test items have been performed and recorded as per the above standards.



6. RADIATED RF OUTPUT POWER

6.1 Test setup

The EUT was set on a non-conductive turn table in a semi anechoic chamber. In the corner of the chamber there was a communication antenna, which was connected to the BS simulator located outside the chamber. The radiated power from the EUT was measured with an antenna fixed to a antenna tower. The tower and turn table were remotely controlled to turn the EUT and change the antenna polarization. The measured signal was routed from the measuring antenna to the spectrum analyzer. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

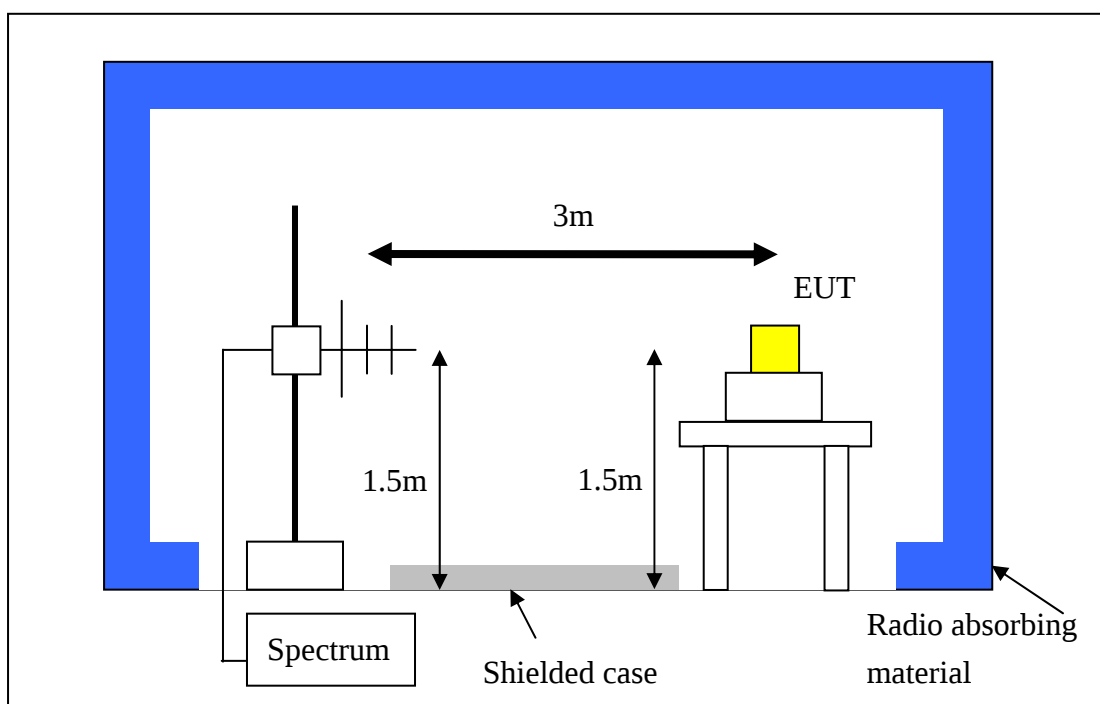

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



6.2 Test method

- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with Advantest Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810(low, middle and high operational frequency range.)
- b. In the semi-anechoic chamber, E.I.R.P peak power measurement. EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The “Read Value” is the maximum power value recorded on the spectrum analyzer.
- c. The substitution horn antenna is substituted for EUT at the same position and signal generator export the CW signal to the calibration antenna. The signal generator level has to adjust to have the same emission nature. The radiated power can be calculated via the factor and antenna.
- d. Actually the real E.I.R.P peak power is equal to “SG Power Value + Correction Factor (dB), Correction Factor (dB) =Substitution Antenna Gain (dBi) - Cable Loss(dB) ”

6.3 EUT operation modes

- a. A transmission link is established between the EUT and the test simulator.
- b. The EUT is set to transmit at a maximum output power on the specific channel frequency selected.

6.4 Limit

The radiated EIRP shall meet the limits of the specific rule Part.

For 24.232(b) “Mobile / Portable station are limited to 2 watts e.i.r.p” and

For 24.232(c) “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”



6.5 Results

EUT	Dual-band Mobile Phone	MODEL	V66S
MODE	Tx	POWER CONTORL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	PEAK
NVIRONMENTAL CONDITIONS	23 deg. C, 65 % RH, 999 hPa	TESTED BY: Sam Chaung	

EIRP RADIATED PEAK OUTPUT POWER							
Channel No.	EUT Power Value (dBm)	S.G Power Value (dBm)	Correction Factor (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dBm)	Peak Output Power	
						dBm	Watt
512	15.97	25.1	3.45	9.15	5.7	28.55	0.72
661	16.01	25.25	3.08	9.18	6.1	28.33	0.68
810	17.02	25.8	3.01	9.21	6.2	28.81	0.76

REMARKS:


1. Peak Output Power(dBm)=SG Power Value (dBm) + Correction Factor (dB)
2. Correction Factor(dB) = Substitution Antenna Gain(dBi) - Cable Loss(dB)



7. CONDUCTED SPURIOUS EMISSION

7.1 Test setup

A set of LP/HP/BS filters was used to prevent overloading the spectrum analyzer. The BS simulator was used to set the TX channel with GPRS and power level and modulate the TX signal with different bit patterns. The test was done using an automated test system, where the measurement devices were controlled by a computer.

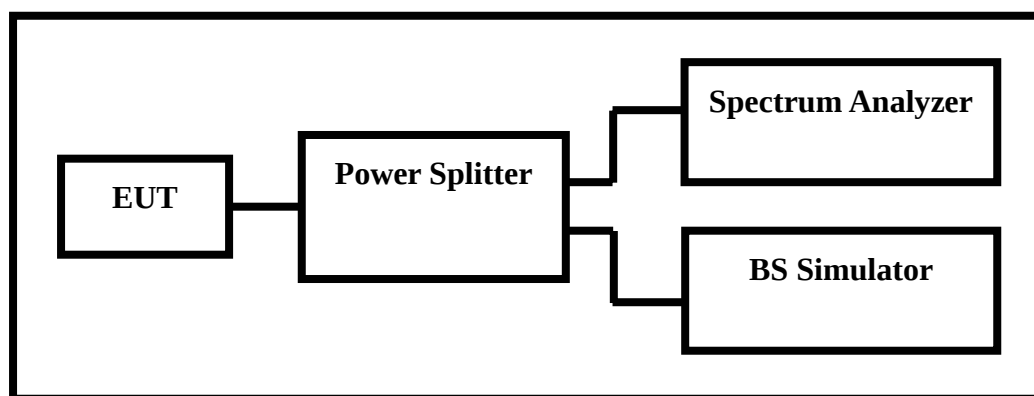

7.2 Test method

- a) The emissions were searched and maximized measuring antenna and manipulating the EUT.
- b) All suspicious frequencies with emission levels were recorded.



7.3 EUT operation modes

- a. A transmission link is established between the EUT and the test simulator.
- b. The EUT is set to transmit at a maximum output power on the specific channel frequency selected.

7.4 Limit

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. In the FCC 24.238(c), When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges (low channel 512 and high channel 810), both upper and lower edges are compliance with FCC 24.238(b), Adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.



7.5 RESULTS

EUT	Dual-band Mobile Phone	MODEL	V66S
MODE	Tx Channel 512	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Sam Chaung	

CONDUCTED SPURIOUS EMISSION					
Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1667.147	-46.50	5.74	-40.76	-13	-27.76
1705.718	-63.75	5.67	-58.08	-13	-45.08
2035.717	-48.50	5.72	-42.78	-13	-29.78
3700.714	-54.00	13.27	-40.73	-13	-27.73
5545.714	-58.25	7.16	-51.09	-13	-38.09
11088.857	-56.75	8.11	-48.64	-13	-35.64

REMARKS:

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)

2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)



EUT	Dual-band Mobile Phone	MODEL	V66S
MODE	Tx Channel 661	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Sam Chaung	

CONDUCTED SPURIOUS EMISSION					
Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1692.861	-36.50	5.70	-30.80	-13	-17.80
2070.003	-39.25	5.73	-33.52	-13	-20.52
2258.574	-52.75	6.12	-46.63	-13	-33.63
3758.571	-65.25	9.26	-55.99	-13	-42.99
5635.714	-66.50	6.92	-59.58	-13	-46.58
7521.429	-59.75	7.01	-52.74	-13	-39.74
9400.000	-63.50	7.51	-55.99	-13	-42.99
11271.429	-55.75	8.00	-47.75	-13	-34.75
13160.000	-62.75	8.91	-53.84	-13	-40.84

REMARKS:

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)



EUT	Tri-band Mobile Phone	MODEL	V66S
MODE	Tx Channel 810	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Sam Chaung	

CONDUCTED SPURIOUS EMISSION					
Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1564.290	-52.75	5.01	-47.74	-13	-34.74
1722.861	-37.50	5.80	-31.70	-13	-18.70
1992.860	-50.50	5.71	-44.79	-13	-31.79
2104.288	-39.00	6.06	-32.94	-13	-19.94
2292.859	-52.00	6.50	-45.50	-13	-32.50
3816.429	-50.50	9.46	-41.04	-13	-28.04
5719.286	-66.75	6.60	-60.15	-13	-47.15
7585.400	-61.75	7.15	-54.60	-13	-41.60
9548.500	-62.50	7.61	-54.89	-13	-41.89
11442.857	-58.75	8.05	-50.70	-12	-38.70
13368.000	-62.50	9.01	-53.49	-11	-42.49

REMARKS:

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)

2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)


**Channel 512****9K~3GHz**

RBW 1 MHz

VBW 1 MHz

SWT 15 ms

Ref -5 dBm

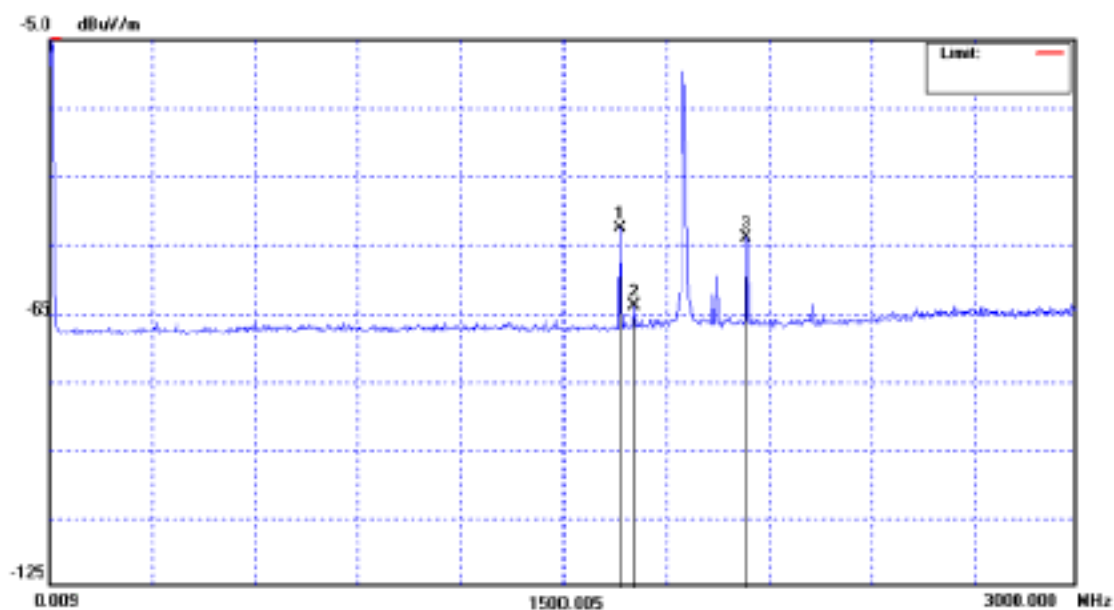

Mark 1	1667.147 MHz	-46.50 dBm
Mark 2	1752.861 MHz	-63.75 dBm
Mark 3	2035.717 MHz	-48.50 dBm


**Channel 512****3G~7.5GHz**

RBW 1 MHz

VBW 1 MHz

Ref 0 dBm

SWT 100 ms

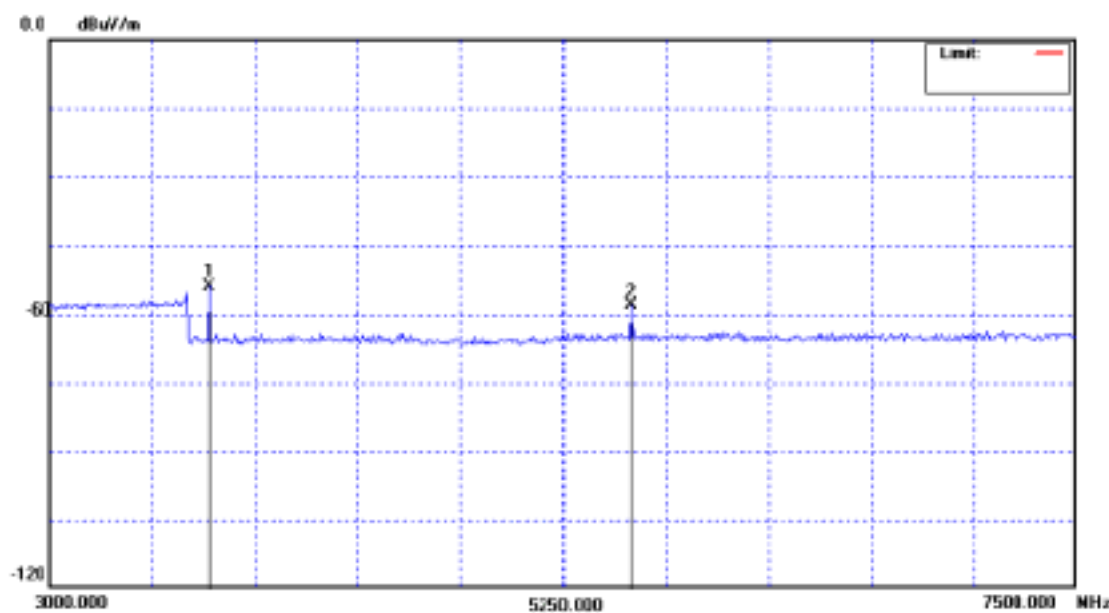

Mark 1	3700.714 MHz	-54.00 dBm
--------	--------------	------------

Mark 2	5545.714 MHz	-58.25 dBm
--------	--------------	------------



Channel 512


7.5G~15GHz

RBW 1 MHz

VBW 1 MHz

SWT 250 ms

Ref 0 dBm

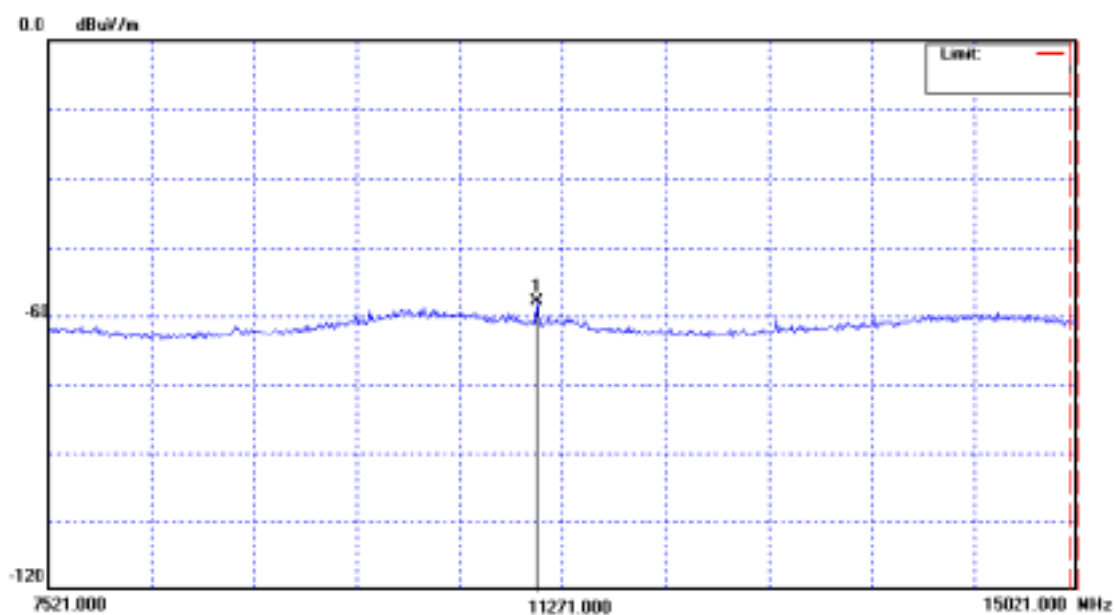

Mark 1

11088.857 MHz

-56.75 dBm



Channel 661


9K~3GHz

RBW 1 MHz

VBW 1 MHz

Ref 5 dBm

SWT 15 ms

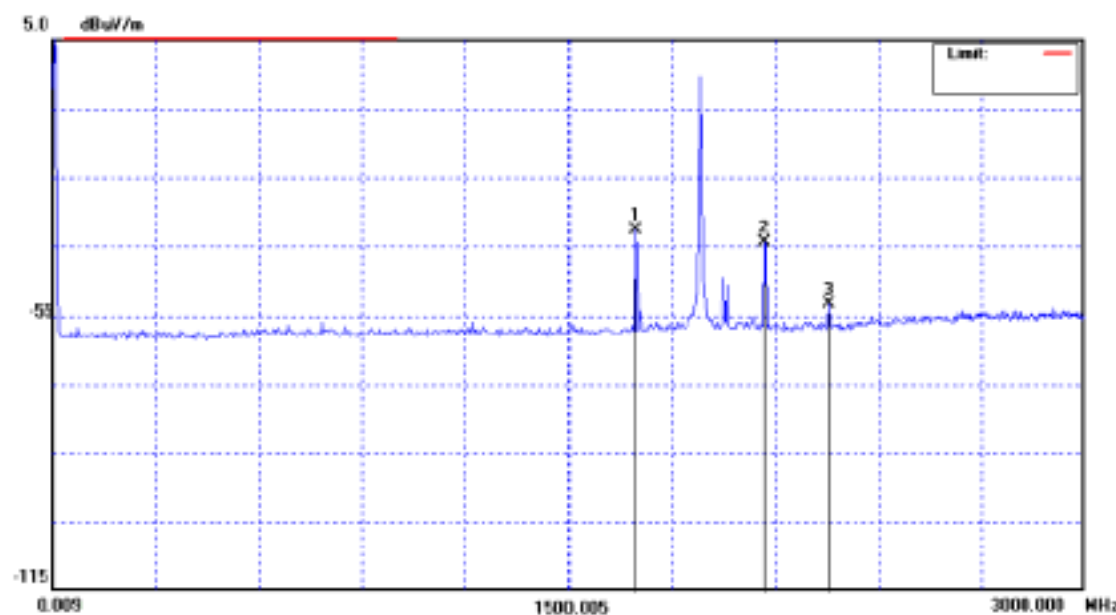

Mark 1	1692.861 MHz	-36.50 dBm
Mark 2	2070.003 MHz	-39.25 dBm
Mark 3	2258.574 MHz	-52.75 dBm


**Channel 661****3G~7.5GHz**

RBW 1 MHz

VBW 1 MHz

Ref 0 dBm

SWT 100 ms

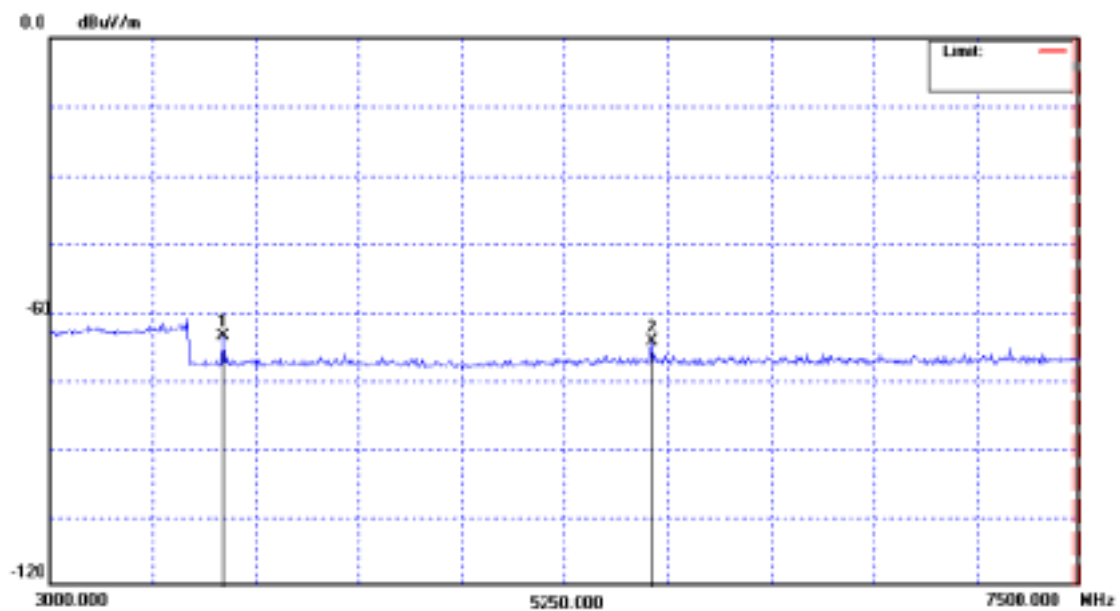

Mark 1 3758.571 MHz -65.25 dBm

Mark 2 5635.714 MHz -66.50 dBm


**Channel 661****7.5G~15GHz**

RBW 1 MHz

VBW 1 MHz

SWT 250 ms

Ref 0 dBm

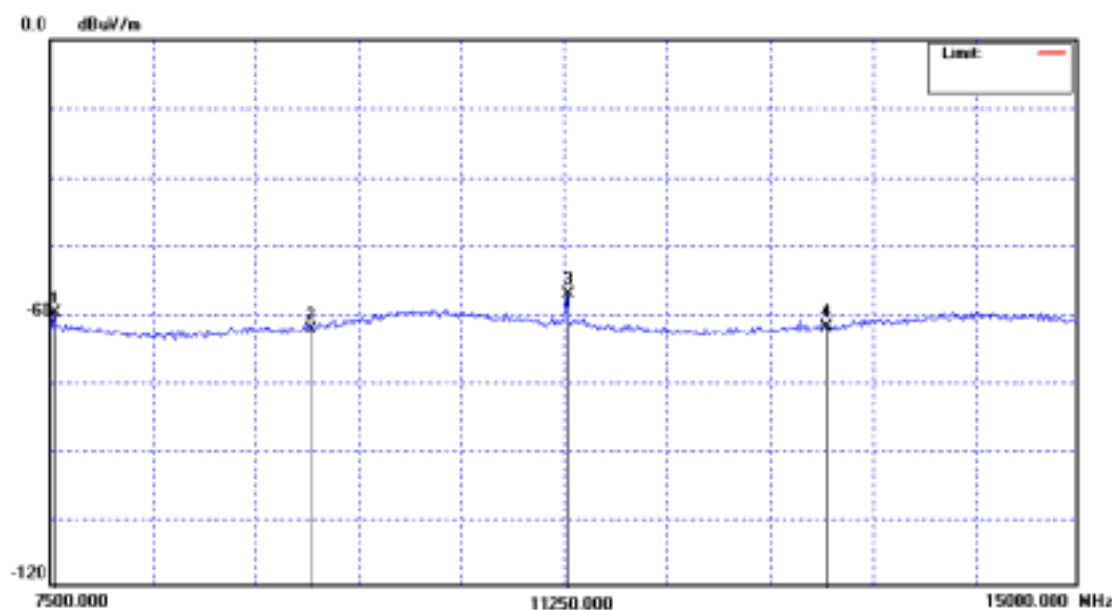

Mark 1	7521.429	MHz	-59.75	dBm
Mark 2	9400.000	MHz	-63.50	dBm
Mark 3	11271.429	MHz	-55.75	dBm
Mark 4	13160.000	MHz	-62.75	dBm


**Channel 810****9K~3GHz**

RBW 1 MHz

VBW 1 MHz

Ref -5 dBm

SWT 15 ms

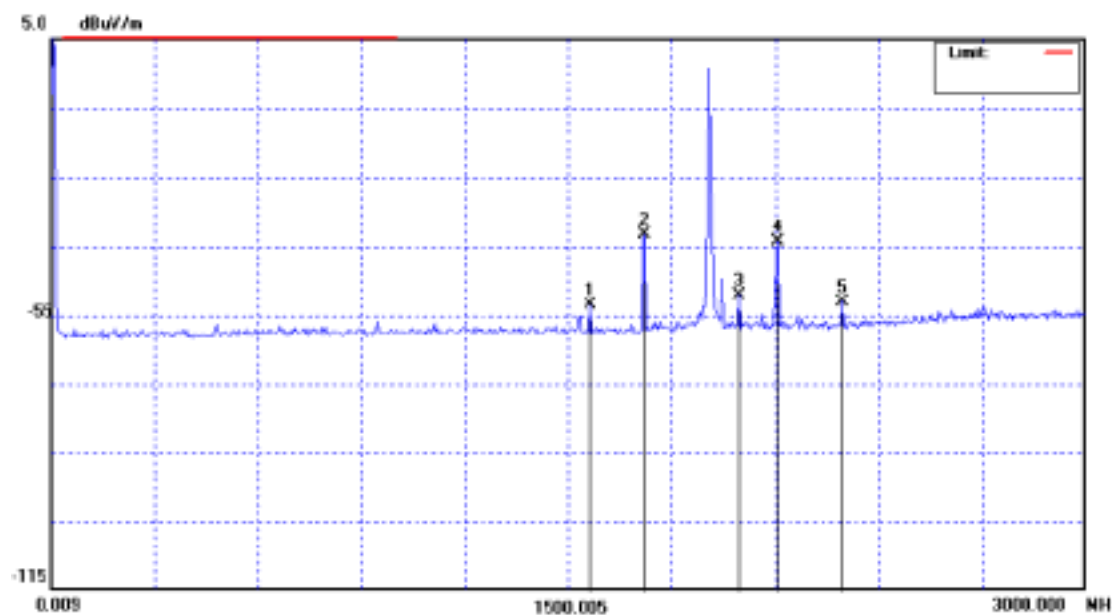

Mark 1	1564.290 MHz	-52.75 dBm
Mark 2	1722.861 MHz	-37.50 dBm
Mark 3	1992.860 MHz	-50.50 dBm
Mark 4	2104.288 MHz	-39.00 dBm
Mark 5	2292.859 MHz	-52.00 dBm


**Channel 810****3G~7.5GHz**

RBW 1 MHz

VBW 1 MHz

Ref 0 dBm

SWT 100 ms

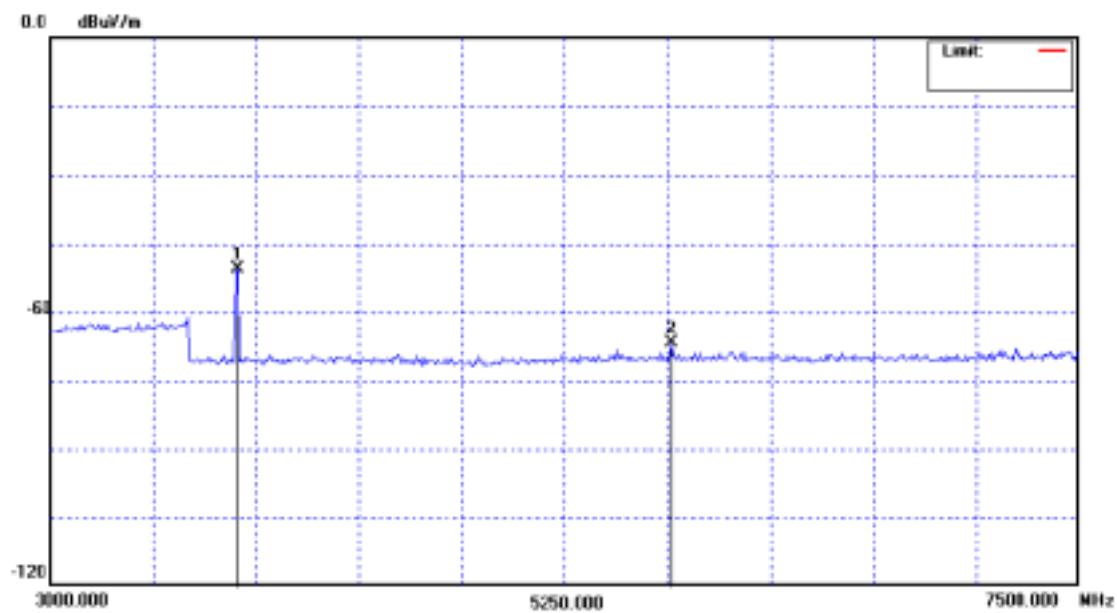

Mark 1	3816.429	MHz	-50.50	dBm
--------	----------	-----	--------	-----

Mark 2	5719.286	MHz	-66.75	dBm
--------	----------	-----	--------	-----


**Channel 810****7.5G~15GHz**

RBW 1 MHz

VBW 1 MHz

Ref 0 dBm

SWT 250 ms

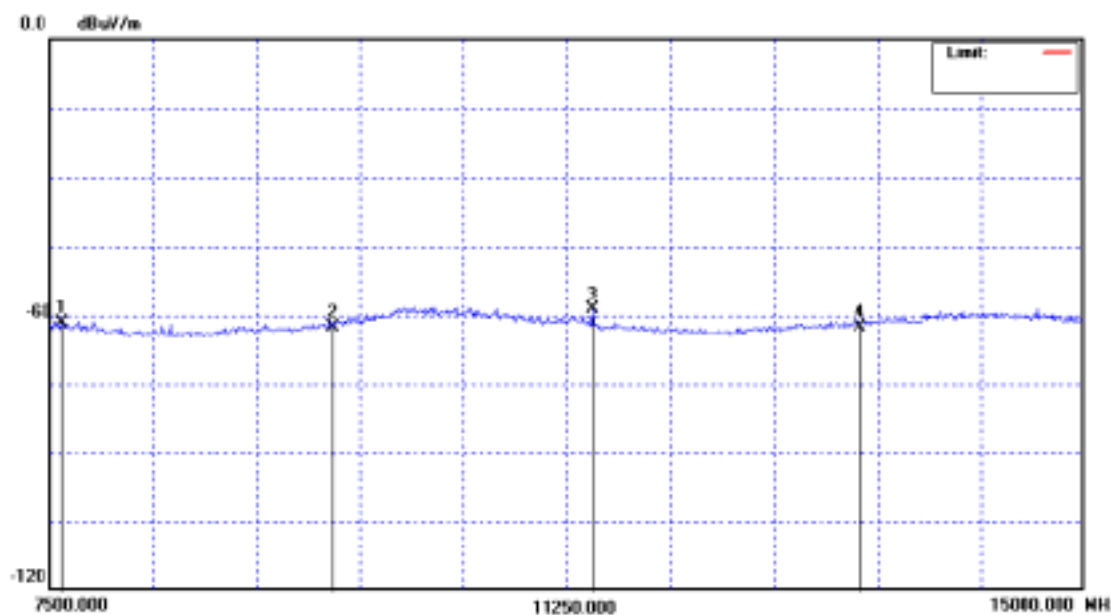

Mark 1	7585.400	MHz	-61.75	dBm
Mark 2	9548.500	MHz	-62.50	dBm
Mark 3	11442.857	MHz	-58.75	dBm
Mark 4	13368.000	MHz	-62.50	dBm



8 RADIATED SPURIOUS EMISSION

8.1 Test setup

A set of LP/HP/BS filters was used to prevent overloading the spectrum analyzer. The BS simulator was used to set the TX channel with GPRS and power level and modulate the TX signal with different bit patterns. The test was done using an automated test system, where the measurement devices were controlled by a computer.

8.2 Test method

a) The emissions were searched and maximized by rotate the turn table and raise and lower the antenna and manipulating the EUT. EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The “Read Value” is the maximum power value recorded on the spectrum analyzer.

b) All suspicious frequencies with emission levels were recorded.

c) The EUT was replaced with a substituting antenna.


The substitution horn antenna is substituted for EUT at the same position and signal generator export the CW signal to the calibration antenna. The signal generator level has to adjust to have the same emission nature. The radiated power can be calculated via the factor and antenna.

d) For each frequency recorded, the substituting antenna was fed with the power (from signal generator) giving the same reading as in (b). These power levels were reported. Actually the real E.I.R.P peak power is equal to “SG Power Value + Correction Factor (dB), Correction Factor (dB) = Substitution Antenna Gain (dBi) - Cable Loss(dB) ”



8.3 EUT operation modes

- The EUT makes a phone call to the GSM simulator.
- The GSM simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

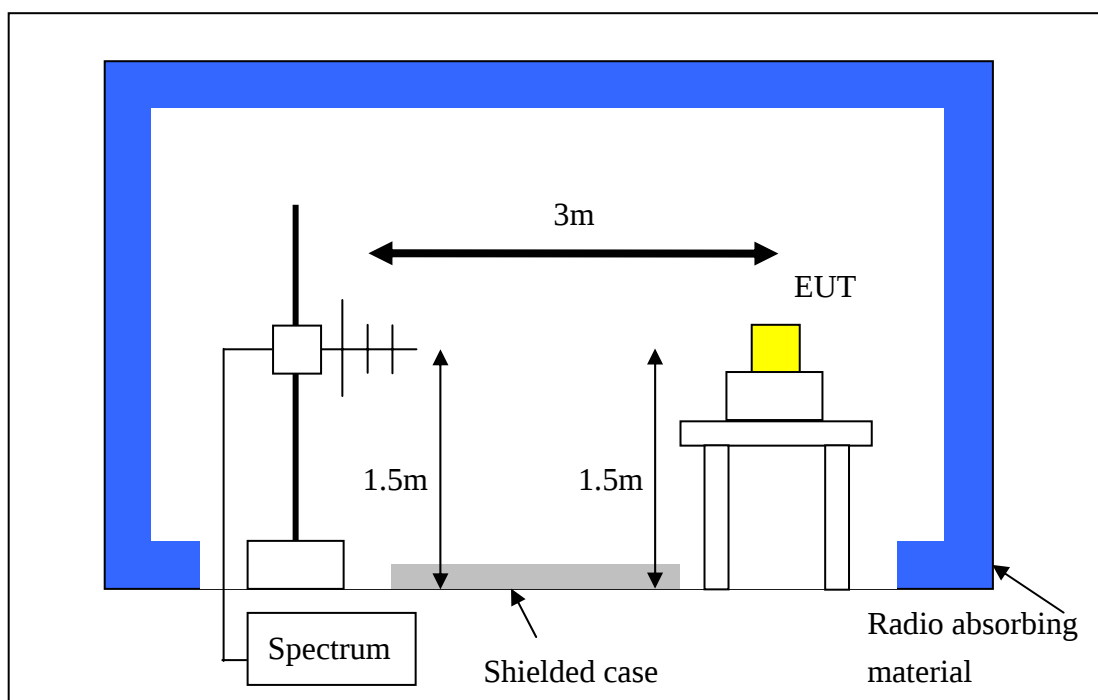

8.4 Limit

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. In the FCC 24.238(c), When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges (low channel 512 and high channel 810), both upper and lower edges are compliance with FCC 24.238(b), Adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.



8.5 Results

EUT	Dual-band Mobile Phone	MODEL	V66S
MODE	Tx Channel 512	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Sam Chaung	

Frequency range: 30MHz ~ 1GHz

RADIATED SPURIOUS EMISSION : Vertical polarization 3M

No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	37.55	-42.14	-13	-27.3	-30.89	0.11	31.00	-58.19
2	94.11	-43.80	-13	-29.7	-30.80	0.20	31.00	-60.50
3	192.32	-45.33	-13	-31.0	-30.96	0.24	31.20	-61.96
4	500.01	-48.86	-13	-33.1	-30.63	0.70	31.33	-63.73
5	668.58	-45.12	-13	-30.5	-30.55	0.90	31.45	-61.05
6	930.12	-47.30	-13	-32.7	-30.39	1.10	31.49	-63.09

RADIATED SPURIOUS EMISSION : Horizontal polarization 3M

No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	37.55	-42.69	-13	-35.2	-30.89	0.11	31.00	-66.05
2	94.11	-45.75	-13	-37.5	-30.80	0.20	31.00	-68.30
3	192.32	-49.33	-13	-42.1	-30.96	0.24	31.20	-73.06
4	499.51	-50.13	-13	-44.0	-30.63	0.70	31.33	-74.63
5	680.2	-49.44	-13	-40.8	-30.55	0.90	31.45	-71.35
6	930.12	-48.13	-13	-40.1	-30.39	1.10	31.49	-70.49

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna gain (dBi) - Cable Loss (dB)
3. “-” The emission levels were very low against the limit.



EUT	Tri-band Mobile Phone	MODEL	V66S
MODE	Tx Channel 512	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Sam Chaung	

Frequency range: 1GHz ~ 20GHz

RADIATED SPURIOUS EMISSION : Vertical polarization 3M								
No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	3688.0	-18.95	-13	-11.5	-27.50	9.0	36.5	-39.00
2	5550.6	-19.44	-13	-10.4	-29.20	9.5	38.7	-39.60
3	7400.8	-20.47	-13	-11.0	-30.80	9.8	40.6	-41.80
4	9251.0	-22.56	-13	-13.5	-33.50	10.0	43.5	-47.00
5	11101.2	-16.20	-13	-8.5	-36.10	10.3	46.4	-44.60
6	12951.4	-13.51	-13	-6.0	-35.00	10.5	45.5	-41.00

RADIATED SPURIOUS EMISSION : Horizontal polarization 3M								
No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	3688.0	-3.01	-13	3.8	-27.40	9.0	36.4	-23.60
2	5550.6	-15.25	-13	-7.9	-29.20	9.5	38.7	-37.10
3	7400.8	-16.20	-13	-5.5	-30.80	9.8	40.6	-36.30
4	9251.0	-16.80	-13	-6.2	-33.50	10.0	43.5	-39.70
5	11101.2	-19.54	-13	-8.5	-36.10	10.3	46.4	-44.60
6	12951.4	-17.05	-13	-6.0	-35.00	10.5	45.5	-41.00

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna gain (dBi) - Cable Loss (dB)
3. “-“ The emission levels were very low against the limit.



EUT	Dual-band Mobile Phone	MODEL	V66S
MODE	Tx Channel 661	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Sam Chaung	

Frequency range: 30MHz ~ 1GHz

RADIATED SPURIOUS EMISSION : Vertical polarization 3M

No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	33.38	-46.82	-13	-30.1	-30.90	0.11	31.01	-61.00
2	53.28	-44.26	-13	-28.5	-30.91	0.13	31.04	-59.41
3	100.2	-40.12	-13	-34.3	-30.85	0.20	31.05	-65.15
4	630.5	-46.55	-13	-29.1	-30.58	0.90	31.48	-59.68
5	670.1	-42.56	-13	-24.6	-30.55	0.90	31.45	-55.15
6	940.2	-45.16	-13	-27.9	-30.48	1.12	31.60	-58.38

RADIATED SPURIOUS EMISSION : Horizontal polarization 3M

No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	36.5	-41.60	-13	-24.8	-30.90	0.11	31.01	-55.70
2	58.15	-42.50	-13	-26.3	-30.91	0.13	31.04	-57.21
3	104.3	-43.68	-13	-27.1	-30.85	0.20	31.05	-57.95
4	637.5	-44.98	-13	-30.9	-30.58	0.90	31.48	-61.48
5	677.1	-45.75	-13	-31.5	-30.55	0.90	31.45	-62.05
6	948.5	-43.56	-13	-30.5	-30.48	1.12	31.60	-60.98

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna gain (dBi) - Cable Loss (dB)
3. “-” The emission levels were very low against the limit.



EUT	Tri-band Mobile Phone	MODEL	V66S
MODE	Tx Channel 661	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Sam Chaung	

Frequency range: 1GHz ~ 20GHz

RADIATED SPURIOUS EMISSION : Vertical polarization 3M								
No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	3758	-3.86	-13	4.5	-27.20	8.90	36.1	-22.70
2	5635	-4.68	-13	3.7	-29.37	9.58	38.95	-25.67
3	9400	-7.21	-13	5.2	-33.40	10.5	43.9	-28.20

RADIATED SPURIOUS EMISSION : Horizontal polarization 3M								
No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	3758	4.8	-13	12.9	-27.20	8.90	36.1	-14.30
2	5635	-1.52	-13	5.9	-29.37	9.58	38.95	-23.47
3	9401	-2.89	-13	5.3	-33.40	10.5	43.9	-28.10

REMARKS:

1. Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna gain (dBi) - Cable Loss (dB)
3. “-” The emission levels were very low against the limit.



EUT	Dual-band Mobile Phone	MODEL	V66S
MODE	Tx Channel 810	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Sam Chaung	

Frequency range: 30MHz ~ 1GHz

RADIATED SPURIOUS EMISSION : Vertical polarization 3M

No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	33.88	-44.01	-13	-28.5	-30.89	0.11	31.00	-59.39
2	94.99	-41.49	-13	-27.1	-30.80	0.20	31.00	-57.90
3	300.11	-41.13	-13	-27.2	-30.75	0.55	31.30	-57.95
4	563.51	-40.95	-13	-24.3	-30.63	0.80	31.43	-54.93
5	668.58	-38.38	-13	-21.2	-30.54	0.90	31.44	-51.74
6	935.1	-40.58	-13	-23.5	-30.39	1.10	31.49	-53.89

RADIATED SPURIOUS EMISSION : Horizontal polarization 3M

No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	38.73	-40.35	-13	-24.3	-30.89	0.11	31.00	-55.19
2	78.85	-42.13	-13	-27.8	-30.91	0.15	31.06	-58.71
3	320.11	-44.23	-13	-26.3	-30.74	0.56	31.30	-57.04
4	530.26	-45.20	-13	-16.3	-30.70	0.70	31.40	-47.00
5	600.15	-40.44	-13	-23.6	-30.61	0.84	31.45	-54.21
6	740.3	-43.15	-13	-24.7	-30.49	1.00	31.49	-55.19

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna gain (dBi) - Cable Loss (dB)
3. “-“ The emission levels were very low against the limit.



EUT	Tri-band Mobile Phone	MODEL	V66S
MODE	Tx Channel 810	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Sam Chaung	

Frequency range: 1GHz ~ 20GHz

RADIATED SPURIOUS EMISSION : Vertical polarization 3M								
No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	3814	2.55	-13	9.2	-27.30	9	36.3	-18.10
2	5720	1.00	-13	7	-28.91	9.65	38.56	-21.91
3	9549	-0.56	-13	6	-34.05	10.25	44.3	-28.05

RADIATED SPURIOUS EMISSION : Horizontal polarization 3M								
No	Frequency (MHz)	Emission Level(dBm)	Limit (dBm)	S.G Power (dBm)	Correction Factor (dB)	Substitution Ant gain (dBi)	Cable Loss (dB)	Power Value(dBm)
1	3820	3.50	-13	10.1	-27.30	9	36.3	-17.20
2	5729.4	2.13	-13	8.6	-29.35	9.65	39	-20.75
3	9549.5	1.25	-13	12.5	-34.45	10.25	44.7	-21.95

REMARKS:

1. Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna gain (dBi) - Cable Loss (dB)
3. “-“ The emission levels were very low against the limit.




9. FREQUENCY STABILITY, TEMPERATURE VARIATION

9.1 EUT operation modes

EUT	Dual-band Mobile Phone	MODEL	V66S
MODE	TX channel 661	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	500 Bursts
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 999 hPa	TESTED BY: Sam Chaung	

9.2 Test setup

The BS simulator was used to set the TX channel with GPRS and power level and modulate the TX signal with different bit patterns.

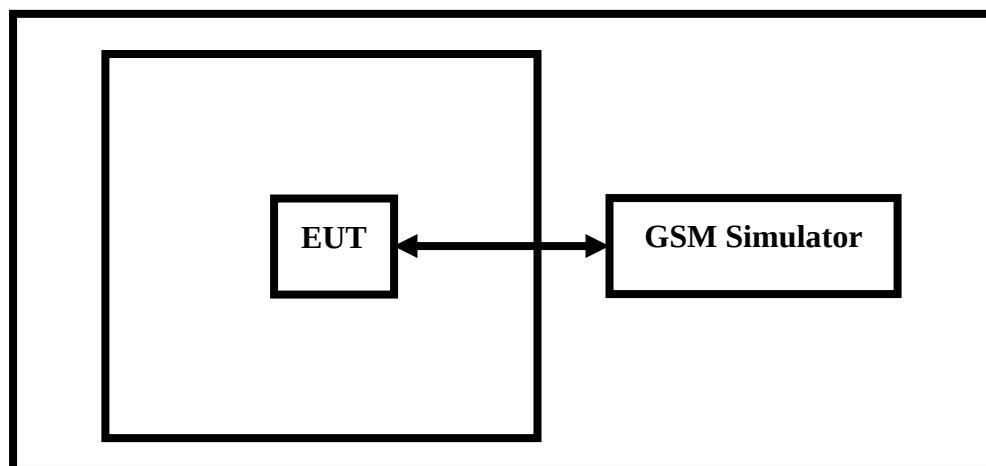

9.3 Test method

- The climate chamber temperature was set to the minimum value and the temperature was allowed to stabilize. A soak time (after chamber reaches appropriate temperature) is 60 minutes.
- The EUT was placed in the chamber
- The EUT was set in idle mode for 45 minutes.
- The EUT was set to transmit.
- The transmit frequency error was measured immediately



9.4 Limit

According to the FCC part 2.4235 shall be tested the frequency stability. The rule is defined that” The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.” The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 0.1 ppm of the received frequency from the base station. The extreme temperature rule is comply with the 2.1055(a)(1) –30 ~50 .

9.5 Results

Frequency deviation, temperature variation		
Temperature [°C]	Deviation [Hz]	Deviation [ppm]
-30	-18	-0.010
-20	-19	-0.010
-10	-19	-0.010
0	-18	-0.010
10	24	0.013
20	18	0.010
30	17	0.009
40	24	0.013
50	17	0.009




10. FREQUENCY STABILITY, VOLTAGE VARIATION

10.1 EUT operation modes

EUT	Dual-band Mobile Phone	MODEL	V66S
MODE	TX channel 661	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	500 Bursts
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 999 hPa	TESTED BY:	Sam Chaung

10.2 Test setup

The BS simulator was used to set the TX channel with GPRS and power level and modulate the TX signal with different bit patterns.

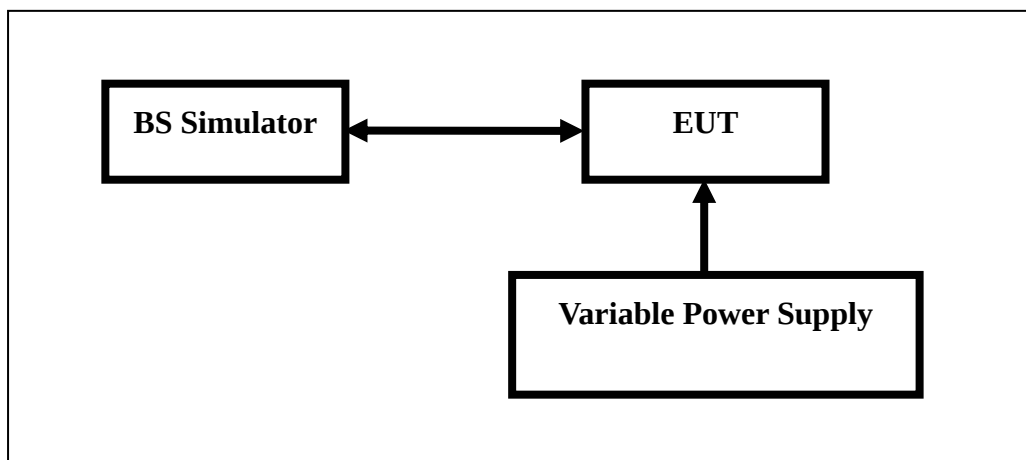

10.3 Test method

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.



10.4 Limit

According to the FCC part 2.4235 shall be tested the frequency stability. The rule is defined that” The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.” The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 0.1 ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

10.5 Results


Frequency deviation, voltage variation			
Level	Voltage [V]	Deviation [Hz]	Deviation [ppm]
Battery full point	4.2	28	0.015
Nominal	3.8	27	0.014
Battery cut-off point	3.55	24	0.013



11. 99% OCCUPIED BANDWIDTH

11.1 Test setup

The BS simulator was used to set the TX channel with GPRS and power level and modulate the TX signal with different bit patterns.

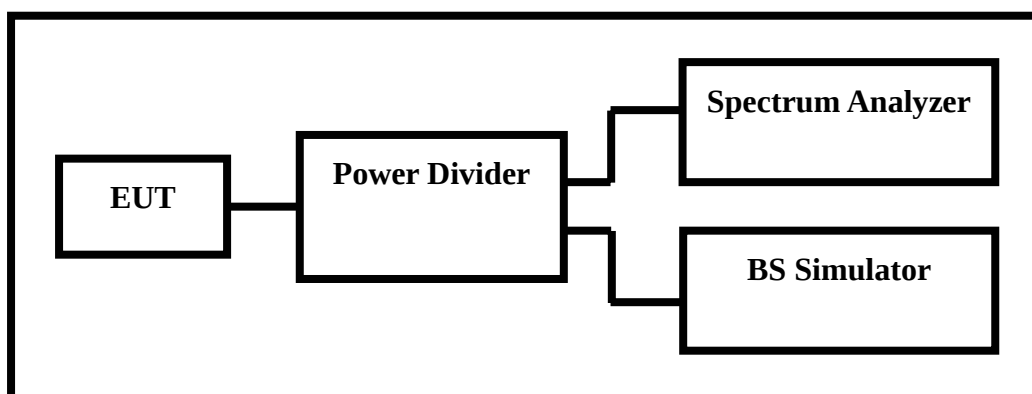

11.2 EUT operation modes

- The EUT makes a phone call to the GSM with GPRS simulator.
- The GSM with GPRS simulator station system controlled a EUT to export maximum and minimum output power under transmission mode and specific channel frequency.

11.3 Limit

According to FCC 24.238(b) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

11.4 Results


Frequency (MHz)	Max. Output Power -26 dBc Bandwidth (kHz)	Min. Output Power -26 dBc Bandwidth (kHz)
1850.2	315	316
1880.2	315	320
1909.8	315	314



11.5 Screen shots

Channel 512 Max. Power

-26 dBc Bandwidth

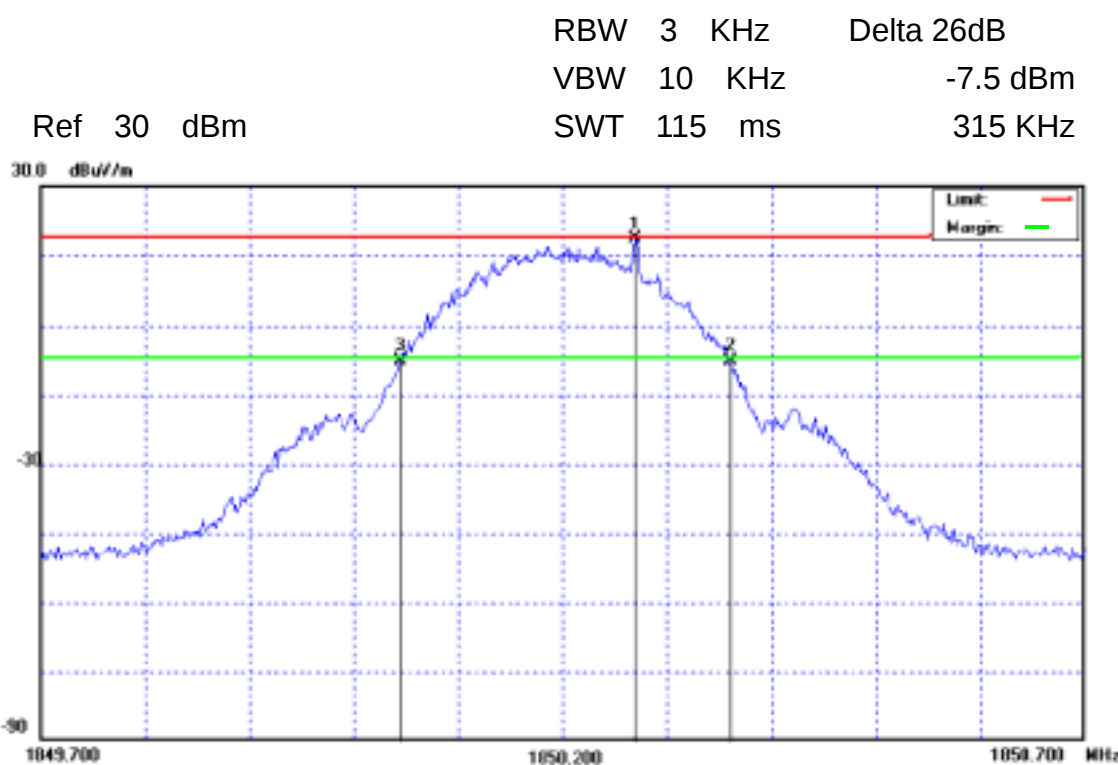


Mark 1	1850.270	MHz	18.5	dBm
Mark 2	1850.359	MHz	-7.5	dBm
Mark 3	1850.044	MHz	-7.5	dBm



Channel 512 Min. Power

-26 dBc Bandwidth


	RBW	3	KHz	Delta	26dB
	VBW	10	KHz		-29.5 dBm
Ref	0	dBm	SWT	115	ms
					316 KHz

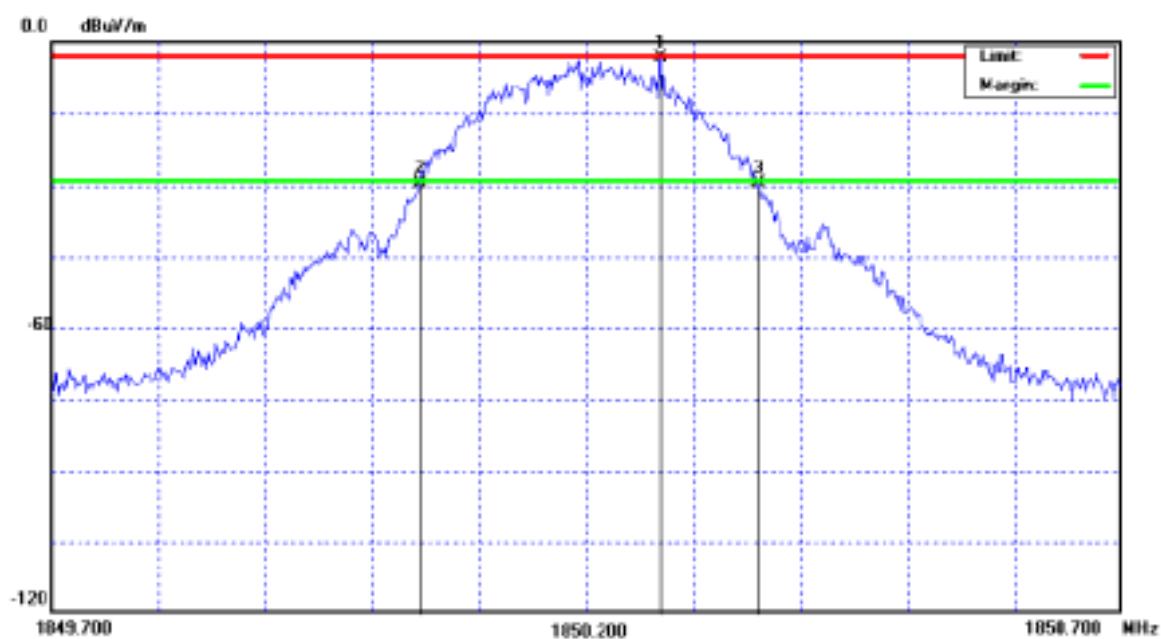

Mark 1	1850.270	MHz	-3.5	dBm
Mark 2	1850.044	MHz	-29.5	dBm
Mark 3	1850.360	MHz	-29.5	dBm

**Channel 661 Max. Power****-26 dBc Bandwidth**

	RBW	3	KHz	Delta 26dB
	VBW	10	KHz	-8.5 dBm
Ref 30 dBm	SWT	115	ms	315 KHz

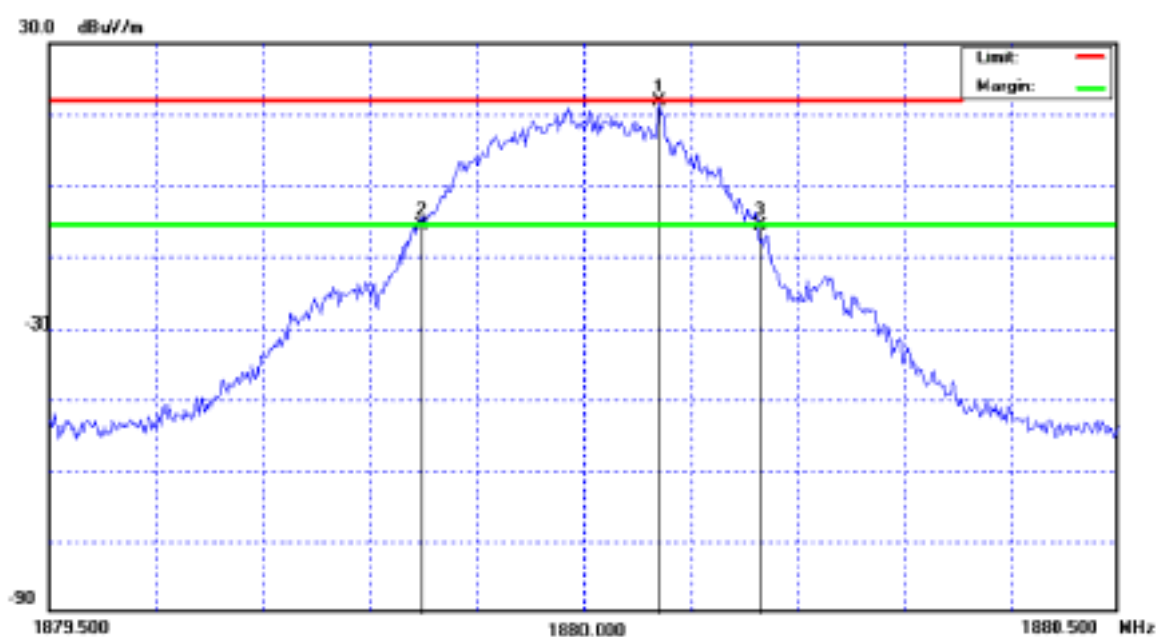


Mark 1	1880.070	MHz	17.5	dBm
Mark 2	1879.848	MHz	-8.5	dBm
Mark 3	1880.163	MHz	-8.5	dBm




Channel 661 Min. Power


-26 dBc Bandwidth

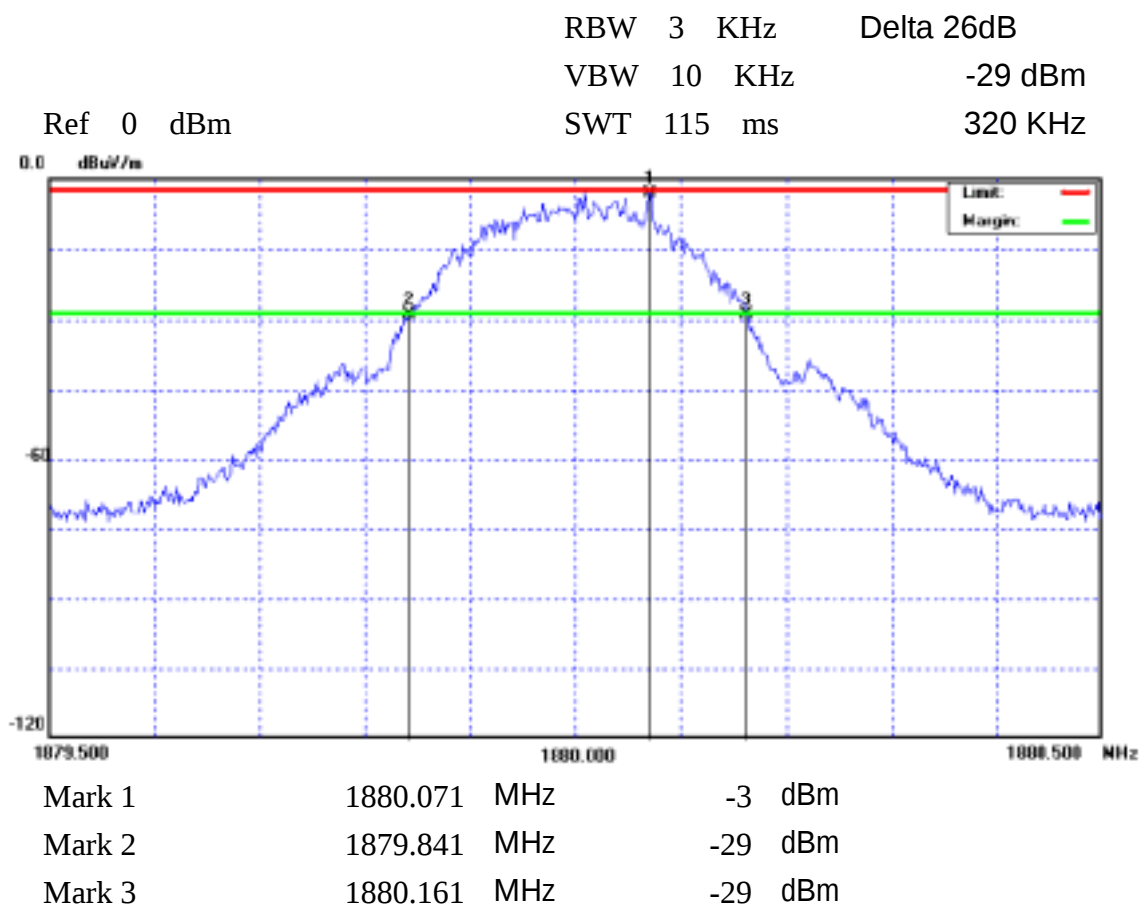



Channel 810 Max. Power -26 dBc Bandwidth

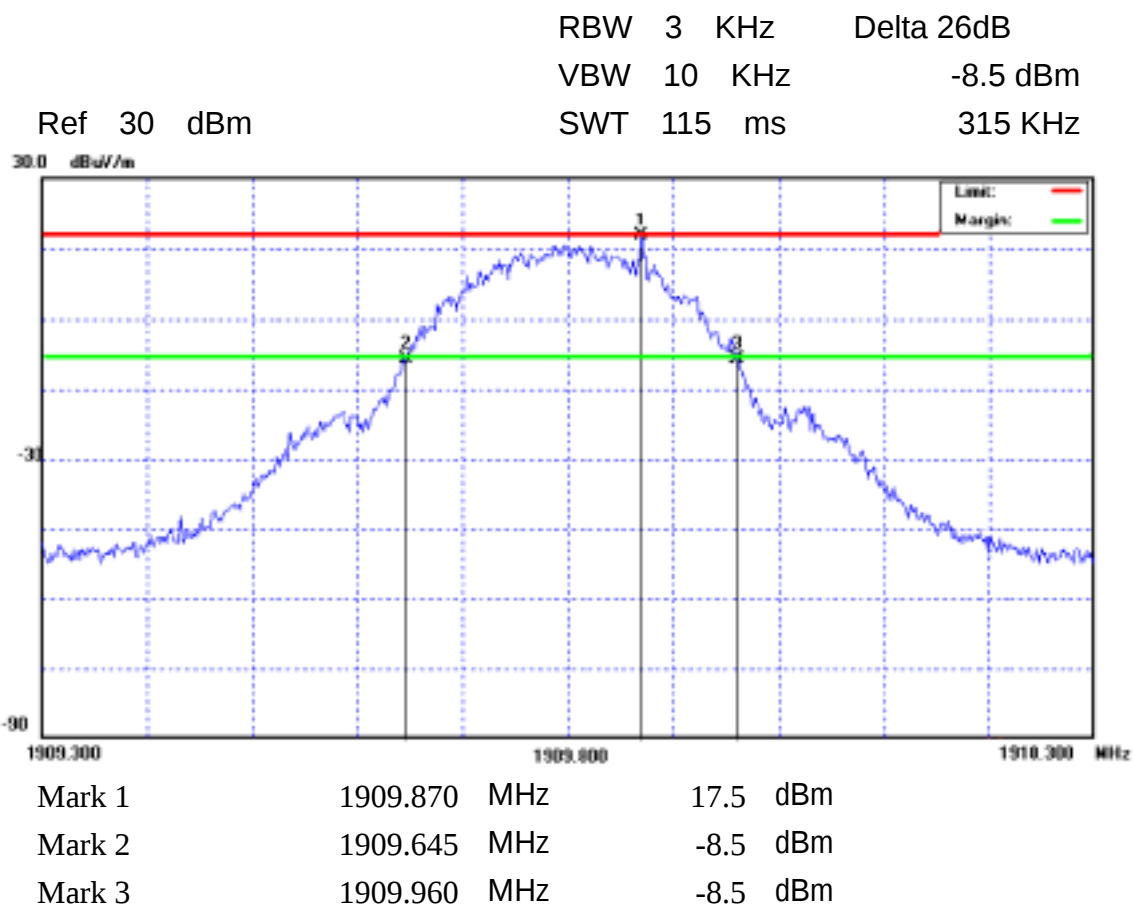

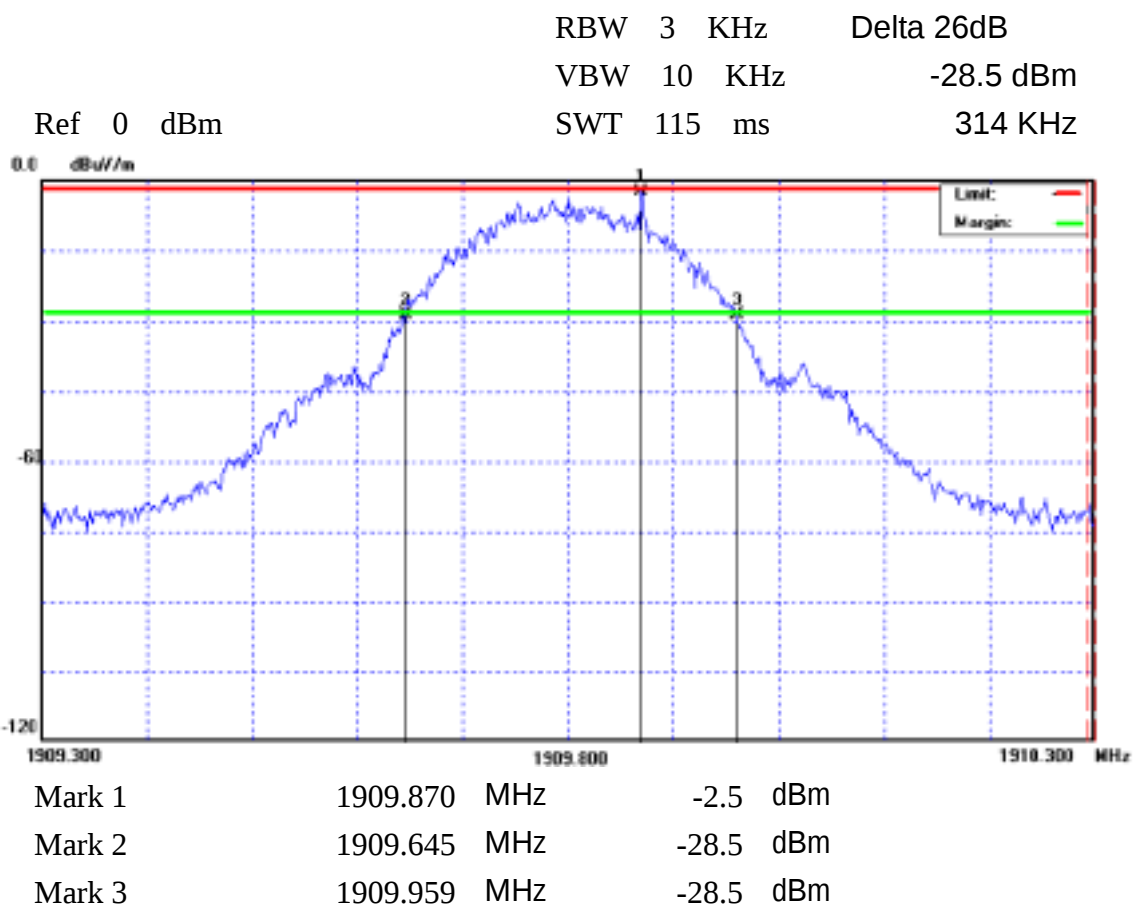
**Channel 810 Min. Power****-26 dBc Bandwidth**



12. BANDEDGE COMPLIANCE

12.1 Test setup

The BS simulator was used to set the TX channel with GPRS and power level and modulate the TX signal with different bit patterns.

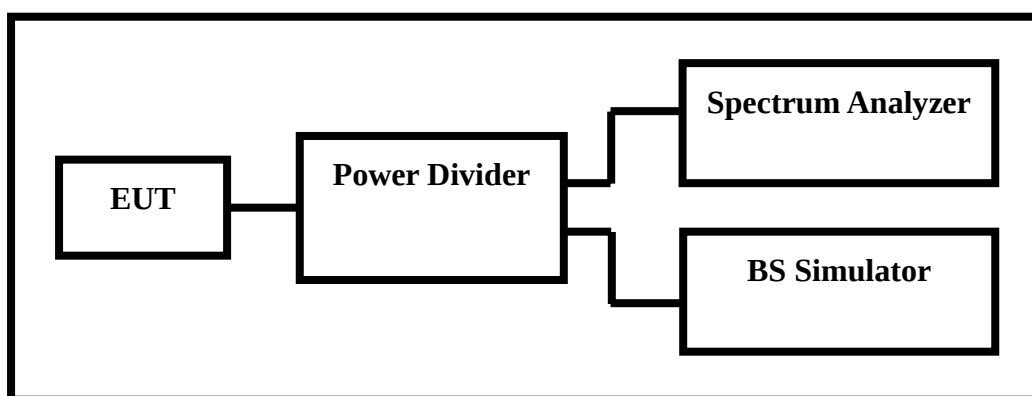

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

12.2 EUT operation modes

- a. The EUT makes a phone call to the GSM with GPRS simulator.
- b. The GSM with GPRS simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

12.3 Limit


The PCS frequency bands refer to the FCC 24.229 rule. According to FCC 24.238(b) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300kHz and the resolution bandwidth is 3kHz.



12.4 Results

Lower Band Edge

Ref 30 dBm RBW 3 KHz Mark 1
 VBW 10 KHz -19.95 dBm
 SWT 225 ms 1.849997 GHz

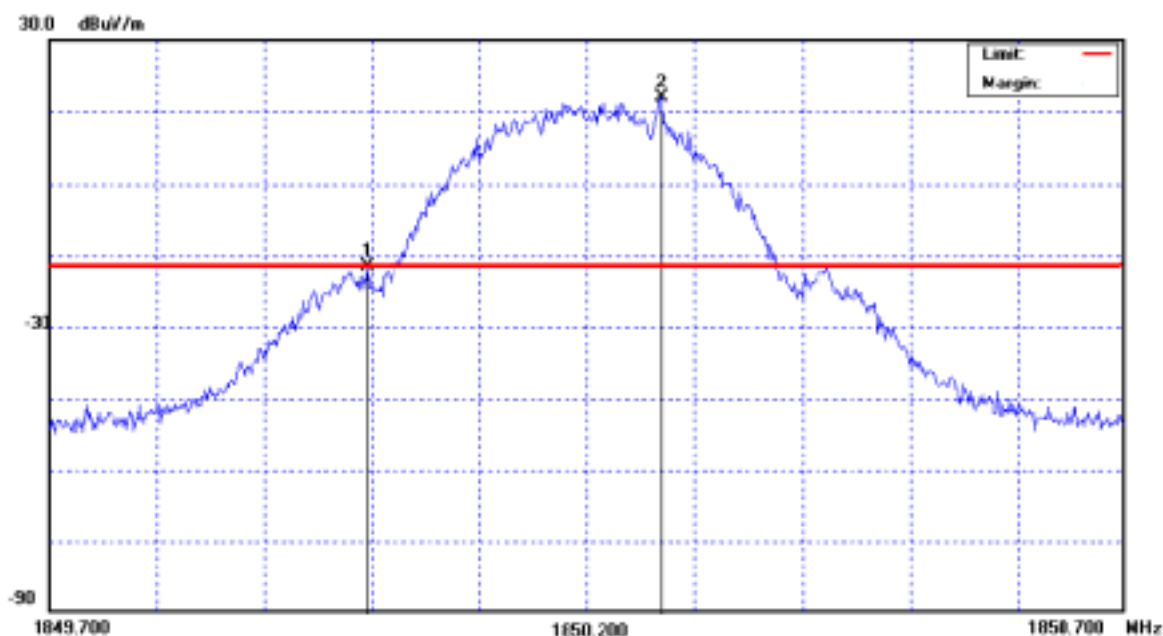


Frequency	Read data	Loss	Power	Limit	Margin	PASS
1849.997M	-19.95	-5.14	-14.81	-13	-1.81	

* Loss= splitter loss and cable loss in the transmitted path track on test frequency

Higher Band Edge

Ref 30 dBm
 RBW 3 KHz
 VBW 10 KHz
 SWT 225 ms
 Mark 1
 -20.15 dBm
 1.910007 GHz

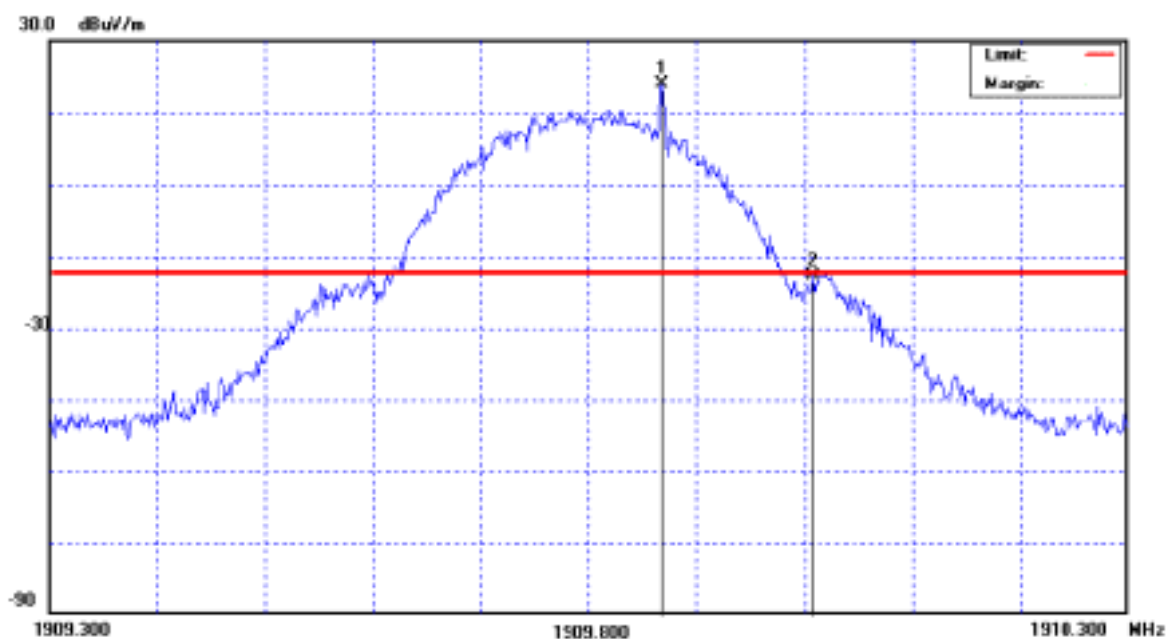

Frequency	Read data	loss	Power	Limit	Margin	PASS
1.910007G	-20.15	-5.5	-14.65	-13	-1.65	

* Loss= splitter loss and cable loss in the transmitted path track on test frequency

14. TEST EQUIPMENT



14.1 EQUIPMENT

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
Advantest	Spectrum Analyzer	R3271A	120100971	Apr.08,2005	Apr.08,2007
Agilent	Wireless Communication	8960(E5515C)	GB41450409	Jan.31,2005	Jan.31,2007
Agilent	Single Generator	E8257D	MY44320425	Jan.15,2005	Jan.15,2007
Agilent	Power Meter	E4418B	GB42420591	May 10, 2005	May 10, 2006
Agilent	Power Sensor	8481H	MY41091025	May 11, 2005	May 11, 2006
KI	DC power supply	DPS	1303AF	NCR	NCR
AML	Pre-Amplifier	0120L3410	107	NCR	NCR
GIANT FORCE	Thermal Chamber	GTH-225-70-1P	NCR	Nov 11, 2004	Nov 11, 2006
Agilent	Dual Directional Coupler	778D	50334	NCR	NCR
Agilent	Power splitter	87302C	3239A00760	NCR	NCR
Agilent	attenuator	8491A	NCR	NCR	NCR
Microwave Circuits	High pass filter	H1G513G3	NCR	NCR	NCR
Microwave Circuits	High pass filter	H04G18G2	NCR	NCR	NCR
K&L	Tunable notch filter	5TNF-1700/2000-0.1-N/N	NCR	NCR	NCR
ETS	Bilog Antenna	3142B	00022056	May 07, 2003	May 07, 2006
R&S	Horn Antenna	HF 960	NCR	Jun 15, 2003	Jun 15, 2006
ETS	LISN	3810	00026823	Aug 07, 2003	Aug 07, 2006

13. Measurement Uncertainty



13.1 Uncertainty

Uncertainty of measurement

Measurement	Frequency	Uncertainty
Conducted emissions	9K ~ 30MHz	2.6dB
Radiated emission	30M ~ 500MHz	3.5dB
	500M ~ 1GHz	3.9dB
	1G ~ 10GHz	3.5dB
	10G ~ 20GHz	3.9dB