FCC TEST REPORT

REPORT NO.: RF920310R04
MODEL NO.: WL-100G
RECEIVED: Mar. 10, 2003
TESTED: Mar. 13, 2003 ~ May 28, 2003

APPLICANT: ASUSTeK COMPUTER INC.

ADDRESS: 4Fl., No. 150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei, Taiwan, R.O.C.

This test report consists of 61 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.

0528
ILAC MRA

Lab Code: 200102-0

Table of Contents

1 CERTIFICATION 4
2 SUMMARY OF TEST RESULTS 5
3 GENERAL INFORMATION 6
3.1 GENERAL DESCRIPTION OF EUT 6
3.2 DESCRIPTION OF TEST MODES 7
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS 7
3.4 DESCRIPTION OF SUPPORT UNITS 8
4 TEST TYPES AND RESULTS 9
4.1 CONDUCTED EMISSION MEASUREMENT 9
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 9
4.1.2 TEST INSTRUMENTS 9
4.1.3 TEST PROCEDURES 10
4.1.4 DEVIATION FROM TEST STANDARD 10
4.1.5 TEST SETUP 11
4.1.6 EUT OPERATING CONDITIONS 11
4.1.7 TEST RESULTS 12
4.2 RADIATED EMISSION MEASUREMENT 18
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 18
4.2.2 TEST INSTRUMENTS 19
4.2.3 TEST PROCEDURES 20
4.2.4 DEVIATION FROM TEST STANDARD 20
4.2.5 TEST SETUP 21
4.2.6 EUT OPERATING CONDITIONS 21
4.2.7 TEST RESULTS 22
4.3 6dB BANDWIDTH MEASUREMENT 29
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT 29
4.3.2 TEST INSTRUMENTS 29
4.3.3 TEST PROCEDURE 30
4.3.4 DEVIATION FROM TEST STANDARD 30
4.3.5 TEST SETUP 30
4.3.6 EUT OPERATING CONDITIONS 30
4.3.7 TEST RESULTS 31
4.4 MAXIMUM PEAK OUTPUT POWER 39
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT 39
4.4.2 TEST INSTRUMENTS 39
4.4.3 TEST PROCEDURES 40
4.4.4 DEVIATION FROM TEST STANDARD 40

4.4.5 TEST SETUP 40
4.4.6 EUT OPERATING CONDITIONS 40
4.4.7 TEST RESULTS 41
4.5 POWER SPECTRAL DENSITY MEASUREMENT 42
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT 42
4.5.2 TEST INSTRUMENTS 42
4.5.3 TEST PROCEDURE 43
4.5.4 DEVIATION FROM TEST STANDARD 43
4.5.5 TEST SETUP 43
4.5.6 EUT OPERATING CONDITIONS 43
4.5.7 TEST RESULTS 44
4.6 BAND EDGES MEASUREMENT 52
4.6.1 LIMITS OF BAND EDGES MEASUREMENT 52
4.6.2 TEST INSTRUMENTS 52
4.6.3 TEST PROCEDURE 52
4.6.4 DEVIATION FROM TEST STANDARD 52
4.6.5 EUT OPERATING CONDITION 53
4.6.6 TEST RESULTS 53
4.7 ANTENNA REQUIREMENT 58
4.7.1 STANDARD APPLICABLE 58
4.7.2 ANTENNA CONNECTED CONSTRUCTION 58
5 PHOTOGRAPHS OF THE TEST CONFIGURATION 59
6 INFORMATION ON THE TESTING LABORATORIES 61

1 CERTIFICATION

PRODUCT : 802.11g Wireless PCMCIA Card
MODEL NO. : WL-100G
BRAND NAME : ASUS
APPLICANT : ASUSTeK COMPUTER INC.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247), ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Mar. 13, 2003 to May 28, 2003, The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY : Emily Lu, **DATE :** May 28, 2003

APPROVED BY : Dr. Alan Lane, JVP, **DATE :** May 28, 2003

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	**Test Type and Limit**	**Result**	**REMARK**
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is –11.01dBuV at 0.170MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is –5.0dBuV at 600.76MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11g Wireless PCMCIA Card
MODEL NO.	WL-100G
POWER SUPPLY	3.3VDC from host equipment
MODULATION	CCK, DQPSK, DBPSK, 16QAM, 64QAM
TRANSFER RATE	up to 54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
CHANNEL SPACING	5MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	10.98dBm
ANTENNA TYPE	Dipole Antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps and complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
2. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate of 11Mbps with CCK technique and 6Mbps with OFDM technique, worst cases, were chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an 802.11g Wireless PCMCIA Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-19O-B220	FCC DoC APPROVED
2	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC APPROVED
3	MODEM	ACEEX	1414	980020569	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:
1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	847793/022	Mar. 10, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	828075/003	July 23, 2003
ROHDE & SCHWARZ 200-A Four-line V-Network	ENV4200	830326/018	Oct. 30, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Nov. 29, 2003
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Nov. 29, 2003
EMCO-L.I.S.N. (for peripheral)	3825/2	90031627	July 23, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C05.01	July 19, 2003
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-305	Feb. 23, 2004
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-306	Feb. 23, 2004

NOTE:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. "*": These equipment are used for conducted telecom port test only (if tested).
3. The test was performed in ADT Shielded Room No. 5.
4. The VCCI Site Registration No. is C-1093.

4.1.3 TEST PROCEDURES

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

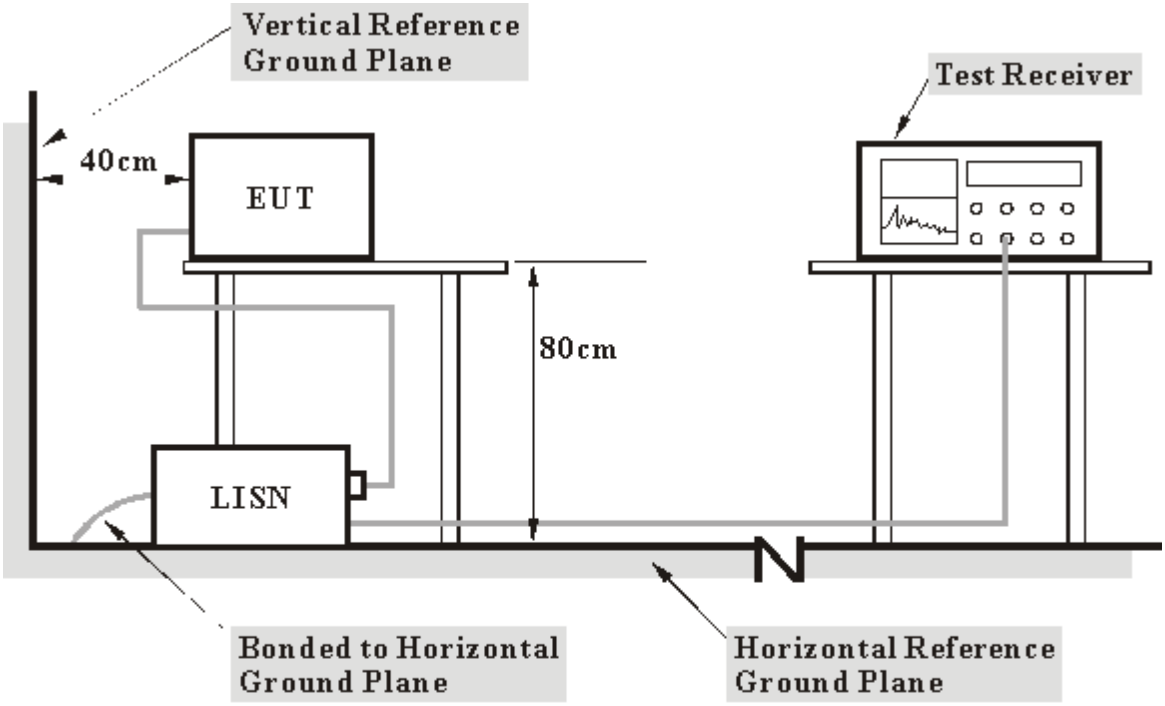

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

a. Plug the EUT into a computer system placed on a testing table.
b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
c. The computer system sent "H" messages to its screen.
d. The computer system sent “H” messages to modem.
e. The computer system sent "H" messages to printer, and the printer prints them on paper.

4.1.7 TEST RESULTS

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
MODE	Channel 1	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	53.43	-	53.53	-	64.98	54.98	-11.45	-
2	0.228	0.10	47.42	-	47.52	-	62.52	52.52	-15.00	-
3	0.283	0.10	41.41	-	41.51	-	60.73	50.73	-19.22	-
4	0.341	0.10	38.00	-	38.10	-	59.17	49.17	-21.07	-
5	13.441	0.74	23.87	-	24.61	-	60.00	50.00	-35.39	-
6	21.023	1.12	28.82	-	29.94	-	60.00	50.00	-30.06	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

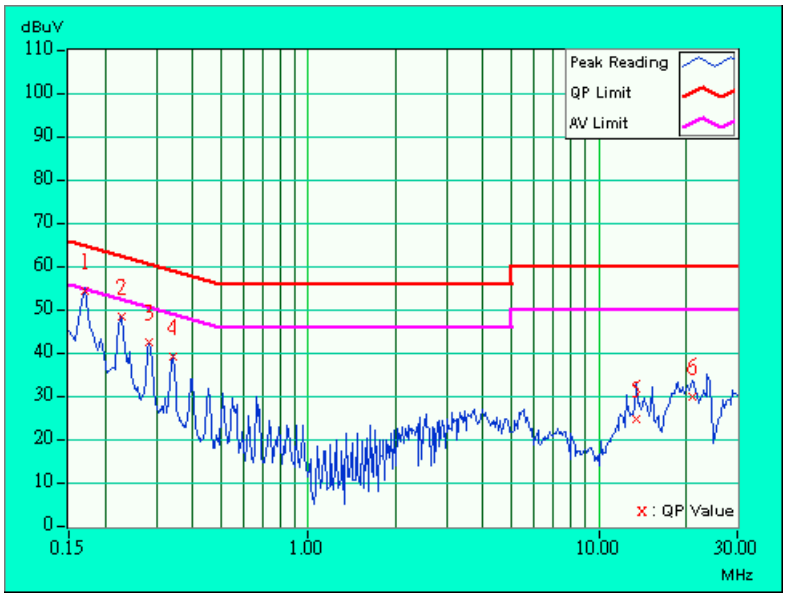

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
MODE	Channel 1	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	53.87	-	53.97	-	64.98	54.98	-11.01	-
2	0.197	0.10	35.29	-	35.39	-	63.74	53.74	-28.35	-
3	0.228	0.10	47.07	-	47.17	-	62.52	52.52	-15.35	-
4	0.572	0.13	19.84	-	19.97	-	56.00	46.00	-36.03	-
5	0.830	0.17	11.79	-	11.96	-	56.00	46.00	-44.04	-
6	3.738	0.29	30.66	-	30.95	-	56.00	46.00	-25.05	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

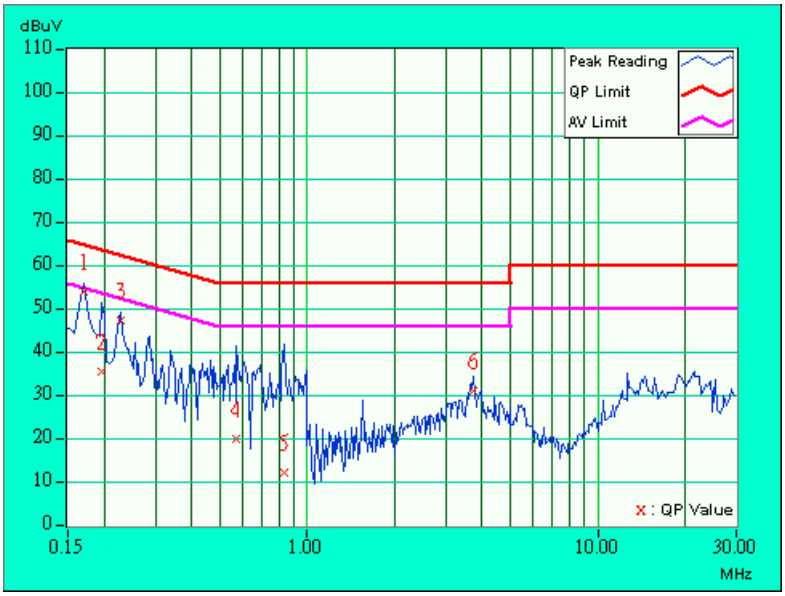

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
MODE	Channel 6	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	52.79	-	52.89	-	64.98	54.98	-12.09	-
2	0.228	0.10	46.85	-	46.95	-	62.52	52.52	-15.57	-
3	0.283	0.10	41.03	-	41.13	-	60.73	50.73	-19.60	-
4	0.341	0.10	37.48	-	37.58	-	59.17	49.17	-21.59	-
5	12.594	0.70	22.38	-	23.08	-	60.00	50.00	-36.92	-
6	20.699	1.11	28.90	-	30.01	-	60.00	50.00	-29.99	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

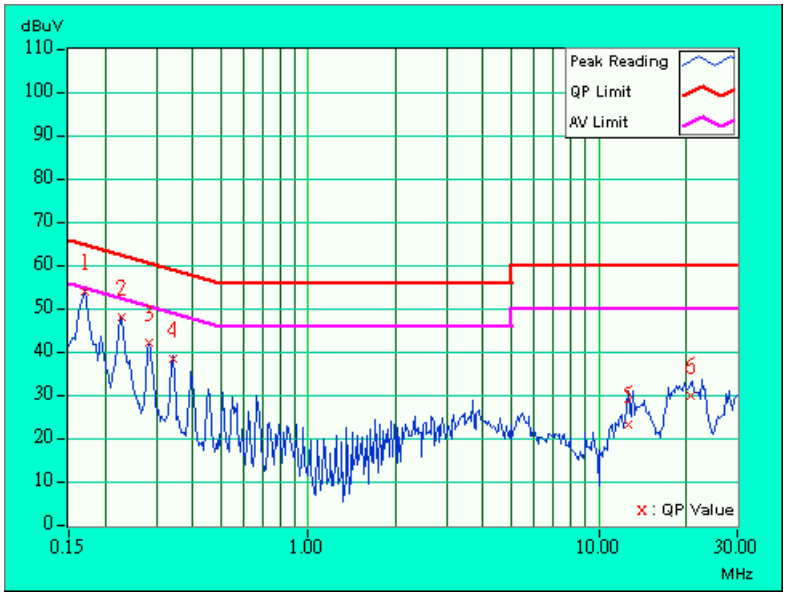

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
MODE	Channel 6	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	51.76	-	51.86	-	64.98	54.98	-13.12	-
2	0.228	0.10	45.81	-	45.91	-	62.52	52.52	-16.61	-
3	0.283	0.10	39.33	-	39.43	-	60.73	50.73	-21.30	-
4	0.341	0.10	36.14	-	36.24	-	59.17	49.17	-22.93	-
5	3.855	0.29	31.66	-	31.95	-	56.00	46.00	-24.05	-
6	18.145	0.69	27.54	-	28.23	-	60.00	50.00	-31.77	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

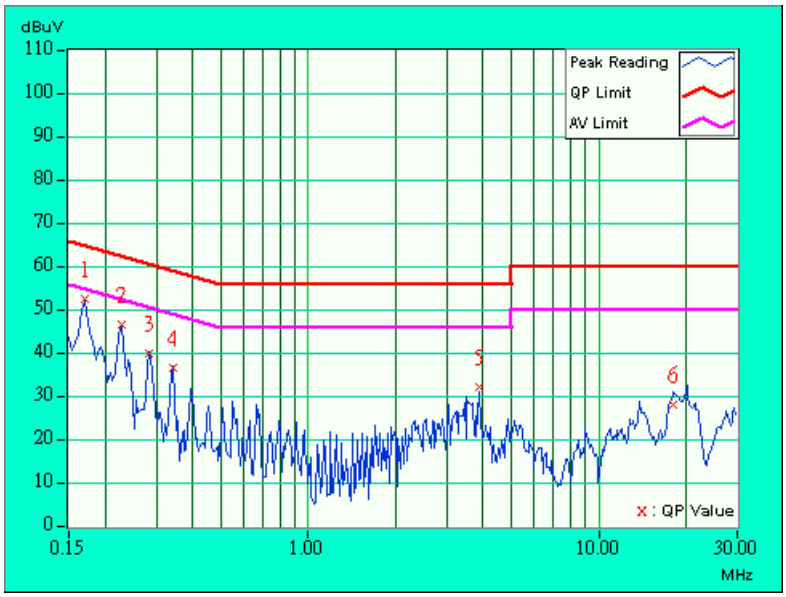

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
MODE	Channel 11	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	51.76	-	51.86	-	64.98	54.98	-13.12	-
2	0.224	0.10	44.27	-	44.37	-	62.66	52.66	-18.29	-
3	0.283	0.10	40.41	-	40.51	-	60.73	50.73	-20.22	-
4	0.338	0.10	34.73	-	34.83	-	59.26	49.26	-24.43	-
5	12.270	0.69	21.47	-	22.16	-	60.00	50.00	-37.84	-
6	20.012	1.10	27.59	-	28.69	-	60.00	50.00	-31.31	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

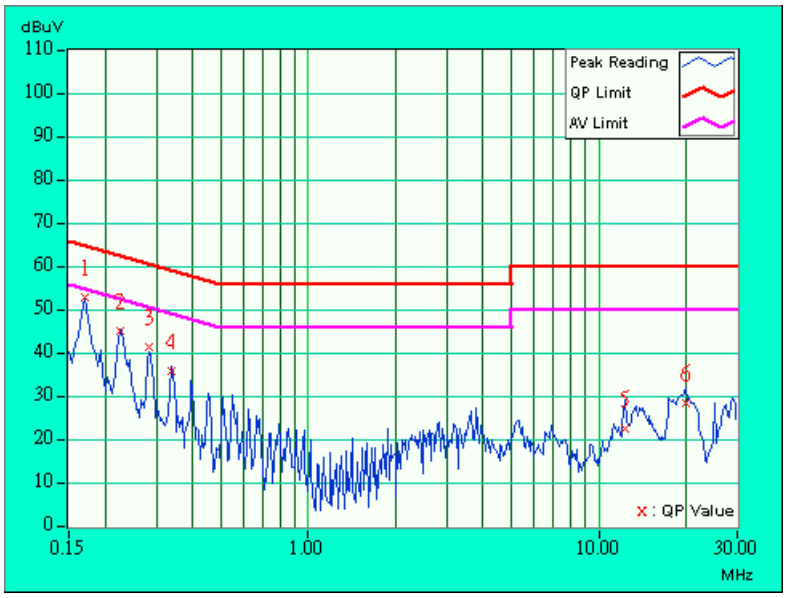

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
MODE	Channel 11	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	50.87	-	50.97	-	64.98	54.98	-14.01	-
2	0.228	0.10	45.45	-	45.55	-	62.52	52.52	-16.97	-
3	0.287	0.10	37.19	-	37.29	-	60.62	50.62	-23.33	-
4	0.341	0.10	35.50	-	35.60	-	59.17	49.17	-23.57	-
5	3.684	0.28	28.26	-	28.54	-	56.00	46.00	-27.46	-
6	20.582	0.79	28.27	-	29.06	-	60.00	50.00	-30.94	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

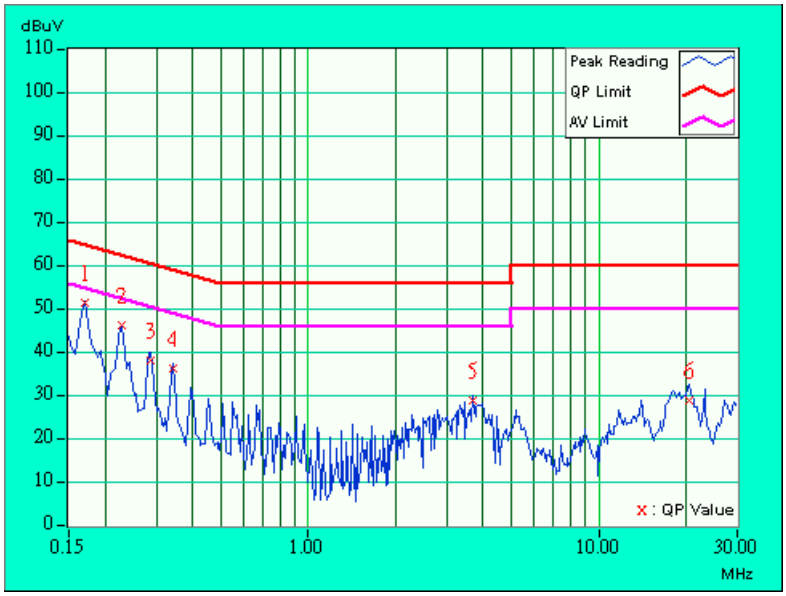

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 13, 2004
* HP Preamplifier	8447D	2944A08485	May 01, 2004
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
* Spectrum Analyzer	8593E	3926A04191	Mar. 24, 2004
* Test Receiver	ESI7	838496/016	Feb. 23, 2004
SCHAFFNER Tunable Dipole Antenna SCHWARZBECK Tunable Dipole Antenna	VHBA 9123 UHA 9105	459 977	Nov. 22, 2003
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 02, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 03, 2003
* EMCO Horn Antenna	3115	9312-4192	Mar. 23, 2004
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	ADT_Radiated_V5.09	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jul. 11. 2003
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jul. 11. 2003

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.

4.2.3 TEST PROCEDURES

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

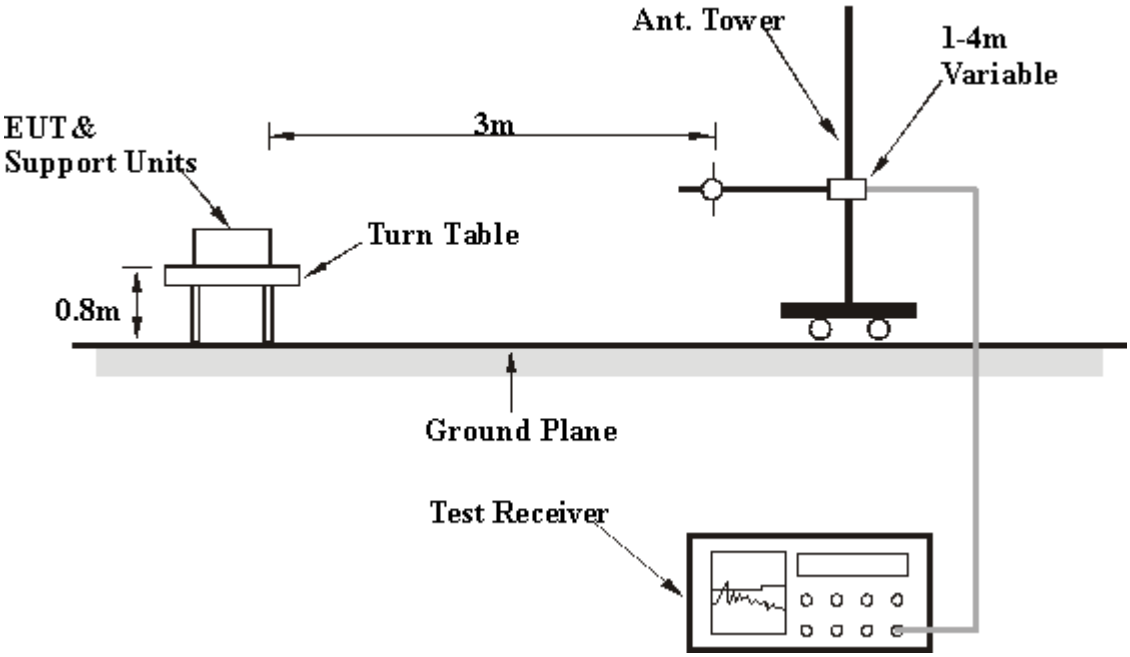

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
MODE	Channel 11	**FREQUENCY RANGE**	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION**	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)
1	80.83	34.4 QP	40.00	-5.60	1.58 H	298	26.30	8.10
2	155.60	28.1 QP	43.50	-15.40	1.43 H	3	17.00	11.10
3	195.00	35.0 QP	43.50	-8.50	1.15 H	66	24.10	10.90
4	234.00	32.2 QP	46.00	-13.80	1.18 H	20	18.10	14.10
5	261.50	33.1 QP	46.00	-12.90	1.15 H	44	16.30	16.80
6	319.10	29.1 QP	46.00	-16.90	1.45 H	27	12.00	17.10
7	360.60	39.1 QP	46.00	-6.90	1.38 H	250	21.10	18.00
8	402.30	35.0 QP	46.00	-11.00	1.13 H	23	15.90	19.10
9	423.00	32.0 QP	46.00	-14.00	1.62 H	98	12.60	19.40
10	600.76	41.0 QP	46.00	-5.00	1.79 H	227	18.30	22.70
11	721.10	33.3 QP	46.00	-12.70	1.40 H	356	9.80	23.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)
1	80.01	28.4 QP	40.00	-11.60	1.51 V	264	20.40	7.90
2	120.01	26.8 QP	43.50	-16.70	1.20 V	278	13.30	13.50
3	149.00	37.8 QP	43.50	-5.70	1.55 V	175	26.20	11.50
4	196.00	35.7 QP	43.50	-7.80	1.20 V	3	24.80	10.90
5	240.00	31.0 QP	46.00	-15.00	1.45 V	35	16.30	14.70
6	261.30	31.1 QP	46.00	-14.90	1.00 V	285	14.30	16.80
7	320.01	30.2 QP	46.00	-15.80	1.40 V	181	13.00	17.20
8	363.52	40.0 QP	46.00	-6.00	1.77 V	188	22.00	18.10
9	440.01	29.8 QP	46.00	-16.20	1.20 V	118	10.10	19.60
10	502.75	27.9 QP	46.00	-18.10	1.31 V	130	6.70	21.20
11	840.13	31.8 QP	46.00	-14.20	1.48 V	182	6.80	25.00

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
CHANNEL	Channel 1	**FREQUENCY RANGE**	Above 1000 MHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	42.4 PK	74.00	-31.60	1.52 H	68	14.90	27.50
2	*2412.00	101.8 PK			1.11 H	17	72.20	29.60
2	*2412.00	86.0 AV			1.11 H	17	56.40	27.50
3	3216.00	41.7 PK	74.00	-32.30	1.19 H	54	10.20	31.50
4	4824.00	45.3 PK	74.00	-28.70	1.28 H	57	10.30	35.00
5	7238.00	50.1 PK	74.00	-23.90	1.05 H	95	9.70	40.50
5	7238.00	40.7 AV	54.00	-13.30	1.05 H	95	0.30	29.60
6	9648.00	53.9 PK	74.00	-20.10	1.36 H	85	10.40	43.50
6	9648.00	46.8 AV	54.00	-7.20	1.36 H	85	3.30	31.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	40.9 PK	74.00	-33.10	1.40 V	265	13.40	27.50
2	*2412.00	98.9 PK			1.00 V	52	69.30	29.60
2	*2412.00	84.3 AV			1.00 V	52	54.70	27.50
3	3216.00	41.5 PK	74.00	-32.50	1.15 V	94	10.00	31.50
4	4824.00	44.9 PK	74.00	-29.10	1.52 V	86	9.90	35.00
5	7235.00	51.1 PK	74.00	-22.90	1.19 V	352	10.70	40.40
5	7235.00	41.3 AV	54.00	-12.70	1.19 V	352	0.90	29.60
6	9648.00	53.8 PK	74.00	-20.20	1.15 V	68	10.30	43.50
6	9648.00	45.9 AV	54.00	-8.10	1.15 V	68	2.40	31.50

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
CHANNEL	Channel 6	**FREQUENCY RANGE**	Above 1000 MHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	40.4 PK	74.00	-33.60	1.30 H	85	12.90	27.50
2	*2437.00	103.6 PK			1.12 H	108	73.90	29.70
2	*2437.00	87.6 AV			1.12 H	108	57.90	27.50
3	3249.00	41.4 PK	74.00	-32.60	1.48 H	85	9.90	31.50
4	4874.00	44.9 PK	74.00	-29.10	1.55 H	68	9.70	35.20
5	7311.00	50.3 PK	74.00	-23.70	1.42 H	196	9.80	40.50
5	7311.00	41.4 AV	54.00	-12.60	1.42 H	196	0.90	29.70
6	9748.00	53.3 PK	74.00	-20.70	1.25 H	352	9.80	43.50
6	9748.00	46.8 AV	54.00	-7.20	1.25 H	352	3.30	31.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	41.8 PK	74.00	-32.20	1.15 V	35	14.30	27.50
2	*2437.00	98.6 PK			1.44 V	35	68.90	29.70
2	*2437.00	83.6 AV			1.44 V	35	53.90	27.50
3	3249.00	42.4 PK	74.00	-31.60	1.28 V	71	10.90	31.50
4	4874.00	45.6 PK	74.00	-28.40	1.15 V	68	10.40	35.20
5	7310.00	50.9 PK	74.00	-23.10	1.31 V	352	10.40	40.50
5	7310.00	41.2 AV	54.00	-12.80	1.31 V	352	0.70	29.70
6	9748.00	54.0 PK	74.00	-20.00	1.62 V	17	10.50	43.50
6	9748.00	47.3 AV	54.00	-6.70	1.62 V	17	3.80	31.50

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
CHANNEL	Channel 11	**FREQUENCY RANGE**	Above 1000 MHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	40.2 PK	74.00	-33.80	1.15 H	87	12.60	27.50
2	*2462.00	102.0 PK			1.08 H	106	72.10	29.80
2	*2462.00	87.3 AV			1.08 H	106	57.50	27.50
3	3282.00	41.8 PK	74.00	-32.20	1.34 H	21	10.30	31.50
4	4924.00	45.8 PK	74.00	-28.20	1.04 H	85	10.40	35.40
5	7386.00	51.0 PK	74.00	-23.00	1.35 H	310	10.30	40.60
5	7386.00	41.5 AV	54.00	-12.50	1.35 H	310	0.80	29.80
6	9847.00	53.1 PK	74.00	-20.90	1.28 H	54	9.60	43.60
6	9847.00	46.2 AV	54.00	-7.80	1.28 H	54	2.70	31.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	40.9 PK	74.00	-33.10	1.82 V	315	13.30	27.50
2	*2462.00	101.6 PK			1.09 V	65	71.80	29.80
2	*2462.00	86.7 AV			1.09 V	65	56.90	27.50
3	3282.00	41.5 PK	74.00	-32.50	1.11 V	252	10.00	31.50
4	4924.00	44.9 PK	74.00	-29.10	1.35 V	68	9.50	35.40
5	7386.00	51.3 PK	74.00	-22.70	1.16 V	81	10.60	40.60
5	7386.00	40.9 AV	54.00	-13.10	1.16 V	81	0.20	29.80
6	9848.00	53.6 PK	74.00	-20.40	1.52 V	328	10.10	43.60
6	9848.00	46.7 AV	54.00	-7.30	1.52 V	328	3.20	31.50

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
CHANNEL	Channel 1	**FREQUENCY RANGE**	Above 1000 MHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	41.4 PK	74.00	-32.60	1.42 H	74	13.90	27.50
2	*2412.00	97.9 PK			1.02 H	115	68.30	29.60
2	*2412.00	83.9 AV			1.02 H	115	54.30	27.50
3	3216.00	41.8 PK	74.00	-32.20	1.03 H	86	10.30	31.50
4	4824.00	44.9 PK	74.00	-29.10	1.11 H	68	9.90	35.00
5	7236.00	51.1 PK	74.00	-22.90	1.15 H	28	10.70	40.40
5	7236.00	41.5 AV	54.00	-12.50	1.15 H	28	1.10	29.60
6	9648.00	54.4 PK	74.00	-19.60	1.38 H	152	10.90	43.50
6	9648.00	46.5 AV	54.00	-7.50	1.38 H	152	3.00	31.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	42.2 PK	74.00	-31.80	1.32 V	13	14.70	27.50
2	*2412.00	94.1 PK			1.48 V	342	64.50	29.60
2	*2412.00	80.4 AV			1.48 V	342	50.80	27.50
3	3216.00	42.7 PK	74.00	-31.30	1.10 V	205	11.20	31.50
4	4824.00	45.9 PK	74.00	-28.10	1.34 V	257	10.90	35.00
5	7234.00	50.8 PK	74.00	-23.20	1.12 V	68	10.40	40.40
5	7234.00	41.1 AV	54.00	-12.90	1.12 V	68	0.70	29.60
6	9648.00	54.7 PK	74.00	-19.30	1.31 V	2	11.20	43.50
6	9648.00	45.9 AV	54.00	-8.10	1.31 V	2	2.40	31.50

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
CHANNEL	Channel 6	**FREQUENCY RANGE**	Above 1000 MHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.20	39.4 PK	74.00	-34.60	1.05 H	311	11.90	27.50
2	*2437.00	97.4 PK			1.14 H	107	67.70	29.70
2	*2437.00	82.5 AV			1.14 H	107	52.80	27.50
3	3248.60	41.5 PK	74.00	-32.50	1.14 H	128	10.00	31.50
4	4874.00	45.7 PK	74.00	-28.30	1.05 H	311	10.50	35.20
5	7311.00	51.2 PK	74.00	-22.80	1.12 H	62	10.70	40.50
5	7311.00	41.0 AV	54.00	-13.00	1.12 H	62	0.50	29.70
6	9748.00	53.0 PK	74.00	-21.00	1.54 H	62	9.50	43.50
6	9748.00	45.8 AV	54.00	-8.20	1.54 H	62	2.30	31.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	40.9 PK	74.00	-33.10	1.03 V	48	13.40	27.50
2	*2437.00	96.7 PK			1.34 V	253	66.90	29.70
2	*2437.00	81.5 AV			1.34 V	253	51.80	27.50
3	3248.00	41.6 PK	74.00	-32.40	1.37 V	267	10.10	31.50
4	4874.00	45.6 PK	74.00	-28.40	1.08 V	68	10.40	35.20
5	7312.00	50.2 PK	74.00	-23.80	1.42 V	92	9.70	40.50
5	7312.00	40.6 AV	54.00	-13.40	1.42 V	92	0.10	29.70
6	9748.00	53.6 PK	74.00	-20.40	1.19 V	50	10.10	43.50
6	9748.00	45.8 AV	54.00	-8.20	1.19 V	50	2.30	31.50

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
CHANNEL	Channel 11	**FREQUENCY RANGE**	Above 1000 MHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	**TESTED BY**: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	41.0 PK	74.00	-33.00	1.62 H	27	13.40	27.50
2	*2462.00	96.8 PK			1.03 H	102	67.00	29.80
2	*2462.00	83.6 AV			1.03 H	102	53.80	27.50
3	3282.00	40.8 PK	74.00	-33.20	1.45 H	308	9.30	31.50
4	4924.00	46.1 PK	74.00	-27.90	1.24 H	72	10.70	35.40
5	7385.00	51.3 PK	74.00	-22.70	1.12 H	53	10.60	40.60
5	7385.00	42.5 AV	54.00	-11.50	1.12 H	53	1.80	29.80
6	9847.00	54.2 PK	74.00	-19.80	1.28 H	241	10.70	43.60
6	9847.00	46.8 AV	54.00	-7.20	1.28 H	241	3.30	31.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	40.0 PK	74.00	-34.00	1.15 V	81	12.40	27.50
2	*2462.00	93.1 PK			1.11 V	257	63.30	29.80
2	*2462.00	79.3 AV			1.11 V	257	49.50	27.50
3	3282.00	41.8 PK	74.00	-32.20	1.23 V	92	10.30	31.50
4	4924.00	45.8 PK	74.00	-28.20	1.52 V	34	10.40	35.40
5	7384.00	49.7 PK	74.00	-24.30	1.21 V	62	9.00	40.60
6	9847.00	54.0 PK	74.00	-20.00	1.36 V	42	10.50	43.60
6	9847.00	46.8 AV	54.00	-7.20	1.36 V	42	3.30	29.80

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
		MODE	CCK
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**ENVIRONMENTAL CONDITIONS**	20deg. C, 60%RH, 991hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.343	0.5	PASS
6	2437	10.862	0.5	PASS
11	2462	10.701	0.5	PASS

CH1

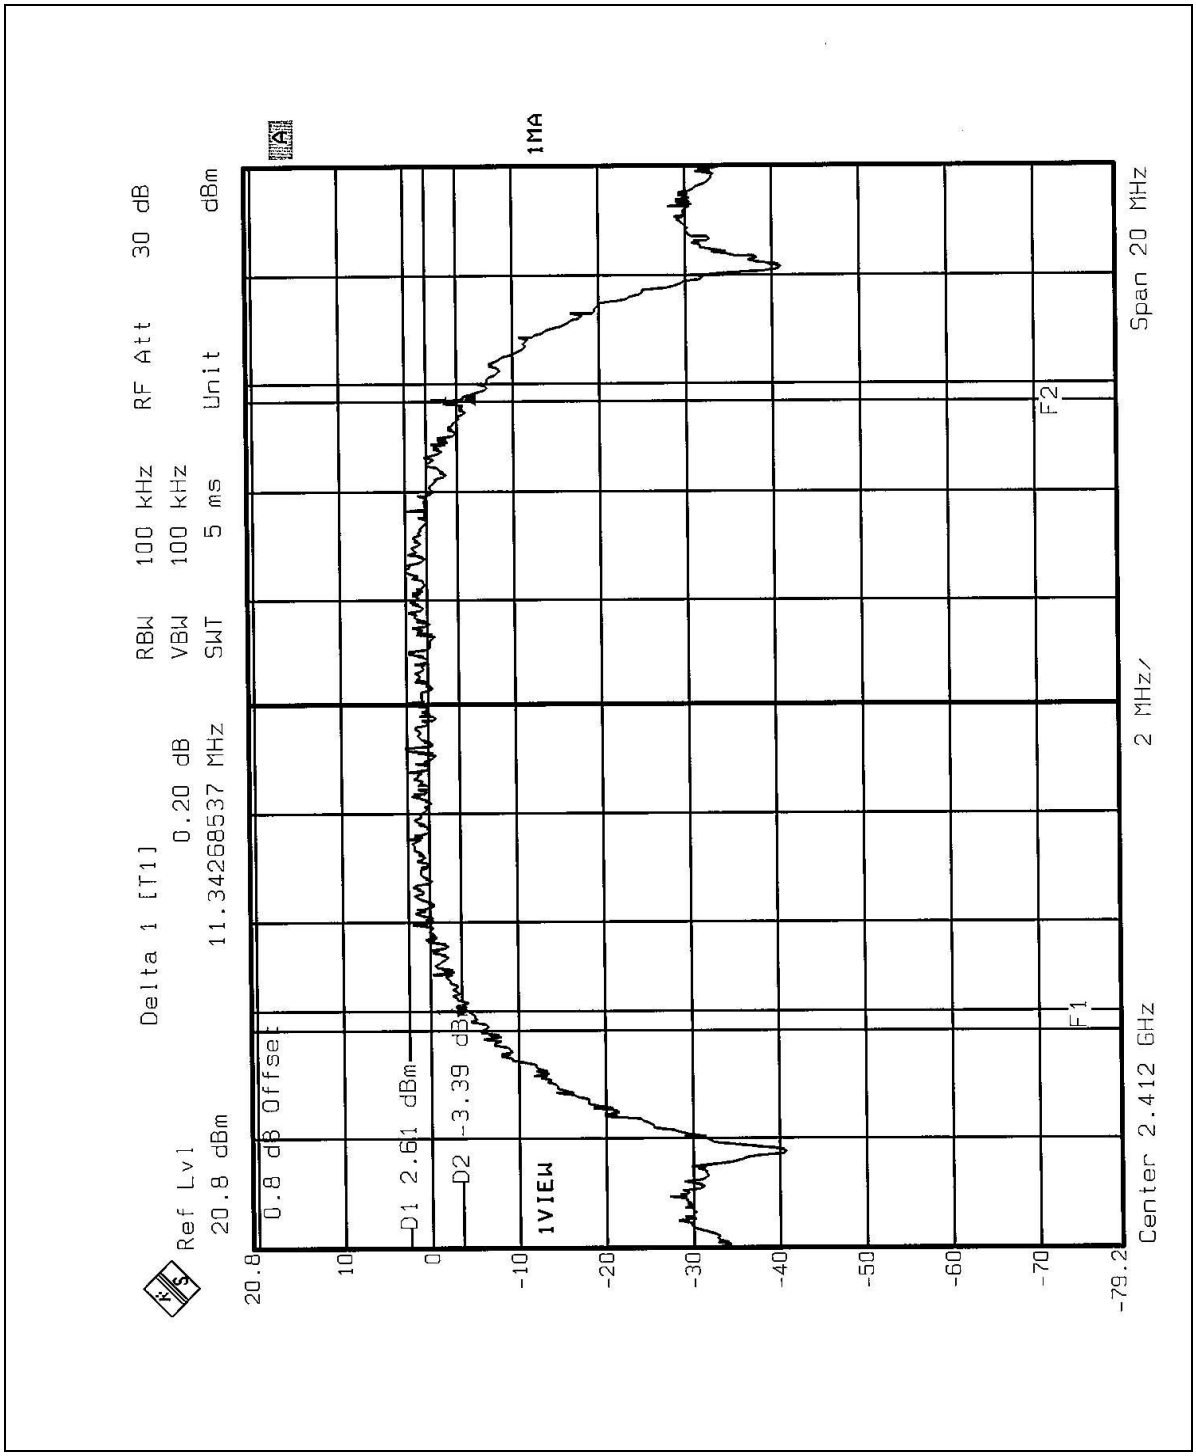
Ref Lvl
20.8 dBm
0.8 dB Offset
Delta 1 [T1]
0.20 dB
11.34268537 MHz
RBW 100 kHz
VBW 100 kHz
SWT 5 ms
RF Att 30 dB
Unit dBm
1MA
D1 2.61 dBm
D2 -3.39 dB
1VIEW
F1
F2
Center 2.412 GHz
2 MHz/
Span 20 MHz
20.8
10
0
-10
-20
-30
-40
-50
-60
-70
-79.2

CH6

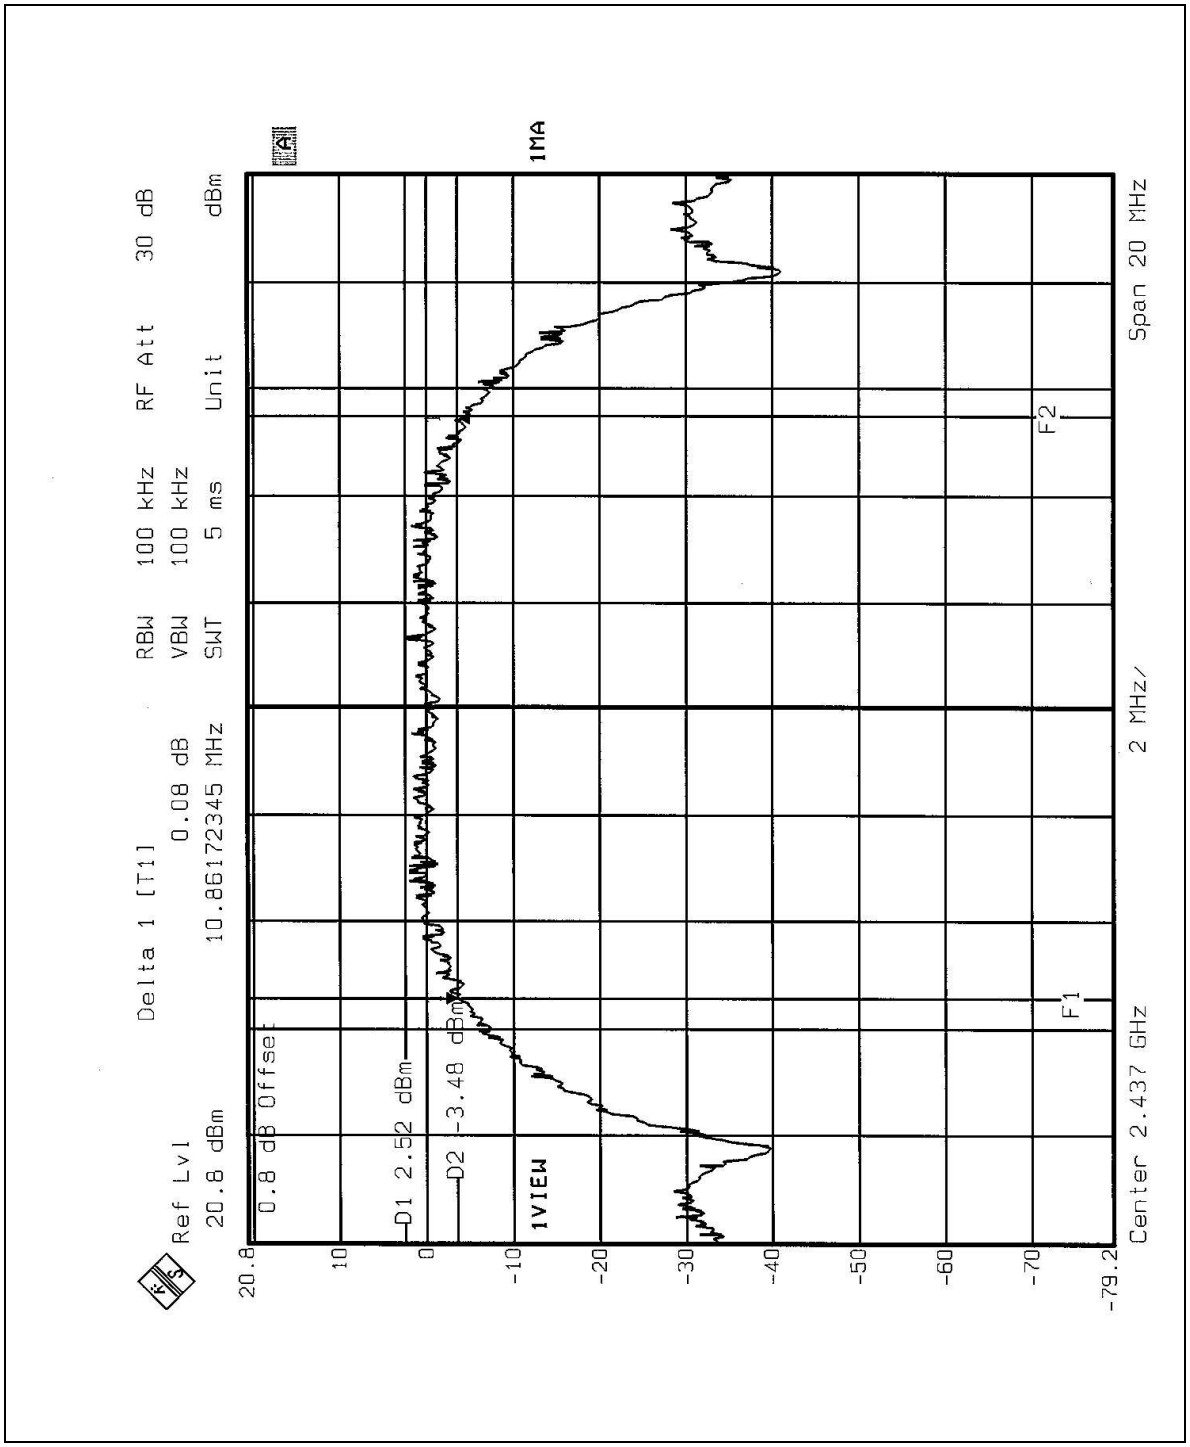
Ref Lvl
20.8 dBm
0.8 dB Offset
Delta 1 [T1]
0.08 dB
10.86172345 MHz
RBW 100 kHz
VBW 100 kHz
SWT 5 ms
RF Att 30 dB
Unit dBm
1MA
D1 2.52 dBm
D2 -3.48 dBm
1VIEW
F1
F2
Center 2.437 GHz
2 MHz/
Span 20 MHz
20.8
10
0
-10
-20
-30
-40
-50
-60
-70
-79.2

CH11

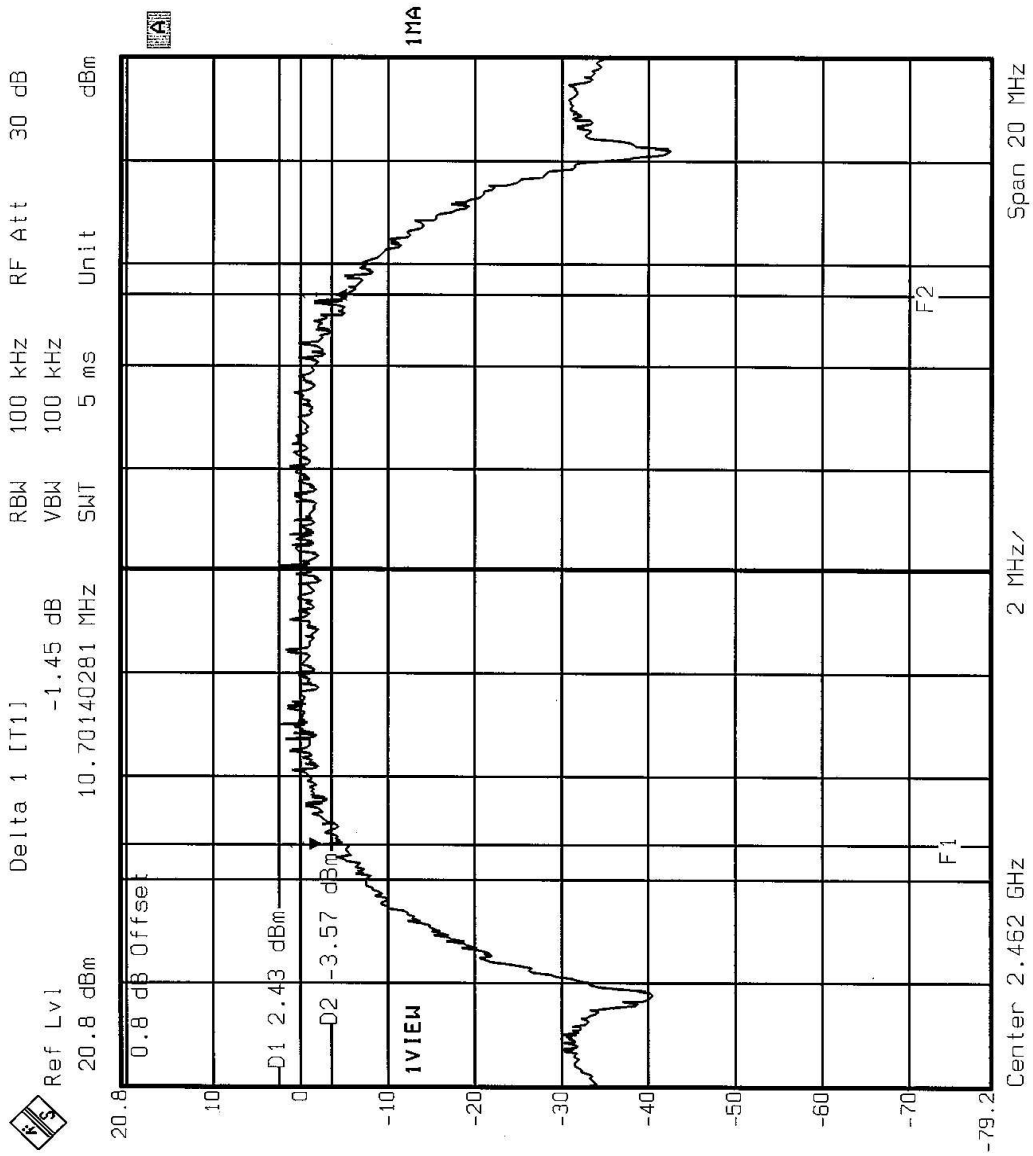
Ref Lvl
20.8 dBm
0.8 dB Offset
Delta 1 [T1]
-1.45 dB
10.70140281 MHz
RBW 100 kHz
VBW 100 kHz
SWT 5 ms
RF Att 30 dB
Unit dBm
D1 2.43 dBm
D2 -3.57 dBm
1VIEW
1MA
F1
F2
Center 2.462 GHz
2 MHz/
Span 20 MHz
20.8
10
0
-10
-20
-30
-40
-50
-60
-70
-79.2

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
		MODE	OFDM
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**ENVIRONMENTAL CONDITIONS**	20deg. C, 60%RH, 991hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.473	0.5	PASS
6	2437	16.513	0.5	PASS
11	2462	16.513	0.5	PASS

CH1

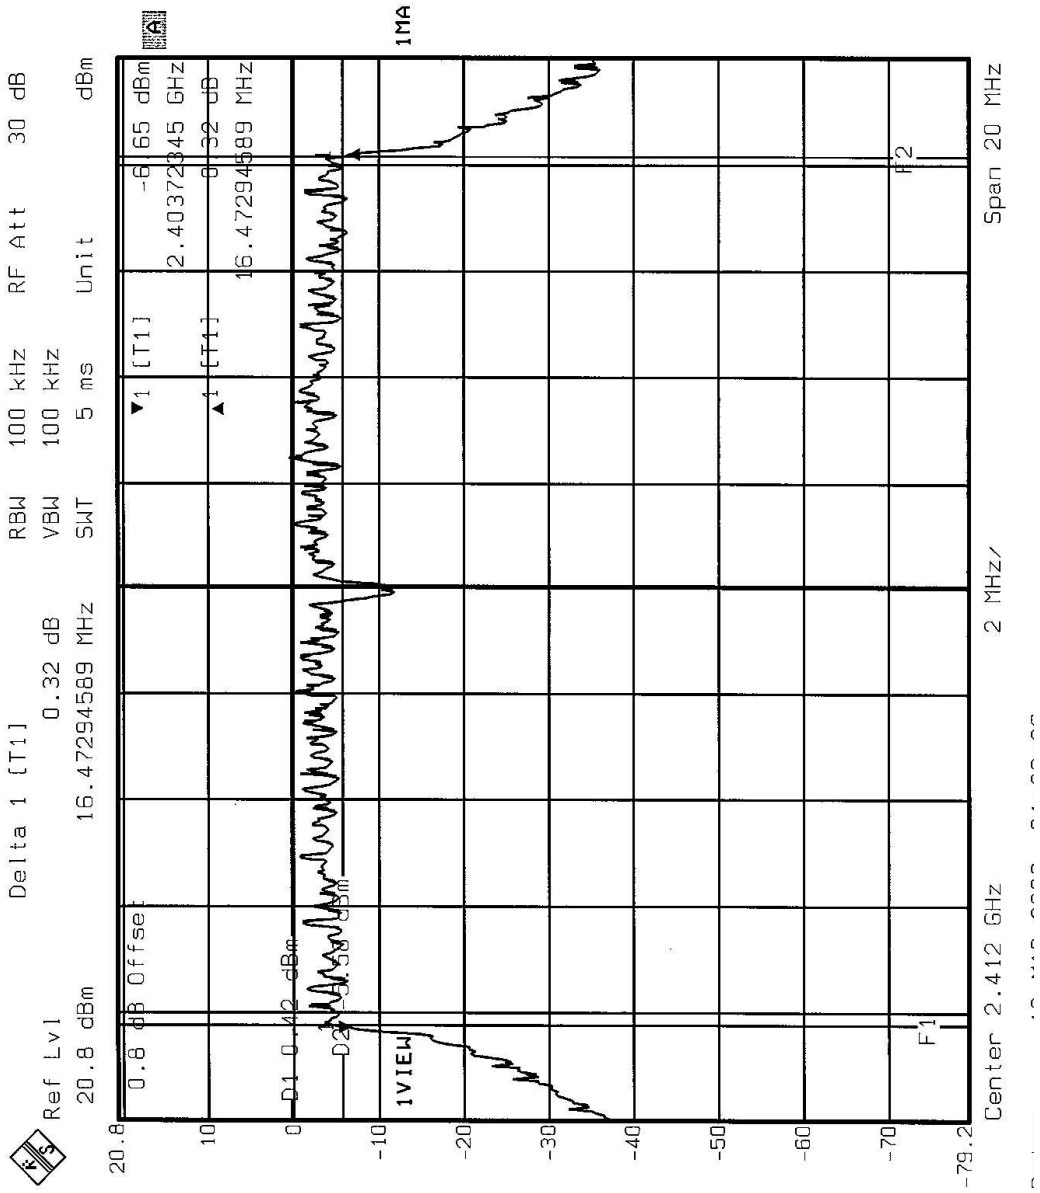
Ref Lvl
20.8 dBm
0.8 dB Offset
Delta 1 [T1]
0.32 dB
16.47294589 MHz
RBW 100 kHz
VBW 100 kHz
SWT 5 ms
RF Att 30 dB
Unit dBm
1 [T1] -6.65 dBm
2.40372345 GHz
1 [T1] 0.32 dB
16.47294589 MHz
1MA
1VIEW
D1 0.42 dBm
F1
F2
Center 2.412 GHz
2 MHz/
Span 20 MHz

CH6

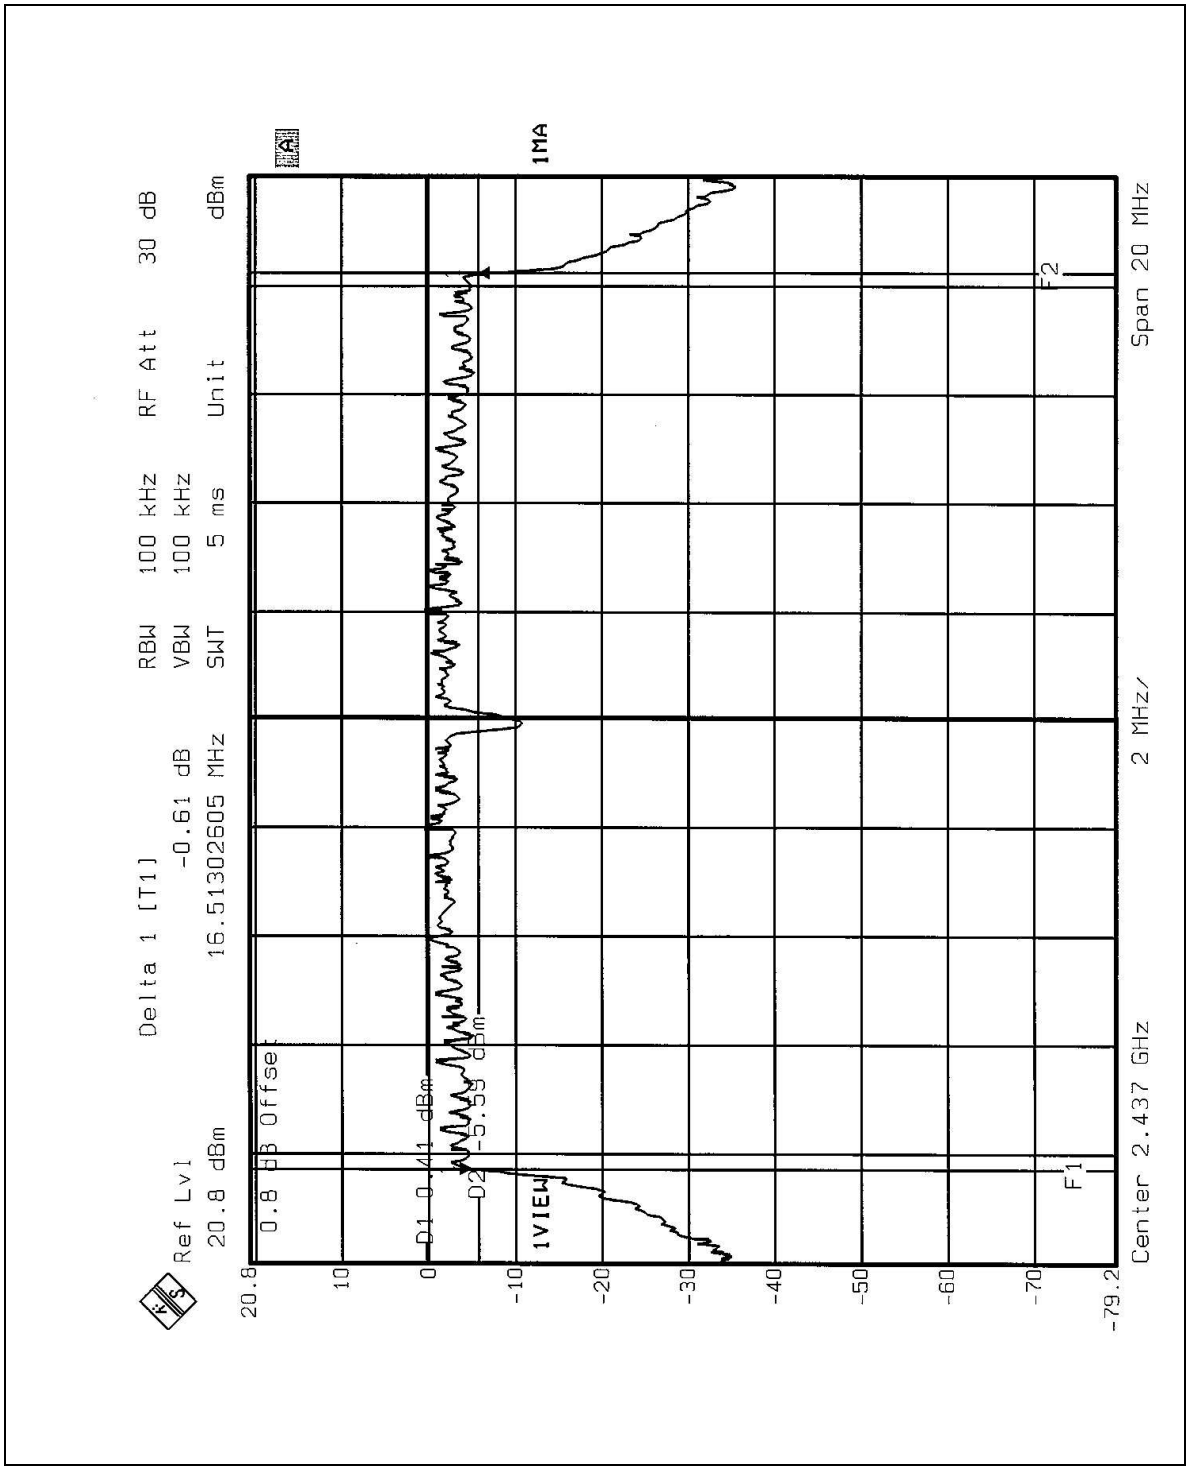
Ref Lvl
20.8 dBm
0.8 dB Offset
Delta 1 [T1]
-0.61 dB
16.51302605 MHz
RBW 100 kHz
VBW 100 kHz
SWT 5 ms
RF Att 30 dB
Unit dBm
D1 0.41 dBm
D2 -5.55 dBm
1VIEW
1MA
F1
F2
Center 2.437 GHz
2 MHz/
Span 20 MHz
20.8
10
0
-10
-20
-30
-40
-50
-60
-70
-79.2

CH11

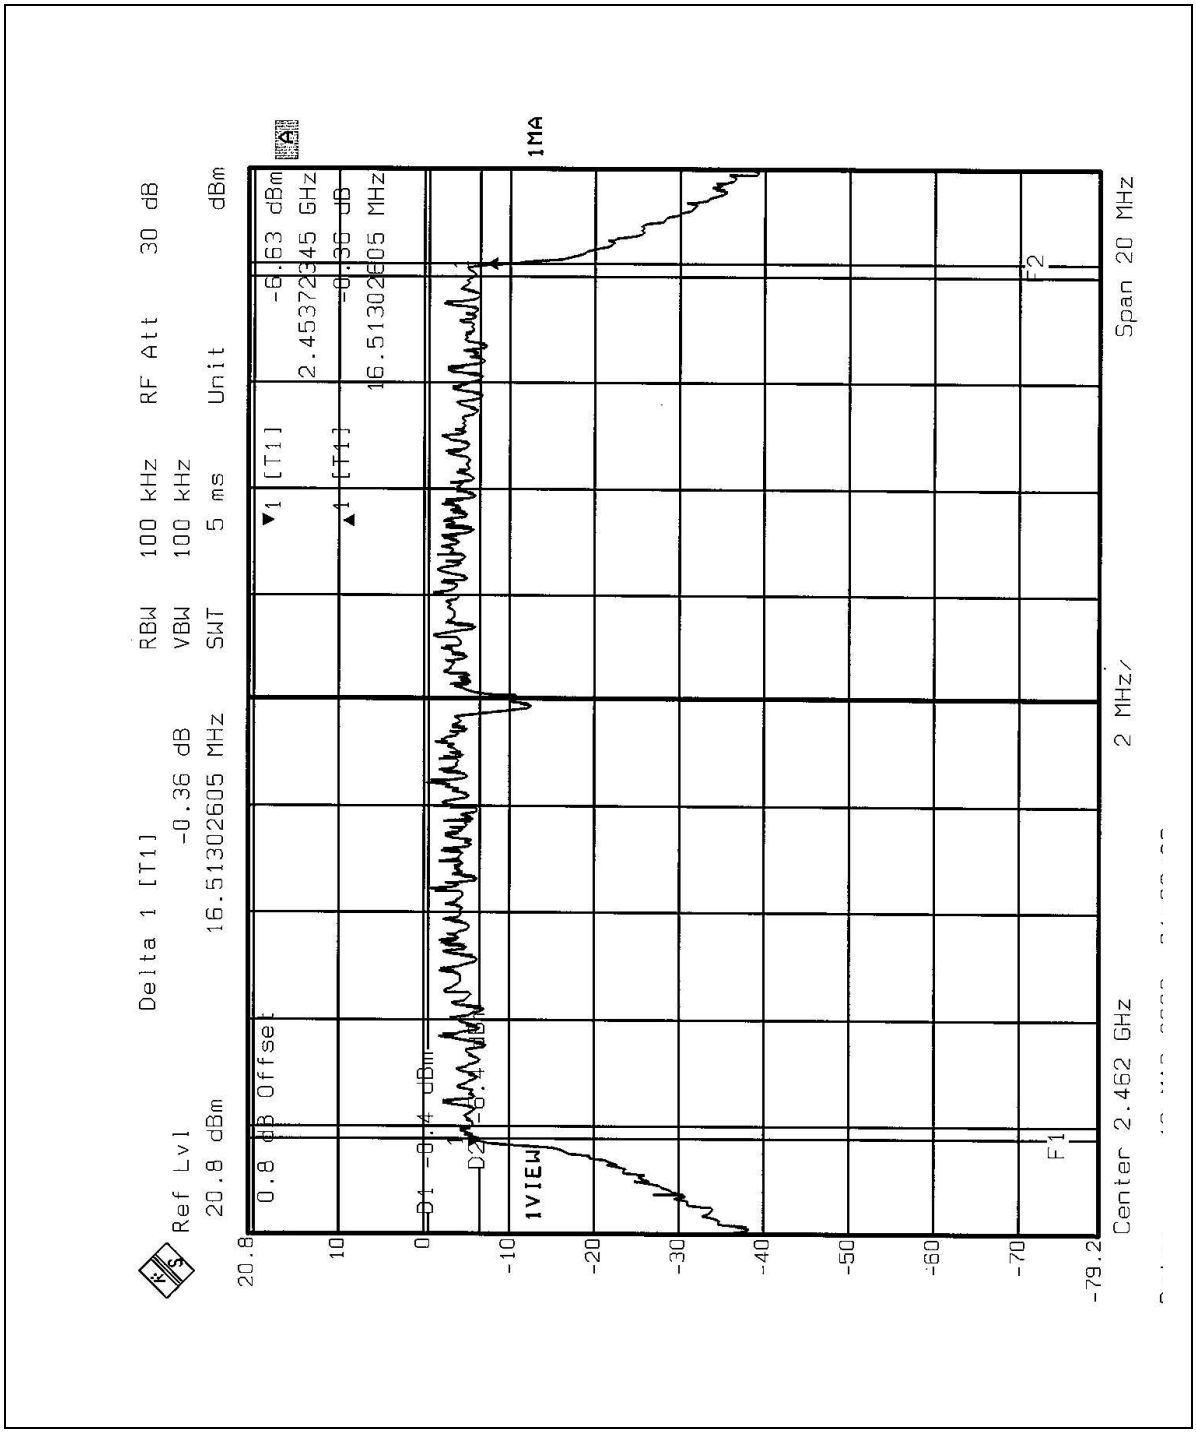
Ref Lvl
20.8 dBm
0.8 dB Offset
Delta 1 [T1]
-0.36 dB
16.51302605 MHz
RBW 100 kHz
VBW 100 kHz
SWT 5 ms
RF Att 30 dB
Unit dBm
1 [T1]
-6.63 dBm
2.45372345 GHz
1 [T1]
-0.36 dB
16.51302605 MHz
1MA
1VIEW
D1 -8.4 dBm
D2 -8.4 dB
F1
F2
Center 2.462 GHz
2 MHz/
Span 20 MHz
20.8
10
0
-10
-20
-30
-40
-50
-60
-70
-79.2

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
POWER METER	E4416A	GB41291118	July 30, 2003
PEAK POWER SENSOR	E9327A	US40440722	July 30, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
		MODE	CCK
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**ENVIRONMENTAL CONDITIONS**	20deg. C, 60%RH, 991hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	10.98	30	PASS
6	2437	10.75	30	PASS
11	2462	10.89	30	PASS

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
		MODE	OFDM
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**ENVIRONMENTAL CONDITIONS**	20deg. C, 60%RH, 991hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	10.56	30	PASS
6	2437	10.76	30	PASS
11	2462	10.87	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.
The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6

4.5.7 TEST RESULTS

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
		MODE	CCK
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**ENVIRONMENTAL CONDITIONS**	20deg. C, 60%RH, 991hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.87	8	PASS
6	2437	-12.55	8	PASS
11	2462	-10.73	8	PASS

CH1

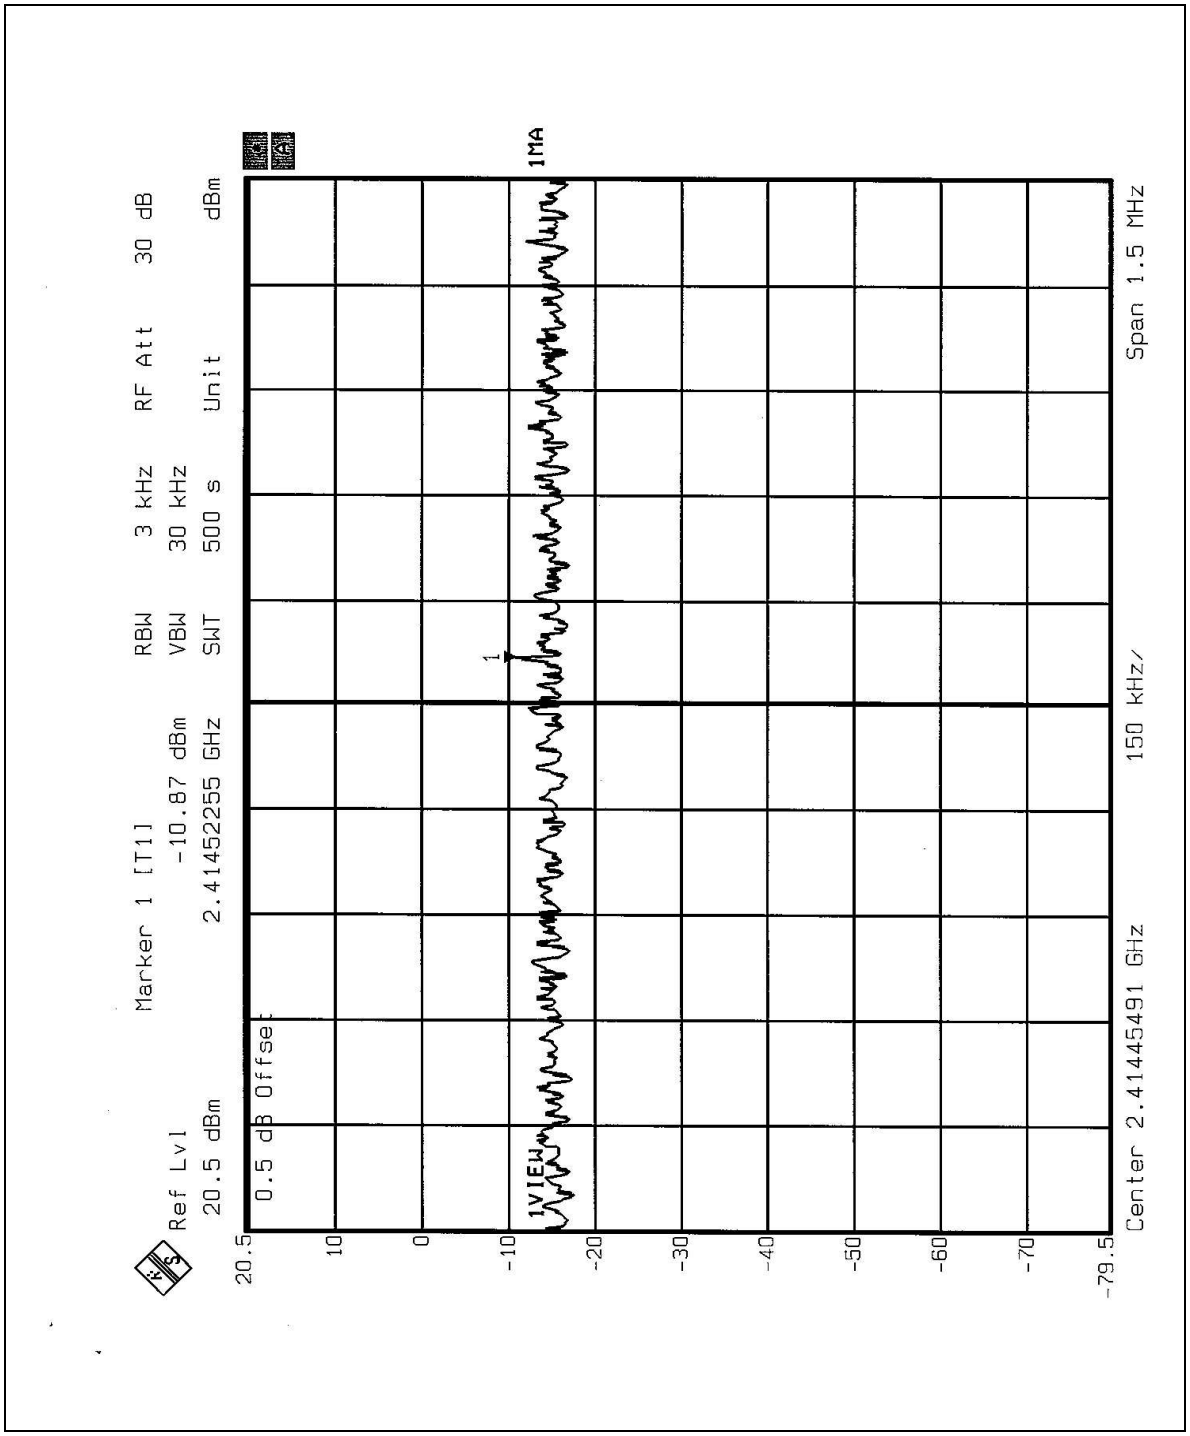
Ref Lvl
20.5 dBm
0.5 dB Offset
Marker 1 [T1]
-10.87 dBm
2.41452255 GHz
RBW 3 kHz
VBW 30 kHz
SWT 500 s
RF Att 30 dB
Unit dBm
1MA
1VIEW
1
20.5
10
0
-10
-20
-30
-40
-50
-60
-70
-79.5
Center 2.41445491 GHz
150 kHz/
Span 1.5 MHz

CH6

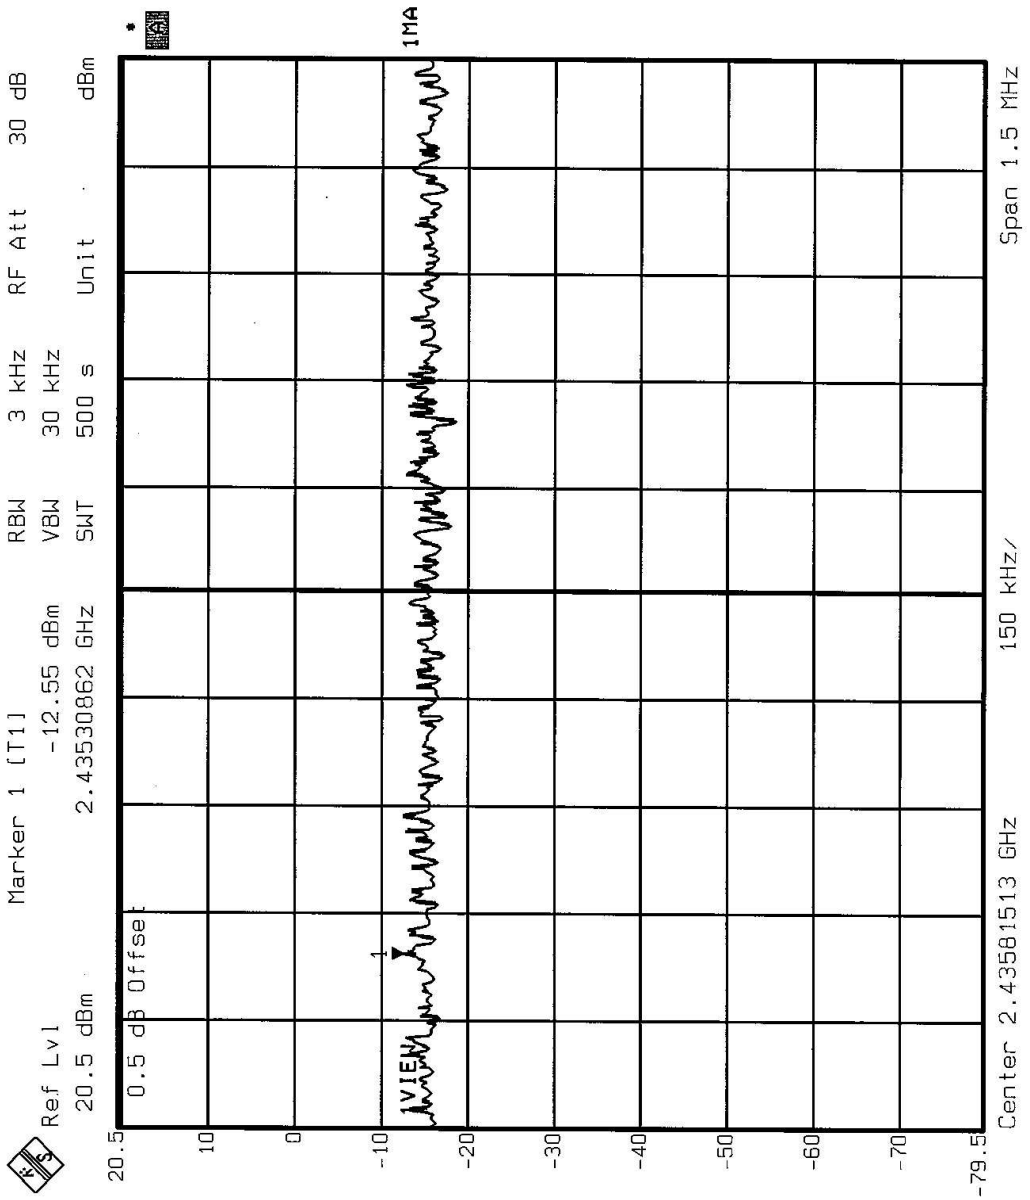
Ref Lvl
20.5 dBm
0.5 dB Offset
Marker 1 [T1]
-12.55 dBm
2.43530862 GHz
RBW 3 kHz
VBW 30 kHz
SWT 500 s
RF Att 30 dB
Unit dBm
1MA
VIEW
Center 2.43581513 GHz
150 kHz/
Span 1.5 MHz
20.5
10
0
-10
-20
-30
-40
-50
-60
-70
-79.5

CH11

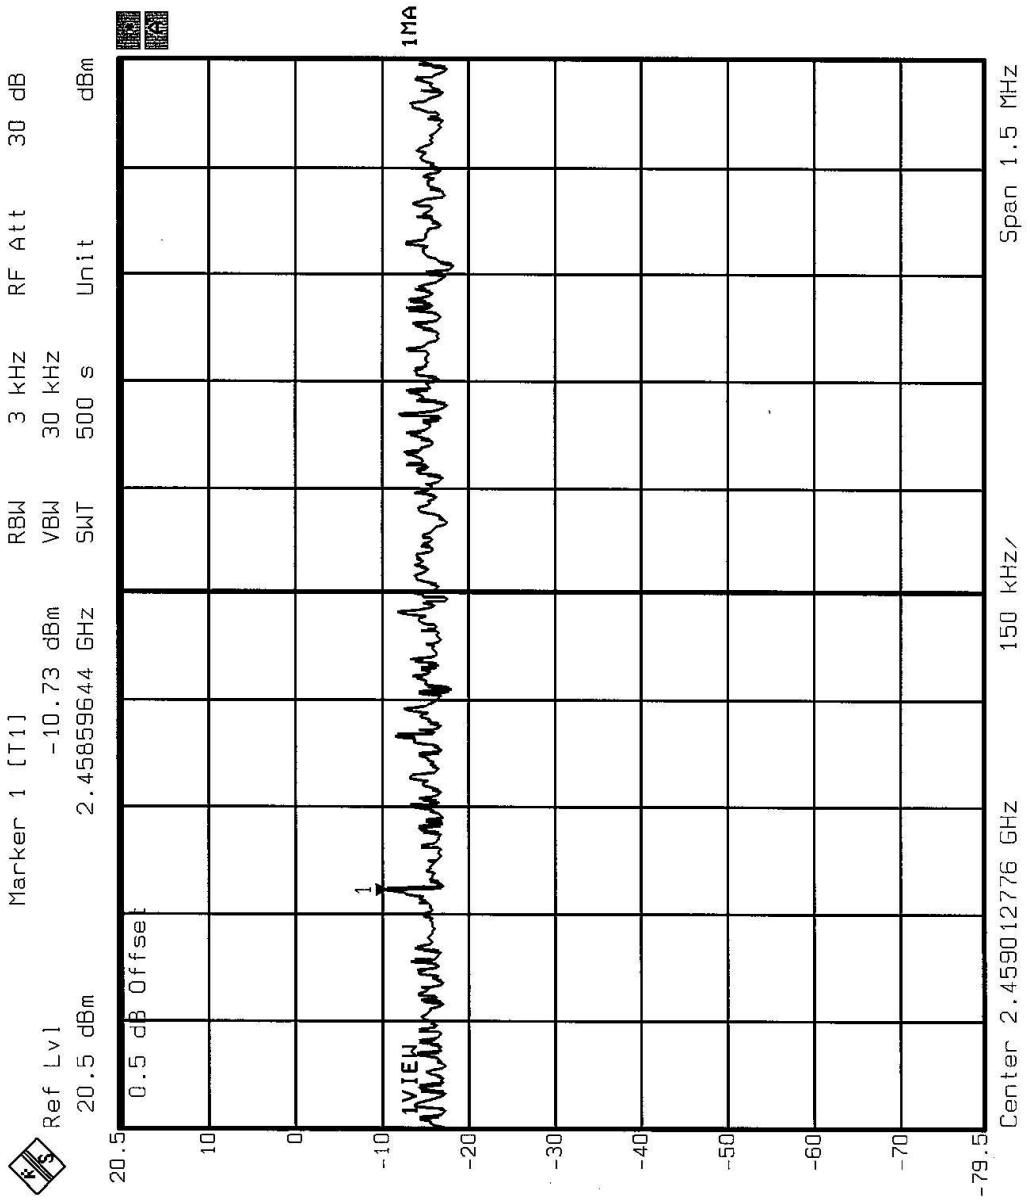
Ref Lvl
20.5 dBm
0.5 dB Offset
Marker 1 [T1]
-10.73 dBm
2.45859644 GHz
RBW 3 kHz
VBW 30 kHz
SWT 500 s
RF Att 30 dB
Unit dBm
1MA
1VIEW
20.5
10
0
-10
-20
-30
-40
-50
-60
-70
-79.5
Center 2.45901277 6 GHz
150 kHz/
Span 1.5 MHz

EUT	802.11g Wireless PCMCIA Card	**MODEL**	WL-100G
		MODE	OFDM
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**ENVIRONMENTAL CONDITIONS**	20deg. C, 60%RH, 991hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-12.29	8	PASS
6	2437	-12.35	8	PASS
11	2462	-13.00	8	PASS

CH1

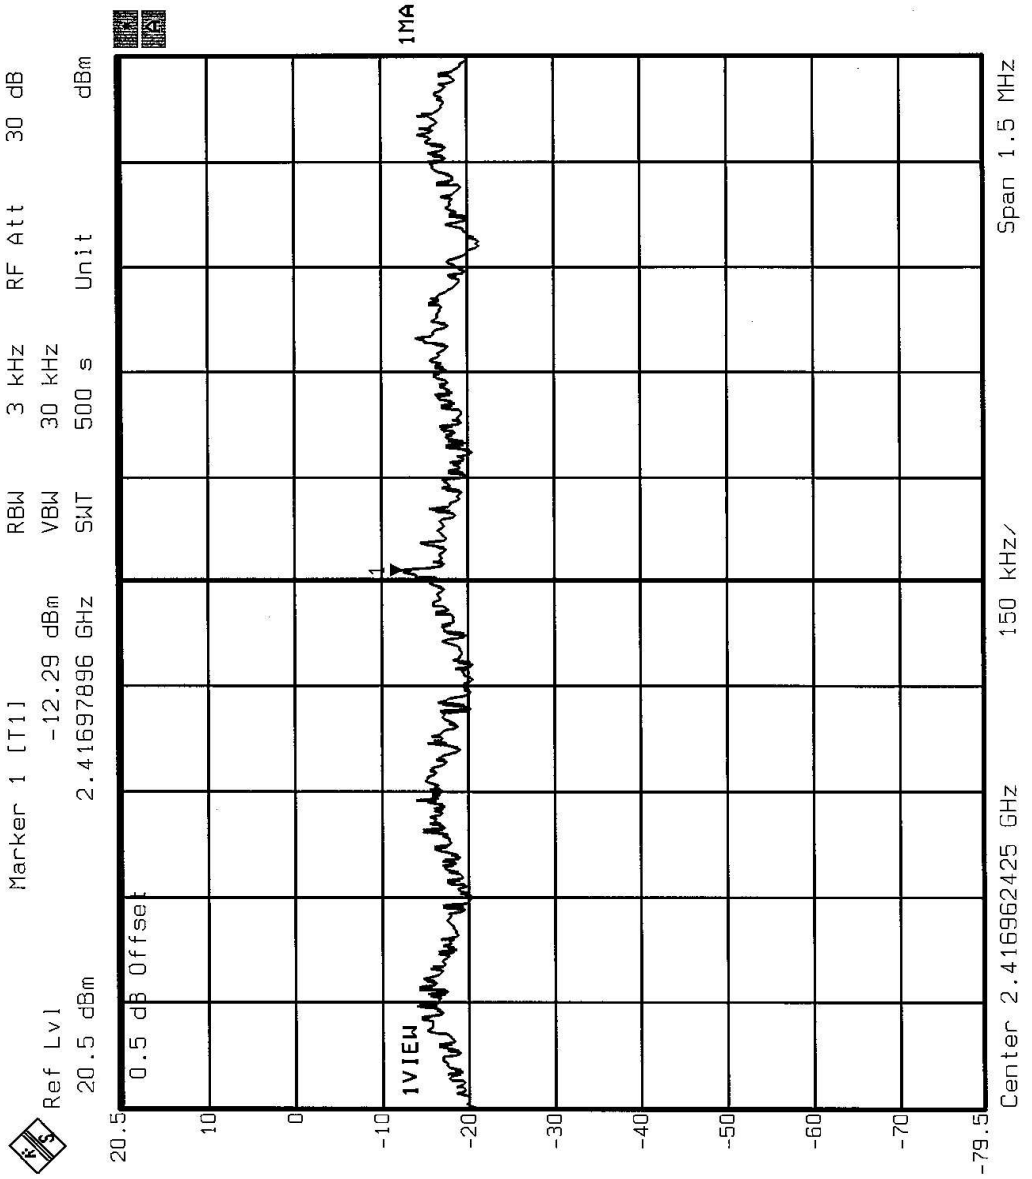
Ref Lvl
20.5 dBm
0.5 dB Offset
Marker 1 [T1]
-12.29 dBm
2.41697896 GHz
RBW 3 kHz
VBW 30 kHz
SWT 500 s
RF Att 30 dB
Unit dBm
1MA
1VIEW
Span 1.5 MHz
150 kHz/
Center 2.41696425 GHz
20.5
10
0
-10
-20
-30
-40
-50
-60
-70
-79.5

CH6

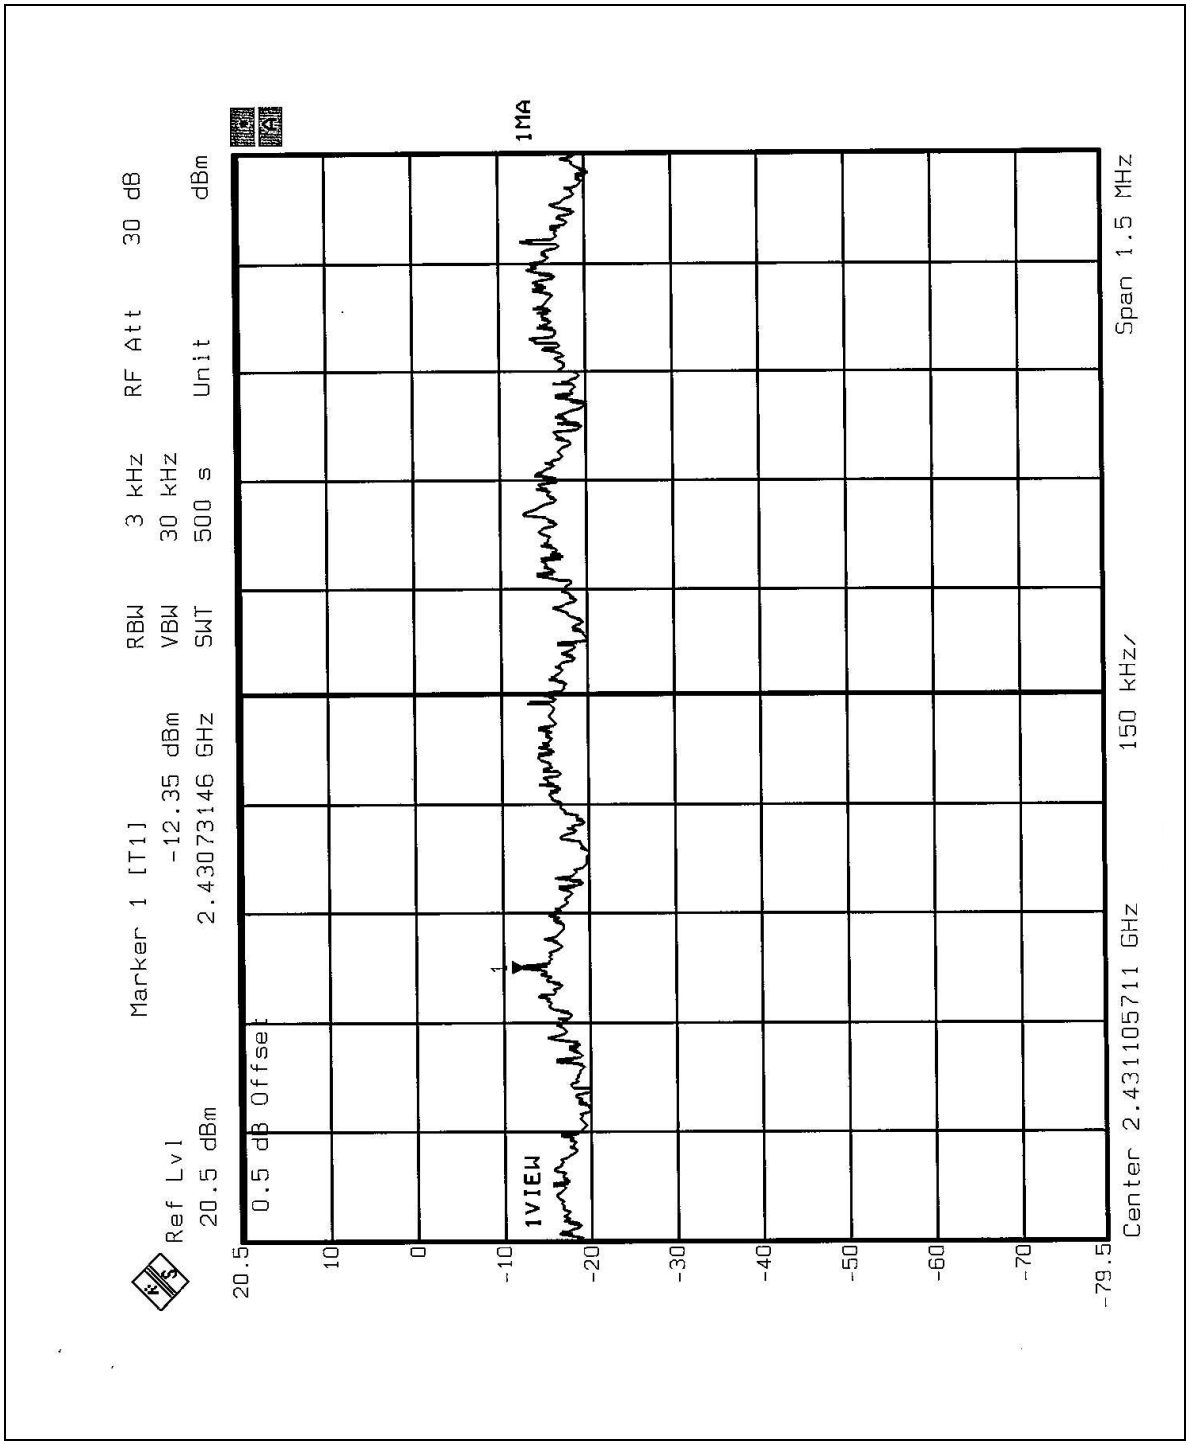
Ref Lvl
20.5 dBm
0.5 dB Offset
Marker 1 [T1]
-12.35 dBm
2.43073146 GHz
RBW 3 kHz
VBW 30 kHz
SWT 500 s
RF Att 30 dB
Unit dBm
1MA
1VIEW
20.5
10
0
-10
-20
-30
-40
-50
-60
-70
-79.5
Center 2.431105711 GHz
150 kHz/
Span 1.5 MHz

CH11

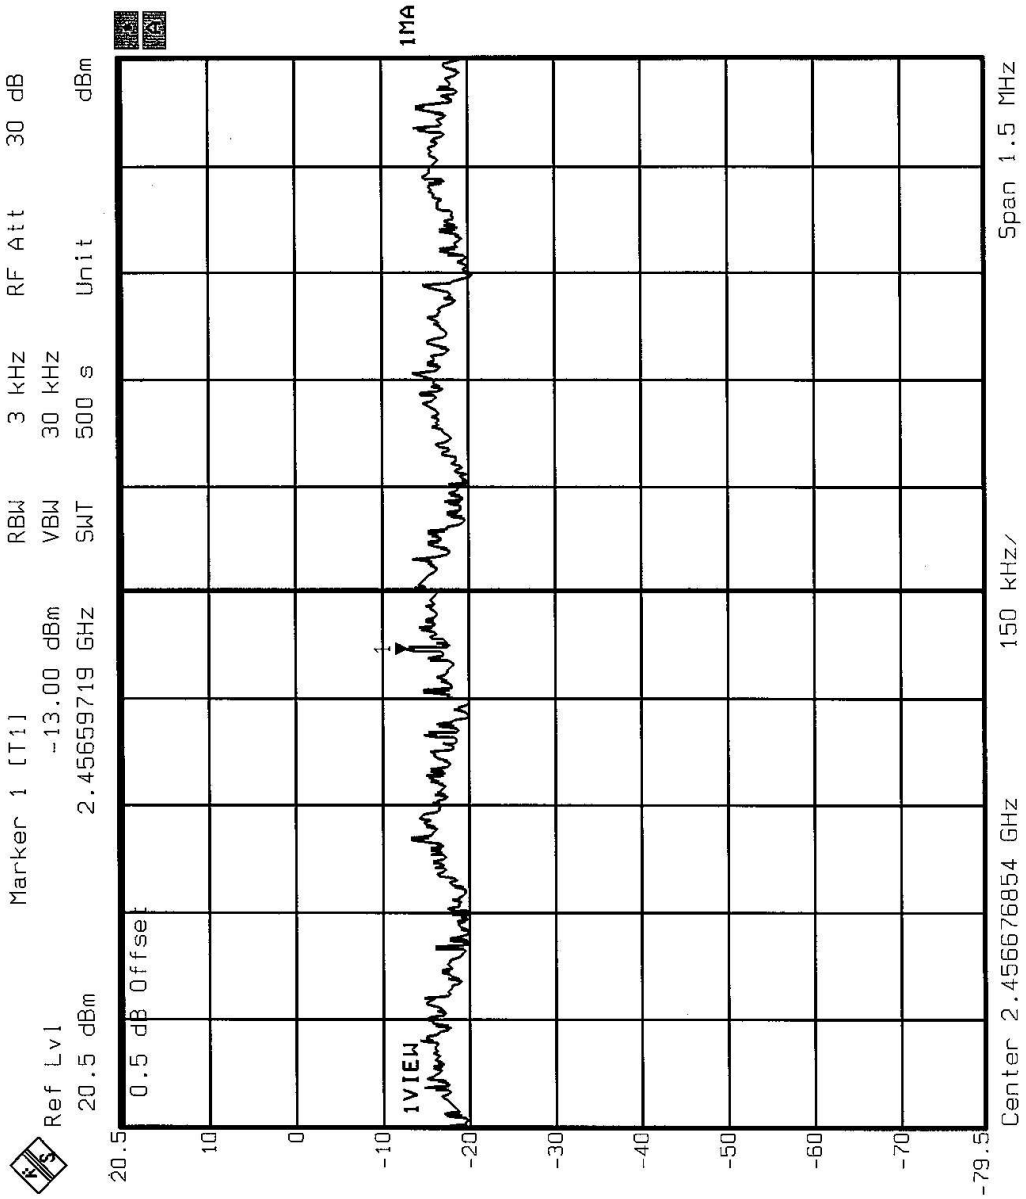
Ref Lvl
20.5 dBm
0.5 dB Offset
Marker 1 [T1]
-13.00 dBm
2.45659719 GHz
RBW 3 kHz
VBW 30 kHz
SWT 500 s
RF Att 30 dB
Unit dBm
1VIEW
1MA
20.5
10
0
-10
-20
-30
-40
-50
-60
-70
-79.5
Center 2.456676854 GHz
150 kHz/
Span 1.5 MHz

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE 1: The band edge emission plot of CCK technique on the following 2 pages shows 52.63dB/ 57.46dB delta between carrier maximum power and local maximum emission in restrict band (2.3200GHz / 2.5000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 86.0dBuV/m, so the maximum field strength in restrict band is 86.0-52.63=33.37dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of OFDM technique on the following 3-4 pages shows 41.74dB/ 43.56dB delta between carrier maximum power and local maximum emission in restrict band (2.3895GHz / 2.4839GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 83.9dBuV/m, so the maximum field strength in restrict band is 83.9-41.74=42.16dBuV/m which is under 54dBuV/m limit.

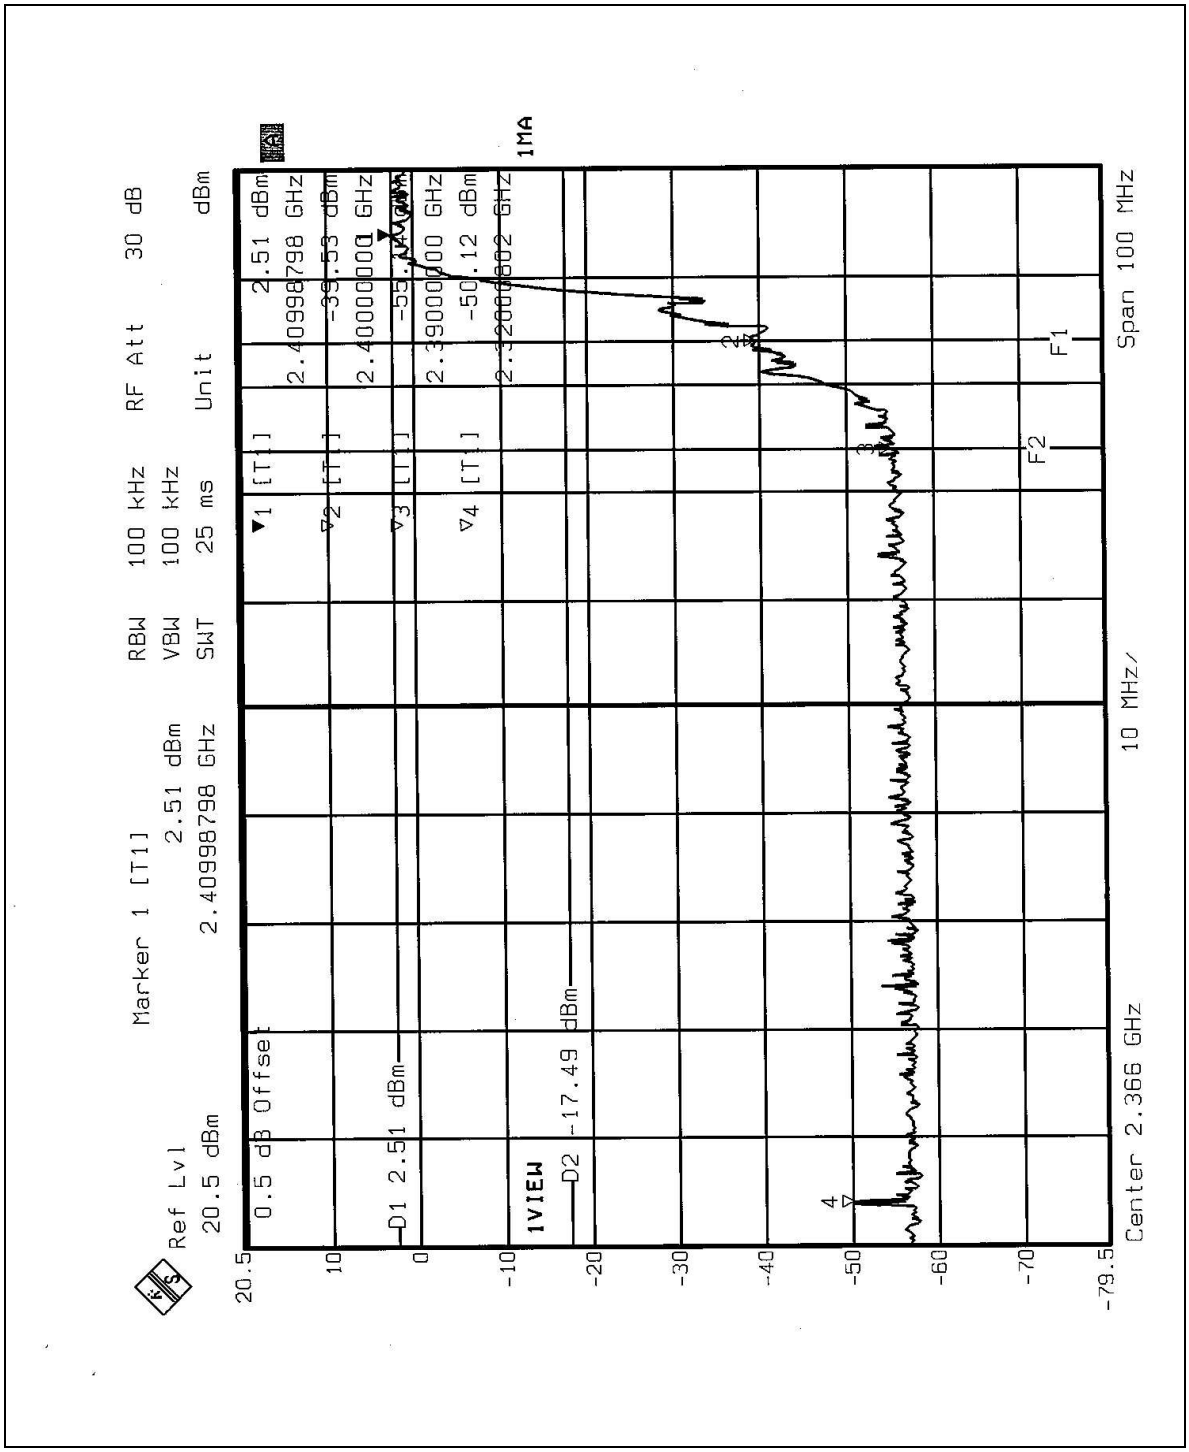
Ref Lvl
20.5 dBm
0.5 dB Offset
D1 2.51 dBm
1VIEW
D2 -17.49 dBm
Marker 1 [T1]
2.51 dBm
2.40998798 GHz
RBW 100 kHz
VBW 100 kHz
SWT 25 ms
RF Att 30 dB
Unit dBm
1MA
Center 2.366 GHz
10 MHz/
Span 100 MHz
F1
F2

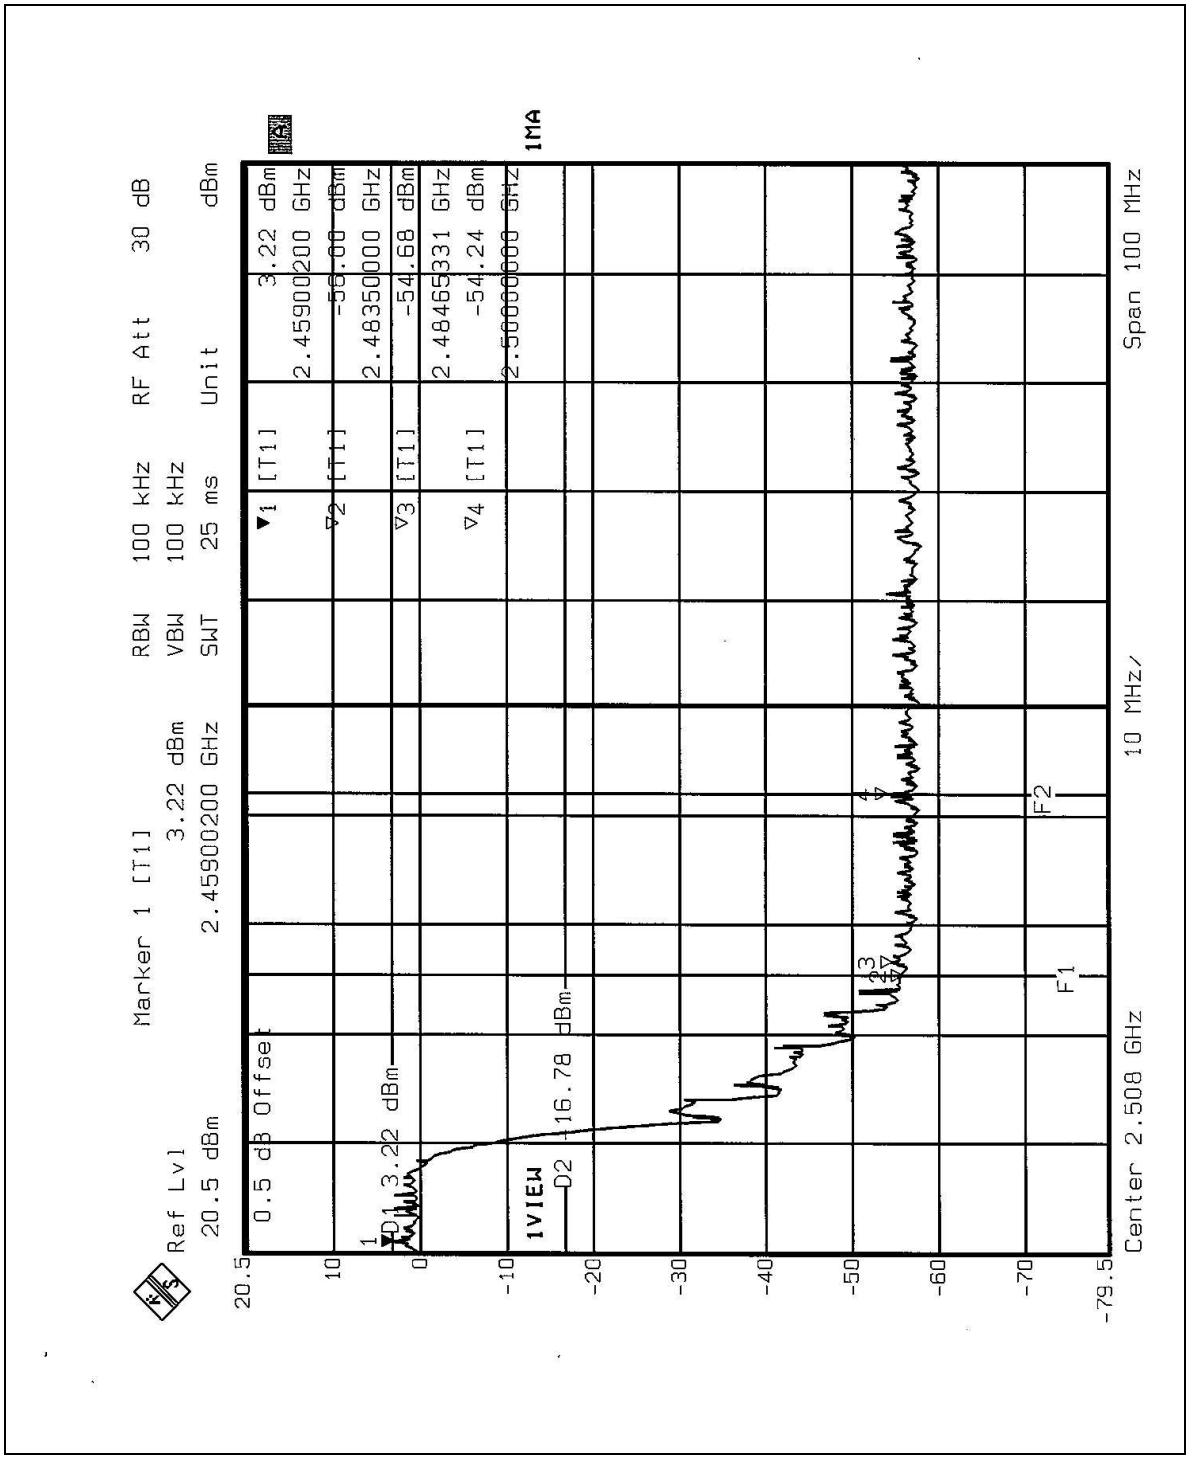
Ref Lvl
20.5 dBm
0.5 dB Offset
Marker 1 [T1]
3.22 dBm
2.45900200 GHz
RBW 100 kHz
VBW 100 kHz
SWT 25 ms
RF Att 30 dB
Unit dBm
1 [T1] 3.22 dBm 2.45900200 GHz
2 [T1] -56.00 dBm 2.48350000 GHz
3 [T1] -54.68 dBm 2.48465331 GHz
4 [T1] -54.24 dBm 2.50000000 GHz
1MA
D1 3.22 dBm
D2 16.78 dBm
1VIEW
F1
F2
Center 2.508 GHz
10 MHz/
Span 100 MHz

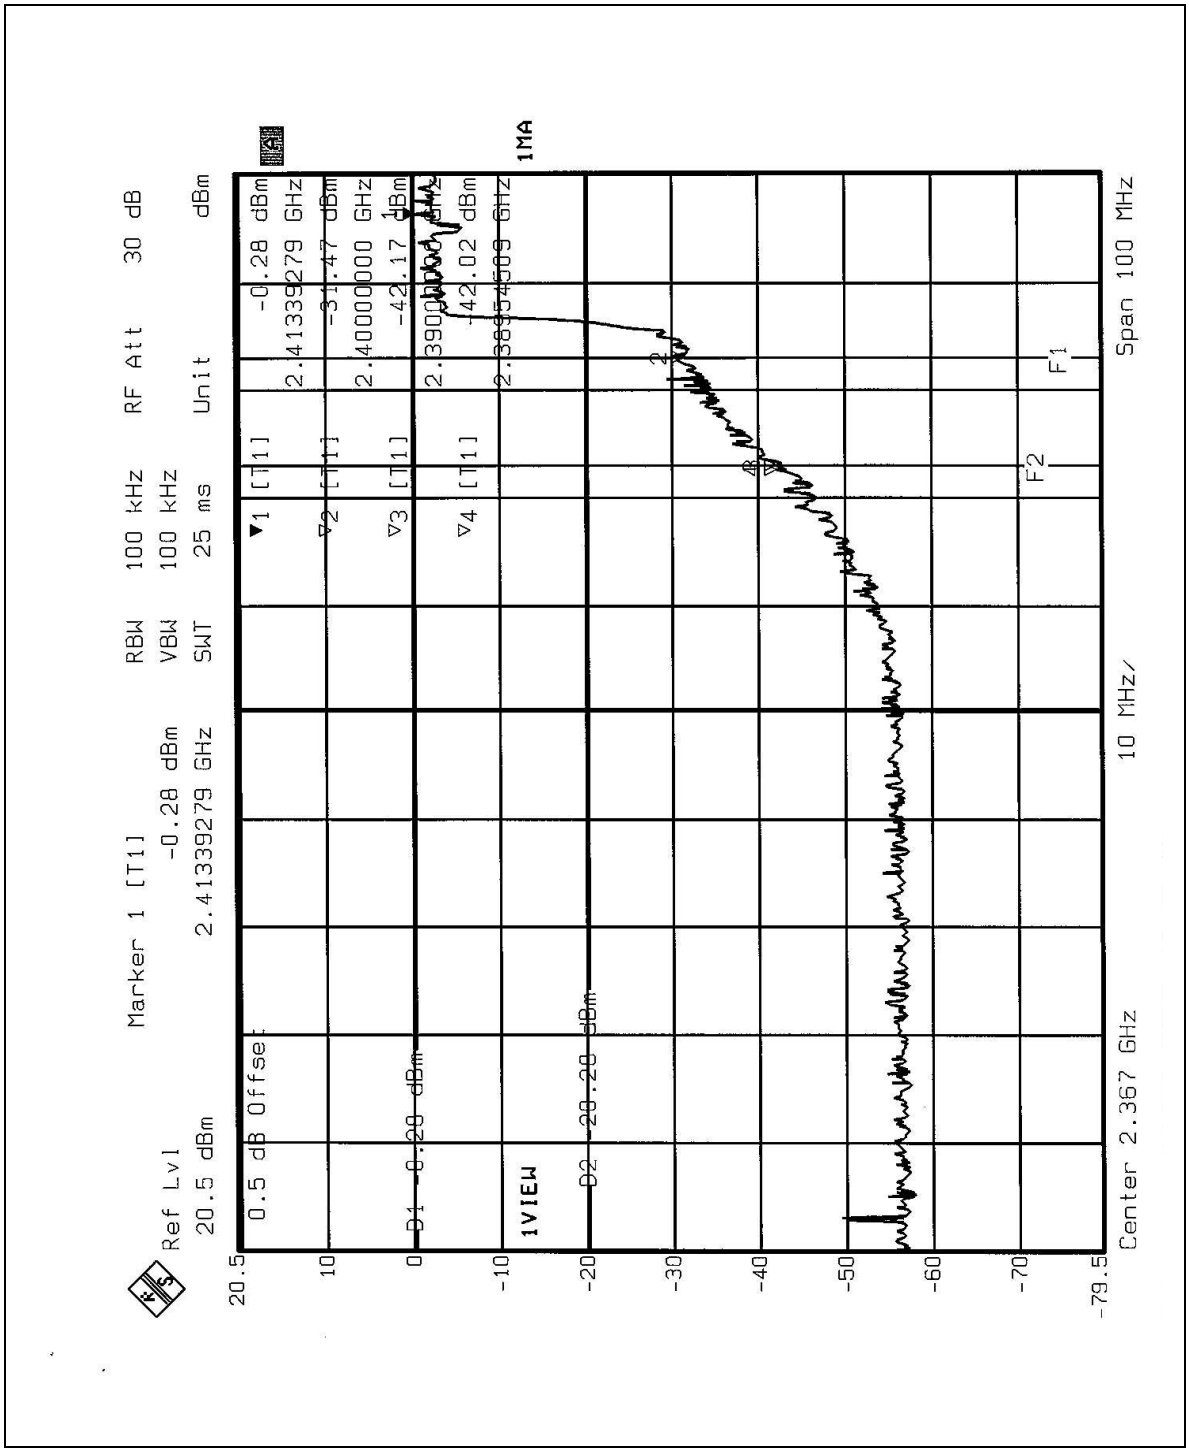
Ref Lvl
20.5 dBm
0.5 dB Offset
Marker 1 [T1]
-0.28 dBm
2.41339279 GHz
RBW 100 kHz
VBW 100 kHz
SWT 25 ms
RF Att 30 dB
Unit dBm
1VIEW
D1 -0.20 dBm
D2 -20.20 dBm
1MA
Center 2.367 GHz
10 MHz/
Span 100 MHz
F1
F2

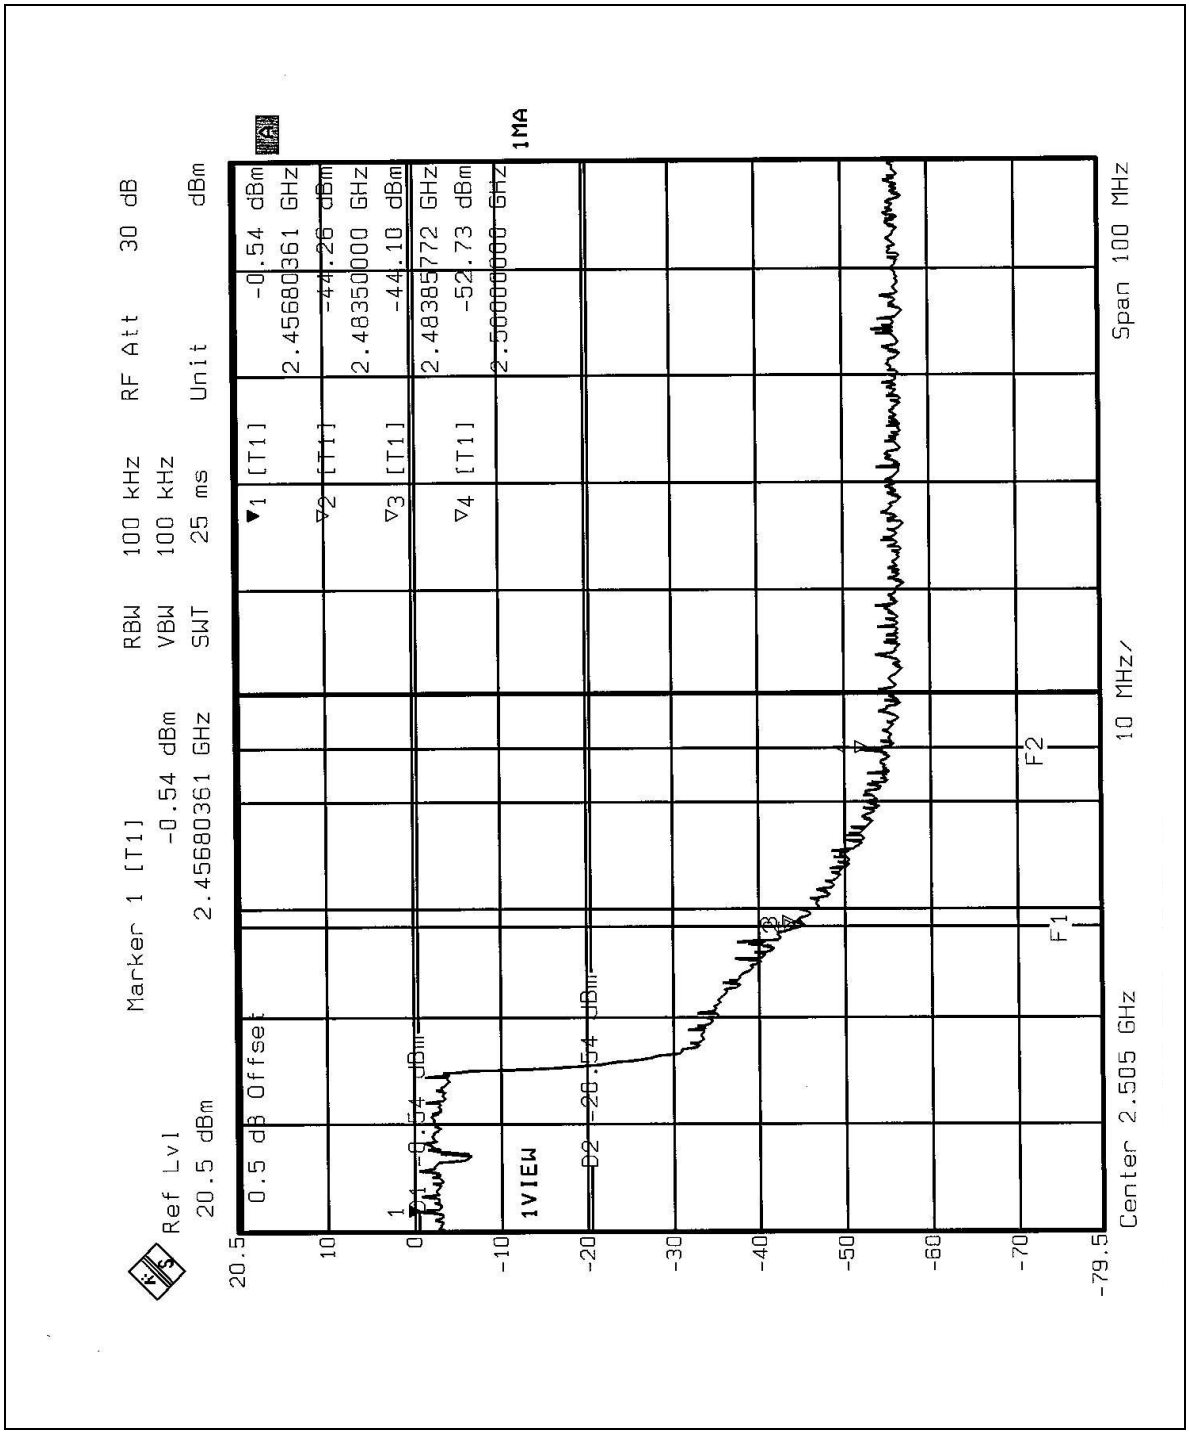
Ref Lvl
20.5 dBm
0.5 dB Offset
Marker 1 [T1]
-0.54 dBm
2.45680361 GHz
RBW 100 kHz
VBW 100 kHz
SWT 25 ms
RF Att 30 dB
Unit dBm
1 [T1] -0.54 dBm 2.45680361 GHz
2 [T1] -44.26 dBm 2.48350000 GHz
3 [T1] -44.10 dBm 2.48385772 GHz
4 [T1] -52.73 dBm 2.50000000 GHz
1MA
1VIEW
D2 -20.54 dBm
F1
F2
Center 2.505 GHz
10 MHz/
Span 100 MHz

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole Antenna. The antenna connector type is MMCX. The maximum Gain of this antenna is 2dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST

RADIATED EMISSION TEST

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:
Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:
Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF&Telecom Lab
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.