MEASUREMENT REPORT
of
Wireless LAN USB Adaptor

Applicant	:	ASUSTek Computer Inc.
Model No.	:	WL-140
EUT	:	IEEE 802.11b 2.4GHz DSSS 11Mbps Wireless LAN USB Adaptor
FCC ID	:	MSQWL140
Report No.	:	A5415359

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by ***Training Research Co., Ltd.***, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.247.

Applicant	:	ASUSTek Computer Inc.
Applicant address	:	4F, No. 150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.
EUT	:	IEEE 802.11b 2.4GHz DSSS 11Mbps Wireless LAN USB Adaptor
Model No.	:	WL-140
FCC ID	:	MSQWL140
Report No.	:	A5415359
Test Date	:	February 14, 2003

Prepared by: Eric Wong

Approved by: Frank Tsai

Tested by :

Training Research Co., Ltd.

TEL: 886-2-26935155 FAX: 886-2-26934440

255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

Tables of Contents

I. GENERAL 5
1.1 Introduction 5
1.2 Description of EUT 5
1.3 Description of Support Equipment 6
1.4 Test method 6
1.5 Configuration of System Under Test 7
1.6 Verify the Frequency and Channel 9
1.7 Test Procedure 10
1.8 Location of the Test Site 10
1.9 General Test Condition 10

II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators 11

III. Section 15.203 : Antenna Requirement 12

IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units 13
4.1 Test Condition & Setup 13
4.2 List of Test Instruments 13
4.3 Test Result of Conducted Emissions 14
Channel 01 14
Channel 06 15
Channel 11 16

V. Section 15.247(a) : Technical Description of the EUT 17

VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System 18
6.1 Test Condition & Setup 18
6.2 Test Instruments Configuration 18
6.3 List of Test Instruments 18
6.4 Test Result of Bandwidth 19
Channel 01 20
Channel 06 21
Channel 11 22

VII. Section 15.247(b) : Power Output 23
7.1 Test Condition & Setup 23
7.2 List of Test Instruments 23
7.3 Test Result 23

VIII. Section 15.247(c) : Spurious Emissions (Radiated) 24
8.1 Test Condition & Setup 24
8.2 List of Test Instruments 25
8.3 Test Result of Spurious Radiated Emissions 26
Table 1 Radiated emissions of Horizontal for 30MHz to 1GHz 26
Table 2 Radiated emissions of Vertical for 30MHz to 1GHz 26
Table 3 Above 1GHz radiated emissions of Horizontal of CH1 27
Table 4 Above 1GHz radiated emissions of Vertical of CH1 27
Table 5 Above 1GHz radiated emissions of Horizontal of CH6 28
Table 6 Above 1GHz radiated emissions of Vertical of CH6 28
Table 7 Above 1GHz radiated emissions of Horizontal of CH11 29
Table 8 Above 1GHz radiated emissions of Vertical of CH11 29
8.4 Test Result of Bandedge 30
Channel 01 31
Channel 11 32

IX. Section 15.247(d) : Power Spectral Density 33
9.1 Test Condition & Setup 33
9.2 Test Instruments Configuration 33
9.3 List of Test Instruments 33
9.4 Test Result of Power Spectral Density 33
Channel 01 34
Channel 06 35
Channel 11 36

Ⅰ. GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the *cable gateway* certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's Rules and Regulations.

1.2 Description of EUT

EUT	**:**	IEEE 802.11B 2.4GHZ DSSS 11Mbps Wireless LAN USB Adaptor
Model No.	**:**	WL-140
Granted FCC ID	**:**	MSQWL140
Frequency Range	**:**	2.412 GHz ~ 2.462GHz
Support Channel	**:**	11 Channel
Modulation Skill	**:**	DBPSK, DQPSK, CCK
Power Type	**:**	By the USB interface of computer
Style Interface	**:**	USB

1.3 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

Notebook	**:**	**IBM Think Pad X20**
Type No.	:	2662-11T
Serial No.	:	FX-11922 00/09
FCC ID	:	Doc Approved
檢磁	:	3892B565
AC Adaptor	**:**	**IBM**
Model No.	:	PA2450U
Serial No.	:	02K6654
FCC ID	:	Doc Approved
Power Core	:	Non-shielded, 180cm long, Plastic hoods, with ferrite bead
Power type	:	100 ~ 240VAC, 50 ~ 60Hz, 0.5A ~ 1.2A / 16Vdc, 4.5A

Mouse	**:**	**Logitech**
Model No.	:	M-BA47
Serial No.	:	LZE92250027
FCC ID	:	DoC Approved
檢磁	:	4872A220
Power type	:	Powered by Computer
Power Cable	:	Shielded, 1.5m long, Plastic hoods, No ferrite bead
USB		
Gamepad	**:**	**Rockfire**
Model No.	:	QF-337uv
Serial No.	:	10600545, KR91379759
FCC ID	:	None (CE approval)
檢磁	:	3862A574
Power type	:	By computer
Data Cable	:	Shielded, 1.81m long, Plastic, with ferrite core
Printer	**:**	**HP**
Model No.	:	C6464A
Serial No.	:	TH16LEB5PK
FCC ID	:	N/A, DoC Approved
檢磁	:	3892H381
Power type	:	Switching adaptor
Power cord	:	Non-shielded, 173cm long, No ferrite core (between adaptor and AC source) Non-shielded, 180cm long, with ferrite core (between printer and adaptor)
Data cable	:	Shielded, 1.70m long, No ferrite core
Modem	**:**	**ACEEX**
Model No.	:	XDM-56V14
FCC ID	:	IFAXDM-56V14
Power type	:	Linear
Power cord	:	Non-shielded, 1.9m long, No ferrite cord
Data cable	:	RS232, Shielded, 1.2m long, No ferrite core RJ11C x 2, 7’ long non-shielded, No ferrite core

1.4 Test method

1 Connecting the EUT to the USB port of the Notebook computer.

2 Using the notebook computer and software provided by the manufacturer to control the EUT in the continuous transmission mode.

3 Then making EUT to the mode of continuous transmission and set testing channel. The test is performed under those specific conditions.

1.5 Configuration of System Under Test

(Conducted and Radiated for unintentional)

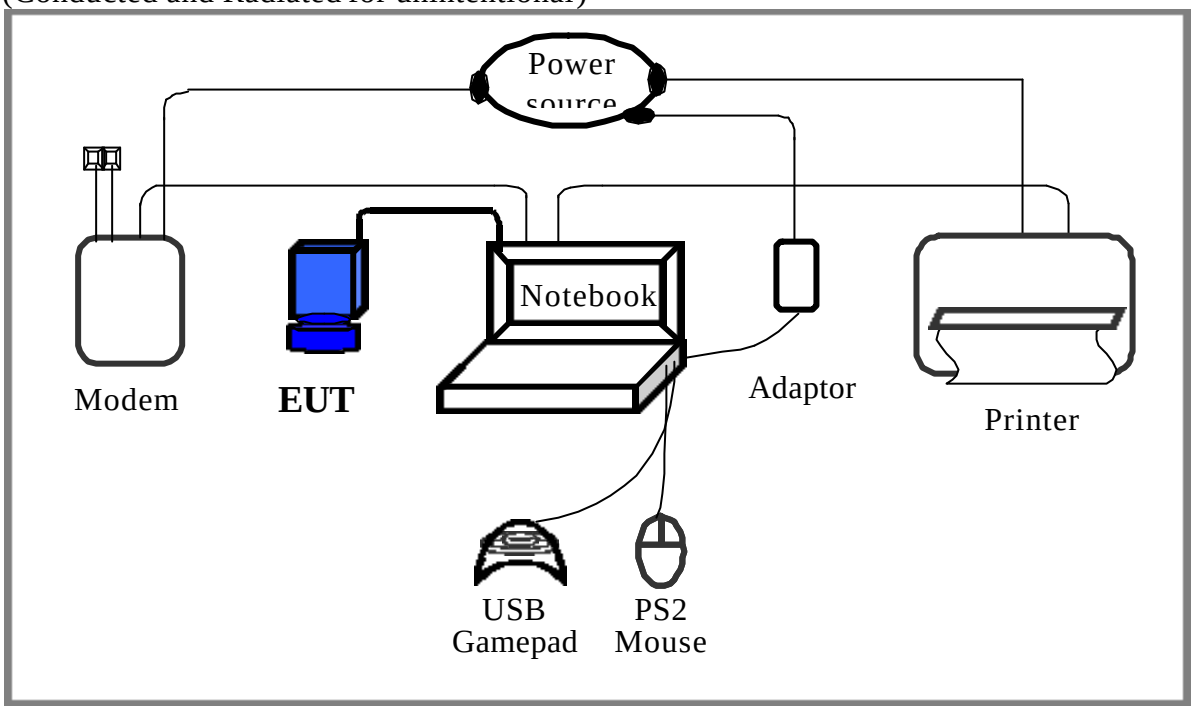

Connections of Equipment

Notebook: *Parallel Port --- a printer
*VGA Port --- a monitor
*Serial Port --- an external modem
*PS/2 Port --- a PS2 mouse
*USB A Port --- a USB gamepad
*USB B Port --- **EUT**

EUT: *USB cable --- 183cm long, shielded, no ferrite core

(Radiated of intentional)

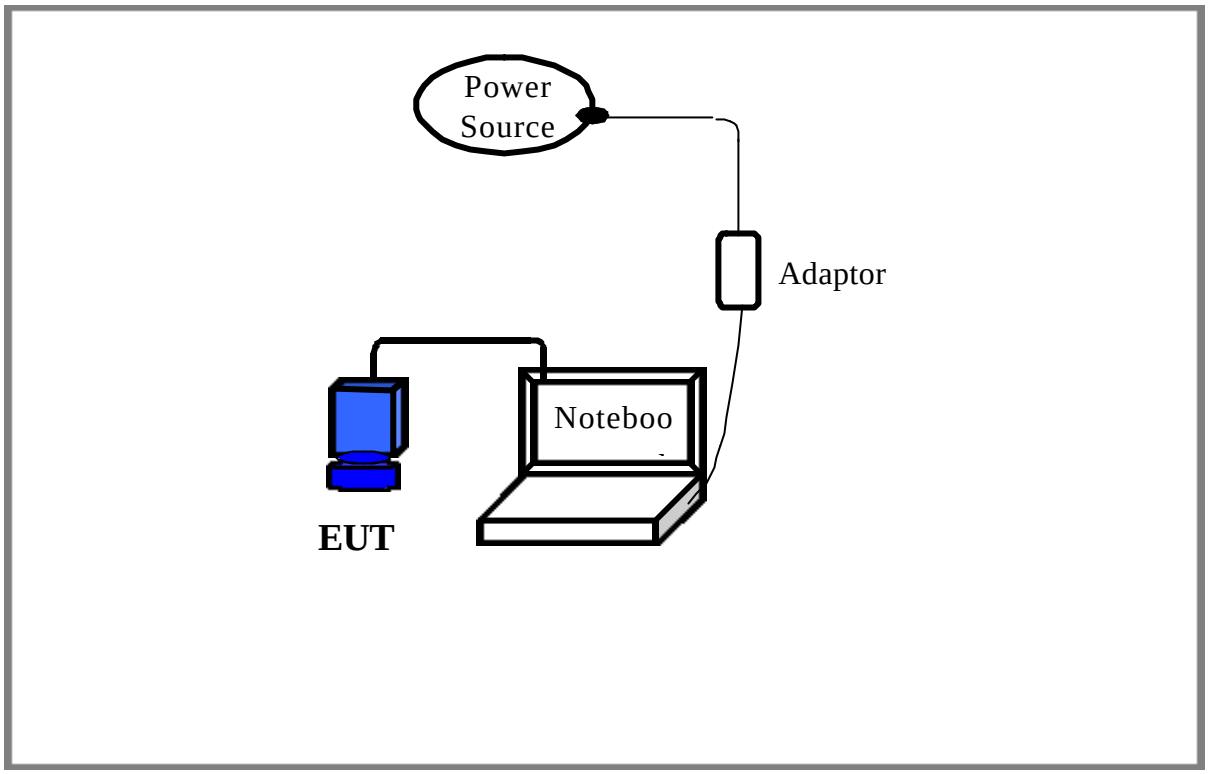

Connections of Equipment

EUT:

*USB connector --- Plug the connector in the USB port of notebook computer via a 183cm long, shielded, no ferrite core USB cable

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
   (The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
   Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on 1.4, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter**, **Anechoic Chamber (Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on <1.4>.

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a USB bus interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires Certification and the items required such as Sect.15.107 (Conducted limits) and Sect.15.109 (Radiated emission limits) is same as Sect.15.207 and 15.247(C) we'd performed respectively. We dropped this part, as the result will be repeated as the part we mentioned above.

III. Section 15.203: Antenna requirement

The EUT has an integrated antenna permanently attached on the PCB. In addition, there is no external antenna or connector employed. The antenna requirement stated in Sect.15.203 is inapplicable to this EUT.

IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units

4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.4.

There is a test condition apply in this test item, the test procedure description as the following:

EUT transmit only:
Plug the EUT in the USB port of notebook computer and software to control the EUT. The setting up procedure is recorded on <1.4>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

4.2 List of Test Instruments

				Calibration Date	
Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	H P	3520A00242	06/28/02	06/28/03
RF Filter Section	85460A	H P	3448A00217	06/28/02	06/28/03
LISN (EUT)	LISN-01	TRC	9912-03,04	06/04/02	06/04/03
LISN (Support E.)	LISN-01	TRC	9912-05	07/15/02	07/15/03
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	11/20/02	11/20/03

The level of confidence of 95%, the uncertainty of measurement of conducted emission is ± 2.02 dB.

4.3 Test Result of Power Line Conducted Emissions

EUT station transmit only

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. The worst case to show as follows.

Test Conditions: Temperature : 23.3 °C Humidity : 54.4 % RH

Table 1 Test mode: Channel 1

Power Connected Emissions					*FCC Class B*		
Conductor	*Frequency (KHz)*	*Peak (dBmV)*	*QP (dBmV)*	*Average (dBmV)*	*QP-limit (dBmV)*	*AVG-limit (dBmV)*	*Margin (dB)*
Line 1	208.000	46.73	---	---	64.34	54.34	-7.61
	384.000	44.13	---	---	59.31	49.31	-5.18
	513.000	37.45	---	---	56.00	46.00	-8.55
	639.000	36.79	---	---	56.00	46.00	-9.21
	902.000	35.03	---	---	56.00	46.00	-10.97
	1155.000	35.77	---	---	56.00	46.00	-10.23
	1411.000	35.66	---	---	56.00	46.00	-10.34
	1854.000	35.17	---	---	56.00	46.00	-10.83
	2372.000	35.52	---	---	56.00	46.00	-10.48
	5310.000	33.68	---	---	60.00	50.00	-16.32
Line 2	208.000	47.38	---	---	64.34	54.34	-6.96
	409.000	41.40	---	---	58.60	48.60	-7.20
	447.000	38.68	---	---	57.51	47.51	-8.83
	513.000	34.87	---	---	56.00	46.00	-11.13
	893.000	33.16	---	---	56.00	46.00	-12.84
	1155.000	34.15	---	---	56.00	46.00	-11.85
	1924.000	32.72	---	---	56.00	46.00	-13.28
	2767.000	32.58	---	---	56.00	46.00	-13.42
	5340.000	30.97	---	---	60.00	50.00	-19.03

NOTE:

(1) Margin = Peak Amplitude – Limit, ***The reading amplitudes are all under limit.***

(2) A "+" sign in the margin column means the emission is OVER the Class B Limit and "–" sign of means UNDER the Class B limit

Table 2 Test mode: Channel 6

Power Connected Emissions					*FCC Class B*		
Conductor	*Frequency (KHz)*	*Peak (dBmV)*	*QP (dBmV)*	*Average (dBmV)*	*QP-limit (dBmV)*	*AVG-limit (dBmV)*	*Margin (dB)*
Line 1	205.000	47.85	---	---	64.43	54.43	-6.58
	384.000	43.67	---	---	59.31	49.31	-5.64
	639.000	37.08	---	---	56.00	46.00	-8.92
	893.000	35.10	---	---	56.00	46.00	-10.90
	1155.000	35.03	---	---	56.00	46.00	-10.97
	1346.000	34.87	---	---	56.00	46.00	-11.13
	1854.000	35.24	---	---	56.00	46.00	-10.76
	2372.000	35.12	---	---	56.00	46.00	-10.88
	2899.000	34.27	---	---	56.00	46.00	-11.73
	5180.000	34.25	---	---	60.00	50.00	-15.75
Line 2	203.000	45.72	---	---	64.49	54.49	-8.77
	384.000	43.74	---	---	59.31	49.31	-5.57
	452.000	38.79	---	---	57.37	47.37	-8.58
	639.000	38.51	---	---	56.00	46.00	-7.49
	893.000	36.40	---	---	56.00	46.00	-9.60
	1155.000	37.00	---	---	56.00	46.00	-9.00
	1801.000	36.58	---	---	56.00	46.00	-9.42
	2179.000	36.58	---	---	56.00	46.00	-9.42
	2636.000	35.66	---	---	56.00	46.00	-10.34
	5000.000	33.99	---	---	60.00	50.00	-16.01

Table 3 Test mode: Channel 11

Power Connected Emissions					*FCC Class B*		
Conductor	*Frequency (KHz)*	*Peak (dBmV)*	*QP (dBmV)*	*Average (dBmV)*	*QP-limit (dBmV)*	*AVG-limit (dBmV)*	*Margin (dB)*
Line 1	210.000	46.37	---	---	64.29	54.29	-7.92
	384.000	43.35	---	---	59.31	49.31	-5.96
	639.000	36.88	---	---	56.00	46.00	-9.12
	832.000	35.75	---	---	56.00	46.00	-10.25
	1155.000	35.80	---	---	56.00	46.00	-10.20
	1346.000	36.03	---	---	56.00	46.00	-9.97
	1854.000	36.86	---	---	56.00	46.00	-9.14
	2636.000	34.73	---	---	56.00	46.00	-11.27
	3510.000	34.32	---	---	56.00	46.00	-11.68
	4809.000	34.22	---	---	56.00	46.00	-11.78
Line 2	206.000	47.50	---	---	64.40	54.40	-6.90
	389.000	44.75	---	---	59.23	49.23	-4.48
	447.000	40.25	---	---	57.51	47.51	-7.26
	639.000	36.53	---	---	56.00	46.00	-9.47
	893.000	36.88	---	---	56.00	46.00	-9.12
	1091.000	37.97	---	---	56.00	46.00	-8.03
	1661.000	37.69	---	---	56.00	46.00	-8.31
	2115.000	36.63	---	---	56.00	46.00	-9.37
	2689.000	35.80	---	---	56.00	46.00	-10.20
	5180.000	33.40	---	---	60.00	50.00	-16.60

V. Section 15.247 (a): Technical description of the EUT

Based on the Section 2.1, *Direct Sequence System* is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the "modulating function" and is the direct cause of the wide spreading of the transmitted signal. In the Exhibit H, operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the Direct sequence spread spectrum system.

VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth.. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

6.2 Test Instruments Configuration

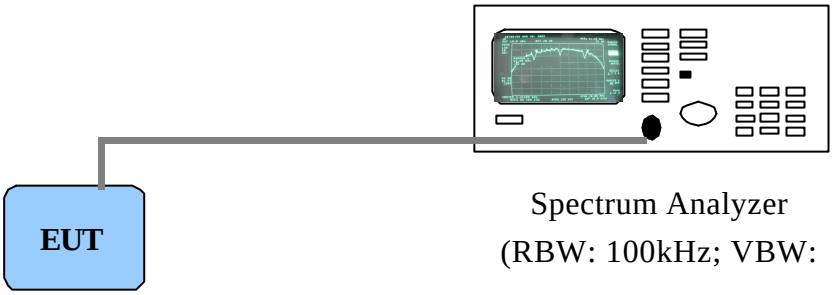

Test Configuration of Bandwidth for Direct Sequence System

P.S.: Notebook computer to control the EUT at maximal power output and channel Number and set antenna kit

6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/11/02	09/11/03

6.4 Test Result of Bandwidth

Bandwidth of Channel 1

Bandwidth : 11.80 MHz

The min. 6 dB BW at least : 500 KHz

Bandwidth of Channel 6

Bandwidth : 11.73 MHz

The min. 6 dB BW at least : 500 KHz

Bandwidth of Channel 11

Bandwidth : 11.70 MHz

The min. 6 dB BW at least : 500 KHz

Note:

1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth *(RBW)=300kHz* and set the *span>>RBW*. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
2. The attachments show these on the following pages.

Bandwidth of Channel 1: 11.80 MHz

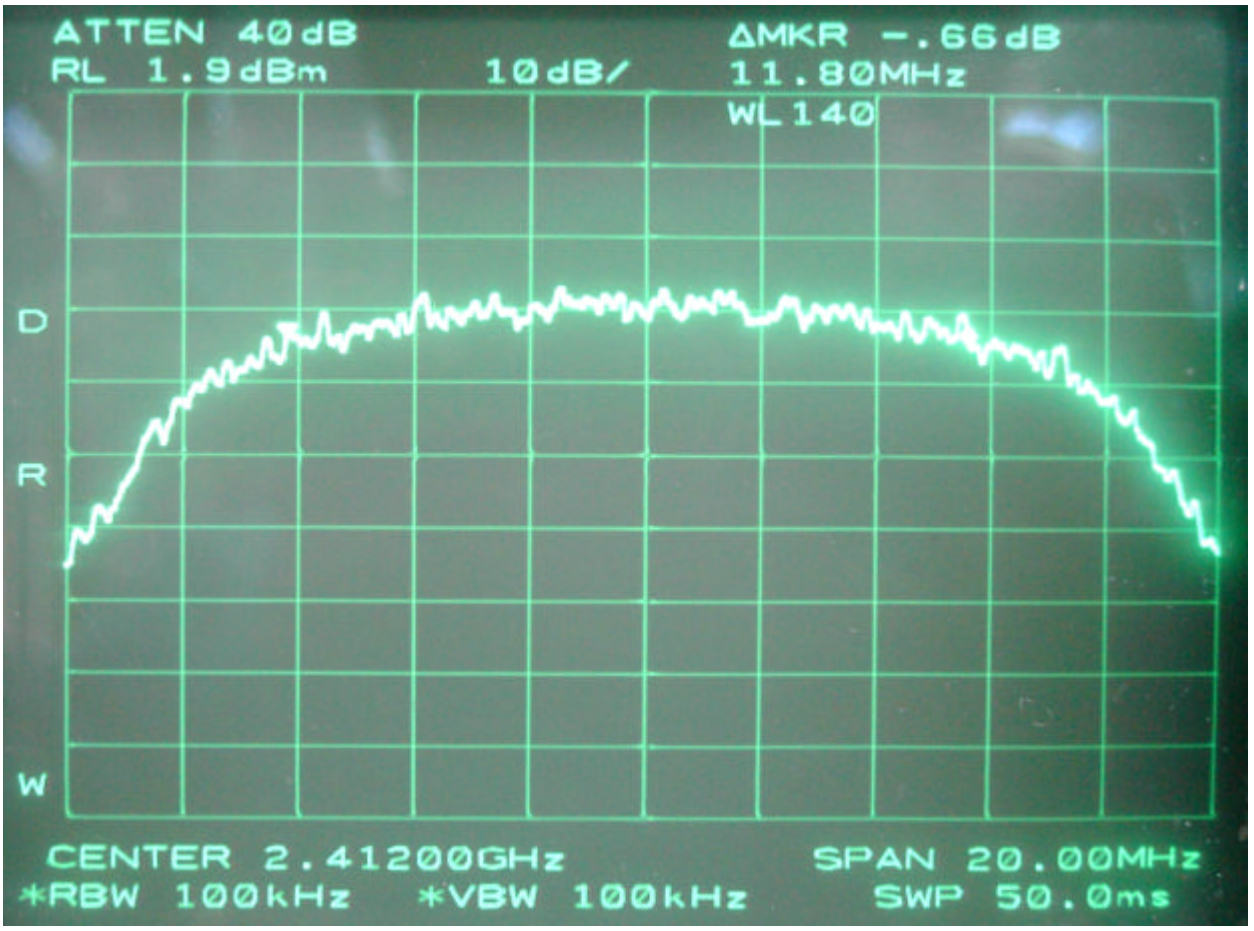

Bandwidth of Channel 6: 11.73 MHz

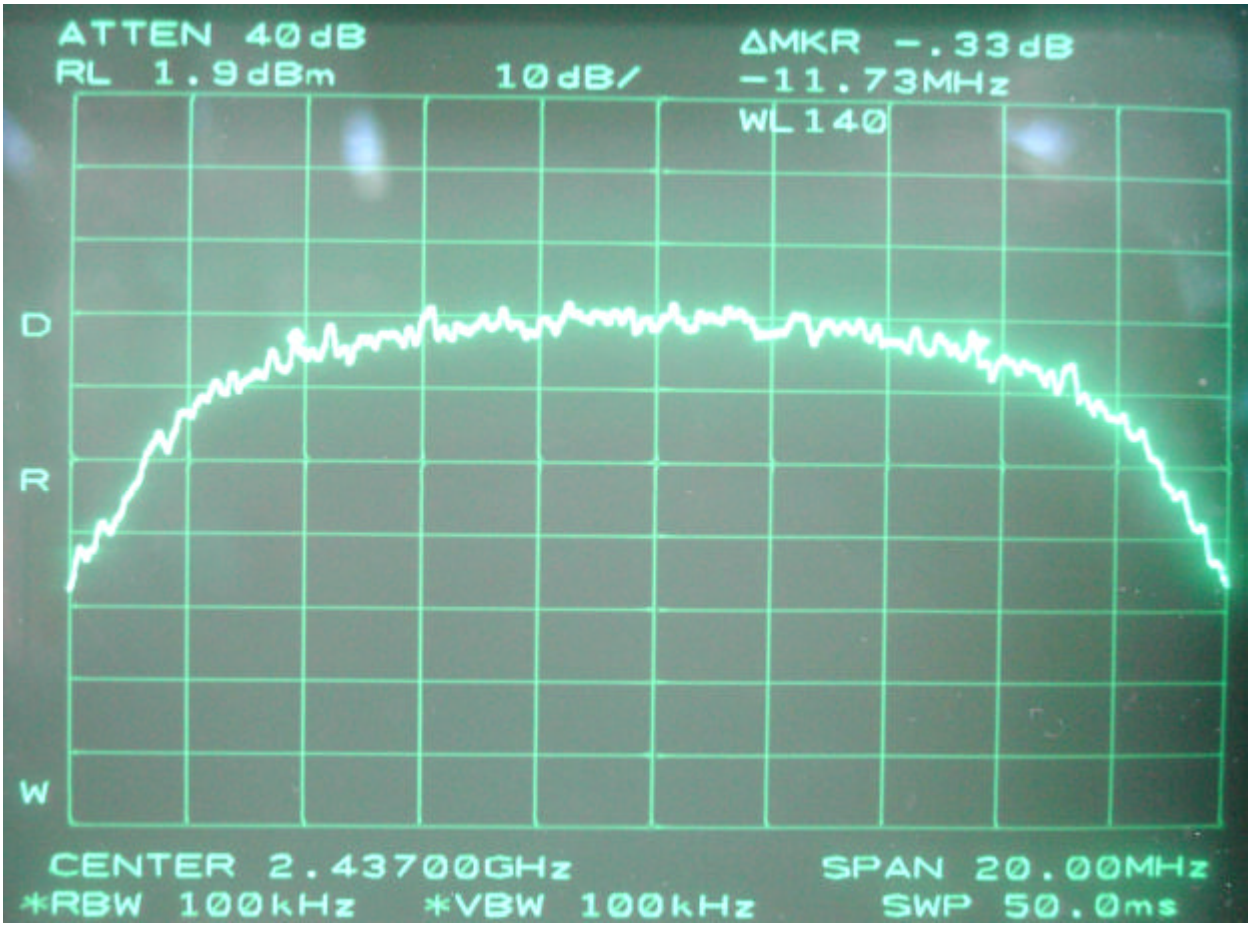

Bandwidth of Channel 11: 11.70 MHz

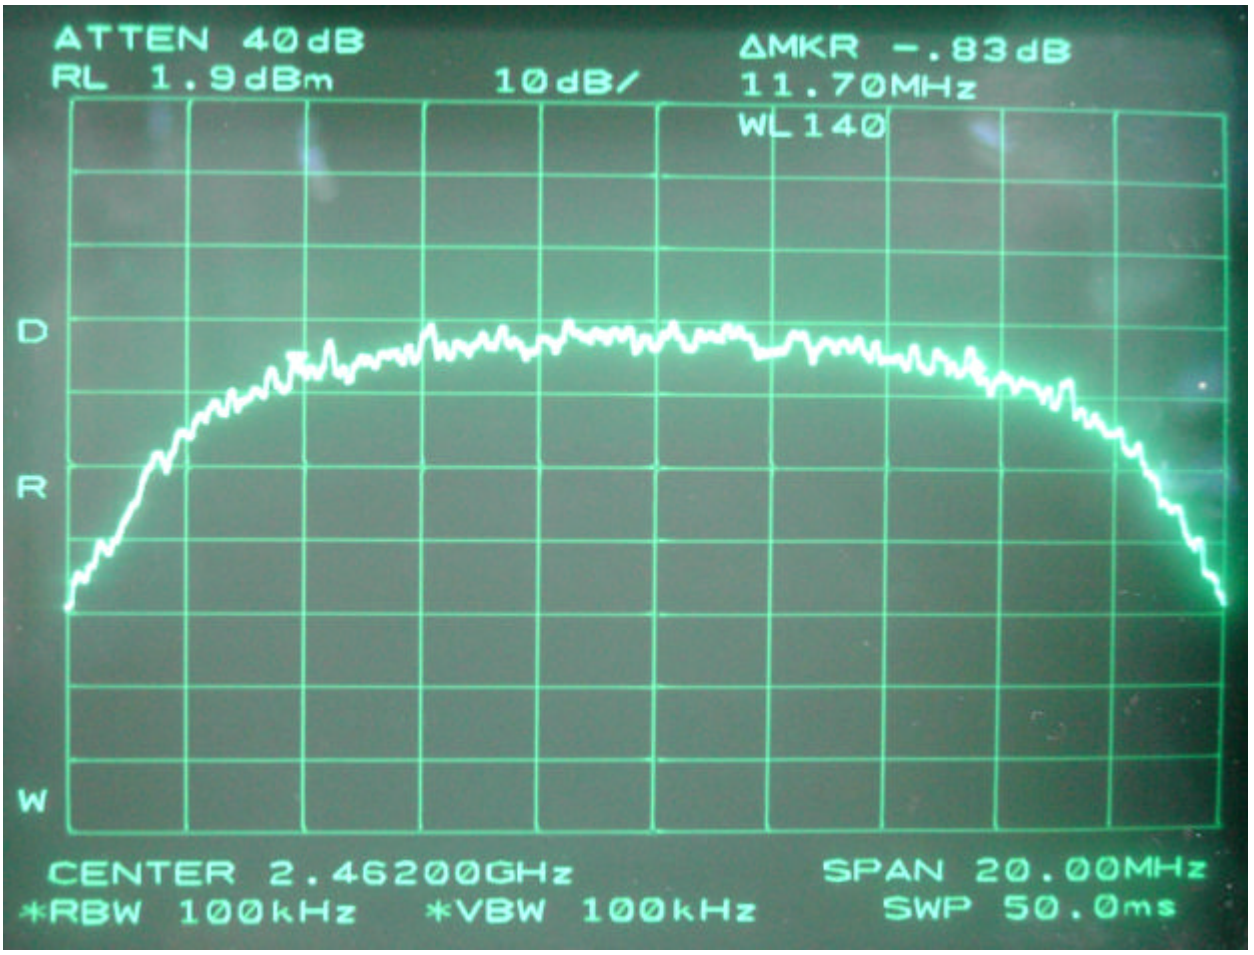

VII. Section 15.247(b): Power Output

7.1 Test Condition & Setup

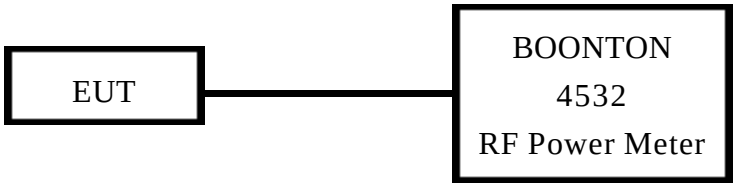

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every tests. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

7.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.
RF Power Meter	4532	BOONTON	117501

7.3 Test Result

Formula:
Signal generator + |Cable loss| = Output peak power

Channel	Signal Generator	Cable Loss	Limit	Output peak power	
	dBm	dBm	(DTS)	dBm	mW
CH 1	14.27	0.50	100mW	14.77	29.99
CH 6	13.61	0.50	100mW	14.11	25.76
CH 11	12.90	0.50	100mW	13.40	21.88

Note:
The limit is vary according to the equipment class, listed below:
1. Digital Transmission System (DTS): 100mW
2. Spread Spectrum Transmitter (DSS): 1W

VIII. Section 15.247 (C): Spurious Emissions (Radiated)

8.1 Test Condition & Setup

We' d performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we' d set the spectrum analyzer' s 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, Schwarzeck whole range Small Biconical antenna (Model No.: BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the spectrum HP 85460A and spectrum was examined from 1GHz to 18GHz using an Hewlett Packard 8564E Spectrum Analyzer, EMCO Horn Antenna (Model 3115) for 1G ~ 18GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 18GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 18GHz) and the analyzer was operated in the maximum hold mode. There is a test condition apply in this test item, the test procedure description as the following:

Making access to the mode of continuous transmission by the software in the computer via the USB port. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBμV/m) is determined by algebraically adding the measured reading in dBμV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

FIa (dBuV/m) = FIr (dBμV) + Correction Factors

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

For frequency between 1GHz to 18GHz

FIa (dBμV/m) = FIr (dBμV) + Correction Factor

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

The setting up procedure is recorded on [1.4].

8.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	H P	3520A00242	06/28/02	06/28/03
RF Filter Section	85460A	H P	3448A00217	06/28/02	06/28/03
Small Biconical Antenna and Balun	BBVU9135 UBAA9114	Schwarzeck	127	05/07/02	05/07/03
Switch/Control Unit (>30MHz)	3488A	HP	N/A	11/20/02	11/20/03
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	11/20/02	11/20/03
Spectrum Analyzer	8564E	HP	US36433002	08/01/02	08/01/03
Microwave Preamplifier	83051A	HP	3232A00347	08/01/02	08/01/03
Horn Antenna	3115	EMCO	9704 – 5178	08/01/02	08/01/03
Anechoic Chamber (cable calibrated together)				05/20/02	05/20/03

The level of confidence of 95% , the uncertainty of measurement of radiated emission is ± 3.44dB .

8.3 Test Result of Spurious Radiated Emissions

EUT's transmit only

The highest peak values of radiated emissions form the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 19.9 ° C Humidity : 58.8 % RH

Table 4 Radiated Emissions for 30MHz 1GHz [Horizontal]

Radiated Emission				*Correction Factors*	*Corrected Amplitude*	*FCC Class B (3 m)*	
Frequency (MHz)	*Amplitude (dBmV)*	*Ant. H. (m)*	*Table (°)*	*(dB)*	*(dBmV/m)*	*Limit (dBmV/m)*	*Margin (dB)*
215.51	35.95	1.00	101	-2.72	33.23	43.50	-10.27
243.40	38.56	1.00	273	-2.74	35.82	46.00	-10.18
282.20	35.28	1.00	73	-2.62	32.66	46.00	-13.34
336.76	36.87	1.00	296	-1.62	35.25	46.00	-10.75
401.02	30.90	1.00	142	0.49	31.39	46.00	-14.61
558.65	25.31	1.00	191	7.19	32.50	46.00	-13.50

Table 5 Radiated Emissions For 30MHz 1GHz [Vertical]

Radiated Emission				*Correction Factors*	*Corrected Amplitude*	*FCC Class B (3 m)*	
Frequency (MHz)	*Amplitude (dBmV)*	*Ant. H. (m)*	*Table (°)*	*(dB)*	*(dBmV/m)*	*Limit (dBmV/m)*	*Margin (dB)*
100.32	28.52	1.00	144	-0.30	28.22	43.50	-15.28
146.40	29.14	1.00	312	-2.05	27.09	43.50	-16.41
336.76	31.43	1.00	349	-1.62	29.81	46.00	-16.19
434.97	27.87	1.00	244	2.06	29.93	46.00	-16.07
500.45	29.65	1.00	306	4.58	34.23	46.00	-11.77
558.65	27.97	1.00	165	7.19	35.16	46.00	-10.84

Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain)

Table 6 Radiated Emissions For 1GHz 18GHz [Horizontal] [CH 1]

Radiated Emission				Corrected Amplitude (dBμV/m)		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	Peak	Average	Limit (dBμV/m) Peak	Limit (dBμV/m) Ave.	Margin (dB)
2375.17	1.00	11	2.84	43.00	---	74.00	54.00	-11.00
4826.15	1.00	315	3.77	46.88	---	74.00	54.00	-7.12
9650.42	1.00	246	11.47	48.41	---	74.00	54.00	-5.59

Table 7 Radiated Emissions For 1GHz 18GHz [Vertical] [CH 1]

Radiated Emission				Corrected Amplitude (dBμV/m)		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	Peak	Average	Limit (dBμV/m) Peak	Limit (dBμV/m) Ave.	Margin (dB)
2374.67	1.00	55	2.83	49.50	---	74.00	54.00	-4.50
4823.12	1.00	317	3.76	45.36	---	74.00	54.00	-8.64

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF conducted emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Table 8 Radiated Emissions For 1GHz 18GHz [Horizontal] [CH 6]

Radiated Emission				Corrected Amplitude (dBμV/m)		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	Peak	Average	Limit (dBμV/m) Peak	Limit (dBμV/m) Ave.	Margin (dB)
4874.48	1.00	237	3.96	46.40	---	74.00	54.00	-7.60
9750.10	1.00	62	11.90	49.84	---	74.00	54.00	-4.16

Table 9 Radiated Emissions For 1GHz 18GHz [Vertical] [CH 6]

Radiated Emission				Corrected Amplitude (dBμV/m)		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	Peak	Average	Limit (dBμV/m) Peak	Limit (dBμV/m) Ave.	Margin (dB)
4874.48	1.00	297	3.96	44.90	---	74.00	54.00	-9.10
9750.10	1.00	21	11.90	48.34	---	74.00	54.00	-5.66

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF conducted emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Table 10 Radiated Emissions For 1GHz 18GHz [Horizontal] [CH 11]

Radiated Emission				Corrected Amplitude (dBμV/m)		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	Peak	Average	Limit (dBμV/m) Peak	Limit (dBμV/m) Ave.	Margin (dB)
2500.00	1.00	74	3.50	45.50	---	74.00	54.00	-8.50
4925.83	1.00	14	4.13	45.57	---	74.00	54.00	-8.43
9849.79	1.00	116	11.93	48.54	---	74.00	54.00	-5.46

Table 11 Radiated Emissions For 1GHz 18GHz [Vertical] [CH 11]

Radiated Emission				Corrected Amplitude (dBμV/m)		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	Peak	Average	Limit (dBμV/m) Peak	Limit (dBμV/m) Ave.	Margin (dB)
2500.50	1.00	33	3.50	48.00	---	74.00	54.00	-6.00
4925.83	1.00	129	4.13	46.74	---	74.00	54.00	-7.26
9849.79	1.00	307	11.93	46.37	---	74.00	54.00	-7.63

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF conducted emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

8.4 Test Result of the Bandedge

If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified id §15.209(a),*

We perform this section by the *conducted* manner, the RBW is set to 100kHz and VBW>RBW. We' d made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured.* If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a).*

The following pages show our observations referring to the channel 1 and 11 respectively.
Test Condition & Setup: same as < 8.1 >

Channel 1

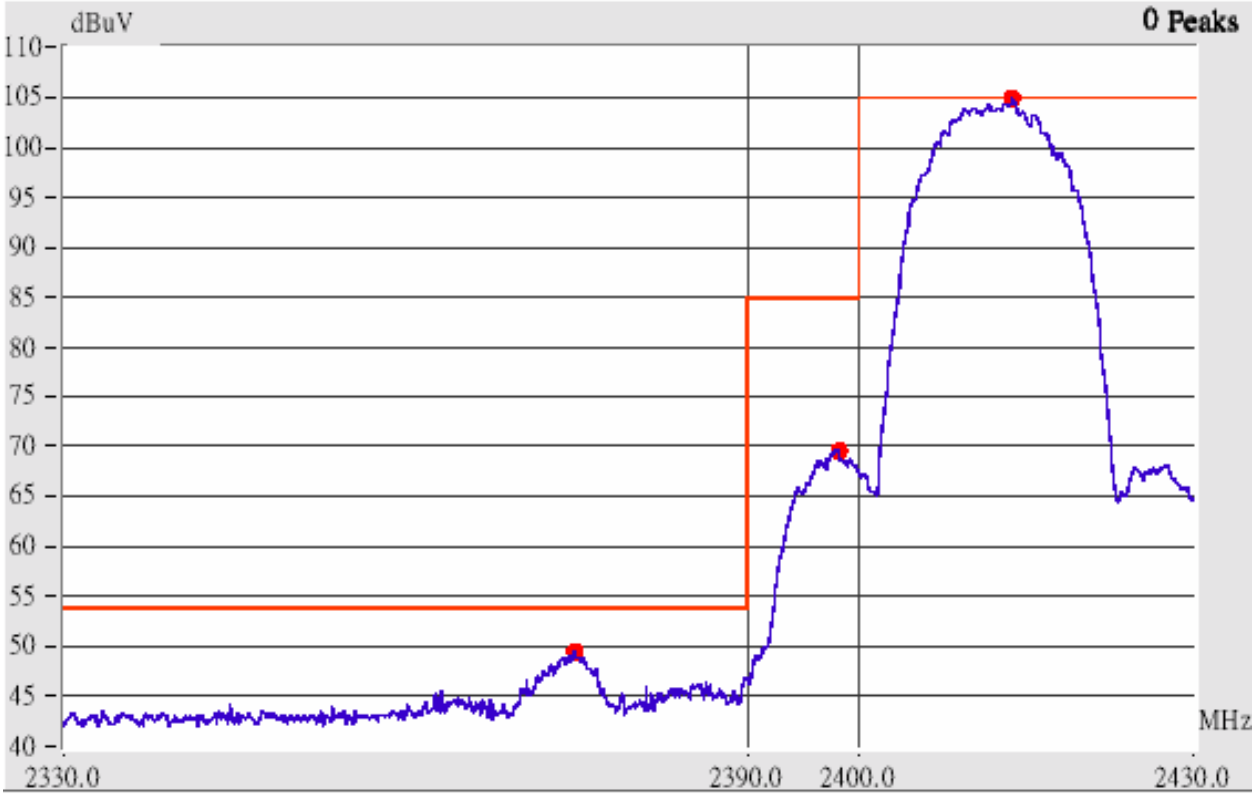

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The picture shown above is the bandedge of channel 1.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band (<2400MHz) is do comply with the Part 15.209(a) – under the limited line marked in red color.

Channel 11

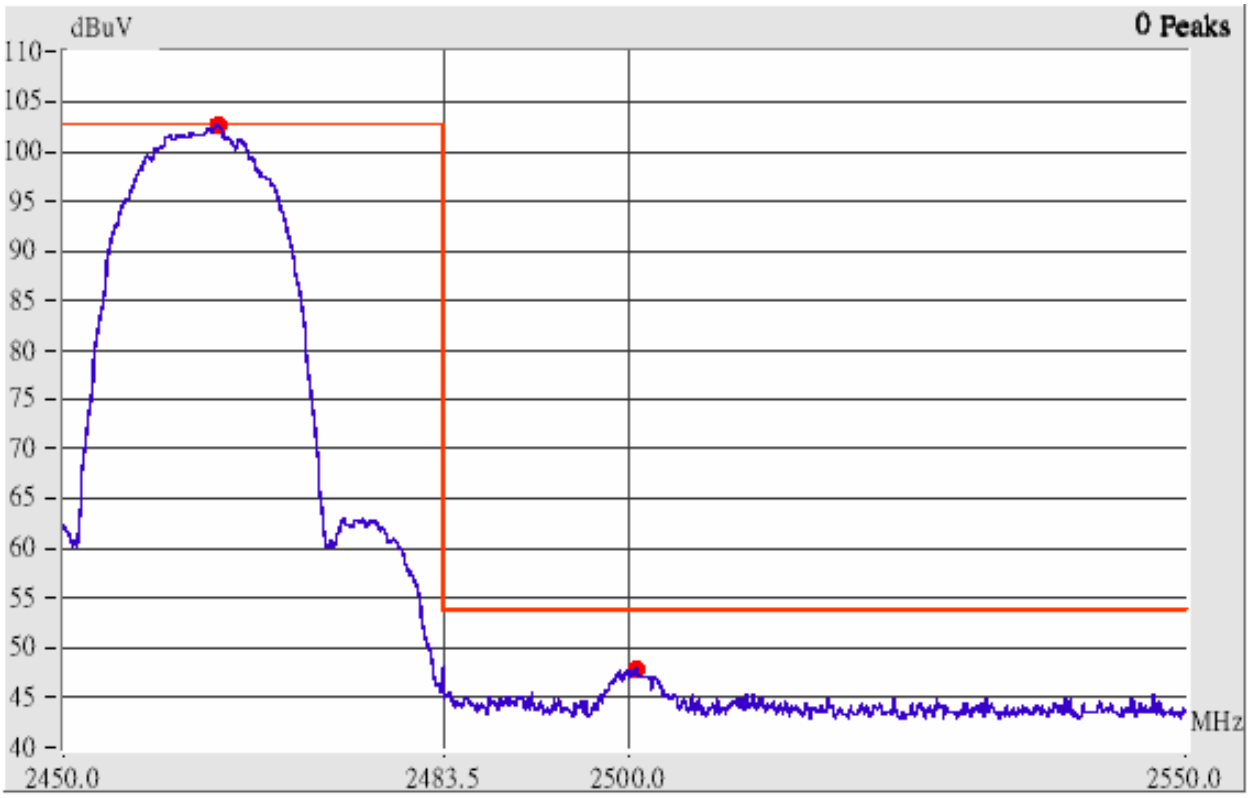

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The picture shown above is the bandedge of channel 11.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band (>2483.5MHz) is do comply with the Part 15.209(a) – under the limited line marked in red color.

IX. Section 15.247(d): Power Spectral Density

9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode . The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

The attachments below show our observation.

9.2 Test Instruments Configuration

P.S.: Notebook computer to control the EUT at maximal power output and channel Number and set antenna kit

9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/11/02	09/11/03

9.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.

Channel	*Frequency (GHz)*	*Ppr (dBm)*	*Cable Loss (dB)*	*Ppq (dBm)*	*Limit (dB)*	*Margin (dB)*
CH 01	2.412	-10.33	1.80	-8.53	8.00	-16.53
CH 06	2.437	-11.33	1.85	-9.48	8.00	-17.48
CH 11	2.462	-12.50	1.93	-10.57	8.00	-18.57

Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
   Ppq: actual peak power density in the spread spectrum band.
3. Ppq = Ppr + |Cable Loss|

Channel 01

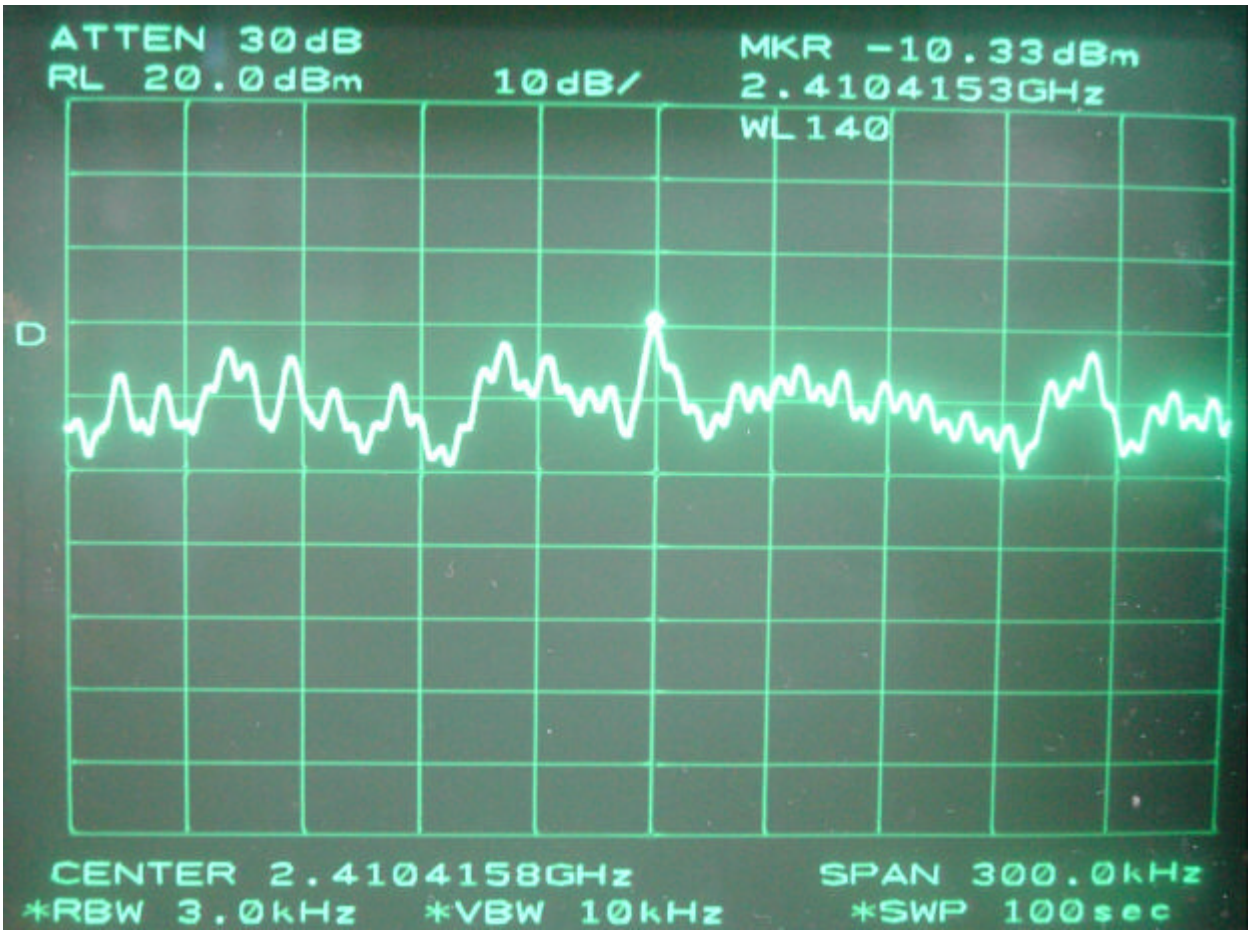
ATTEN 30dB
RL 20.0dBm
10dB/
MKR -10.33dBm
2.4104153GHz
WL140
D
CENTER 2.4104158GHz
SPAN 300.0kHz
*RBW 3.0kHz
*VBW 10kHz
*SWP 100sec

Channel 06

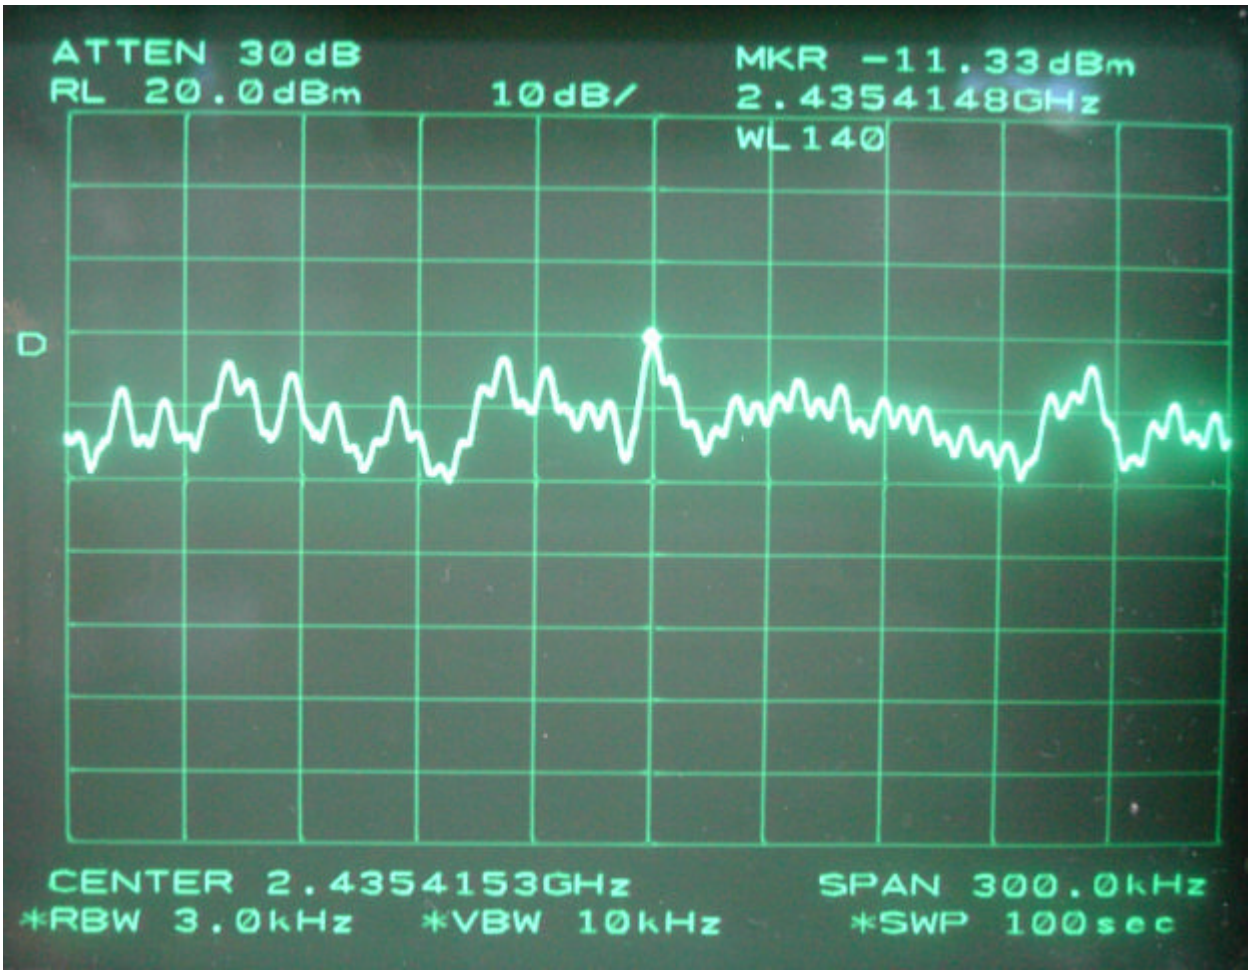
ATTEN 30dB
RL 20.0dBm
10dB/
MKR -11.33dBm
2.4354148GHz
WL140
D
CENTER 2.4354153GHz
SPAN 300.0kHz
*RBW 3.0kHz
*VBW 10kHz
*SWP 100sec

Channel 11

ATTEN 30dB
RL 20.0dBm
10dB/
MKR -12.50dBm
2.4604148GHz
WL140
D
CENTER 2.4604153GHz
SPAN 300.0kHz
*RBW 3.0kHz
*VBW 10kHz
*SWP 100sec