

FCC RF Test Report

APPLICANT : ASUSTeK COMPUTER INC.
EQUIPMENT : ASUS Phone
BRAND NAME : ASUS
MODEL NAME : ASUS_Z00VD
MARKETING NAME : ZC500TG
FCC ID : MSQZ00VD
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Apr. 13, 2015 and testing was completed on Aug. 25, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification subjective to this standard	6
1.5 Component List.....	6
1.6 Modification of EUT	7
1.7 Testing Location	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency Channel	9
2.2 Pre-Scanned RF Power.....	10
2.3 Test Mode.....	11
2.4 Connection Diagram of Test System.....	12
2.5 Support Unit used in test configuration and system	13
2.6 EUT Operation Test Setup	13
2.7 Measurement Results Explanation Example.....	13
3 TEST RESULT.....	14
3.1 6dB and 99% Bandwidth Measurement	14
3.2 Output Power Measurement.....	16
3.3 Power Spectral Density Measurement	18
3.4 Conducted Band Edges and Spurious Emission Measurement	20
3.5 Radiated Band Edges and Spurious Emission Measurement	33
3.6 AC Conducted Emission Measurement.....	37
3.7 Antenna Requirements.....	41
4 LIST OF MEASURING EQUIPMENT	42
5 UNCERTAINTY OF EVALUATION	43
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR541309C	Rev. 01	Initial issue of report	Sep. 08, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-247 5.2(1)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-247 A5.4(4)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-247 5.2(2)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-247 5.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-247 5.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.06 dB at 30.970 MHz
3.6	15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 8.12 dB at 0.880 MHz
3.7	15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ASUSTeK COMPUTER INC.

4F, No.150, Li-Te Rd., Peitou, Taipei 112, Taiwan

1.2 Manufacturer

Dongguan Xinheng Electronic and Technology Co., Ltd

A-1 DISTRICT, 4/F, NO.9 INDUSTRIAL NORTHERN ROAD DONGGUAN SONGSHAN LAKE
NATIONAL HIGH-TECH INDUSTRIAL DEVELOPMENT ZONE DONGGUAN, GUANGDONG, CHINA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	ASUS Phone
Brand Name	ASUS
Model Name	ASUS_Z00VD
Marketing Name	ZC500TG
FCC ID	MSQZ00VD
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/ WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 359490060007283/359490060007291 for Sample 1 Conduction: 359490060054723/359490060054731 for Sample 1 359490060044443/359490060044450 for Sample 2 359490060053824/359490060053832 for Sample 3 359490060023413/359490060023439 for Sample 4 Radiation: 359490060054723/359490060054731 for Sample 1 359490060053824/359490060053832 for Sample 3
HW Version	AW806_MB_PCB_V2.0
SW Version	AW806_ZC500TG_20150407
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 17.39 dBm (0.0548 W) 802.11g : 19.34 dBm (0.0859 W) 802.11n HT20 : 19.61 dBm (0.0914 W) 802.11n HT40 : 21.02 dBm (0.1265 W)
99% Occupied Bandwidth	802.11b : 12.65MHz 802.11g : 17.45MHz 802.11n HT20 : 18.20MHz 802.11n HT40 : 36.30MHz
Antenna Type / Gain	802.11b/g/n : PIFA Antenna with gain -0.21 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Component List

Component	Sample 1	Sample 2
Memory	hynix H9TQ17ABJTMC URKUM 516A	hynix H9TQ64ABJTMC URKUM 514A
PCB	Evertex AW806_MB_PCB_V2.0	Evertex AW806_MB_PCB_V2.0
Front_camera	QUNHUI GV5770-00025	QUNHUI GV5770-00025
Back_camera	GUANGZHEN LA R140530R1448XAN	GUANGZHEN LA R140530R1448XAN
Motor	HONGZHIFA B1027-26-1	HONGZHIFA HZF1027A-P02L10-1
Speaker	HAOSHEN KFSC1115G3.5-08-0.7W-D	HAOSHEN XHS151118SW43P38-02
CTP	TOPTOUCH GT915L 1503-B26A 14BC0600 E5S263xxxx	TOPTOUCH GT915L 1503-B26A 14BC0600 E5S263xxxx
LCD	TXD TD-TNHD5031-3	TXD TXDT500SYPA-AW806

Component	Sample 3	Sample 4
Memory	hynix H9TQ17ABJTM U RKUM 516A	hynix H9TQ64ABJTM U RKUM 514A
PCB	wuzhu AW806_MB_PCB_V2.0	wuzhu AW806_MB_PCB_V2.0
Front_camera	HUAQUAN O6P2-QL1700HQ	HUAQUAN Q6P2-QL1700HQ
Back_camera	QIUTAI F4H5CAE-S	QIUTAI F4H5CAE-S
Motor	LEHUI B1027-26-1	LEHUI HZF1027A-P02L10-1
Speaker	XICHUN KFSC1115G3.5-08-0.7W-D	XICHUN XHS151118SW43P38-02
CTP	MUTTO FT5346DQQ ERH392E	MUTTO FT5346DQQ ERH392E
LCD	TCL TD-TNHD5031-3	TCL TXDT500SYPA-AW806

1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-KS	03CH02-KS	CO01-KS	418269/4086E

Note: The test site complies with ANSI C63.4 2009 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 1



- ♦ IC RSS-Gen Issue 4

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate 1Mbps	Channel	2Mbps	5.5Mbps	11Mbps
CH 01	2412 MHz	16.51	CH 11	17.28	17.33	17.37
CH 06	2437 MHz	16.28				
CH 11	2462 MHz	17.39				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412 MHz	18.84	CH 11	19.24	19.27	19.26	19.29	19.33	19.23	19.31
CH 06	2437 MHz	18.47								
CH 11	2462 MHz	19.34								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	18.58	CH 11	19.36	19.42	19.39	19.47	19.51	19.55	19.57
CH 06	2437 MHz	18.81								
CH 11	2462 MHz	19.61								

2.4GHz 802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422 MHz	20.34	CH 09	19.99	20.12	20.03	19.74	20.92	20.61	20.97
CH 06	2437 MHz	20.71								
CH 09	2452 MHz	21.02								

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable 1 (Charging from Adapter) + Battery 1 for Sample 1
	Mode 2: GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable 2 (Charging from Adapter) + Battery 2 for Sample 2
	Mode 3: GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable 3 (Charging from Adapter) + Battery 3 for Sample 3
	Mode 4: GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable 1 (Charging from Adapter) + Battery 4 for Sample 4
Remark: - The worst case of conducted emission is mode 1; only the test data of it was reported. - For Radiated Test Cases, the tests were performed with adapter, earphone, battery 1, USB cable 1 for Sample 1, and worse case test Sample 3.	

2.4 Connection Diagram of Test System

< WLAN Tx Mode >

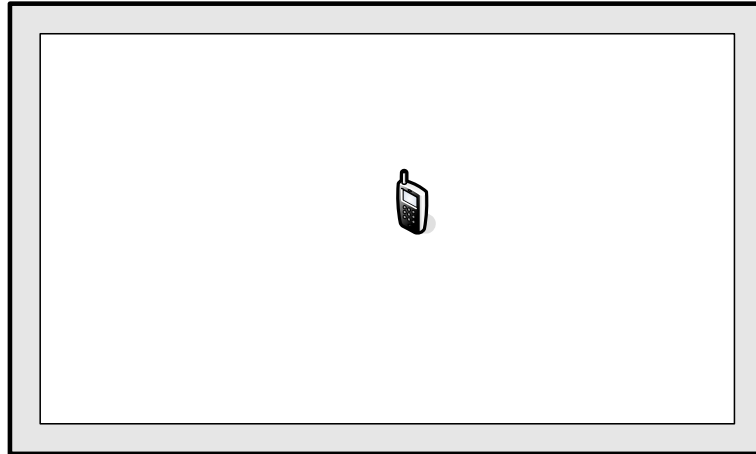

<AC Conducted Emission Mode>

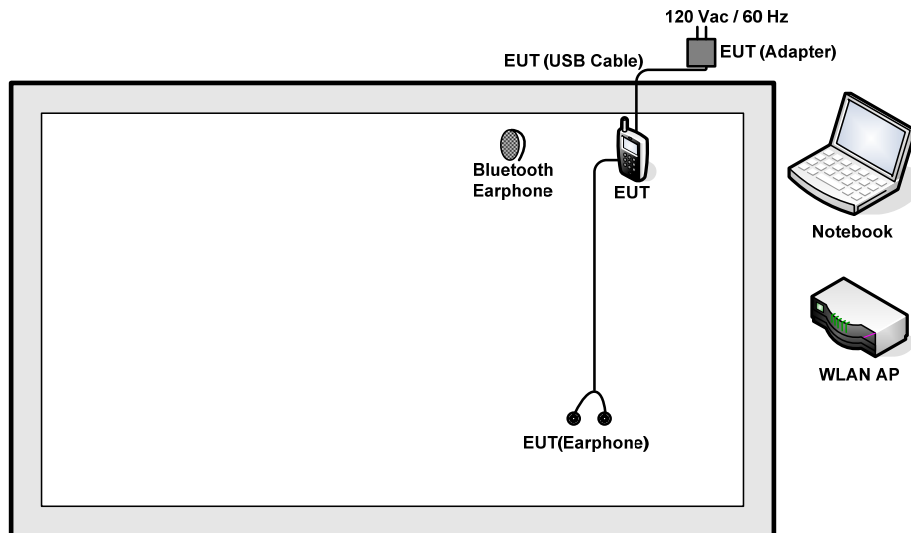

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

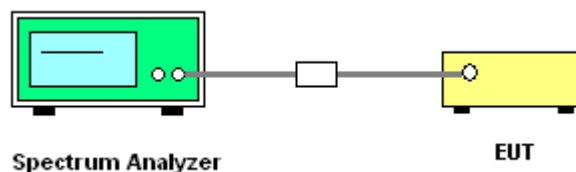

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A of this test report.

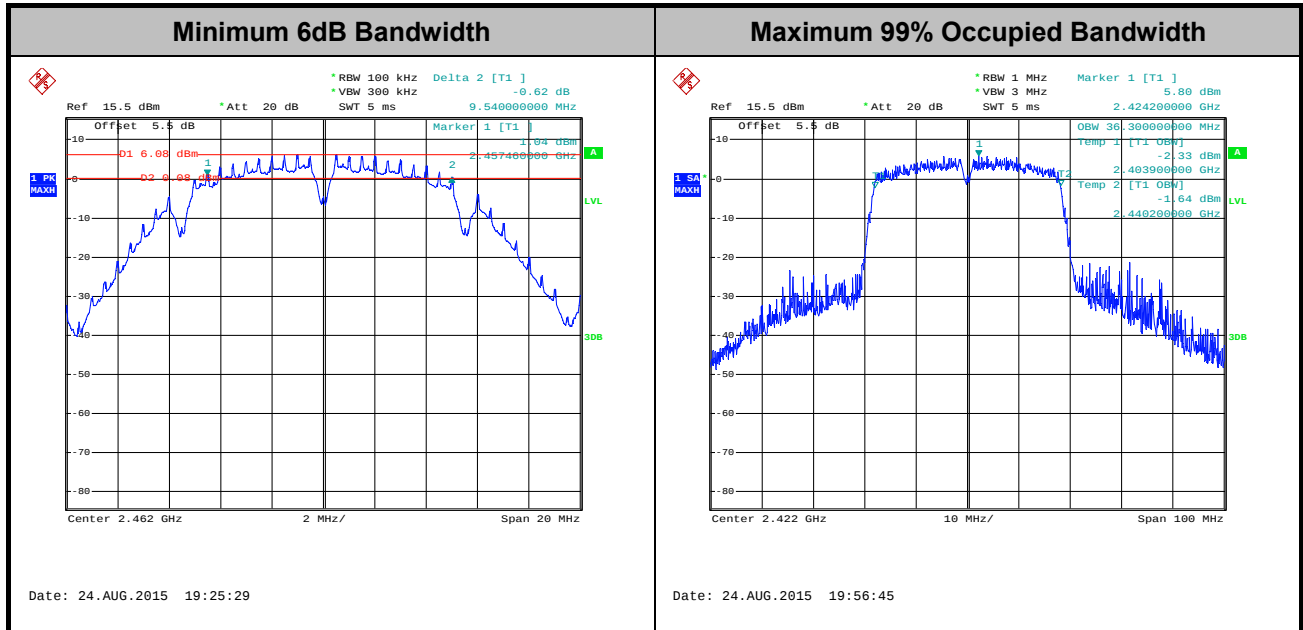

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup





3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

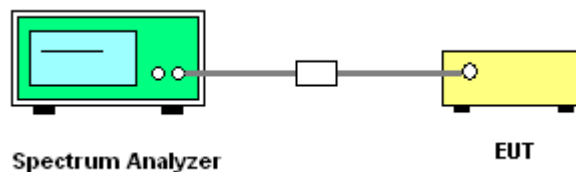

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

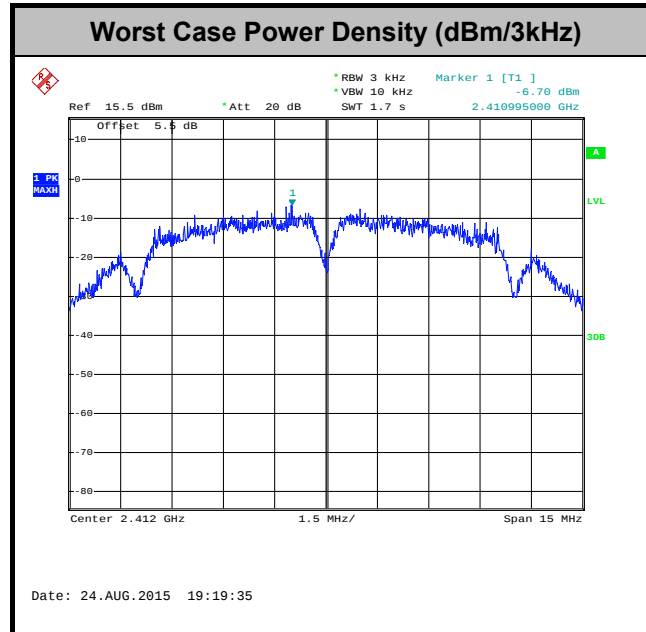

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

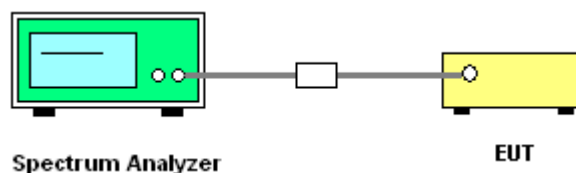




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song


WLAN 802.11b Channel 01

100kHz PSD reference Level

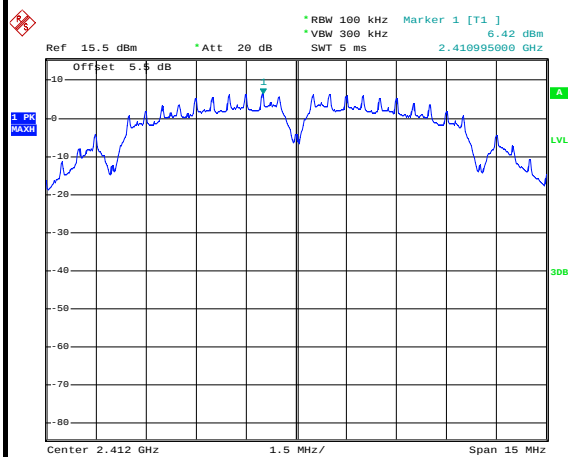


Date: 24.AUG.2015 19:19:58

Low Channel Plot

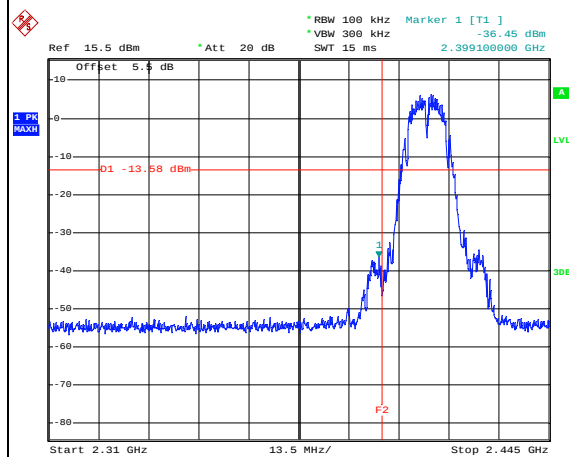


Date: 24.AUG.2015 19:20:16

Spurious Emission 30MHz~3GHz

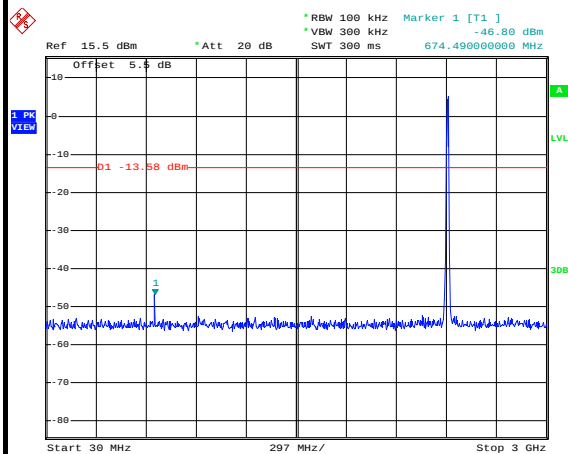

Date: 24.AUG.2015 19:20:44

Spurious Emission 2GHz~25GHz

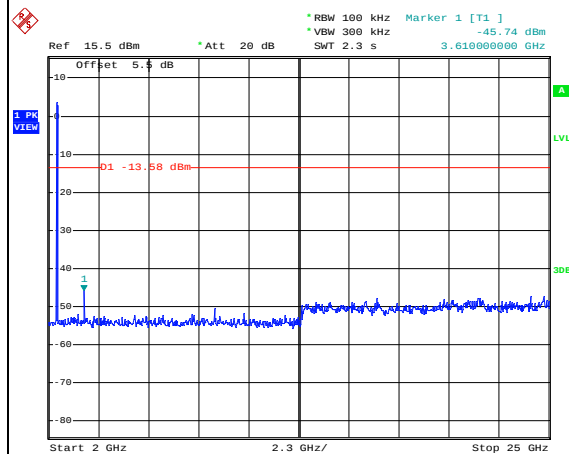


Date: 24.AUG.2015 19:21:02



Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11b Channel 06

100kHz PSD reference Level

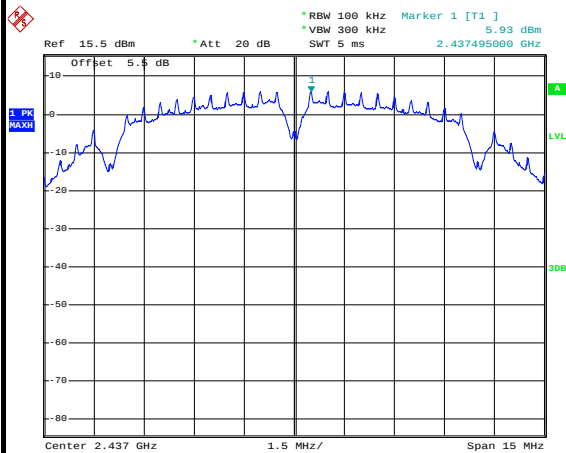


Date: 24.AUG.2015 19:23:39

Spurious Emission 30MHz~3GHz

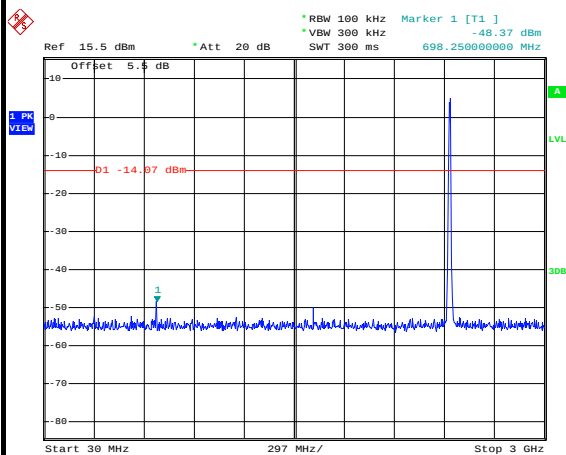

Date: 24.AUG.2015 19:24:02

Spurious Emission 2GHz~25GHz

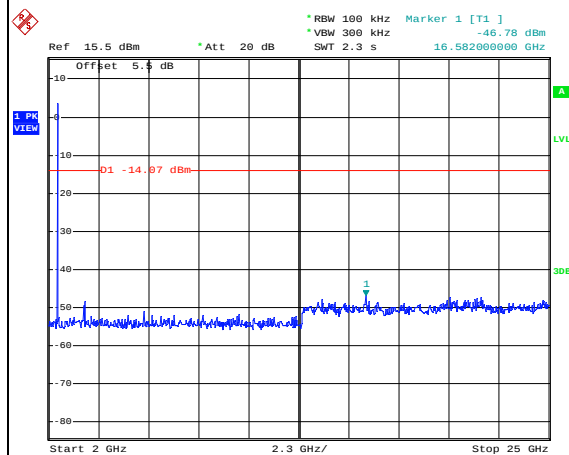


Date: 24.AUG.2015 19:24:20



Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11b Channel 11

100kHz PSD reference Level

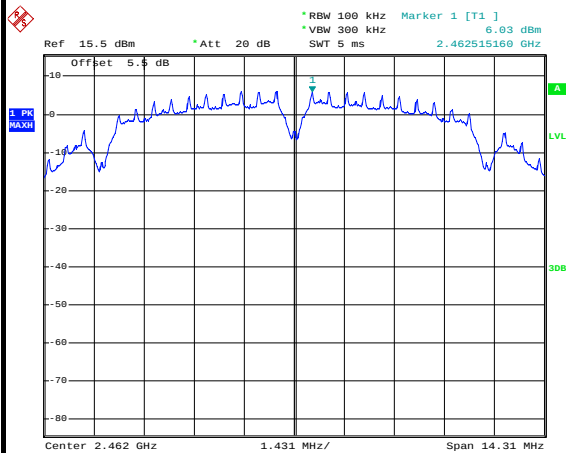


Date: 24.AUG.2015 19:26:14

High Channel Plot

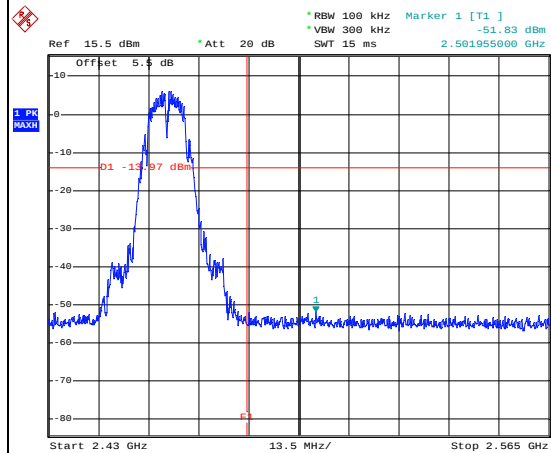


Date: 24.AUG.2015 19:26:32

Spurious Emission 30MHz~3GHz

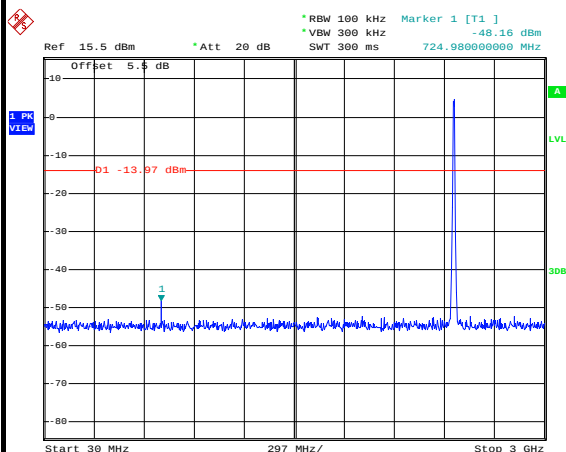

Date: 24.AUG.2015 19:26:55

Spurious Emission 2GHz~25GHz

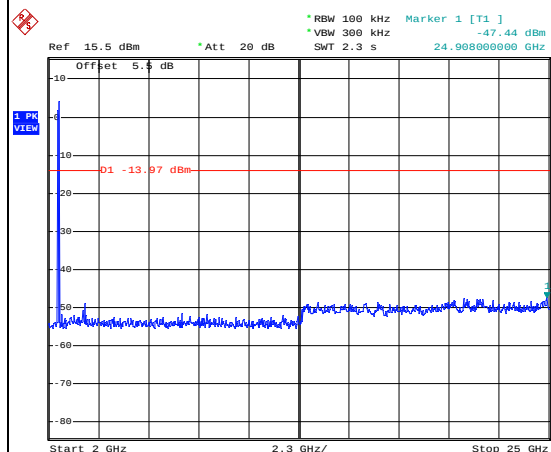


Date: 24.AUG.2015 19:27:13



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song


WLAN 802.11g Channel 01

100kHz PSD reference Level

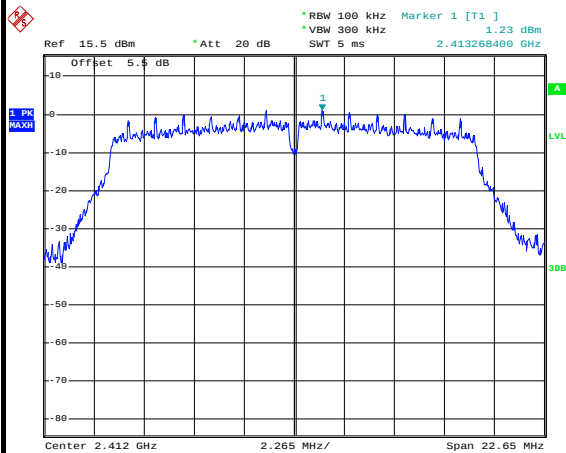


Date: 24.AUG.2015 19:30:41

Low Channel Plot

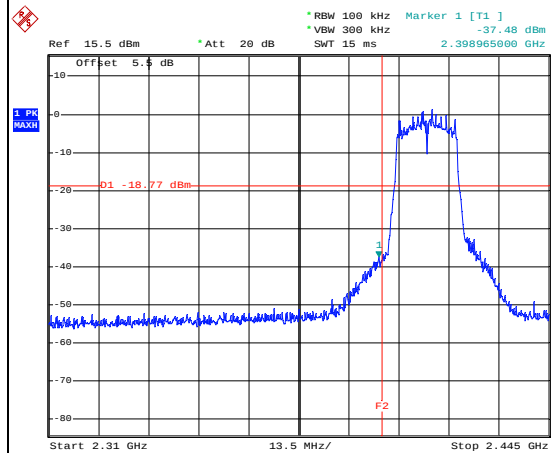


Date: 24.AUG.2015 19:30:59

Spurious Emission 30MHz~3GHz

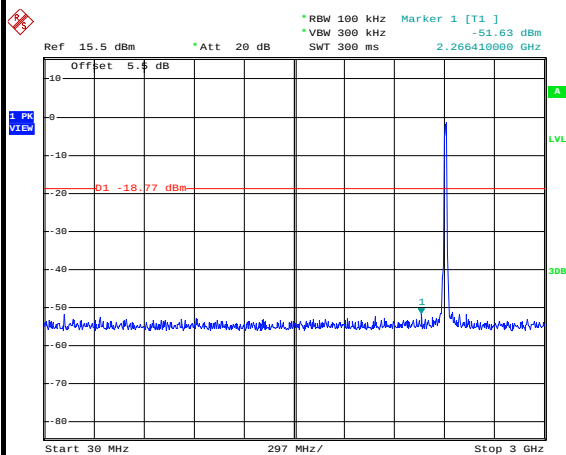

Date: 24.AUG.2015 19:31:21

Spurious Emission 2GHz~25GHz

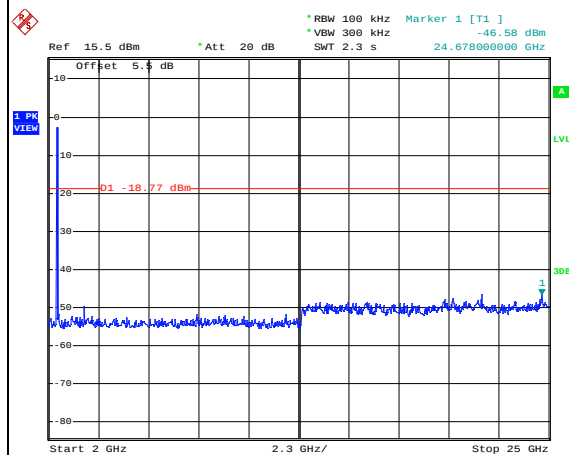


Date: 24.AUG.2015 19:31:39



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11g Channel 06

100kHz PSD reference Level

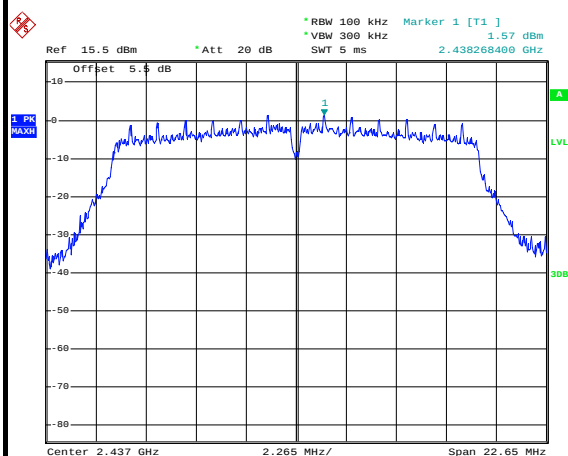


Date: 24.AUG.2015 19:33:52

Spurious Emission 30MHz~3GHz

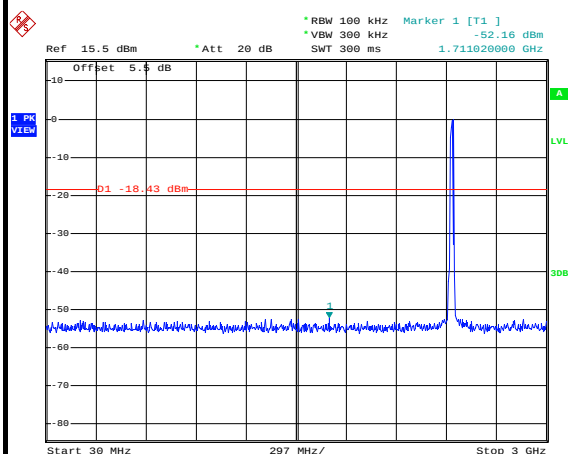

Date: 24.AUG.2015 19:34:16

Spurious Emission 2GHz~25GHz

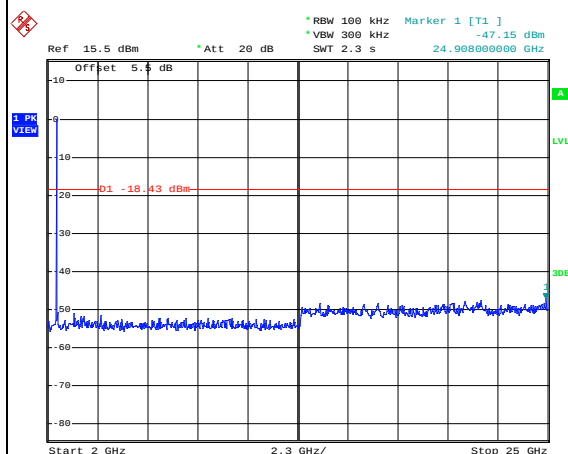


Date: 24.AUG.2015 19:34:34



Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11g Channel 11

100kHz PSD reference Level

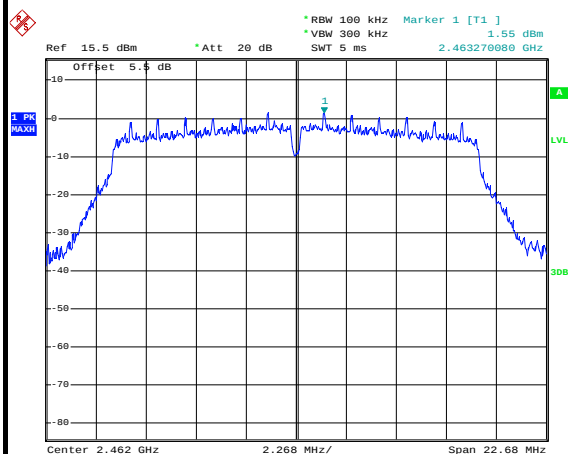


Date: 24.AUG.2015 19:36:41

High Channel Plot

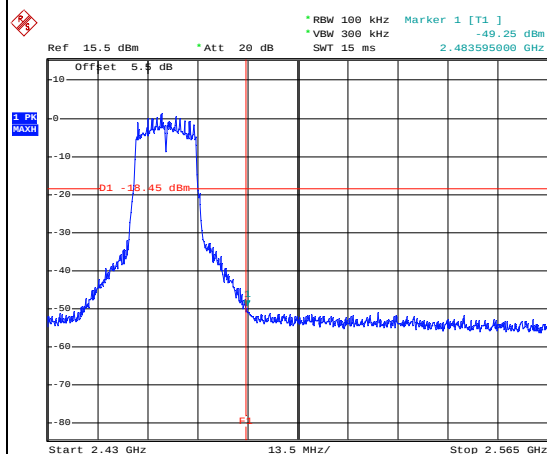


Date: 24.AUG.2015 19:37:00

Spurious Emission 30MHz~3GHz

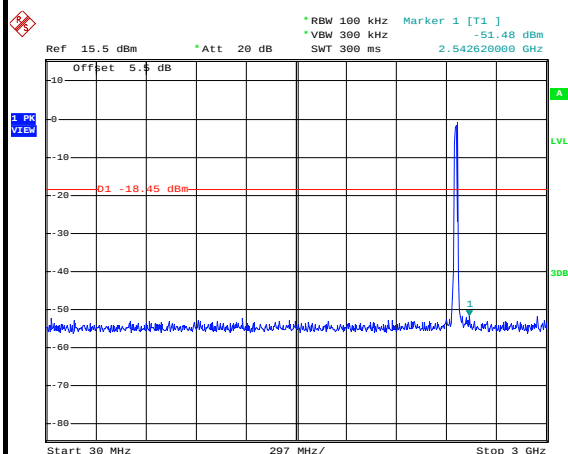

Date: 24.AUG.2015 19:37:27

Spurious Emission 2GHz~25GHz

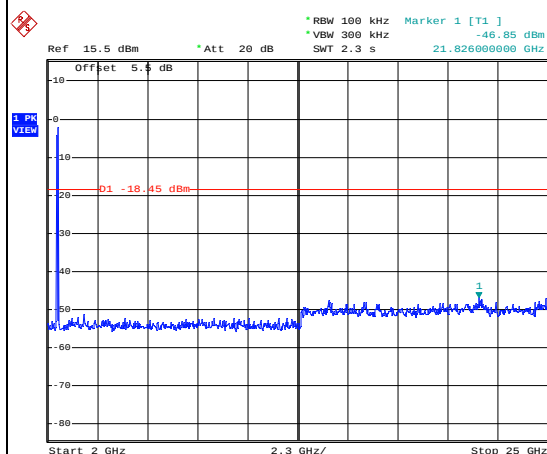


Date: 24.AUG.2015 19:37:45



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

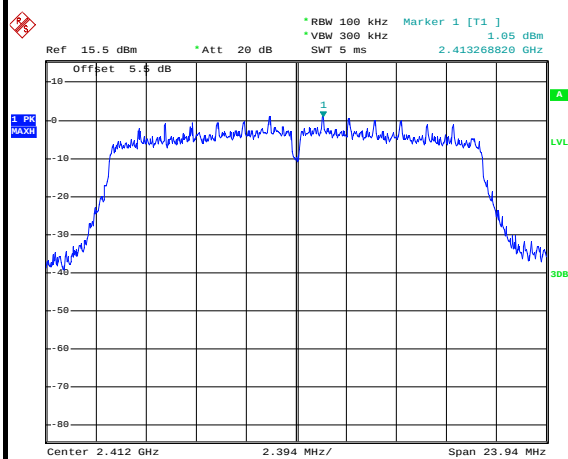


Date: 24.AUG.2015 19:41:18

Low Channel Plot

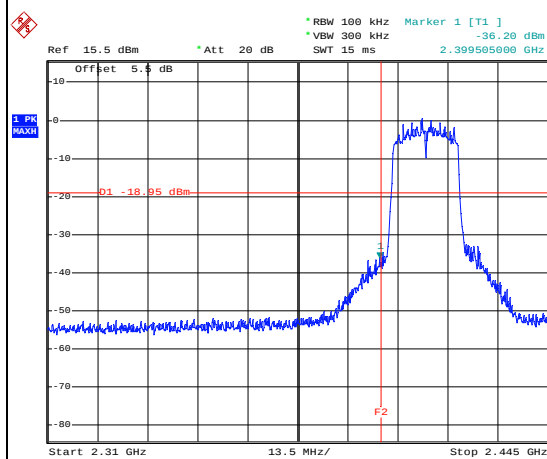


Date: 24.AUG.2015 19:41:56

Spurious Emission 30MHz~3GHz

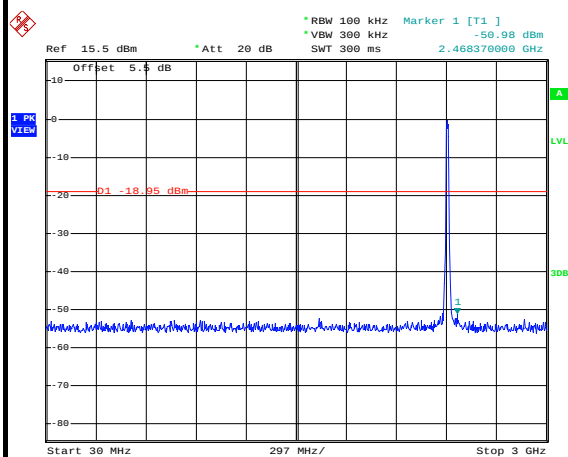

Date: 24.AUG.2015 19:42:19

Spurious Emission 2GHz~25GHz

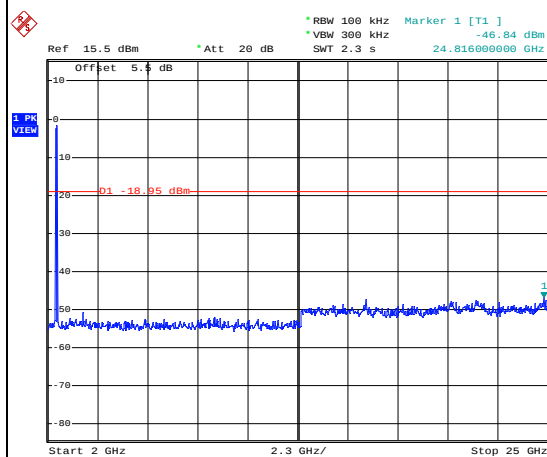


Date: 24.AUG.2015 19:42:37



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

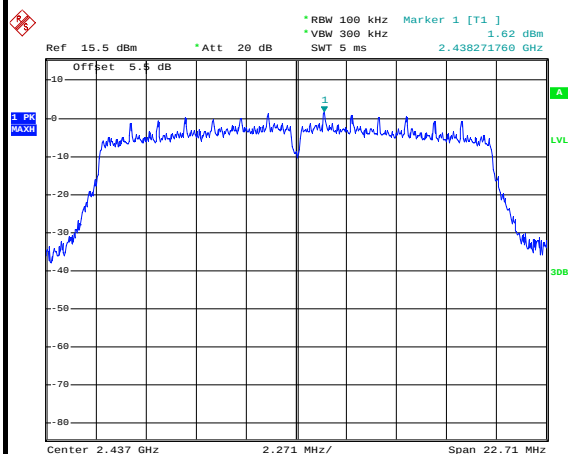


Date: 24.AUG.2015 19:47:00

Spurious Emission 30MHz~3GHz

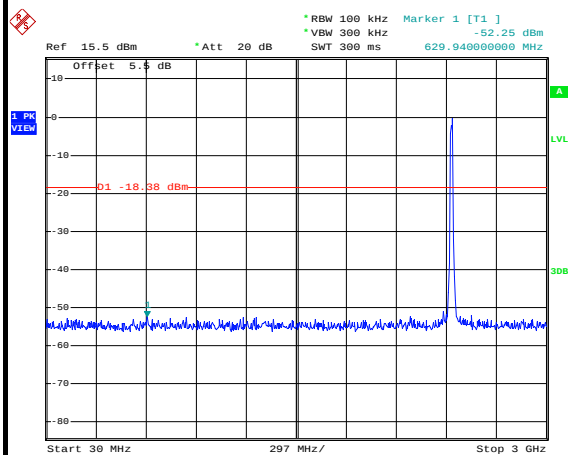

Date: 24.AUG.2015 19:47:23

Spurious Emission 2GHz~25GHz

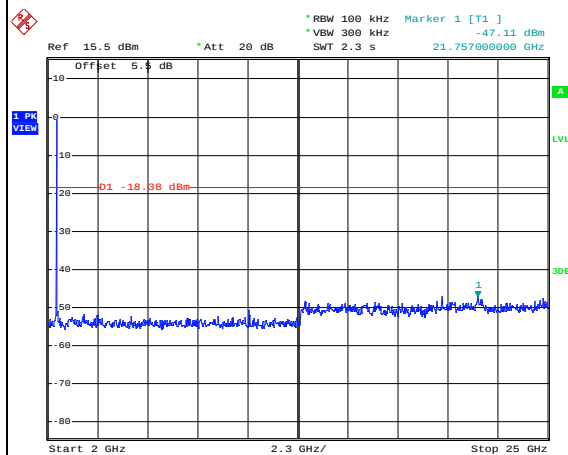


Date: 24.AUG.2015 19:47:41



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

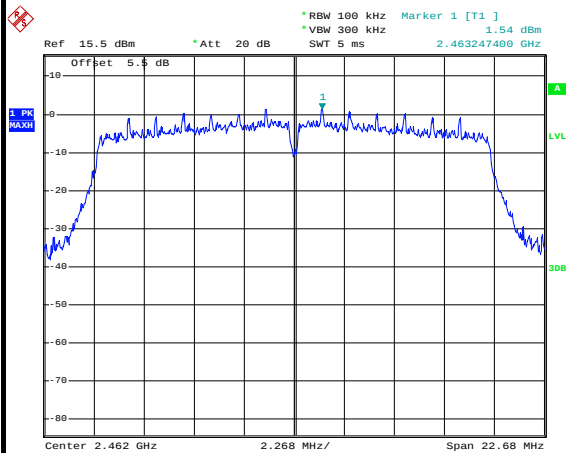


Date: 24.AUG.2015 19:50:04

High Channel Plot

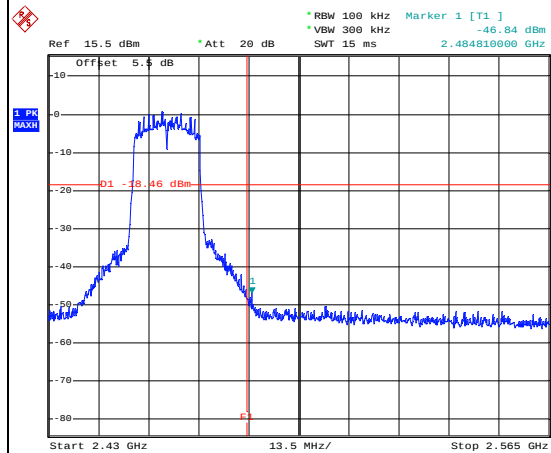


Date: 24.AUG.2015 19:50:22

Spurious Emission 30MHz~3GHz

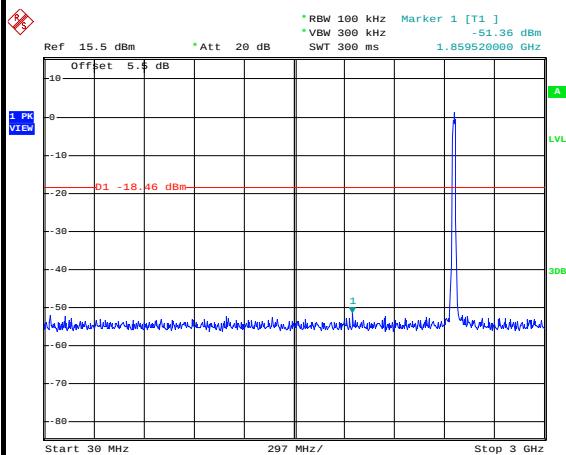

Date: 24.AUG.2015 19:50:46

Spurious Emission 2GHz~25GHz

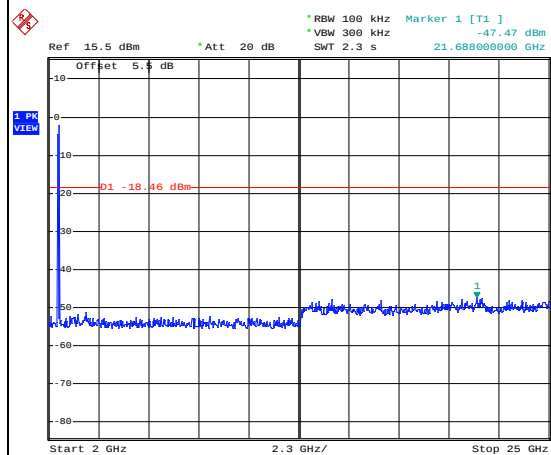


Date: 24.AUG.2015 19:51:04



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	03	Test Engineer :	Issac Song


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

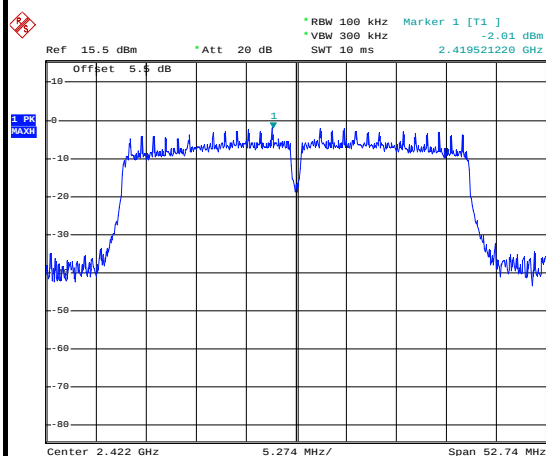


Date: 24.AUG.2015 19:54:07

Low Channel Plot

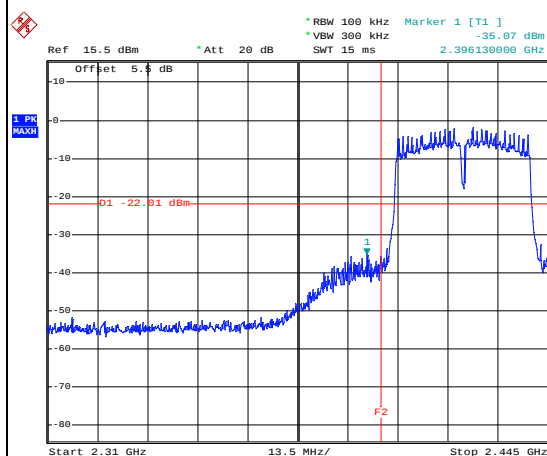


Date: 24.AUG.2015 19:54:31

Spurious Emission 30MHz~3GHz

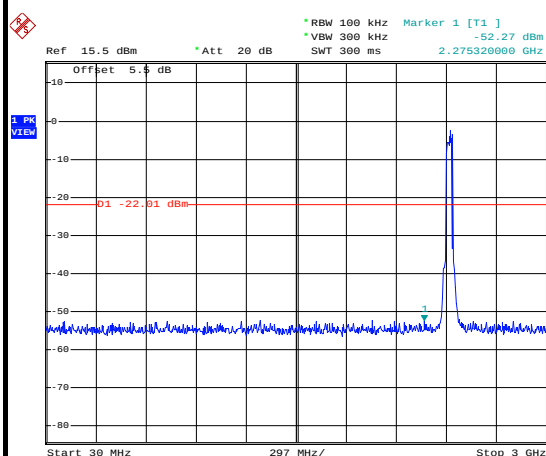

Date: 24.AUG.2015 19:56:13

Spurious Emission 2GHz~25GHz

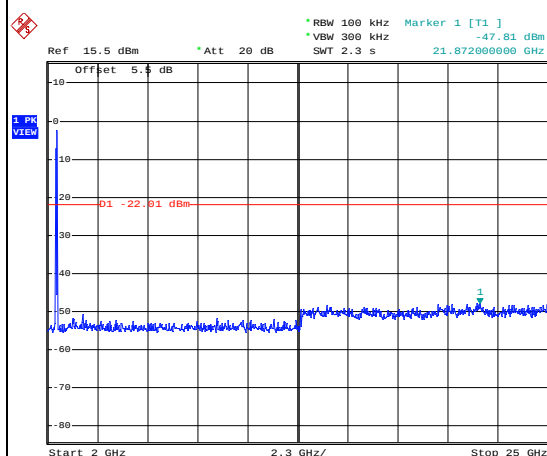


Date: 24.AUG.2015 19:56:31



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11n HT40 Channel 06

100kHz PSD reference Level

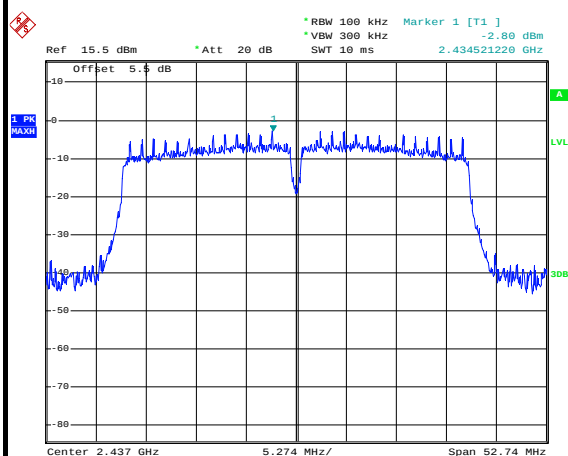


Date: 24.AUG.2015 19:58:50

Spurious Emission 30MHz~3GHz

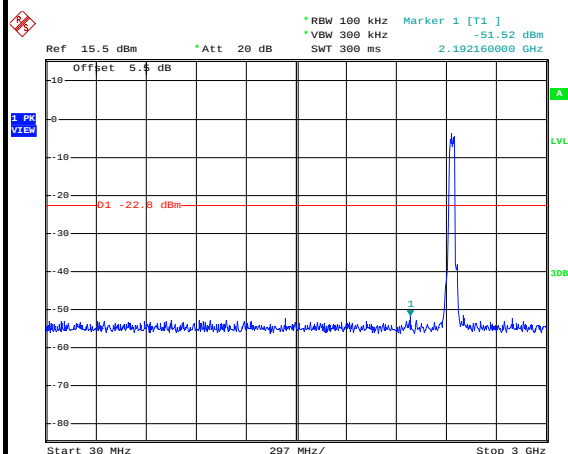

Date: 24.AUG.2015 19:59:14

Spurious Emission 2GHz~25GHz

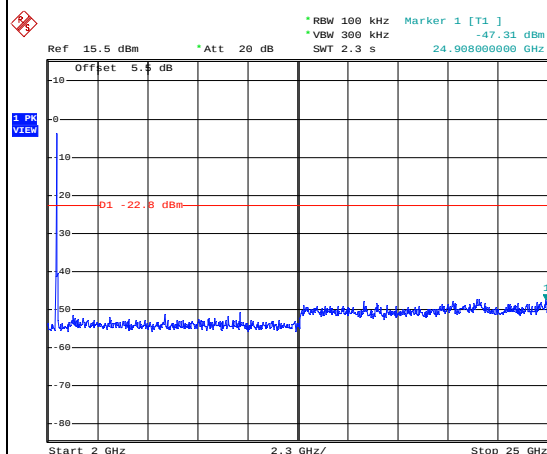


Date: 24.AUG.2015 19:59:32



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	09	Test Engineer :	Issac Song


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

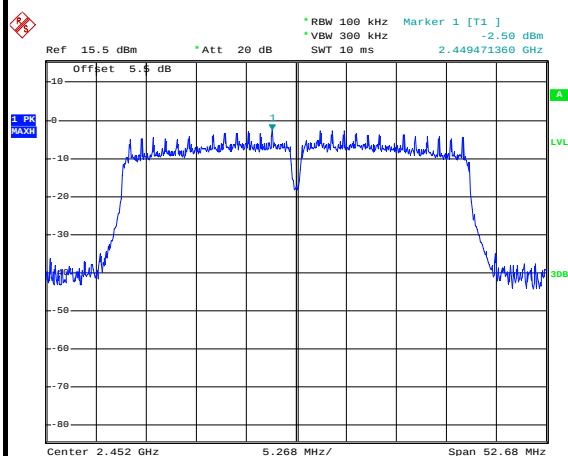


Date: 24.AUG.2015 20:01:47

High Channel Plot

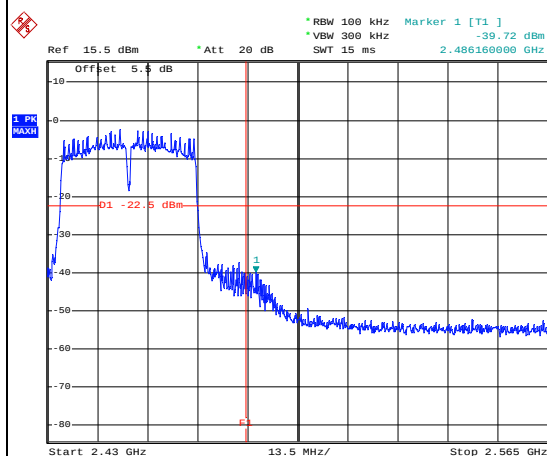


Date: 24.AUG.2015 20:02:42

Spurious Emission 30MHz~3GHz

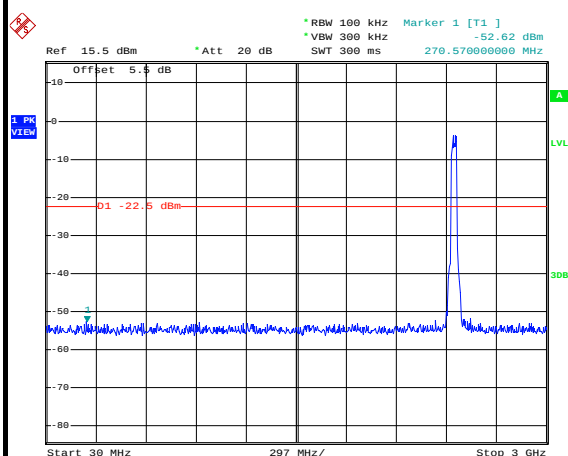

Date: 24.AUG.2015 20:03:10

Spurious Emission 2GHz~25GHz

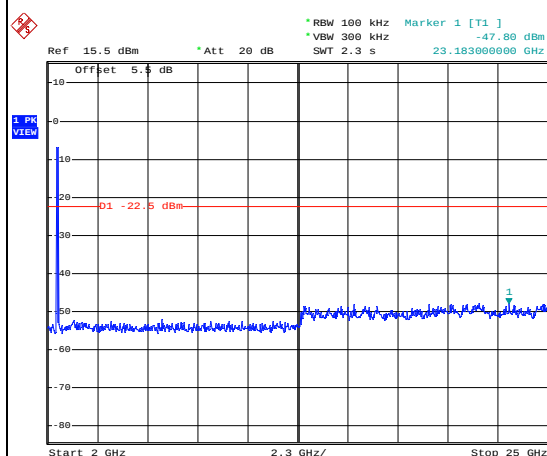

Date: 24.AUG.2015 20:03:28

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.13	-	-	10Hz
802.11g	89.17	1.40	0.71	1kHz
2.4GHz 802.11n HT20	88.96	1.31	0.77	1kHz
2.4GHz 802.11n HT40	79.13	0.65	1.53	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

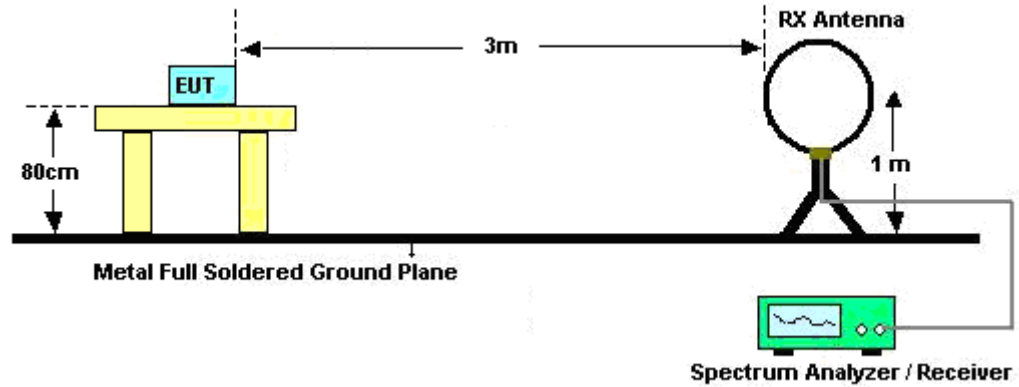

For radiated emissions from 30MHz to 1GHz

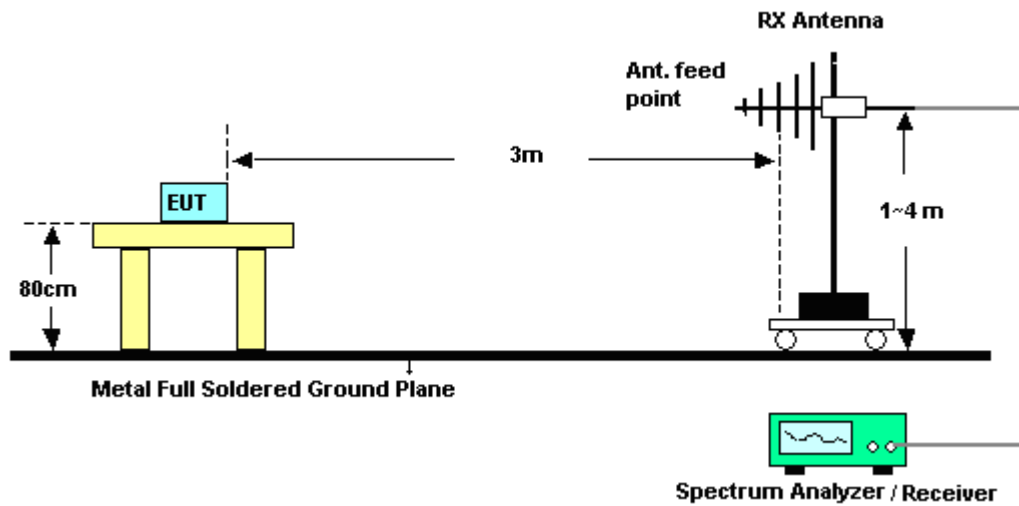

For radiated emissions above 1GHz

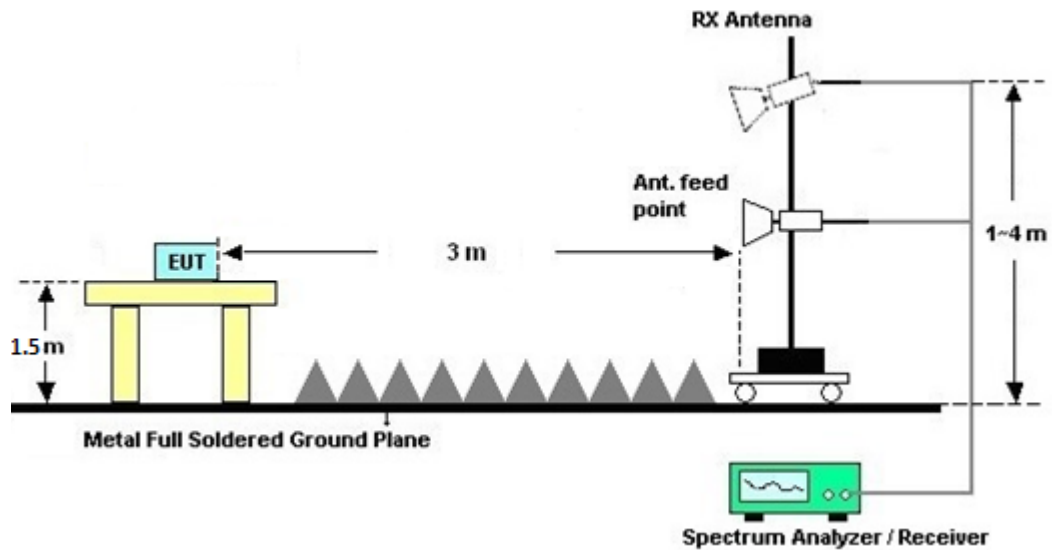

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

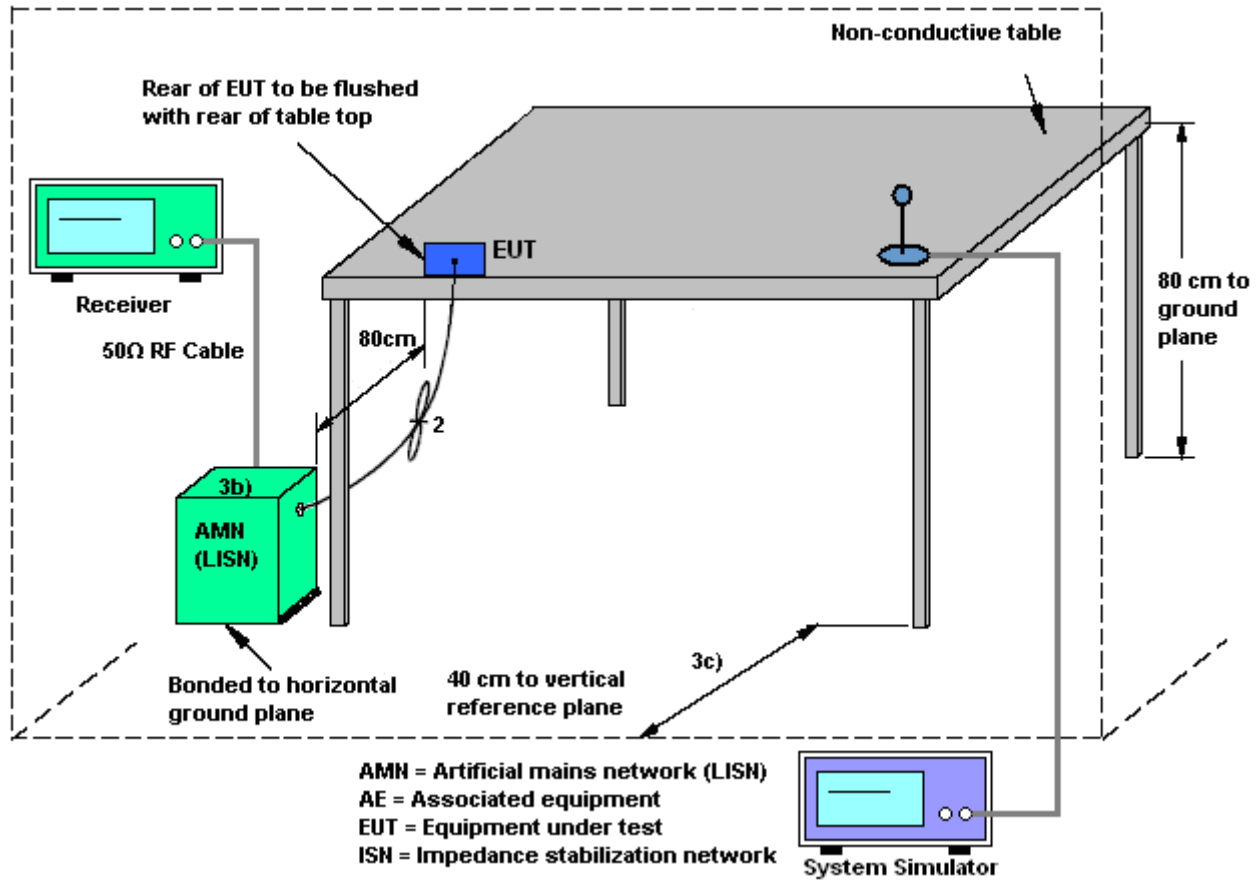



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable 1 (Charging from Adapter) + Battery 1 for Sample 1		

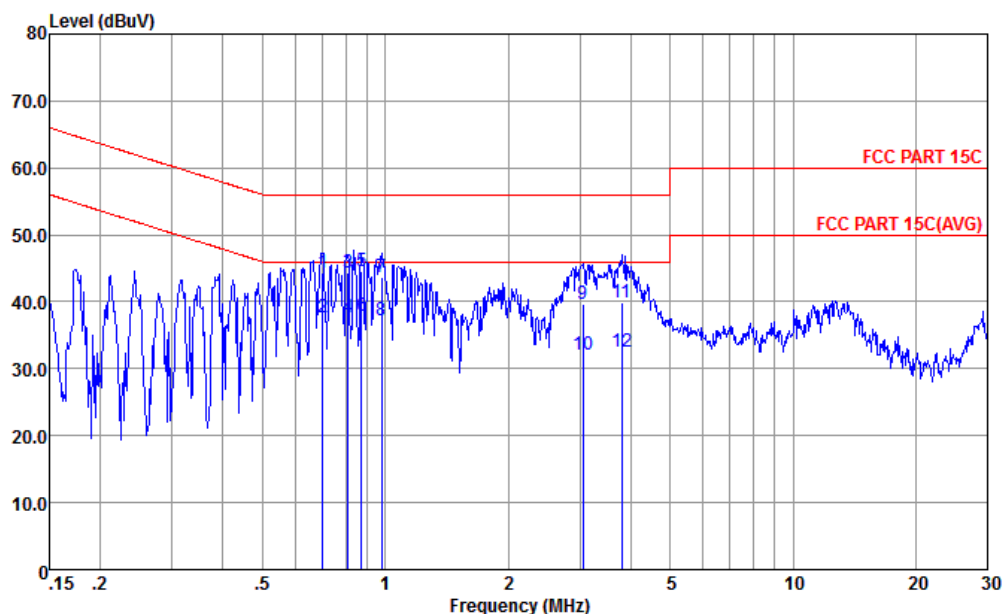


Site : CO01-KS
Condition : FCC PART 15C LISN-L20140306 LINE

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.70	44.44	-11.56	56.00	33.60	0.20	10.64	QP
2	0.70	37.74	-8.26	46.00	26.90	0.20	10.64	Average
3	0.81	44.41	-11.59	56.00	33.60	0.16	10.65	QP
4	0.81	37.61	-8.39	46.00	26.80	0.16	10.65	Average
5	0.88	44.58	-11.42	56.00	33.80	0.13	10.65	QP
6 *	0.88	37.88	-8.12	46.00	27.10	0.13	10.65	Average
7	0.98	43.65	-12.35	56.00	32.90	0.10	10.65	QP
8	0.98	37.15	-8.85	46.00	26.40	0.10	10.65	Average
9	3.06	39.73	-16.27	56.00	28.80	0.14	10.79	QP
10	3.06	32.03	-13.97	46.00	21.10	0.14	10.79	Average
11	3.80	39.80	-16.20	56.00	28.80	0.18	10.82	QP
12	3.80	32.50	-13.50	46.00	21.50	0.18	10.82	Average



Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable 1 (Charging from Adapter) + Battery 1 for Sample 1		

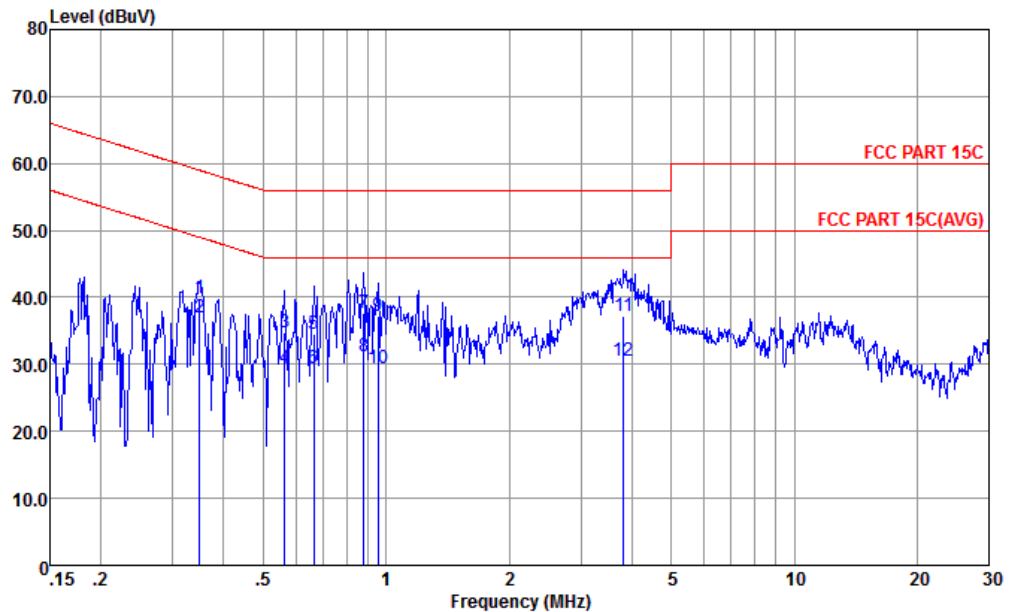

Site : CO01-KS
Condition : FCC PART 15C LISN-N20140306 NEUTRAL

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.35	39.92	-19.08	59.00	28.81	0.51	10.60	QP
2 *	0.35	37.02	-11.98	49.00	25.91	0.51	10.60	Average
3	0.56	34.70	-21.30	56.00	23.80	0.27	10.63	QP
4	0.56	29.50	-16.50	46.00	18.60	0.27	10.63	Average
5	0.66	34.65	-21.35	56.00	23.80	0.21	10.64	QP
6	0.66	29.45	-16.55	46.00	18.60	0.21	10.64	Average
7	0.88	37.68	-18.32	56.00	26.90	0.13	10.65	QP
8	0.88	31.28	-14.72	46.00	20.50	0.13	10.65	Average
9	0.95	37.26	-18.74	56.00	26.50	0.11	10.65	QP
10	0.95	29.36	-16.64	46.00	18.60	0.11	10.65	Average
11	3.82	37.11	-18.89	56.00	26.10	0.18	10.83	QP
12	3.82	30.61	-15.39	46.00	19.60	0.18	10.83	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 28, 2014	Aug. 24, 2015	Oct. 27, 2015	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Jan. 23, 2015	Aug. 24, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 23, 2015	Aug. 24, 2015	Jan. 22, 2016	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max x 30dBm	Sep. 29, 2014	Aug. 25, 2015	Sep. 28, 2015	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz; Max 30dBm	Sep. 25, 2014	Aug. 25, 2015	Sep. 24, 2015	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 13, 2014	Aug. 25, 2015	Nov. 12, 2015	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 13, 2014	Aug. 25, 2015	Sep. 12, 2015	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	Aug. 25, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 08, 2014	Aug. 25, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Sep. 04, 2014	Aug. 25, 2015	Sep. 03, 2015	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz ~1000MHz / 32 dB	May 04, 2015	Aug. 25, 2015	May 03, 2016	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1GHz~26.5GHz	Oct. 28, 2014	Aug. 25, 2015	Oct. 27, 2015	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Aug. 25, 2015	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 25, 2015	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 25, 2015	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2015	Aug. 15, 2015	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	Aug. 15, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	Aug. 15, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	Aug. 15, 2015	Oct. 24, 2015	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Ocean Wang	Temperature:	21~25	°C
Test Date:	2015/8/24	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.65	10.00	0.50	Pass
11b	1Mbps	1	6	2437	12.55	10.00	0.50	Pass
11b	1Mbps	1	11	2462	12.55	9.54	0.50	Pass
11g	6Mbps	1	1	2412	17.45	15.10	0.50	Pass
11g	6Mbps	1	6	2437	17.35	15.10	0.50	Pass
11g	6Mbps	1	11	2462	17.40	15.12	0.50	Pass
HT20	MCS0	1	1	2412	18.20	15.96	0.50	Pass
HT20	MCS0	1	6	2437	18.20	15.14	0.50	Pass
HT20	MCS0	1	11	2462	18.20	15.12	0.50	Pass
HT40	MCS0	1	3	2422	36.30	35.16	0.50	Pass
HT40	MCS0	1	6	2437	36.10	35.16	0.50	Pass
HT40	MCS0	1	9	2452	36.20	35.12	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	16.51	30.00	-0.21	16.30	36.00	Pass
11b	1Mbps	1	6	2437	16.28	30.00	-0.21	16.07	36.00	Pass
11b	1Mbps	1	11	2462	17.39	30.00	-0.21	17.18	36.00	Pass
11g	6Mbps	1	1	2412	18.84	30.00	-0.21	18.63	36.00	Pass
11g	6Mbps	1	6	2437	18.47	30.00	-0.21	18.26	36.00	Pass
11g	6Mbps	1	11	2462	19.34	30.00	-0.21	19.13	36.00	Pass
HT20	MCS0	1	1	2412	18.58	30.00	-0.21	18.37	36.00	Pass
HT20	MCS0	1	6	2437	18.81	30.00	-0.21	18.60	36.00	Pass
HT20	MCS0	1	11	2462	19.61	30.00	-0.21	19.40	36.00	Pass
HT40	MCS0	1	3	2422	20.34	30.00	-0.21	20.13	36.00	Pass
HT40	MCS0	1	6	2437	20.71	30.00	-0.21	20.50	36.00	Pass
HT40	MCS0	1	9	2452	21.02	30.00	-0.21	20.81	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.08	13.71
11b	1Mbps	1	6	2437	0.08	13.66
11b	1Mbps	1	11	2462	0.08	15.04
11g	6Mbps	1	1	2412	0.50	11.01
11g	6Mbps	1	6	2437	0.50	10.86
11g	6Mbps	1	11	2462	0.50	11.97
HT20	MCS0	1	1	2412	0.51	11.00
HT20	MCS0	1	6	2437	0.51	11.06
HT20	MCS0	1	11	2462	0.51	12.17
HT40	MCS0	1	3	2422	1.11	10.84
HT40	MCS0	1	6	2437	1.11	10.88
HT40	MCS0	1	9	2452	1.11	11.19

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-6.70	-0.21	8.00	Pass
11b	1Mbps	1	6	2437	-7.48	-0.21	8.00	Pass
11b	1Mbps	1	11	2462	-7.87	-0.21	8.00	Pass
11g	6Mbps	1	1	2412	-13.53	-0.21	8.00	Pass
11g	6Mbps	1	6	2437	-12.76	-0.21	8.00	Pass
11g	6Mbps	1	11	2462	-13.09	-0.21	8.00	Pass
HT20	MCS0	1	1	2412	-13.33	-0.21	8.00	Pass
HT20	MCS0	1	6	2437	-12.78	-0.21	8.00	Pass
HT20	MCS0	1	11	2462	-12.44	-0.21	8.00	Pass
HT40	MCS0	1	3	2422	-15.07	-0.21	8.00	Pass
HT40	MCS0	1	6	2437	-16.55	-0.21	8.00	Pass
HT40	MCS0	1	9	2452	-17.61	-0.21	8.00	Pass



Appendix B. Radiated Spurious Emission

Sample 1

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz	*	2413.36	100.26	-	-	105.39	27.13	4.74	37	150	299	P	H
	*	2411.189	96.22	-	-	101.35	27.13	4.74	37	150	299	A	H
		2389.92	45.58	-28.42	74	50.88	27	4.72	37.02	150	299	P	H
		2389.38	33.96	-20.04	54	39.26	27	4.72	37.02	150	299	A	H
	*	2413.444	88.22	-	-	93.35	27.13	4.74	37	237	118	P	V
	*	2412.692	84.21	-	-	89.34	27.13	4.74	37	237	118	A	V
		2375.25	39.52	-34.48	74	44.89	26.95	4.7	37.02	237	118	P	V
		2377.5	25.51	-28.49	54	30.88	26.95	4.7	37.02	237	118	A	V
802.11b CH 06 2437MHz	*	2435.738	100.25	-	-	105.22	27.26	4.76	36.99	167	300	P	H
	*	2436.239	96.17	-	-	101.14	27.26	4.76	36.99	167	300	A	H
	*	2438.493	91.44	-	-	96.25	27.39	4.77	36.97	264	71	P	V
	*	2436.156	87.4	-	-	92.37	27.26	4.76	36.99	264	71	A	V
802.11b CH 11 2462MHz	*	2463.46	101.84	-	-	106.5	27.51	4.79	36.96	189	298	P	H
	*	2463.71	96.68	-	-	101.34	27.51	4.79	36.96	189	298	A	H
		2495.76	47.5	-26.5	74	51.84	27.77	4.82	36.93	189	298	P	H
		2496	35.75	-18.25	54	40.09	27.77	4.82	36.93	189	298	A	H
	*	2463.46	92.77	-	-	97.43	27.51	4.79	36.96	231	70	P	V
	*	2463.543	87.64	-	-	92.3	27.51	4.79	36.96	231	70	A	V
		2495.72	42.16	-31.84	74	46.5	27.77	4.82	36.93	231	70	P	V
		2495.92	28.48	-25.52	54	32.82	27.77	4.82	36.93	231	70	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	41.62	-32.38	74	39.96	31.51	6.83	36.68	150	155	P	H
		4824	42.08	-31.92	74	40.42	31.51	6.83	36.68	186	215	P	V
802.11b CH 06 2437MHz		4875	42.41	-31.59	74	40.61	31.59	6.87	36.66	150	218	P	H
		7311	45.02	-28.98	74	39.11	34.03	8.57	36.69	150	233	A	H
		4875	42.55	-31.45	74	40.75	31.59	6.87	36.66	150	182	P	V
		7311	45.66	-28.34	74	39.75	34.03	8.57	36.69	150	195	P	V
802.11b CH 11 2462MHz		4923	43.51	-30.49	74	41.57	31.67	6.92	36.65	150	342	P	H
		7386	45.76	-28.24	74	39.57	34.29	8.68	36.78	150	289	P	H
		4923	43.08	-30.92	74	41.14	31.67	6.92	36.65	150	223	P	V
		7386	46.18	-27.82	74	39.99	34.29	8.68	36.78	150	218	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz	*	2414.863	99.89	-	-	105.02	27.13	4.74	37	150	300	P	H
	*	2413.193	89.63	-	-	94.76	27.13	4.74	37	150	300	A	H
		2386.5	56.43	-17.57	74	61.73	27	4.72	37.02	150	300	P	H
		2389.83	38.7	-15.3	54	44	27	4.72	37.02	150	300	A	H
	*	2410.855	88.88	-	-	94.01	27.13	4.74	37	300	104	P	V
	*	2410.771	79.06	-	-	84.19	27.13	4.74	37	300	104	A	V
		2389.38	44.94	-29.06	74	50.24	27	4.72	37.02	300	104	P	V
		2389.92	28.85	-25.15	54	34.15	27	4.72	37.02	300	104	A	V
802.11g CH 06 2437MHz	*	2435.488	100.86	-	-	105.83	27.26	4.76	36.99	170	297	P	H
	*	2435.738	90.45	-	-	95.42	27.26	4.76	36.99	170	297	A	H
	*	2438.911	91.95	-	-	96.76	27.39	4.77	36.97	265	71	P	V
	*	2438.076	81.79	-	-	86.6	27.39	4.77	36.97	265	71	A	V
802.11g CH 11 2462MHz	*	2461.039	102.16	-	-	106.82	27.51	4.79	36.96	190	302	P	H
	*	2463.042	91.5	-	-	96.16	27.51	4.79	36.96	190	302	A	H
		2483.76	59.89	-14.11	74	64.39	27.64	4.8	36.94	190	302	P	H
		2483.56	39.39	-14.61	54	43.89	27.64	4.8	36.94	190	302	A	H
	*	2460.621	93.3	-	-	97.96	27.51	4.79	36.96	230	70	P	V
	*	2463.042	82.89	-	-	87.55	27.51	4.79	36.96	230	70	A	V
		2483.52	48.25	-25.75	74	52.75	27.64	4.8	36.94	230	70	P	V
		2483.52	30.07	-23.93	54	34.57	27.64	4.8	36.94	230	70	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	42.62	-31.38	74	40.96	31.51	6.83	36.68	165	273	P	H
		4824	42.65	-31.35	74	40.99	31.51	6.83	36.68	150	228	P	V
802.11g CH 06 2437MHz		4875	42.06	-31.94	74	40.26	31.59	6.87	36.66	150	212	P	H
		7311	44.78	-29.22	74	38.87	34.03	8.57	36.69	150	194	P	H
		4875	42.82	-31.18	74	41.02	31.59	6.87	36.66	157	225	P	V
		7311	45.3	-28.7	74	39.39	34.03	8.57	36.69	157	257	P	V
802.11g CH 11 2462MHz		4923	41.99	-32.01	74	40.05	31.67	6.92	36.65	175	275	P	H
		7386	46.2	-27.8	74	40.01	34.29	8.68	36.78	165	281	P	H
		4923	43.15	-30.85	74	41.21	31.67	6.92	36.65	150	34	P	V
		7386	46.93	-27.07	74	40.74	34.29	8.68	36.78	150	341	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz	*	2410.771	99.86	-	-	104.99	27.13	4.74	37	150	300	P	H
	*	2413.277	89.31	-	-	94.44	27.13	4.74	37	150	300	A	H
		2385.87	57.77	-16.23	74	63.07	27	4.72	37.02	150	300	P	H
		2389.83	39.96	-14.04	54	45.26	27	4.72	37.02	150	300	A	H
	*	2413.36	87.1	-	-	92.23	27.13	4.74	37	237	119	P	V
	*	2411.022	77.26	-	-	82.39	27.13	4.74	37	237	119	A	V
		2389.92	41.53	-32.47	74	46.83	27	4.72	37.02	237	119	P	V
		2389.92	27.4	-26.6	54	32.7	27	4.72	37.02	237	119	A	V
802.11n HT20 CH 06 2437MHz	*	2435.237	101.34	-	-	106.31	27.26	4.76	36.99	170	299	P	H
	*	2436.072	91.61	-	-	96.58	27.26	4.76	36.99	170	299	A	H
	*	2435.488	93.01	-	-	97.98	27.26	4.76	36.99	266	71	P	V
	*	2437.825	82.5	-	-	87.31	27.39	4.77	36.97	266	71	A	V
802.11n HT20 CH 11 2462MHz	*	2462.041	102.74	-	-	107.4	27.51	4.79	36.96	150	299	P	H
	*	2463.042	92	-	-	96.66	27.51	4.79	36.96	150	299	A	H
		2483.96	65.46	-8.54	74	69.96	27.64	4.8	36.94	150	299	P	H
		2483.52	41.99	-12.01	54	46.49	27.64	4.8	36.94	150	299	A	H
	*	2461.79	92.61	-	-	97.27	27.51	4.79	36.96	231	69	P	V
	*	2463.209	82.67	-	-	87.33	27.51	4.79	36.96	231	69	A	V
		2483.88	51.44	-22.56	74	55.94	27.64	4.8	36.94	231	69	P	V
		2483.52	31.43	-22.57	54	35.93	27.64	4.8	36.94	231	69	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	45.73	-28.27	74	44.07	31.51	6.83	36.68	200	152	P	H
		4824	44.38	-29.62	74	42.72	31.51	6.83	36.68	150	216	P	V
802.11n HT20 CH 06 2437MHz		4874	45.95	-28.05	74	44.15	31.59	6.87	36.66	150	263	P	H
		7311	47.4	-26.6	74	41.49	34.03	8.57	36.69	150	174	P	H
		4874	44.87	-29.13	74	43.07	31.59	6.87	36.66	150	85	P	V
		7311	48.81	-25.19	74	42.9	34.03	8.57	36.69	150	98	P	V
802.11n HT20 CH 11 2462MHz		4923	45.78	-28.22	74	43.84	31.67	6.92	36.65	150	221	P	H
		7386	49.16	-24.84	74	42.97	34.29	8.68	36.78	150	162	P	H
		4924	45.15	-28.85	74	43.21	31.67	6.92	36.65	150	285	P	V
		7386	49.55	-24.45	74	43.36	34.29	8.68	36.78	150	285	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz	*	2420.207	96.89	-	-	101.86	27.26	4.76	36.99	150	117	P	H
	*	2424.466	86.79	-	-	91.76	27.26	4.76	36.99	150	117	A	H
		2388.93	61.14	-12.86	74	66.44	27	4.72	37.02	150	117	P	H
		2389.92	42.55	-11.45	54	47.85	27	4.72	37.02	150	117	A	H
		2490.44	56.39	-17.61	74	60.73	27.77	4.82	36.93	150	117	P	H
		2484.6	36.22	-17.78	54	40.72	27.64	4.8	36.94	150	117	A	H
	*	2428.808	91.19	-	-	96.16	27.26	4.76	36.99	300	83	P	V
	*	2415.615	80.91	-	-	86.04	27.13	4.74	37	300	83	A	V
		2389.83	55.58	-18.42	74	60.88	27	4.72	37.02	300	83	P	V
		2389.74	36.56	-17.44	54	41.86	27	4.72	37.02	300	83	A	V
		2490.36	53.04	-20.96	74	57.38	27.77	4.82	36.93	300	83	P	V
		2484.4	32.48	-21.52	54	36.98	27.64	4.8	36.94	300	83	A	V
802.11n HT40 CH 06 2437MHz	*	2446.677	97.61	-	-	102.42	27.39	4.77	36.97	167	116	P	H
	*	2439.746	86.99	-	-	91.8	27.39	4.77	36.97	167	116	A	H
		2388.48	51.41	-22.59	74	56.71	27	4.72	37.02	167	116	P	H
		2389.83	34.42	-19.58	54	39.72	27	4.72	37.02	167	116	A	H
		2484.16	58.88	-15.12	74	63.38	27.64	4.8	36.94	167	116	P	H
		2483.72	38.3	-15.7	54	42.8	27.64	4.8	36.94	167	116	A	H
	*	2443.253	91.76	-	-	96.57	27.39	4.77	36.97	300	84	P	V
	*	2434.82	81.12	-	-	86.09	27.26	4.76	36.99	300	84	A	V
		2387.76	44.88	-29.12	74	50.18	27	4.72	37.02	300	84	P	V
		2389.38	29.85	-24.15	54	35.15	27	4.72	37.02	300	84	A	V
		2486.24	52.01	-21.99	74	56.51	27.64	4.8	36.94	300	84	P	V
		2483.76	33.87	-20.13	54	38.37	27.64	4.8	36.94	300	84	A	V



802.11n HT40 CH 09 2452MHz	*	2459.368	98.11	-	-	102.77	27.51	4.79	36.96	150	116	P	H
	*	2454.692	87.29	-	-	91.95	27.51	4.79	36.96	150	116	A	H
		2385.6	45.45	-28.55	74	50.75	27	4.72	37.02	150	116	P	H
		2389.56	30.3	-23.7	54	35.6	27	4.72	37.02	150	116	A	H
		2483.52	67.72	-6.28	74	72.22	27.64	4.8	36.94	150	116	P	H
		2483.6	42.38	-11.62	54	46.88	27.64	4.8	36.94	150	116	A	H
	*	2458.867	92.58	-	-	97.24	27.51	4.79	36.96	287	82	P	V
	*	2454.275	81.71	-	-	86.37	27.51	4.79	36.96	287	82	A	V
		2383.08	40.53	-33.47	74	45.9	26.95	4.7	37.02	287	82	P	V
		2381.28	27.37	-26.63	54	32.74	26.95	4.7	37.02	287	82	A	V
		2484.08	61.91	-12.09	74	66.41	27.64	4.8	36.94	287	82	P	V
		2484.48	36.12	-17.88	54	40.62	27.64	4.8	36.94	287	82	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4844	40.71	-33.29	74	39.01	31.53	6.85	36.68	300	188	P	H
HT40		7266	45.13	-28.87	74	39.33	33.93	8.53	36.66	150	188	P	H
CH 03		4845	41.26	-32.74	74	39.56	31.53	6.85	36.68	150	111	P	V
2422MHz		7266	43.74	-30.26	74	37.94	33.93	8.53	36.66	150	166	P	V
802.11n		4874	41.13	-32.87	74	39.33	31.59	6.87	36.66	150	112	P	H
HT40		7311	43.45	-30.55	74	37.54	34.03	8.57	36.69	150	82	P	H
CH 06		4874	42.18	-31.82	74	40.38	31.59	6.87	36.66	150	199	P	V
2437MHz		7311	44.84	-29.16	74	38.93	34.03	8.57	36.69	150	259	P	V
802.11n		4905	41.95	-32.05	74	40.06	31.64	6.9	36.65	150	188	P	H
HT40		7356	44.85	-29.15	74	38.77	34.19	8.64	36.75	150	12	P	H
CH 09		4904	41.33	-32.67	74	39.44	31.64	6.9	36.65	150	184	P	V
2452MHz		7356	44.97	-29.03	74	38.89	34.19	8.64	36.75	150	29	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Sample 3****2.4GHz 2400~2483.5MHz****WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 09 2452MHz	*	2457.114	99.21	-	-	103.87	27.51	4.79	36.96	218	114	P	H
	*	2454.191	88.89	-	-	93.55	27.51	4.79	36.96	218	114	A	H
		2388.21	47.82	-26.18	74	53.12	27	4.72	37.02	218	114	P	H
		2389.92	30.29	-23.71	54	35.59	27	4.72	37.02	218	114	A	H
		2483.76	70.79	-3.21	74	75.29	27.64	4.8	36.94	218	114	P	H
		2483.84	44.3	-9.7	54	48.8	27.64	4.8	36.94	218	114	A	H
	*	2446.092	93.3	-	-	98.11	27.39	4.77	36.97	300	85	P	V
	*	2449.599	82.79	-	-	87.6	27.39	4.77	36.97	300	85	A	V
		2387.31	43.31	-30.69	74	48.61	27	4.72	37.02	300	85	P	V
		2389.02	27.72	-26.28	54	33.02	27	4.72	37.02	300	85	A	V
		2483.76	62.93	-11.07	74	67.43	27.64	4.8	36.94	300	85	P	V
		2484.24	37.59	-16.41	54	42.09	27.64	4.8	36.94	300	85	A	V



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4904	42.11	-31.89	74	40.22	31.64	6.9	36.65	150	132	P	H
HT40		7356	44.91	-29.09	74	38.83	34.19	8.64	36.75	150	205	P	H
CH 09		4904	40.95	-33.05	74	39.06	31.64	6.9	36.65	150	14	P	V
2452MHz		7356	45.21	-28.79	74	39.13	34.19	8.64	36.75	150	78	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Sample 1

Emission below 1GHz
2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF	!	32.91	35.67	-4.33	40	51.96	18.2	0.76	35.25	132	52	P	H
		64.92	30.52	-9.48	40	57.87	6.6	1.04	34.99	-	-	P	H
		77.53	30.33	-9.67	40	55.94	8.65	1.14	35.4	-	-	P	H
		150.28	16.18	-27.32	43.5	38.33	11.2	1.58	34.93	-	-	P	H
		323.91	20.79	-25.21	46	39.32	14.03	2.36	34.92	-	-	P	H
		554.77	18.34	-27.66	46	31.5	18.23	3.15	34.54	-	-	P	H
	!	32.91	35.54	-4.46	40	51.83	18.2	0.76	35.25	100	84	P	V
		64.92	30.65	-9.35	40	58	6.6	1.04	34.99	-	-	P	V
		77.53	29.87	-10.13	40	55.48	8.65	1.14	35.4	-	-	P	V
		288.02	20.12	-25.88	46	39.66	13.01	2.23	34.78	-	-	P	V
		323.91	20.74	-25.26	46	39.27	14.03	2.36	34.92	-	-	P	V
		707.06	19.73	-26.27	46	31.55	19.37	3.59	34.78	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		32.91	26.72	-13.28	40	43.01	18.2	0.76	35.25	100	46	P	H
		68.8	26.27	-13.73	40	53.16	6.92	1.07	34.88	-	-	P	H
		323.91	17.82	-28.18	46	36.35	14.03	2.36	34.92	-	-	P	H
		528.58	18.4	-27.6	46	32.05	17.81	3.06	34.52	-	-	P	H
		721.61	19.92	-26.08	46	31.44	19.52	3.62	34.66	-	-	P	H
		870.99	22.57	-23.43	46	31.81	21.23	3.96	34.43	-	-	P	H
	!	30.97	35.62	-4.38	40	51.31	18.8	0.74	35.23	100	31	P	V
		42.61	31.72	-8.28	40	53.65	12	0.86	34.79	-	-	P	V
		64.92	31.13	-8.87	40	58.48	6.6	1.04	34.99	-	-	P	V
		252.13	19.69	-26.31	46	40.99	11.48	2.08	34.86	-	-	P	V
		323.91	21.03	-24.97	46	39.56	14.03	2.36	34.92	-	-	P	V
		521.79	18.33	-27.67	46	32.14	17.69	3.03	34.53	-	-	P	V
Remark		1. No other spurious found.											
		2. All results are PASS against limit line.											



Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		32.91	27.92	-12.08	40	44.21	18.2	0.76	35.25	166	85	P	H
		68.8	24.38	-15.62	40	51.27	6.92	1.07	34.88	-	-	P	H
		323.91	18.25	-27.75	46	36.78	14.03	2.36	34.92	-	-	P	H
		451.95	17.64	-28.36	46	32.7	17.01	2.81	34.88	-	-	P	H
		530.52	19.11	-26.89	46	32.71	17.85	3.07	34.52	-	-	P	H
		722.58	20.88	-25.12	46	32.38	19.53	3.62	34.65	-	-	P	H
	!	30.97	36.94	-3.06	40	52.63	18.8	0.74	35.23	150	162	P	V
		42.61	32.4	-7.6	40	54.33	12	0.86	34.79	-	-	P	V
		64.92	30.36	-9.64	40	57.71	6.6	1.04	34.99	-	-	P	V
		323.91	20.82	-25.18	46	39.35	14.03	2.36	34.92	-	-	P	V
		564.47	18.13	-27.87	46	31.3	18.29	3.17	34.63	-	-	P	V
		687.66	19.57	-26.43	46	31.66	19.22	3.53	34.84	-	-	P	V
Remark		1. No other spurious found.											
		2. All results are PASS against limit line.											



Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT40 LF		32.91	27.09	-12.91	40	43.38	18.2	0.76	35.25	122	195	P	H
		68.8	23.94	-16.06	40	50.83	6.92	1.07	34.88	-	-	P	H
		323.91	17.31	-28.69	46	35.84	14.03	2.36	34.92	-	-	P	H
		478.14	17.29	-28.71	46	31.93	17.17	2.89	34.7	-	-	P	H
		639.16	19.38	-26.62	46	31.97	18.89	3.37	34.85	-	-	P	H
		739.07	19.61	-26.39	46	30.78	19.69	3.65	34.51	-	-	P	H
	!	31.94	36.31	-3.69	40	52.3	18.5	0.75	35.24	100	200	P	V
		76.56	31.81	-8.19	40	57.5	8.53	1.13	35.35	-	-	P	V
		323.91	21.58	-24.42	46	40.11	14.03	2.36	34.92	-	-	P	V
		544.1	18.86	-27.14	46	32.16	18.09	3.11	34.5	-	-	P	V
		683.78	18.89	-27.11	46	31.01	19.2	3.52	34.84	-	-	P	V
		773.99	21.06	-24.94	46	31.75	20.04	3.74	34.47	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Sample 3

Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT40 L F		31.94	25.29	-14.71	40	41.28	18.5	0.75	35.24	150	217	P	H
		52.31	23.66	-16.34	40	49.84	8.18	0.95	35.31	-	-	P	H
		68.8	23.54	-16.46	40	50.43	6.92	1.07	34.88	-	-	P	H
		323.91	19.01	-26.99	46	37.54	14.03	2.36	34.92	-	-	P	H
		550.89	18.76	-27.24	46	31.91	18.21	3.14	34.5	-	-	P	H
		704.15	19.94	-26.06	46	31.82	19.34	3.58	34.8	-	-	P	H
		31.94	36.08	-3.92	40	52.07	18.5	0.75	35.24	177	199	P	V
		42.61	32.04	-7.96	40	53.97	12	0.86	34.79	-	-	P	V
		76.56	31.55	-8.45	40	57.24	8.53	1.13	35.35	-	-	P	V
		288.02	20.46	-25.54	46	40	13.01	2.23	34.78	-	-	P	V
		323.91	21.43	-24.57	46	39.96	14.03	2.36	34.92	-	-	P	V
		413.15	19.43	-26.57	46	35.47	16.42	2.68	35.14	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.