

FCC PART 15.247 REPORT

On Model: FPCWL02

Prepared for Fujitsu PC Corp.

According to FCC 15.247 Requirements

FCC ID #: MU7FPCWL02

Test Report #: FUJ-0201-2871-TCB

Prepared by: Paul Chen

Table of Contents

DISCLAIMER NOTICE	1
REPRODUCTION CLAUSE	1
ADMINISTRATIVE DATA	2
EUT DESCRIPTION	2
TEST SUMMARY	3
TEST LOCATION	5
ACCREDITATION BODIES	5
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATION	6
TEST SYSTEM DETAILS	6
CONFIGURATION OF TESTED SYSTEM	7
ATTACHMENT A – PRODUCT INFORMATION	8
ATTACHMENT B – CFR15.205 RESTRICTED BAND	10
ATTACHMENT C – CFR15.203 ANTENNA REQUIREMENT	11
ATTACHMENT D – CFR 15.247(A)(1)(II) 20DB BANDWIDTH (CONDUCTED)	12
ATTACHMENT E – CFR 15.247(A)(1) FREQUENCY SEPARATION (CONDUCTED)	13
ATTACHMENT F – CFR 15.247(A)(1)(II) TIME OF OCCUPANCY (CONDUCTED)	14
ATTACHMENT G – CFR15.247(B) MAXIMUM PEAK OUTPUT POWER MEASUREMENT (CONDUCTED)	16
ATTACHMENT H – CFR15.247(B)(4) RF EXPOSURE COMPLIANCE	18
ATTACHMENT I – CFR15.247(C) RADIATED EMISSION MEASUREMENT 1GHZ - 25GHZ (FUNDAMENTAL AND HARMONICS)	19
ATTACHMENT I – CFR15.247 (C) RADIATED EMISSION MEASUREMENT 1GHZ - 25GHZ (FUNDAMENTAL AND HARMONICS) (CONT.)	20
ATTACHMENT I – CFR15.247(C) RADIATED EMISSION MEASUREMENT 1GHZ - 25GHZ (FUNDAMENTAL AND HARMONICS) (CONT.)	21
ATTACHMENT J – CFR15.209(A) RADIATED EMISSION MEASUREMENT 212-R-01)	23
ATTACHMENT K – CFR15.207 (A) CONDUCTED EMISSION TEST RESULTS	27
ATTACHMENT L – TEST EQUIPMENT	30
ATTACHMENT M – LISN SPECIFICATIONS	31
ATTACHMENT N – EXTERNAL PHOTOS	ERROR! BOOKMARK NOT DEFINED.

ATTACHMENT O – INTERNAL PHOTOS _____ ERROR! BOOKMARK NOT DEFINED.

ATTACHMENT P – PROPOSED FCC ID LABEL AND LOCATION ERROR!
BOOKMARK NOT DEFINED.

ATTACHMENT Q – PLOTS OF TESTS _____ ERROR! BOOKMARK NOT DEFINED.

APPENDIX 1 - RADIATED MEASUREMENTS AT A BANDEDGE ERROR!
BOOKMARK NOT DEFINED.

Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from EMC Compliance Management Group, 670 National Ave., Mountain View, CA 94043.

Administrative Data

Manufacturer : Fujitsu PC Corp.
598 Gibraltar Drive,
Milpitas, CA 95035

FCC ID : **MU7FPCWL02**

Class : Spread Spectrum Transceiver

Interface Type : Bluetooth™ Compatible Wireless
Transceiver to Public Telephone Line

Frequency Range : 2402 – 2480 MHz

Method : Frequency Hopping Spread Spectrum Model

Name(s) : FPCWL02

Part Number : N/A

Max RF Output (W) : 0.0047 Watts

Power Supply : External AC/DC Adapter, 12VDC, 5Watts

CFR Part(s) : CFR15.247

Date(s) of Tests : February 10-17, 2001

Report Number : FUJ-0201-2871-TCB

EUT Description

The subject Model: FPCWL02 (refer to EUT in this test report) is a Bluetooth™ Compatible Wireless Transceiver, interface with public subscriber telephone line. The FPCWL02 operating on the 2.402GHz – 2.480GHz band using Bluetooth™ technology. The EUT is a stand along device. The EUT has an integral antenna and telephone line, telephone set and an RS-232 interface. The FPCWL02 is controlled by the software drivers through its RS-232 interface.

Test Summary

Test Summary (CFR 15.247)			
Specifications	Requirement	Results	Note
CFR15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may designed the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	Complied	Attachment C
CFR15.247(a)(i)	Frequency hopping systems operating in the 902 - 928 MHz band shall use at least 50 hopping frequencies. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.	Complied	Attachment D & F
CFR15.247(a)(ii)	Frequency hopping systems operating in the 2400 – 2483.5 MHz and the 5725 – 5850 MHz bands shall use at least 75 hopping frequencies. The maximum allowed 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.	Complied	Attachment A, D & F
CFR15.247(b)(1)	For frequency hopping systems operating in the 2400-2483.5 MHz or 5725-5850 MHz band and for all direct sequence systems: 1 watt.	Complied	Attachment G
CFR15.247(b)(4)	Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. Ses 1.1307(b)(1) of this chapter.	N/A	Attachment H
CFR15.247(c)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, base on either an RF conducted or a	Complied	Attachment D & H

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 3 of 42

	radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).										
CFR15.35(b)	On any frequency or frequencies above 1GHz, unless otherwise stated, the radiated limits shown are based on the use of measurement instrumentation employing an average detector function. When average radiated emission measurements are specified in the regulations, including emission measurements below 1000MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated. Unless otherwise specified, measurements above 1000MHz shall be performed using a minimum resolution bandwidth of 1MHz. Measurements of AC power line conducted emissions are performed using a CISPR quasi-peak detector, even for device for which average radiated emission measurements are specified	Complied	Attachment H								
CFR15.209.a	Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: <table><tr><th>Frequency (MHz) Measurement distance (meters)</th><th>Field strength (microvolts/meter)</th></tr><tr><td>0.009-0.490 --- 300</td><td>2400/F(kHz)</td></tr><tr><td>0.490-1.705 --- 30</td><td>24000/F(kHz)</td></tr><tr><td>1.705-30.0 --- 30</td><td>30</td></tr></table> **Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§15.230 and 15.241.	Frequency (MHz) Measurement distance (meters)	Field strength (microvolts/meter)	0.009-0.490 --- 300	2400/F(kHz)	0.490-1.705 --- 30	24000/F(kHz)	1.705-30.0 --- 30	30	Complied	Attachment I
Frequency (MHz) Measurement distance (meters)	Field strength (microvolts/meter)										
0.009-0.490 --- 300	2400/F(kHz)										
0.490-1.705 --- 30	24000/F(kHz)										
1.705-30.0 --- 30	30										
CFR15.207(a)	For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequency within the band 450kHz to 30MHz shall not exceed 250 microvolts.	Complied	Attachment J								
CFR15.31(e)	For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.	Complied	Attachment G								

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 4 of 42

Test Location

EMC Compliance Management Group is located at 670 National Ave., Mountain View, CA 94043, USA.

Accreditation Bodies

EMC Compliance Management Group is a fully accredited Test Laboratory.



In compliance with the site registration requirements of Section 2.948 of the FCC Rules to perform EMI measurements for the general public.



Accredited by the National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code # 200068-0.

EUT Exercise Software

The client supplied the Bluetooth Test software. The software was used to exercise during conducted and radiated testing. No other data was transmitted to the EUT during testing.

Equipment Modification

Any modifications installed previous to testing by Fujitsu Personal Systems, Inc. will be incorporated in each production model sold or leased in Europe.

There were no modifications installed by EMC Compliance Management Group.

Test System Details

EUT	
Model Number:	FPCWL02
Description:	Frequency Hopping Spread Spectrum Transceiver
Manufacturer:	Fujitsu PC Corp.
S/N:	Regulatory Unit #4
Model Number:	CP048927
Description:	AC to DC Adapter, 12VDC Output
Manufacturer:	Tokin S.E.
S/N:	Sample-025
SUPPORT EQUIPMENT	
Model Number:	FMW2700S
Description:	Notebook PC
Manufacturer:	Fujitsu PC Corp.
Model Number:	CA01007-0600
Description:	AC/DC Power Supply
Manufacturer:	Fujitsu Denso, Ltd.


Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 6 of 42

Configuration of Tested System

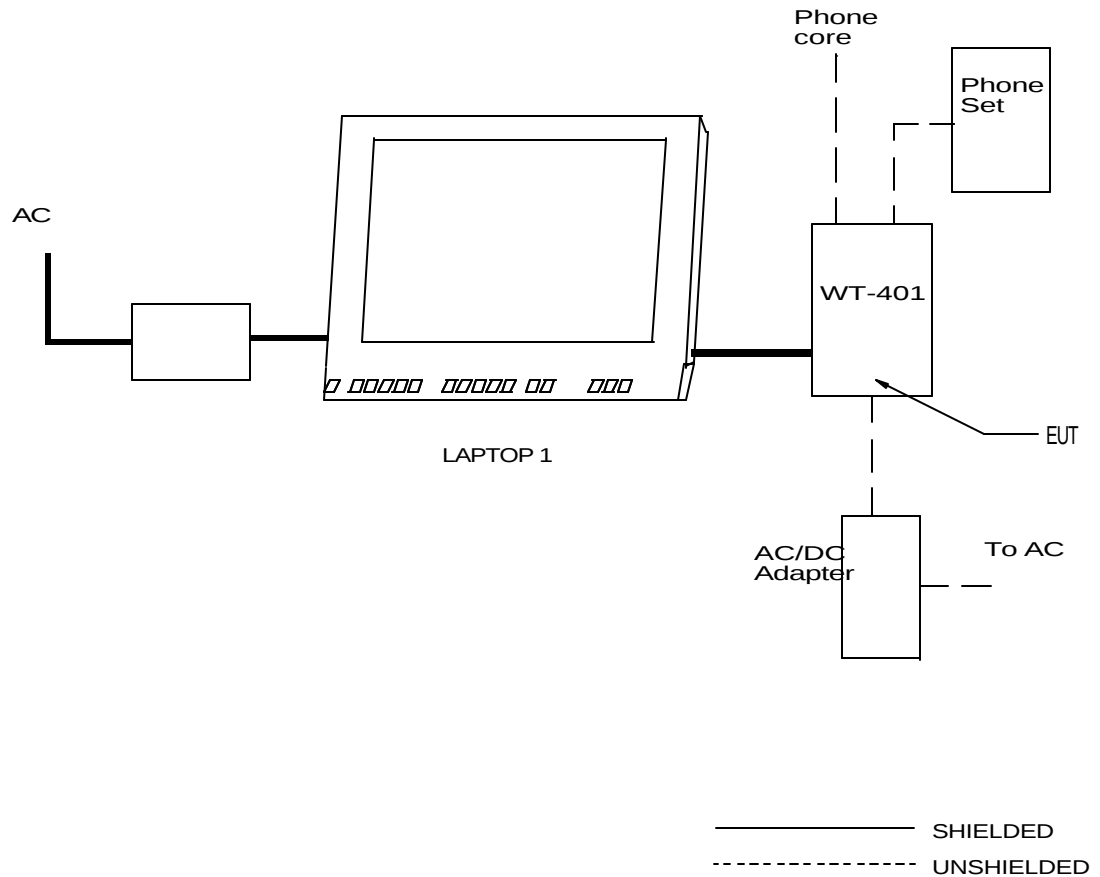

ATTACHMENT A – PRODUCT INFORMATION

Frequency Range: 2.402GHz – 2.480GHz

of Channels: 79 Channels, see table below and plot 4

Channel Separation: 1.0MHz

Transmitting Method: Pseudo-random Frequency Hopping
Spread Spectrum

Transmitting Power: 0.0047 Watt

Antenna (TX and RX): Patch antenna

Interface: RS-232

Power Supply: AC to DC adapter

External Connections: Public Telephone Line

Channel ID	Frequency (MHz)	Channel ID	Frequency (MHz)	Channel ID	Frequency (MHz)	Channel ID	Frequency (MHz)
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461		

Test Report #: FUJ-0201-2871-TCB**Prepared for Fujitsu PC Corp.****Prepared by EMC Compliance Management Group****Page 8 of 42**

Result Table 1. Pseudo-random Frequency List

ATTACHMENT B – CFR15.205 RESTRICTED BAND


Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operation. The EUT was tested from 150kHz and up to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1GHz, average measurements was used using RBW 1MHz-VBW 10Hz and linearly polarized horn antennas. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading frequency, data sequence, and the carrier modulation must not exceed the limits show in Table 2 per 15.209.

<i>Frequency (MHz)</i>	<i>Field strength (microvolts/meter)</i>	<i>Measure distance (meters)</i>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3
**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§15.230 and 15.241.		

ATTACHMENT C – CFR15.203 ANTENNA REQUIREMENT

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

The Fujitsu PC Corp. Model: WL01 complies with the requirement of 15.203. The antennas are permanent mounted mono-pole antennas, no user accessible parts.

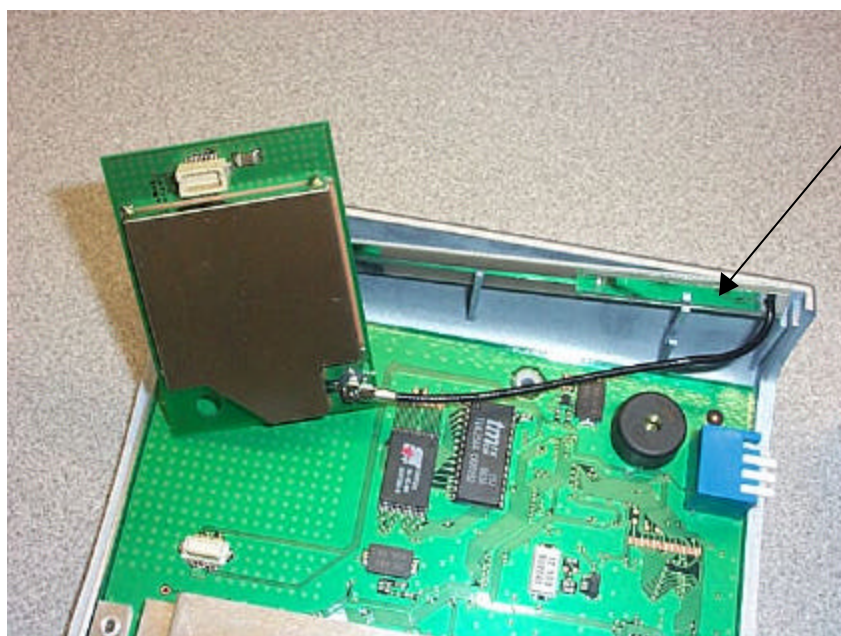

Conclusion: Pass, EUT meets 15.203 requirements. There are no provisions for connection to an external antenna or antenna replacement for users.

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 11 of 42

**ATTACHMENT D – CFR 15.247(a)(1)(ii) 20dB BANDWIDTH
(CONDUCTED)**

The maximum allowed 20 dB bandwidth of the hopping channel is 1 MHz in the 2400 – 2483.5 MHz and the 5725 – 5850 MHz bands.

EUT Operating Mode =	Single Frequency
R. Bandwidth =	100 kHz
Video Bandwidth =	100 kHz
Frequency Span =	0.5 MHz
Reference Level =	120 dBuV
Sweep Time =	20 mS
RF Attenuation =	25 dB
External Attenuator =	0 dB

CHANNEL	FREQUENCY (MHz)	6dB Bandwidth (MHz)	Plot #
Low	2401.99	0.325	Plot 1
Mid	2439.99	0.322	Plot 2
High	2479.99	0.326	Plot 3

Result Table 3 - 20dB Bandwidth Measurement Results

Test Result: Pass, EUT meets minimum requirement.

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 12 of 42

**ATTACHMENT E – CFR 15.247(a)(1) FREQUENCY SEPARATION
(CONDUCTED)**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

EUT Operating Mode =	Hopping
R. Bandwidth =	30 kHz
Video Bandwidth =	30 kHz
Frequency Span =	5 MHz
Reference Level =	120 dBuV
Sweep Time =	20 mS
RF Attenuation =	25 dB
External Attenuator =	0 dB

Test Result: Pass minimum requirement. Frequency separation = 1.03 MHz, see plot 5.

**ATTACHMENT F – CFR 15.247(a)(1)(ii) TIME OF OCCUPANCY
(CONDUCTED)**

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period in a frequency hopping systems operating in the 2400 – 2483.5 MHz and the 5725 – 5850 MHz bands.

Center Frequency =	2.401.99 MHz
R. Bandwidth =	1 MHz
Video Bandwidth =	1 MHz
Frequency Span =	0 Hz
Reference Level =	120 dBuV
Sweep Time =	400 mS
RF Attenuation =	25 dB
External Attenuator =	0 dB



Occupancy Time Plot

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 14 of 42

Test Result: Pass minimum requirement. Time of occupancy = 152mS within a 30 second period.

ATTACHMENT G – CFR15.247(b) MAXIMUM PEAK OUTPUT POWER MEASUREMENT (CONDUCTED)

The maximum peak output power of the transmitter shall not exceed 1 watt (+30 dBm).

R. Bandwidth = 100 kHz
 Video Bandwidth = 100 kHz
 Frequency Span = 1 MHz
 Reference Level = 120 dBuV
 Sweep Time = 20 mS
 RF Attenuation = 25 dB
 External Attenuator = 0 dB

Peak Output Power = Power Meter Reading + Power Sensor Factor + Cable Loss

CHANNEL	CENTER FREQUENCY (MHz)	POWER METER READING (dBm)	POWER SENSOR FACTOR (dB)	Cable Loss (dB)	PEAK OUTPUT POWER (dBm)	Plot #
Low	2401.99	4.8	-0.2	1.3	5.9	6
Mid	2439.99	5.6	-0.2	1.3	6.7	7
High	2479.99	4.5	-0.2	1.3	5.6	8

Result Table 4. Output Power Measurements

CHANNEL	CENTER FREQUENCY (MHz)	POWER METER READING (dBm)	POWER SENSOR FACTOR (dB)	Cable Loss (dB)	PEAK OUTPUT POWER (dBm)	AC Supply to Host
Mid	2439.99	5.6	-0.2	1.3	6.7	102 VAC
Mid	2439.99	5.6	-0.2	1.3	6.7	138 VAC

Result Table 2a. CFR15.31(e) Voltage Variation Output Power Measurements

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 16 of 42

Test Result: Pass, EUT meets minimum requirement.



Cable supply by Applicant (Cable Loss Included)

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 17 of 42

ATTACHMENT H – CFR15.247(b)(4) RF EXPOSURE COMPLIANCE

RF energy generated by EUT shall meet CFR1.1307 (b)(1) guideline.

RADIATED PEAK POWER	MAXIMUM CONDUCTED OUTPUT	ANTENNA GAIN
(dBm/m)	(dBm)	(dBi)
11.7	6.7	5.0

ANTENNA GAIN	MAXIMUM CONDUCTED OUTPUT	EIRP	EIRP	MPE DISTANCE	MINIMUM ALLOWABLE EXPOSURE SEPARATION DISTANCE
(dBi)	(dBm)	(dBm)	(mW)	(cm)	(cm)
5.0	6.7	12.2	16.6	<2	20
1. According to FCC Part 2.1091, the EUT should be classified as a mobile device. At normal usage results in more than 20cm separation between user and antenna. The Maximum Permissible Exposure (MPE) shown in 47 CFR1.1310 is 1mW/cm² for 2.4GHz band. 2. $EIRP = P \text{ (dB)}_{\text{(Max. Conducted output)}} + G \text{ (dB)}_{\text{(Antenna Gain)}}$ 3. MPE distance are based on a conservative “worst case” prediction. Using formula $S = EIRP / 4\pi R^2$ and no calculation for duty factor. In practice the minimum distance will be shorter.					

The following statement will be place in user's manual:

“CAUTION: To comply with FCC RF exposure requirements, a separation distance of at least 8 inches (20cm) must be maintained between the antenna of this and all persons.”

**ATTACHMENT I – CFR15.247(c) RADIATED EMISSION MEASUREMENT
1GHz - 25GHz (FUNDAMENTAL AND HARMONICS)**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, base on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Operating Channel = Low
 Operation Frequency (OF) = 2402 MHz
 R. Bandwidth = 100 kHz
 Video Bandwidth = 100 kHz
 Test Distance = 3 Meters
 Frequency Range= 2402 to 25000 MHz
 100kHz Out-of-band plot = Plot 9

Freq. (MHz)	RAW Reading (dBuV)	Correction Factors (dB/m)	Polar. (V/H)	Detector (Peak/Ave)	Field Strength (dBuV/m)	Margin (dB)	Notes
2401.99	96.89	10.46	H	Peak	107.35	-	OF
2401.99	95.54	10.47	V	Peak	106.01	-	OF
4804.00	29.47	15.96	H	Ave	45.44	-8.56	RB
4804.01	33.56	15.96	V	Ave	49.53	-4.47	RB
7205.99	21.89	23.17	H	Peak	48.13	-22.14	NRB
7206.00	23.38	23.17	V	Peak	46.55	-23.72	NRB
9645.7	<20.00	-	V	Peak	-	-	NRB

*Result Table 5. Low Channel Radiated Emission Measurements
(Fundamental & Harmonics)*

Legends:

OF = Operating Frequency.

NRB = Non Restricted Band, Limits should be 20 dB below the "OF".

RB = Frequency within the Restricted Bands according to CFR15.205, Limits shall comply with CFR15.209. In this case the limit is 500uV/m (54dBuV/m).

Notes:

1. An EMI receiver peak scan is made from 1 – 25 GHz frequency range using RBW/VBW = 100kHz.
2. Average measurements above 1 GHz are using RBW = 1 MHz, VBW = 10 Hz.
3. During this test EUT is manipulated through typical positions, polarity and length, the worst case emissions are reported above

**Test
Prep:**

Prepared by EMC Compliance Management Group

Page 19 of 42

**ATTACHMENT I – CFR15.247 (c) RADIATED EMISSION MEASUREMENT
1GHz - 25GHz (FUNDAMENTAL AND HARMONICS) (CONT.)**

Operating Channel = Mid

Operation Frequency (OF) = 2440 MHz

Test Distance = 3 Meters

Freq. (MHz)	RAW Reading (dBuV)	Correction Factors (dB/m)	Polar. (V/H)	Detector (Peak/Ave)	Field Strength (dBuV/m)	Margin (dB)	Notes
2440.02	93.78	12.61	H	Peak	106.39	-	OF
2440.02	93.27	12.61	V	Peak	105.88	-	OF
4880.05	34.07	15.56	H	Ave	49.63	-4.37	RB
7320.1	28.32	22.50	H	Ave	50.82	-3.18	RB
9760.00	<20.00	-	H	Peak	-	-	NRB
12202.13	<20.00	-	H	Peak	-	-	RB

*Result Table 6. Mid Channel Radiated Emission Measurements
(Fundamental & Harmonics)*

Legends:

OF = Operating Frequency.

NRB = Non Restricted Band, Limits should be 20 dB below the "OF".

RB = Frequency within the Restricted Bands according to CFR15.205, Limits shall comply with CFR15.209. In this case the limit is 500uV/m (54dBuV/m).

Notes:

1. An EMI receiver peak scan is made from 1 – 25 GHz frequency range using RBW/VBW = 100kHz.
2. Average measurements above 1 GHz are using RBW= 1 MHz, VBW = 10 Hz.
3. During this test EUT is manipulated through typical positions, polarity and length, the worst case emissions are reported above.

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 20 of 42

**ATTACHMENT I – CFR15.247(c) RADIATED EMISSION MEASUREMENT
1GHz - 25GHz (FUNDAMENTAL AND HARMONICS) (CONT.)**

Operating Channel = High
 Operation Frequency (OF) = 2480 MHz
 Test Distance = 3 Meters

Freq. (MHz)	RAW Reading (dBuV)	Correction Factors (dB/m)	Polar. (V/H)	Detector (Peak/Ave)	Field Strength (dBuV/m)	Margin (dB)	Notes
2480.00	95.68	11.91	V	Peak	107.59	-	OF
2480.01	93.11	11.91	H	Peak	105.02	-	OF
4960.02	33.63	16.21	H	Ave	49.84	-4.16	RB
7440.05	26.50	23.70	H	Ave	50.2	-3.80	RB
9920.10	< 30.00	-	H	Peak	-	-	NRB
12399.98	< 30.00	-	H	Peak	-	-	NRB

*Result Table 7. High Channel Radiated Emission Measurements
(Fundamental & Harmonics)*

Legends:

OF = Operating Frequency.
 NRB = Non Restricted Band, Limits should be 20 dB below the "OF".
 RB = Frequency within the Restricted Bands according to CFR15.205, Limits shall comply with CFR15.209. In this case the limit is 500uV/m (54dBuV/m).

Notes:

1. An EMI receiver peak scan is made from 1 – 25 GHz frequency range using RBW/VBW = 100kHz.
2. Average measurements above 1 GHz are using RBW = 1 MHz, VBW = 10 Hz.
3. During this test EUT is manipulated through typical positions, polarity and length, the worst

Test Result: Pass, EUT meet minimum requirements.

ATTACHMENT J – CFR15.209(a) RADIATED EMISSION MEASUREMENT
212-R-01)


The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-100	150	3


Operating Frequency = 2402, 2440 and 2480MHz

Res. Bandwidth = 120 kHz

Sweep Time = 30 mS

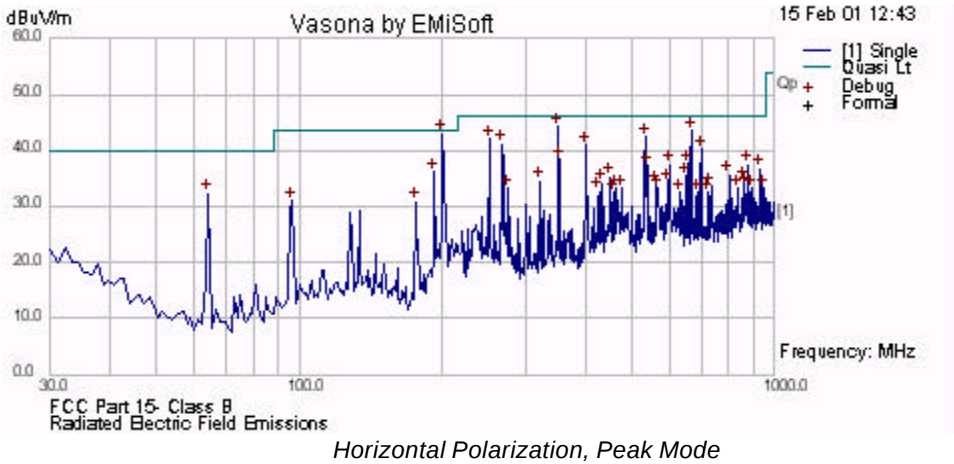

Bluetooth is a trademark of Telefonaktiebolaget LM Ericsson and Fujitsu is licensed to use its logo.

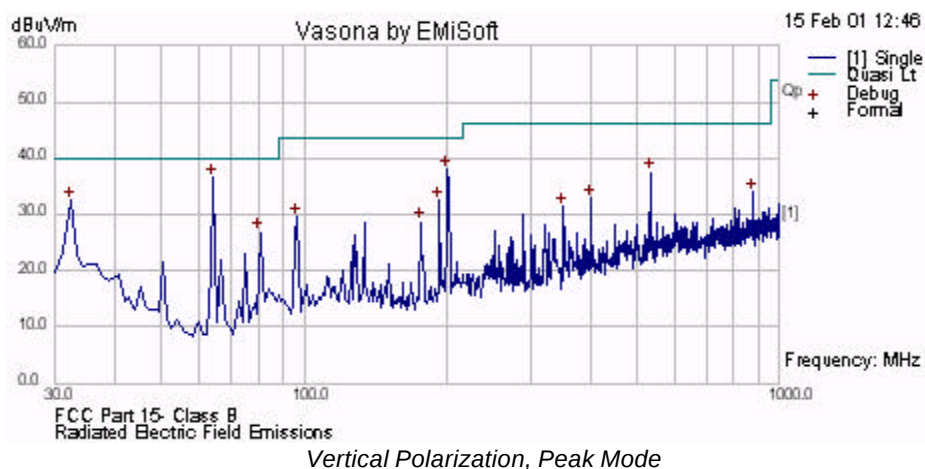

Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [dBuV/m]	Delta, QP [dB]	3 Meters Limits [dBuV/m]	Correction Factors [dB/m]
Set-up/Configuration: EN55022:1998, CISPR 16-1:1993					
200.289	V	41.5	-2.00	43.5	-7.08
668.044	V	43.55	-2.45	46.0	2.78
351.178	V	43.31	-2.69	46.0	-2.35
64.520	H	36.57	-3.43	40.0	-11.4
533.340	V	42.36	-3.64	46.0	3.14
250.032	V	42.11	-3.89	46.0	-4.52
1. All Emissions were investigated from 30 to 1000 MHz the 6 worst emissions are reported. 2. For handheld devices, the EUT is rotated through three orthogonal axes to obtain the maximum emissions.					

Result Table 8. CFR15.209 (a) Radiated Emission Test Results

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 24 of 42

Test Result: Pass, EUT meets minimum requirements.



Photo for 3 Meter Chamber Scan

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 26 of 42

ATTACHMENT K - CFR15.207 (a) CONDUCTED EMISSION TEST RESULTS

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is back onto the AC power line on frequency within the band 450 kHz to 30 MHz shall not exceed 250 microvolts.

Operating Frequency = 2402, 2440 and 2480MHz

AC / DC Adapter =

Res. Bandwidth = 9 kHz

Sweep Time = 30 mS

Line	Frequency [MHz]	Corrected QP Reading [dB(μV)]	Delta QP [dB]	Limit [dB(μV)/m]
L1	2.3376	32.0	-16.0	48.0
L1	2.23	29.9	-18.1	48.0
L1	2.1253	29.65	-18.35	48.0
L2	2.4456	34.57	-13.43	48.0
L2	2.341	33.0	-15.0	48.0
L2	21.326	32.08	-15.92	48.0
Note: All reading are using a bandwidth of 9 kHz, with a 30 ms sweep time. A video filter was not used.				



Test Result: Pass, EUT meet minimum requirements.

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 27 of 42

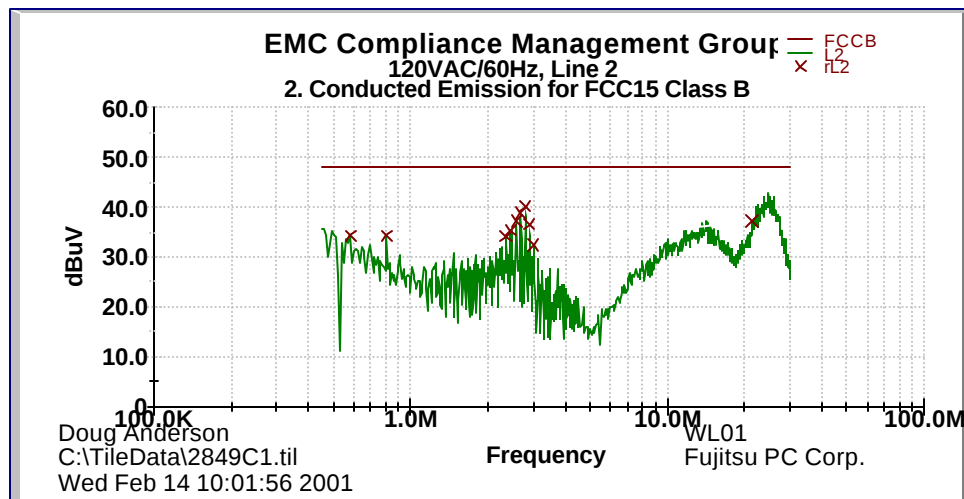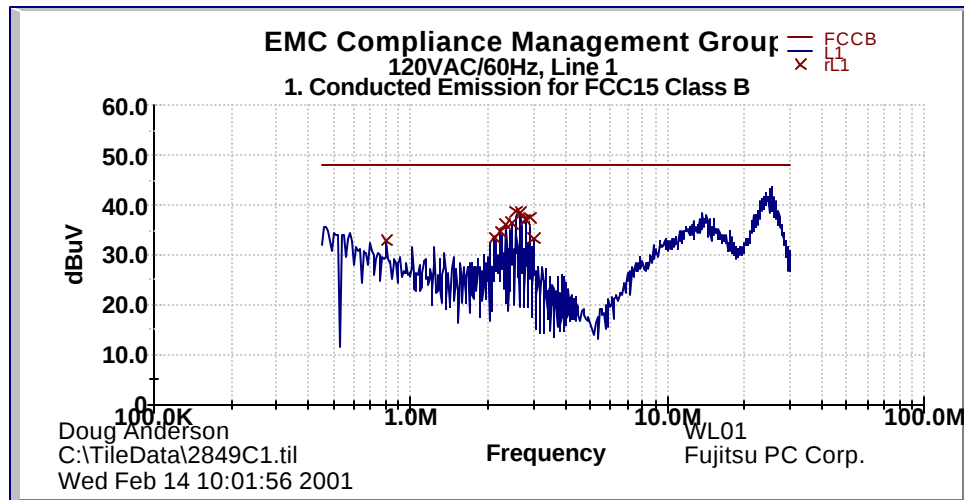



Conducted Emission Setup



Conducted Emission Setup, showing cable placement

ATTACHMENT L - TEST EQUIPMENT

Test Equipment	Manufacturer/ Model	Serial No.	Last Cal.	Cal. Due Date
EMI Receiver	R&S / ESMI-RF	849937/006	03/01/00	03/01/01
EMI Receiver	R&S / ESAI-D	825035/005	03/01/00	03/01/01
Bilog Antenna	CHASE CBL6112A	2274	11/16/00	11/16/01
Horn Antenna	EMCO / 3115 w/ Miteq Amp	001	10/28/00	10/28/01
Horn Antenna	EMCO / 3116 w/ Miteq Amp	002	10/28/00	10/28/01
LISN	R & S / ESH3-Z5	844249/018	11/15/00	11/15/01
Signal Generator	HP / 83711B	3324A03288	08/29/00	08/29/01
RF Power Meter	Boonton / 42AD	09	03/08/00	03/08/01
RF Power Sensor	Boonton / 41-4B	157	03/08/00	03/08/01
RF Power Sensor	Boonton / 42004A	11544	03/08/00	03/08/01
Scope	Tektronix / TDS 360	B0120165	05/12/00	05/12/01
Attenuators	HP / 8491C	00423	VBU	VBU
Test Chamber	HumiTenn	A032331	VBU	VBU
Temp. Controller	Partlow Corp / MRC7000	94G86270	08/21/00	08/21/01
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).				

Test Report #: FUJ-0201-2871-TCB


Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group


Page 30 of 42

ATTACHMENT M – LISN SPECIFICATIONS

LISN use in this test is manufactured by R & S, model ESH3-Z5. This LISN complies with the FCC and CISPR requirements. The test frequency range is from 9kHz to 30MHz and impedance is 50 Ohms.

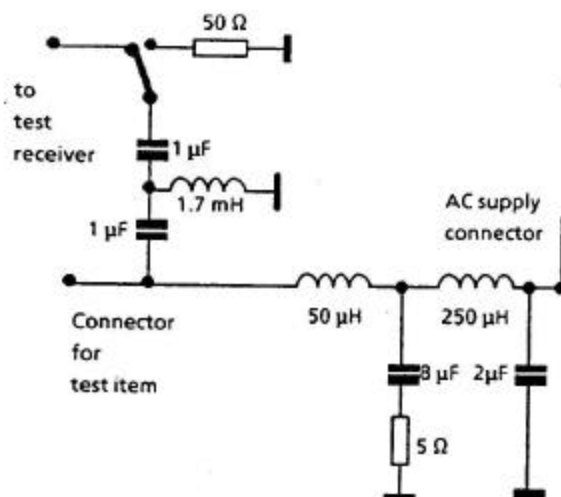

LISN Schematics (only 1 line shown)

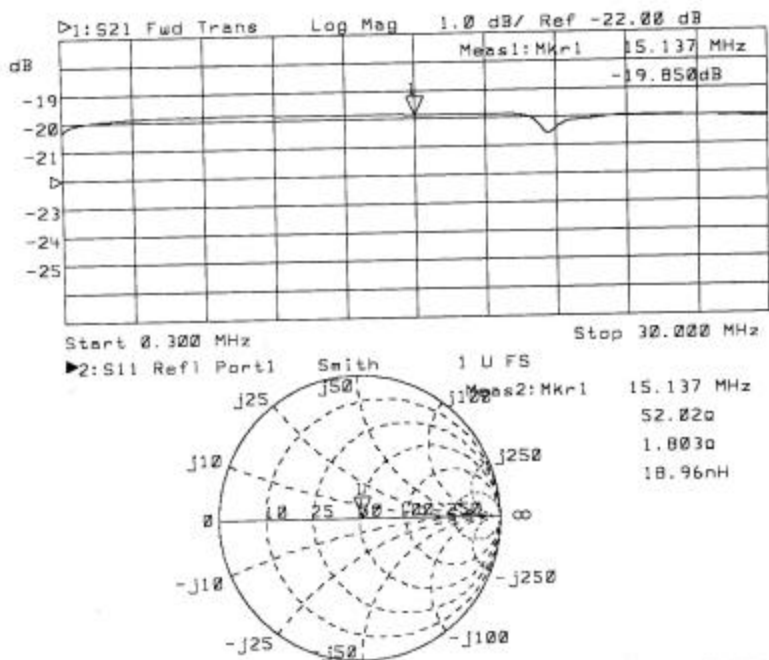

Network Analyzer Plot

Test Report #: FUJ-0201-2871-TCB

Prepared for Fujitsu PC Corp.

Prepared by EMC Compliance Management Group

Page 31 of 42