BACK LABEL

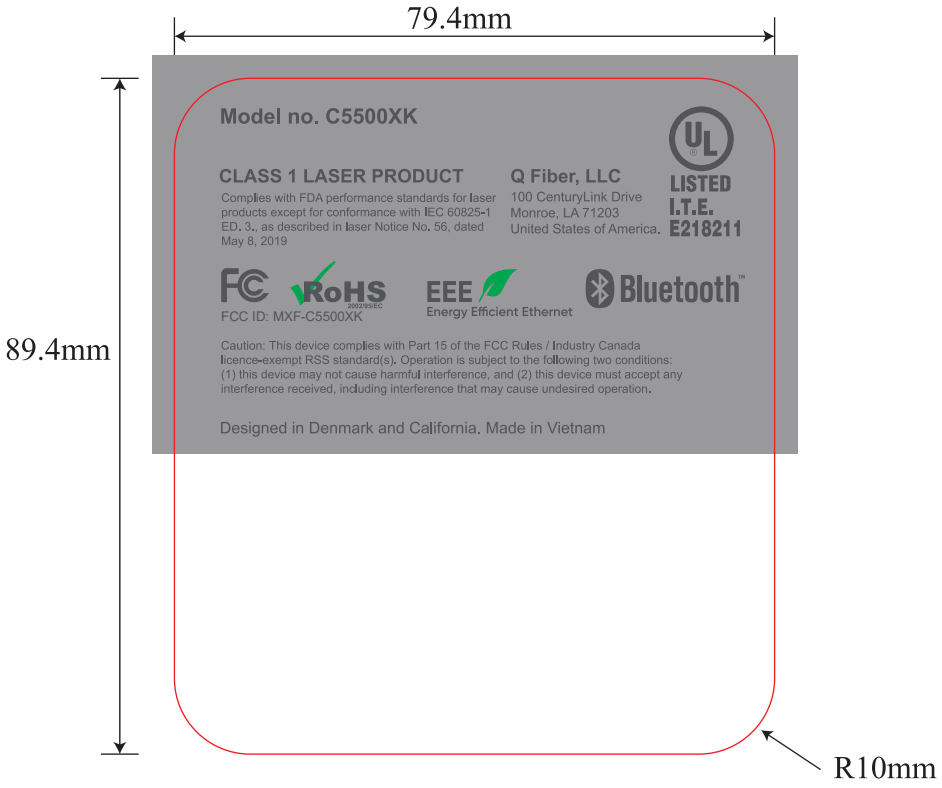
79.4mm
89.4mm
R10mm
Model no. C5500XK
CLASS 1 LASER PRODUCT
Complies with FDA performance standards for laser products except for conformance with IEC 60825-1 ED. 3., as described in laser Notice No. 56, dated May 8, 2019
Q Fiber, LLC
100 CenturyLink Drive
Monroe, LA 71203
United States of America.
LISTED
I.T.E.
E218211
FCC ID: MXF-C5500XK
Energy Efficient Ethernet
Bluetooth
Caution: This device complies with Part 15 of the FCC Rules / Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Designed in Denmark and California. Made in Vietnam

Model no. C5500XK
CLASS 1 LASER PRODUCT
Complies with FDA performance standards for laser products except for conformance with IEC 60825-1 ED. 3., as described in laser Notice No. 56, dated May 8, 2019
Q Fiber, LLC
100 CenturyLink Drive
Monroe, LA 71203
United States of America.
LISTED
I.T.E.
E218211
FCC ID: MXF-C5500XK
Energy Efficient Ethernet
Bluetooth
Caution: This device complies with Part 15 of the FCC Rules / Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Designed in Denmark and California. Made in Vietnam
Serial no. : C5500XKYYWWXXXXXX
MAC XX . XX . XX . XX . XX . XX
Modem GUI Address: 192.168.0.1
Admin Username: admin
Admin Password: f3Fa6f76
HW version: 0.1
FSAN ID: AXON000A13CF
CLEI: BVMLA00ARA

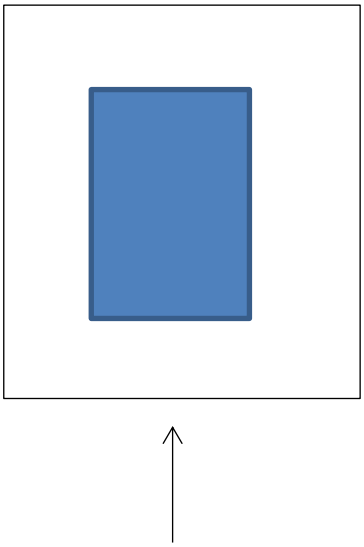

FCC ID: MXF-C5500XK

MZS229

Fasson®
50 micron White PET TC4/S8040E/Embossed Polycoated liner ni

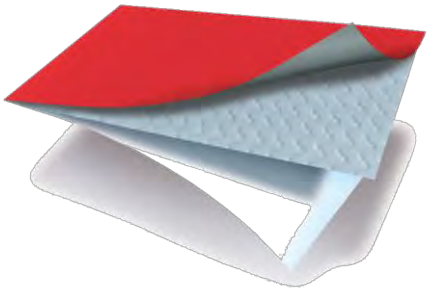

50 micron White PET TC4	
S8040E	
Embossed Polycoated liner ni	

Facestock
A white polyester facestock with a smooth, absorbent ink-receptive topcoat.

Basis Weight: 70g/m^2± 10% ISO536
Caliper: 0.050 mm ± 10% ISO534

Adhesive
A general purpose permanent, solvent acrylic based adhesive..

Liner
A super-calendared embossing polycoated white glassine paper
Basis Weight: 108 g/m^2 ± 10% ISO536
Caliper: 0.100mm ± 10% ISO534

Performance data
loop Tack (st,st)-FTM 9: 9.0
20 min 90° Peel (st,st)-FTM 2: 5.5
24 hour 90° Peel (st,st)-FTM 2: 7.0

Minimum Application Temperature: -4°C
After labeling 24Hours, Service Temperature Range:-40°C~+149°C

Adhesive Performance
This is an excellent, general-purpose industrial grade clear adhesive, featuring high initial tack, ultimate adhesion and low adhesive ooze. It is resistant to many solvents.

Applications and use
The special grid on the adhesive layer can drive away air which hides between the label and substrate to ensure the label will not create bubble. Especially on those conditions, such as the big size label, etc.

This product features excellent tear strength, heat resistance, dimensional stability, transparency and chemical resistance.

This product is suitable for use in a wide range of durable labeling applications. The product remains reclosure performance in a short time.

Conversion/printing
The top coated surface is designed and suitable for all normal printing techniques. Special formulated inks are normally not necessary.
It can be used for thermal transfer printing.
Ink/ribbon testing is always recommended before production.
This product can be die cut and stripped at high speeds on most web-fed presses.
Harden treated and sharp dies, preferably in flat-bed, are important to ensure smooth conversion.
Need avoid too much re-winding tension to causing bleeding.

Shelf life
One year when stored at 23 ± 2°C at 50 ± 5% RH.

Avery Dennison Label and Packaging Materials
32/F., Skyline Tower
39 Wang Kwong Road
Kowloon Bay, Kowloon,
Hong Kong
Tel: +852 2802-9618 | +856 400 828 3797

Warranty
All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but but do no constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but but do no constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way

商 标 纸 规 格 表

SPECIFICATION

DATE:2018/09/01

Article Name	Transparent PET Label	Construction	PET PPB PET liner
Code	P027Z		

Surface Material			Liner		
Article Name		PET	Article Name		PET
Thickness	mm	0.025±5%	Thickness	mm	0.025±5%
Base Weight	g/m^2	~	Base Weight	g/m^2	~
Tensile Strength	kg/25mm	9↑	Tensile Strength	kg/25mm	~
Elongation	%	70↑	Elongation	%	~
Color		Transparent	Color		Transparent
Smoothness		Excellent	Smoothness		Good
Printability		Good			

Physical Properties					
Adhesive Base		Acrylic Adhesiv	Release Force	g/25mm	3~15
Coating Thickness	mm	0.015±0.002	Weathering Resistance		Good
Dry Coating Weight	g/m^2	17±3	Temperature Range	℃	-5~125
Initial Tack	#7/cm	1~20	Solvent Resistance		Excellent
180° Peel Adhesion	kg/25mm	0.6~1.5			

Remark:1.Test condition : 23℃±2℃, 65%±5% R.H.

2.Storage condition:23℃,65% R.H. Shelf Life:one year;

3.Above information is for reference only and should not be as inspection standard.

品保部

Valid Period of the Document:2 Years

Form Number: R-04-031-01

SYMBIO (DONGGUAN) CO.,LTD