FCC TEST REPORT

(PART 15, SUBPART E, 15.407)

REPORT NO.: RF950609L14
MODEL NO.: WMIA-166AG(R)
RECEIVED: Apr. 05, 2006
TESTED: Apr. 05 ~ Jun. 30, 2006
ISSUED: Jul. 04, 2006

APPLICANT: Gemtek Technology Co., Ltd.

ADDRESS: No.1, Jen Ai Road, Hsinchu Industrial Park, Hukou Hsinchu, Taiwan, R.O.C. 303

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 72 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.

No. 2177-01

0528

Table of Contents

1. CERTIFICATION 4
2. SUMMARY OF TEST RESULTS 5
2.1 MEASUREMENT UNCERTAINTY 5
3. GENERAL INFORMATION 6
3.1 GENERAL DESCRIPTION OF EUT 6
3.2 DESCRIPTION OF TEST MODES 7
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST 7
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL: 8
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS 10
3.4 DESCRIPTION OF SUPPORT UNITS 10
4. TEST TYPES AND RESULTS 11
4.1 CONDUCTED EMISSION MEASUREMENT 11
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 11
4.1.2 TEST INSTRUMENTS 11
4.1.3 TEST PROCEDURES 12
4.1.4 DEVIATION FROM TEST STANDARD 12
4.1.5 TEST SETUP 13
4.1.6 EUT OPERATING CONDITIONS 13
4.1.7 TEST RESULTS 14
4.2 RADIATED EMISSION MEASUREMENT 16
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 16
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS 17
4.2.3 TEST INSTRUMENTS 18
4.2.4 TEST PROCEDURES 19
4.2.5 DEVIATION FROM TEST STANDARD 19
4.2.6 TEST SETUP 20
4.2.7 EUT OPERATING CONDITION 20
4.2.8 TEST RESULTS 21
4.3 PEAK TRANSMIT POWER MEASUREMENT 30
4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT 30
4.3.2 TEST INSTRUMENTS 30
4.3.3 TEST PROCEDURE 31
4.3.4 DEVIATION FROM TEST STANDARD 31

4.3.5 TEST SETUP 31
4.3.6 EUT OPERATING CONDITIONS 31
4.3.7 TEST RESULTS 32
4.4 PEAK POWER EXCURSION MEASUREMENT 42
4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT 42
4.4.2 TEST INSTRUMENTS 42
4.4.3 TEST PROCEDURE 43
4.4.4 DEVIATION FROM TEST STANDARD 43
4.4.5 TEST SETUP 43
4.4.6 EUT OPERATING CONDITIONS 43
4.4.7 TEST RESULTS 44
4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT 50
4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT 50
4.5.2 TEST INSTRUMENTS 50
4.5.3 TEST PROCEDURES 51
4.5.4 DEVIATION FROM TEST STANDARD 51
4.5.5 TEST SETUP 51
4.5.6 EUT OPERATING CONDITIONS 51
4.5.7 TEST RESULTS 52
4.6 FREQUENCY STABILITY 58
4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT 58
4.6.2 TEST INSTRUMENTS 58
4.6.3 TEST PROCEDURE 58
4.6.4 DEVIATION FROM TEST STANDARD 58
4.6.5 TEST SETUP 59
4.6.6 EUT OPERATING CONDITION 59
4.6.7 TEST RESULTS 60
4.7 BAND EDGES MEASUREMENT 61
4.7.1 TEST INSTRUMENTS 61
4.7.2 TEST PROCEDURE 61
4.7.3 EUT OPERATING CONDITION 61
4.7.4 TEST RESULTS 61
4.8 ANTENNA REQUIREMENT 70
4.8.1 STANDARD APPLICABLE 70
4.8.2 ANTENNA CONNECTED CONSTRUCTION 70
5. INFORMATION ON THE TESTING LABORATORIES 71

1. CERTIFICATION

PRODUCT: 11A/G mini PCI module
MODEL: WMIA-166AG(R)
BRAND: Gemtek
APPLICANT: Gemtek Technology Co., Ltd.
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Apr. 05 ~ Jun. 30, 2006
STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation,** and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Wendy Liao , **DATE:** Jul. 04, 2006
(Wendy Liao)

TECHNICAL ACCEPTANCE : Long Chen , **DATE:** Jul. 04, 2006
Responsible for RF
(Long Chen)

APPROVED BY : Gary Chang , **DATE:** Jul. 04, 2006
(Gary Chang / Supervisor)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart E (Section 15.407)			
Standard Section	**Test Type**	**Result**	**Remark**
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is –23.52dB at 9.766MHz
15.407(b/1/2/3)(b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is –1.13.dB at 15540.00MHz
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.55 dB
	200MHz ~1000MHz	3.58 dB
	1GHz ~ 18GHz	1.10 dB
	18GHz ~ 40GHz	0.91 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	11A/G mini PCI module
MODEL NO.	WMIA-166AG(R)
FCC ID	MXF-M950606AG
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b:11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11a: 54/48/36/24/18/12/9/6Mbps (up to 108Mbps in 802.11g & 802.11a turbo mode)
FREQUENCY RANGE	802.11b & 802.11g: 2.412 ~ 2.462GHz 802.11a: 5.150 ~ 5.350GHz and 5.725 ~ 5.850GHz
NUMBER OF CHANNEL	802.11b & 802.11g: 11 for Normal mode / 1 for Turbo mode 802.11a: 13 for Normal mode / 5 for Turbo mode
CHANNEL SPACING	802.11b & 802.11g: 5MHz 802.11a: 20MHz for Normal mode / 40MHz for Turbo mode
OUTPUT POWER	79.433mW for 802.11b 126.183mW for 802.11g 25.586mW for 5.150 ~ 5.350GHz 100.925mW for 5.725 ~ 5.850GHz
ANTENNA TYPE	Dipole antenna with 4dBi gain for 2.4GHz Dipole antenna with 5dBi gain for 5GHz
DATA CABLE	NA
I/O PORTS	NA

NOTE:

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
2. The EUT is capable of providing data rates of up to 108Mbps in 802.11g & 802.11a turbo mode depending upon reception quality.
3. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 5180 ~ 5320MHz

8 channels are provided to this EUT.

CHANNEL	FREQUENCY
1	5180 MHz
2	5200 MHz
3	5220 MHz
4	5240 MHz
5	5260 MHz
6	5280 MHz
7	5300 MHz
8	5320 MHz

3 channels are provided to this EUT for turbo mode.

CHANNEL	FREQUENCY
1	5210 MHz
2	5250 MHz
3	5290 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

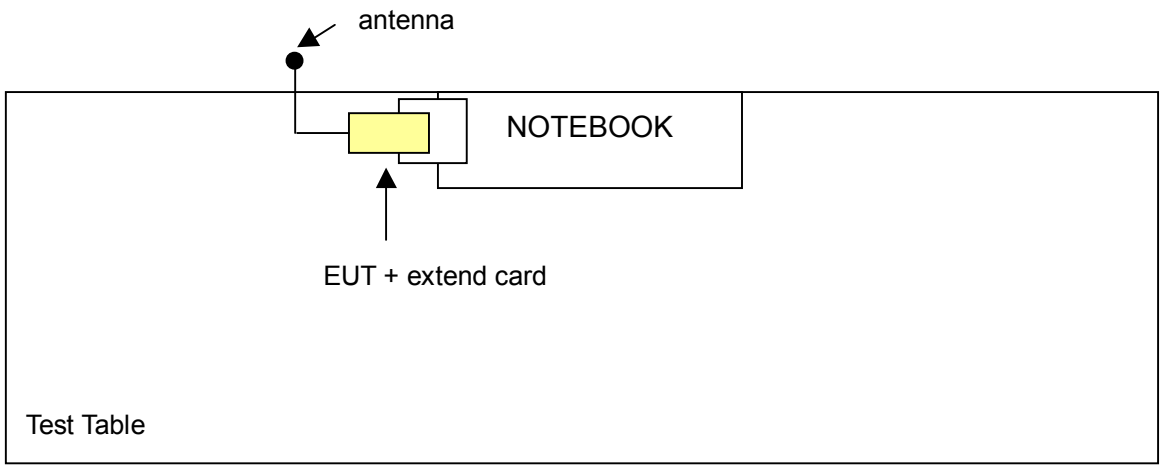

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	-

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 8	5	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 8	5	OFDM	BPSK	6
802.11a Turbo	1 to 3	3	OFDM	QPSK	12

Radiated Emission Test (Above 1 GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 8	1, 4, 5, 8	OFDM	BPSK	6
802.11a Turbo	1 to 3	1, 2, 3	OFDM	QPSK	12

Bandedge Measurement:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 8	1, 8	OFDM	BPSK	6
802.11a Turbo	1 to 3	1, 3	OFDM	QPSK	12

Antenna Port Conducted Measurement:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 8	1, 4, 5, 8	OFDM	BPSK	6
802.11a Turbo	1 to 3	1, 2, 3	OFDM	QPSK	12

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	9954115984	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5 0.5-5 5-30	66 to 56 56 60	56 to 46 46 50

NOTE:
1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 11, 2006
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 06, 2007
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2007
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 07, 2007
Software ADT	ADT_Cond_V3	NA	NA

NOTE:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.

4.1.3 TEST PROCEDURES

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

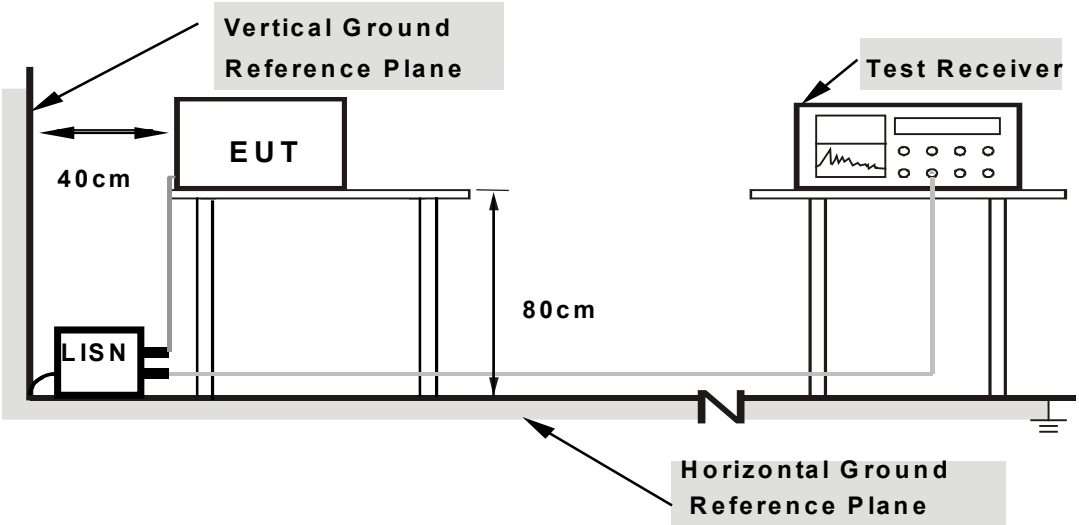

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

a. Connected the EUT into the notebook system and placed on a testing table.
b. The computer system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
c. The notebook system displayed “H” messages on its screen.
d. Repeated item c.

4.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Long Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	40.23	-	40.33	-	65.79	55.79	-25.46	-
2	0.240	0.10	37.48	-	37.58	-	62.10	52.10	-24.52	-
3	1.934	0.20	25.52	-	25.72	-	56.00	46.00	-30.28	-
4	4.109	0.47	24.11	-	24.58	-	56.00	46.00	-31.42	-
5	10.184	0.47	35.94	-	36.41	-	60.00	50.00	-23.59	-
6	18.605	0.77	30.29	-	31.06	-	60.00	50.00	-28.94	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

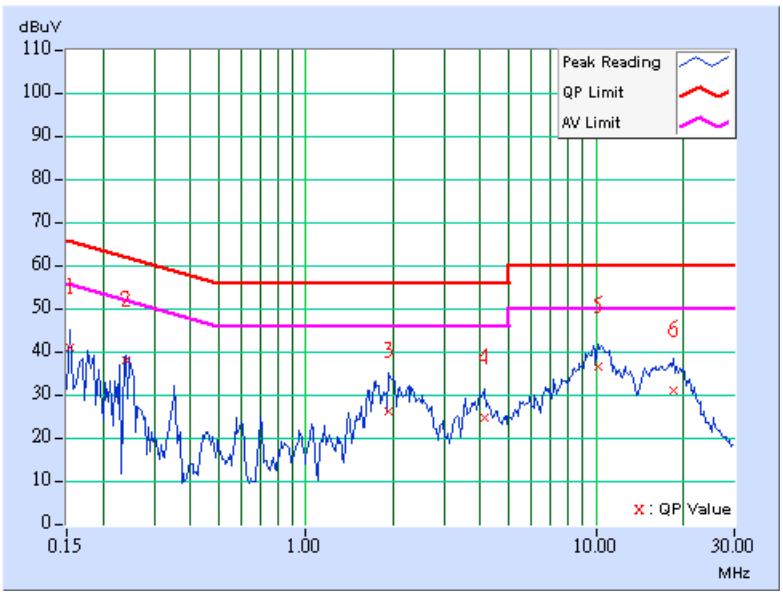

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Long Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	38.73	-	38.83	-	65.38	55.38	-26.55	-
2	0.248	0.10	37.33	-	37.43	-	61.84	51.84	-24.41	-
3	2.207	0.22	26.66	-	26.88	-	56.00	46.00	-29.12	-
4	4.000	0.37	24.67	-	25.04	-	56.00	46.00	-30.96	-
5	**9.766**	**0.46**	**36.02**	**-**	**36.48**	**-**	**60.00**	**50.00**	**-23.52**	**-**
6	17.727	0.58	30.60	-	31.18	-	60.00	50.00	-28.82	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

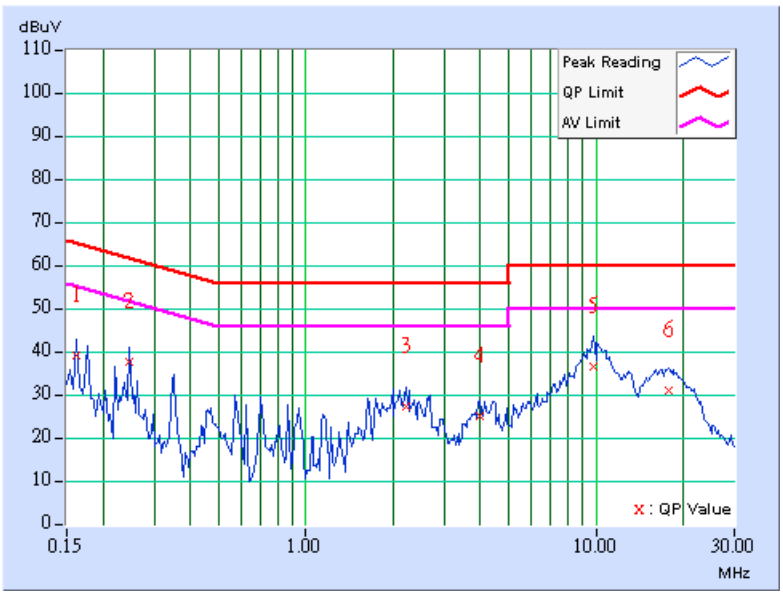

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E=\frac{1000000\sqrt{30P}}{3}$$ μV/m, where P is the eirp (Watts)

4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Jan. 01, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 04, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 15, 2007
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 01, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 19, 2007
Preamplifier Agilent	8449B	3008A01960	Nov. 09, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219268/4	Dec. 20, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	230129/4	Dec. 20, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA
26GHz ~ 40GHz Amplifier	AMF-6F-2600400	900619	Nov. 13, 2006

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 3.

3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

4. The IC Site Registration No. is IC4924-4.

4.2.4 TEST PROCEDURES

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

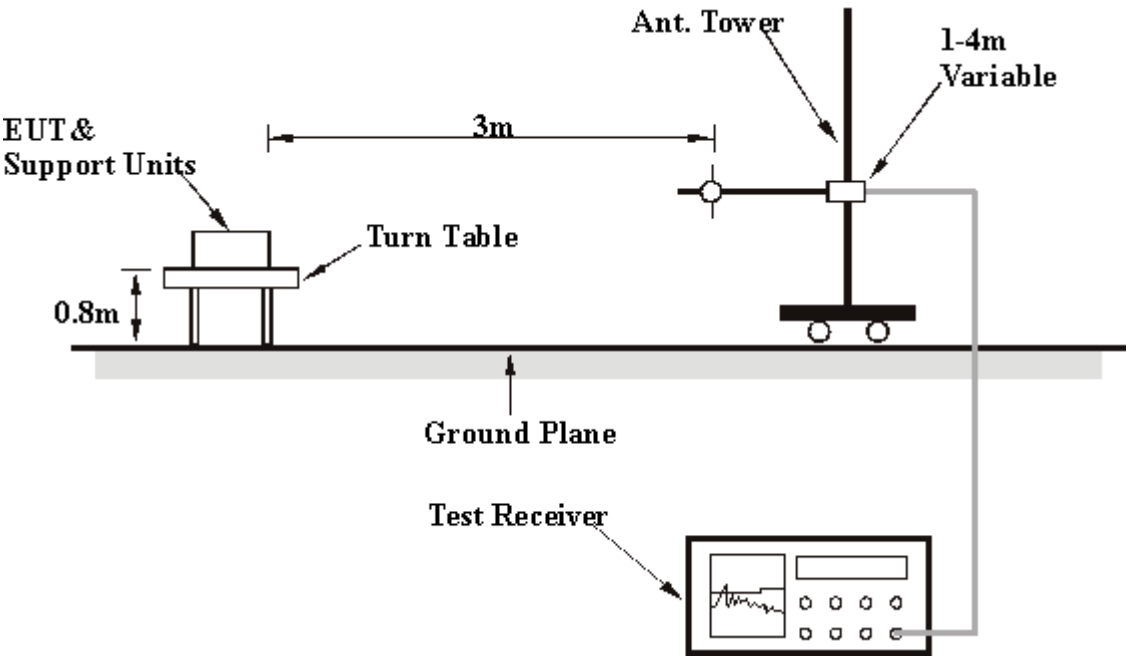

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

4.2.8 TEST RESULTS

Below 1GHz Worst-Case Data

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	**FREQUENCY RANGE**	Below 1000MHz
MODULATION TYPE	BPSK	**DETECTOR FUNCTION**	Quasi-Peak
TRANSFER RATE	6Mbps	**ENVIRONMENTAL CONDITIONS**	24deg. C, 64%RH, 991hPa
TESTED BY	Brad Wu	**INPUT POWER (SYSTEM)**	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.03	36.40 QP	43.50	-7.10	1.50 H	142	23.85	12.55
2	166.07	40.86 QP	43.50	-2.64	1.00 H	271	28.03	12.83
3	199.12	41.97 QP	43.50	-1.53	1.00 H	271	31.17	10.81
4	232.16	36.48 QP	46.00	-9.52	1.00 H	154	24.64	11.84
5	265.21	35.64 QP	46.00	-10.36	1.25 H	160	22.33	13.31
6	331.30	37.72 QP	46.00	-8.28	1.00 H	157	21.86	15.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.38	32.22 QP	40.00	-7.78	1.25 V	208	17.99	14.23
2	133.03	32.47 QP	43.50	-11.03	1.00 V	298	19.92	12.55
3	199.12	33.46 QP	43.50	-10.04	1.00 V	346	22.65	10.81
4	331.30	28.68 QP	46.00	-17.32	1.25 V	94	12.82	15.86
5	531.52	30.80 QP	46.00	-15.20	1.00 V	187	10.19	20.61
6	665.65	31.79 QP	46.00	-14.21	1.50 V	100	8.35	23.44

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

Below 1GHz Worst-Case Data (Turbo mode)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa
TESTED BY	Brad Wu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.03	35.09 QP	43.50	-8.41	1.25 H	157	22.54	12.55
2	166.07	35.91 QP	43.50	-7.59	1.00 H	163	23.08	12.83
3	199.12	41.28 QP	43.50	-2.22	1.00 H	130	30.48	10.81
4	232.16	37.63 QP	46.00	-8.37	1.00 H	163	25.79	11.84
5	267.15	42.38 QP	46.00	-3.62	1.50 H	259	28.75	13.63
6	331.30	40.27 QP	46.00	-5.73	1.00 H	130	24.41	15.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.03	33.17 QP	43.50	-10.33	1.25 V	163	20.62	12.55
2	166.07	30.55 QP	43.50	-12.95	1.00 V	298	17.71	12.83
3	199.12	32.95 QP	43.50	-10.55	1.25 V	157	22.14	10.81
4	267.15	30.31 QP	46.00	-15.69	1.00 V	91	16.68	13.63
5	405.17	30.59 QP	46.00	-15.41	1.00 V	121	12.70	17.89
6	665.65	34.79 QP	46.00	-11.21	1.00 V	91	11.35	23.44

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

802.11a OFDM modulation

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	**FREQUENCY RANGE**	1 ~ 40 GHz
MODULATION TYPE	BPSK	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	**ENVIRONMENTAL CONDITIONS**	24deg. C, 64%RH, 991hPa
TESTED BY	Brad Wu	**INPUT POWER (SYSTEM)**	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	47.02 PK	74.00	-26.98	1.01 H	208	7.74	39.28
1	#5150.00	36.98 AV	54.00	-17.02	1.01 H	208	-2.30	39.28
2	*5180.00	101.14 PK			1.01 H	208	61.83	39.31
2	*5180.00	91.10 AV			1.01 H	208	51.79	39.31
3	10360.00	59.86 PK	68.30	-8.44	1.05 H	65	9.59	50.27
4	#15540.00	64.69 PK	74.00	-9.31	1.05 H	204	13.28	51.41
4	#15540.00	51.20 AV	54.00	-2.80	1.05 H	204	-0.21	51.41

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	59.30 PK	74.00	-14.70	1.30 V	182	20.02	39.28
1	#5150.00	49.29 AV	54.00	-4.71	1.30 V	182	10.01	39.28
2	*5180.00	111.42 PK			1.30 V	182	72.11	39.31
2	*5180.00	101.41 AV			1.30 V	182	62.10	39.31
3	10360.00	63.56 PK	68.30	-4.74	1.55 V	6	13.29	50.27
4	#15540.00	67.45 PK	74.00	-6.55	1.26 V	209	16.04	51.41
4	**#15540.00**	**52.87 AV**	**54.00**	**-1.13**	**1.26 V**	**209**	**1.46**	**51.41**

NOTE:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value
5. "*" : Fundamental frequency
6. "#"The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	**FREQUENCY RANGE**	1 ~ 40 GHz
MODULATION TYPE	BPSK	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	**ENVIRONMENTAL CONDITIONS**	24deg. C, 64%RH, 991hPa
TESTED BY	Brad Wu	**INPUT POWER (SYSTEM)**	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	101.03 PK			1.02 H	213	61.67	39.36
1	*5240.00	91.00 AV			1.02 H	213	51.64	39.36
2	10480.00	59.99 PK	68.30	-8.31	1.10 H	24	9.41	50.58
3	#15720.00	64.83 PK	74.00	-9.17	1.14 H	22	13.56	51.27
3	#15720.00	51.49 AV	54.00	-2.51	1.14 H	22	0.22	51.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	111.30 PK			1.28 V	180	71.94	39.36
1	*5240.00	101.25 AV			1.28 V	180	61.89	39.36
2	10480.00	63.69 PK	68.30	-4.61	1.52 V	11	13.11	50.58
3	#15720.00	67.38 PK	74.00	-6.62	1.23 V	159	16.11	51.27
3	#15720.00	52.74 AV	54.00	-1.26	1.23 V	159	1.47	51.27

NOTE:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value
5. “*” : Fundamental frequency
6. “#”The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 5	**FREQUENCY RANGE**	1 ~ 40 GHz
MODULATION TYPE	BPSK	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	**ENVIRONMENTAL CONDITIONS**	24deg. C, 64%RH, 991hPa
TESTED BY	Brad Wu	**INPUT POWER (SYSTEM)**	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	101.14 PK			1.05 H	207	61.76	39.38
1	*5260.00	91.12 AV			1.05 H	207	51.74	39.38
2	10520.00	59.87 PK	68.30	-8.43	1.25 H	278	9.17	50.70
3	#15780.00	64.95 PK	74.00	-9.05	1.13 H	29	13.72	51.23
3	#15780.00	51.66 AV	54.00	-2.34	1.13 H	29	0.43	51.23

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	111.25 PK			1.27 V	184	71.87	39.38
1	*5260.00	101.20 AV			1.27 V	184	61.82	39.38
2	10520.00	63.84 PK	68.30	-4.46	1.43 V	27	13.14	50.70
3	#15780.00	67.24 PK	74.00	-6.76	1.20 V	133	16.01	51.23
3	#15780.00	52.60 AV	54.00	-1.40	1.20 V	133	1.37	51.23

NOTE:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value
5. “*” : Fundamental frequency
6. “#”The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 8	**FREQUENCY RANGE**	1 ~ 40 GHz
MODULATION TYPE	BPSK	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	**ENVIRONMENTAL CONDITIONS**	24deg. C, 64%RH, 991hPa
TESTED BY	Brad Wu	**INPUT POWER (SYSTEM)**	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	101.23 PK			1.09 H	211	61.80	39.43
1	*5320.00	91.20 AV			1.09 H	211	51.77	39.43
2	#5350.00	47.39 PK	74.00	-26.61	1.09 H	211	7.93	39.46
2	#5350.00	37.14 AV	54.00	-16.86	1.09 H	211	-2.32	39.46
3	#10640.00	61.84 PK	74.00	-12.16	1.10 H	74	10.85	50.99
3	#10640.00	49.49 AV	54.00	-4.51	1.10 H	74	-1.50	50.99
4	#15960.00	66.24 PK	74.00	-7.76	1.04 H	32	15.14	51.10
4	#15960.00	51.65 AV	54.00	-2.35	1.04 H	32	0.55	51.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.30 PK			1.25 V	188	71.87	39.43
1	*5320.00	101.26 AV			1.25 V	188	61.83	39.43
2	#5350.00	62.76 PK	74.00	-11.24	1.25 V	188	23.30	39.46
2	#5350.00	51.98 AV	54.00	-2.02	1.25 V	188	12.52	39.46
3	#10640.00	63.72 PK	74.00	-10.28	1.13 V	69	12.73	50.99
3	#10640.00	51.31 AV	54.00	-2.69	1.13 V	69	0.32	50.99
4	#15960.00	67.35 PK	74.00	-6.65	1.10 V	19	16.25	51.10
4	#15960.00	52.77 AV	54.00	-1.23	1.10 V	19	1.67	51.10

NOTE:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value
5. “*” : Fundamental frequency
6. “#”The radiated frequency falling in the restricted band.

802.11a Turbo OFDM modulation

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa
TESTED BY	Brad Wu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB)
1	#5150.00	49.71 PK	74.00	-24.29	1.35 H	40	10.43	39.28
1	#5150.00	40.02 AV	54.00	-13.98	1.35 H	40	0.74	39.28
2	*5210.00	100.11 PK			1.35 H	40	60.77	39.34
2	*5210.00	90.42 AV			1.35 H	40	51.08	39.34
3	10420.00	59.36 PK	68.30	-8.94	1.09 H	134	8.96	50.40
4	#15630.00	65.23 PK	74.00	-8.77	1.18 H	74	13.87	51.36
4	#15630.00	49.61 AV	54.00	-4.39	1.18 H	74	-1.75	51.36

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB)
1	#5150.00	59.29 PK	74.00	-14.71	1.04 V	230	20.01	39.28
1	#5150.00	50.28 AV	54.00	-3.72	1.04 V	230	11.00	39.28
2	*5210.00	107.69 PK			1.04 V	229	68.35	39.34
2	*5210.00	98.68 AV			1.04 V	229	59.34	39.34
3	10420.00	61.14 PK	68.30	-7.16	1.21 V	229	10.74	50.40
4	#15630.00	68.46 PK	74.00	-5.54	1.23 V	211	17.10	51.36
4	#15630.00	52.86 AV	54.00	-1.14	1.23 V	211	1.50	51.36

NOTE:

1. Emission level = Raw value + Correction Factor.
2. Correction Factor = Ant. Factor + Cable loss.
3. Margin value = Emission level - Limit value.
4. The other emission levels were very low against the limit.
5. “*” : Fundamental frequency.
6. “#”The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 2	**FREQUENCY RANGE**	1 ~ 40 GHz
MODULATION TYPE	QPSK	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
TRANSFER RATE	12Mbps	**ENVIRONMENTAL CONDITIONS**	24deg. C, 64%RH, 991hPa
TESTED BY	Brad Wu	**INPUT POWER (SYSTEM)**	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB)
1	*5250.00	100.24 PK			1.31 H	50	60.87	39.37
1	*5250.00	90.57 AV			1.31 H	50	51.20	39.37
2	10500.00	60.45 PK	68.30	-7.85	1.12 H	139	9.81	50.64
3	#15750.00	65.47 PK	74.00	-8.53	1.10 H	42	14.22	51.25
3	#15750.00	49.85 AV	54.00	-4.15	1.10 H	42	-1.40	51.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB)
1	*5250.00	107.89 PK			1.05 V	230	68.52	39.37
1	*5250.00	98.85 AV			1.05 V	230	59.48	39.37
2	10500.00	61.38 PK	68.30	-6.92	1.20 V	231	10.74	50.64
3	#15750.00	68.35 PK	74.00	-5.65	1.21 V	235	17.10	51.25
3	#15750.00	52.71 AV	54.00	-1.29	1.21 V	235	1.46	51.25

NOTE:

1. Emission level = Raw value + Correction Factor.
2. Correction Factor = Ant. Factor + Cable loss.
3. Margin value = Emission level - Limit value.
4. The other emission levels were very low against the limit.
5. “*” : Fundamental frequency.
6. “#”The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	**FREQUENCY RANGE**	1 ~ 40 GHz
MODULATION TYPE	QPSK	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
TRANSFER RATE	12Mbps	**ENVIRONMENTAL CONDITIONS**	24deg. C, 64%RH, 991hPa
TESTED BY	Brad Wu	**INPUT POWER (SYSTEM)**	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB)
1	*5290.00	100.02 PK			1.34 H	42	60.62	39.40
1	*5290.00	90.30 AV			1.34 H	42	50.90	39.40
2	#5350.00	49.86 PK	74.00	-24.14	1.34 H	42	10.40	39.46
2	#5350.00	40.18 AV	54.00	-13.82	1.34 H	42	0.72	39.46
3	10580.00	60.47 PK	68.30	-7.83	1.13 H	105	9.61	50.86
4	15870.00	65.54 PK	74.00	-8.46	1.11 H	44	14.36	51.19
4	15870.00	49.92 AV	54.00	-4.08	1.11 H	44	-1.27	51.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB)
1	*5290.00	107.54 PK			1.05 V	231	68.14	39.40
1	*5290.00	98.51 AV			1.05 V	231	59.11	39.40
2	#5350.00	59.11 PK	74.00	-14.89	1.05 V	231	19.65	39.46
2	#5350.00	50.09 AV	54.00	-3.91	1.05 V	231	10.63	39.46
3	10580.00	61.38 PK	68.30	-6.92	1.14 V	106	10.52	50.86
4	15870.00	68.23 PK	74.00	-5.77	1.20 V	209	17.05	51.19
4	15870.00	52.64 AV	54.00	-1.36	1.20 V	209	1.45	51.19

NOTE:

1. Emission level = Raw value + Correction Factor.
2. Correction Factor = Ant. Factor + Cable loss.
3. Margin value = Emission level - Limit value.
4. The other emission levels were very low against the limit.
5. “*” : Fundamental frequency.
6. “#”The radiated frequency falling in the restricted band.

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 ~ 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 ~ 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 3MHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

NOTE:
The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS

802.11a OFDM modulation

MODULATION TYPE	BPSK	**TRANSFER RATE**	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**ENVIRONMENTAL CONDITIONS**	24deg.C, 64%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
1	5180	25.351	14.04	17.00	29.26	PASS
4	5240	25.586	14.08	17.00	28.42	PASS
5	5260	25.235	14.02	24.00	29.26	PASS
8	5320	25.586	14.08	24.00	25.76	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.

Peak Power Output:

CH 1

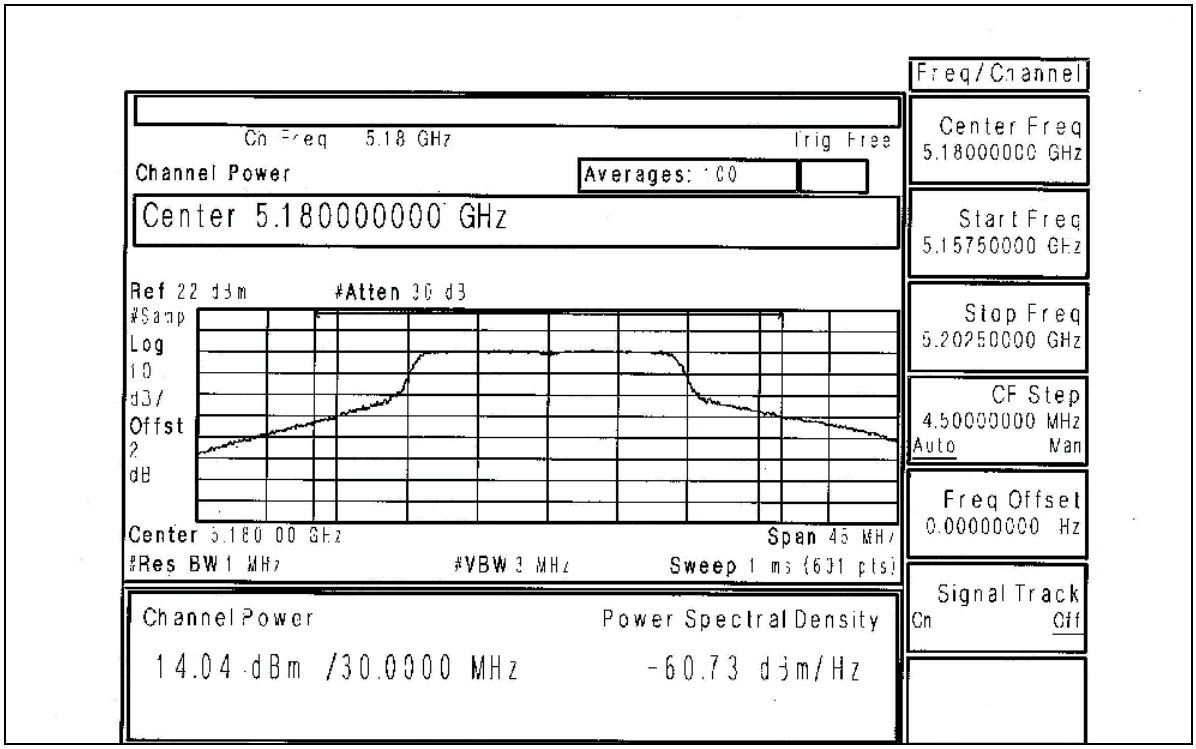

CH 4

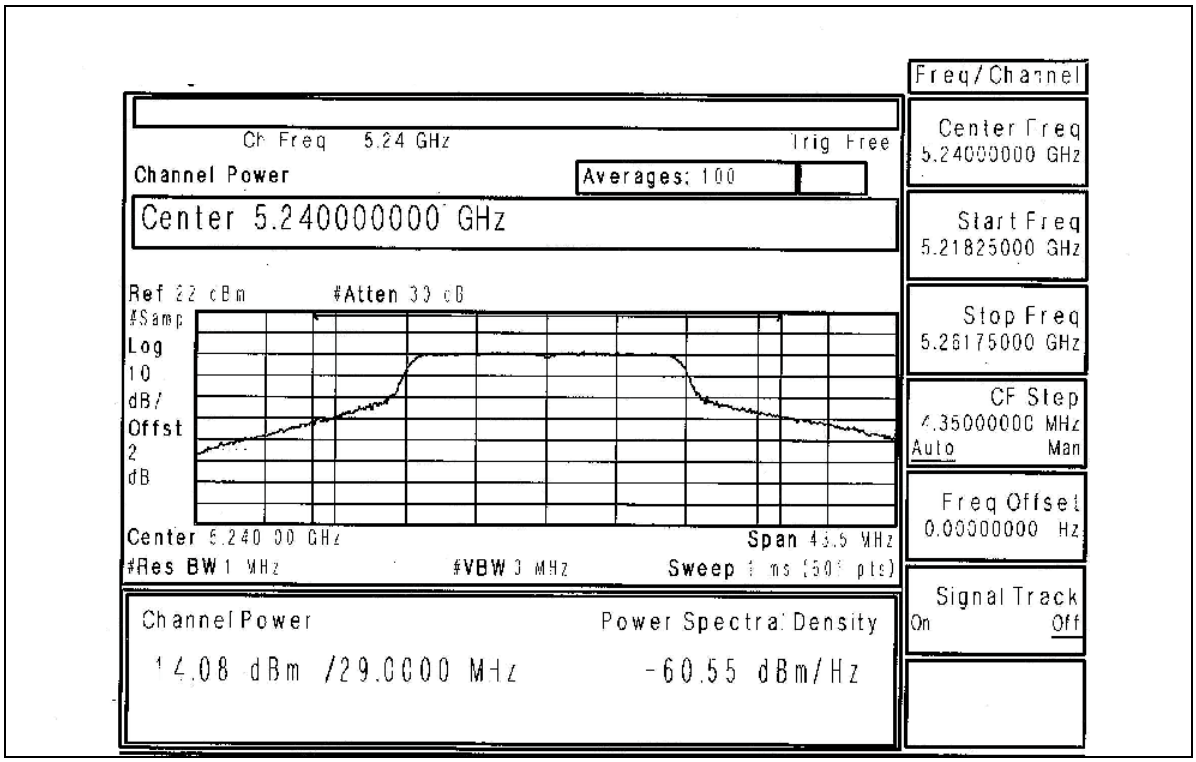

CH 5

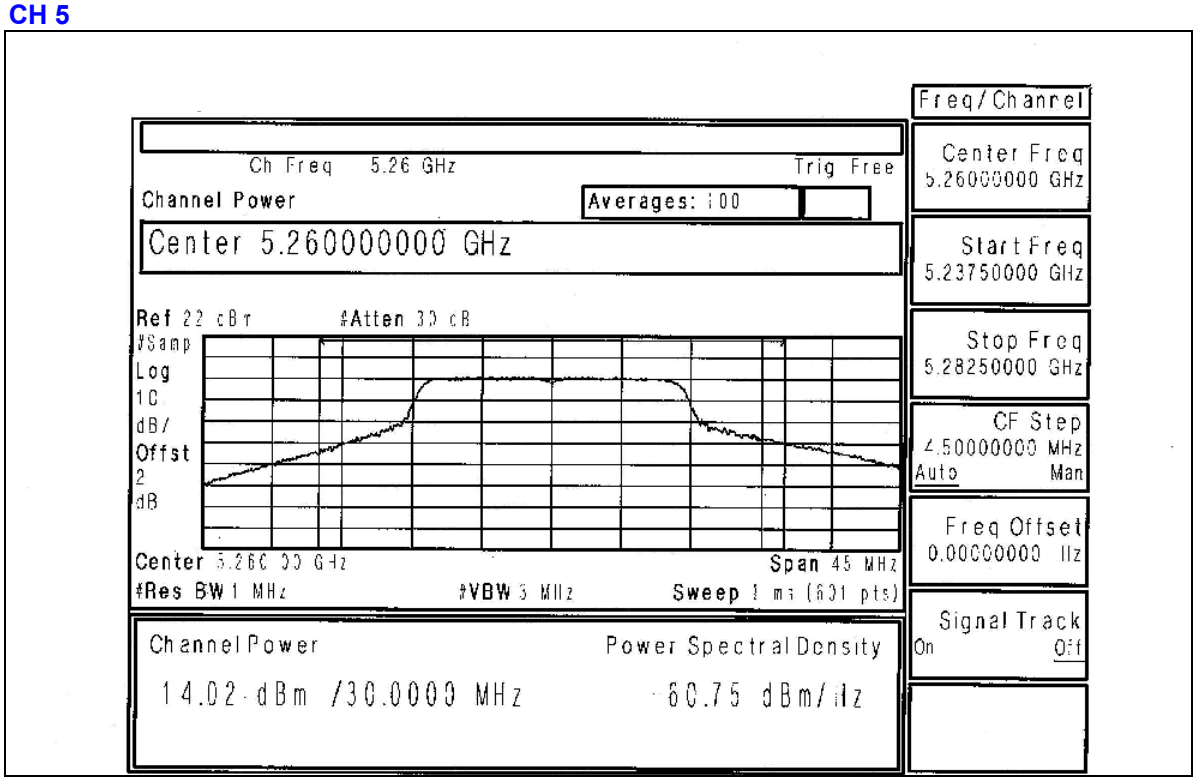
Freq/Channel
Ch Freq 5.26 GHz
Trig Free
Channel Power
Averages: 100
Center 5.260000000 GHz
Center Freq 5.26000000 GHz
Start Freq 5.23750000 GHz
Stop Freq 5.28250000 GHz
CF Step 4.50000000 MHz
Auto Man
Freq Offset 0.00000000 Hz
Signal Track
On Off
Ref 22 dBm
#Atten 30 dB
Log
10
dB/
Offst
2
dB
Span 45 MHz
#Res BW 1 MHz
#VBW 3 MHz
Channel Power
Power Spectral Density
14.02 dBm /30.0000 MHz
-60.75 dBm/Hz

CH 8

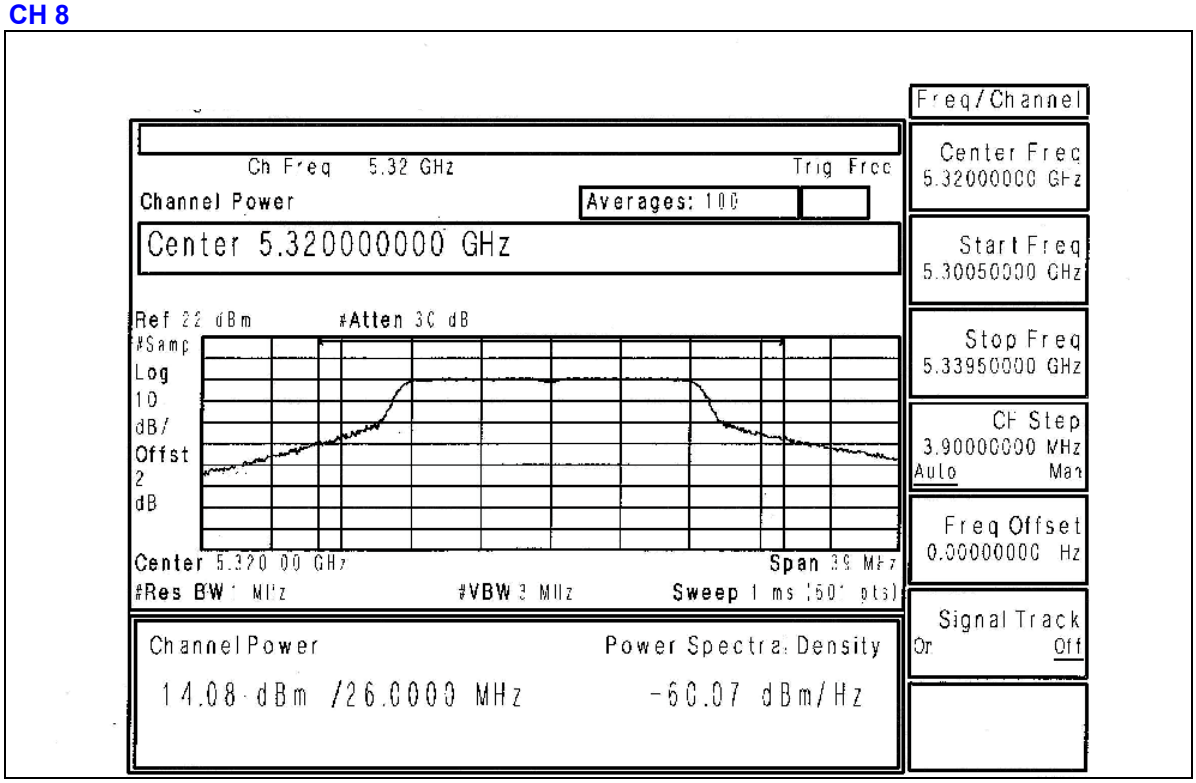
Freq/Channel
Ch Freq 5.32 GHz
Trig Free
Channel Power
Averages: 100
Center 5.320000000 GHz
Center Freq 5.32000000 GHz
Start Freq 5.30050000 GHz
Stop Freq 5.33950000 GHz
CF Step 3.90000000 MHz
Auto Man
Freq Offset 0.00000000 Hz
Signal Track
On Off
Ref 22 dBm
#Atten 30 dB
Log
10
dB/
Offst
2
dB
Span 39 MHz
#Res BW 1 MHz
#VBW 3 MHz
Channel Power
Power Spectral Density
14.08 dBm /26.0000 MHz
-60.07 dBm/Hz

26dB Occupied Bandwidth:

CH 1

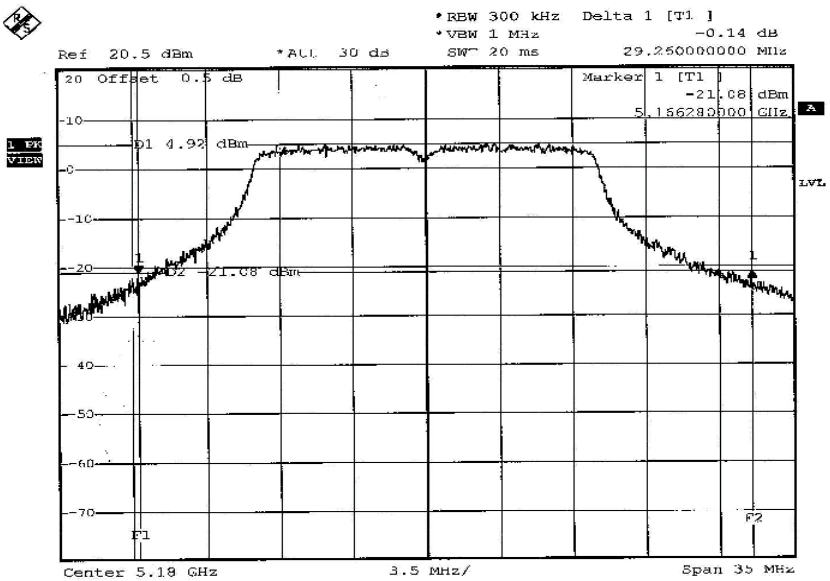

CH 4

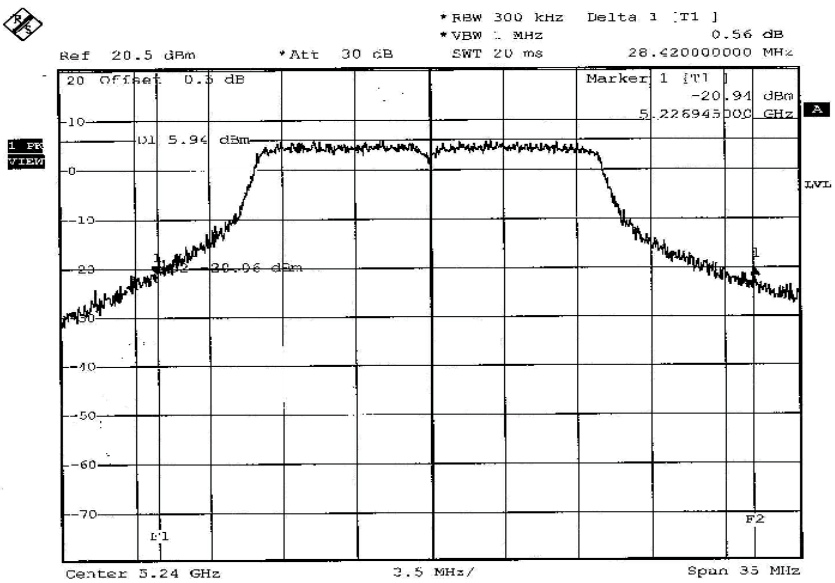

CH 5

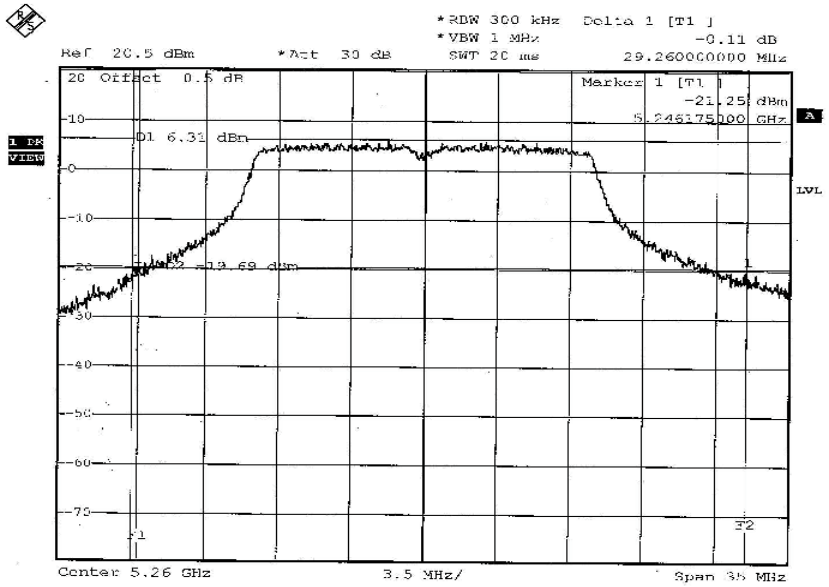
*RBW 300 kHz
*VBW 1 MHz
SWT 20 ms
Delta 1 [T1]
-0.11 dB
29.260000000 MHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 1 [T1]
-21.25 dBm
5.246175000 GHz
D1 6.31 dBm
LVL
F1
F2
Center 5.26 GHz
3.5 MHz/
Span 35 MHz

CH 8

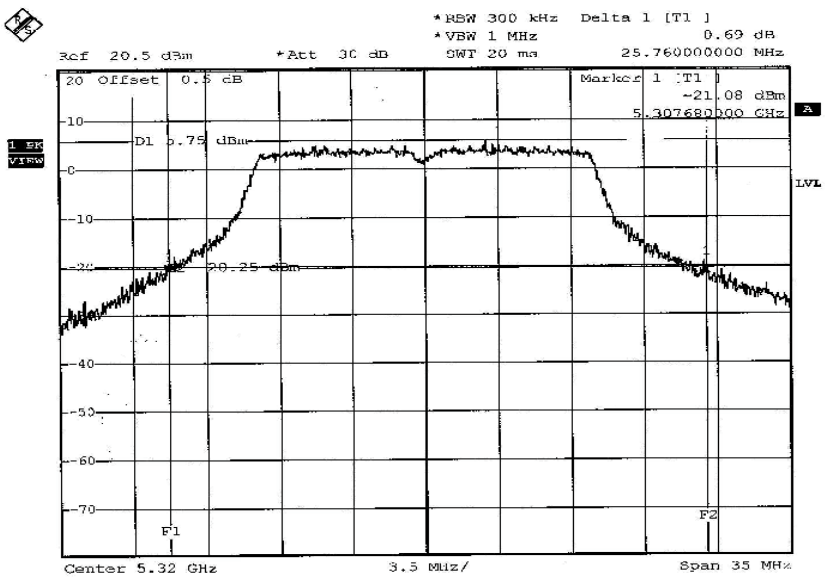
*RBW 300 kHz
*VBW 1 MHz
SWT 20 ms
Delta 1 [T1]
0.69 dB
25.760000000 MHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 1 [T1]
-21.08 dBm
5.307680000 GHz
D1 5.75 dBm
LVL
F1
F2
Center 5.32 GHz
3.5 MHz/
Span 35 MHz

802.11a Turbo OFDM modulation

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc OCCUPIED BANDWIDTH (MHz)	PASS/FAIL
1	5210	25.235	14.02	17.00	47.16	PASS
2	5250	25.468	14.06	17.00	47.04	PASS
3	5290	25.293	14.03	24.00	48.12	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.

Peak Power Output:

CH 1

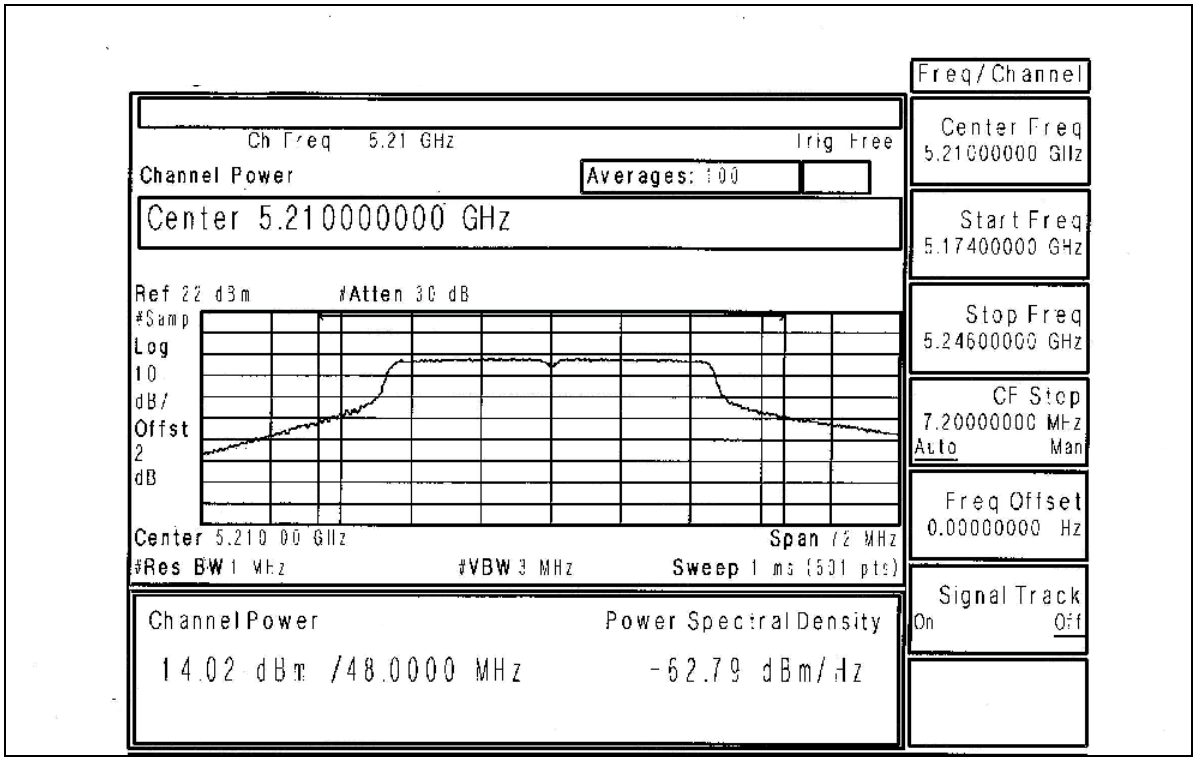

CH 2

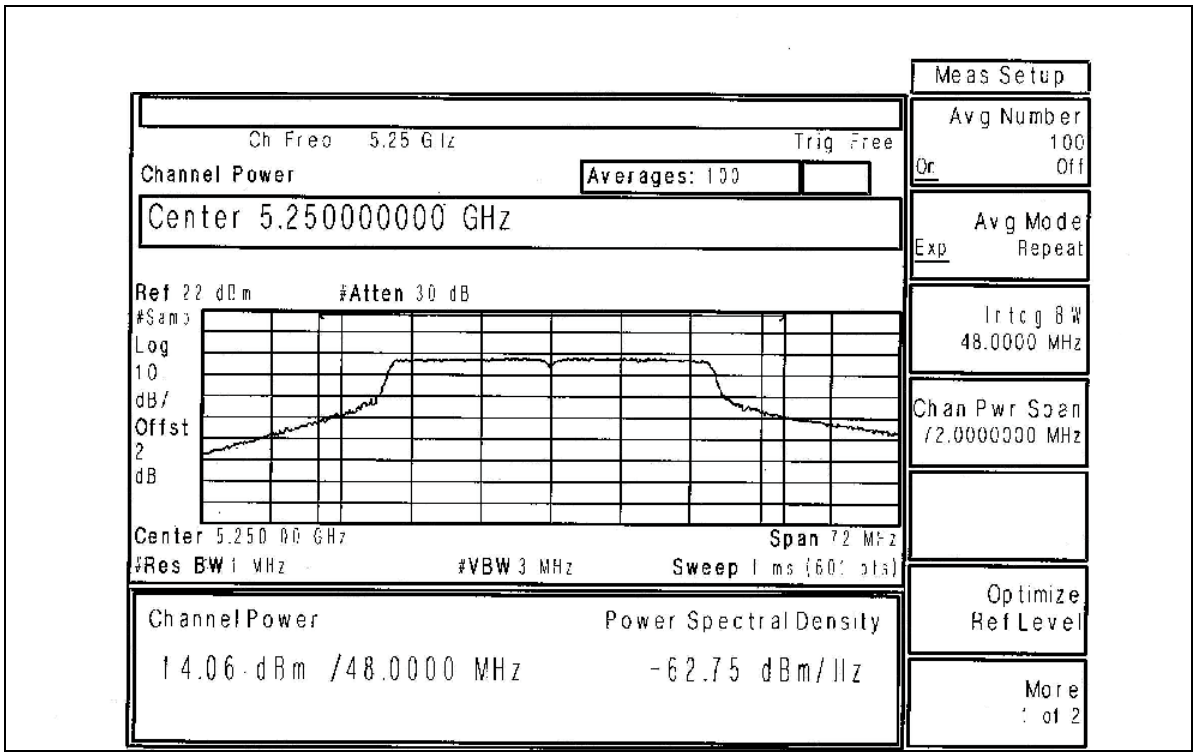

CH 3

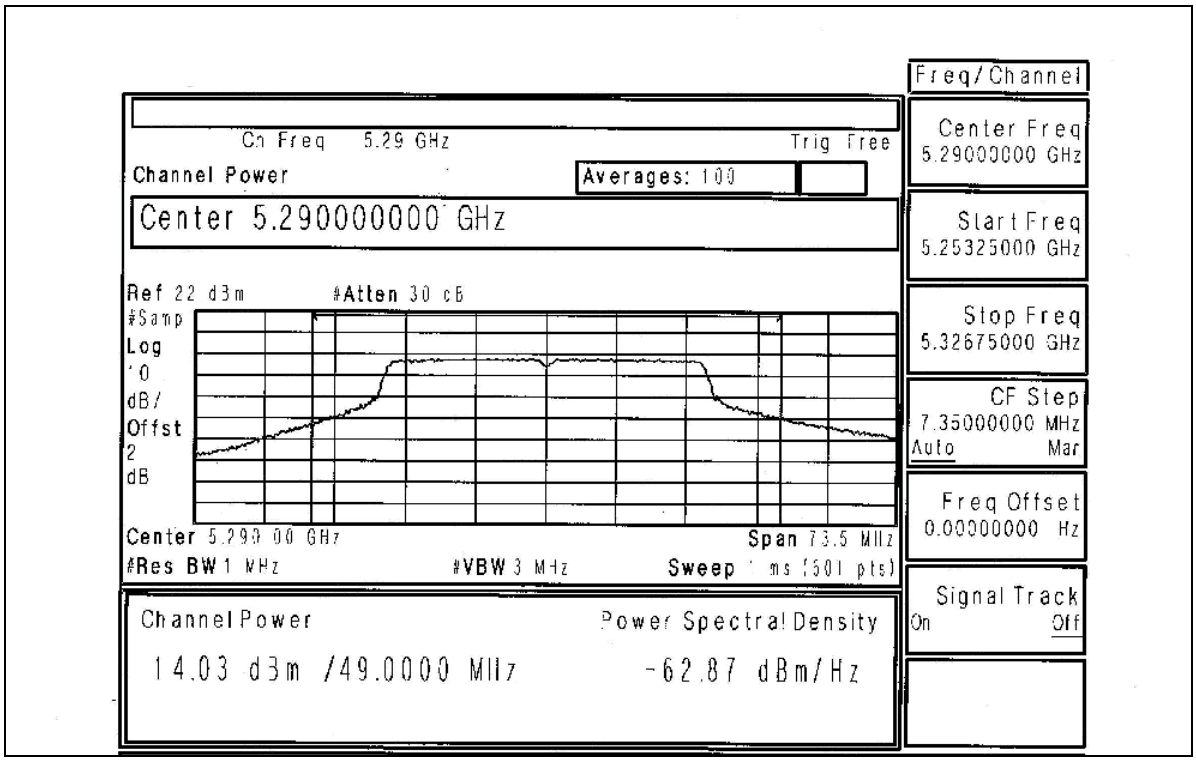
Freq/Channel
Ch Freq 5.29 GHz
Trig Free
Channel Power
Averages: 100
Center 5.290000000 GHz
Center Freq
5.29000000 GHz
Start Freq
5.25325000 GHz
Stop Freq
5.32675000 GHz
CF Step
7.35000000 MHz
Auto Man
Freq Offset
0.00000000 Hz
Signal Track
On Off
Ref 22 dBm
#Atten 30 dB
#Samp
Log
10
dB/
Offst
2
dB
Center 5.290 00 GHz
Span 73.5 MHz
#Res BW 1 MHz
#VBW 3 MHz
Sweep ms (501 pts)
Channel Power
Power Spectral Density
14.03 dBm /49.0000 MHz
-62.87 dBm/Hz

26dB Occupied Bandwidth:

CH 1

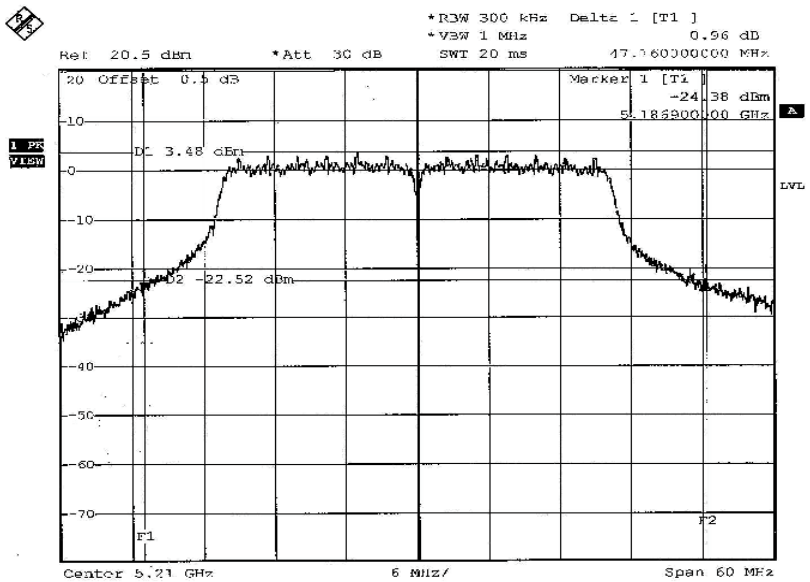

CH 2

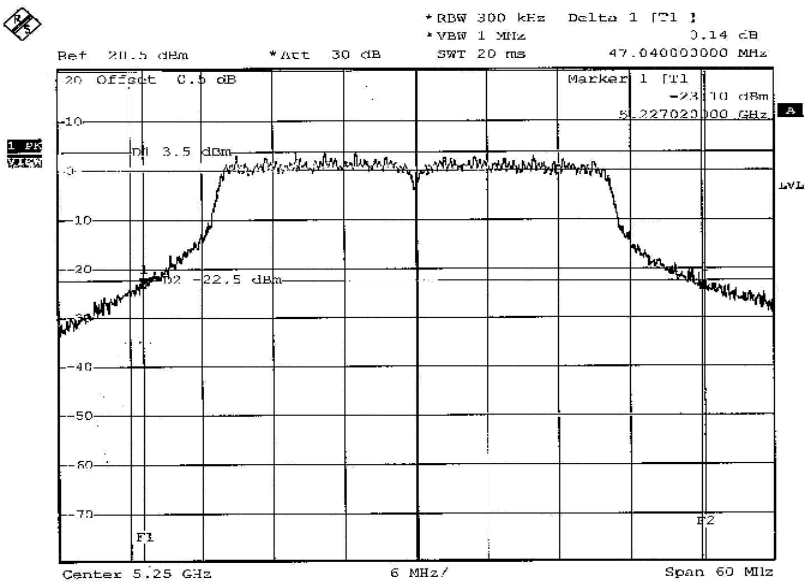

CH 3

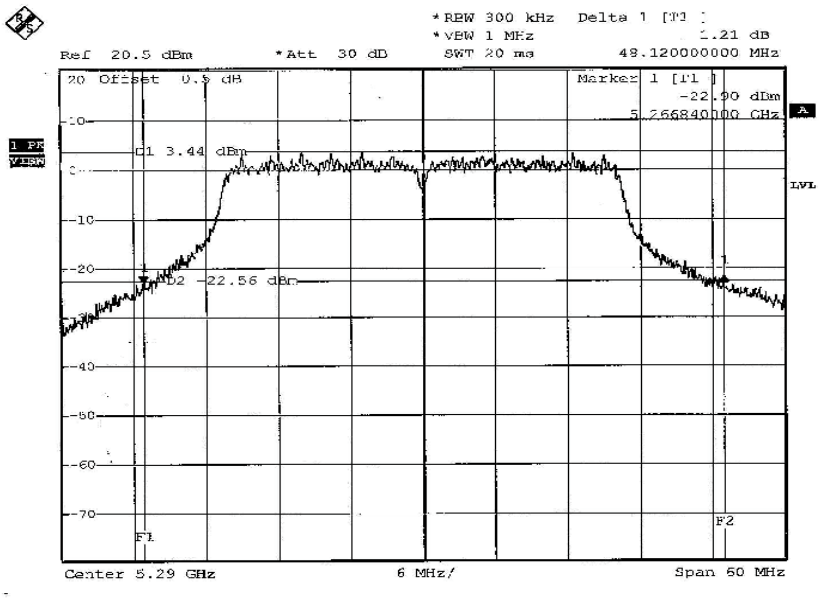
*RBW 300 kHz
*VBW 1 MHz
SWT 20 ms
Ref 20.5 dBm
*Att 30 dB
Offset 0.5 dB
Marker 1 [T1]
-22.90 dBm
5.266840000 GHz
C1 3.44 dBm
D2 -22.56 dBm
F1
F2
Center 5.29 GHz
6 MHz/
Span 60 MHz

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25 GHz	13dB
5.25 ~ 5.35 GHz	13dB
5.725 ~ 5.825 GHz	13dB

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300kHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.4.7 TEST RESULTS

802.11a OFDM modulation

MODULATION TYPE	BPSK	**TRANSFER RATE**	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**ENVIRONMENTAL CONDITIONS**	24deg.C, 64%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5180	7.24	13	PASS
4	5240	7.22	13	PASS
5	5260	7.26	13	PASS
8	5320	7.16	13	PASS

CH 1

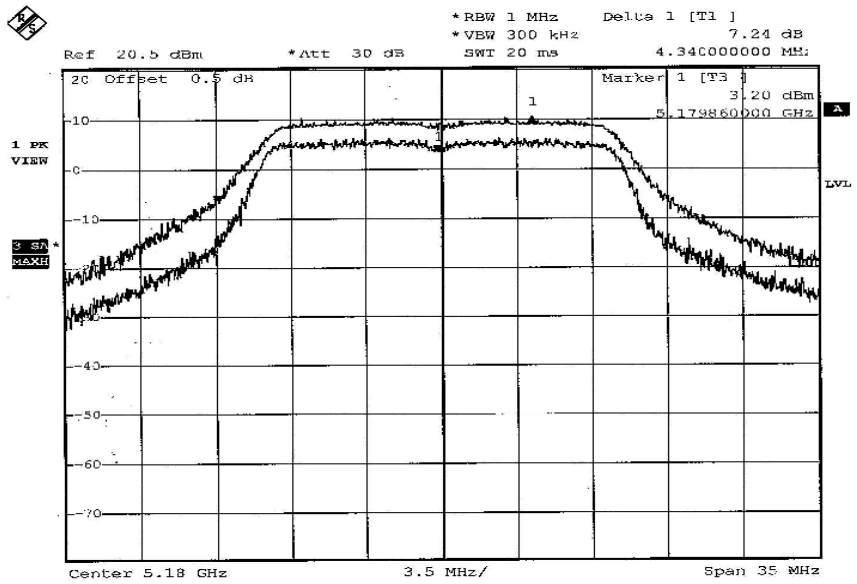
*RBW 1 MHz
*VBW 300 kHz
SWT 20 ms
Delta 1 [T1]
7.24 dB
4.340000000 MHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 1 [T3]
3.20 dBm
5.179860000 GHz
1 PK
VIEW
LVL
Center 5.18 GHz
3.5 MHz/
Span 35 MHz

CH 4

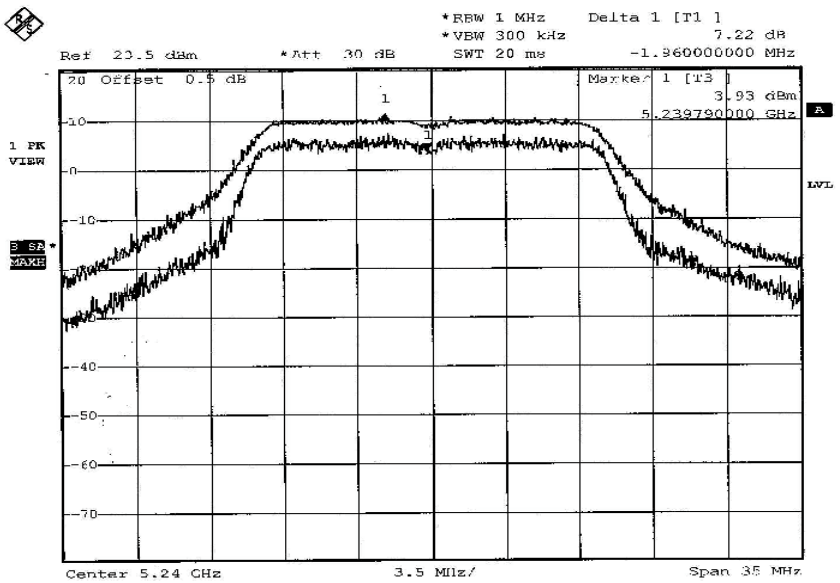
*RBW 1 MHz
*VBW 300 kHz
SWT 20 ms
Delta 1 [T1]
7.22 dB
-1.960000000 MHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 1 [T3]
3.93 dBm
5.239790000 GHz
1 PK
VIEW
LVL
Center 5.24 GHz
3.5 MHz/
Span 35 MHz

CH 5

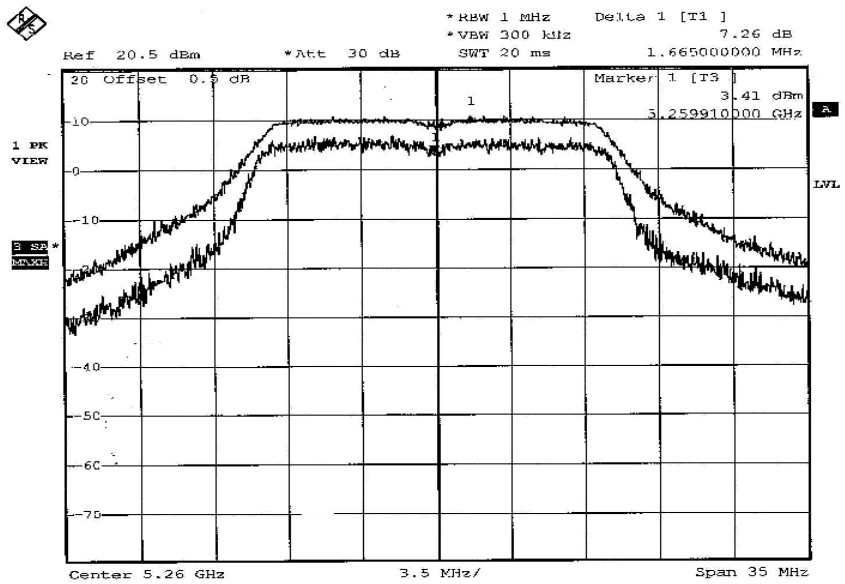
*RBW 1 MHz
*VBW 300 kHz
SWT 20 ms
Delta 1 [T1]
7.26 dB
1.665000000 MHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 1 [T3]
3.41 dBm
3.259910000 GHz
1 PK
VIEW
LVL
Center 5.26 GHz
3.5 MHz/
Span 35 MHz

CH 8

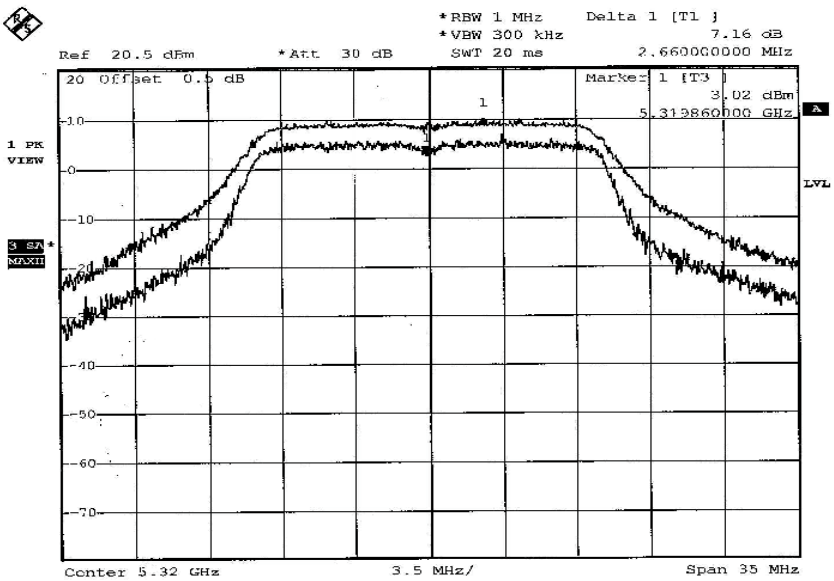
*RBW 1 MHz
*VBW 300 kHz
SWT 20 ms
Delta 1 [T1]
7.16 dB
2.660000000 MHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 1 [T3]
3.02 dBm
5.319860000 GHz
1 PK
VIEW
LVL
Center 5.32 GHz
3.5 MHz/
Span 35 MHz

802.11a Turbo OFDM modulation

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5210	7.24	13	PASS
2	5250	7.00	13	PASS
3	5290	7.13	13	PASS

CH 1

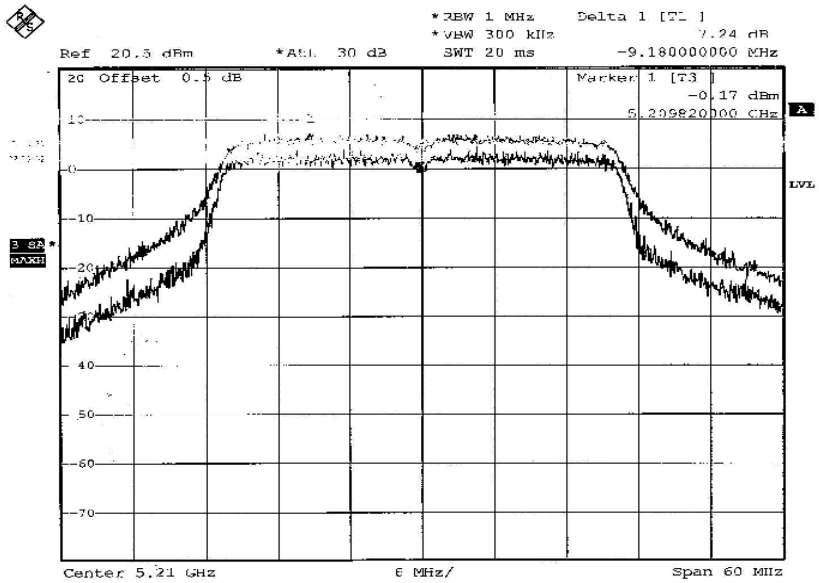
*RBW 1 MHz
*VBW 300 kHz
SWT 20 ms
Delta 1 [T1]
7.24 dB
-9.180000000 MHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 1 [T3]
-0.17 dBm
5.209820000 GHz
A
LVL
3 SA
MAXH
Center 5.21 GHz
6 MHz/
Span 60 MHz

CH 2

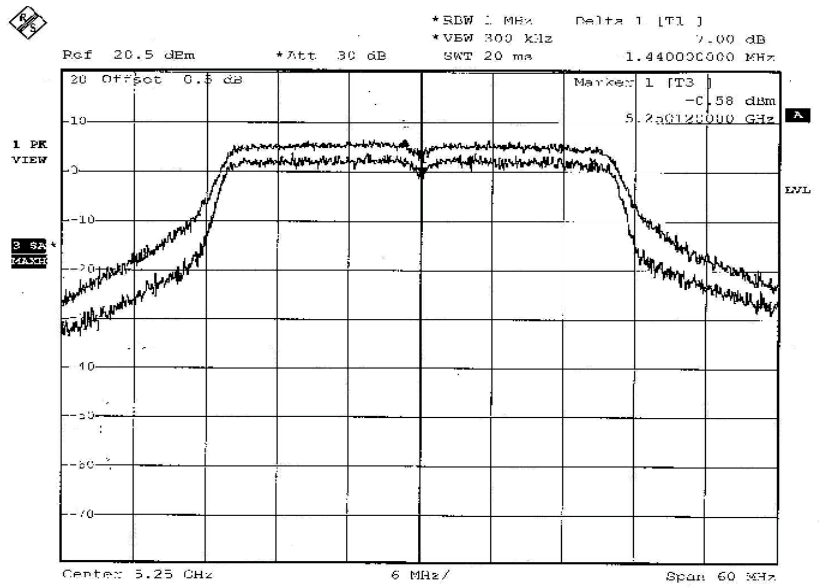
*RBW 1 MHz
*VBW 300 kHz
SWT 20 ms
Delta 1 [T1]
7.00 dB
1.440000000 MHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 1 [T3]
-0.58 dBm
5.2501250000 GHz
A
LVL
1 PK
VIEW
3 SA
MAXH
Center 5.25 GHz
6 MHz/
Span 60 MHz

CH 3

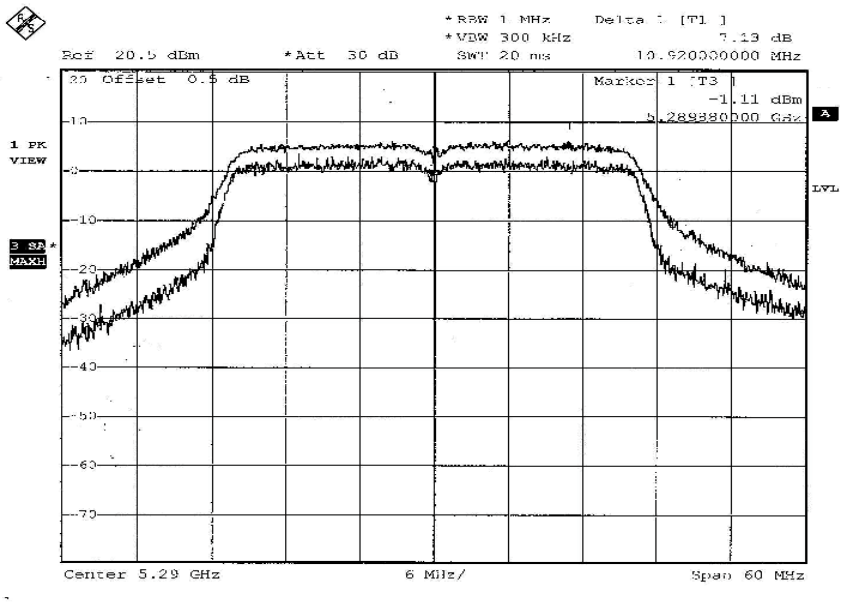
*RBW 1 MHz
*VBW 300 kHz
SWT 20 ms
Delta 1 [T1]
7.13 dB
10.920000000 MHz
Ref 20.5 dBm
*Att 30 dB
Offset 0.5 dB
Marker 1 [T3]
-1.11 dBm
5.289380000 GHz
1 PK
VIEW
3 SA
MAXH
LVL
Center 5.29 GHz
6 MHz/
Span 60 MHz

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 5.3.6

4.5.7 TEST RESULTS

802.11a OFDM modulation

MODULATION TYPE	BPSK	**TRANSFER RATE**	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**ENVIRONMENTAL CONDITIONS**	24deg.C, 64%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5180	0.61	4	PASS
4	5240	0.99	4	PASS
5	5260	0.82	11	PASS
8	5320	0.62	11	PASS

CH 1

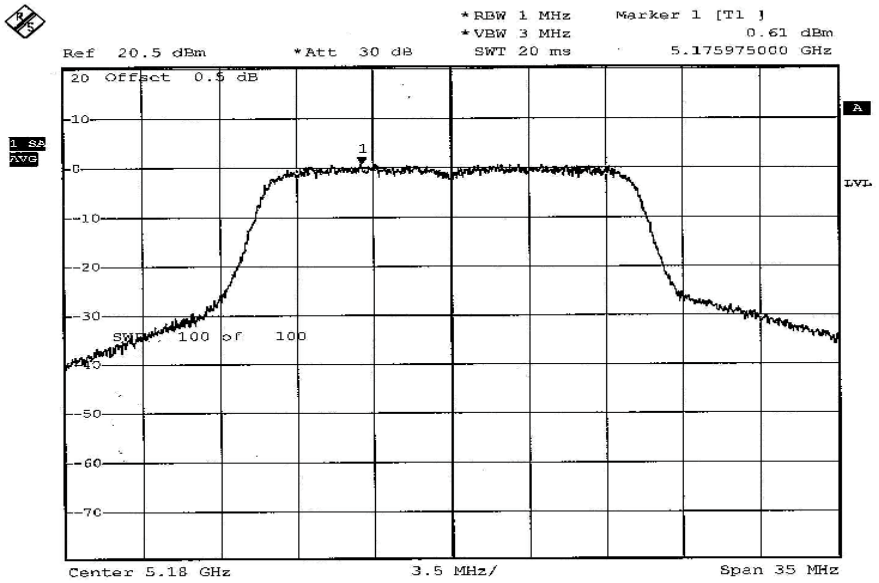
*RBW 1 MHz
*VBW 3 MHz
SWT 20 ms
Marker 1 [T1]
0.61 dBm
5.175975000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
1 SA
AVG
A
LVL
SWP 100 of 100
Center 5.18 GHz
3.5 MHz/
Span 35 MHz

CH 4

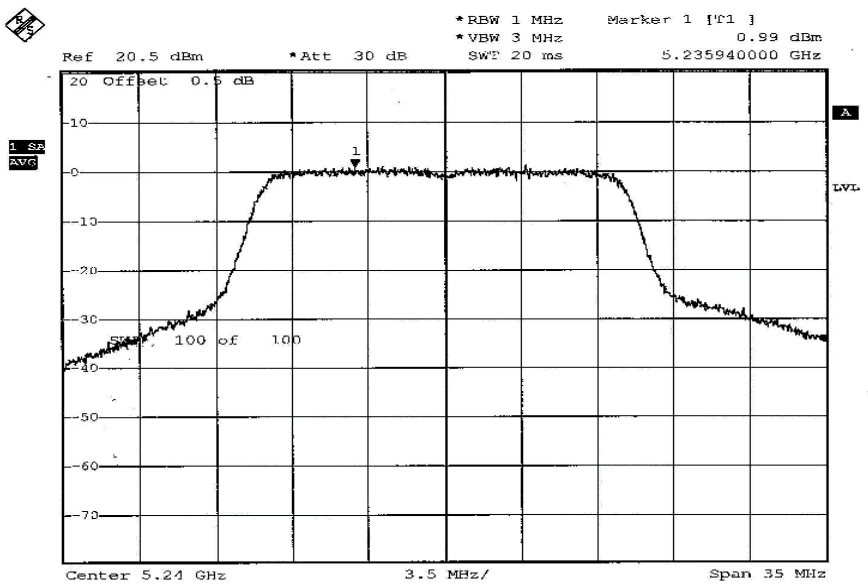
*RBW 1 MHz
*VBW 3 MHz
SWT 20 ms
Marker 1 [T1]
0.99 dBm
5.235940000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
1 SA
AVG
A
LVL
SWP 100 of 100
Center 5.24 GHz
3.5 MHz/
Span 35 MHz

CH 5

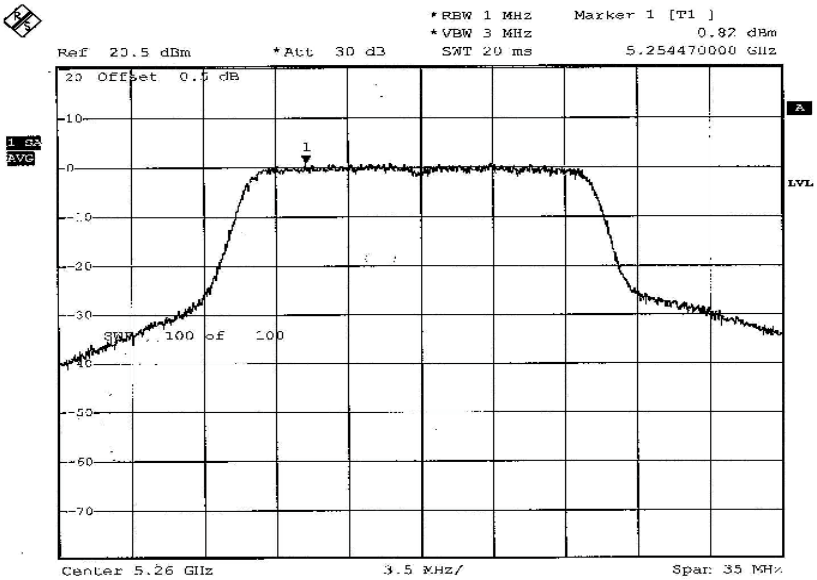
*RBW 1 MHz
*VBW 3 MHz
SWT 20 ms
Marker 1 [T1]
0.82 dBm
5.254470000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
1 SA
AVG
A
LVL
SWP 100 of 100
Center 5.26 GHz
3.5 MHz/
Span 35 MHz

CH 8

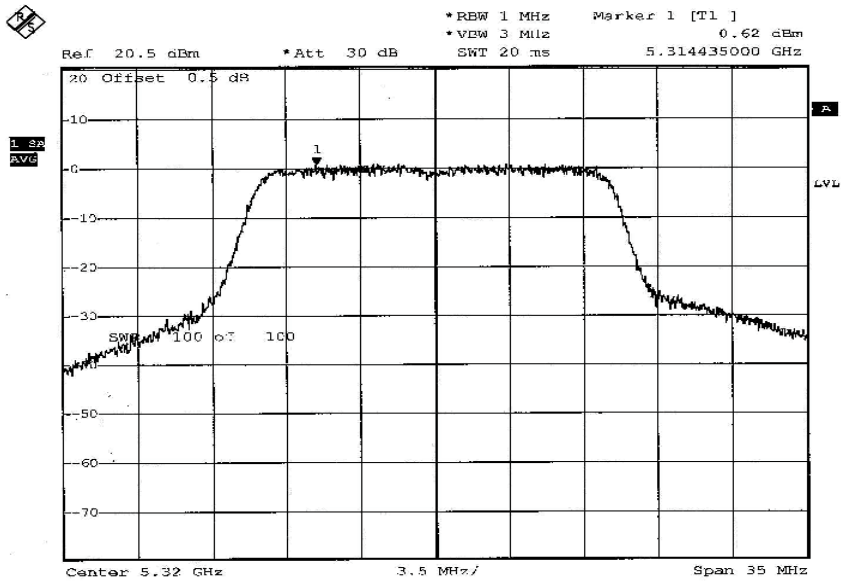
*RBW 1 MHz
*VBW 3 MHz
SWT 20 ms
Marker 1 [T1]
0.62 dBm
5.314435000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
1 SA
AVG
A
LVL
SWP 100 of 100
Center 5.32 GHz
3.5 MHz/
Span 35 MHz

802.11a Turbo OFDM modulation

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	12Mbps	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1 MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5210	-2.96	4	PASS
2	5250	-2.65	4	PASS
3	5290	-2.33	11	PASS

CH 1

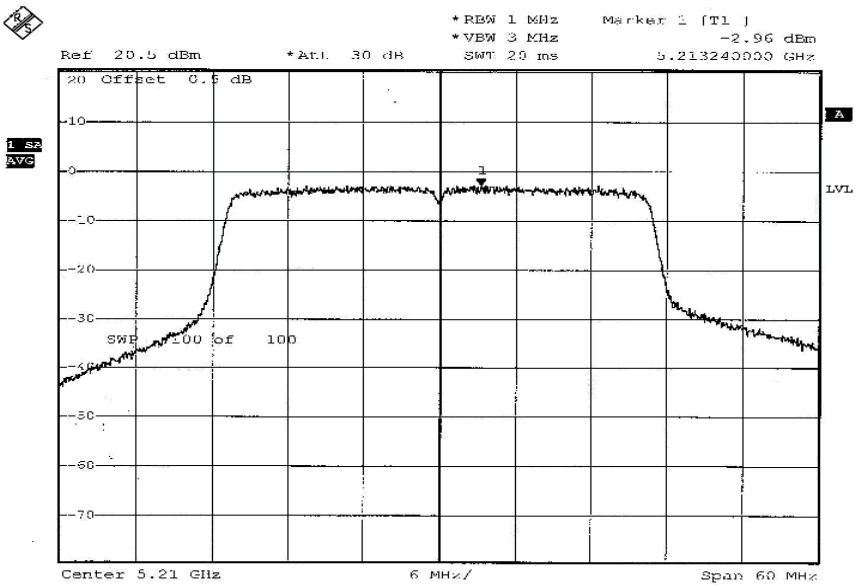
*RBW 1 MHz
*VBW 3 MHz
SWT 20 ms
Marker 1 [T1]
-2.96 dBm
5.213240000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
1 SA
AVG
A
LVL
SWP 100 of 100
Center 5.21 GHz
6 MHz/
Span 60 MHz

CH 2

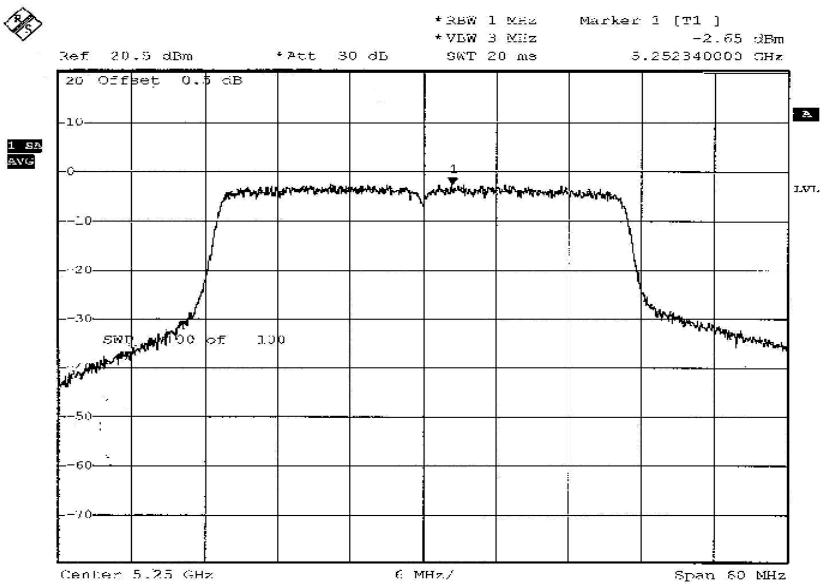
*RBW 1 MHz
*VBW 3 MHz
SWT 20 ms
Marker 1 [T1]
-2.65 dBm
5.252340000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
1 SA
AVG
A
LVL
SWP 100 of 100
Center 5.25 GHz
6 MHz/
Span 60 MHz

CH 3

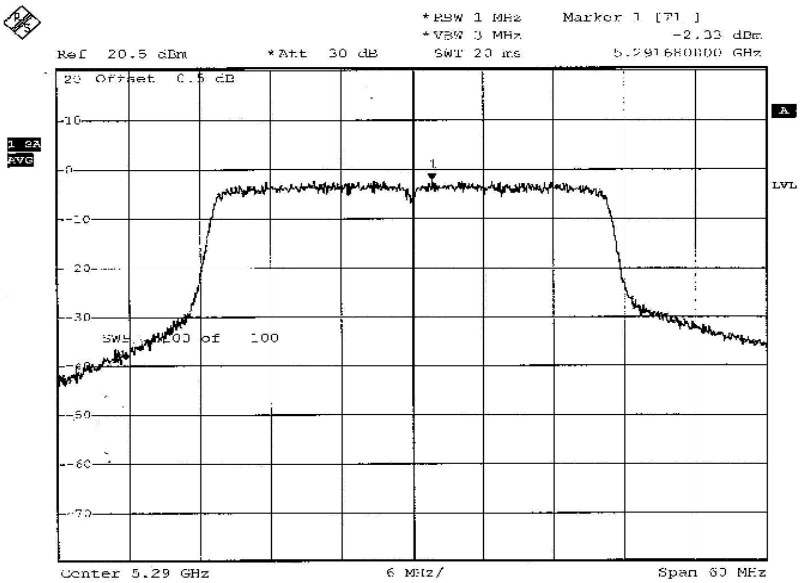
*RBW 1 MHz
*VBW 3 MHz
SWT 20 ms
Marker 1 [T1]
-2.33 dBm
5.29168000 GHz
Ref 20.5 dBm
*Att 30 dB
SG Offset 0.5 dB
1 SA
AVG
A
LVL
-10
0
-10
-20
-30
-50
-60
-70
SWP 100 of 100
Center 5.29 GHz
6 MHz/
Span 60 MHz

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of –30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ANRITSU SPECTRUM ANALYZER	MS2667C	M10281	Jul. 04, 2006
WIT STANDARD TEMPERATURE AND HUMIDITY CHAMBER	TH-4S-C	W981030	Jul. 18, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

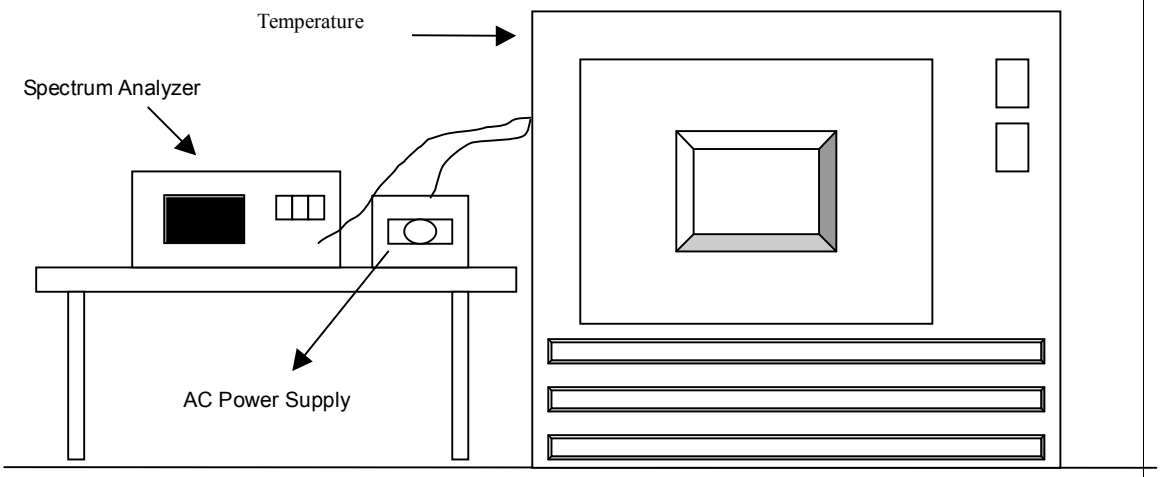

4.6.6 EUT OPERATING CONDITION

Same as Item 4.1.6

4.6.7 TEST RESULTS

Operating frequency: 5320MHz								Limit : ± 0.01%	
Temp. (℃)	Power supply (Vac)	0 minute		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	138	5320.03967	0.0007457	5320.03926	0.0007380	5320.03935	0.0007397	5320.03957	0.0007438
	120	5320.03922	0.0007372	5320.03992	0.0007504	5320.03925	0.0007378	5320.03935	0.0007397
	102	5320.03913	0.0007355	5320.03920	0.0007368	5320.03927	0.0007382	5320.03938	0.0007402
40	138	5320.04785	0.0008994	5320.04870	0.0009154	5320.04784	0.0008992	5320.04878	0.0009169
	120	5320.04715	0.0008863	5320.04652	0.0008744	5320.04645	0.0008731	5320.04636	0.0008714
	102	5320.04737	0.0008904	5320.04735	0.0008900	5320.04736	0.0008902	5320.04733	0.0008897
30	138	5320.03641	0.0006844	5320.03631	0.0006825	5320.03641	0.0006844	5320.03611	0.0006788
	120	5320.03528	0.0006632	5320.03532	0.0006639	5320.03535	0.0006645	5320.03539	0.0006652
	102	5320.03539	0.0006652	5320.03534	0.0006643	5320.03532	0.0006639	5320.03538	0.0006650
20	138	5320.02569	0.0004829	5320.02457	0.0004618	5320.02555	0.0004803	5320.02555	0.0004803
	120	5320.02549	0.0004791	5320.02553	0.0004799	5320.02544	0.0004782	5320.02546	0.0004786
	102	5320.02559	0.0004810	5320.02524	0.0004744	5320.02551	0.0004795	5320.02551	0.0004795
10	138	5320.02369	0.0004453	5320.02411	0.0004532	5320.02455	0.0004615	5320.02455	0.0004615
	120	5320.02449	0.0004603	5320.02453	0.0004611	5320.02444	0.0004594	5320.02446	0.0004598
	102	5320.02459	0.0004622	5320.02434	0.0004575	5320.02441	0.0004588	5320.02451	0.0004607
0	138	5320.02429	0.0004566	5320.02457	0.0004618	5320.02455	0.0004615	5320.02455	0.0004615
	120	5320.02429	0.0004566	5320.02452	0.0004609	5320.02441	0.0004588	5320.02445	0.0004596
	102	5320.02359	0.0004434	5320.02454	0.0004613	5320.02451	0.0004607	5320.02451	0.0004607
-10	138	5320.02459	0.0004622	5320.02437	0.0004581	5320.02455	0.0004615	5320.02455	0.0004615
	120	5320.02449	0.0004603	5320.02453	0.0004611	5320.02444	0.0004594	5320.02446	0.0004598
	102	5320.02439	0.0004585	5320.02454	0.0004613	5320.02451	0.0004607	5320.02451	0.0004607
-20	138	5320.02459	0.0004622	5320.02457	0.0004618	5320.02455	0.0004615	5320.02455	0.0004615
	120	5320.02439	0.0004585	5320.02453	0.0004611	5320.02444	0.0004594	5320.02446	0.0004598
	102	5320.02359	0.0004434	5320.02454	0.0004613	5320.02451	0.0004607	5320.02451	0.0004607
-30	138	5320.02465	0.0004633	5320.02457	0.0004618	5320.02455	0.0004615	5320.02455	0.0004615
	120	5320.02445	0.0004596	5320.02453	0.0004611	5320.02444	0.0004594	5320.02446	0.0004598
	102	5320.02451	0.0004607	5320.02454	0.0004613	5320.02451	0.0004607	5320.02451	0.0004607

4.7 BAND EDGES MEASUREMENT

4.7.1 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 1MHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS

For signals in the restricted bands above and below the 5.15 to 5.35GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak filed strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW=VBW=1MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

802.11a OFDM modulation

Channel 1 (5180MHz)

The band edge emission plot on the next page shows 54.38dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 111.42dBuV/m (Peak), so the maximum field strength in restrict band is 111.42-54.38=57.04dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 54.03dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 101.41dBuV/m (Average), so the maximum field strength in restrict band is 101.41-54.03=47.38dBuV/m which is under 54dBuV/m limit.

Channel 8 (5320MHz)

The band edge emission plot on the next second page shows 44.01dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 8 is 111.30dBuV/m (Peak), so the maximum field strength in restrict band is 111.30-44.01=67.29dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 52.37dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 8 is 101.26dBuV/m (Average), so the maximum field strength in restrict band is 101.26-52.37=48.89dBuV/m which is under 54dBuV/m limit.

802.11a OFDM modulation

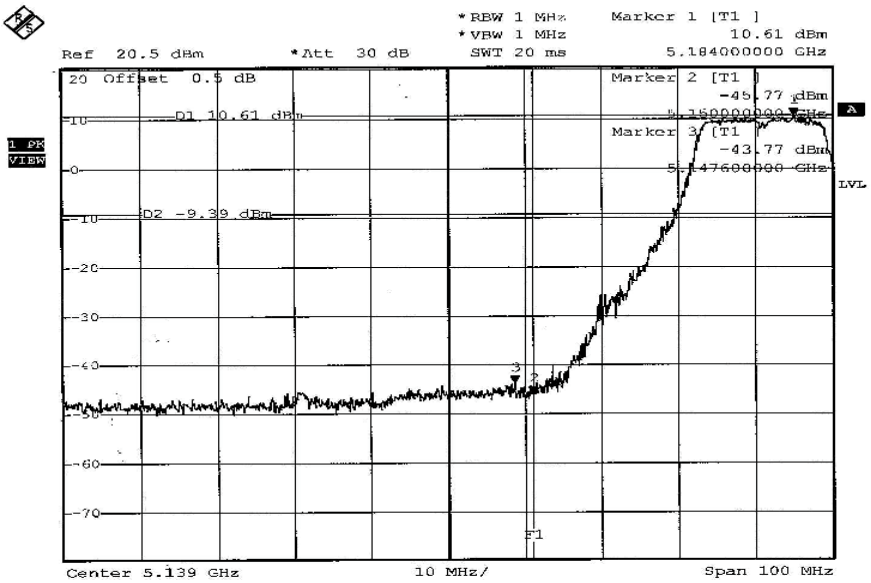

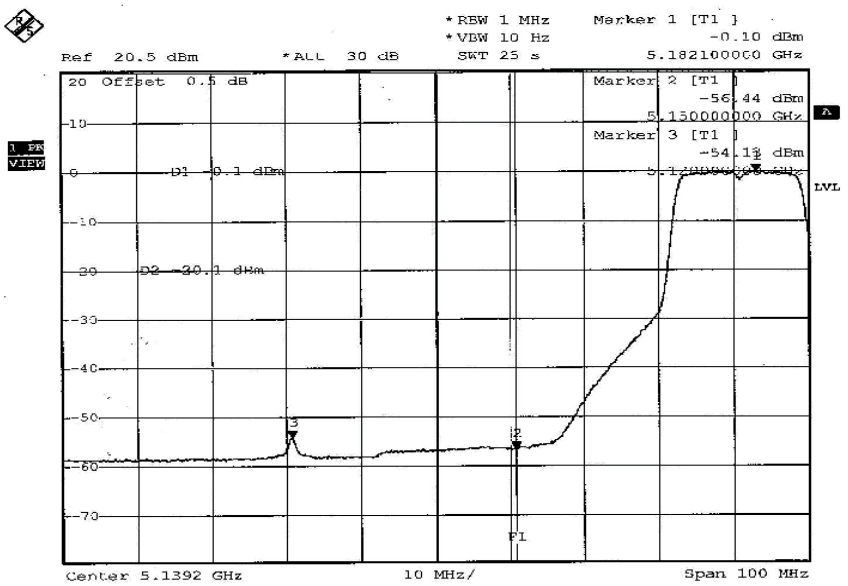

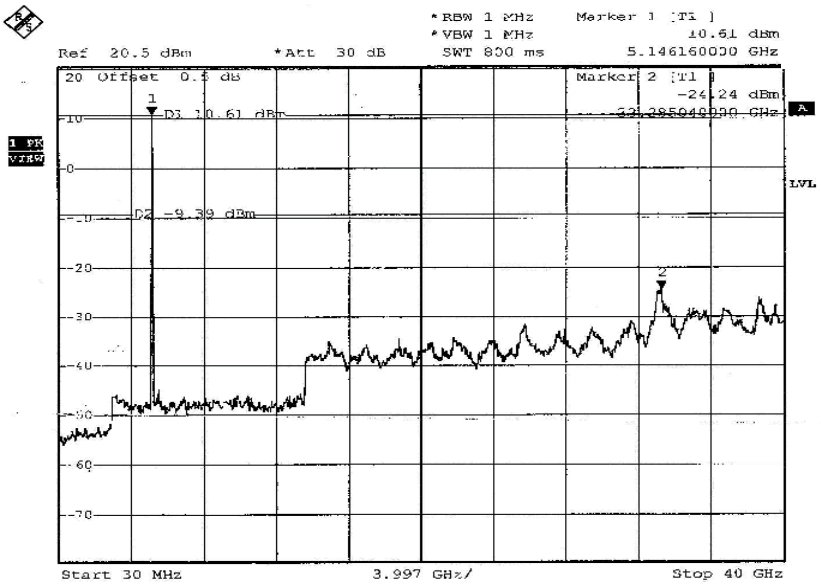
*RBW 1 MHz
*VBW 1 MHz
SWT 800 ms
Marker 1 [T1]
10.61 dBm
5.146160000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
D1 10.61 dBm
D2 -9.39 dBm
Marker 2 [T1]
-24.24 dBm
LVL
Start 30 MHz
3.997 GHz/
Stop 40 GHz

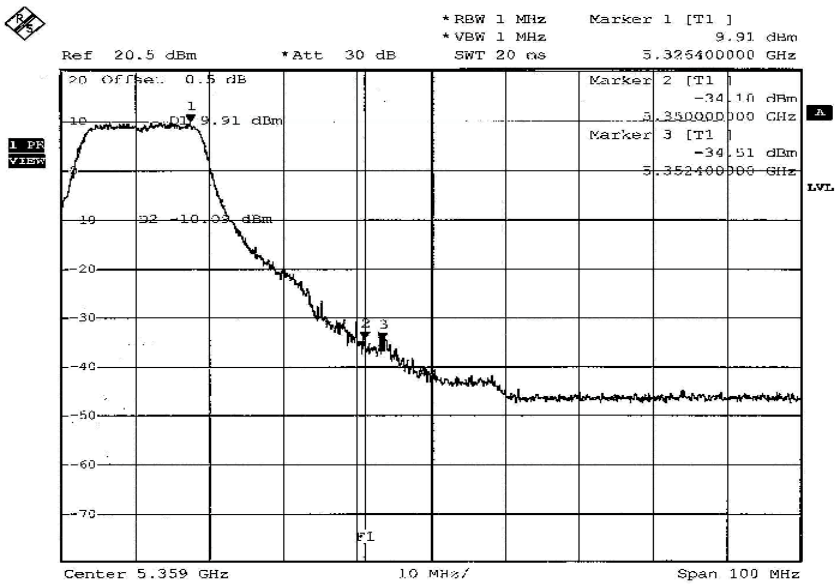
*RBW 1 MHz
*VBW 1 MHz
SWT 20 ms
Marker 1 [T1]
9.91 dBm
5.325400000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
D1 9.91 dBm
D2 -10.09 dBm
Marker 2 [T1]
-34.10 dBm
Marker 3 [T1]
-34.51 dBm
LVL
Center 5.359 GHz
10 MHz/
Span 100 MHz

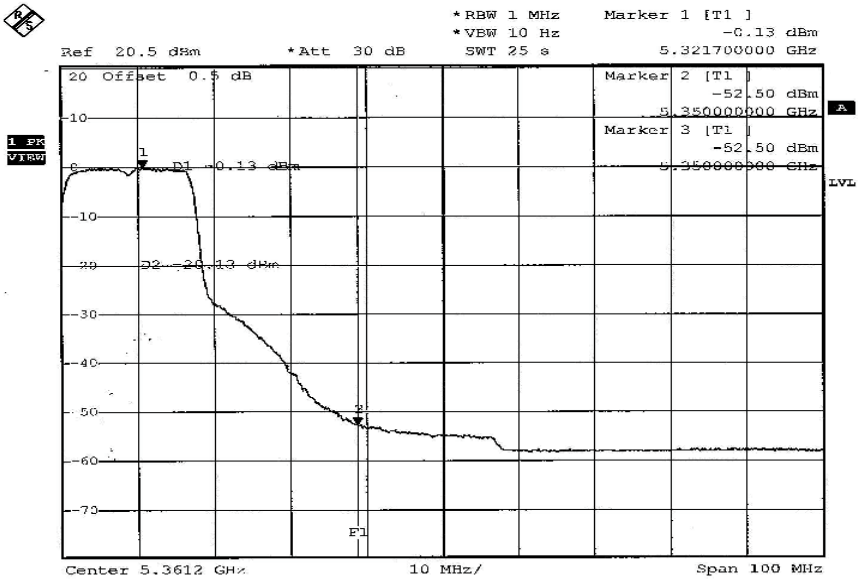
*RBW 1 MHz
*VBW 10 Hz
SWT 25 s
Marker 1 [T1]
-0.13 dBm
5.321700000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 2 [T1]
-52.50 dBm
5.350000000 GHz
Marker 3 [T1]
-52.50 dBm
5.350000000 GHz
D1 -0.13 dBm
D2 -20.13 dBm
Center 5.3612 GHz
10 MHz/
Span 100 MHz

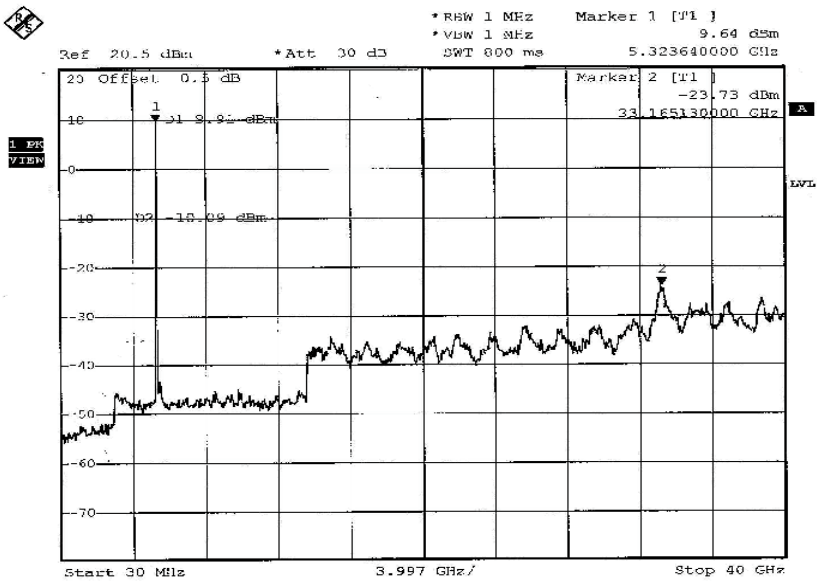
*RBW 1 MHz
*VBW 1 MHz
SWT 800 ms
Marker 1 [T1]
9.64 dBm
5.323640000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 2 [T1]
-23.73 dBm
33.165130000 GHz
D1 8.95 dBm
D2 -10.09 dBm
Start 30 MHz
3.997 GHz/
Stop 40 GHz

802.11a Turbo OFDM modulation

Channel 1 (5210MHz)

The band edge emission plot on the next page shows 49.22dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 107.69dBuV/m (Peak), so the maximum field strength in restrict band is 107.69-49.22=58.47dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 50.65dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 98.68dBuV/m (Average), so the maximum field strength in restrict band is 98.68-50.65=48.03dBuV/m which is under 54dBuV/m limit.

Channel 3 (5290MHz)

The band edge emission plot on the next second page shows 46.62dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 3 is 107.54dBuV/m (Peak), so the maximum field strength in restrict band is 107.54-46.62=60.92dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third shows 47.37dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 3 is 98.51dBuV/m (Average), so the maximum field strength in restrict band is 98.51-47.37=51.14dBuV/m which is under 54dBuV/m limit.

802.11a Turbo OFDM modulation

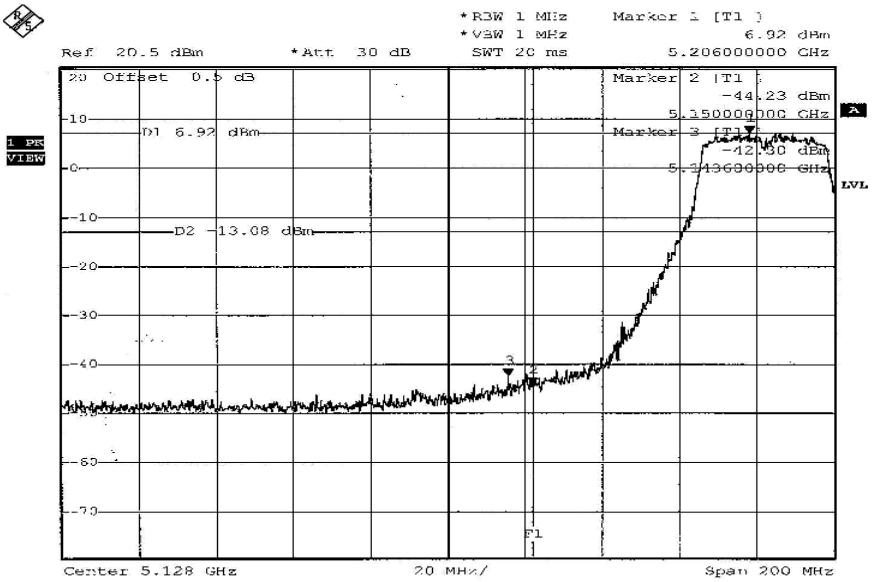

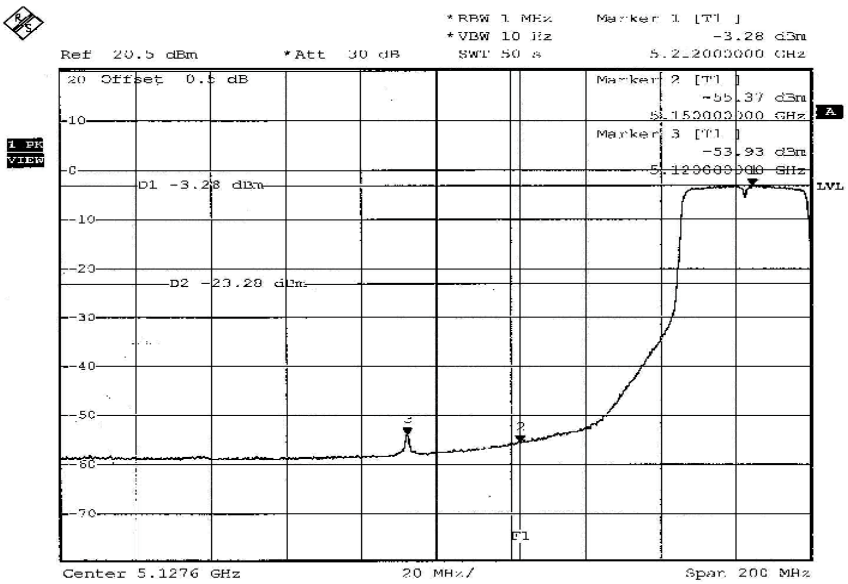

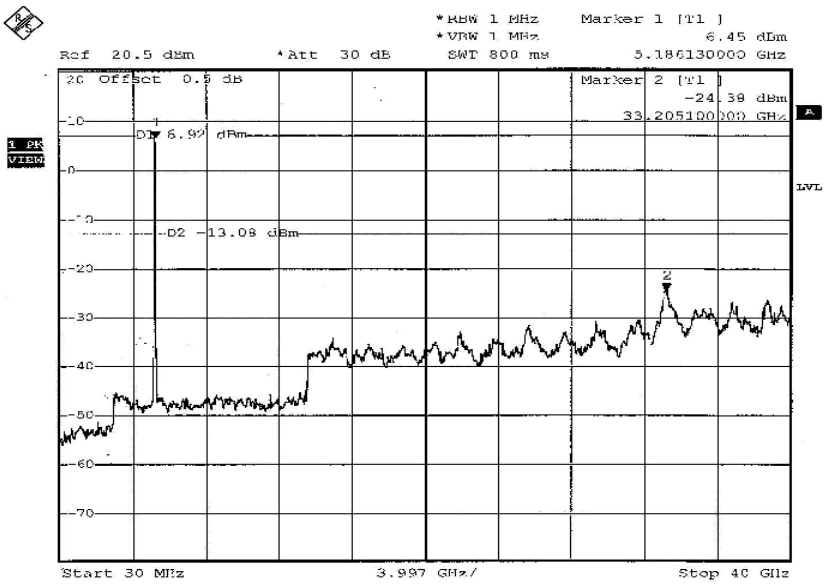
*RBW 1 MHz
*VBW 1 MHz
SWT 800 ms
Marker 1 [T1]
6.45 dBm
5.186130000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 2 [T1]
-24.38 dBm
33.205100000 GHz
D1 6.92 dBm
D2 -13.08 dBm
1 PK VIEW
LVL
Start 30 MHz
3.997 GHz/
Stop 40 GHz

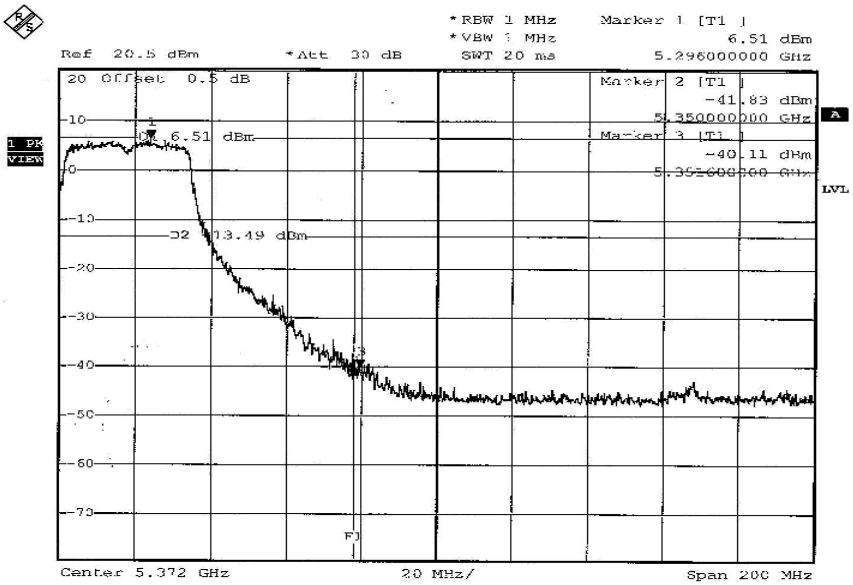
*RBW 1 MHz
*VBW 1 MHz
SWT 20 ms
Marker 1 [T1]
6.51 dBm
5.296000000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 2 [T1]
-41.83 dBm
5.350000000 GHz
Marker 3 [T1]
-40.11 dBm
5.352000000 GHz
D1 6.51 dBm
D2 -13.49 dBm
1 PK VIEW
LVL
Center 5.372 GHz
20 MHz/
Span 200 MHz

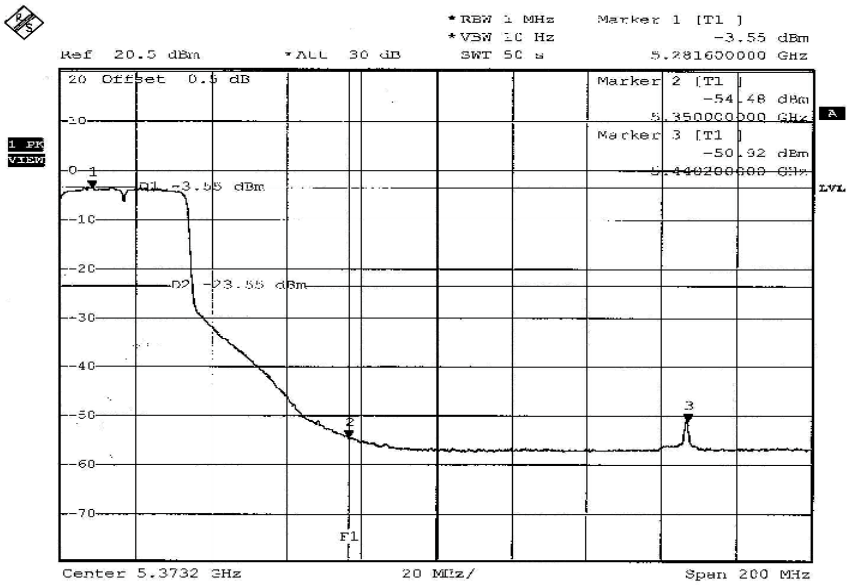
*RBW 1 MHz
*VBW 10 Hz
SWT 50 s
Marker 1 [T1]
-3.55 dBm
5.281600000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 2 [T1]
-54.48 dBm
5.350000000 GHz
Marker 3 [T1]
-50.92 dBm
5.440200000 GHz
1 PK
VIEW
A
LVL
D1 -3.55 dBm
D2 -23.55 dBm
F1
Center 5.3732 GHz
20 MHz/
Span 200 MHz

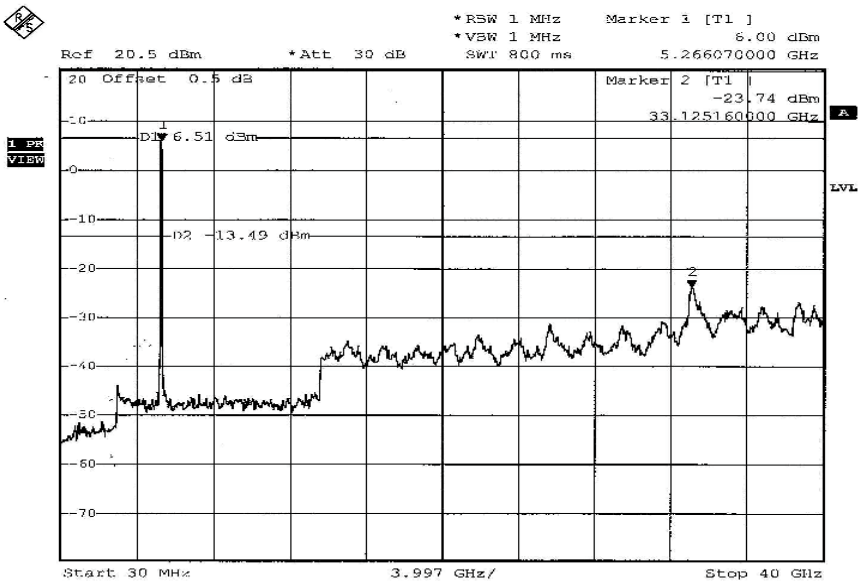
*RBW 1 MHz
*VBW 1 MHz
SWT 800 ms
Marker 1 [T1]
6.00 dBm
5.266070000 GHz
Ref 20.5 dBm
*Att 30 dB
20 Offset 0.5 dB
Marker 2 [T1]
-23.74 dBm
33.125160000 GHz
1 PK
VIEW
A
LVL
D1 6.51 dBm
D2 -13.49 dBm
Start 30 MHz
3.997 GHz/
Stop 40 GHz

4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with Reverse SMA connector. The maximum Gain of the antenna is 5dBi.

5. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.