

Non-beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	11.93	0.01560	15.19	0.03304
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.52	0.01786	15.78	0.03784
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.72	0.03733	18.98	0.07907
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.79	0.07568	22.05	0.16032
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.60	0.14454	24.86	0.30620
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	23.71	0.23496	26.97	0.49774
6.425-6.525GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	11.75	0.01496	13.94	0.02477
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.47	0.01766	14.66	0.02924
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.56	0.03597	17.75	0.05957
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.36	0.06855	20.55	0.11350
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.03	0.12677	23.22	0.20989
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	23.46	0.22182	25.65	0.36728
6.525-6.875GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	11.83	0.01524	15.19	0.03304
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.46	0.01762	15.82	0.03819
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.79	0.03793	19.15	0.08222
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.48	0.07047	21.84	0.15276
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.16	0.13062	24.52	0.28314
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	23.37	0.21727	26.73	0.47098
6.875-7.125GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	12.21	0.01663	14.33	0.02710
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.82	0.01914	14.94	0.03119
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.69	0.03707	17.81	0.06039
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.67	0.07362	20.79	0.11995
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.57	0.14355	23.69	0.23388

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	3.26	5.35	6.12	5.95	5.71	11.81	Inf	15.07	30.00
6175MHz	Pass	3.26	6.01	5.45	6.32	5.68	11.90	Inf	15.16	30.00
6415MHz	Pass	3.26	6.04	5.53	6.01	6.03	11.93	Inf	15.19	30.00
6435MHz	Pass	2.19	5.47	6.03	4.82	6.03	11.64	Inf	13.83	30.00
6475MHz	Pass	2.19	5.55	5.71	5.62	6.01	11.75	Inf	13.94	30.00
6515MHz	Pass	2.19	5.82	5.92	5.12	6.02	11.75	Inf	13.94	30.00
6535MHz	Pass	3.36	5.81	6.05	5.24	6.07	11.83	Inf	15.19	30.00
6715MHz	Pass	3.36	5.07	5.53	5.16	5.65	11.38	Inf	14.74	30.00
6855MHz	Pass	3.36	4.91	5.25	5.47	5.82	11.40	Inf	14.76	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	3.36	5.21	5.54	5.42	5.85	11.53	Inf	14.89	30.00
6895MHz	Pass	2.12	5.24	5.97	5.66	5.53	11.63	Inf	13.75	30.00
7015MHz	Pass	2.12	5.87	5.73	5.85	4.85	11.62	Inf	13.74	30.00
7095MHz	Pass	2.12	5.65	6.16	6.04	5.84	11.95	Inf	14.07	30.00
7115MHz	Pass	2.12	5.67	6.71	5.85	6.45	12.21	Inf	14.33	30.00
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	3.26	5.93	6.18	5.62	6.42	12.07	Inf	15.33	30.00
6175MHz	Pass	3.26	6.56	5.76	6.95	6.35	12.45	Inf	15.71	30.00
6415MHz	Pass	3.26	6.72	6.23	6.37	6.64	12.52	Inf	15.78	30.00
6435MHz	Pass	2.19	6.28	6.73	5.78	6.35	12.32	Inf	14.51	30.00
6475MHz	Pass	2.19	6.49	6.01	6.52	6.73	12.47	Inf	14.66	30.00
6515MHz	Pass	2.19	6.48	6.36	5.81	6.74	12.38	Inf	14.57	30.00
6535MHz	Pass	3.36	6.61	6.73	5.72	6.62	12.46	Inf	15.82	30.00
6715MHz	Pass	3.36	5.86	6.67	5.83	6.95	12.38	Inf	15.74	30.00
6855MHz	Pass	3.36	5.71	6.42	6.12	6.75	12.29	Inf	15.65	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	3.36	5.76	6.27	5.84	6.36	12.09	Inf	15.45	30.00
6895MHz	Pass	2.12	6.02	6.71	6.25	6.53	12.41	Inf	14.53	30.00
7015MHz	Pass	2.12	7.15	7.07	6.83	6.05	12.82	Inf	14.94	30.00
7095MHz	Pass	2.12	6.42	6.67	6.72	6.34	12.56	Inf	14.68	30.00
7115MHz	Pass	2.12	6.36	7.32	6.48	6.88	12.80	Inf	14.92	30.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	3.26	9.25	9.46	9.02	9.67	15.38	Inf	18.64	30.00
6165MHz	Pass	3.26	9.53	9.32	10.19	9.71	15.72	Inf	18.98	30.00
6405MHz	Pass	3.26	9.87	9.52	9.45	9.82	15.69	Inf	18.95	30.00
6445MHz	Pass	2.19	9.21	9.27	8.68	9.63	15.23	Inf	17.42	30.00
6485MHz	Pass	2.19	9.55	9.23	9.52	9.85	15.56	Inf	17.75	30.00
6525MHz Straddle 6.425-6.525GHz	Pass	2.19	8.93	8.92	9.03	9.18	15.04	Inf	17.23	30.00
6565MHz	Pass	3.36	9.48	9.47	9.53	9.65	15.55	Inf	18.91	30.00
6725MHz	Pass	3.36	8.72	9.72	9.09	9.57	15.31	Inf	18.67	30.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6845MHz	Pass	3.36	9.41	10.05	9.63	9.87	15.77	Inf	19.13	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	3.36	9.27	10.35	9.56	9.84	15.79	Inf	19.15	30.00
6925MHz	Pass	2.12	9.55	9.98	9.79	9.33	15.69	Inf	17.81	30.00
7005MHz	Pass	2.12	9.66	9.25	9.73	8.56	15.34	Inf	17.46	30.00
7085MHz	Pass	2.12	9.73	9.22	9.56	9.21	15.46	Inf	17.58	30.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	3.26	12.13	12.26	12.25	12.22	18.24	Inf	21.50	30.00
6145MHz	Pass	3.26	12.87	12.33	13.12	12.71	18.79	Inf	22.05	30.00
6385MHz	Pass	3.26	12.64	12.37	13.14	12.32	18.65	Inf	21.91	30.00
6465MHz	Pass	2.19	12.37	12.14	12.05	12.33	18.25	Inf	20.44	30.00
6545MHz Straddle 6.425-6.525GHz	Pass	2.19	12.47	12.58	12.15	12.13	18.36	Inf	20.55	30.00
6625MHz	Pass	3.36	12.26	12.66	12.49	12.37	18.47	Inf	21.83	30.00
6705MHz	Pass	3.36	12.03	12.42	12.19	12.56	18.33	Inf	21.69	30.00
6785MHz	Pass	3.36	12.15	12.78	12.49	12.19	18.43	Inf	21.79	30.00
6865MHz Straddle 6.525-6.875GHz	Pass	3.36	12.06	12.73	12.64	12.38	18.48	Inf	21.84	30.00
6945MHz	Pass	2.12	12.02	12.75	12.39	12.08	18.34	Inf	20.46	30.00
7025MHz	Pass	2.12	13.03	12.68	12.91	11.87	18.67	Inf	20.79	30.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	3.26	14.65	15.19	15.71	15.89	21.41	Inf	24.67	30.00
6185MHz	Pass	3.26	15.24	15.25	15.61	15.34	21.38	Inf	24.64	30.00
6345MHz	Pass	3.26	15.95	15.38	15.55	15.41	21.60	Inf	24.86	30.00
6505MHz Straddle 6.425-6.525GHz	Pass	2.19	15.14	15.21	14.85	14.82	21.03	Inf	23.22	30.00
6665MHz	Pass	3.36	14.76	15.23	14.93	15.03	21.01	Inf	24.37	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	3.36	14.68	15.46	15.25	15.13	21.16	Inf	24.52	30.00
6985MHz	Pass	2.12	15.15	16.07	15.59	15.34	21.57	Inf	23.69	30.00
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	3.26	17.66	17.73	17.67	17.69	23.71	Inf	26.97	30.00
6265MHz	Pass	3.26	17.46	17.08	18.03	17.51	23.55	Inf	26.81	30.00
6425MHz Straddle 6.425-6.525GHz	Pass	2.19	17.34	17.01	18.01	17.35	23.46	Inf	25.65	30.00
6585MHz Straddle 6.425-6.525GHz	Pass	2.19	17.13	17.22	17.11	17.43	23.24	Inf	25.43	30.00
6745MHz Straddle 6.525-6.875GHz	Pass	3.36	16.72	17.53	17.03	17.43	23.21	Inf	26.57	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	3.36	16.92	17.82	17.15	17.45	23.37	Inf	26.73	30.00

DG = Directional Gain; Port X = Port X output power

Beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	12.50	0.01778	17.94	0.06223
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	15.68	0.03698	21.12	0.12942
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	18.43	0.06966	23.87	0.24378
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	21.47	0.14028	26.91	0.49091
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	23.62	0.23014	29.06	0.80538
6.425-6.525GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	12.12	0.01629	17.39	0.05483
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	15.34	0.03420	20.61	0.11508
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	18.08	0.06427	23.35	0.21627
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	20.87	0.12218	26.14	0.41115
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	23.14	0.20606	28.41	0.69343
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	12.26	0.01683	17.55	0.05689
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	15.51	0.03556	20.80	0.12023
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	18.36	0.06855	23.65	0.23174
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	21.07	0.12794	26.36	0.43251
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	23.05	0.20184	28.34	0.68234
6.875-7.125GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	12.76	0.01888	18.09	0.06442
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	15.43	0.03491	20.76	0.11912
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	18.22	0.06637	23.55	0.22646
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	21.52	0.14191	26.85	0.48417

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.44	5.92	5.37	6.28	6.32	12.01	Inf	17.45	30.00
6175MHz	Pass	5.44	5.81	5.27	7.19	5.84	12.11	Inf	17.55	30.00
6415MHz	Pass	5.44	6.21	5.31	7.02	7.13	12.50	Inf	17.94	30.00
6435MHz	Pass	5.27	5.75	5.43	5.09	7.43	12.04	Inf	17.31	30.00
6475MHz	Pass	5.27	5.28	6.02	5.21	7.48	12.12	Inf	17.39	30.00
6515MHz	Pass	5.27	5.66	5.21	5.32	7.56	12.07	Inf	17.34	30.00
6535MHz	Pass	5.29	5.61	5.19	5.73	7.61	12.16	Inf	17.45	30.00
6715MHz	Pass	5.29	5.07	5.93	5.25	7.42	12.04	Inf	17.33	30.00
6855MHz	Pass	5.29	5.05	7.18	5.39	6.95	12.26	Inf	17.55	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.29	5.37	6.32	5.36	6.74	12.01	Inf	17.30	30.00
6895MHz	Pass	5.33	5.53	6.45	5.62	6.97	12.20	Inf	17.53	30.00
7015MHz	Pass	5.33	6.16	8.12	5.77	6.53	12.76	Inf	18.09	30.00
7095MHz	Pass	5.33	5.27	7.65	5.57	6.17	12.29	Inf	17.62	30.00
7115MHz	Pass	5.33	5.38	7.82	5.76	6.32	12.44	Inf	17.77	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	5.44	8.43	8.87	9.62	9.45	15.14	Inf	20.58	30.00
6165MHz	Pass	5.44	9.24	8.65	10.36	9.48	15.50	Inf	20.94	30.00
6405MHz	Pass	5.44	9.01	8.9	10.31	10.23	15.68	Inf	21.12	30.00
6445MHz	Pass	5.27	8.44	8.47	8.02	10.25	14.91	Inf	20.18	30.00
6485MHz	Pass	5.27	8.65	8.84	8.54	10.81	15.34	Inf	20.61	30.00
6525MHz Straddle 6.425-6.525GHz	Pass	5.27	8.01	8.23	8.43	10.15	14.81	Inf	20.08	30.00
6565MHz	Pass	5.29	8.29	9.05	8.98	10.48	15.30	Inf	20.59	30.00
6725MHz	Pass	5.29	8.06	9.61	8.02	10.31	15.13	Inf	20.42	30.00
6845MHz	Pass	5.29	8.53	9.91	8.76	9.76	15.30	Inf	20.59	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	5.29	8.05	10.22	8.77	10.45	15.51	Inf	20.80	30.00
6925MHz	Pass	5.33	8.22	10.45	8.02	10.35	15.43	Inf	20.76	30.00
7005MHz	Pass	5.33	8.02	10.25	7.85	9.26	14.98	Inf	20.31	30.00
7085MHz	Pass	5.33	8.11	10.31	8.25	9.23	15.09	Inf	20.42	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.44	11.92	11.63	11.93	12.01	17.90	Inf	23.34	30.00
6145MHz	Pass	5.44	11.87	11.49	13.37	12.65	18.43	Inf	23.87	30.00
6385MHz	Pass	5.44	12.02	11.62	12.98	12.51	18.33	Inf	23.77	30.00
6465MHz	Pass	5.27	11.56	11.74	11.23	13.33	18.07	Inf	23.34	30.00
6545MHz Straddle 6.425-6.525GHz	Pass	5.27	11.45	11.13	11.65	13.56	18.08	Inf	23.35	30.00
6625MHz	Pass	5.29	11.75	12.56	10.91	13.02	18.15	Inf	23.44	30.00
6705MHz	Pass	5.29	11.65	12.73	11.04	13.31	18.29	Inf	23.58	30.00
6785MHz	Pass	5.29	11.05	13.14	11.22	13.41	18.36	Inf	23.65	30.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6865MHz Straddle 6.525-6.875GHz	Pass	5.29	10.85	12.52	11.24	13.06	18.03	Inf	23.32	30.00
6945MHz	Pass	5.33	10.54	12.95	10.78	12.83	17.94	Inf	23.27	30.00
7025MHz	Pass	5.33	11.08	13.41	11.25	12.63	18.22	Inf	23.55	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.44	14.65	15.15	15.46	16.04	21.37	Inf	26.81	30.00
6185MHz	Pass	5.44	14.92	14.79	16.01	15.41	21.33	Inf	26.77	30.00
6345MHz	Pass	5.44	15.23	14.94	16.02	15.54	21.47	Inf	26.91	30.00
6505MHz Straddle 6.425-6.525GHz	Pass	5.27	14.46	14.13	14.53	16.02	20.87	Inf	26.14	30.00
6665MHz	Pass	5.29	13.92	15.19	13.81	16.16	20.90	Inf	26.19	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	5.29	13.75	15.74	14.02	16.17	21.07	Inf	26.36	30.00
6985MHz	Pass	5.33	14.47	16.88	14.44	15.72	21.52	Inf	26.85	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.44	17.23	17.45	17.76	17.91	23.62	Inf	29.06	30.00
6265MHz	Pass	5.44	17.13	17.36	17.64	17.8	23.51	Inf	28.95	30.00
6425MHz Straddle 6.425-6.525GHz	Pass	5.27	16.66	16.98	16.62	18.05	23.14	Inf	28.41	30.00
6585MHz Straddle 6.425-6.525GHz	Pass	5.27	16.21	16.85	16.49	18.35	23.08	Inf	28.35	30.00
6745MHz Straddle 6.525-6.875GHz	Pass	5.29	15.79	17.62	16.38	17.68	22.96	Inf	28.25	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	5.29	15.72	17.81	16.42	17.8	23.05	Inf	28.34	30.00

DG = Directional Gain; Port X = Port X output power

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.62	4.82
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-0.74	4.70
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-0.69	4.75
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-0.49	4.95
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-0.50	4.94
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-0.55	4.89
6.425-6.525GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.89	4.38
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-0.83	4.44
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-1.03	4.24
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-0.97	4.30
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-1.14	4.13
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-1.09	4.18
6.525-6.875GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.80	4.49
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-0.72	4.57
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-0.71	4.58
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-0.95	4.34
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-0.87	4.42
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-0.78	4.51
6.875-7.125GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.58	4.75
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-0.69	4.64
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-0.70	4.63
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-0.60	4.73
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-0.56	4.77

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/ RBW)	Port 2 (dBm/ RBW)	Port 3 (dBm/ RBW)	Port 4 (dBm/ RBW)	PD (dBm/ RBW)	PD Limit (dBm/ RBW)	EIRP PD (dBm/ RBW)	EIRP PD Limit (dBm/ RBW)
802.11a_Nss1,(6Mbps)_4TX										
5955MHz	Pass	5.44	-7.05	-6.51	-6.37	-6.13	-0.75	Inf	4.69	5.00
6175MHz	Pass	5.44	-7.07	-6.96	-5.32	-6.28	-0.68	Inf	4.76	5.00
6415MHz	Pass	5.44	-5.97	-6.81	-6.37	-5.81	-0.62	Inf	4.82	5.00
6435MHz	Pass	5.27	-6.64	-6.38	-7.34	-6.01	-0.95	Inf	4.32	5.00
6475MHz	Pass	5.27	-6.49	-6.76	-6.77	-5.96	-0.89	Inf	4.38	5.00
6515MHz	Pass	5.27	-6.41	-6.68	-7.10	-5.85	-0.96	Inf	4.31	5.00
6535MHz	Pass	5.29	-6.36	-6.45	-7.03	-5.88	-0.80	Inf	4.49	5.00
6715MHz	Pass	5.29	-7.35	-6.40	-7.01	-5.91	-1.21	Inf	4.08	5.00
6855MHz	Pass	5.29	-7.22	-6.91	-6.70	-6.66	-1.11	Inf	4.18	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.12	-6.66	-7.25	-6.40	-1.12	Inf	4.17	5.00
6895MHz	Pass	5.33	-7.85	-6.44	-6.23	-6.42	-0.92	Inf	4.41	5.00
7015MHz	Pass	5.33	-6.48	-6.32	-6.33	-7.34	-0.83	Inf	4.50	5.00
7095MHz	Pass	5.33	-6.55	-6.19	-6.11	-6.43	-0.58	Inf	4.75	5.00
7115MHz	Pass	5.33	-6.78	-6.21	-6.39	-6.21	-0.59	Inf	4.74	5.00
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA										
5955MHz	Pass	5.44	-6.84	-6.27	-6.61	-6.29	-0.89	Inf	4.55	5.00
6175MHz	Pass	5.44	-6.86	-6.78	-6.00	-6.47	-0.79	Inf	4.65	5.00
6415MHz	Pass	5.44	-6.08	-6.57	-6.57	-5.83	-0.74	Inf	4.70	5.00
6435MHz	Pass	5.27	-6.49	-6.21	-7.49	-5.91	-0.87	Inf	4.40	5.00
6475MHz	Pass	5.27	-6.83	-6.80	-6.47	-5.58	-0.83	Inf	4.44	5.00
6515MHz	Pass	5.27	-6.51	-6.53	-7.07	-6.01	-0.91	Inf	4.36	5.00
6535MHz	Pass	5.29	-6.21	-6.46	-7.02	-5.55	-0.72	Inf	4.57	5.00
6715MHz	Pass	5.29	-6.94	-5.92	-6.85	-6.03	-0.85	Inf	4.44	5.00
6855MHz	Pass	5.29	-7.14	-6.50	-6.77	-6.24	-0.95	Inf	4.34	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.15	-6.33	-6.81	-6.21	-1.05	Inf	4.24	5.00
6895MHz	Pass	5.33	-7.74	-5.67	-6.37	-6.25	-0.76	Inf	4.57	5.00
7015MHz	Pass	5.33	-6.32	-6.34	-6.37	-7.71	-1.00	Inf	4.33	5.00
7095MHz	Pass	5.33	-7.19	-6.30	-6.59	-6.92	-0.91	Inf	4.42	5.00
7115MHz	Pass	5.33	-7.10	-5.90	-6.56	-6.41	-0.69	Inf	4.64	5.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA										
5965MHz	Pass	5.44	-7.06	-6.41	-6.93	-6.14	-0.93	Inf	4.51	5.00
6165MHz	Pass	5.44	-6.36	-6.65	-5.61	-6.31	-0.69	Inf	4.75	5.00
6405MHz	Pass	5.44	-6.01	-6.26	-6.35	-5.99	-0.69	Inf	4.75	5.00
6445MHz	Pass	5.27	-6.98	-6.73	-7.48	-5.51	-1.22	Inf	4.05	5.00
6485MHz	Pass	5.27	-6.83	-6.79	-7.03	-5.62	-1.03	Inf	4.24	5.00
6525MHz	Pass	5.27	-7.12	-6.99	-7.26	-5.73	-1.28	Inf	3.99	5.00

Mode	Result	DG (dBi)	Port 1 (dBm/ RBW)	Port 2 (dBm/ RBW)	Port 3 (dBm/ RBW)	Port 4 (dBm/ RBW)	PD (dBm/ RBW)	PD Limit (dBm/ RBW)	EIRP PD (dBm/ RBW)	EIRP PD Limit (dBm/ RBW)
Straddle 6.425-6.525GHz										
6565MHz	Pass	5.29	-6.83	-6.54	-6.29	-5.97	-0.71	Inf	4.58	5.00
6725MHz	Pass	5.29	-7.51	-6.76	-7.16	-5.62	-1.04	Inf	4.25	5.00
6845MHz	Pass	5.29	-6.93	-6.42	-6.21	-6.72	-0.82	Inf	4.47	5.00
6885MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.00	-6.29	-6.60	-6.10	-0.73	Inf	4.56	5.00
6925MHz	Pass	5.33	-6.86	-5.96	-6.40	-6.57	-0.78	Inf	4.55	5.00
7005MHz	Pass	5.33	-6.53	-6.87	-6.44	-7.49	-0.93	Inf	4.40	5.00
7085MHz	Pass	5.33	-5.98	-6.69	-6.32	-6.52	-0.70	Inf	4.63	5.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA										
5985MHz	Pass	5.44	-7.09	-6.72	-6.36	-6.17	-0.90	Inf	4.54	5.00
6145MHz	Pass	5.44	-6.36	-6.68	-5.62	-5.75	-0.49	Inf	4.95	5.00
6385MHz	Pass	5.44	-6.35	-6.90	-5.75	-6.27	-0.78	Inf	4.66	5.00
6465MHz	Pass	5.27	-6.90	-6.82	-6.60	-6.18	-0.97	Inf	4.30	5.00
6545MHz Straddle 6.425-6.525GHz	Pass	5.27	-6.56	-6.46	-6.76	-6.55	-1.09	Inf	4.18	5.00
6625MHz	Pass	5.29	-6.95	-6.77	-6.78	-6.67	-0.95	Inf	4.34	5.00
6705MHz	Pass	5.29	-7.06	-6.62	-6.93	-5.78	-1.01	Inf	4.28	5.00
6785MHz	Pass	5.29	-6.96	-6.42	-6.46	-6.64	-1.03	Inf	4.26	5.00
6865MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.32	-6.52	-6.40	-6.51	-1.02	Inf	4.27	5.00
6945MHz	Pass	5.33	-6.92	-5.99	-6.63	-6.76	-1.05	Inf	4.28	5.00
7025MHz	Pass	5.33	-5.85	-6.36	-5.88	-7.04	-0.60	Inf	4.73	5.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA										
6025MHz	Pass	5.44	-7.04	-6.43	-5.74	-6.25	-0.77	Inf	4.67	5.00
6185MHz	Pass	5.44	-6.40	-6.41	-5.66	-6.35	-0.53	Inf	4.91	5.00
6345MHz	Pass	5.44	-5.81	-5.95	-5.89	-6.10	-0.50	Inf	4.94	5.00
6505MHz Straddle 6.425-6.525GHz	Pass	5.27	-7.03	-6.79	-6.53	-6.68	-1.14	Inf	4.13	5.00
6665MHz	Pass	5.29	-7.02	-6.68	-6.75	-6.03	-0.87	Inf	4.42	5.00
6825MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.17	-6.59	-6.73	-6.13	-0.94	Inf	4.35	5.00
6985MHz	Pass	5.33	-6.90	-5.84	-6.26	-6.26	-0.56	Inf	4.77	5.00
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA										
6105MHz	Pass	5.44	-5.98	-5.65	-6.33	-5.78	-0.55	Inf	4.89	5.00
6265MHz	Pass	5.44	-6.68	-7.00	-5.81	-5.06	-0.70	Inf	4.74	5.00
6425MHz Straddle	Pass	5.27	-6.95	-7.38	-6.09	-6.58	-1.09	Inf	4.18	5.00



Mode	Result	DG (dBi)	Port 1 (dBm/ RBW)	Port 2 (dBm/ RBW)	Port 3 (dBm/ RBW)	Port 4 (dBm/ RBW)	PD (dBm/ RBW)	PD Limit (dBm/ RBW)	EIRP PD (dBm/ RBW)	EIRP PD Limit (dBm/ RBW)
6.425-6.525GHz										
6585MHz Straddle 6.425-6.525GHz	Pass	5.27	-6.90	-6.88	-7.08	-6.06	-1.20	Inf	4.07	5.00
6745MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.58	-6.61	-7.28	-6.16	-1.04	Inf	4.25	5.00
6905MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.74	-6.06	-7.08	-4.77	-0.78	Inf	4.51	5.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5955MHz

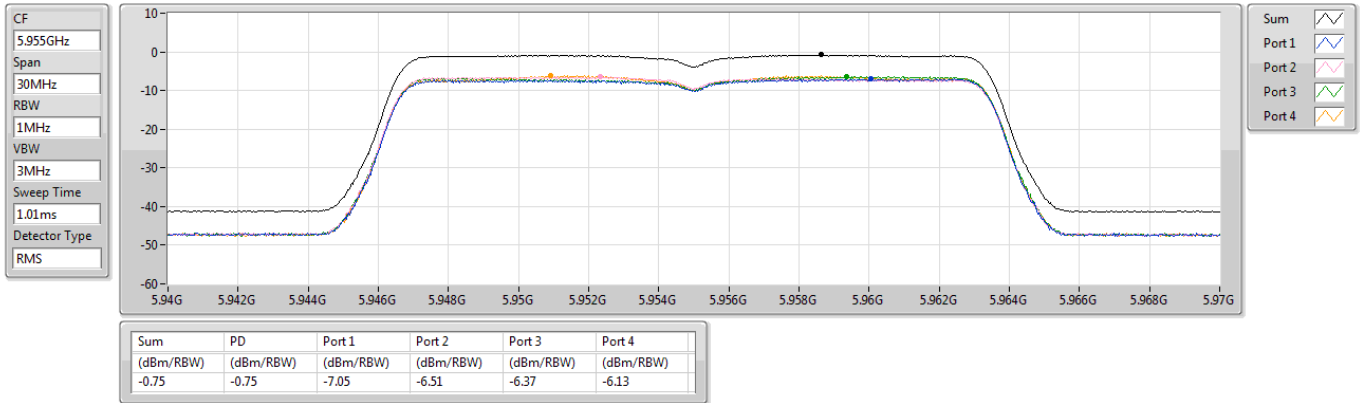

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6175MHz

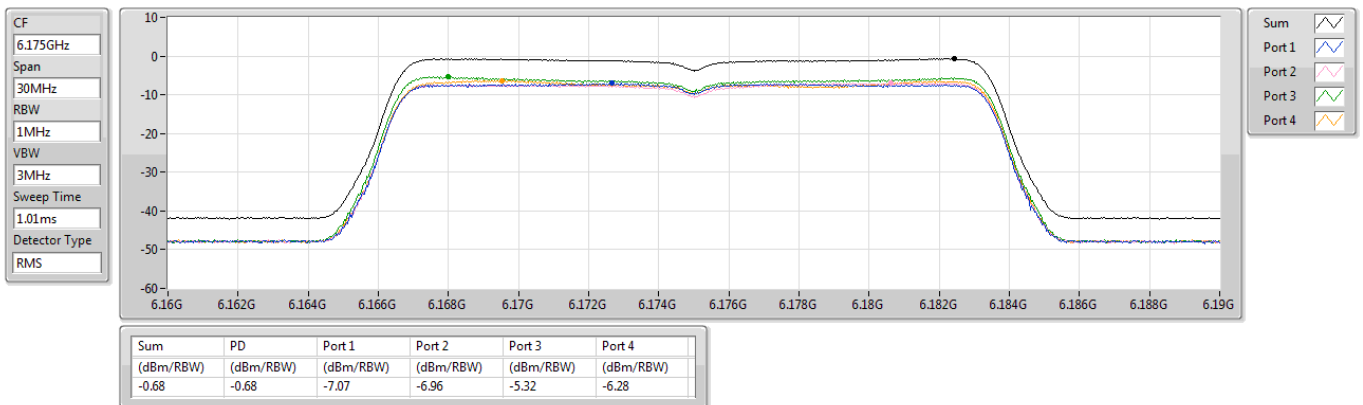

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6415MHz

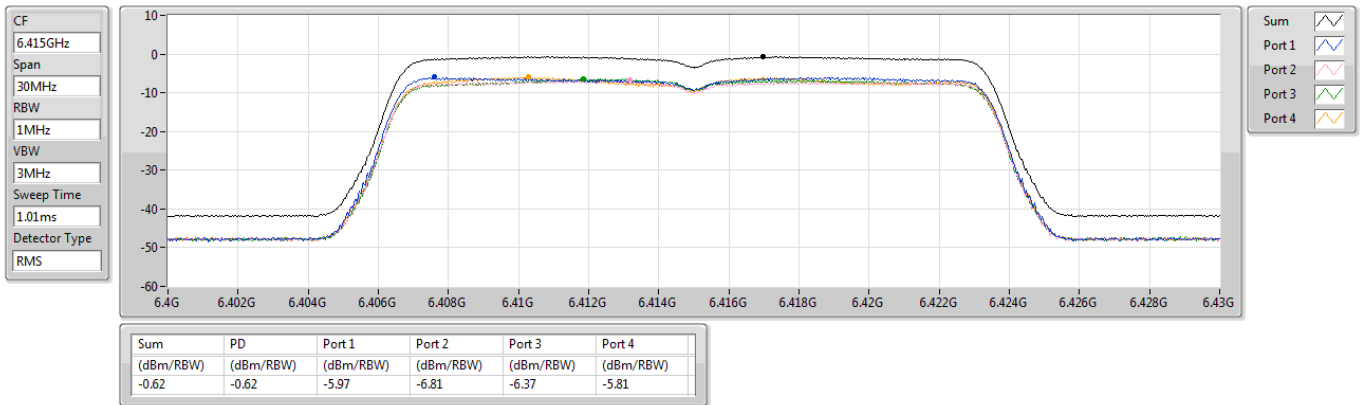

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6435MHz

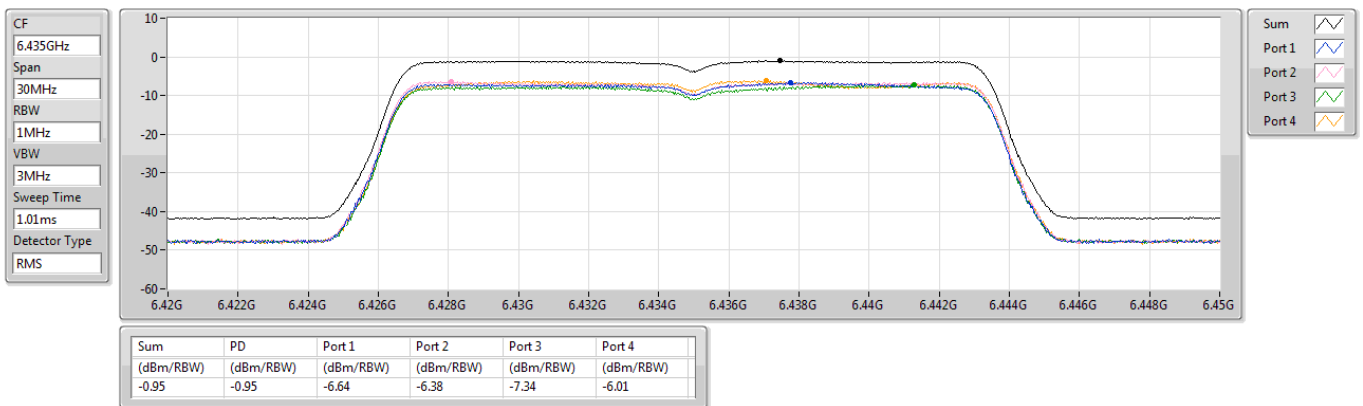

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6475MHz

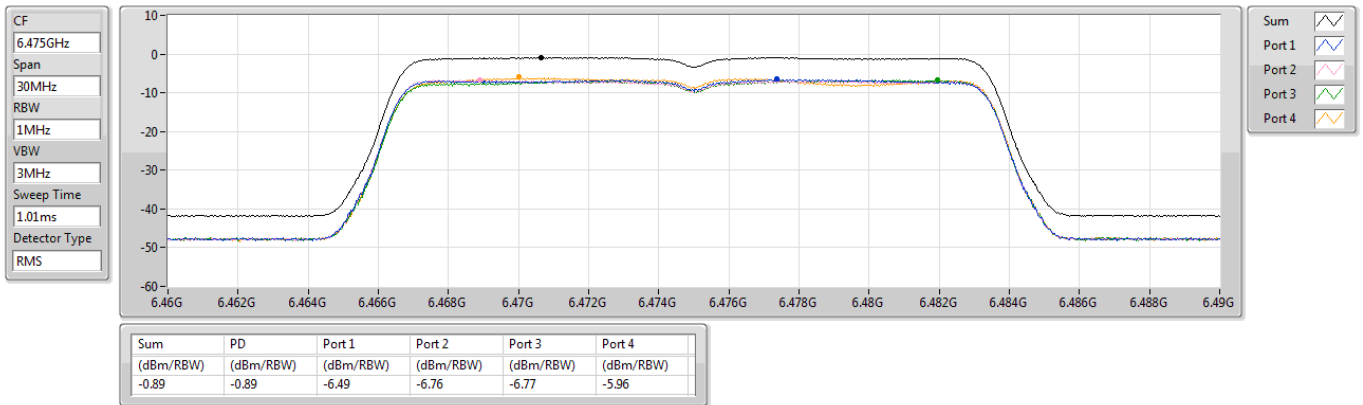

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6515MHz

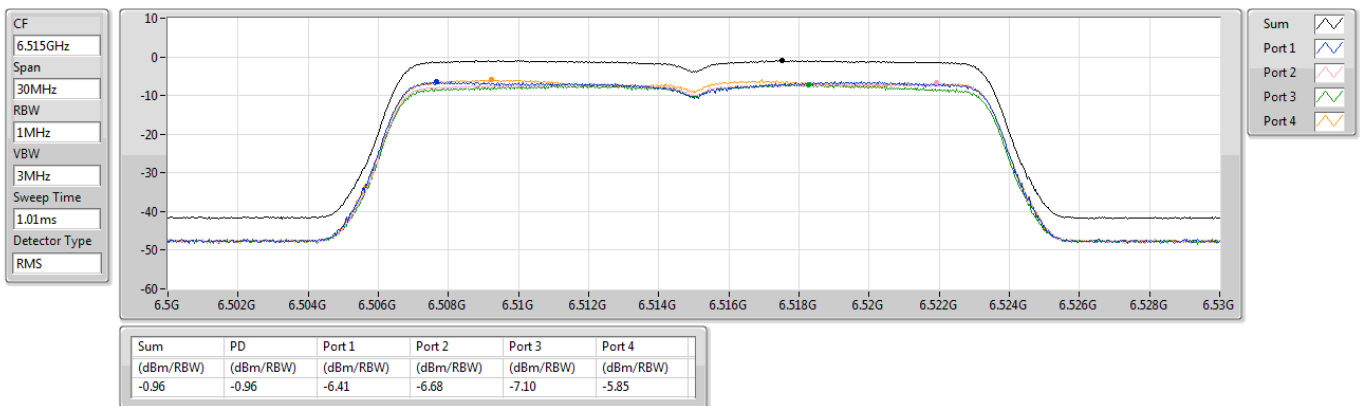

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6535MHz

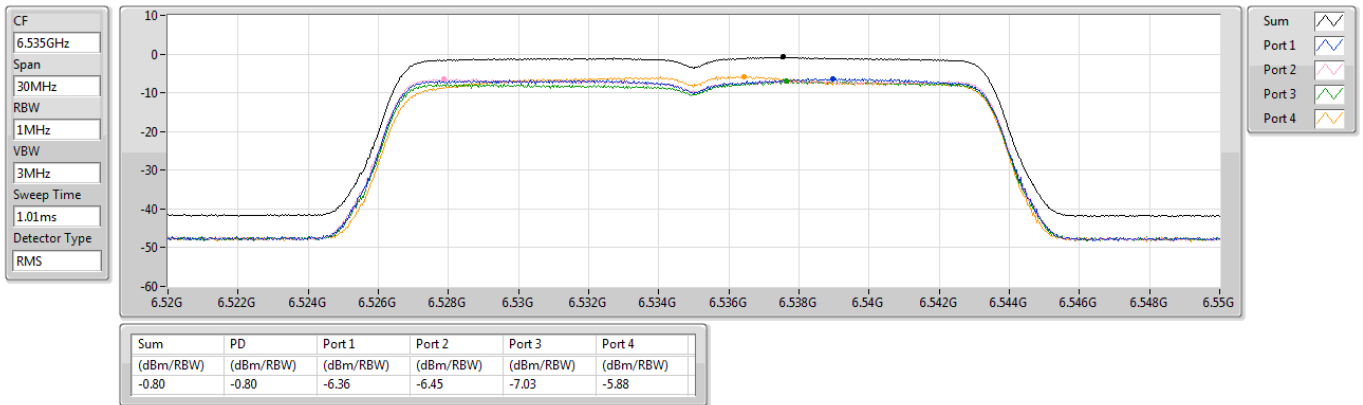

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6715MHz

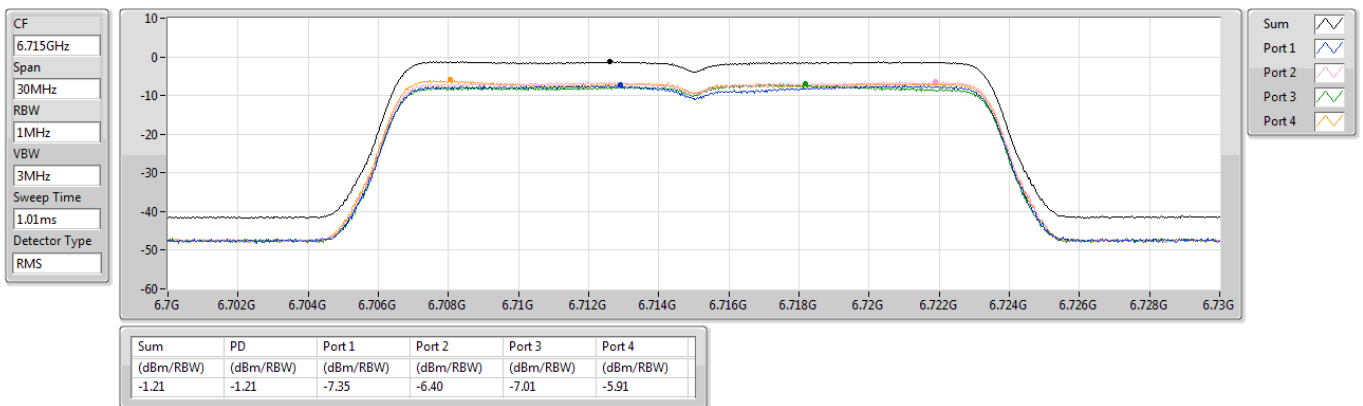

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6855MHz

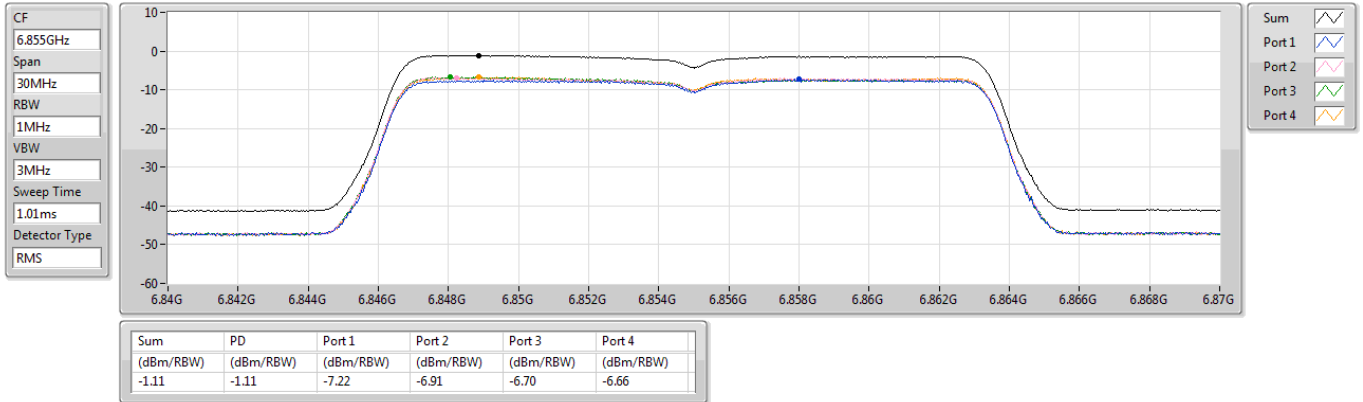

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6875MHz Straddle 6.525-6.875GHz

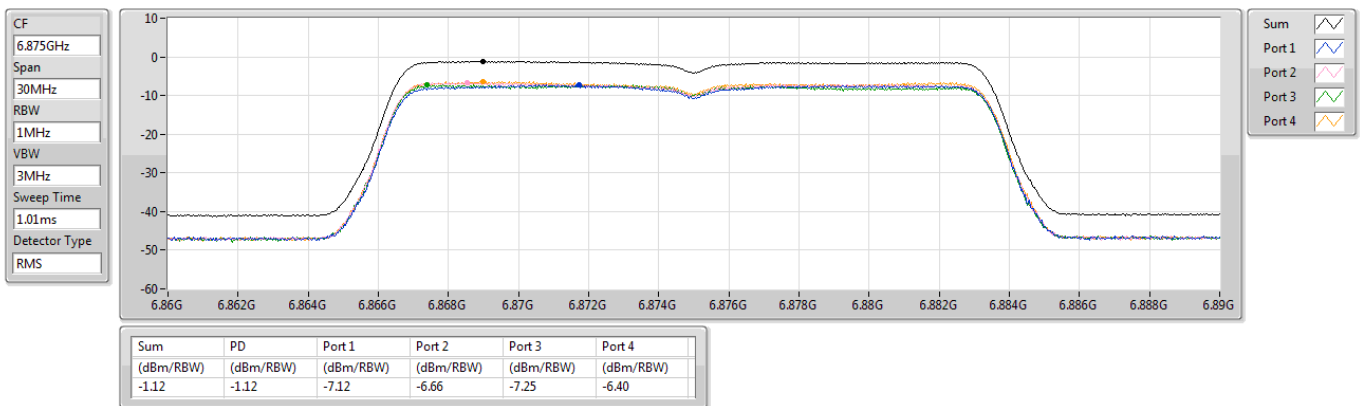

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6895MHz

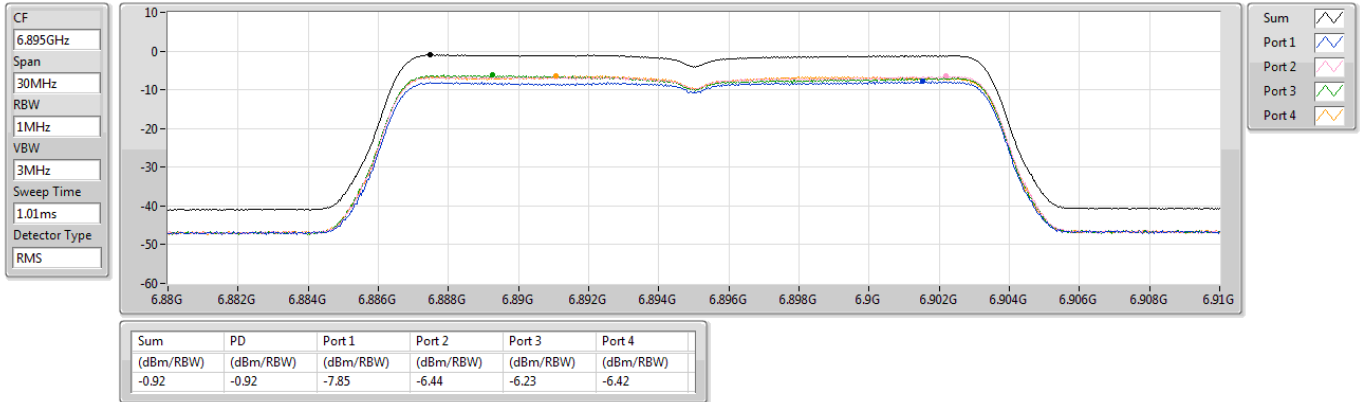

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


7015MHz

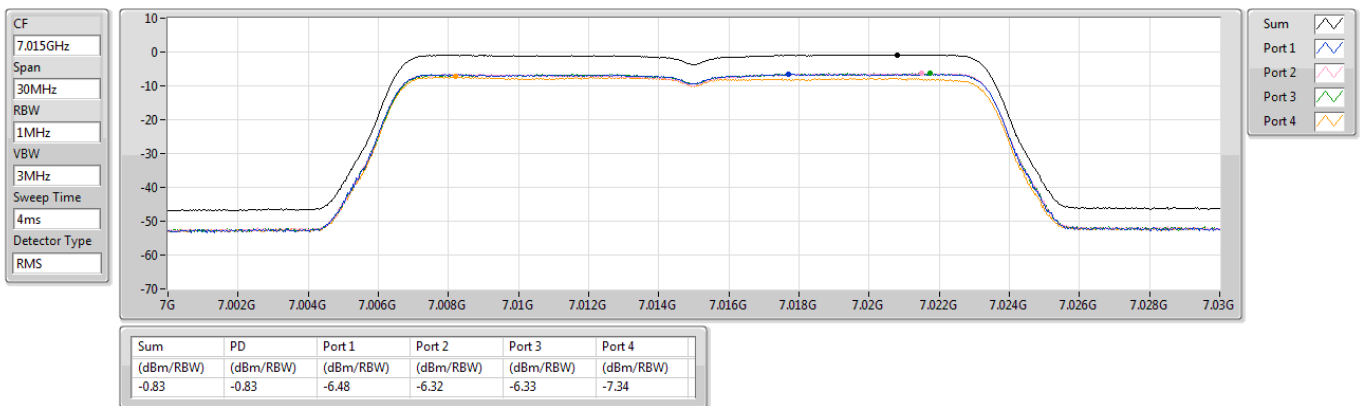

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


7095MHz

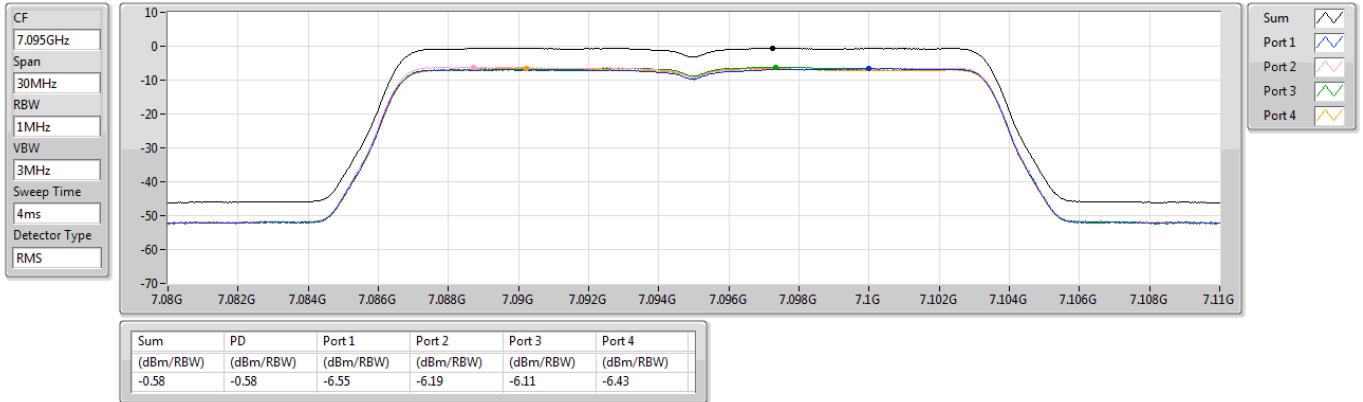

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


7115MHz

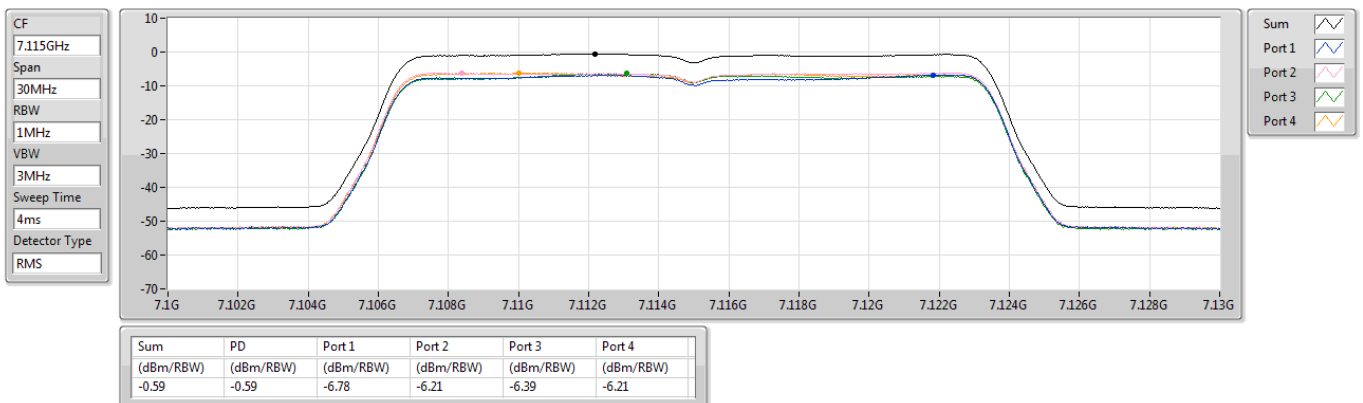

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5955MHz

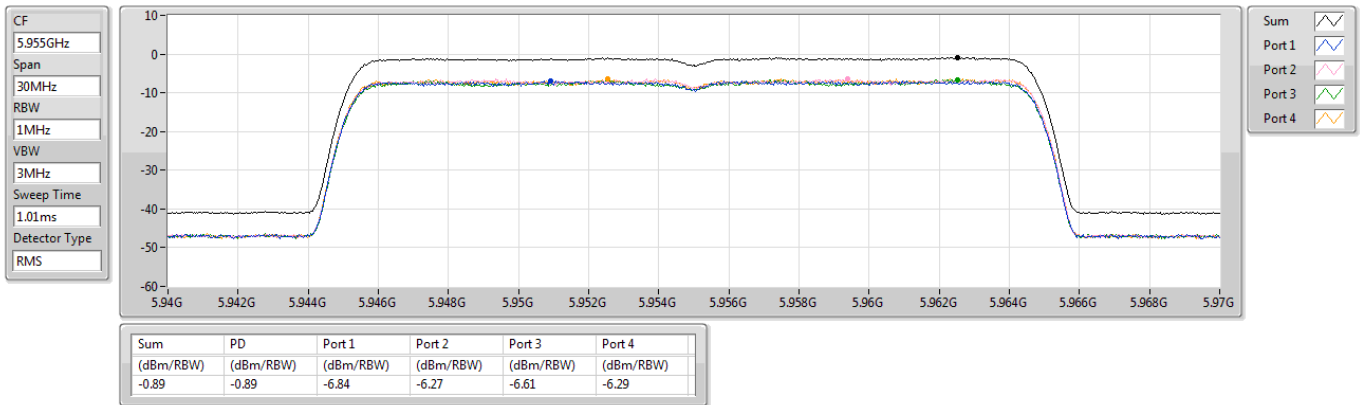

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6175MHz

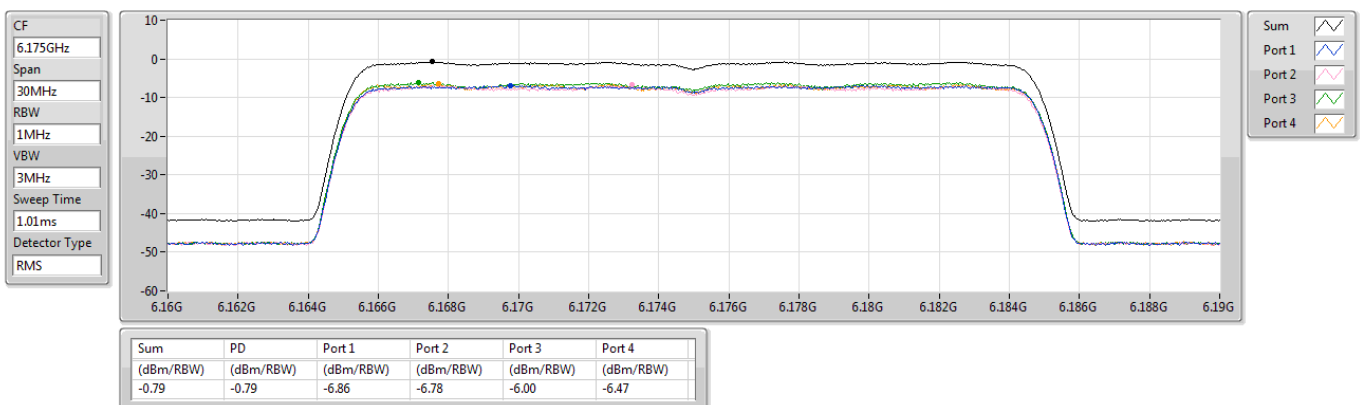

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6415MHz

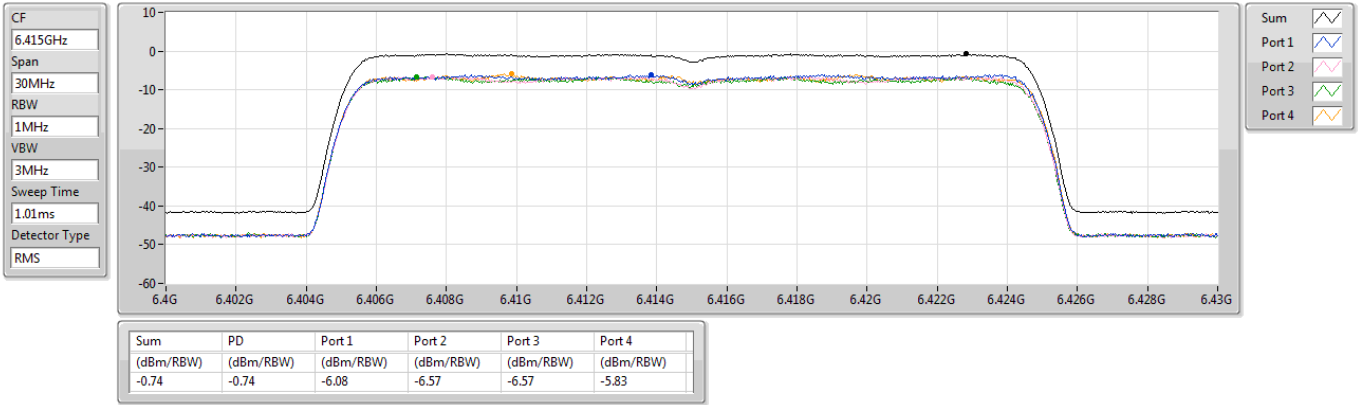

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6435MHz

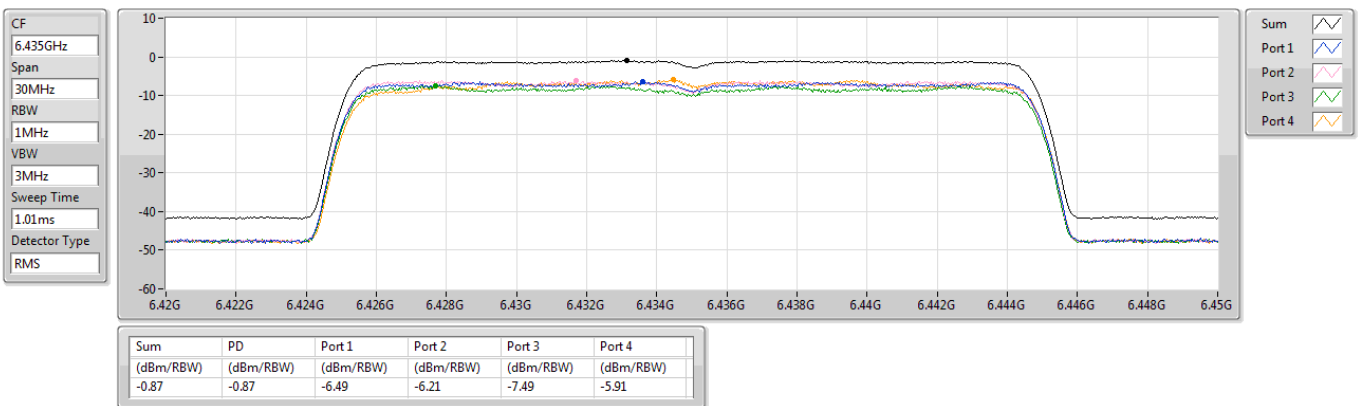

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6475MHz

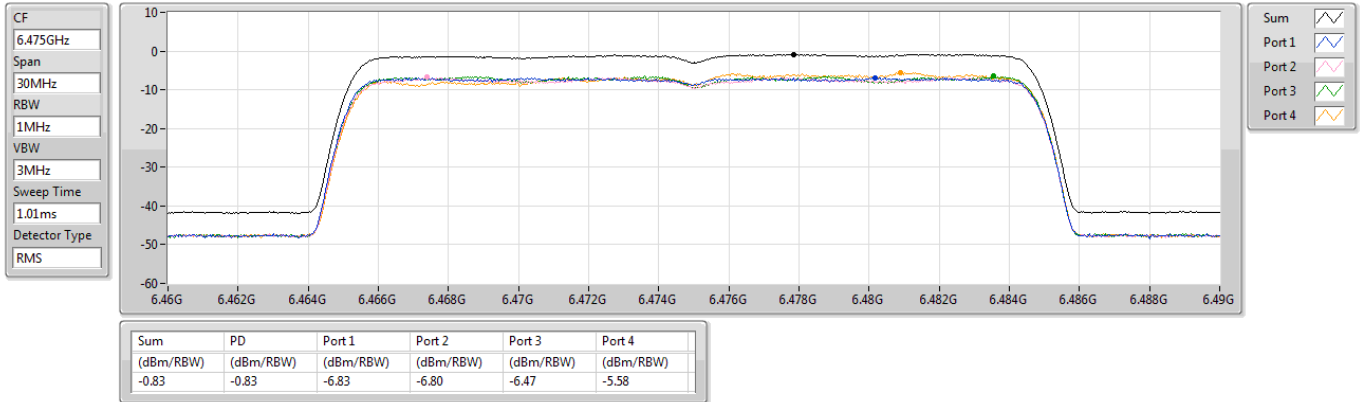

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6515MHz

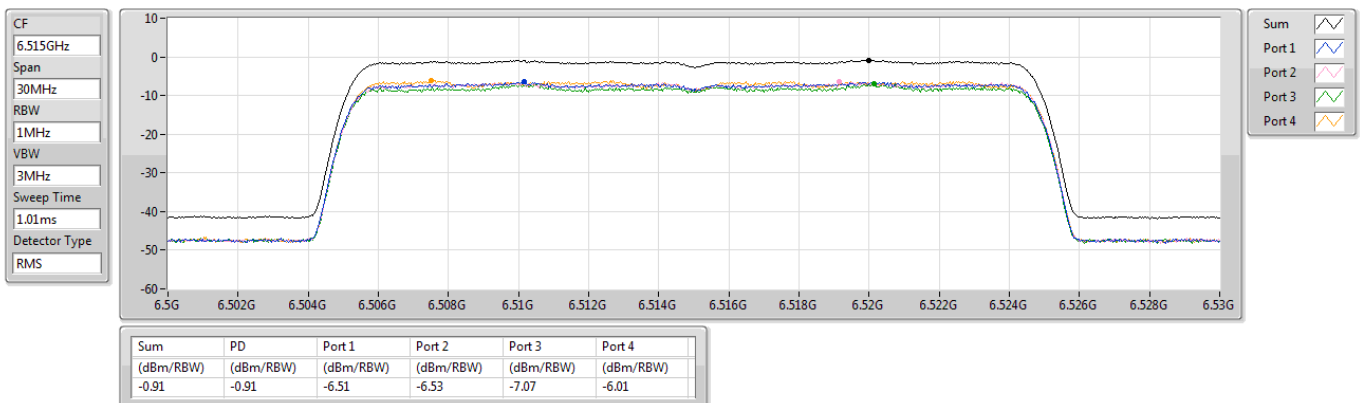

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6535MHz

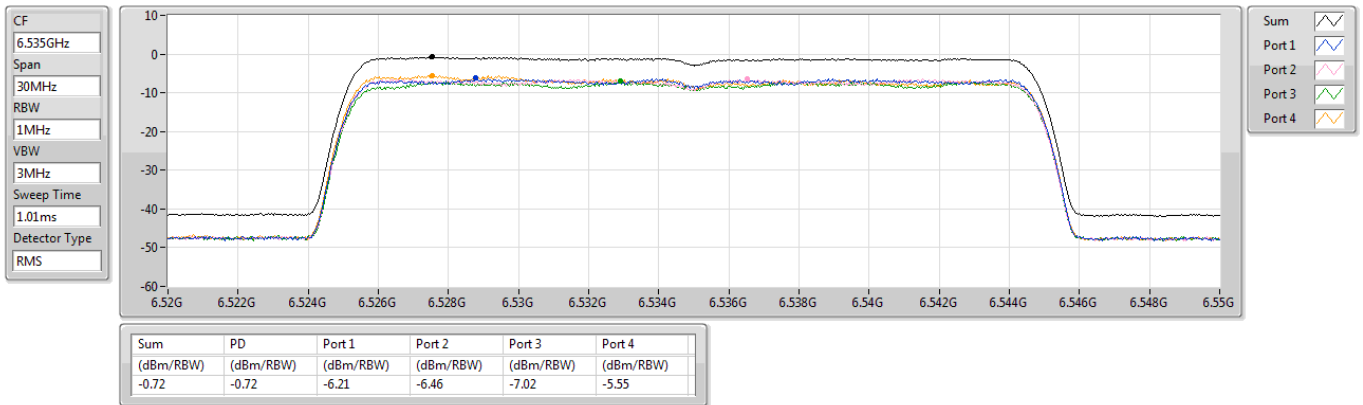

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6715MHz

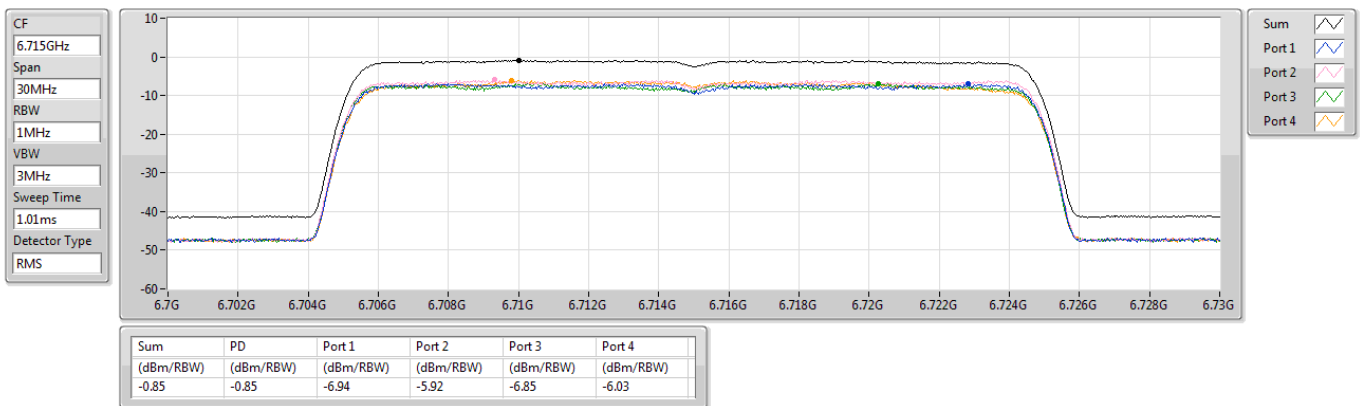

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6855MHz

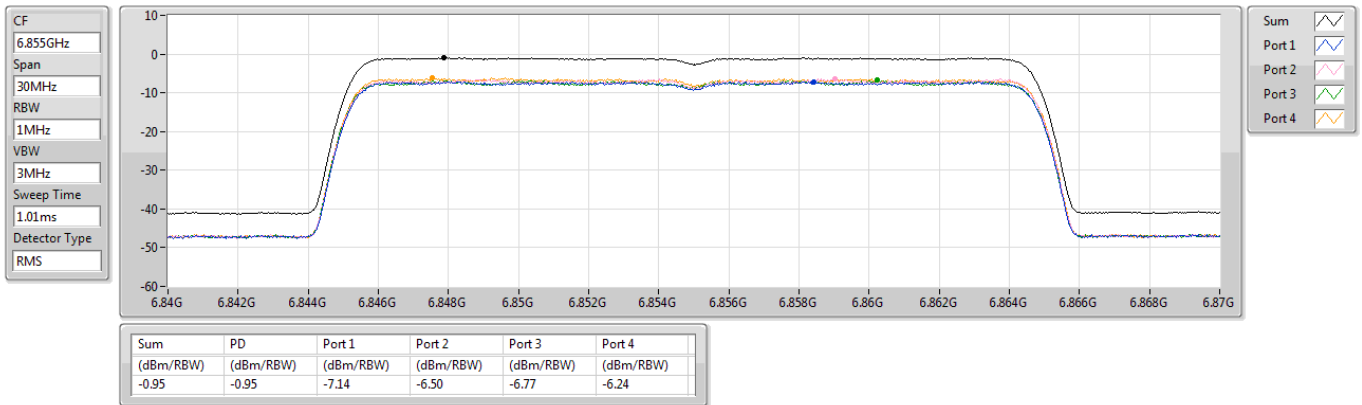

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6875MHz Straddle 6.525-6.875GHz

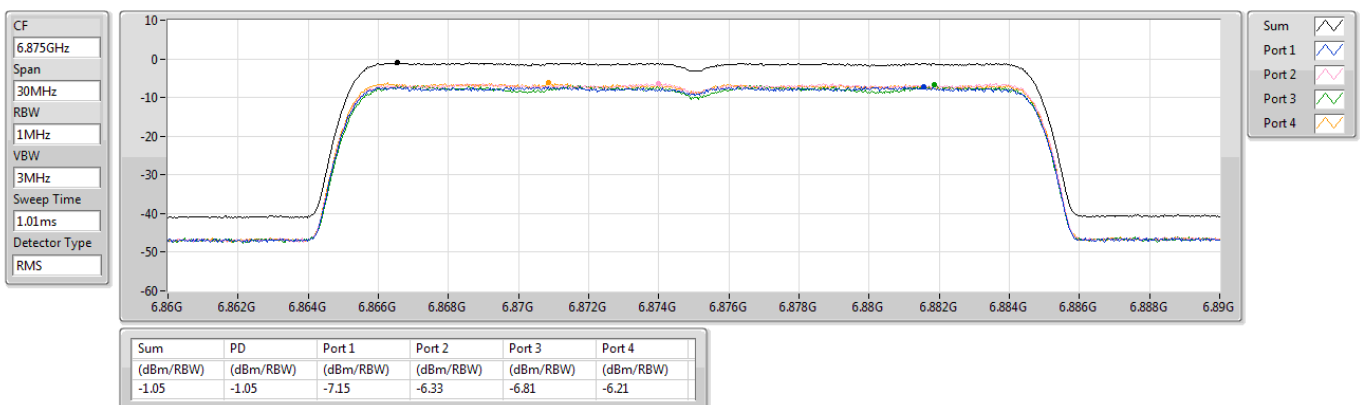

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6895MHz

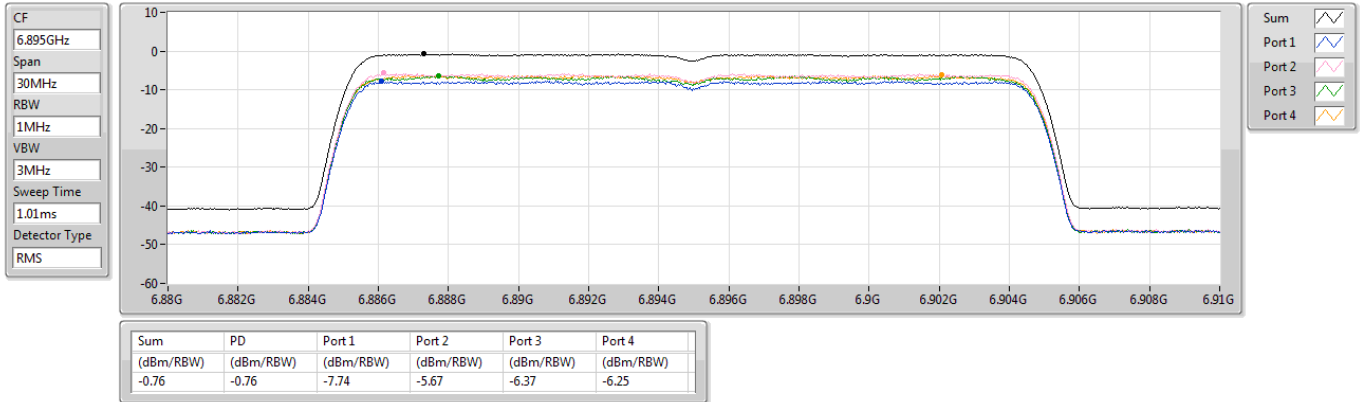

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


7015MHz

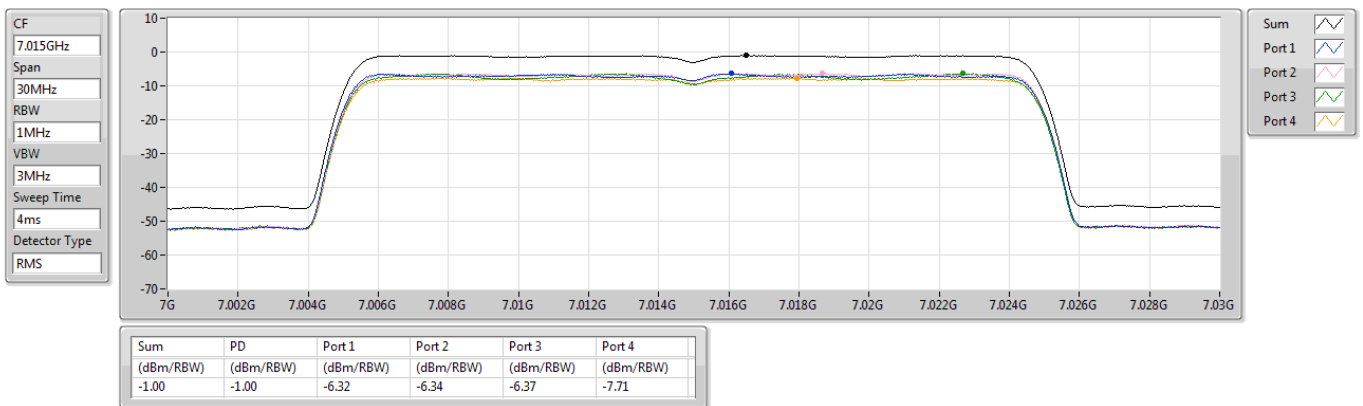

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


7095MHz

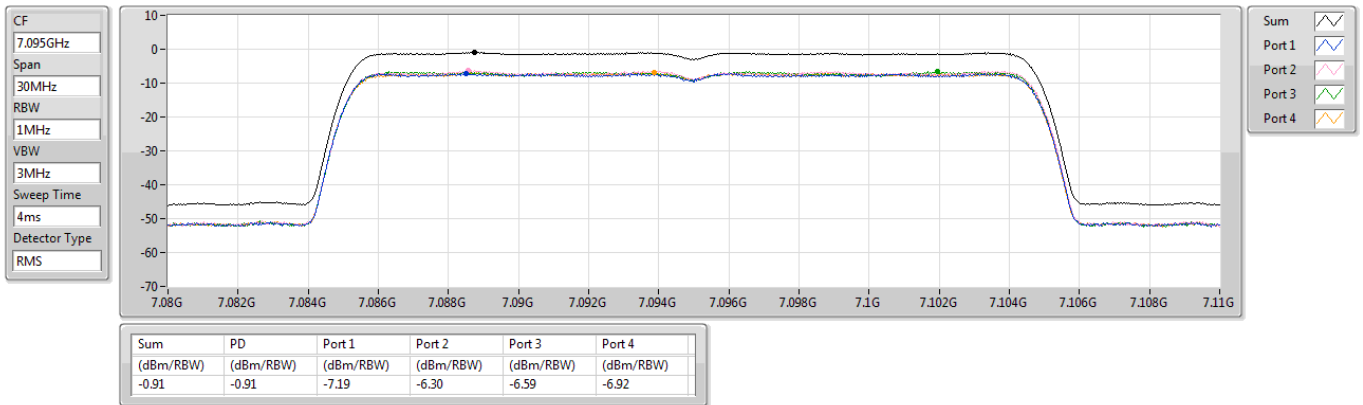

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


7115MHz

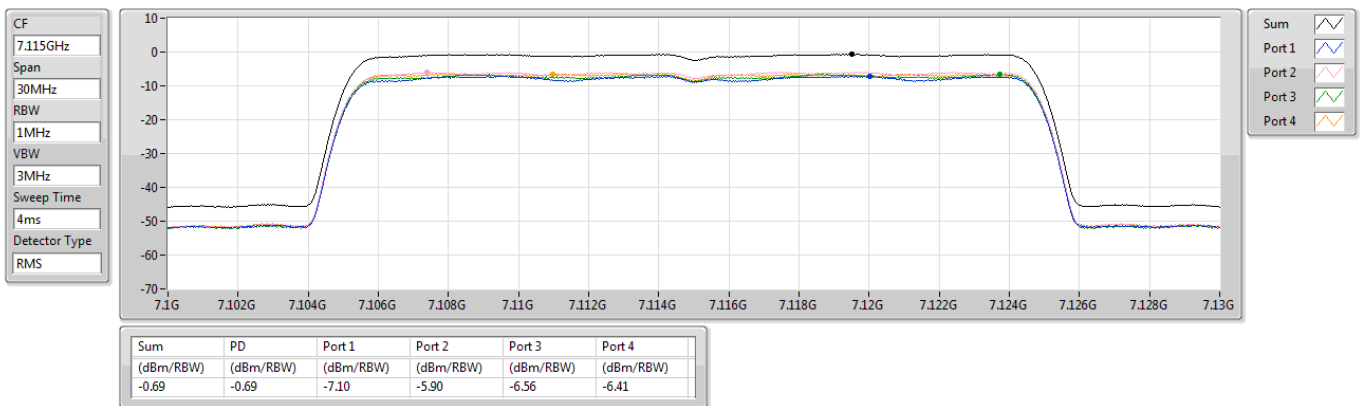

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5965MHz

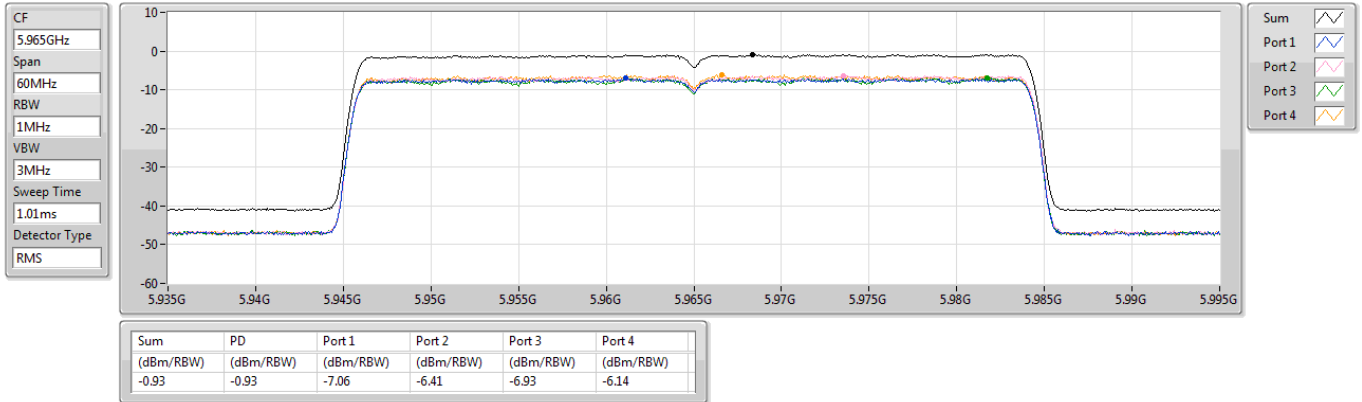

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6165MHz

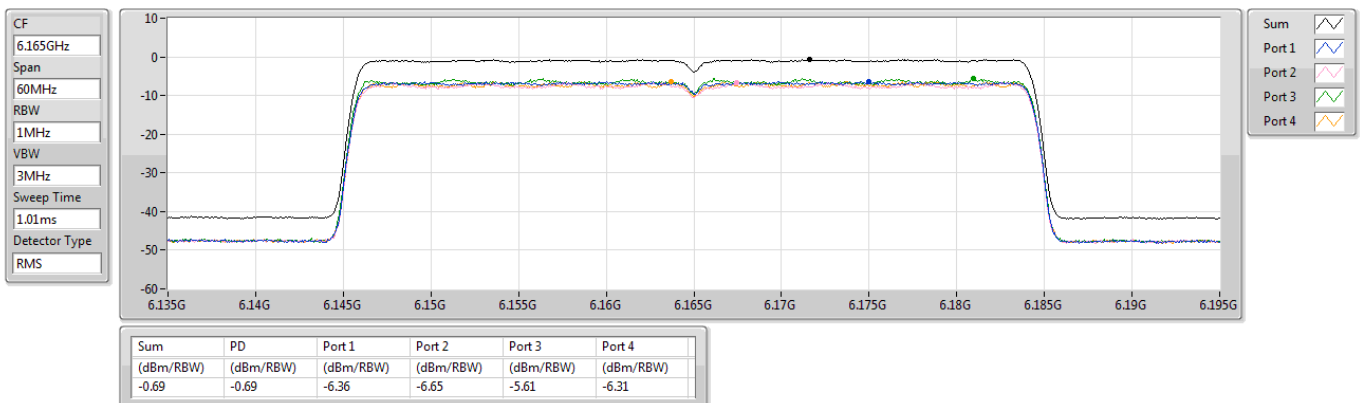

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6405MHz

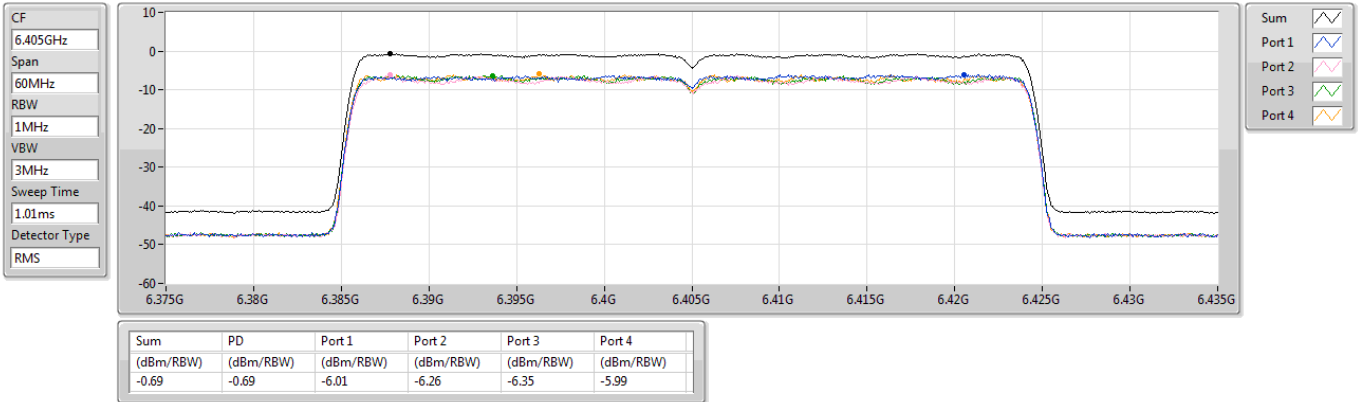

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6445MHz

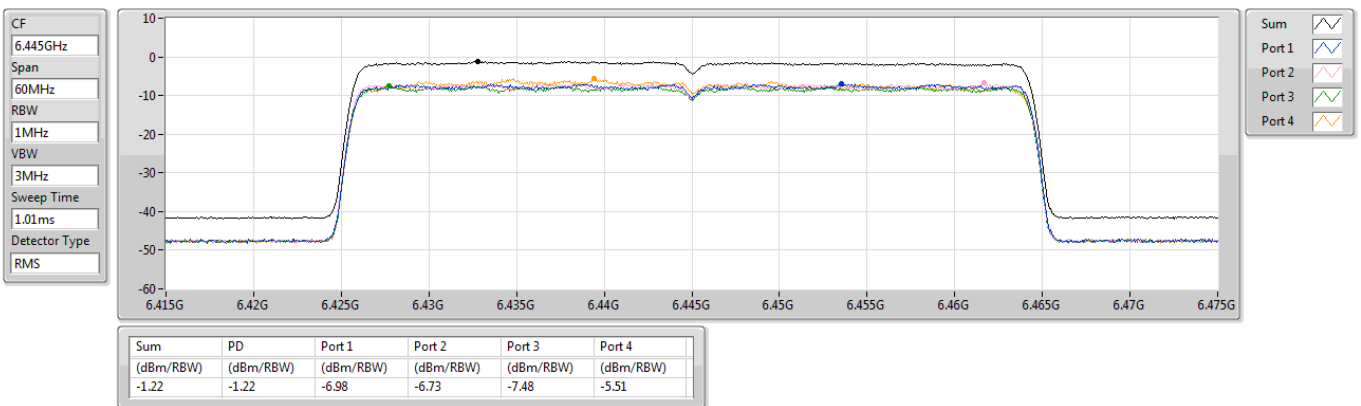

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6485MHz

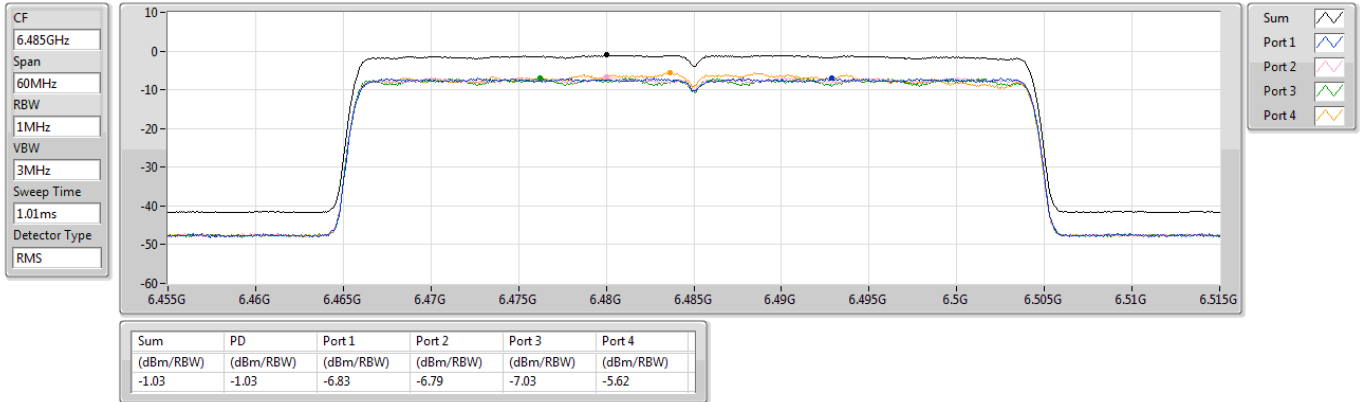

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6525MHz Straddle 6.425-6.525GHz

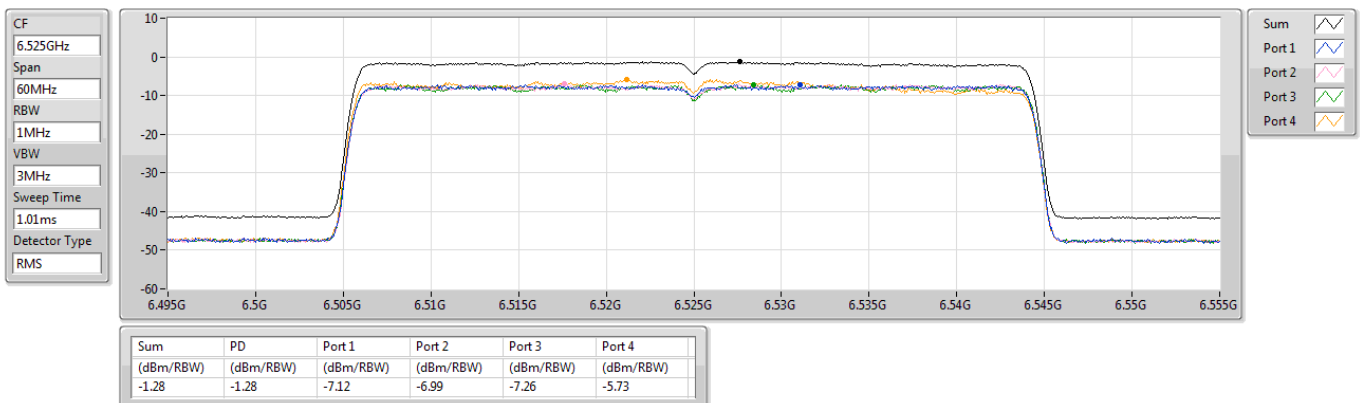

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6565MHz

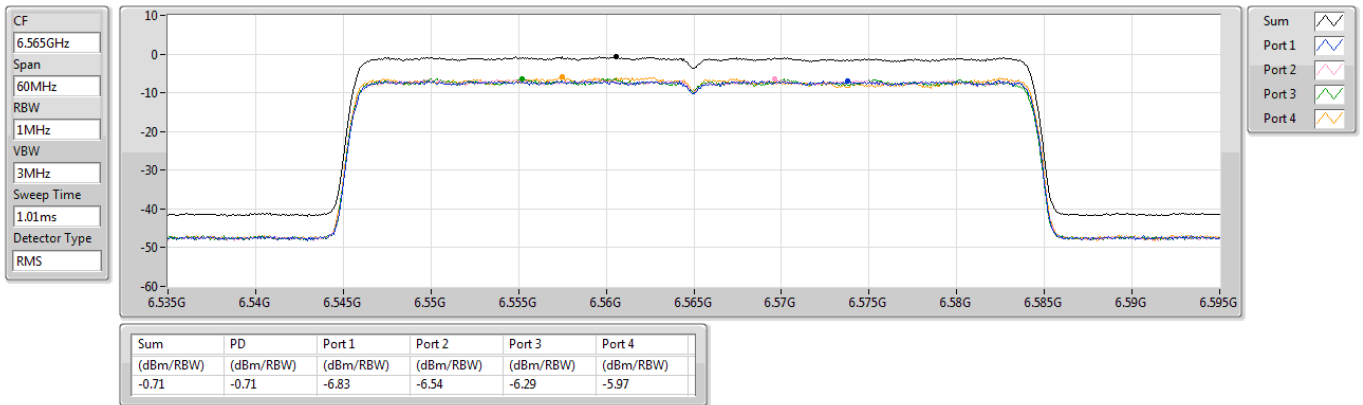

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6725MHz

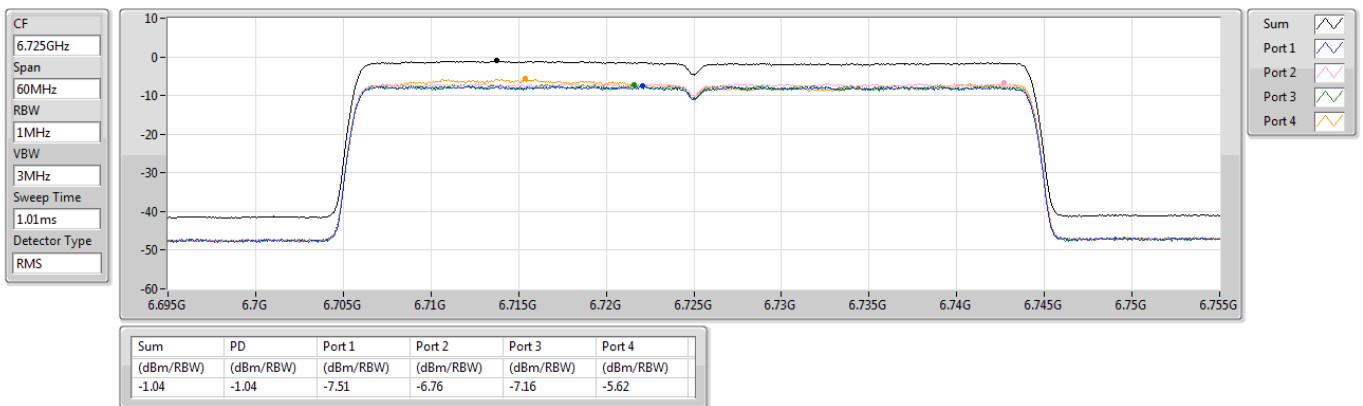




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6845MHz

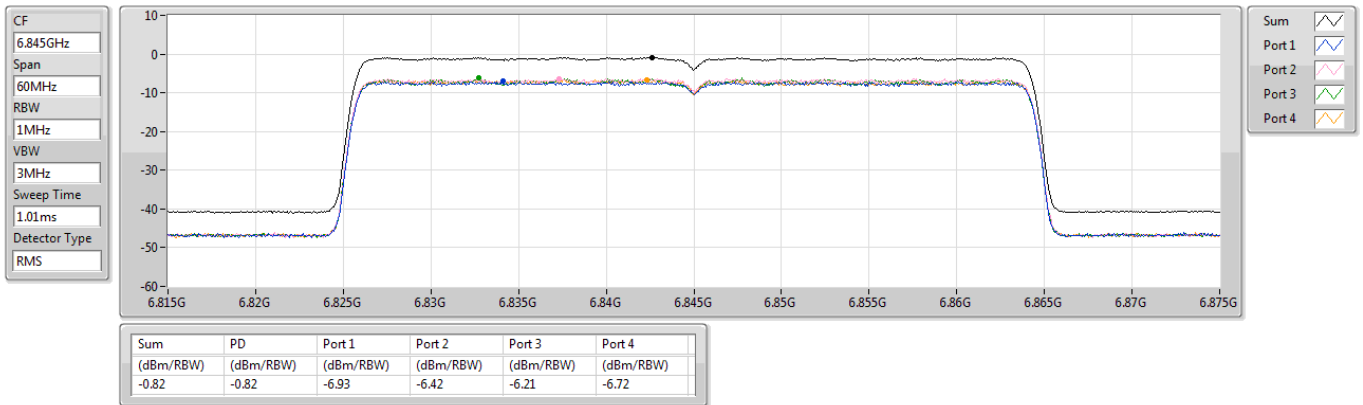

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6885MHz Straddle 6.525-6.875GHz

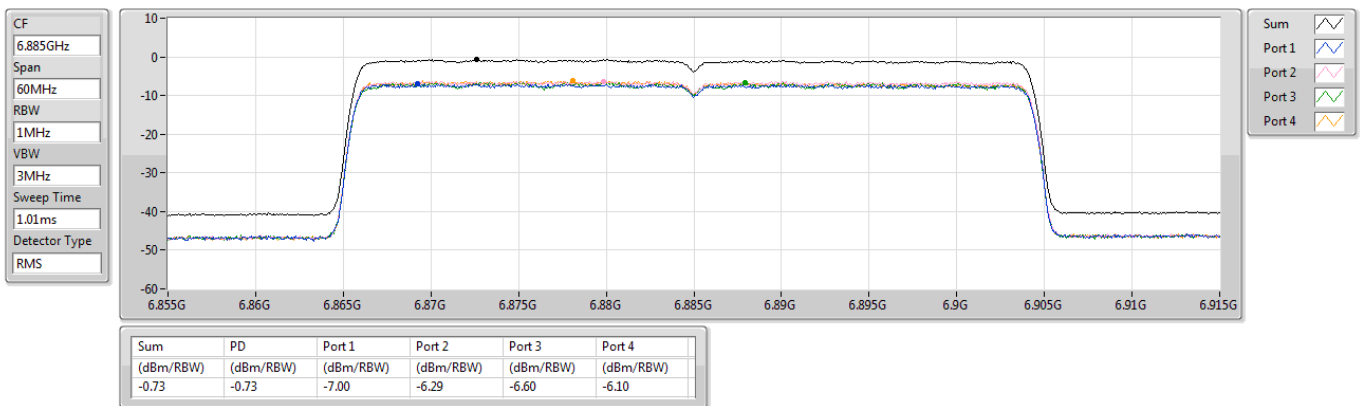

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6925MHz

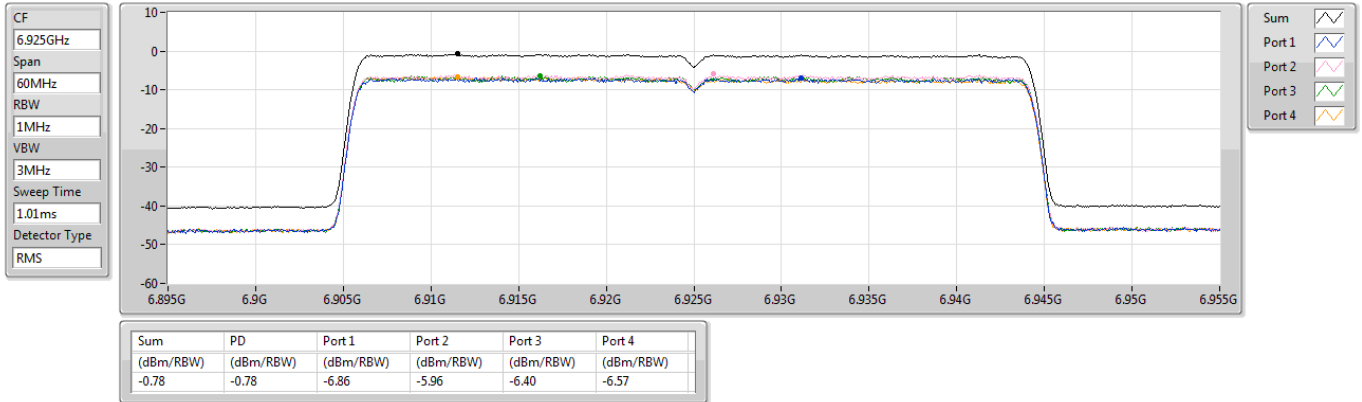

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


7005MHz

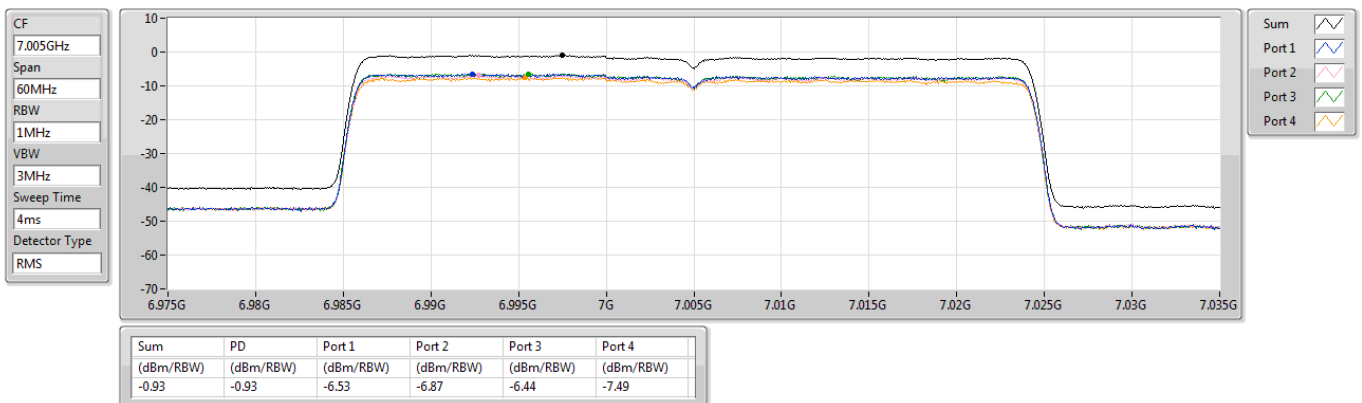

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


7085MHz

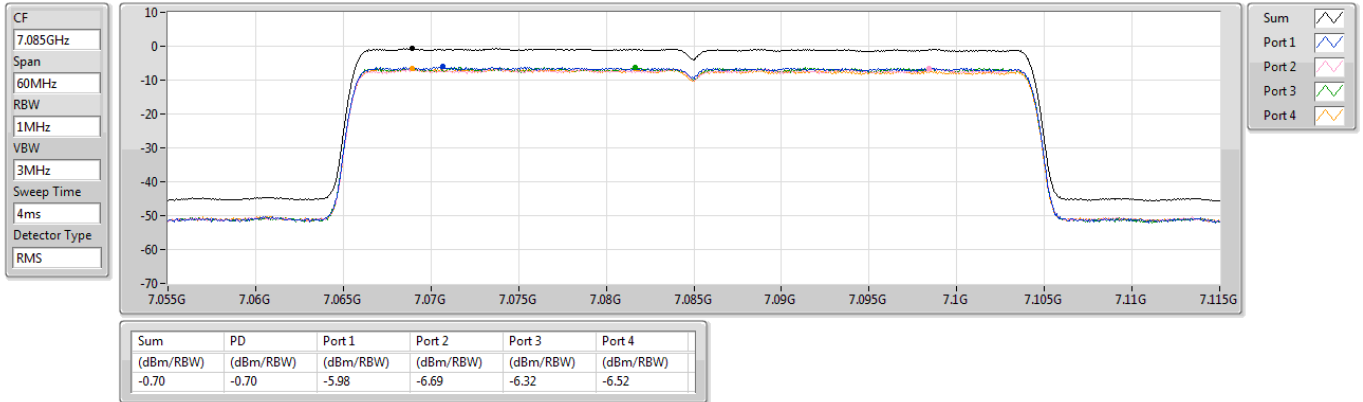

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


5985MHz

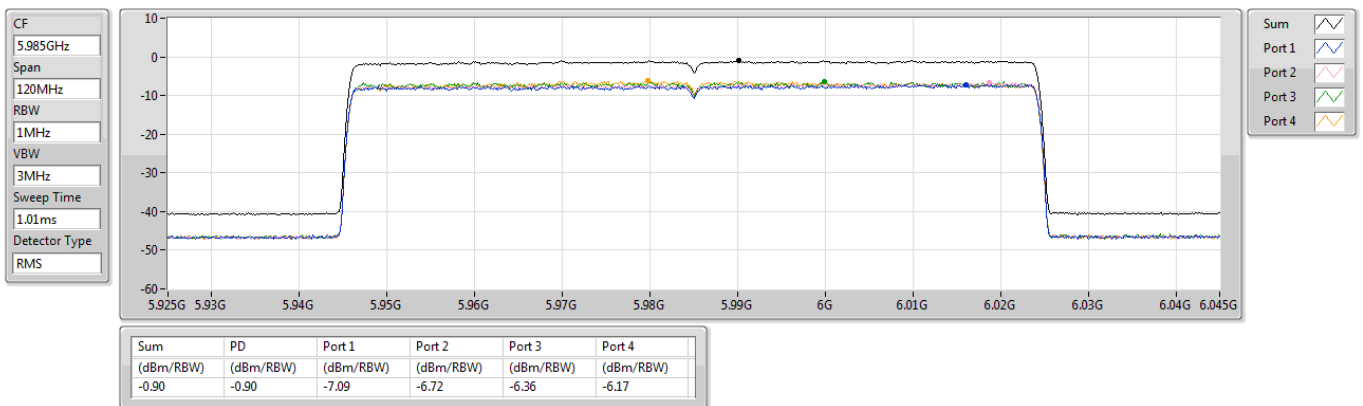

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6145MHz

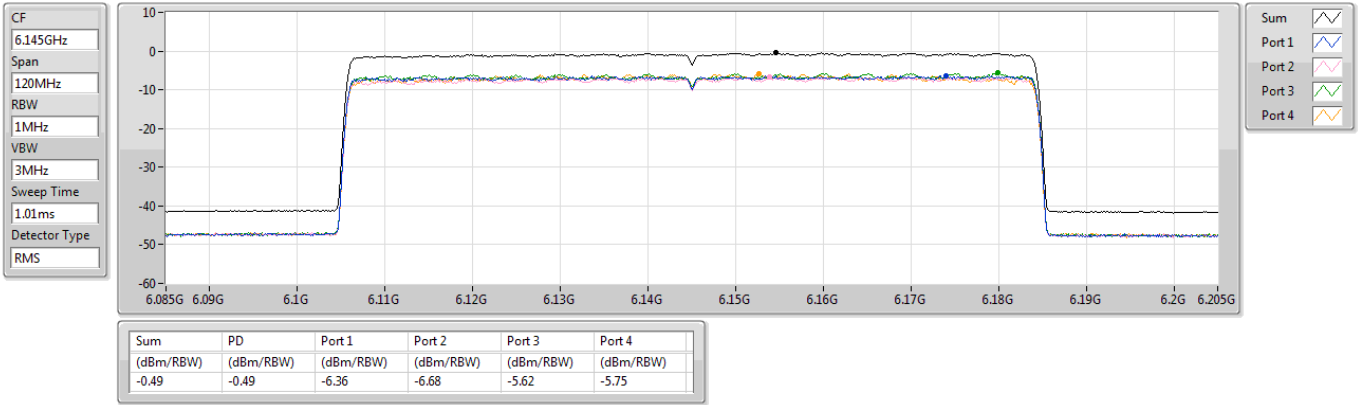

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6385MHz

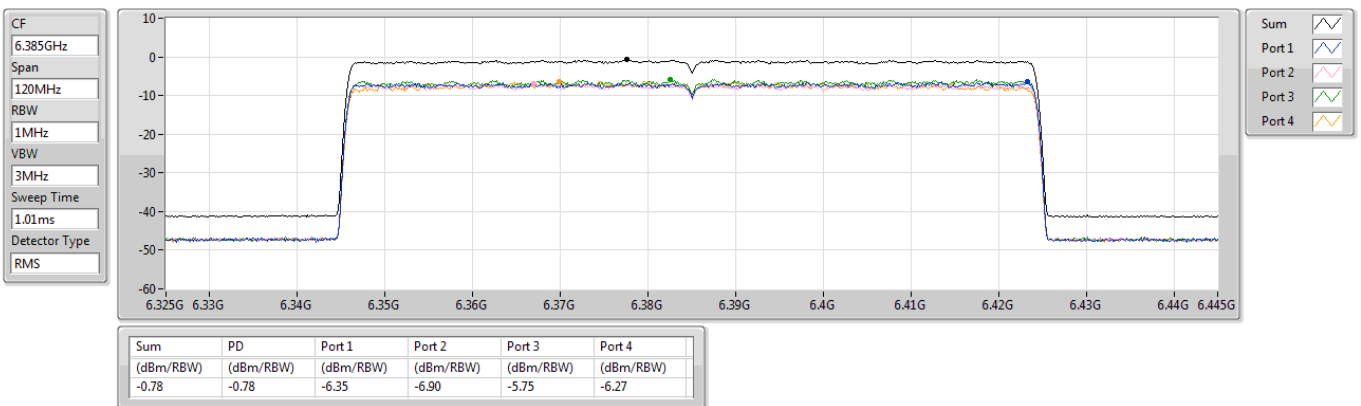

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6465MHz

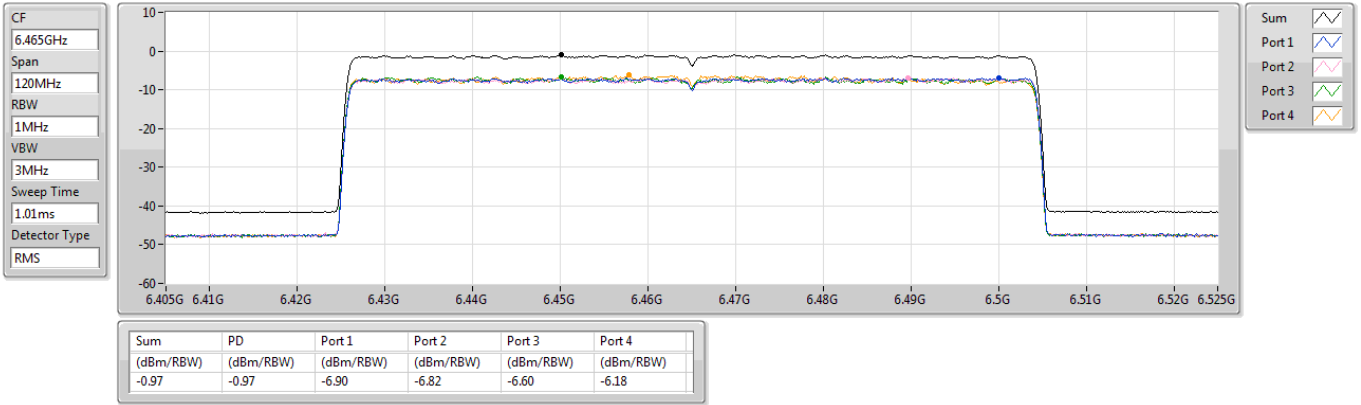

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6545MHz Straddle 6.425-6.525GHz

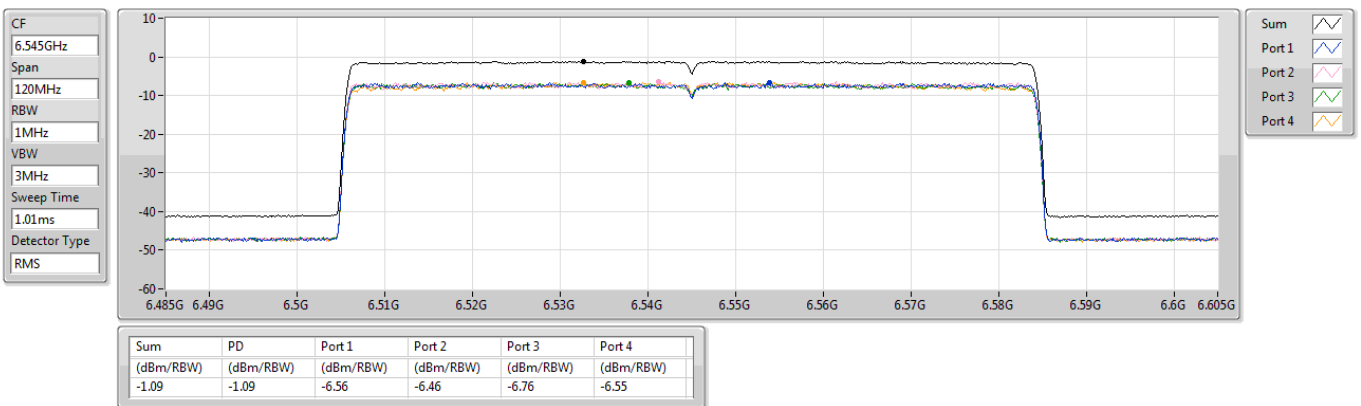

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6625MHz

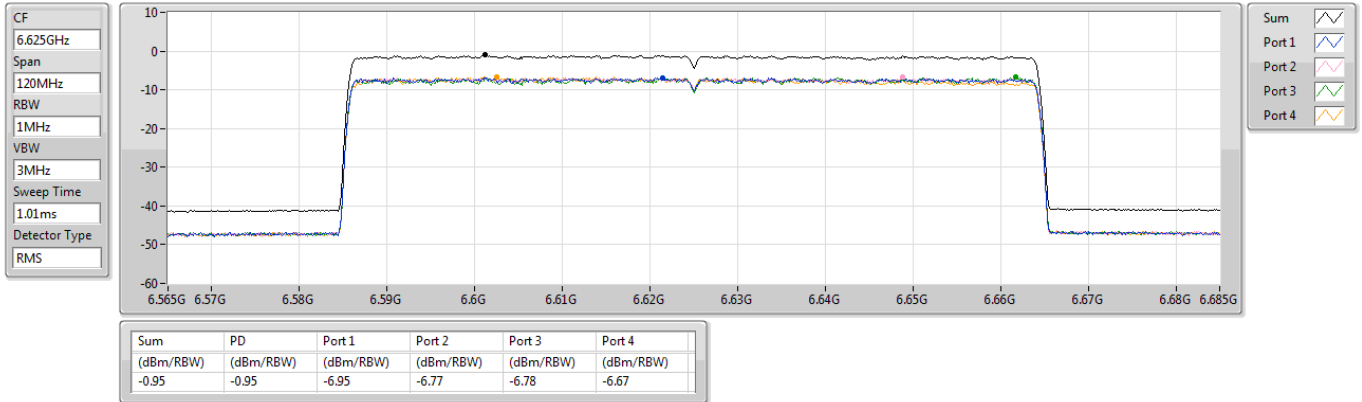

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6705MHz

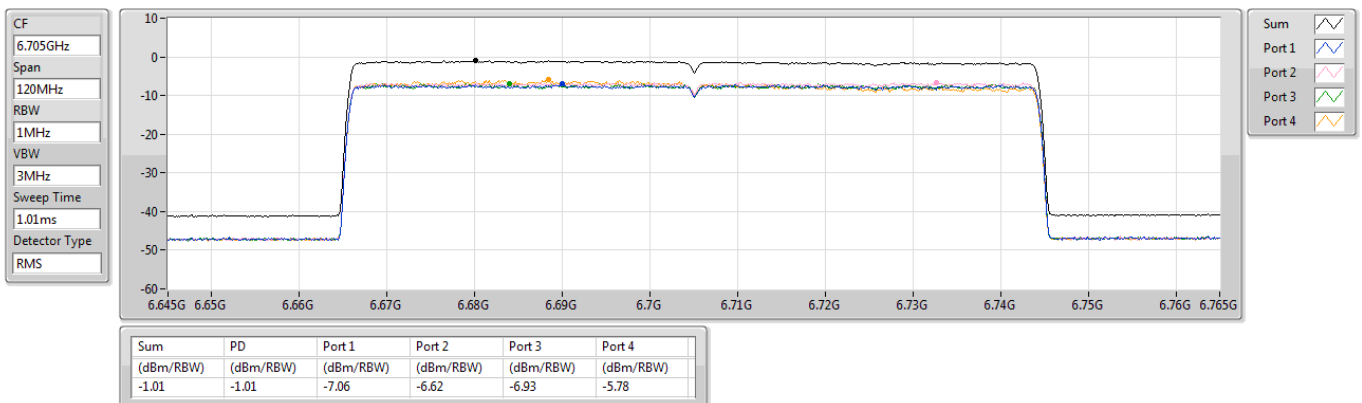

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6785MHz

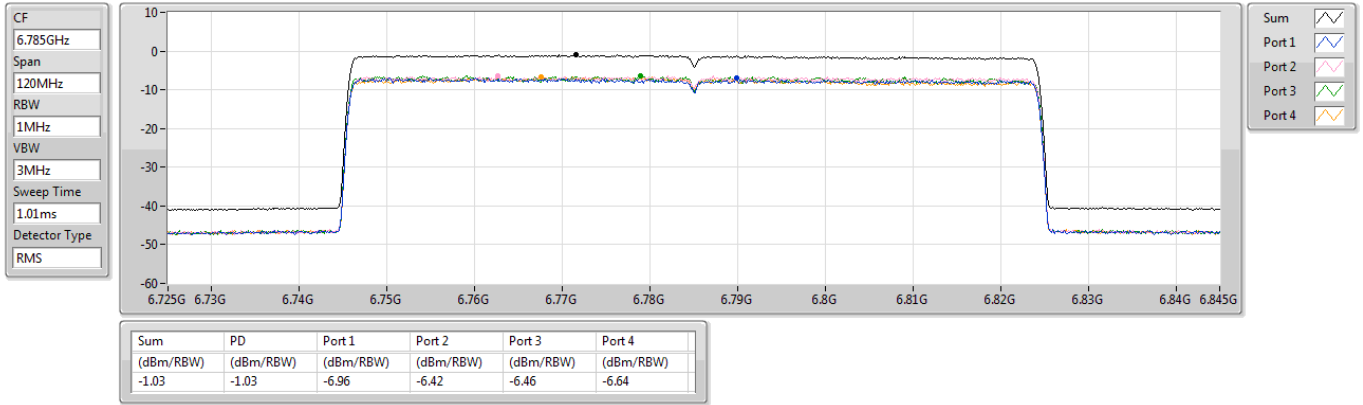

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6865MHz Straddle 6.525-6.875GHz

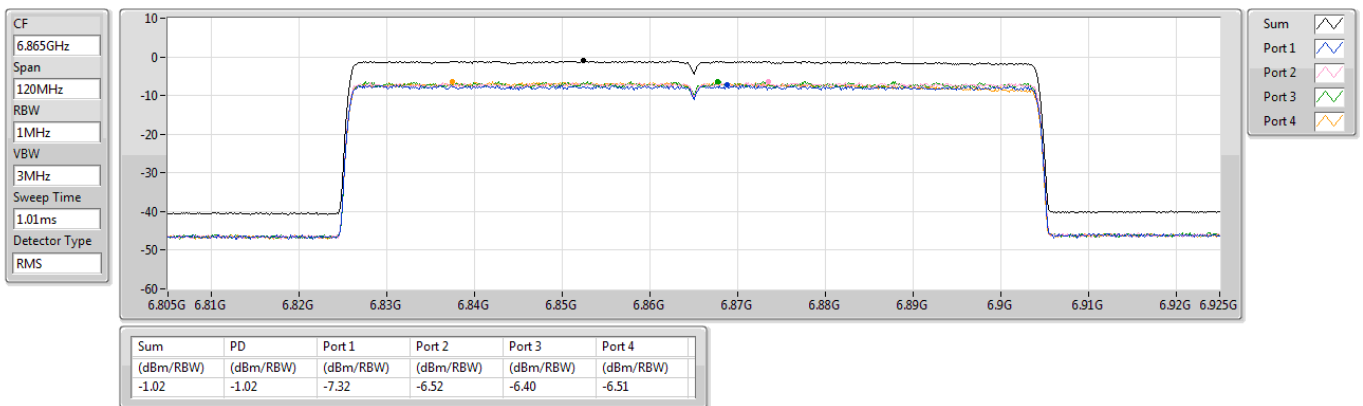

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6945MHz

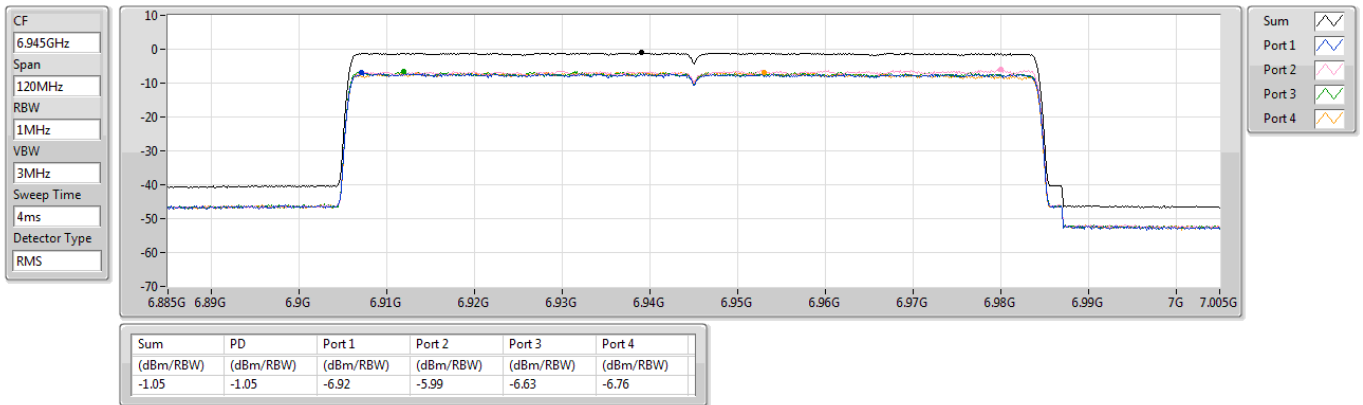

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


7025MHz

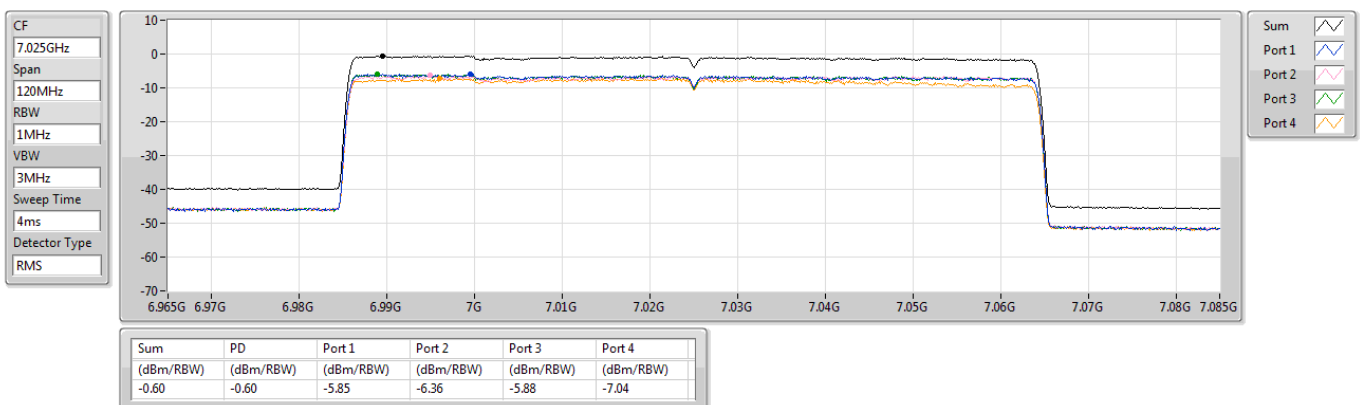

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6025MHz

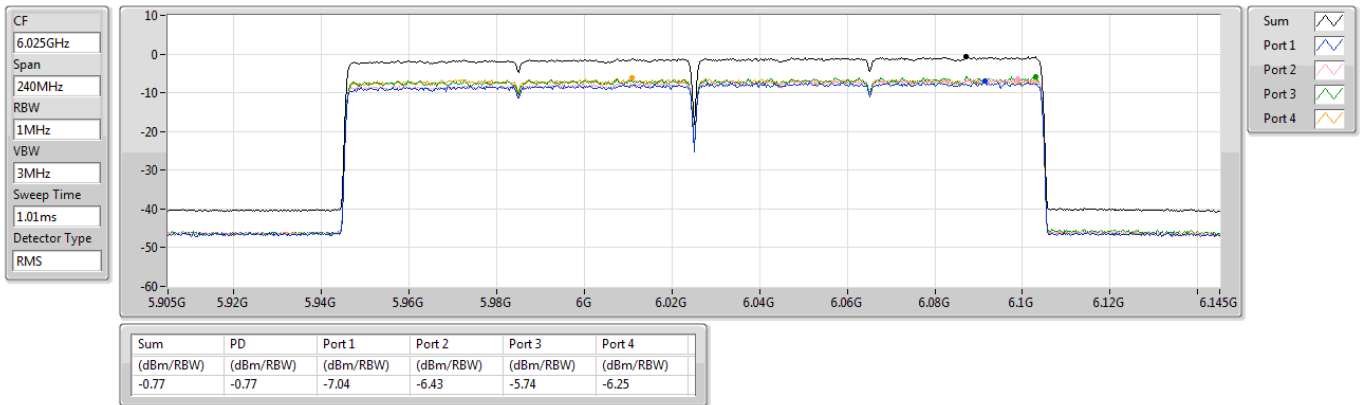

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6185MHz

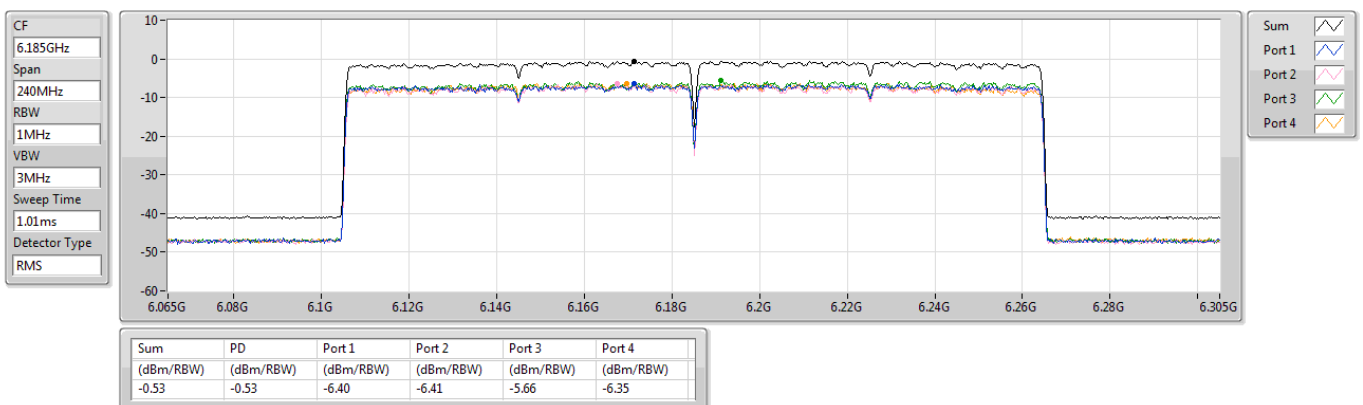

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6345MHz

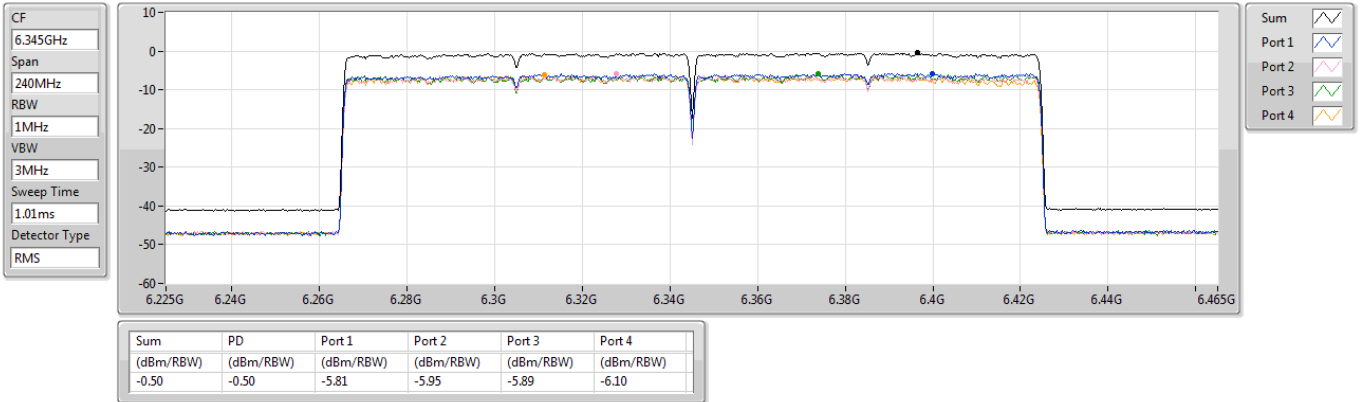

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6505MHz Straddle 6.425-6.525GHz

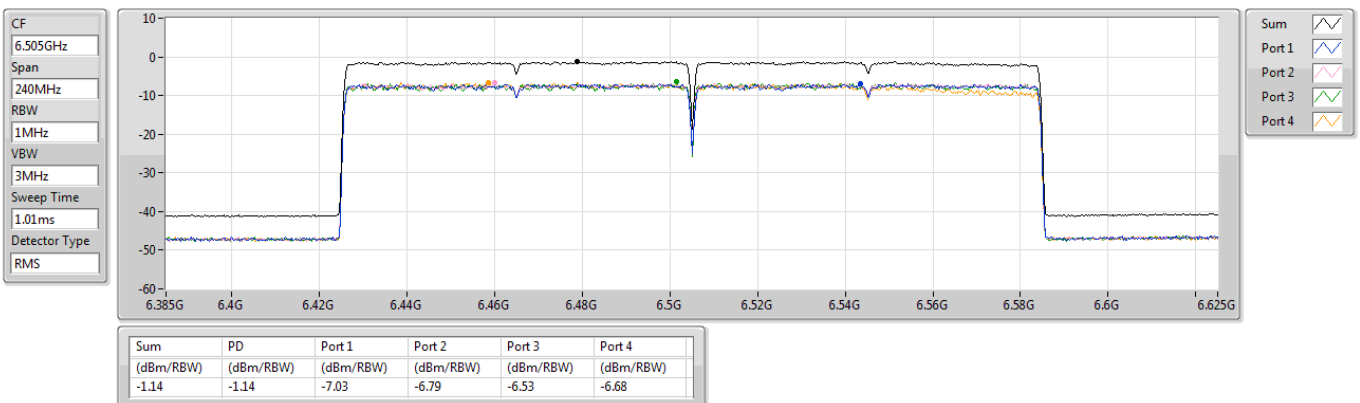

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6665MHz

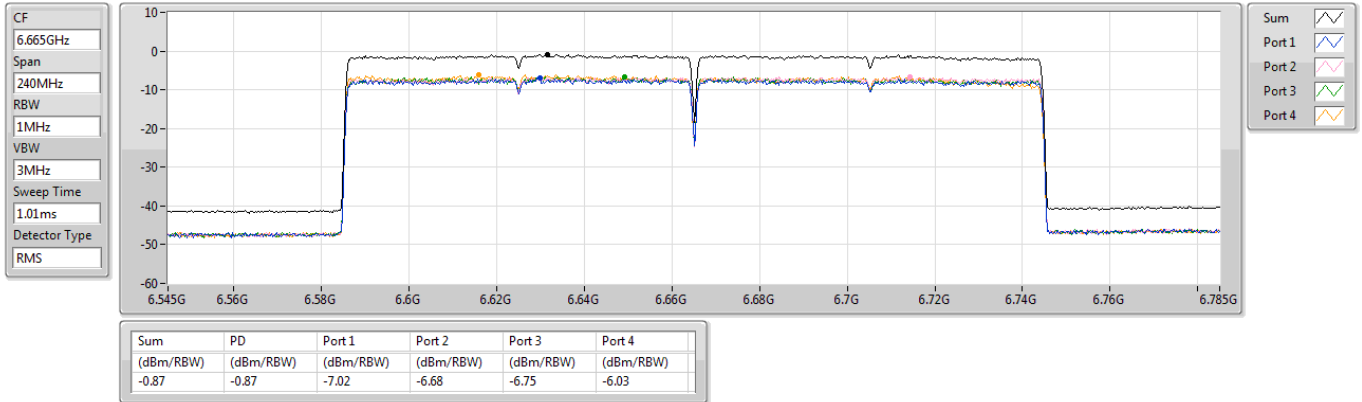

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6825MHz Straddle 6.525-6.875GHz

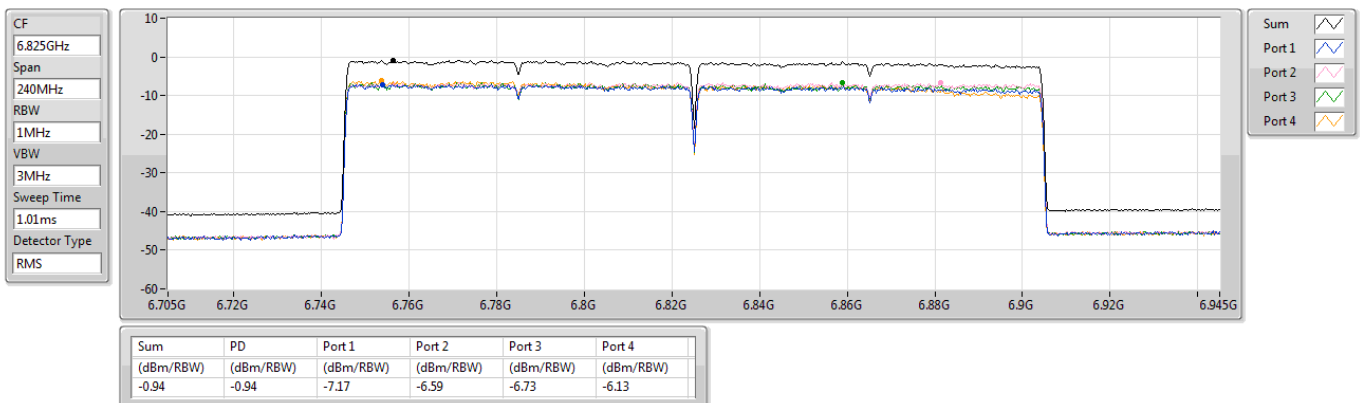


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6985MHz

CF
6.985GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS

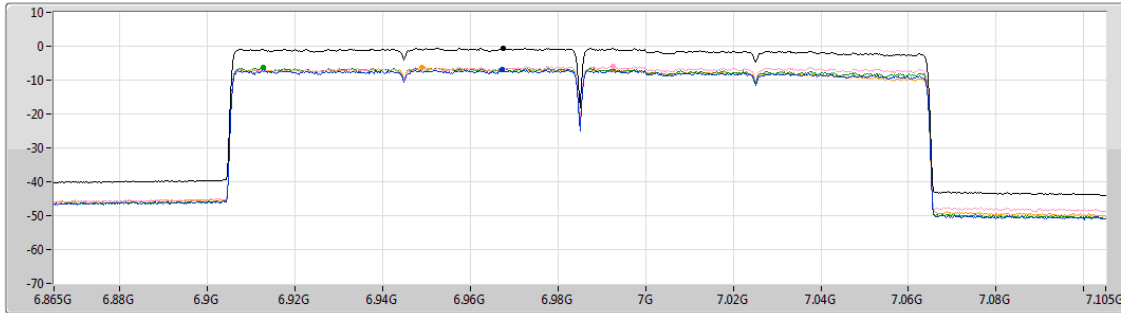

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.56	-0.56	-6.90	-5.84	-6.26	-6.26

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6105MHz

CF
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

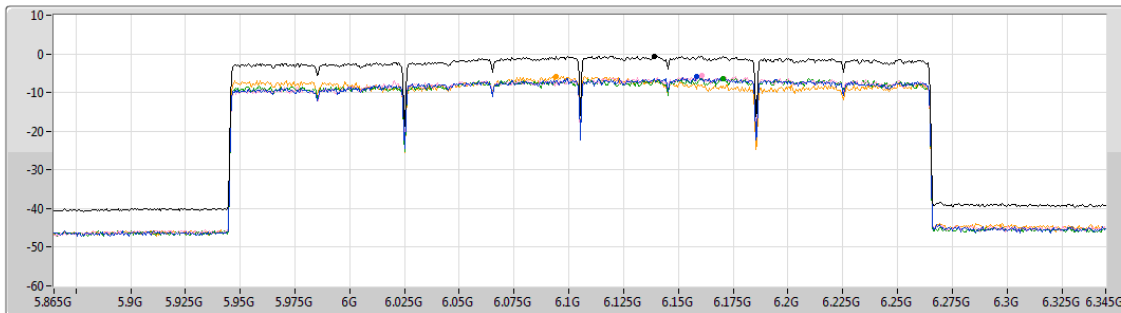

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.55	-0.55	-5.98	-5.65	-6.33	-5.78

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6265MHz

CF
6.265GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4.8ms
Detector Type
RMS

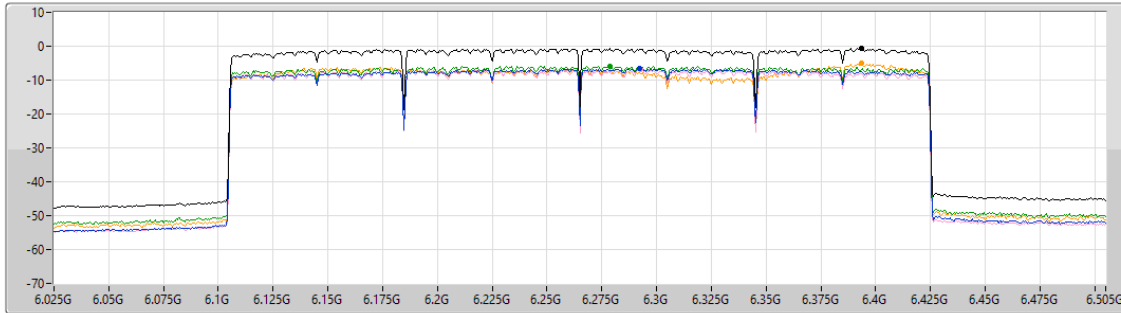


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.70	-0.70	-6.68	-7.00	-5.81	-5.06

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6425MHz Straddle 6.425-6.525GHz

CF
6.425GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

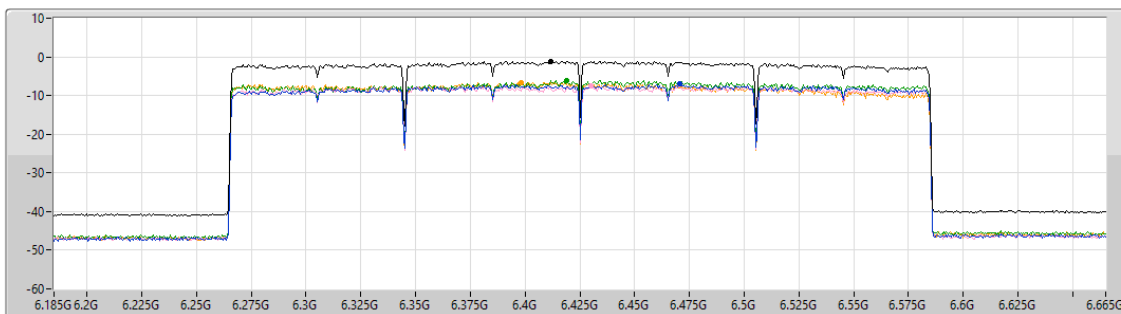


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.09	-1.09	-6.95	-7.38	-6.09	-6.58

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6585MHz Straddle 6.425-6.525GHz

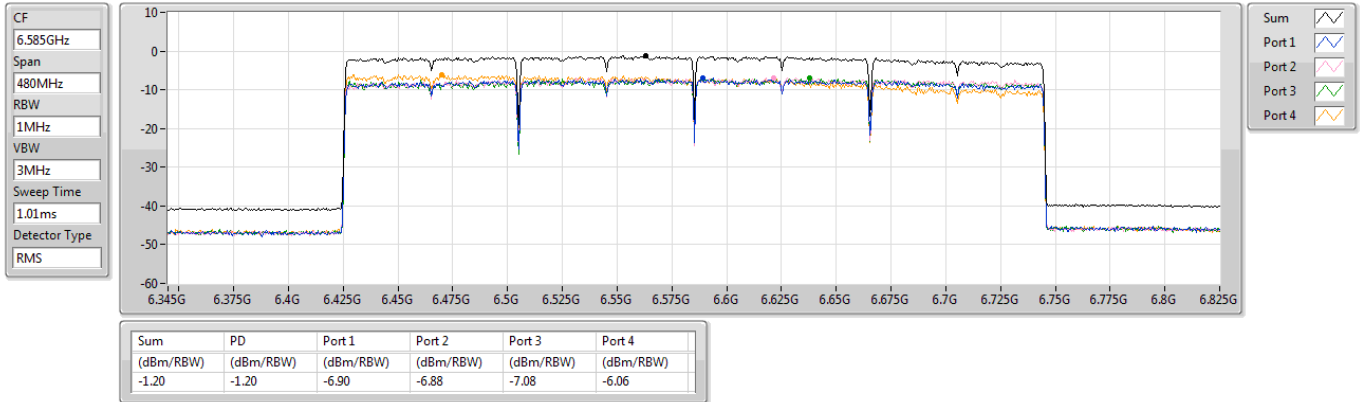

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6745MHz Straddle 6.525-6.875GHz

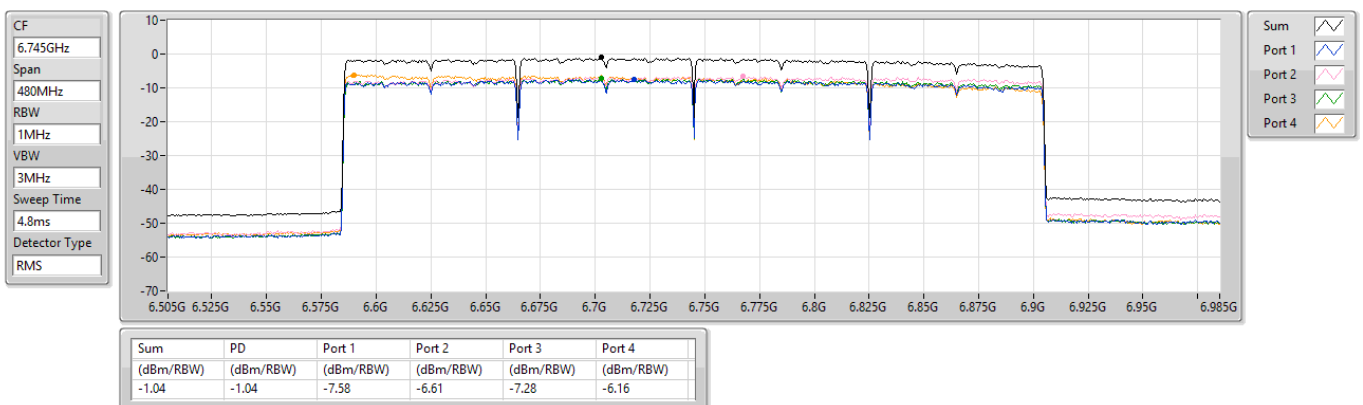




6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6905MHz Straddle 6.525-6.875GHz

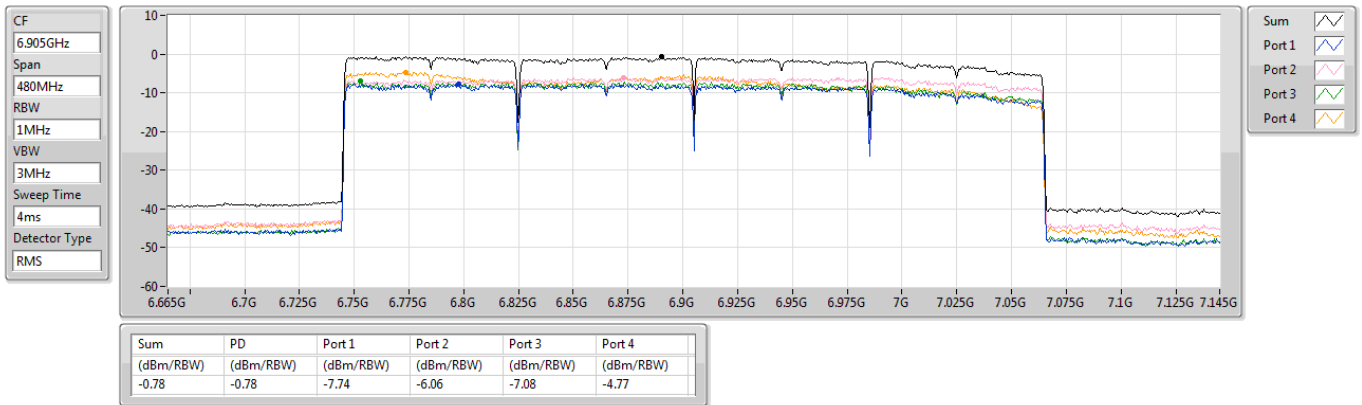

Unwanted Emissions (Below 1GHz)


Modulation	be EHT320-OFDMA		Test Freq. (MHz)		6105				
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):25 Humidity(%):64									
Level (dBUV/m) </									



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):25 Humidity(%):64			
Level (dBuV/m)			




Unwanted Emissions (Above 1GHz) for 11a

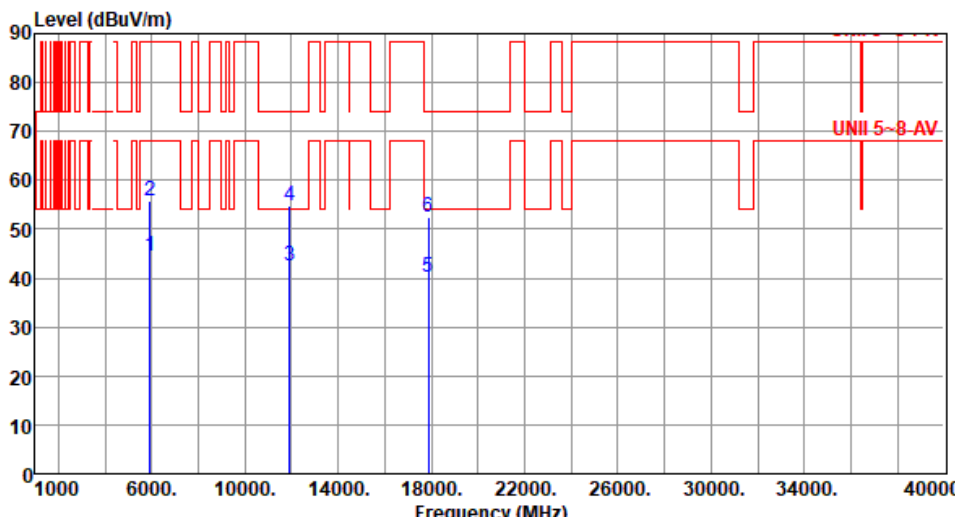Modulation	11a	Test Freq. (MHz)	5955																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>44.49</td><td>68.20</td><td>-23.71</td><td>43.26</td><td>1.23</td><td>Average</td><td>251</td><td>270</td></tr><tr><td>2</td><td>5925.00</td><td>55.67</td><td>88.20</td><td>-32.53</td><td>54.44</td><td>1.23</td><td>Peak</td><td>251</td><td>270</td></tr><tr><td>3</td><td>11910.00</td><td>42.38</td><td>54.00</td><td>-11.62</td><td>35.98</td><td>6.40</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>4</td><td>11910.00</td><td>54.75</td><td>74.00</td><td>-19.25</td><td>48.35</td><td>6.40</td><td>Peak</td><td>100</td><td>120</td></tr><tr><td>5</td><td>17865.00</td><td>40.33</td><td>54.00</td><td>-13.67</td><td>29.81</td><td>10.52</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>6</td><td>17865.00</td><td>52.44</td><td>74.00</td><td>-21.56</td><td>41.92</td><td>10.52</td><td>Peak</td><td>100</td><td>80</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	44.49	68.20	-23.71	43.26	1.23	Average	251	270	2	5925.00	55.67	88.20	-32.53	54.44	1.23	Peak	251	270	3	11910.00	42.38	54.00	-11.62	35.98	6.40	Average	100	120	4	11910.00	54.75	74.00	-19.25	48.35	6.40	Peak	100	120	5	17865.00	40.33	54.00	-13.67	29.81	10.52	Average	100	80	6	17865.00	52.44	74.00	-21.56	41.92	10.52	Peak	100	80
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	44.49	68.20	-23.71	43.26	1.23	Average	251	270																																																																
2	5925.00	55.67	88.20	-32.53	54.44	1.23	Peak	251	270																																																																
3	11910.00	42.38	54.00	-11.62	35.98	6.40	Average	100	120																																																																
4	11910.00	54.75	74.00	-19.25	48.35	6.40	Peak	100	120																																																																
5	17865.00	40.33	54.00	-13.67	29.81	10.52	Average	100	80																																																																
6	17865.00	52.44	74.00	-21.56	41.92	10.52	Peak	100	80																																																																




Modulation	11a	Test Freq. (MHz)	5955
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			

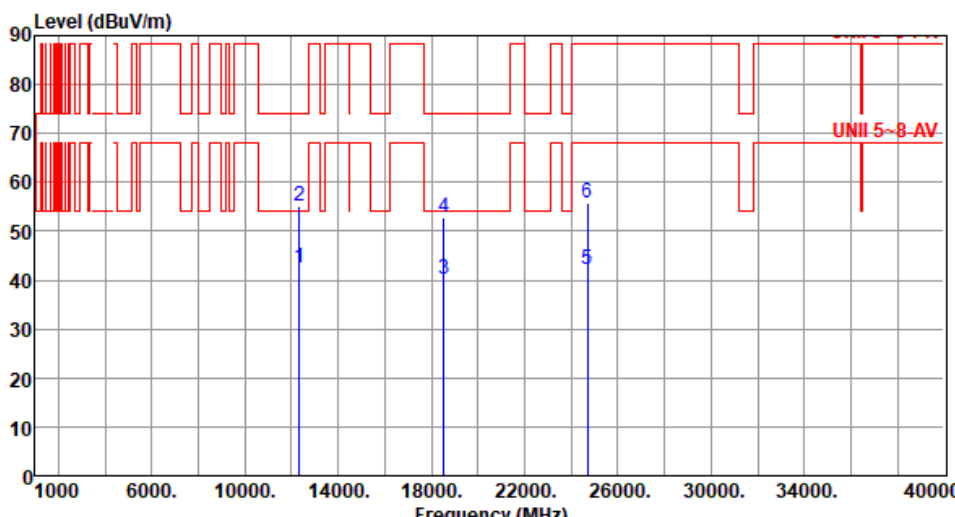


Modulation	11a	Test Freq. (MHz)	6175																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12350.00</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>36.16</td><td>6.33</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>2</td><td>12350.00</td><td>55.19</td><td>74.00</td><td>-18.81</td><td>48.86</td><td>6.33</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>3</td><td>18525.00</td><td>40.16</td><td>54.00</td><td>-13.84</td><td>38.81</td><td>1.35</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>18525.00</td><td>52.94</td><td>74.00</td><td>-21.06</td><td>51.59</td><td>1.35</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>5</td><td>24700.00</td><td>42.18</td><td>68.20</td><td>-26.02</td><td>33.72</td><td>8.46</td><td>Average</td><td>100</td><td>179</td></tr><tr><td>6</td><td>24700.00</td><td>55.67</td><td>88.20</td><td>-32.53</td><td>47.21</td><td>8.46</td><td>Peak</td><td>100</td><td>179</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12350.00	42.49	54.00	-11.51	36.16	6.33	Average	100	38	2	12350.00	55.19	74.00	-18.81	48.86	6.33	Peak	100	38	3	18525.00	40.16	54.00	-13.84	38.81	1.35	Average	100	114	4	18525.00	52.94	74.00	-21.06	51.59	1.35	Peak	100	114	5	24700.00	42.18	68.20	-26.02	33.72	8.46	Average	100	179	6	24700.00	55.67	88.20	-32.53	47.21	8.46	Peak	100	179
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12350.00	42.49	54.00	-11.51	36.16	6.33	Average	100	38																																																																
2	12350.00	55.19	74.00	-18.81	48.86	6.33	Peak	100	38																																																																
3	18525.00	40.16	54.00	-13.84	38.81	1.35	Average	100	114																																																																
4	18525.00	52.94	74.00	-21.06	51.59	1.35	Peak	100	114																																																																
5	24700.00	42.18	68.20	-26.02	33.72	8.46	Average	100	179																																																																
6	24700.00	55.67	88.20	-32.53	47.21	8.46	Peak	100	179																																																																

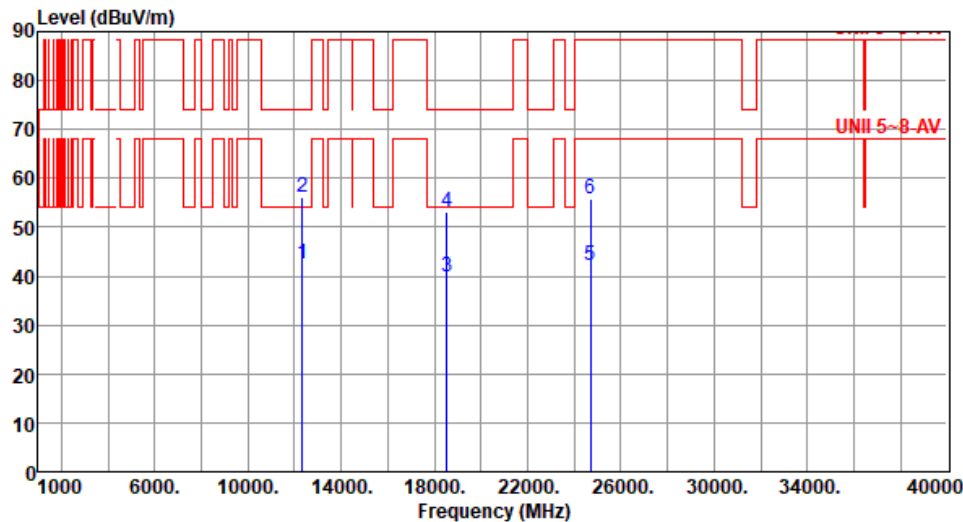


Modulation	11a	Test Freq. (MHz)	6175						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12350.00	42.35	54.00	-11.65	36.02	6.33	Average	100	51
2	12350.00	56.22	74.00	-17.78	49.89	6.33	Peak	100	51
3	18525.00	39.94	54.00	-14.06	38.59	1.35	Average	100	86
4	18525.00	53.13	74.00	-20.87	51.78	1.35	Peak	100	86
5	24700.00	42.12	68.20	-26.08	33.66	8.46	Average	100	109
6	24700.00	55.77	88.20	-32.43	47.31	8.46	Peak	100	109
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

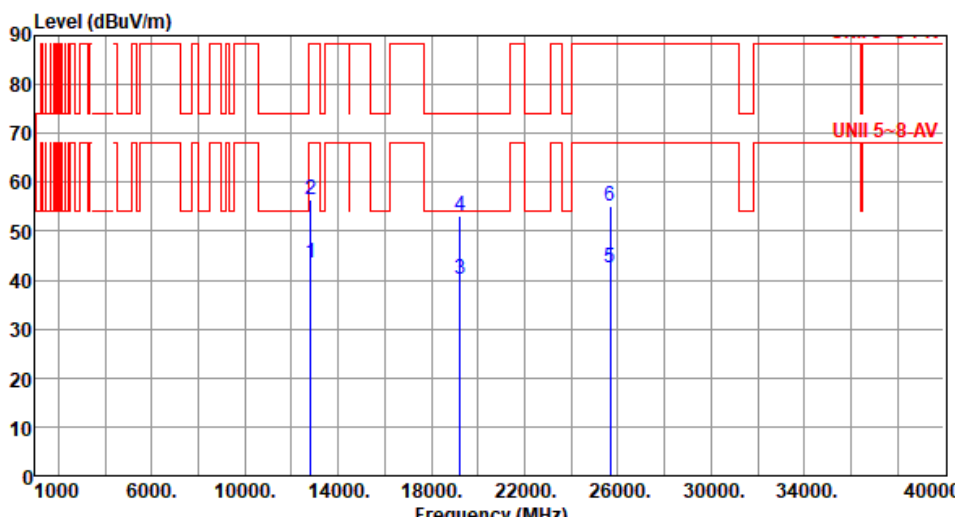


Modulation	11a	Test Freq. (MHz)	6415						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	43.44	68.20	-24.76	37.09	6.35	Average	100	56
2	12830.00	56.58	88.20	-31.62	50.23	6.35	Peak	100	56
3	19245.00	40.21	54.00	-13.79	37.91	2.30	Average	100	133
4	19245.00	53.28	74.00	-20.72	50.98	2.30	Peak	100	133
5	25660.00	42.35	68.20	-25.85	34.10	8.25	Average	100	172
6	25660.00	55.11	88.20	-33.09	46.86	8.25	Peak	100	172
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

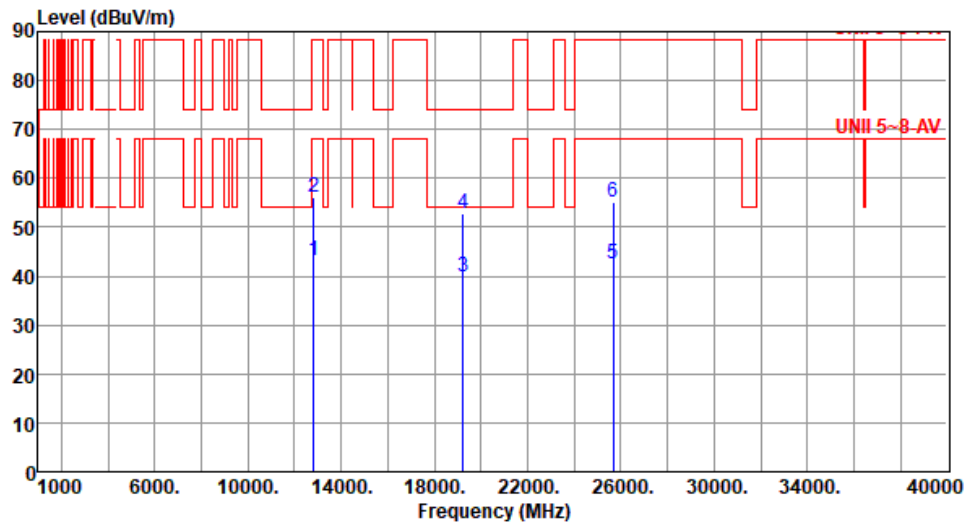


Modulation	11a	Test Freq. (MHz)	6415						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	43.14	68.20	-25.06	36.79	6.35	Average	100	65
2	12830.00	56.21	88.20	-31.99	49.86	6.35	Peak	100	65
3	19245.00	39.96	54.00	-14.04	37.66	2.30	Average	100	81
4	19245.00	52.88	74.00	-21.12	50.58	2.30	Peak	100	81
5	25660.00	42.66	68.20	-25.54	34.41	8.25	Average	100	21
6	25660.00	55.04	88.20	-33.16	46.79	8.25	Peak	100	21
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

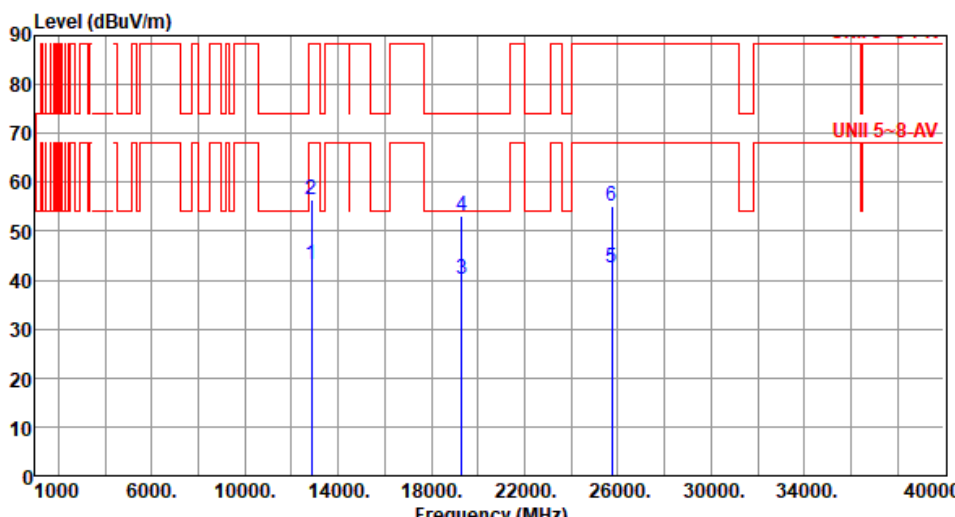

Modulation	11a	Test Freq. (MHz)	6435						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	12870.00	43.12	68.20	-25.08	36.73	6.39	Average	100	42
2	12870.00	56.41	88.20	-31.79	50.02	6.39	Peak	100	42
3	19305.00	40.12	54.00	-13.88	37.84	2.28	Average	100	138
4	19305.00	53.16	74.00	-20.84	50.88	2.28	Peak	100	138
5	25740.00	42.43	68.20	-25.77	34.20	8.23	Average	100	177
6	25740.00	55.16	88.20	-33.04	46.93	8.23	Peak	100	177

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

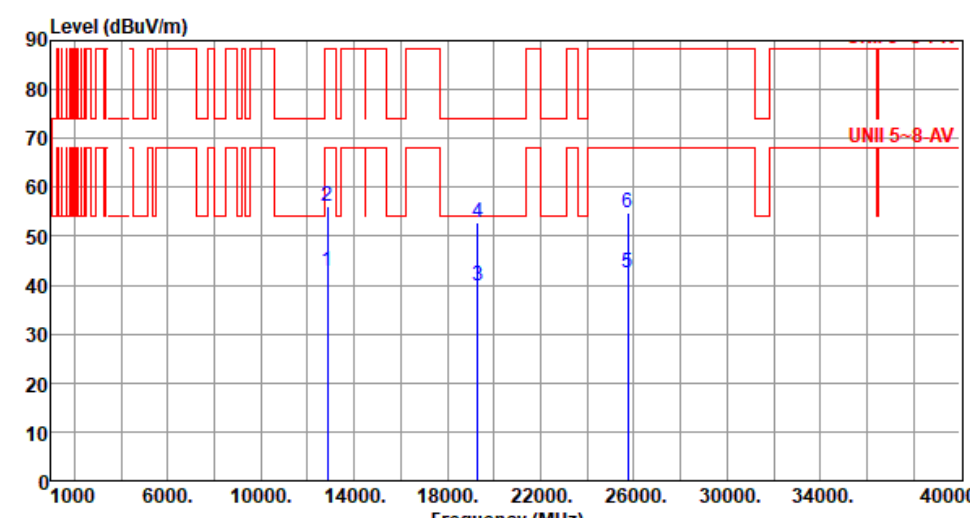

Modulation	11a	Test Freq. (MHz)	6435																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12870.00</td><td>42.97</td><td>68.20</td><td>-25.23</td><td>36.58</td><td>6.39</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>2</td><td>12870.00</td><td>56.11</td><td>88.20</td><td>-32.09</td><td>49.72</td><td>6.39</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>3</td><td>19305.00</td><td>39.89</td><td>54.00</td><td>-14.11</td><td>37.61</td><td>2.28</td><td>Average</td><td>100</td><td>78</td></tr><tr><td>4</td><td>19305.00</td><td>52.84</td><td>74.00</td><td>-21.16</td><td>50.56</td><td>2.28</td><td>Peak</td><td>100</td><td>78</td></tr><tr><td>5</td><td>25740.00</td><td>42.55</td><td>68.20</td><td>-25.65</td><td>34.32</td><td>8.23</td><td>Average</td><td>100</td><td>17</td></tr><tr><td>6</td><td>25740.00</td><td>54.95</td><td>88.20</td><td>-33.25</td><td>46.72</td><td>8.23</td><td>Peak</td><td>100</td><td>17</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12870.00	42.97	68.20	-25.23	36.58	6.39	Average	100	61	2	12870.00	56.11	88.20	-32.09	49.72	6.39	Peak	100	61	3	19305.00	39.89	54.00	-14.11	37.61	2.28	Average	100	78	4	19305.00	52.84	74.00	-21.16	50.56	2.28	Peak	100	78	5	25740.00	42.55	68.20	-25.65	34.32	8.23	Average	100	17	6	25740.00	54.95	88.20	-33.25	46.72	8.23	Peak	100	17
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12870.00	42.97	68.20	-25.23	36.58	6.39	Average	100	61																																																																
2	12870.00	56.11	88.20	-32.09	49.72	6.39	Peak	100	61																																																																
3	19305.00	39.89	54.00	-14.11	37.61	2.28	Average	100	78																																																																
4	19305.00	52.84	74.00	-21.16	50.56	2.28	Peak	100	78																																																																
5	25740.00	42.55	68.20	-25.65	34.32	8.23	Average	100	17																																																																
6	25740.00	54.95	88.20	-33.25	46.72	8.23	Peak	100	17																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	6475
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			




Modulation	11a	Test Freq. (MHz)	6475
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			



Modulation	11a	Test Freq. (MHz)	6515
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			

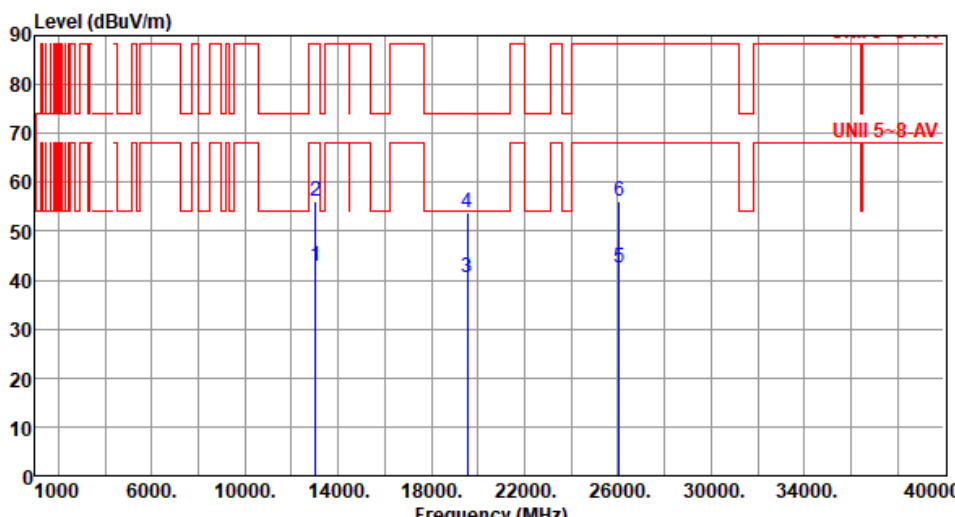

Modulation	11a	Test Freq. (MHz)	6515																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13030.00</td><td>42.76</td><td>68.20</td><td>-25.44</td><td>36.45</td><td>6.31</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>2</td><td>13030.00</td><td>56.11</td><td>88.20</td><td>-32.09</td><td>49.80</td><td>6.31</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>3</td><td>19545.00</td><td>40.66</td><td>54.00</td><td>-13.34</td><td>38.40</td><td>2.26</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>4</td><td>19545.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>51.55</td><td>2.26</td><td>Peak</td><td>100</td><td>57</td></tr><tr><td>5</td><td>26060.00</td><td>42.38</td><td>68.20</td><td>-25.82</td><td>34.29</td><td>8.09</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td>26060.00</td><td>56.18</td><td>88.20</td><td>-32.02</td><td>48.09</td><td>8.09</td><td>Peak</td><td>100</td><td>29</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13030.00	42.76	68.20	-25.44	36.45	6.31	Average	100	26	2	13030.00	56.11	88.20	-32.09	49.80	6.31	Peak	100	26	3	19545.00	40.66	54.00	-13.34	38.40	2.26	Average	100	57	4	19545.00	53.81	74.00	-20.19	51.55	2.26	Peak	100	57	5	26060.00	42.38	68.20	-25.82	34.29	8.09	Average	100	29	6	26060.00	56.18	88.20	-32.02	48.09	8.09	Peak	100	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13030.00	42.76	68.20	-25.44	36.45	6.31	Average	100	26																																																																
2	13030.00	56.11	88.20	-32.09	49.80	6.31	Peak	100	26																																																																
3	19545.00	40.66	54.00	-13.34	38.40	2.26	Average	100	57																																																																
4	19545.00	53.81	74.00	-20.19	51.55	2.26	Peak	100	57																																																																
5	26060.00	42.38	68.20	-25.82	34.29	8.09	Average	100	29																																																																
6	26060.00	56.18	88.20	-32.02	48.09	8.09	Peak	100	29																																																																




Modulation	11a	Test Freq. (MHz)	6535																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13070.00</td><td>45.58</td><td>68.20</td><td>-22.62</td><td>39.48</td><td>6.10</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>2</td><td>13070.00</td><td>56.34</td><td>88.20</td><td>-31.86</td><td>50.24</td><td>6.10</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>3</td><td>19605.00</td><td>39.65</td><td>54.00</td><td>-14.35</td><td>37.30</td><td>2.35</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>4</td><td>19605.00</td><td>53.57</td><td>74.00</td><td>-20.43</td><td>51.22</td><td>2.35</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>5</td><td>26140.00</td><td>42.76</td><td>68.20</td><td>-25.44</td><td>34.50</td><td>8.26</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>6</td><td>26140.00</td><td>55.17</td><td>88.20</td><td>-33.03</td><td>46.91</td><td>8.26</td><td>Peak</td><td>100</td><td>54</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13070.00	45.58	68.20	-22.62	39.48	6.10	Average	100	36	2	13070.00	56.34	88.20	-31.86	50.24	6.10	Peak	100	36	3	19605.00	39.65	54.00	-14.35	37.30	2.35	Average	100	45	4	19605.00	53.57	74.00	-20.43	51.22	2.35	Peak	100	45	5	26140.00	42.76	68.20	-25.44	34.50	8.26	Average	100	54	6	26140.00	55.17	88.20	-33.03	46.91	8.26	Peak	100	54
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13070.00	45.58	68.20	-22.62	39.48	6.10	Average	100	36																																																																
2	13070.00	56.34	88.20	-31.86	50.24	6.10	Peak	100	36																																																																
3	19605.00	39.65	54.00	-14.35	37.30	2.35	Average	100	45																																																																
4	19605.00	53.57	74.00	-20.43	51.22	2.35	Peak	100	45																																																																
5	26140.00	42.76	68.20	-25.44	34.50	8.26	Average	100	54																																																																
6	26140.00	55.17	88.20	-33.03	46.91	8.26	Peak	100	54																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	6535																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13070.00</td><td>42.61</td><td>68.20</td><td>-25.59</td><td>36.51</td><td>6.10</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>2</td><td>13070.00</td><td>56.84</td><td>88.20</td><td>-31.36</td><td>50.74</td><td>6.10</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>3</td><td>19605.00</td><td>39.75</td><td>54.00</td><td>-14.25</td><td>37.40</td><td>2.35</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>4</td><td>19605.00</td><td>53.45</td><td>74.00</td><td>-20.55</td><td>51.10</td><td>2.35</td><td>Peak</td><td>100</td><td>70</td></tr><tr><td>5</td><td>26140.00</td><td>43.14</td><td>68.20</td><td>-25.06</td><td>34.88</td><td>8.26</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>26140.00</td><td>55.41</td><td>88.20</td><td>-32.79</td><td>47.15</td><td>8.26</td><td>Peak</td><td>100</td><td>30</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13070.00	42.61	68.20	-25.59	36.51	6.10	Average	100	90	2	13070.00	56.84	88.20	-31.36	50.74	6.10	Peak	100	90	3	19605.00	39.75	54.00	-14.25	37.40	2.35	Average	100	70	4	19605.00	53.45	74.00	-20.55	51.10	2.35	Peak	100	70	5	26140.00	43.14	68.20	-25.06	34.88	8.26	Average	100	30	6	26140.00	55.41	88.20	-32.79	47.15	8.26	Peak	100	30
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13070.00	42.61	68.20	-25.59	36.51	6.10	Average	100	90																																																																																				
2	13070.00	56.84	88.20	-31.36	50.74	6.10	Peak	100	90																																																																																				
3	19605.00	39.75	54.00	-14.25	37.40	2.35	Average	100	70																																																																																				
4	19605.00	53.45	74.00	-20.55	51.10	2.35	Peak	100	70																																																																																				
5	26140.00	43.14	68.20	-25.06	34.88	8.26	Average	100	30																																																																																				
6	26140.00	55.41	88.20	-32.79	47.15	8.26	Peak	100	30																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

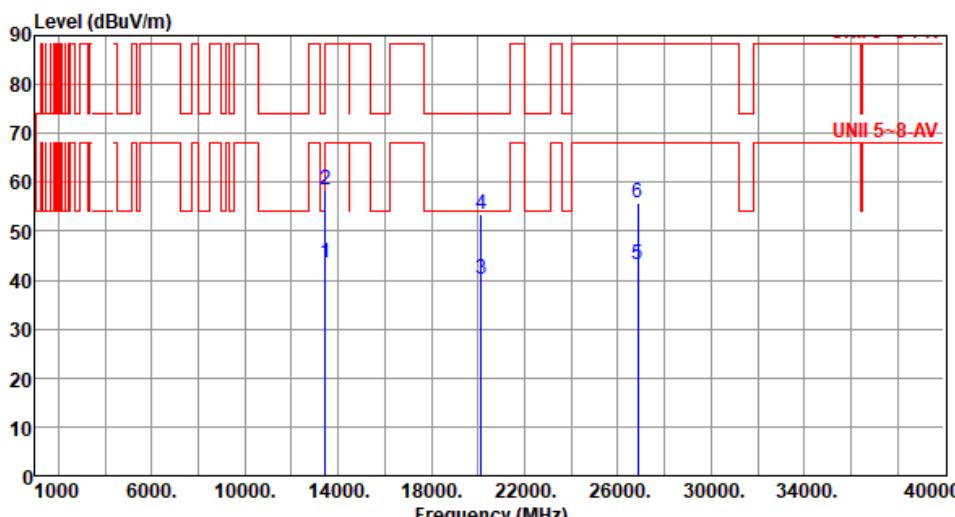


Modulation	11a	Test Freq. (MHz)	6715																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13430.00</td><td>43.67</td><td>68.20</td><td>-24.53</td><td>37.51</td><td>6.16</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>2</td><td>13430.00</td><td>58.51</td><td>88.20</td><td>-29.69</td><td>52.35</td><td>6.16</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>3</td><td>20145.00</td><td>40.15</td><td>54.00</td><td>-13.85</td><td>37.27</td><td>2.88</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>4</td><td>20145.00</td><td>53.32</td><td>74.00</td><td>-20.68</td><td>50.44</td><td>2.88</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>5</td><td>26860.00</td><td>43.18</td><td>68.20</td><td>-25.02</td><td>34.27</td><td>8.91</td><td>Average</td><td>100</td><td>73</td></tr><tr><td>6</td><td>26860.00</td><td>55.66</td><td>88.20</td><td>-32.54</td><td>46.75</td><td>8.91</td><td>Peak</td><td>100</td><td>73</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13430.00	43.67	68.20	-24.53	37.51	6.16	Average	100	25	2	13430.00	58.51	88.20	-29.69	52.35	6.16	Peak	100	25	3	20145.00	40.15	54.00	-13.85	37.27	2.88	Average	100	41	4	20145.00	53.32	74.00	-20.68	50.44	2.88	Peak	100	41	5	26860.00	43.18	68.20	-25.02	34.27	8.91	Average	100	73	6	26860.00	55.66	88.20	-32.54	46.75	8.91	Peak	100	73
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13430.00	43.67	68.20	-24.53	37.51	6.16	Average	100	25																																																																
2	13430.00	58.51	88.20	-29.69	52.35	6.16	Peak	100	25																																																																
3	20145.00	40.15	54.00	-13.85	37.27	2.88	Average	100	41																																																																
4	20145.00	53.32	74.00	-20.68	50.44	2.88	Peak	100	41																																																																
5	26860.00	43.18	68.20	-25.02	34.27	8.91	Average	100	73																																																																
6	26860.00	55.66	88.20	-32.54	46.75	8.91	Peak	100	73																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

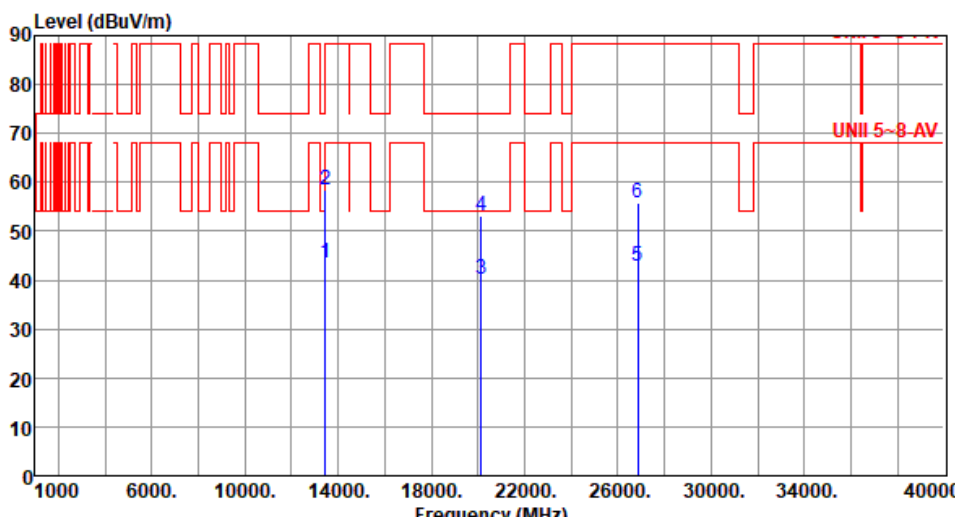

Modulation	11a	Test Freq. (MHz)	6715						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.65	68.20	-24.55	37.49	6.16	Average	100	40
2	13430.00	58.44	88.20	-29.76	52.28	6.16	Peak	100	40
3	20145.00	40.25	54.00	-13.75	37.37	2.88	Average	100	60
4	20145.00	53.14	74.00	-20.86	50.26	2.88	Peak	100	60
5	26860.00	42.77	68.20	-25.43	33.86	8.91	Average	100	110
6	26860.00	55.63	88.20	-32.57	46.72	8.91	Peak	100	110
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

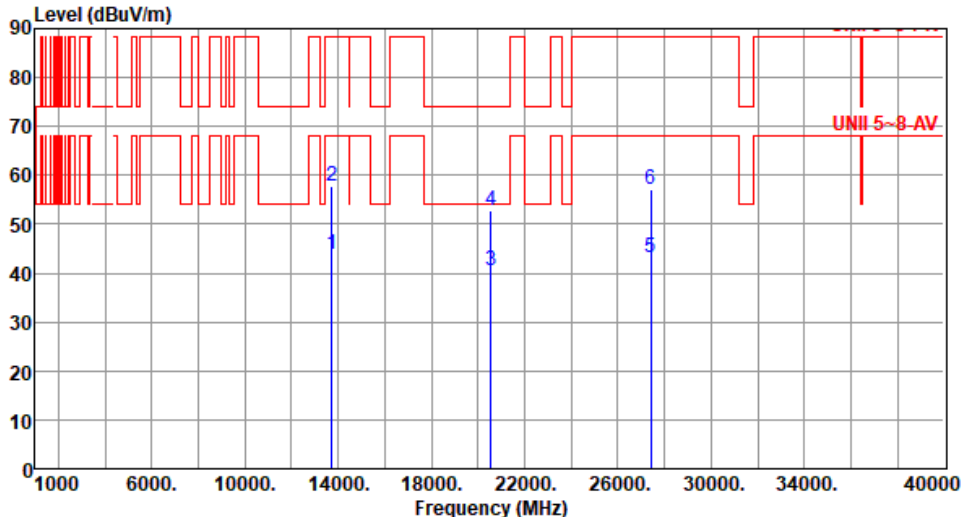


Modulation	11a		Test Freq. (MHz)		6855																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13710.00</td><td>43.85</td><td>68.20</td><td>-24.35</td><td>37.61</td><td>6.24</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>2</td><td>13710.00</td><td>57.94</td><td>88.20</td><td>-30.26</td><td>51.70</td><td>6.24</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>3</td><td>20565.00</td><td>40.43</td><td>54.00</td><td>-13.57</td><td>37.22</td><td>3.21</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>4</td><td>20565.00</td><td>52.84</td><td>74.00</td><td>-21.16</td><td>49.63</td><td>3.21</td><td>Peak</td><td>100</td><td>18</td></tr><tr><td>5</td><td>27420.00</td><td>43.19</td><td>68.20</td><td>-25.01</td><td>34.51</td><td>8.68</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>6</td><td>27420.00</td><td>57.21</td><td>88.20</td><td>-30.99</td><td>48.53</td><td>8.68</td><td>Peak</td><td>100</td><td>59</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13710.00	43.85	68.20	-24.35	37.61	6.24	Average	100	38	2	13710.00	57.94	88.20	-30.26	51.70	6.24	Peak	100	38	3	20565.00	40.43	54.00	-13.57	37.22	3.21	Average	100	18	4	20565.00	52.84	74.00	-21.16	49.63	3.21	Peak	100	18	5	27420.00	43.19	68.20	-25.01	34.51	8.68	Average	100	59	6	27420.00	57.21	88.20	-30.99	48.53	8.68	Peak	100	59
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13710.00	43.85	68.20	-24.35	37.61	6.24	Average	100	38																																																																																										
2	13710.00	57.94	88.20	-30.26	51.70	6.24	Peak	100	38																																																																																										
3	20565.00	40.43	54.00	-13.57	37.22	3.21	Average	100	18																																																																																										
4	20565.00	52.84	74.00	-21.16	49.63	3.21	Peak	100	18																																																																																										
5	27420.00	43.19	68.20	-25.01	34.51	8.68	Average	100	59																																																																																										
6	27420.00	57.21	88.20	-30.99	48.53	8.68	Peak	100	59																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	11a	Test Freq. (MHz)	6855																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13710.00</td><td>43.75</td><td>68.20</td><td>-24.45</td><td>37.51</td><td>6.24</td><td>Average</td><td>100</td><td>96</td></tr><tr><td>2</td><td>13710.00</td><td>57.71</td><td>88.20</td><td>-30.49</td><td>51.47</td><td>6.24</td><td>Peak</td><td>100</td><td>96</td></tr><tr><td>3</td><td>20565.00</td><td>40.64</td><td>54.00</td><td>-13.36</td><td>37.43</td><td>3.21</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>20565.00</td><td>52.83</td><td>74.00</td><td>-21.17</td><td>49.62</td><td>3.21</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>27420.00</td><td>42.51</td><td>68.20</td><td>-25.69</td><td>33.83</td><td>8.68</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>27420.00</td><td>56.44</td><td>88.20</td><td>-31.76</td><td>47.76</td><td>8.68</td><td>Peak</td><td>100</td><td>20</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13710.00	43.75	68.20	-24.45	37.51	6.24	Average	100	96	2	13710.00	57.71	88.20	-30.49	51.47	6.24	Peak	100	96	3	20565.00	40.64	54.00	-13.36	37.43	3.21	Average	100	50	4	20565.00	52.83	74.00	-21.17	49.62	3.21	Peak	100	50	5	27420.00	42.51	68.20	-25.69	33.83	8.68	Average	100	20	6	27420.00	56.44	88.20	-31.76	47.76	8.68	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13710.00	43.75	68.20	-24.45	37.51	6.24	Average	100	96																																																																
2	13710.00	57.71	88.20	-30.49	51.47	6.24	Peak	100	96																																																																
3	20565.00	40.64	54.00	-13.36	37.43	3.21	Average	100	50																																																																
4	20565.00	52.83	74.00	-21.17	49.62	3.21	Peak	100	50																																																																
5	27420.00	42.51	68.20	-25.69	33.83	8.68	Average	100	20																																																																
6	27420.00	56.44	88.20	-31.76	47.76	8.68	Peak	100	20																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

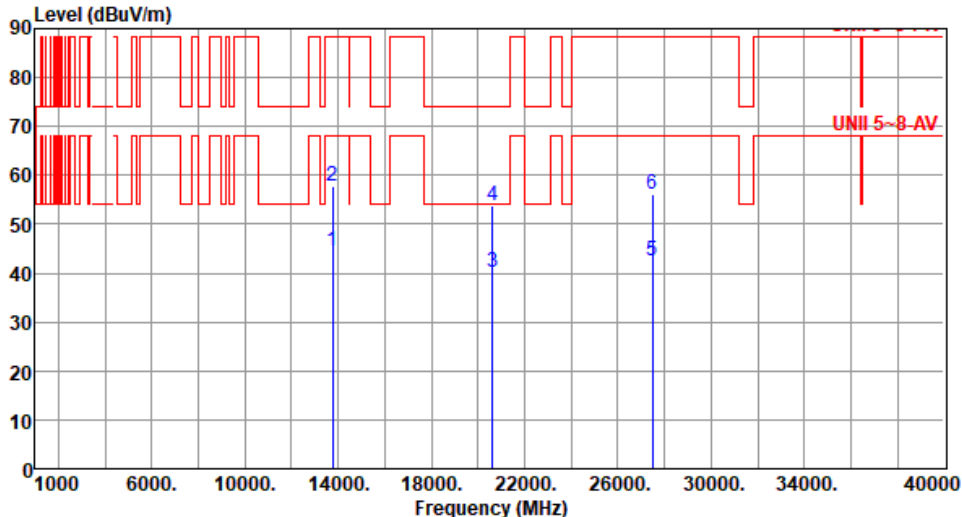

Modulation	11a	Test Freq. (MHz)	6875						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.52	68.20	-23.68	38.27	6.25	Average	100	102
2	13750.00	57.86	88.20	-30.34	51.61	6.25	Peak	100	102
3	20625.00	40.25	54.00	-13.75	36.87	3.38	Average	100	70
4	20625.00	53.64	74.00	-20.36	50.26	3.38	Peak	100	70
5	27500.00	42.53	68.20	-25.67	33.72	8.81	Average	100	150
6	27500.00	56.11	88.20	-32.09	47.30	8.81	Peak	100	150
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	11a	Test Freq. (MHz)	6875						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.29	68.20	-23.91	38.04	6.25	Average	100	32
2	13750.00	57.68	88.20	-30.52	51.43	6.25	Peak	100	32
3	20625.00	40.33	54.00	-13.67	36.95	3.38	Average	100	55
4	20625.00	53.46	74.00	-20.54	50.08	3.38	Peak	100	55
5	27500.00	42.88	68.20	-25.32	34.07	8.81	Average	100	78
6	27500.00	55.54	88.20	-32.66	46.73	8.81	Peak	100	78
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	11a	Test Freq. (MHz)	6895																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13790.00</td><td>44.68</td><td>68.20</td><td>-23.52</td><td>38.41</td><td>6.27</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>2</td><td>13790.00</td><td>58.24</td><td>88.20</td><td>-29.96</td><td>51.97</td><td>6.27</td><td>Peak</td><td>100</td><td>15</td></tr><tr><td>3</td><td>20685.00</td><td>40.46</td><td>54.00</td><td>-13.54</td><td>36.91</td><td>3.55</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>4</td><td>20685.00</td><td>52.71</td><td>74.00</td><td>-21.29</td><td>49.16</td><td>3.55</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>5</td><td>27580.00</td><td>42.63</td><td>68.20</td><td>-25.57</td><td>33.78</td><td>8.85</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>6</td><td>27580.00</td><td>56.68</td><td>88.20</td><td>-31.52</td><td>47.83</td><td>8.85</td><td>Peak</td><td>100</td><td>64</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13790.00	44.68	68.20	-23.52	38.41	6.27	Average	100	15	2	13790.00	58.24	88.20	-29.96	51.97	6.27	Peak	100	15	3	20685.00	40.46	54.00	-13.54	36.91	3.55	Average	100	27	4	20685.00	52.71	74.00	-21.29	49.16	3.55	Peak	100	27	5	27580.00	42.63	68.20	-25.57	33.78	8.85	Average	100	64	6	27580.00	56.68	88.20	-31.52	47.83	8.85	Peak	100	64
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13790.00	44.68	68.20	-23.52	38.41	6.27	Average	100	15																																																																
2	13790.00	58.24	88.20	-29.96	51.97	6.27	Peak	100	15																																																																
3	20685.00	40.46	54.00	-13.54	36.91	3.55	Average	100	27																																																																
4	20685.00	52.71	74.00	-21.29	49.16	3.55	Peak	100	27																																																																
5	27580.00	42.63	68.20	-25.57	33.78	8.85	Average	100	64																																																																
6	27580.00	56.68	88.20	-31.52	47.83	8.85	Peak	100	64																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

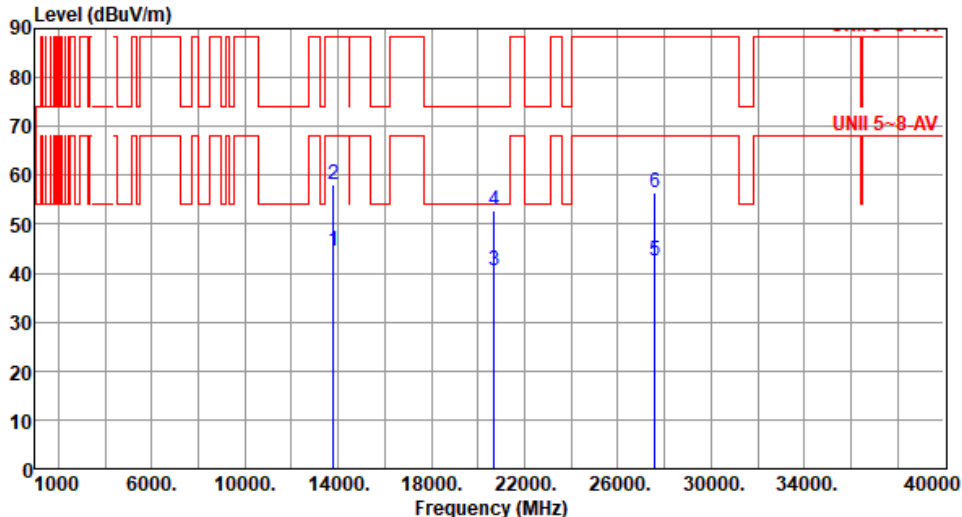

Modulation	11a	Test Freq. (MHz)	6895						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13790.00	44.57	68.20	-23.63	38.30	6.27	Average	100	40
2	13790.00	58.03	88.20	-30.17	51.76	6.27	Peak	100	40
3	20685.00	40.61	54.00	-13.39	37.06	3.55	Average	100	53
4	20685.00	52.92	74.00	-21.08	49.37	3.55	Peak	100	53
5	27580.00	42.56	68.20	-25.64	33.71	8.85	Average	100	18
6	27580.00	56.34	88.20	-31.86	47.49	8.85	Peak	100	18

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	11a	Test Freq. (MHz)	7015																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14030.00</td><td>45.35</td><td>68.20</td><td>-22.85</td><td>38.52</td><td>6.83</td><td>Average</td><td>100</td><td>110</td></tr><tr><td>2</td><td>14030.00</td><td>57.87</td><td>88.20</td><td>-30.33</td><td>51.04</td><td>6.83</td><td>Peak</td><td>100</td><td>110</td></tr><tr><td>3</td><td>21045.00</td><td>40.81</td><td>54.00</td><td>-13.19</td><td>36.99</td><td>3.82</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>21045.00</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>49.95</td><td>3.82</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>28060.00</td><td>44.26</td><td>68.20</td><td>-23.94</td><td>34.85</td><td>9.41</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>6</td><td>28060.00</td><td>58.16</td><td>88.20</td><td>-30.04</td><td>48.75</td><td>9.41</td><td>Peak</td><td>100</td><td>70</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14030.00	45.35	68.20	-22.85	38.52	6.83	Average	100	110	2	14030.00	57.87	88.20	-30.33	51.04	6.83	Peak	100	110	3	21045.00	40.81	54.00	-13.19	36.99	3.82	Average	100	50	4	21045.00	53.77	74.00	-20.23	49.95	3.82	Peak	100	50	5	28060.00	44.26	68.20	-23.94	34.85	9.41	Average	100	70	6	28060.00	58.16	88.20	-30.04	48.75	9.41	Peak	100	70
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14030.00	45.35	68.20	-22.85	38.52	6.83	Average	100	110																																																																
2	14030.00	57.87	88.20	-30.33	51.04	6.83	Peak	100	110																																																																
3	21045.00	40.81	54.00	-13.19	36.99	3.82	Average	100	50																																																																
4	21045.00	53.77	74.00	-20.23	49.95	3.82	Peak	100	50																																																																
5	28060.00	44.26	68.20	-23.94	34.85	9.41	Average	100	70																																																																
6	28060.00	58.16	88.20	-30.04	48.75	9.41	Peak	100	70																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	7015
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			

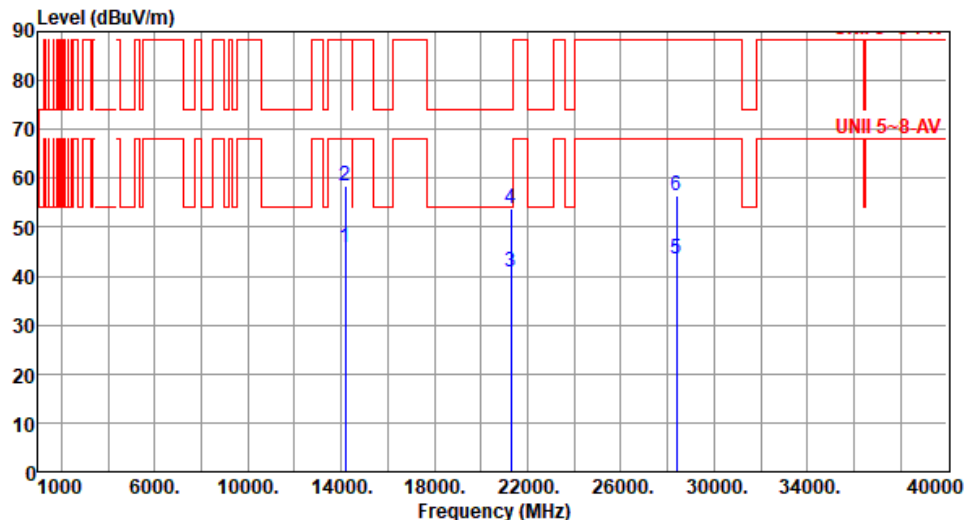


Modulation	11a	Test Freq. (MHz)	7095						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14190.00	45.72	68.20	-22.48	38.58	7.14	Average	100	40
2	14190.00	58.52	88.20	-29.68	51.38	7.14	Peak	100	40
3	21285.00	40.94	54.00	-13.06	36.75	4.19	Average	100	20
4	21285.00	53.67	74.00	-20.33	49.48	4.19	Peak	100	20
5	28380.00	43.59	68.20	-24.61	34.00	9.59	Average	100	134
6	28380.00	56.61	88.20	-31.59	47.02	9.59	Peak	100	134
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	11a	Test Freq. (MHz)	7095																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>14190.00</td><td>45.42</td><td>68.20</td><td>-22.78</td><td>38.28</td><td>7.14</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>14190.00</td><td>58.49</td><td>88.20</td><td>-29.71</td><td>51.35</td><td>7.14</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>21285.00</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>36.75</td><td>4.19</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>4</td><td>21285.00</td><td>53.84</td><td>74.00</td><td>-20.16</td><td>49.65</td><td>4.19</td><td>Peak</td><td>100</td><td>16</td></tr><tr><td>5</td><td>28380.00</td><td>43.65</td><td>68.20</td><td>-24.55</td><td>34.06</td><td>9.59</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>28380.00</td><td>56.71</td><td>88.20</td><td>-31.49</td><td>47.12</td><td>9.59</td><td>Peak</td><td>100</td><td>108</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14190.00	45.42	68.20	-22.78	38.28	7.14	Average	100	50	2	14190.00	58.49	88.20	-29.71	51.35	7.14	Peak	100	50	3	21285.00	40.94	54.00	-13.06	36.75	4.19	Average	100	16	4	21285.00	53.84	74.00	-20.16	49.65	4.19	Peak	100	16	5	28380.00	43.65	68.20	-24.55	34.06	9.59	Average	100	108	6	28380.00	56.71	88.20	-31.49	47.12	9.59	Peak	100	108
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14190.00	45.42	68.20	-22.78	38.28	7.14	Average	100	50																																																																
2	14190.00	58.49	88.20	-29.71	51.35	7.14	Peak	100	50																																																																
3	21285.00	40.94	54.00	-13.06	36.75	4.19	Average	100	16																																																																
4	21285.00	53.84	74.00	-20.16	49.65	4.19	Peak	100	16																																																																
5	28380.00	43.65	68.20	-24.55	34.06	9.59	Average	100	108																																																																
6	28380.00	56.71	88.20	-31.49	47.12	9.59	Peak	100	108																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

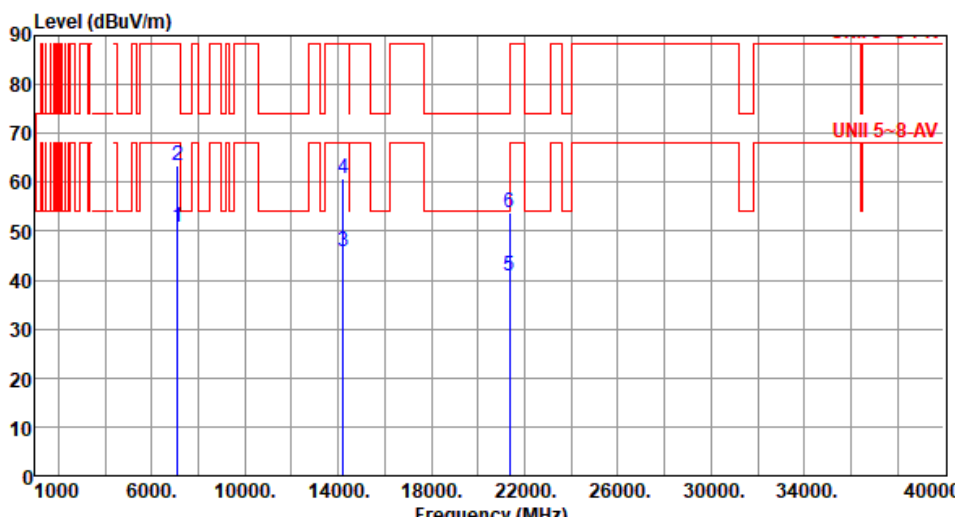


Modulation	11a	Test Freq. (MHz)	7115						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	50.65	68.20	-17.55	45.69	4.96	Average	100	16
2	7125.00	63.30	88.20	-24.90	58.34	4.96	Peak	100	16
3	14230.00	45.79	68.20	-22.41	38.62	7.17	Average	100	44
4	14230.00	60.77	88.20	-27.43	53.60	7.17	Peak	100	44
5	21345.00	40.96	54.00	-13.04	36.71	4.25	Average	100	26
6	21345.00	53.78	74.00	-20.22	49.53	4.25	Peak	100	26
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

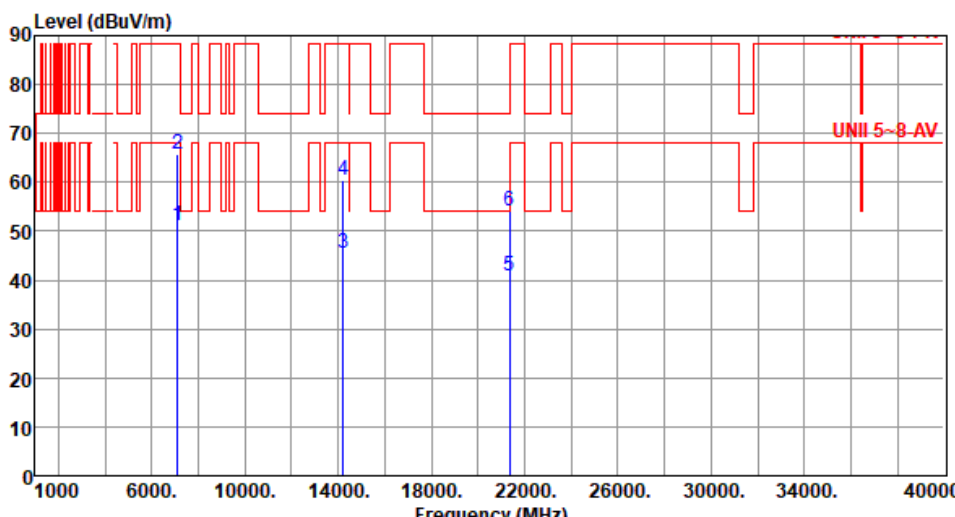


Modulation	11a	Test Freq. (MHz)	7115																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
																																																																									
	<table><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>51.10</td><td>68.20</td><td>-17.10</td><td>46.14</td><td>4.96</td><td>Average</td><td>340</td><td>12</td></tr><tr><td>2</td><td>7125.00</td><td>65.71</td><td>88.20</td><td>-22.49</td><td>60.75</td><td>4.96</td><td>Peak</td><td>340</td><td>12</td></tr><tr><td>3</td><td>14230.00</td><td>45.63</td><td>68.20</td><td>-22.57</td><td>38.46</td><td>7.17</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>14230.00</td><td>60.49</td><td>88.20</td><td>-27.71</td><td>53.32</td><td>7.17</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>21345.00</td><td>40.95</td><td>54.00</td><td>-13.05</td><td>36.70</td><td>4.25</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>21345.00</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>49.83</td><td>4.25</td><td>Peak</td><td>100</td><td>20</td></tr></table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	51.10	68.20	-17.10	46.14	4.96	Average	340	12	2	7125.00	65.71	88.20	-22.49	60.75	4.96	Peak	340	12	3	14230.00	45.63	68.20	-22.57	38.46	7.17	Average	100	60	4	14230.00	60.49	88.20	-27.71	53.32	7.17	Peak	100	60	5	21345.00	40.95	54.00	-13.05	36.70	4.25	Average	100	20	6	21345.00	54.08	74.00	-19.92	49.83	4.25	Peak	100	20			
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	7125.00	51.10	68.20	-17.10	46.14	4.96	Average	340	12																																																																
2	7125.00	65.71	88.20	-22.49	60.75	4.96	Peak	340	12																																																																
3	14230.00	45.63	68.20	-22.57	38.46	7.17	Average	100	60																																																																
4	14230.00	60.49	88.20	-27.71	53.32	7.17	Peak	100	60																																																																
5	21345.00	40.95	54.00	-13.05	36.70	4.25	Average	100	20																																																																
6	21345.00	54.08	74.00	-19.92	49.83	4.25	Peak	100	20																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									


Unwanted Emissions (Above 1GHz) for be EHT20-OFDMA

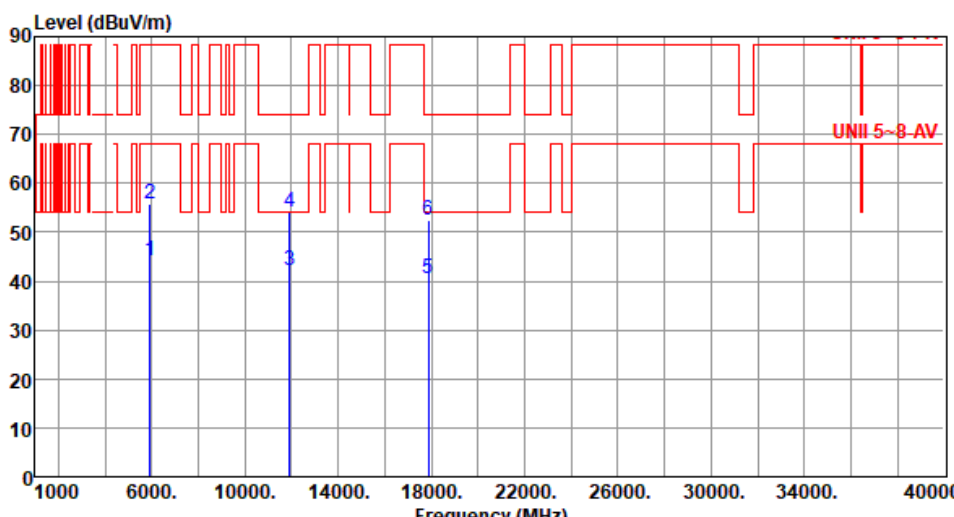Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>44.32</td><td>68.20</td><td>-23.88</td><td>43.09</td><td>1.23</td><td>Average</td><td>166</td><td>320</td></tr><tr><td>2</td><td>5925.00</td><td>55.89</td><td>88.20</td><td>-32.31</td><td>54.66</td><td>1.23</td><td>Peak</td><td>166</td><td>320</td></tr><tr><td>3</td><td>11910.00</td><td>42.15</td><td>54.00</td><td>-11.85</td><td>35.75</td><td>6.40</td><td>Average</td><td>100</td><td>94</td></tr><tr><td>4</td><td>11910.00</td><td>54.26</td><td>74.00</td><td>-19.74</td><td>47.86</td><td>6.40</td><td>Peak</td><td>100</td><td>94</td></tr><tr><td>5</td><td>17865.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>30.15</td><td>10.52</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>6</td><td>17865.00</td><td>52.59</td><td>74.00</td><td>-21.41</td><td>42.07</td><td>10.52</td><td>Peak</td><td>100</td><td>62</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	44.32	68.20	-23.88	43.09	1.23	Average	166	320	2	5925.00	55.89	88.20	-32.31	54.66	1.23	Peak	166	320	3	11910.00	42.15	54.00	-11.85	35.75	6.40	Average	100	94	4	11910.00	54.26	74.00	-19.74	47.86	6.40	Peak	100	94	5	17865.00	40.67	54.00	-13.33	30.15	10.52	Average	100	62	6	17865.00	52.59	74.00	-21.41	42.07	10.52	Peak	100	62
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	44.32	68.20	-23.88	43.09	1.23	Average	166	320																																																																
2	5925.00	55.89	88.20	-32.31	54.66	1.23	Peak	166	320																																																																
3	11910.00	42.15	54.00	-11.85	35.75	6.40	Average	100	94																																																																
4	11910.00	54.26	74.00	-19.74	47.86	6.40	Peak	100	94																																																																
5	17865.00	40.67	54.00	-13.33	30.15	10.52	Average	100	62																																																																
6	17865.00	52.59	74.00	-21.41	42.07	10.52	Peak	100	62																																																																

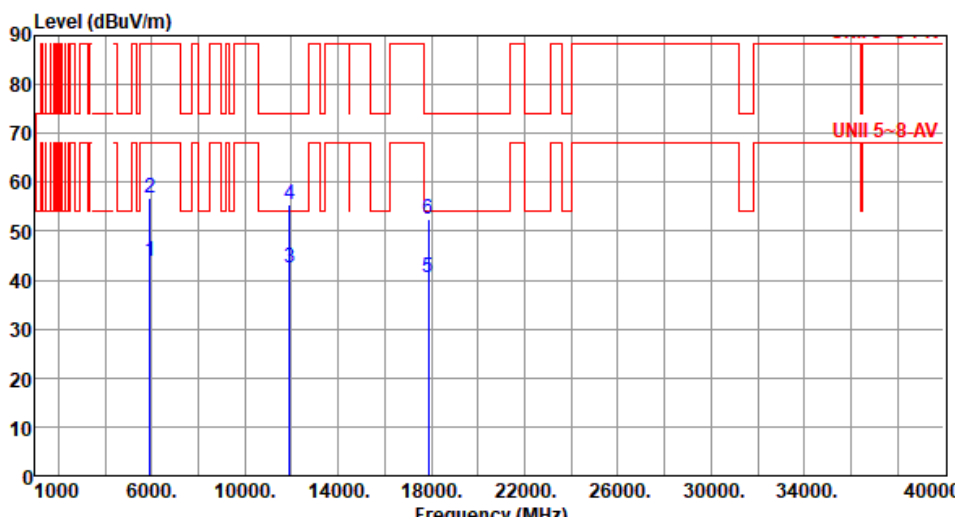


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>43.88</td><td>68.20</td><td>-24.32</td><td>42.65</td><td>1.23</td><td>Average</td><td>137</td><td>355</td></tr><tr><td>2</td><td>5925.00</td><td>56.64</td><td>88.20</td><td>-31.56</td><td>55.41</td><td>1.23</td><td>Peak</td><td>137</td><td>355</td></tr><tr><td>3</td><td>11910.00</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>36.09</td><td>6.40</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>4</td><td>11910.00</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>49.12</td><td>6.40</td><td>Peak</td><td>100</td><td>240</td></tr><tr><td>5</td><td>17865.00</td><td>40.48</td><td>54.00</td><td>-13.52</td><td>29.96</td><td>10.52</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>6</td><td>17865.00</td><td>52.47</td><td>74.00</td><td>-21.53</td><td>41.95</td><td>10.52</td><td>Peak</td><td>100</td><td>146</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.88	68.20	-24.32	42.65	1.23	Average	137	355	2	5925.00	56.64	88.20	-31.56	55.41	1.23	Peak	137	355	3	11910.00	42.49	54.00	-11.51	36.09	6.40	Average	100	240	4	11910.00	55.52	74.00	-18.48	49.12	6.40	Peak	100	240	5	17865.00	40.48	54.00	-13.52	29.96	10.52	Average	100	146	6	17865.00	52.47	74.00	-21.53	41.95	10.52	Peak	100	146
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.88	68.20	-24.32	42.65	1.23	Average	137	355																																																																
2	5925.00	56.64	88.20	-31.56	55.41	1.23	Peak	137	355																																																																
3	11910.00	42.49	54.00	-11.51	36.09	6.40	Average	100	240																																																																
4	11910.00	55.52	74.00	-18.48	49.12	6.40	Peak	100	240																																																																
5	17865.00	40.48	54.00	-13.52	29.96	10.52	Average	100	146																																																																
6	17865.00	52.47	74.00	-21.53	41.95	10.52	Peak	100	146																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

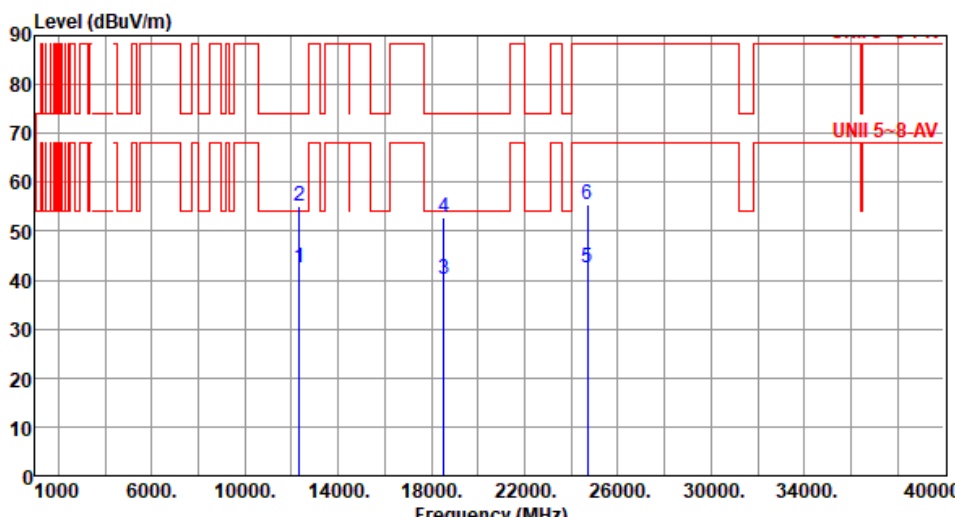


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12350.00</td><td>42.35</td><td>54.00</td><td>-11.65</td><td>36.02</td><td>6.33</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>2</td><td>12350.00</td><td>55.04</td><td>74.00</td><td>-18.96</td><td>48.71</td><td>6.33</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>3</td><td>18525.00</td><td>40.28</td><td>54.00</td><td>-13.72</td><td>38.93</td><td>1.35</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>18525.00</td><td>52.77</td><td>74.00</td><td>-21.23</td><td>51.42</td><td>1.35</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>5</td><td>24700.00</td><td>42.36</td><td>68.20</td><td>-25.84</td><td>33.90</td><td>8.46</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>6</td><td>24700.00</td><td>55.32</td><td>88.20</td><td>-32.88</td><td>46.86</td><td>8.46</td><td>Peak</td><td>100</td><td>154</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12350.00	42.35	54.00	-11.65	36.02	6.33	Average	100	49	2	12350.00	55.04	74.00	-18.96	48.71	6.33	Peak	100	49	3	18525.00	40.28	54.00	-13.72	38.93	1.35	Average	100	67	4	18525.00	52.77	74.00	-21.23	51.42	1.35	Peak	100	67	5	24700.00	42.36	68.20	-25.84	33.90	8.46	Average	100	154	6	24700.00	55.32	88.20	-32.88	46.86	8.46	Peak	100	154
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12350.00	42.35	54.00	-11.65	36.02	6.33	Average	100	49																																																																
2	12350.00	55.04	74.00	-18.96	48.71	6.33	Peak	100	49																																																																
3	18525.00	40.28	54.00	-13.72	38.93	1.35	Average	100	67																																																																
4	18525.00	52.77	74.00	-21.23	51.42	1.35	Peak	100	67																																																																
5	24700.00	42.36	68.20	-25.84	33.90	8.46	Average	100	154																																																																
6	24700.00	55.32	88.20	-32.88	46.86	8.46	Peak	100	154																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

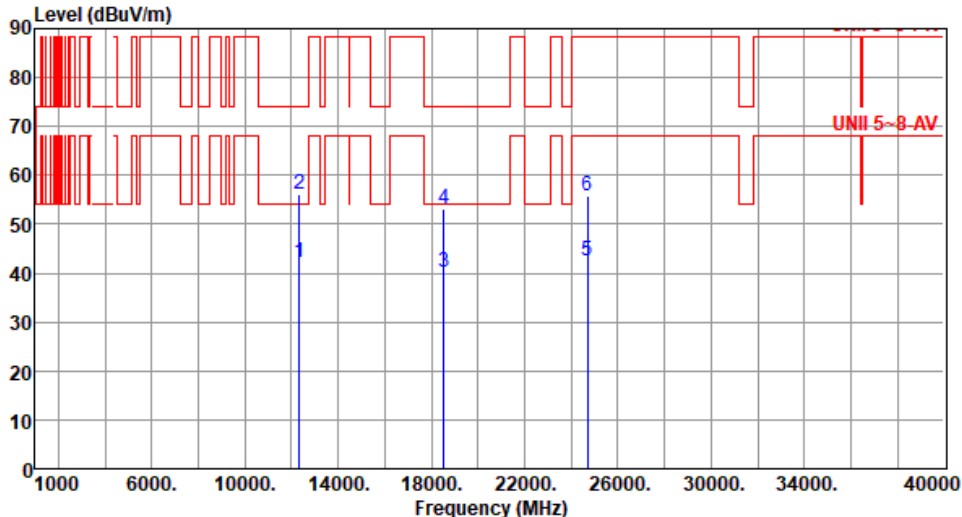


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12350.00	42.18	54.00	-11.82	35.85	6.33	Average	100	62
2	12350.00	56.04	74.00	-17.96	49.71	6.33	Peak	100	62
3	18525.00	40.18	54.00	-13.82	38.83	1.35	Average	100	97
4	18525.00	53.28	74.00	-20.72	51.93	1.35	Peak	100	97
5	24700.00	42.35	68.20	-25.85	33.89	8.46	Average	100	120
6	24700.00	55.89	88.20	-32.31	47.43	8.46	Peak	100	120

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

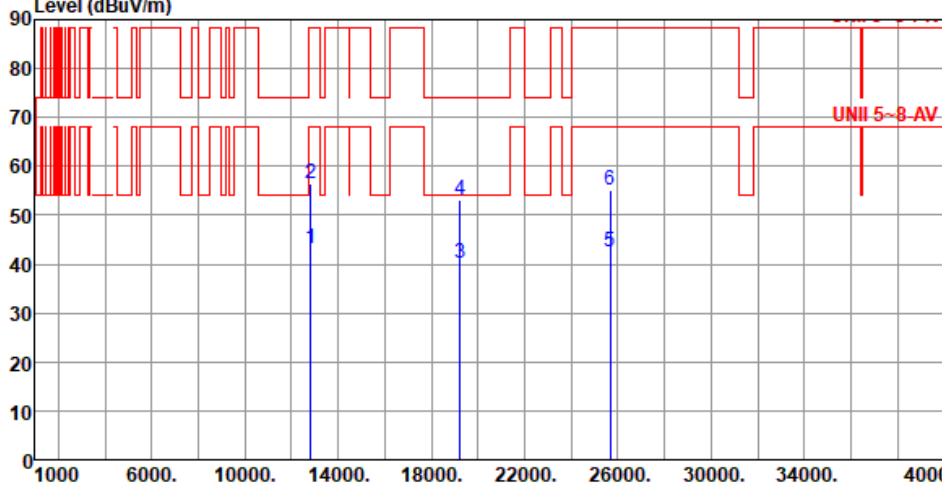


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12830.00</td><td>43.15</td><td>68.20</td><td>-25.05</td><td>36.80</td><td>6.35</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>2</td><td>12830.00</td><td>56.46</td><td>88.20</td><td>-31.74</td><td>50.11</td><td>6.35</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>3</td><td>19245.00</td><td>40.18</td><td>54.00</td><td>-13.82</td><td>37.88</td><td>2.30</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>4</td><td>19245.00</td><td>53.19</td><td>74.00</td><td>-20.81</td><td>50.89</td><td>2.30</td><td>Peak</td><td>100</td><td>135</td></tr><tr><td>5</td><td>25660.00</td><td>42.35</td><td>68.20</td><td>-25.85</td><td>34.10</td><td>8.25</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>6</td><td>25660.00</td><td>55.14</td><td>88.20</td><td>-33.06</td><td>46.89</td><td>8.25</td><td>Peak</td><td>100</td><td>172</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12830.00	43.15	68.20	-25.05	36.80	6.35	Average	100	49	2	12830.00	56.46	88.20	-31.74	50.11	6.35	Peak	100	49	3	19245.00	40.18	54.00	-13.82	37.88	2.30	Average	100	135	4	19245.00	53.19	74.00	-20.81	50.89	2.30	Peak	100	135	5	25660.00	42.35	68.20	-25.85	34.10	8.25	Average	100	172	6	25660.00	55.14	88.20	-33.06	46.89	8.25	Peak	100	172
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12830.00	43.15	68.20	-25.05	36.80	6.35	Average	100	49																																																																
2	12830.00	56.46	88.20	-31.74	50.11	6.35	Peak	100	49																																																																
3	19245.00	40.18	54.00	-13.82	37.88	2.30	Average	100	135																																																																
4	19245.00	53.19	74.00	-20.81	50.89	2.30	Peak	100	135																																																																
5	25660.00	42.35	68.20	-25.85	34.10	8.25	Average	100	172																																																																
6	25660.00	55.14	88.20	-33.06	46.89	8.25	Peak	100	172																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

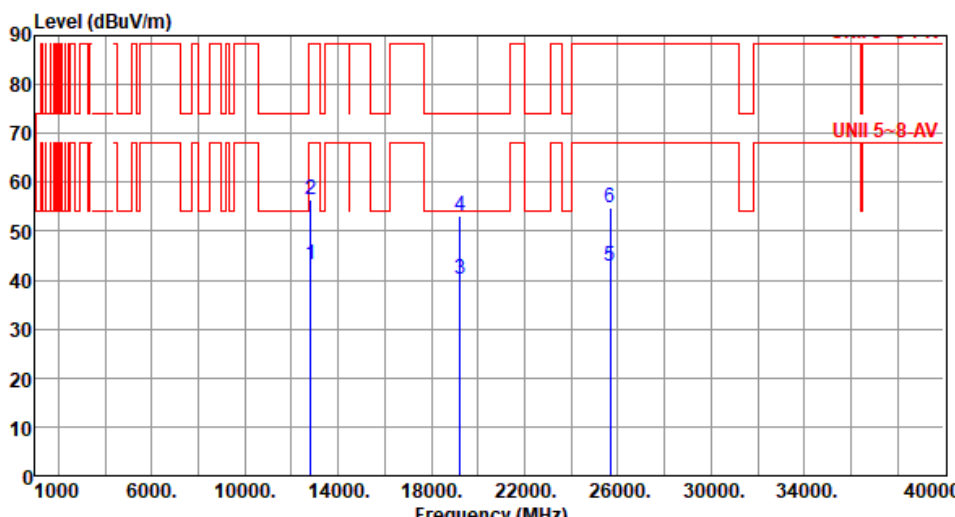


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12830.00</td><td>43.15</td><td>68.20</td><td>-25.05</td><td>36.80</td><td>6.35</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>2</td><td>12830.00</td><td>56.31</td><td>88.20</td><td>-31.89</td><td>49.96</td><td>6.35</td><td>Peak</td><td>100</td><td>58</td></tr><tr><td>3</td><td>19245.00</td><td>40.35</td><td>54.00</td><td>-13.65</td><td>38.05</td><td>2.30</td><td>Average</td><td>100</td><td>96</td></tr><tr><td>4</td><td>19245.00</td><td>53.14</td><td>74.00</td><td>-20.86</td><td>50.84</td><td>2.30</td><td>Peak</td><td>100</td><td>96</td></tr><tr><td>5</td><td>25660.00</td><td>42.69</td><td>68.20</td><td>-25.51</td><td>34.44</td><td>8.25</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>6</td><td>25660.00</td><td>54.91</td><td>88.20</td><td>-33.29</td><td>46.66</td><td>8.25</td><td>Peak</td><td>100</td><td>34</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12830.00	43.15	68.20	-25.05	36.80	6.35	Average	100	58	2	12830.00	56.31	88.20	-31.89	49.96	6.35	Peak	100	58	3	19245.00	40.35	54.00	-13.65	38.05	2.30	Average	100	96	4	19245.00	53.14	74.00	-20.86	50.84	2.30	Peak	100	96	5	25660.00	42.69	68.20	-25.51	34.44	8.25	Average	100	34	6	25660.00	54.91	88.20	-33.29	46.66	8.25	Peak	100	34
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12830.00	43.15	68.20	-25.05	36.80	6.35	Average	100	58																																																																
2	12830.00	56.31	88.20	-31.89	49.96	6.35	Peak	100	58																																																																
3	19245.00	40.35	54.00	-13.65	38.05	2.30	Average	100	96																																																																
4	19245.00	53.14	74.00	-20.86	50.84	2.30	Peak	100	96																																																																
5	25660.00	42.69	68.20	-25.51	34.44	8.25	Average	100	34																																																																
6	25660.00	54.91	88.20	-33.29	46.66	8.25	Peak	100	34																																																																

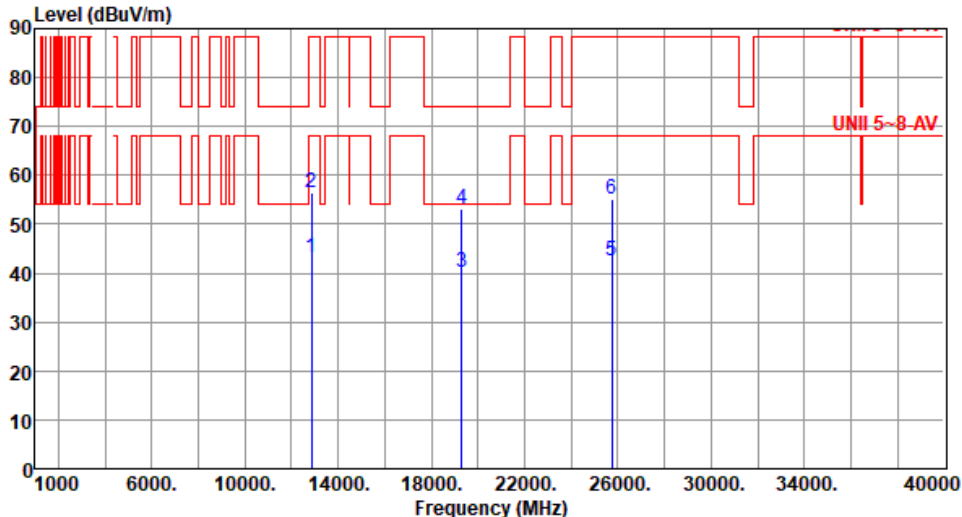

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12870.00</td><td>43.12</td><td>68.20</td><td>-25.08</td><td>36.73</td><td>6.39</td><td>Average</td><td>100</td><td>42</td></tr><tr><td>2</td><td>12870.00</td><td>56.41</td><td>88.20</td><td>-31.79</td><td>50.02</td><td>6.39</td><td>Peak</td><td>100</td><td>42</td></tr><tr><td>3</td><td>19305.00</td><td>40.12</td><td>54.00</td><td>-13.88</td><td>37.84</td><td>2.28</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>4</td><td>19305.00</td><td>53.16</td><td>74.00</td><td>-20.84</td><td>50.88</td><td>2.28</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>5</td><td>25740.00</td><td>42.43</td><td>68.20</td><td>-25.77</td><td>34.20</td><td>8.23</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td>25740.00</td><td>55.16</td><td>88.20</td><td>-33.04</td><td>46.93</td><td>8.23</td><td>Peak</td><td>100</td><td>177</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12870.00	43.12	68.20	-25.08	36.73	6.39	Average	100	42	2	12870.00	56.41	88.20	-31.79	50.02	6.39	Peak	100	42	3	19305.00	40.12	54.00	-13.88	37.84	2.28	Average	100	138	4	19305.00	53.16	74.00	-20.84	50.88	2.28	Peak	100	138	5	25740.00	42.43	68.20	-25.77	34.20	8.23	Average	100	177	6	25740.00	55.16	88.20	-33.04	46.93	8.23	Peak	100	177
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12870.00	43.12	68.20	-25.08	36.73	6.39	Average	100	42																																																																
2	12870.00	56.41	88.20	-31.79	50.02	6.39	Peak	100	42																																																																
3	19305.00	40.12	54.00	-13.88	37.84	2.28	Average	100	138																																																																
4	19305.00	53.16	74.00	-20.84	50.88	2.28	Peak	100	138																																																																
5	25740.00	42.43	68.20	-25.77	34.20	8.23	Average	100	177																																																																
6	25740.00	55.16	88.20	-33.04	46.93	8.23	Peak	100	177																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

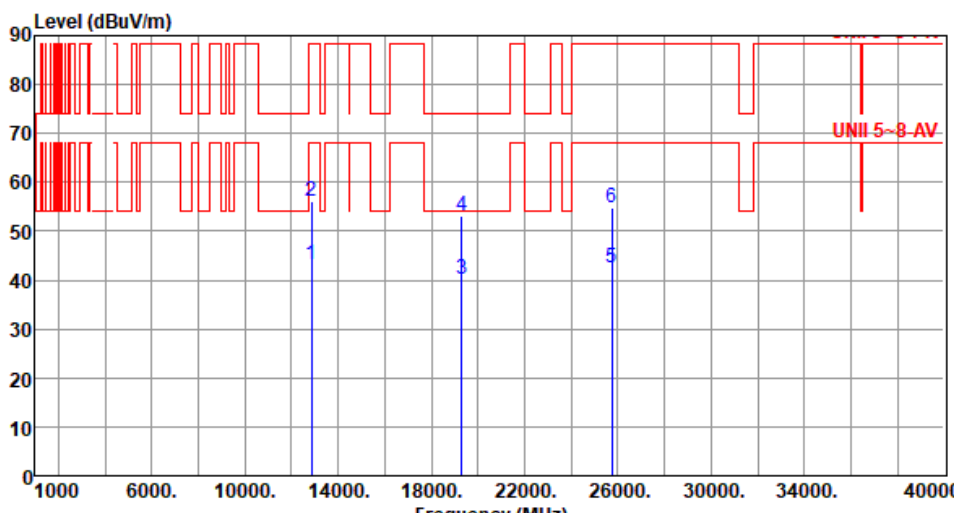

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12870.00</td><td>43.06</td><td>68.20</td><td>-25.14</td><td>36.67</td><td>6.39</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>2</td><td>12870.00</td><td>56.27</td><td>88.20</td><td>-31.93</td><td>49.88</td><td>6.39</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>3</td><td>19305.00</td><td>40.28</td><td>54.00</td><td>-13.72</td><td>38.00</td><td>2.28</td><td>Average</td><td>100</td><td>91</td></tr><tr><td>4</td><td>19305.00</td><td>53.02</td><td>74.00</td><td>-20.98</td><td>50.74</td><td>2.28</td><td>Peak</td><td>100</td><td>91</td></tr><tr><td>5</td><td>25740.00</td><td>42.64</td><td>68.20</td><td>-25.56</td><td>34.41</td><td>8.23</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>25740.00</td><td>54.88</td><td>88.20</td><td>-33.32</td><td>46.65</td><td>8.23</td><td>Peak</td><td>100</td><td>22</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12870.00	43.06	68.20	-25.14	36.67	6.39	Average	100	55	2	12870.00	56.27	88.20	-31.93	49.88	6.39	Peak	100	55	3	19305.00	40.28	54.00	-13.72	38.00	2.28	Average	100	91	4	19305.00	53.02	74.00	-20.98	50.74	2.28	Peak	100	91	5	25740.00	42.64	68.20	-25.56	34.41	8.23	Average	100	22	6	25740.00	54.88	88.20	-33.32	46.65	8.23	Peak	100	22
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12870.00	43.06	68.20	-25.14	36.67	6.39	Average	100	55																																																																
2	12870.00	56.27	88.20	-31.93	49.88	6.39	Peak	100	55																																																																
3	19305.00	40.28	54.00	-13.72	38.00	2.28	Average	100	91																																																																
4	19305.00	53.02	74.00	-20.98	50.74	2.28	Peak	100	91																																																																
5	25740.00	42.64	68.20	-25.56	34.41	8.23	Average	100	22																																																																
6	25740.00	54.88	88.20	-33.32	46.65	8.23	Peak	100	22																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6475
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6475																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12950.00</td><td>43.31</td><td>68.20</td><td>-24.89</td><td>36.86</td><td>6.45</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>2</td><td>12950.00</td><td>56.44</td><td>88.20</td><td>-31.76</td><td>49.99</td><td>6.45</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>3</td><td>19425.00</td><td>40.48</td><td>54.00</td><td>-13.52</td><td>38.27</td><td>2.21</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>4</td><td>19425.00</td><td>52.35</td><td>74.00</td><td>-21.65</td><td>50.14</td><td>2.21</td><td>Peak</td><td>100</td><td>59</td></tr><tr><td>5</td><td>25900.00</td><td>42.18</td><td>68.20</td><td>-26.02</td><td>34.11</td><td>8.07</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>6</td><td>25900.00</td><td>54.38</td><td>88.20</td><td>-33.82</td><td>46.31</td><td>8.07</td><td>Peak</td><td>100</td><td>133</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12950.00	43.31	68.20	-24.89	36.86	6.45	Average	100	36	2	12950.00	56.44	88.20	-31.76	49.99	6.45	Peak	100	36	3	19425.00	40.48	54.00	-13.52	38.27	2.21	Average	100	59	4	19425.00	52.35	74.00	-21.65	50.14	2.21	Peak	100	59	5	25900.00	42.18	68.20	-26.02	34.11	8.07	Average	100	133	6	25900.00	54.38	88.20	-33.82	46.31	8.07	Peak	100	133
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12950.00	43.31	68.20	-24.89	36.86	6.45	Average	100	36																																																																
2	12950.00	56.44	88.20	-31.76	49.99	6.45	Peak	100	36																																																																
3	19425.00	40.48	54.00	-13.52	38.27	2.21	Average	100	59																																																																
4	19425.00	52.35	74.00	-21.65	50.14	2.21	Peak	100	59																																																																
5	25900.00	42.18	68.20	-26.02	34.11	8.07	Average	100	133																																																																
6	25900.00	54.38	88.20	-33.82	46.31	8.07	Peak	100	133																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20-OFDMA		Test Freq. (MHz)		6515				
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	13030.00	42.68	68.20	-25.52	36.37	6.31	Average	100	48
2	13030.00	55.61	88.20	-32.59	49.30	6.31	Peak	100	48
3	19545.00	40.57	54.00	-13.43	38.31	2.26	Average	100	76
4	19545.00	53.94	74.00	-20.06	51.68	2.26	Peak	100	76
5	26060.00	42.59	68.20	-25.61	34.50	8.09	Average	100	113
6	26060.00	54.86	88.20	-33.34	46.77	8.09	Peak	100	113
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6515																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13030.00</td><td>42.61</td><td>68.20</td><td>-25.59</td><td>36.30</td><td>6.31</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>2</td><td>13030.00</td><td>56.03</td><td>88.20</td><td>-32.17</td><td>49.72</td><td>6.31</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>3</td><td>19545.00</td><td>40.75</td><td>54.00</td><td>-13.25</td><td>38.49</td><td>2.26</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>4</td><td>19545.00</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>51.43</td><td>2.26</td><td>Peak</td><td>100</td><td>72</td></tr><tr><td>5</td><td>26060.00</td><td>42.57</td><td>68.20</td><td>-25.63</td><td>34.48</td><td>8.09</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>6</td><td>26060.00</td><td>55.97</td><td>88.20</td><td>-32.23</td><td>47.88</td><td>8.09</td><td>Peak</td><td>100</td><td>23</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13030.00	42.61	68.20	-25.59	36.30	6.31	Average	100	34	2	13030.00	56.03	88.20	-32.17	49.72	6.31	Peak	100	34	3	19545.00	40.75	54.00	-13.25	38.49	2.26	Average	100	72	4	19545.00	53.69	74.00	-20.31	51.43	2.26	Peak	100	72	5	26060.00	42.57	68.20	-25.63	34.48	8.09	Average	100	23	6	26060.00	55.97	88.20	-32.23	47.88	8.09	Peak	100	23
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13030.00	42.61	68.20	-25.59	36.30	6.31	Average	100	34																																																																
2	13030.00	56.03	88.20	-32.17	49.72	6.31	Peak	100	34																																																																
3	19545.00	40.75	54.00	-13.25	38.49	2.26	Average	100	72																																																																
4	19545.00	53.69	74.00	-20.31	51.43	2.26	Peak	100	72																																																																
5	26060.00	42.57	68.20	-25.63	34.48	8.09	Average	100	23																																																																
6	26060.00	55.97	88.20	-32.23	47.88	8.09	Peak	100	23																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT20-OFDMA		Test Freq. (MHz)		6535																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																																			
Level (dBUV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13070.00</td><td>45.72</td><td>68.20</td><td>-22.48</td><td>39.62</td><td>6.10</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>2</td><td>13070.00</td><td>56.27</td><td>88.20</td><td>-31.93</td><td>50.17</td><td>6.10</td><td>Peak</td><td>100</td><td>19</td></tr><tr><td>3</td><td>19605.00</td><td>39.86</td><td>54.00</td><td>-14.14</td><td>37.51</td><td>2.35</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>19605.00</td><td>53.84</td><td>74.00</td><td>-20.16</td><td>51.49</td><td>2.35</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>26140.00</td><td>42.98</td><td>68.20</td><td>-25.22</td><td>34.72</td><td>8.26</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>6</td><td>26140.00</td><td>55.33</td><td>88.20</td><td>-32.87</td><td>47.07</td><td>8.26</td><td>Peak</td><td>100</td><td>84</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13070.00	45.72	68.20	-22.48	39.62	6.10	Average	100	19	2	13070.00	56.27	88.20	-31.93	50.17	6.10	Peak	100	19	3	19605.00	39.86	54.00	-14.14	37.51	2.35	Average	100	60	4	19605.00	53.84	74.00	-20.16	51.49	2.35	Peak	100	60	5	26140.00	42.98	68.20	-25.22	34.72	8.26	Average	100	84	6	26140.00	55.33	88.20	-32.87	47.07	8.26	Peak	100	84
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13070.00	45.72	68.20	-22.48	39.62	6.10	Average	100	19																																																																																										
2	13070.00	56.27	88.20	-31.93	50.17	6.10	Peak	100	19																																																																																										
3	19605.00	39.86	54.00	-14.14	37.51	2.35	Average	100	60																																																																																										
4	19605.00	53.84	74.00	-20.16	51.49	2.35	Peak	100	60																																																																																										
5	26140.00	42.98	68.20	-25.22	34.72	8.26	Average	100	84																																																																																										
6	26140.00	55.33	88.20	-32.87	47.07	8.26	Peak	100	84																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6535						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13070.00	42.72	68.20	-25.48	36.62	6.10	Average	100	80
2	13070.00	56.76	88.20	-31.44	50.66	6.10	Peak	100	80
3	19605.00	39.88	54.00	-14.12	37.53	2.35	Average	100	50
4	19605.00	53.58	74.00	-20.42	51.23	2.35	Peak	100	50
5	26140.00	43.26	68.20	-24.94	35.00	8.26	Average	100	29
6	26140.00	55.56	88.20	-32.64	47.30	8.26	Peak	100	29

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

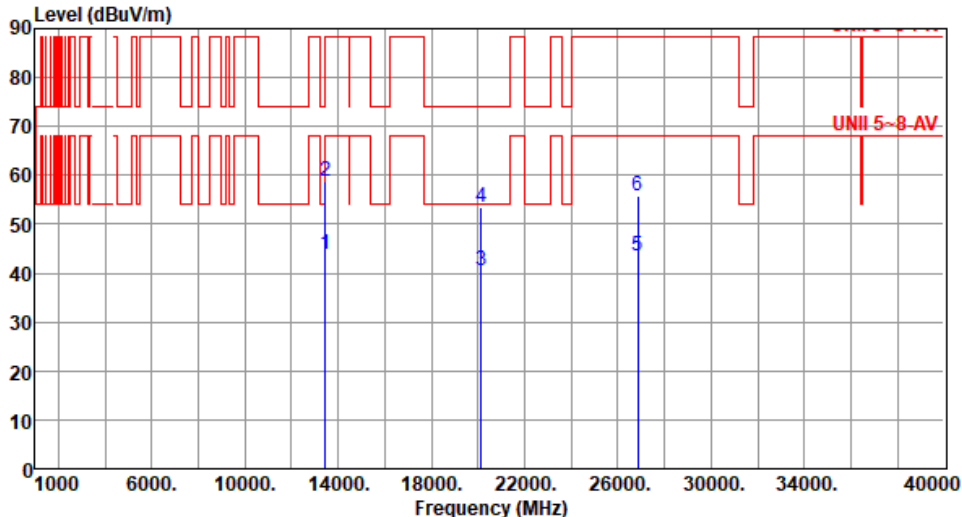

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level reading			

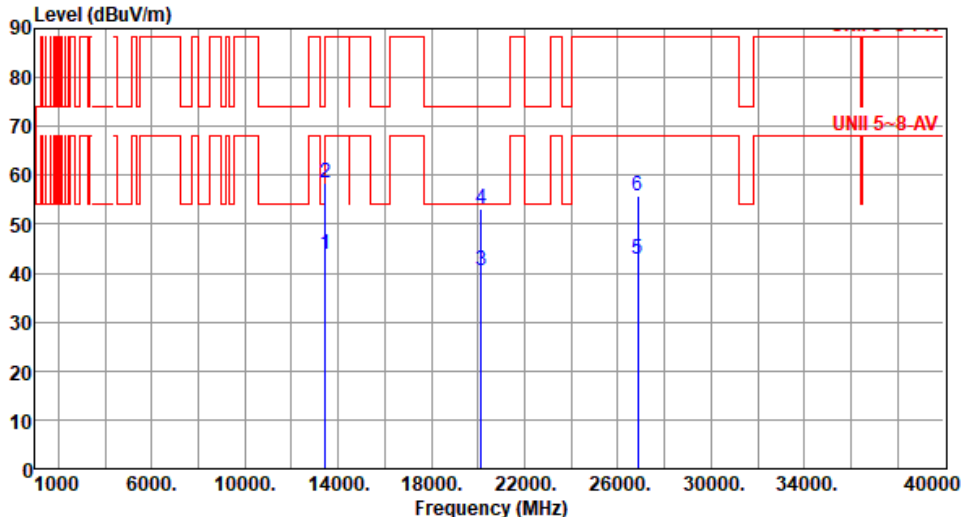


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13430.00</td><td>43.81</td><td>68.20</td><td>-24.39</td><td>37.65</td><td>6.16</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>2</td><td>13430.00</td><td>58.29</td><td>88.20</td><td>-29.91</td><td>52.13</td><td>6.16</td><td>Peak</td><td>100</td><td>22</td></tr><tr><td>3</td><td>20145.00</td><td>40.42</td><td>54.00</td><td>-13.58</td><td>37.54</td><td>2.88</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>4</td><td>20145.00</td><td>53.27</td><td>74.00</td><td>-20.73</td><td>50.39</td><td>2.88</td><td>Peak</td><td>100</td><td>71</td></tr><tr><td>5</td><td>26860.00</td><td>42.86</td><td>68.20</td><td>-25.34</td><td>33.95</td><td>8.91</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>6</td><td>26860.00</td><td>55.81</td><td>88.20</td><td>-32.39</td><td>46.90</td><td>8.91</td><td>Peak</td><td>100</td><td>117</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13430.00	43.81	68.20	-24.39	37.65	6.16	Average	100	22	2	13430.00	58.29	88.20	-29.91	52.13	6.16	Peak	100	22	3	20145.00	40.42	54.00	-13.58	37.54	2.88	Average	100	71	4	20145.00	53.27	74.00	-20.73	50.39	2.88	Peak	100	71	5	26860.00	42.86	68.20	-25.34	33.95	8.91	Average	100	117	6	26860.00	55.81	88.20	-32.39	46.90	8.91	Peak	100	117
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13430.00	43.81	68.20	-24.39	37.65	6.16	Average	100	22																																																																
2	13430.00	58.29	88.20	-29.91	52.13	6.16	Peak	100	22																																																																
3	20145.00	40.42	54.00	-13.58	37.54	2.88	Average	100	71																																																																
4	20145.00	53.27	74.00	-20.73	50.39	2.88	Peak	100	71																																																																
5	26860.00	42.86	68.20	-25.34	33.95	8.91	Average	100	117																																																																
6	26860.00	55.81	88.20	-32.39	46.90	8.91	Peak	100	117																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20-OFDMA		Test Freq. (MHz)		6855																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																																			
<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13710.00</td><td>43.75</td><td>68.20</td><td>-24.45</td><td>37.51</td><td>6.24</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>2</td><td>13710.00</td><td>57.86</td><td>88.20</td><td>-30.34</td><td>51.62</td><td>6.24</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>3</td><td>20565.00</td><td>40.59</td><td>54.00</td><td>-13.41</td><td>37.38</td><td>3.21</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>4</td><td>20565.00</td><td>53.06</td><td>74.00</td><td>-20.94</td><td>49.85</td><td>3.21</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>5</td><td>27420.00</td><td>43.28</td><td>68.20</td><td>-24.92</td><td>34.60</td><td>8.68</td><td>Average</td><td>100</td><td>89</td></tr><tr><td>6</td><td>27420.00</td><td>57.58</td><td>88.20</td><td>-30.62</td><td>48.90</td><td>8.68</td><td>Peak</td><td>100</td><td>89</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13710.00	43.75	68.20	-24.45	37.51	6.24	Average	100	27	2	13710.00	57.86	88.20	-30.34	51.62	6.24	Peak	100	27	3	20565.00	40.59	54.00	-13.41	37.38	3.21	Average	100	65	4	20565.00	53.06	74.00	-20.94	49.85	3.21	Peak	100	65	5	27420.00	43.28	68.20	-24.92	34.60	8.68	Average	100	89	6	27420.00	57.58	88.20	-30.62	48.90	8.68	Peak	100	89
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13710.00	43.75	68.20	-24.45	37.51	6.24	Average	100	27																																																																																										
2	13710.00	57.86	88.20	-30.34	51.62	6.24	Peak	100	27																																																																																										
3	20565.00	40.59	54.00	-13.41	37.38	3.21	Average	100	65																																																																																										
4	20565.00	53.06	74.00	-20.94	49.85	3.21	Peak	100	65																																																																																										
5	27420.00	43.28	68.20	-24.92	34.60	8.68	Average	100	89																																																																																										
6	27420.00	57.58	88.20	-30.62	48.90	8.68	Peak	100	89																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

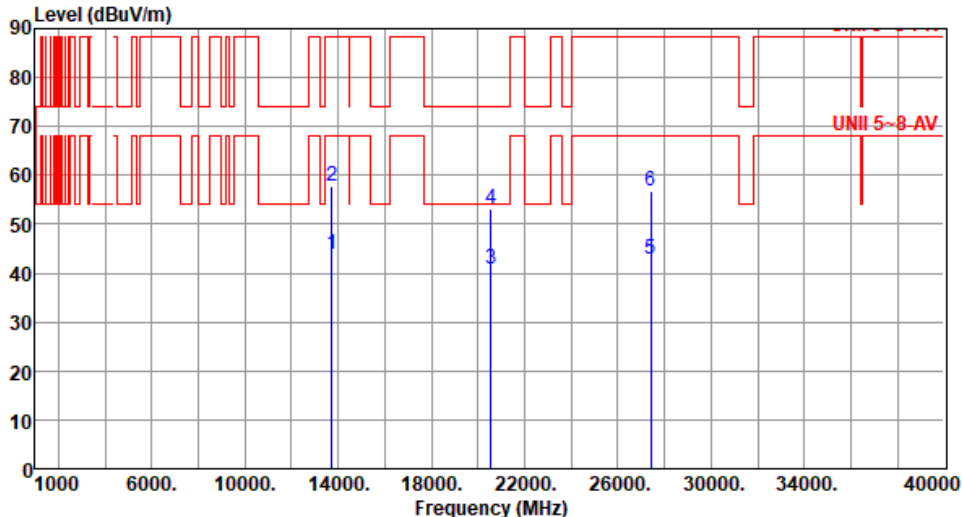


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855																																																												
Polarization	Vertical																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dB reading dB/m High Table dBuV/m dB dBuV dB dBuV dB/m cm deg <table><tr><td>1</td><td>13710.00</td><td>43.88</td><td>68.20</td><td>-24.32</td><td>37.64</td><td>6.24</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>2</td><td>13710.00</td><td>57.89</td><td>88.20</td><td>-30.31</td><td>51.65</td><td>6.24</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>3</td><td>20565.00</td><td>40.79</td><td>54.00</td><td>-13.21</td><td>37.58</td><td>3.21</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>4</td><td>20565.00</td><td>52.98</td><td>74.00</td><td>-21.02</td><td>49.77</td><td>3.21</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>5</td><td>27420.00</td><td>42.69</td><td>68.20</td><td>-25.51</td><td>34.01</td><td>8.68</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>6</td><td>27420.00</td><td>56.67</td><td>88.20</td><td>-31.53</td><td>47.99</td><td>8.68</td><td>Peak</td><td>100</td><td>25</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				1	13710.00	43.88	68.20	-24.32	37.64	6.24	Average	100	55	2	13710.00	57.89	88.20	-30.31	51.65	6.24	Peak	100	55	3	20565.00	40.79	54.00	-13.21	37.58	3.21	Average	100	66	4	20565.00	52.98	74.00	-21.02	49.77	3.21	Peak	100	66	5	27420.00	42.69	68.20	-25.51	34.01	8.68	Average	100	25	6	27420.00	56.67	88.20	-31.53	47.99	8.68	Peak	100	25
1	13710.00	43.88	68.20	-24.32	37.64	6.24	Average	100	55																																																						
2	13710.00	57.89	88.20	-30.31	51.65	6.24	Peak	100	55																																																						
3	20565.00	40.79	54.00	-13.21	37.58	3.21	Average	100	66																																																						
4	20565.00	52.98	74.00	-21.02	49.77	3.21	Peak	100	66																																																						
5	27420.00	42.69	68.20	-25.51	34.01	8.68	Average	100	25																																																						
6	27420.00	56.67	88.20	-31.53	47.99	8.68	Peak	100	25																																																						




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6875
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

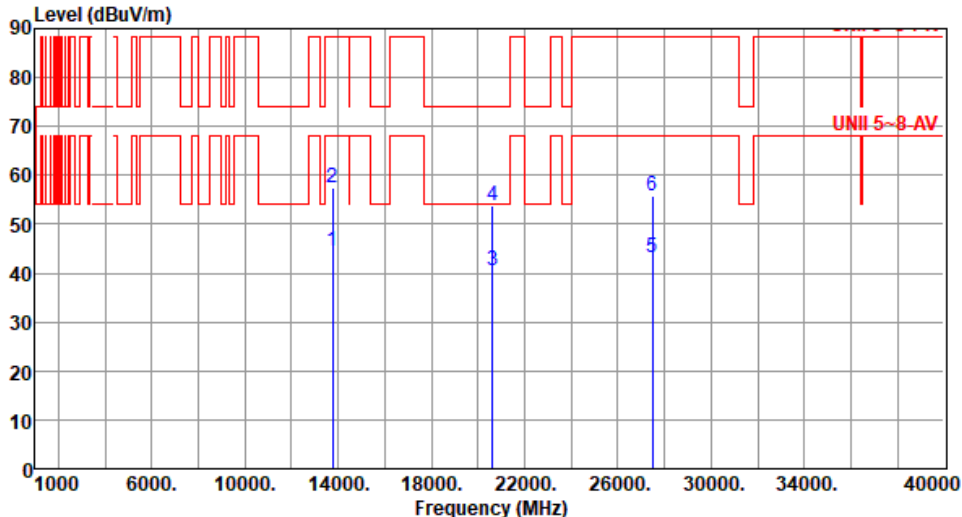

Modulation	be EHT20-OFDMA		Test Freq. (MHz)		6875																																																																																														
Polarization	Vertical																																																																																																		
Test By :Paul Lin			Temperature(°C):24			Humidity(%):64																																																																																													
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13750.00</td><td>44.42</td><td>68.20</td><td>-23.78</td><td>38.17</td><td>6.25</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>2</td><td>13750.00</td><td>57.59</td><td>88.20</td><td>-30.61</td><td>51.34</td><td>6.25</td><td>Peak</td><td>100</td><td>24</td></tr><tr><td>3</td><td>20625.00</td><td>40.57</td><td>54.00</td><td>-13.43</td><td>37.19</td><td>3.38</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>4</td><td>20625.00</td><td>53.67</td><td>74.00</td><td>-20.33</td><td>50.29</td><td>3.38</td><td>Peak</td><td>100</td><td>59</td></tr><tr><td>5</td><td>27500.00</td><td>43.12</td><td>68.20</td><td>-25.08</td><td>34.31</td><td>8.81</td><td>Average</td><td>100</td><td>98</td></tr><tr><td>6</td><td>27500.00</td><td>55.82</td><td>88.20</td><td>-32.38</td><td>47.01</td><td>8.81</td><td>Peak</td><td>100</td><td>98</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13750.00	44.42	68.20	-23.78	38.17	6.25	Average	100	24	2	13750.00	57.59	88.20	-30.61	51.34	6.25	Peak	100	24	3	20625.00	40.57	54.00	-13.43	37.19	3.38	Average	100	59	4	20625.00	53.67	74.00	-20.33	50.29	3.38	Peak	100	59	5	27500.00	43.12	68.20	-25.08	34.31	8.81	Average	100	98	6	27500.00	55.82	88.20	-32.38	47.01	8.81	Peak	100	98
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13750.00	44.42	68.20	-23.78	38.17	6.25	Average	100	24																																																																																										
2	13750.00	57.59	88.20	-30.61	51.34	6.25	Peak	100	24																																																																																										
3	20625.00	40.57	54.00	-13.43	37.19	3.38	Average	100	59																																																																																										
4	20625.00	53.67	74.00	-20.33	50.29	3.38	Peak	100	59																																																																																										
5	27500.00	43.12	68.20	-25.08	34.31	8.81	Average	100	98																																																																																										
6	27500.00	55.82	88.20	-32.38	47.01	8.81	Peak	100	98																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

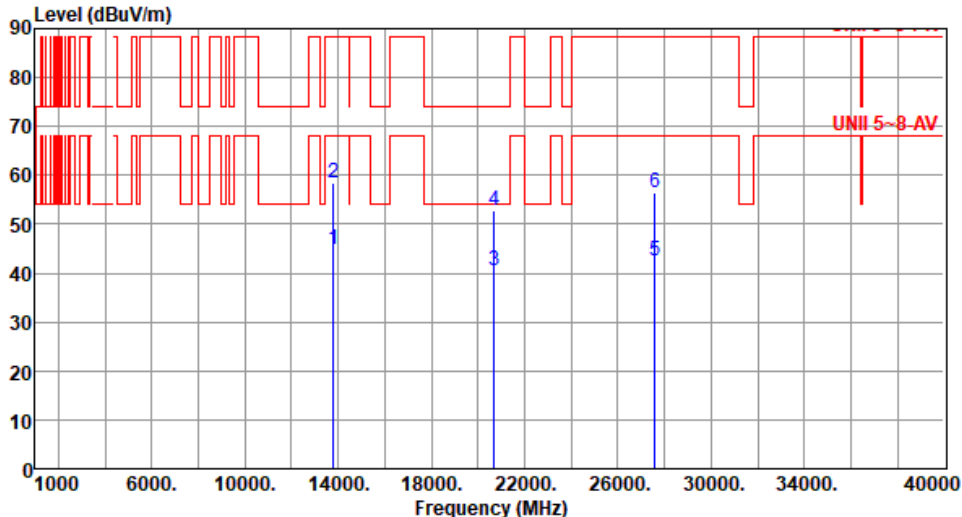


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6895
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg 113790.0044.8268.20-23.3838.556.27Average100104 213790.0058.3688.20-29.8452.096.27Peak100104 320685.0040.6354.00-13.3737.083.55Average10049 420685.0052.8674.00-21.1449.313.55Peak10049 527580.0042.5468.20-25.6633.698.85Average10034 627580.0056.5288.20-31.6847.678.85Peak10034			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Modulation	be EHT20-OFDMA		Test Freq. (MHz)		6895																																																																																														
Polarization	Vertical																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																																			
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13790.00</td><td>44.69</td><td>68.20</td><td>-23.51</td><td>38.42</td><td>6.27</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>2</td><td>13790.00</td><td>58.18</td><td>88.20</td><td>-30.02</td><td>51.91</td><td>6.27</td><td>Peak</td><td>100</td><td>35</td></tr><tr><td>3</td><td>20685.00</td><td>40.89</td><td>54.00</td><td>-13.11</td><td>37.34</td><td>3.55</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>4</td><td>20685.00</td><td>53.16</td><td>74.00</td><td>-20.84</td><td>49.61</td><td>3.55</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>5</td><td>27580.00</td><td>42.42</td><td>68.20</td><td>-25.78</td><td>33.57</td><td>8.85</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>6</td><td>27580.00</td><td>56.27</td><td>88.20</td><td>-31.93</td><td>47.42</td><td>8.85</td><td>Peak</td><td>100</td><td>23</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13790.00	44.69	68.20	-23.51	38.42	6.27	Average	100	35	2	13790.00	58.18	88.20	-30.02	51.91	6.27	Peak	100	35	3	20685.00	40.89	54.00	-13.11	37.34	3.55	Average	100	66	4	20685.00	53.16	74.00	-20.84	49.61	3.55	Peak	100	66	5	27580.00	42.42	68.20	-25.78	33.57	8.85	Average	100	23	6	27580.00	56.27	88.20	-31.93	47.42	8.85	Peak	100	23
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13790.00	44.69	68.20	-23.51	38.42	6.27	Average	100	35																																																																																										
2	13790.00	58.18	88.20	-30.02	51.91	6.27	Peak	100	35																																																																																										
3	20685.00	40.89	54.00	-13.11	37.34	3.55	Average	100	66																																																																																										
4	20685.00	53.16	74.00	-20.84	49.61	3.55	Peak	100	66																																																																																										
5	27580.00	42.42	68.20	-25.78	33.57	8.85	Average	100	23																																																																																										
6	27580.00	56.27	88.20	-31.93	47.42	8.85	Peak	100	23																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

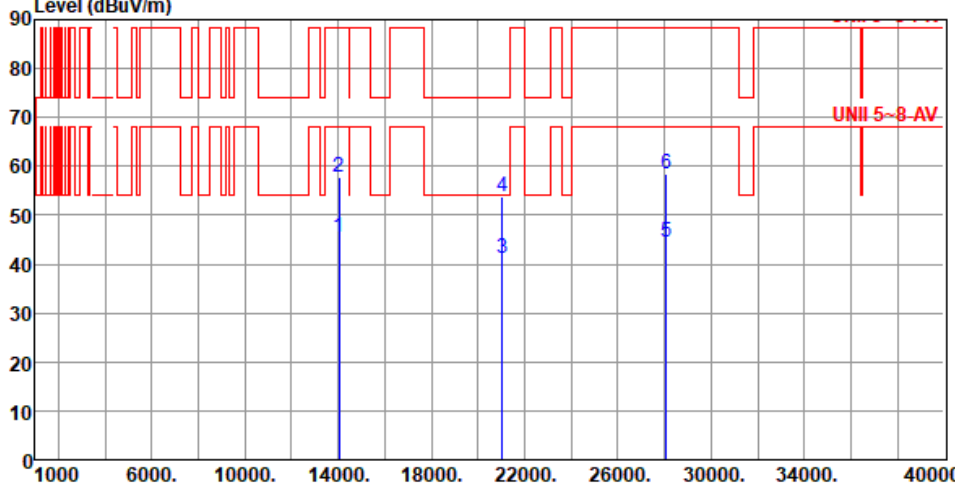


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7015						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	45.42	68.20	-22.78	38.59	6.83	Average	100	76
2	14030.00	57.95	88.20	-30.25	51.12	6.83	Peak	100	76
3	21045.00	41.12	54.00	-12.88	37.30	3.82	Average	100	42
4	21045.00	53.65	74.00	-20.35	49.83	3.82	Peak	100	42
5	28060.00	44.39	68.20	-23.81	34.98	9.41	Average	100	107
6	28060.00	58.37	88.20	-29.83	48.96	9.41	Peak	100	107
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7015																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>14030.00</td><td>45.51</td><td>68.20</td><td>-22.69</td><td>38.68</td><td>6.83</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>2</td><td>14030.00</td><td>58.33</td><td>88.20</td><td>-29.87</td><td>51.50</td><td>6.83</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>3</td><td>21045.00</td><td>40.47</td><td>54.00</td><td>-13.53</td><td>36.65</td><td>3.82</td><td>Average</td><td>100</td><td>69</td></tr><tr><td>4</td><td>21045.00</td><td>53.85</td><td>74.00</td><td>-20.15</td><td>50.03</td><td>3.82</td><td>Peak</td><td>100</td><td>69</td></tr><tr><td>5</td><td>28060.00</td><td>44.49</td><td>68.20</td><td>-23.71</td><td>35.08</td><td>9.41</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>6</td><td>28060.00</td><td>58.57</td><td>88.20</td><td>-29.63</td><td>49.16</td><td>9.41</td><td>Peak</td><td>100</td><td>105</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	14030.00	45.51	68.20	-22.69	38.68	6.83	Average	100	36	2	14030.00	58.33	88.20	-29.87	51.50	6.83	Peak	100	36	3	21045.00	40.47	54.00	-13.53	36.65	3.82	Average	100	69	4	21045.00	53.85	74.00	-20.15	50.03	3.82	Peak	100	69	5	28060.00	44.49	68.20	-23.71	35.08	9.41	Average	100	105	6	28060.00	58.57	88.20	-29.63	49.16	9.41	Peak	100	105
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	14030.00	45.51	68.20	-22.69	38.68	6.83	Average	100	36																																																																																				
2	14030.00	58.33	88.20	-29.87	51.50	6.83	Peak	100	36																																																																																				
3	21045.00	40.47	54.00	-13.53	36.65	3.82	Average	100	69																																																																																				
4	21045.00	53.85	74.00	-20.15	50.03	3.82	Peak	100	69																																																																																				
5	28060.00	44.49	68.20	-23.71	35.08	9.41	Average	100	105																																																																																				
6	28060.00	58.57	88.20	-29.63	49.16	9.41	Peak	100	105																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

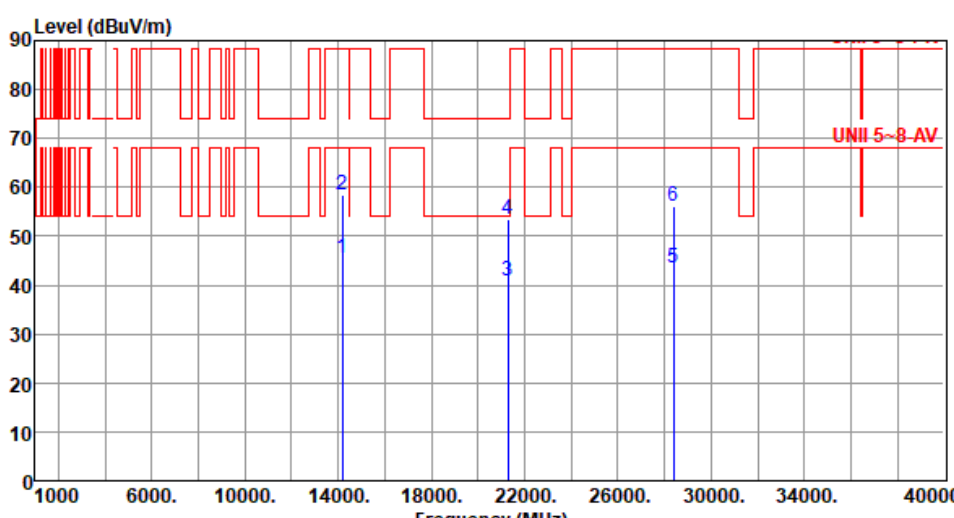

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14190.00</td><td>45.56</td><td>68.20</td><td>-22.64</td><td>38.42</td><td>7.14</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>2</td><td>14190.00</td><td>58.33</td><td>88.20</td><td>-29.87</td><td>51.19</td><td>7.14</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>3</td><td>21285.00</td><td>40.82</td><td>54.00</td><td>-13.18</td><td>36.63</td><td>4.19</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>4</td><td>21285.00</td><td>53.56</td><td>74.00</td><td>-20.44</td><td>49.37</td><td>4.19</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>5</td><td>28380.00</td><td>43.52</td><td>68.20</td><td>-24.68</td><td>33.93</td><td>9.59</td><td>Average</td><td>100</td><td>89</td></tr><tr><td>6</td><td>28380.00</td><td>56.18</td><td>88.20</td><td>-32.02</td><td>46.59</td><td>9.59</td><td>Peak</td><td>100</td><td>89</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14190.00	45.56	68.20	-22.64	38.42	7.14	Average	100	61	2	14190.00	58.33	88.20	-29.87	51.19	7.14	Peak	100	61	3	21285.00	40.82	54.00	-13.18	36.63	4.19	Average	100	28	4	21285.00	53.56	74.00	-20.44	49.37	4.19	Peak	100	28	5	28380.00	43.52	68.20	-24.68	33.93	9.59	Average	100	89	6	28380.00	56.18	88.20	-32.02	46.59	9.59	Peak	100	89
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14190.00	45.56	68.20	-22.64	38.42	7.14	Average	100	61																																																																
2	14190.00	58.33	88.20	-29.87	51.19	7.14	Peak	100	61																																																																
3	21285.00	40.82	54.00	-13.18	36.63	4.19	Average	100	28																																																																
4	21285.00	53.56	74.00	-20.44	49.37	4.19	Peak	100	28																																																																
5	28380.00	43.52	68.20	-24.68	33.93	9.59	Average	100	89																																																																
6	28380.00	56.18	88.20	-32.02	46.59	9.59	Peak	100	89																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14190.00</td><td>45.42</td><td>68.20</td><td>-22.78</td><td>38.28</td><td>7.14</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>14190.00</td><td>58.49</td><td>88.20</td><td>-29.71</td><td>51.35</td><td>7.14</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>21285.00</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>36.75</td><td>4.19</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>4</td><td>21285.00</td><td>53.84</td><td>74.00</td><td>-20.16</td><td>49.65</td><td>4.19</td><td>Peak</td><td>100</td><td>16</td></tr><tr><td>5</td><td>28380.00</td><td>43.57</td><td>68.20</td><td>-24.63</td><td>33.98</td><td>9.59</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>6</td><td>28380.00</td><td>56.22</td><td>88.20</td><td>-31.98</td><td>46.63</td><td>9.59</td><td>Peak</td><td>100</td><td>122</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14190.00	45.42	68.20	-22.78	38.28	7.14	Average	100	50	2	14190.00	58.49	88.20	-29.71	51.35	7.14	Peak	100	50	3	21285.00	40.94	54.00	-13.06	36.75	4.19	Average	100	16	4	21285.00	53.84	74.00	-20.16	49.65	4.19	Peak	100	16	5	28380.00	43.57	68.20	-24.63	33.98	9.59	Average	100	122	6	28380.00	56.22	88.20	-31.98	46.63	9.59	Peak	100	122
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14190.00	45.42	68.20	-22.78	38.28	7.14	Average	100	50																																																																
2	14190.00	58.49	88.20	-29.71	51.35	7.14	Peak	100	50																																																																
3	21285.00	40.94	54.00	-13.06	36.75	4.19	Average	100	16																																																																
4	21285.00	53.84	74.00	-20.16	49.65	4.19	Peak	100	16																																																																
5	28380.00	43.57	68.20	-24.63	33.98	9.59	Average	100	122																																																																
6	28380.00	56.22	88.20	-31.98	46.63	9.59	Peak	100	122																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>54.18</td><td>68.20</td><td>-14.02</td><td>49.22</td><td>4.96</td><td>Average</td><td>267</td><td>70</td></tr><tr><td>2</td><td>7125.00</td><td>65.15</td><td>88.20</td><td>-23.05</td><td>60.19</td><td>4.96</td><td>Peak</td><td>267</td><td>70</td></tr><tr><td>3</td><td>14230.00</td><td>44.72</td><td>68.20</td><td>-23.48</td><td>37.55</td><td>7.17</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>4</td><td>14230.00</td><td>58.34</td><td>88.20</td><td>-29.86</td><td>51.17</td><td>7.17</td><td>Peak</td><td>100</td><td>63</td></tr><tr><td>5</td><td>21345.00</td><td>40.89</td><td>54.00</td><td>-13.11</td><td>36.64</td><td>4.25</td><td>Average</td><td>100</td><td>95</td></tr><tr><td>6</td><td>21345.00</td><td>53.02</td><td>74.00</td><td>-20.98</td><td>48.77</td><td>4.25</td><td>Peak</td><td>100</td><td>95</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	54.18	68.20	-14.02	49.22	4.96	Average	267	70	2	7125.00	65.15	88.20	-23.05	60.19	4.96	Peak	267	70	3	14230.00	44.72	68.20	-23.48	37.55	7.17	Average	100	63	4	14230.00	58.34	88.20	-29.86	51.17	7.17	Peak	100	63	5	21345.00	40.89	54.00	-13.11	36.64	4.25	Average	100	95	6	21345.00	53.02	74.00	-20.98	48.77	4.25	Peak	100	95
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	54.18	68.20	-14.02	49.22	4.96	Average	267	70																																																																
2	7125.00	65.15	88.20	-23.05	60.19	4.96	Peak	267	70																																																																
3	14230.00	44.72	68.20	-23.48	37.55	7.17	Average	100	63																																																																
4	14230.00	58.34	88.20	-29.86	51.17	7.17	Peak	100	63																																																																
5	21345.00	40.89	54.00	-13.11	36.64	4.25	Average	100	95																																																																
6	21345.00	53.02	74.00	-20.98	48.77	4.25	Peak	100	95																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

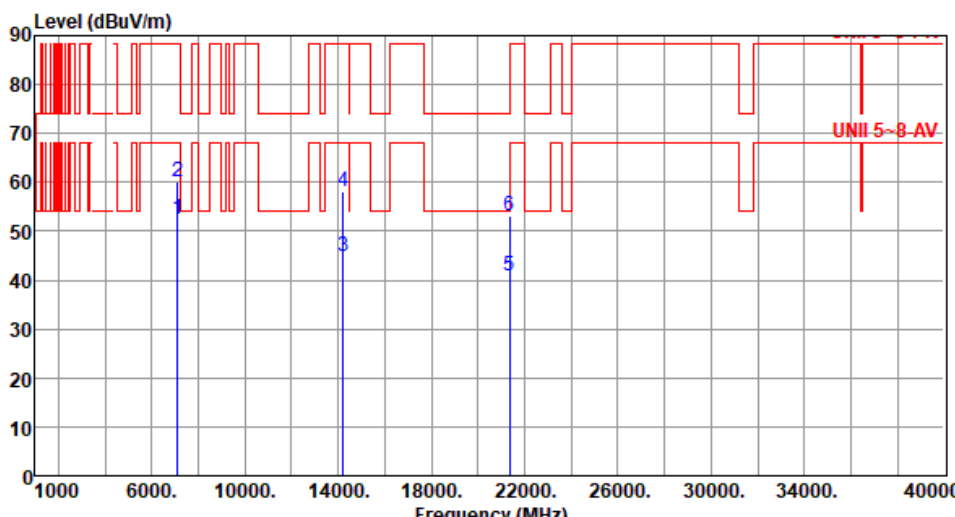


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	52.47	68.20	-15.73	47.51	4.96	Average	352	13
2	7125.00	60.16	88.20	-28.04	55.20	4.96	Peak	352	13
3	14230.00	44.87	68.20	-23.33	37.70	7.17	Average	100	73
4	14230.00	58.18	88.20	-30.02	51.01	7.17	Peak	100	73
5	21345.00	40.76	54.00	-13.24	36.51	4.25	Average	100	14
6	21345.00	53.22	74.00	-20.78	48.97	4.25	Peak	100	14

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Unwanted Emissions (Above 1GHz) for be EHT40-OFDMA

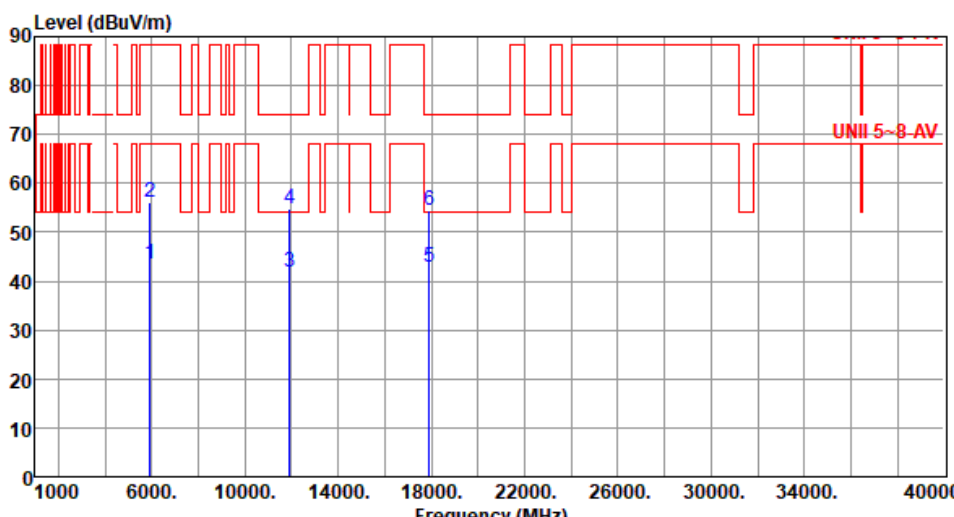Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>43.58</td><td>68.20</td><td>-24.62</td><td>42.35</td><td>1.23</td><td>Average</td><td>144</td><td>309</td></tr><tr><td>2</td><td>5925.00</td><td>56.13</td><td>88.20</td><td>-32.07</td><td>54.90</td><td>1.23</td><td>Peak</td><td>144</td><td>309</td></tr><tr><td>3</td><td>11930.00</td><td>41.72</td><td>54.00</td><td>-12.28</td><td>35.30</td><td>6.42</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>4</td><td>11930.00</td><td>54.88</td><td>74.00</td><td>-19.12</td><td>48.46</td><td>6.42</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>5</td><td>17895.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>31.69</td><td>10.99</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>6</td><td>17895.00</td><td>54.61</td><td>74.00</td><td>-19.39</td><td>43.62</td><td>10.99</td><td>Peak</td><td>100</td><td>67</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.58	68.20	-24.62	42.35	1.23	Average	144	309	2	5925.00	56.13	88.20	-32.07	54.90	1.23	Peak	144	309	3	11930.00	41.72	54.00	-12.28	35.30	6.42	Average	100	134	4	11930.00	54.88	74.00	-19.12	48.46	6.42	Peak	100	134	5	17895.00	42.68	54.00	-11.32	31.69	10.99	Average	100	67	6	17895.00	54.61	74.00	-19.39	43.62	10.99	Peak	100	67
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.58	68.20	-24.62	42.35	1.23	Average	144	309																																																																
2	5925.00	56.13	88.20	-32.07	54.90	1.23	Peak	144	309																																																																
3	11930.00	41.72	54.00	-12.28	35.30	6.42	Average	100	134																																																																
4	11930.00	54.88	74.00	-19.12	48.46	6.42	Peak	100	134																																																																
5	17895.00	42.68	54.00	-11.32	31.69	10.99	Average	100	67																																																																
6	17895.00	54.61	74.00	-19.39	43.62	10.99	Peak	100	67																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

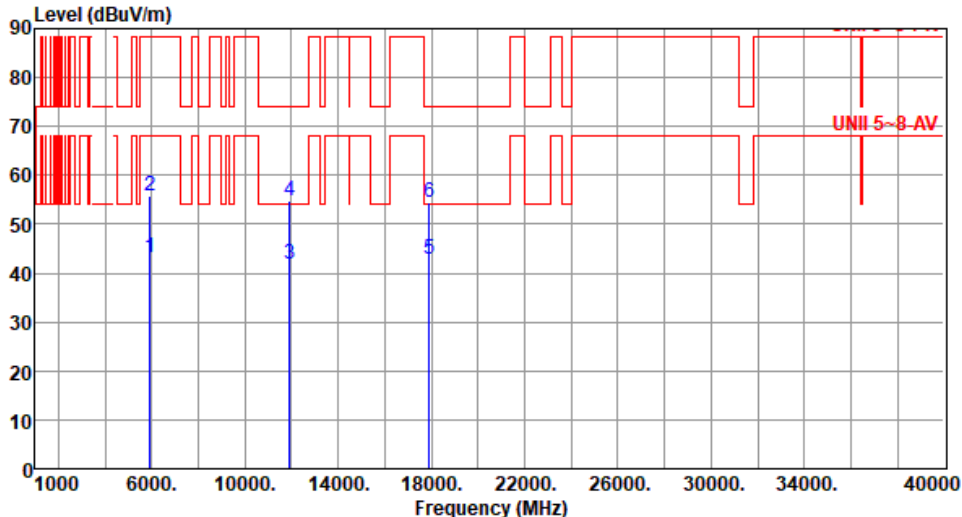


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.31</td><td>68.20</td><td>-24.89</td><td>42.08</td><td>1.23</td><td>Average</td><td>124</td><td>12</td></tr><tr><td>2</td><td>5925.00</td><td>55.64</td><td>88.20</td><td>-32.56</td><td>54.41</td><td>1.23</td><td>Peak</td><td>124</td><td>12</td></tr><tr><td>3</td><td>11930.00</td><td>41.98</td><td>54.00</td><td>-12.02</td><td>35.56</td><td>6.42</td><td>Average</td><td>100</td><td>149</td></tr><tr><td>4</td><td>11930.00</td><td>54.78</td><td>74.00</td><td>-19.22</td><td>48.36</td><td>6.42</td><td>Peak</td><td>100</td><td>149</td></tr><tr><td>5</td><td>17895.00</td><td>42.89</td><td>54.00</td><td>-11.11</td><td>31.90</td><td>10.99</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>6</td><td>17895.00</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>43.36</td><td>10.99</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.31	68.20	-24.89	42.08	1.23	Average	124	12	2	5925.00	55.64	88.20	-32.56	54.41	1.23	Peak	124	12	3	11930.00	41.98	54.00	-12.02	35.56	6.42	Average	100	149	4	11930.00	54.78	74.00	-19.22	48.36	6.42	Peak	100	149	5	17895.00	42.89	54.00	-11.11	31.90	10.99	Average	100	204	6	17895.00	54.35	74.00	-19.65	43.36	10.99	Peak	100	204
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.31	68.20	-24.89	42.08	1.23	Average	124	12																																																																
2	5925.00	55.64	88.20	-32.56	54.41	1.23	Peak	124	12																																																																
3	11930.00	41.98	54.00	-12.02	35.56	6.42	Average	100	149																																																																
4	11930.00	54.78	74.00	-19.22	48.36	6.42	Peak	100	149																																																																
5	17895.00	42.89	54.00	-11.11	31.90	10.99	Average	100	204																																																																
6	17895.00	54.35	74.00	-19.65	43.36	10.99	Peak	100	204																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

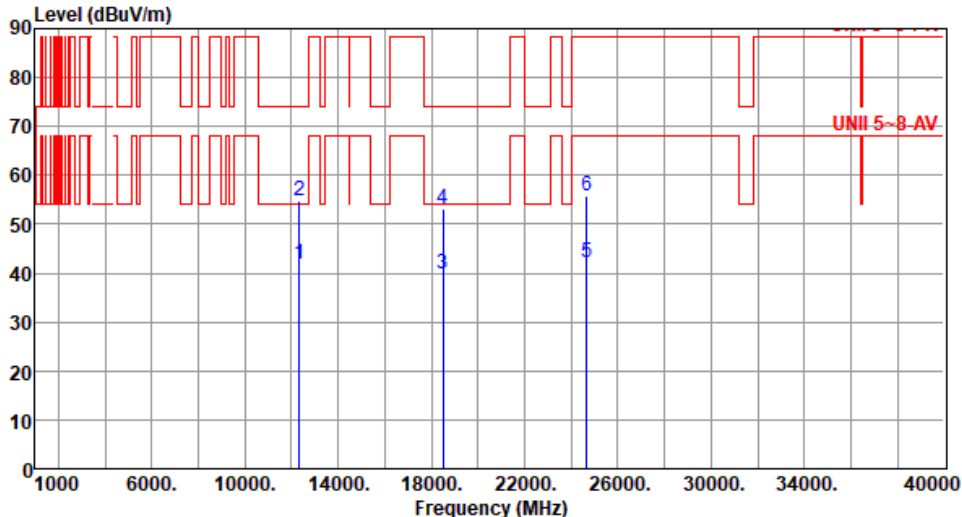


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																																													
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12330.00</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>35.46</td><td>6.35</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>2</td><td>12330.00</td><td>54.73</td><td>74.00</td><td>-19.27</td><td>48.38</td><td>6.35</td><td>Peak</td><td>100</td><td>157</td></tr><tr><td>3</td><td>18495.00</td><td>39.75</td><td>54.00</td><td>-14.25</td><td>38.46</td><td>1.29</td><td>Average</td><td>100</td><td>210</td></tr><tr><td>4</td><td>18495.00</td><td>53.14</td><td>74.00</td><td>-20.86</td><td>51.85</td><td>1.29</td><td>Peak</td><td>100</td><td>210</td></tr><tr><td>5</td><td>24660.00</td><td>42.19</td><td>68.20</td><td>-26.01</td><td>33.78</td><td>8.41</td><td>Average</td><td>100</td><td>121</td></tr><tr><td>6</td><td>24660.00</td><td>55.86</td><td>88.20</td><td>-32.34</td><td>47.45</td><td>8.41</td><td>Peak</td><td>100</td><td>121</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	12330.00	41.81	54.00	-12.19	35.46	6.35	Average	100	157	2	12330.00	54.73	74.00	-19.27	48.38	6.35	Peak	100	157	3	18495.00	39.75	54.00	-14.25	38.46	1.29	Average	100	210	4	18495.00	53.14	74.00	-20.86	51.85	1.29	Peak	100	210	5	24660.00	42.19	68.20	-26.01	33.78	8.41	Average	100	121	6	24660.00	55.86	88.20	-32.34	47.45	8.41	Peak	100	121
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																																				
		dBUV/m			dBUV			cm	deg																																																																																				
1	12330.00	41.81	54.00	-12.19	35.46	6.35	Average	100	157																																																																																				
2	12330.00	54.73	74.00	-19.27	48.38	6.35	Peak	100	157																																																																																				
3	18495.00	39.75	54.00	-14.25	38.46	1.29	Average	100	210																																																																																				
4	18495.00	53.14	74.00	-20.86	51.85	1.29	Peak	100	210																																																																																				
5	24660.00	42.19	68.20	-26.01	33.78	8.41	Average	100	121																																																																																				
6	24660.00	55.86	88.20	-32.34	47.45	8.41	Peak	100	121																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

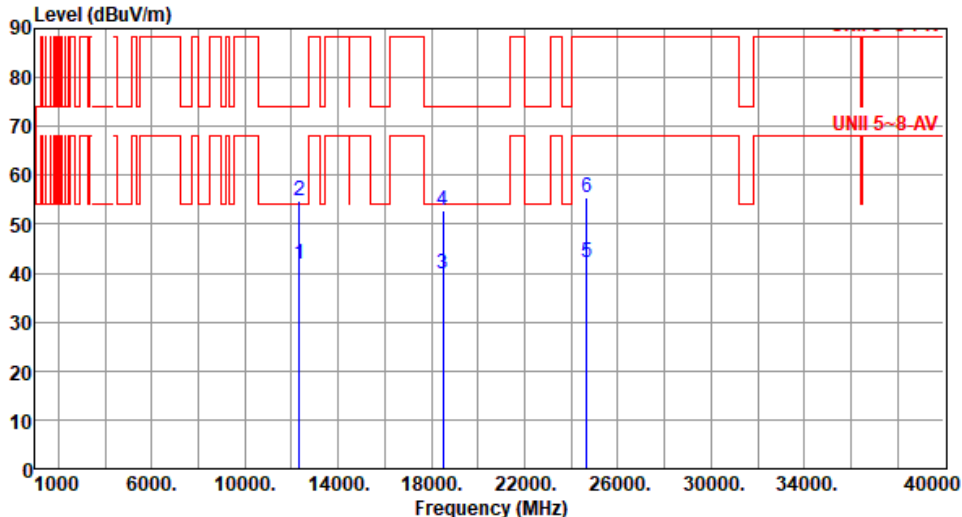


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12330.00	41.96	54.00	-12.04	35.61	6.35	Average	100	45
2	12330.00	54.89	74.00	-19.11	48.54	6.35	Peak	100	45
3	18495.00	39.94	54.00	-14.06	38.65	1.29	Average	100	57
4	18495.00	52.68	74.00	-21.32	51.39	1.29	Peak	100	57
5	24660.00	42.33	68.20	-25.87	33.92	8.41	Average	100	89
6	24660.00	55.37	88.20	-32.83	46.96	8.41	Peak	100	89

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

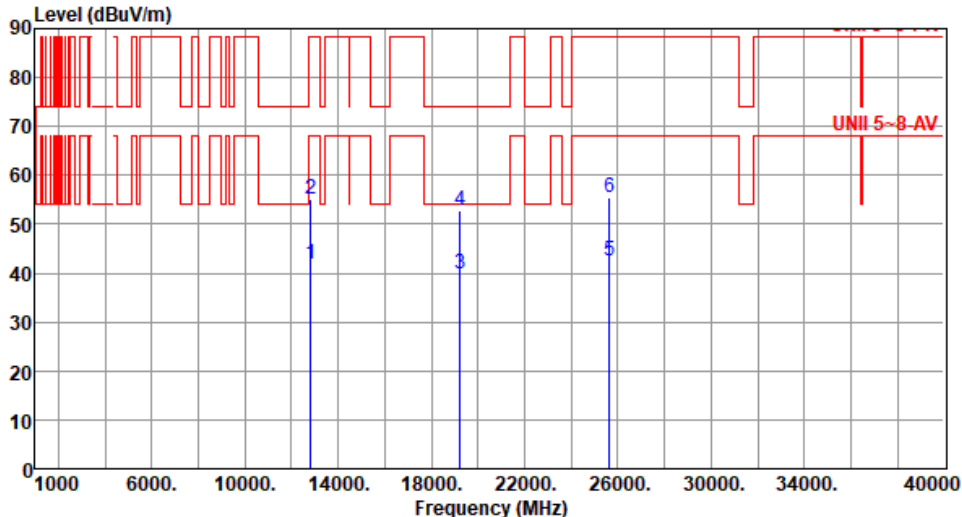


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12810.00</td><td>41.81</td><td>68.20</td><td>-26.39</td><td>35.49</td><td>6.32</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>2</td><td>12810.00</td><td>55.29</td><td>88.20</td><td>-32.91</td><td>48.97</td><td>6.32</td><td>Peak</td><td>100</td><td>58</td></tr><tr><td>3</td><td>19215.00</td><td>39.86</td><td>54.00</td><td>-14.14</td><td>37.58</td><td>2.28</td><td>Average</td><td>100</td><td>87</td></tr><tr><td>4</td><td>19215.00</td><td>52.84</td><td>74.00</td><td>-21.16</td><td>50.56</td><td>2.28</td><td>Peak</td><td>100</td><td>87</td></tr><tr><td>5</td><td>25620.00</td><td>42.39</td><td>68.20</td><td>-25.81</td><td>34.13</td><td>8.26</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>6</td><td>25620.00</td><td>55.35</td><td>88.20</td><td>-32.85</td><td>47.09</td><td>8.26</td><td>Peak</td><td>100</td><td>128</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12810.00	41.81	68.20	-26.39	35.49	6.32	Average	100	58	2	12810.00	55.29	88.20	-32.91	48.97	6.32	Peak	100	58	3	19215.00	39.86	54.00	-14.14	37.58	2.28	Average	100	87	4	19215.00	52.84	74.00	-21.16	50.56	2.28	Peak	100	87	5	25620.00	42.39	68.20	-25.81	34.13	8.26	Average	100	128	6	25620.00	55.35	88.20	-32.85	47.09	8.26	Peak	100	128
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12810.00	41.81	68.20	-26.39	35.49	6.32	Average	100	58																																																																
2	12810.00	55.29	88.20	-32.91	48.97	6.32	Peak	100	58																																																																
3	19215.00	39.86	54.00	-14.14	37.58	2.28	Average	100	87																																																																
4	19215.00	52.84	74.00	-21.16	50.56	2.28	Peak	100	87																																																																
5	25620.00	42.39	68.20	-25.81	34.13	8.26	Average	100	128																																																																
6	25620.00	55.35	88.20	-32.85	47.09	8.26	Peak	100	128																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

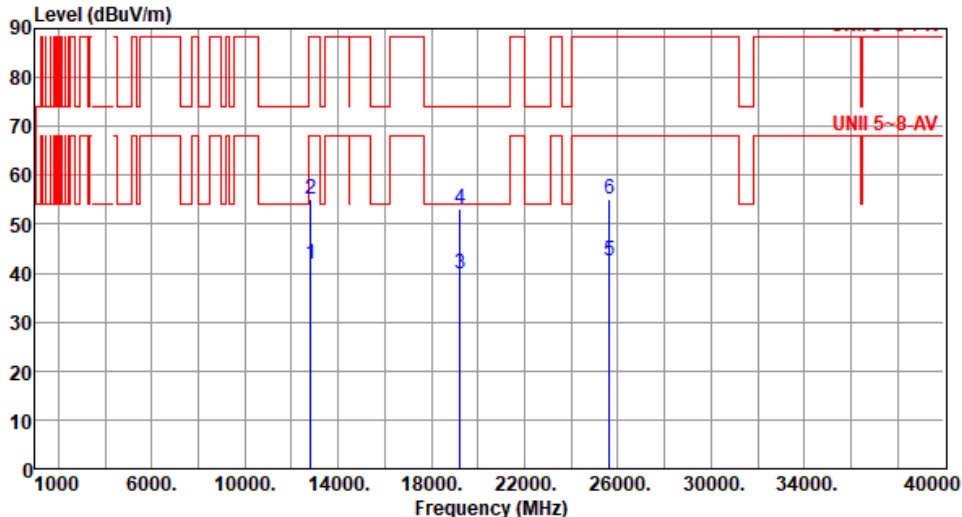


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12810.00</td><td>41.74</td><td>68.20</td><td>-26.46</td><td>35.42</td><td>6.32</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>2</td><td>12810.00</td><td>55.28</td><td>88.20</td><td>-32.92</td><td>48.96</td><td>6.32</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>3</td><td>19215.00</td><td>39.73</td><td>54.00</td><td>-14.27</td><td>37.45</td><td>2.28</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>4</td><td>19215.00</td><td>53.04</td><td>74.00</td><td>-20.96</td><td>50.76</td><td>2.28</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>5</td><td>25620.00</td><td>42.37</td><td>68.20</td><td>-25.83</td><td>34.11</td><td>8.26</td><td>Average</td><td>100</td><td>81</td></tr><tr><td>6</td><td>25620.00</td><td>55.18</td><td>88.20</td><td>-33.02</td><td>46.92</td><td>8.26</td><td>Peak</td><td>100</td><td>81</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12810.00	41.74	68.20	-26.46	35.42	6.32	Average	100	178	2	12810.00	55.28	88.20	-32.92	48.96	6.32	Peak	100	178	3	19215.00	39.73	54.00	-14.27	37.45	2.28	Average	100	115	4	19215.00	53.04	74.00	-20.96	50.76	2.28	Peak	100	115	5	25620.00	42.37	68.20	-25.83	34.11	8.26	Average	100	81	6	25620.00	55.18	88.20	-33.02	46.92	8.26	Peak	100	81
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12810.00	41.74	68.20	-26.46	35.42	6.32	Average	100	178																																																																
2	12810.00	55.28	88.20	-32.92	48.96	6.32	Peak	100	178																																																																
3	19215.00	39.73	54.00	-14.27	37.45	2.28	Average	100	115																																																																
4	19215.00	53.04	74.00	-20.96	50.76	2.28	Peak	100	115																																																																
5	25620.00	42.37	68.20	-25.83	34.11	8.26	Average	100	81																																																																
6	25620.00	55.18	88.20	-33.02	46.92	8.26	Peak	100	81																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

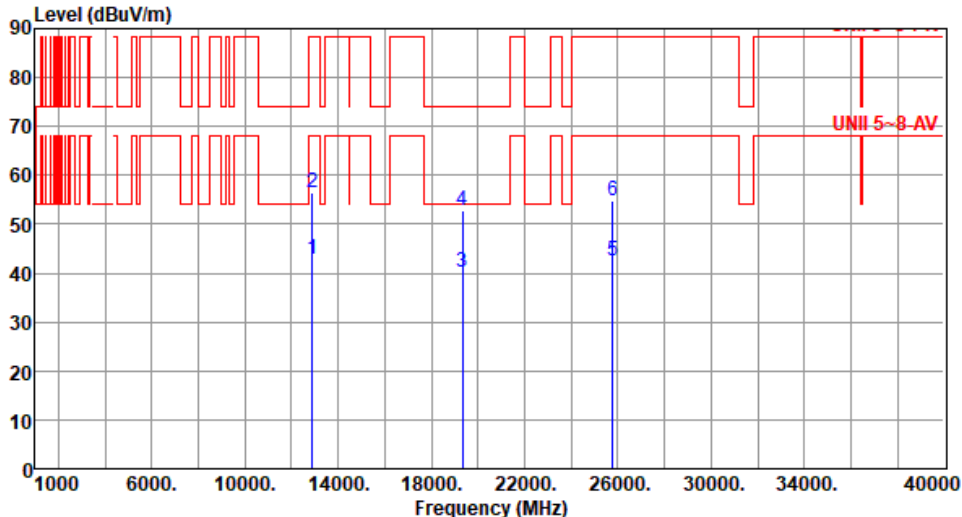

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12890.00</td><td>42.72</td><td>68.20</td><td>-25.48</td><td>36.30</td><td>6.42</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>2</td><td>12890.00</td><td>56.31</td><td>88.20</td><td>-31.89</td><td>49.89</td><td>6.42</td><td>Peak</td><td>100</td><td>46</td></tr><tr><td>3</td><td>19335.00</td><td>40.11</td><td>54.00</td><td>-13.89</td><td>37.85</td><td>2.26</td><td>Average</td><td>100</td><td>92</td></tr><tr><td>4</td><td>19335.00</td><td>52.94</td><td>74.00</td><td>-21.06</td><td>50.68</td><td>2.26</td><td>Peak</td><td>100</td><td>92</td></tr><tr><td>5</td><td>25780.00</td><td>42.59</td><td>68.20</td><td>-25.61</td><td>34.39</td><td>8.20</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>6</td><td>25780.00</td><td>54.83</td><td>88.20</td><td>-33.37</td><td>46.63</td><td>8.20</td><td>Peak</td><td>100</td><td>145</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12890.00	42.72	68.20	-25.48	36.30	6.42	Average	100	46	2	12890.00	56.31	88.20	-31.89	49.89	6.42	Peak	100	46	3	19335.00	40.11	54.00	-13.89	37.85	2.26	Average	100	92	4	19335.00	52.94	74.00	-21.06	50.68	2.26	Peak	100	92	5	25780.00	42.59	68.20	-25.61	34.39	8.20	Average	100	145	6	25780.00	54.83	88.20	-33.37	46.63	8.20	Peak	100	145
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12890.00	42.72	68.20	-25.48	36.30	6.42	Average	100	46																																																																
2	12890.00	56.31	88.20	-31.89	49.89	6.42	Peak	100	46																																																																
3	19335.00	40.11	54.00	-13.89	37.85	2.26	Average	100	92																																																																
4	19335.00	52.94	74.00	-21.06	50.68	2.26	Peak	100	92																																																																
5	25780.00	42.59	68.20	-25.61	34.39	8.20	Average	100	145																																																																
6	25780.00	54.83	88.20	-33.37	46.63	8.20	Peak	100	145																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

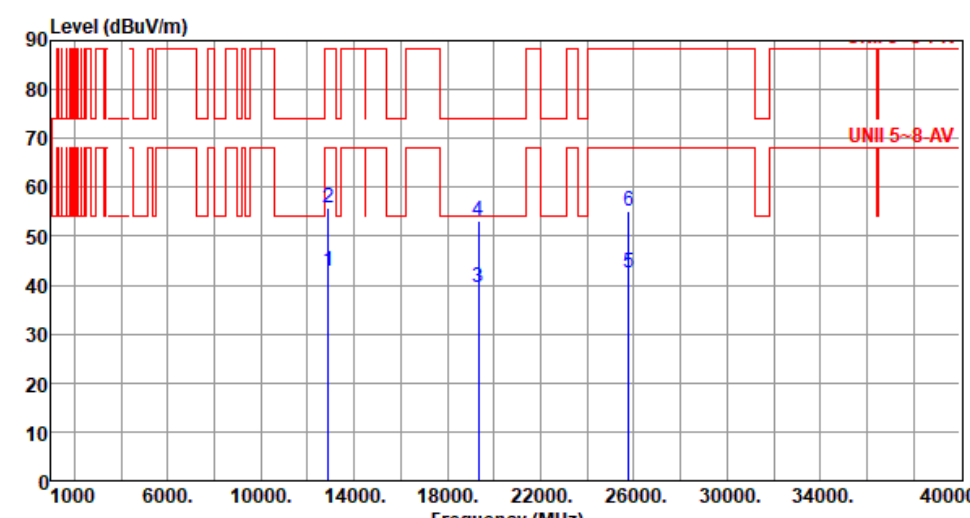


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12890.00</td><td>42.68</td><td>68.20</td><td>-25.52</td><td>36.26</td><td>6.42</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>2</td><td>12890.00</td><td>55.92</td><td>88.20</td><td>-32.28</td><td>49.50</td><td>6.42</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>3</td><td>19335.00</td><td>39.64</td><td>54.00</td><td>-14.36</td><td>37.38</td><td>2.26</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>4</td><td>19335.00</td><td>53.25</td><td>74.00</td><td>-20.75</td><td>50.99</td><td>2.26</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>5</td><td>25780.00</td><td>42.36</td><td>68.20</td><td>-25.84</td><td>34.16</td><td>8.20</td><td>Average</td><td>100</td><td>97</td></tr><tr><td>6</td><td>25780.00</td><td>55.16</td><td>88.20</td><td>-33.04</td><td>46.96</td><td>8.20</td><td>Peak</td><td>100</td><td>97</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12890.00	42.68	68.20	-25.52	36.26	6.42	Average	100	34	2	12890.00	55.92	88.20	-32.28	49.50	6.42	Peak	100	34	3	19335.00	39.64	54.00	-14.36	37.38	2.26	Average	100	66	4	19335.00	53.25	74.00	-20.75	50.99	2.26	Peak	100	66	5	25780.00	42.36	68.20	-25.84	34.16	8.20	Average	100	97	6	25780.00	55.16	88.20	-33.04	46.96	8.20	Peak	100	97
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12890.00	42.68	68.20	-25.52	36.26	6.42	Average	100	34																																																																
2	12890.00	55.92	88.20	-32.28	49.50	6.42	Peak	100	34																																																																
3	19335.00	39.64	54.00	-14.36	37.38	2.26	Average	100	66																																																																
4	19335.00	53.25	74.00	-20.75	50.99	2.26	Peak	100	66																																																																
5	25780.00	42.36	68.20	-25.84	34.16	8.20	Average	100	97																																																																
6	25780.00	55.16	88.20	-33.04	46.96	8.20	Peak	100	97																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			

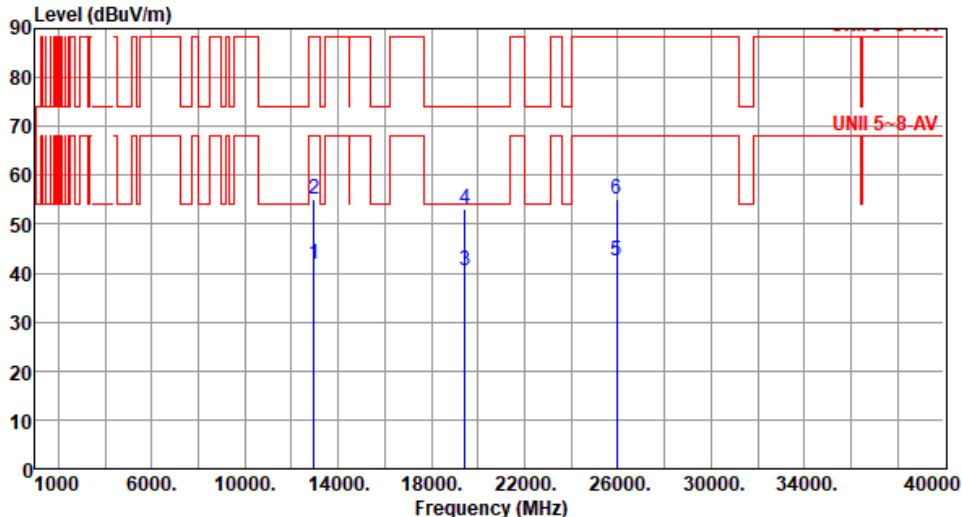


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12970.00</td><td>41.92</td><td>68.20</td><td>-26.28</td><td>35.47</td><td>6.45</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>2</td><td>12970.00</td><td>55.18</td><td>88.20</td><td>-33.02</td><td>48.73</td><td>6.45</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>3</td><td>19455.00</td><td>40.37</td><td>54.00</td><td>-13.63</td><td>38.17</td><td>2.20</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>4</td><td>19455.00</td><td>53.16</td><td>74.00</td><td>-20.84</td><td>50.96</td><td>2.20</td><td>Peak</td><td>100</td><td>58</td></tr><tr><td>5</td><td>25940.00</td><td>42.47</td><td>68.20</td><td>-25.73</td><td>34.43</td><td>8.04</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>6</td><td>25940.00</td><td>54.98</td><td>88.20</td><td>-33.22</td><td>46.94</td><td>8.04</td><td>Peak</td><td>100</td><td>107</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12970.00	41.92	68.20	-26.28	35.47	6.45	Average	100	38	2	12970.00	55.18	88.20	-33.02	48.73	6.45	Peak	100	38	3	19455.00	40.37	54.00	-13.63	38.17	2.20	Average	100	58	4	19455.00	53.16	74.00	-20.84	50.96	2.20	Peak	100	58	5	25940.00	42.47	68.20	-25.73	34.43	8.04	Average	100	107	6	25940.00	54.98	88.20	-33.22	46.94	8.04	Peak	100	107
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12970.00	41.92	68.20	-26.28	35.47	6.45	Average	100	38																																																																
2	12970.00	55.18	88.20	-33.02	48.73	6.45	Peak	100	38																																																																
3	19455.00	40.37	54.00	-13.63	38.17	2.20	Average	100	58																																																																
4	19455.00	53.16	74.00	-20.84	50.96	2.20	Peak	100	58																																																																
5	25940.00	42.47	68.20	-25.73	34.43	8.04	Average	100	107																																																																
6	25940.00	54.98	88.20	-33.22	46.94	8.04	Peak	100	107																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

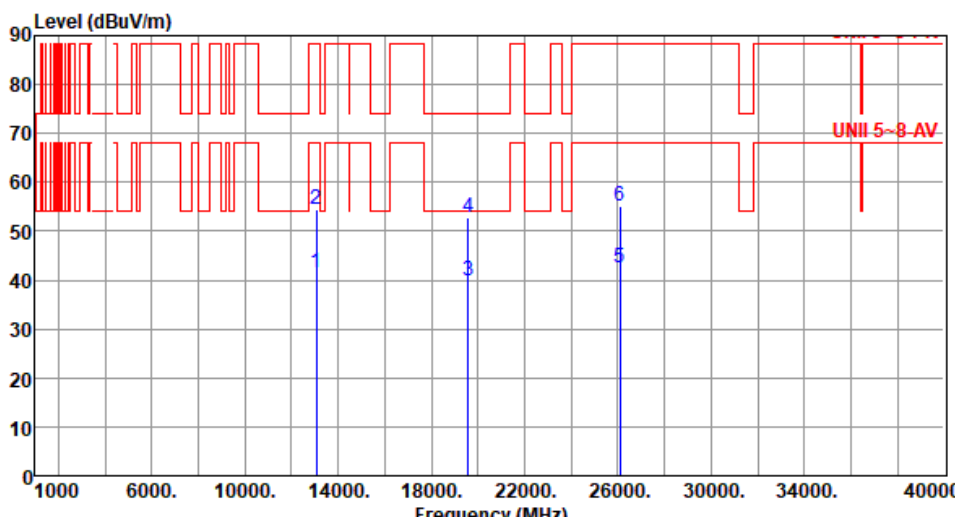

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6525																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13050.00</td><td>41.57</td><td>68.20</td><td>-26.63</td><td>35.37</td><td>6.20</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>2</td><td>13050.00</td><td>54.62</td><td>88.20</td><td>-33.58</td><td>48.42</td><td>6.20</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>3</td><td>19575.00</td><td>39.84</td><td>54.00</td><td>-14.16</td><td>37.54</td><td>2.30</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>4</td><td>19575.00</td><td>52.78</td><td>74.00</td><td>-21.22</td><td>50.48</td><td>2.30</td><td>Peak</td><td>100</td><td>76</td></tr><tr><td>5</td><td>26100.00</td><td>42.56</td><td>68.20</td><td>-25.64</td><td>34.38</td><td>8.18</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>6</td><td>26100.00</td><td>55.29</td><td>88.20</td><td>-32.91</td><td>47.11</td><td>8.18</td><td>Peak</td><td>100</td><td>123</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13050.00	41.57	68.20	-26.63	35.37	6.20	Average	100	25	2	13050.00	54.62	88.20	-33.58	48.42	6.20	Peak	100	25	3	19575.00	39.84	54.00	-14.16	37.54	2.30	Average	100	76	4	19575.00	52.78	74.00	-21.22	50.48	2.30	Peak	100	76	5	26100.00	42.56	68.20	-25.64	34.38	8.18	Average	100	123	6	26100.00	55.29	88.20	-32.91	47.11	8.18	Peak	100	123
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13050.00	41.57	68.20	-26.63	35.37	6.20	Average	100	25																																																																
2	13050.00	54.62	88.20	-33.58	48.42	6.20	Peak	100	25																																																																
3	19575.00	39.84	54.00	-14.16	37.54	2.30	Average	100	76																																																																
4	19575.00	52.78	74.00	-21.22	50.48	2.30	Peak	100	76																																																																
5	26100.00	42.56	68.20	-25.64	34.38	8.18	Average	100	123																																																																
6	26100.00	55.29	88.20	-32.91	47.11	8.18	Peak	100	123																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

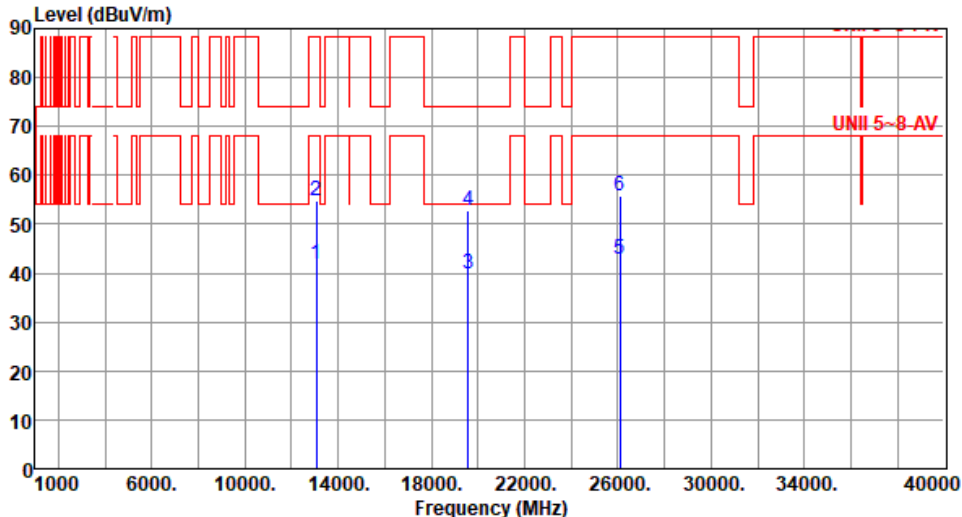


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6525																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13050.00</td><td>41.85</td><td>68.20</td><td>-26.35</td><td>35.65</td><td>6.20</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>2</td><td>13050.00</td><td>54.79</td><td>88.20</td><td>-33.41</td><td>48.59</td><td>6.20</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>3</td><td>19575.00</td><td>39.88</td><td>54.00</td><td>-14.12</td><td>37.58</td><td>2.30</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>4</td><td>19575.00</td><td>52.89</td><td>74.00</td><td>-21.11</td><td>50.59</td><td>2.30</td><td>Peak</td><td>100</td><td>68</td></tr><tr><td>5</td><td>26100.00</td><td>42.81</td><td>68.20</td><td>-25.39</td><td>34.63</td><td>8.18</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>6</td><td>26100.00</td><td>55.86</td><td>88.20</td><td>-32.34</td><td>47.68</td><td>8.18</td><td>Peak</td><td>100</td><td>137</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13050.00	41.85	68.20	-26.35	35.65	6.20	Average	100	38	2	13050.00	54.79	88.20	-33.41	48.59	6.20	Peak	100	38	3	19575.00	39.88	54.00	-14.12	37.58	2.30	Average	100	68	4	19575.00	52.89	74.00	-21.11	50.59	2.30	Peak	100	68	5	26100.00	42.81	68.20	-25.39	34.63	8.18	Average	100	137	6	26100.00	55.86	88.20	-32.34	47.68	8.18	Peak	100	137
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13050.00	41.85	68.20	-26.35	35.65	6.20	Average	100	38																																																																
2	13050.00	54.79	88.20	-33.41	48.59	6.20	Peak	100	38																																																																
3	19575.00	39.88	54.00	-14.12	37.58	2.30	Average	100	68																																																																
4	19575.00	52.89	74.00	-21.11	50.59	2.30	Peak	100	68																																																																
5	26100.00	42.81	68.20	-25.39	34.63	8.18	Average	100	137																																																																
6	26100.00	55.86	88.20	-32.34	47.68	8.18	Peak	100	137																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6565																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13130.00</td><td>41.36</td><td>68.20</td><td>-26.84</td><td>35.43</td><td>5.93</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>2</td><td>13130.00</td><td>55.34</td><td>88.20</td><td>-32.86</td><td>49.41</td><td>5.93</td><td>Peak</td><td>100</td><td>24</td></tr><tr><td>3</td><td>19695.00</td><td>39.68</td><td>54.00</td><td>-14.32</td><td>37.18</td><td>2.50</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>4</td><td>19695.00</td><td>52.79</td><td>74.00</td><td>-21.21</td><td>50.29</td><td>2.50</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>5</td><td>26260.00</td><td>42.23</td><td>68.20</td><td>-25.97</td><td>33.75</td><td>8.48</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>6</td><td>26260.00</td><td>55.39</td><td>88.20</td><td>-32.81</td><td>46.91</td><td>8.48</td><td>Peak</td><td>100</td><td>155</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13130.00	41.36	68.20	-26.84	35.43	5.93	Average	100	24	2	13130.00	55.34	88.20	-32.86	49.41	5.93	Peak	100	24	3	19695.00	39.68	54.00	-14.32	37.18	2.50	Average	100	65	4	19695.00	52.79	74.00	-21.21	50.29	2.50	Peak	100	65	5	26260.00	42.23	68.20	-25.97	33.75	8.48	Average	100	155	6	26260.00	55.39	88.20	-32.81	46.91	8.48	Peak	100	155
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13130.00	41.36	68.20	-26.84	35.43	5.93	Average	100	24																																																																
2	13130.00	55.34	88.20	-32.86	49.41	5.93	Peak	100	24																																																																
3	19695.00	39.68	54.00	-14.32	37.18	2.50	Average	100	65																																																																
4	19695.00	52.79	74.00	-21.21	50.29	2.50	Peak	100	65																																																																
5	26260.00	42.23	68.20	-25.97	33.75	8.48	Average	100	155																																																																
6	26260.00	55.39	88.20	-32.81	46.91	8.48	Peak	100	155																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

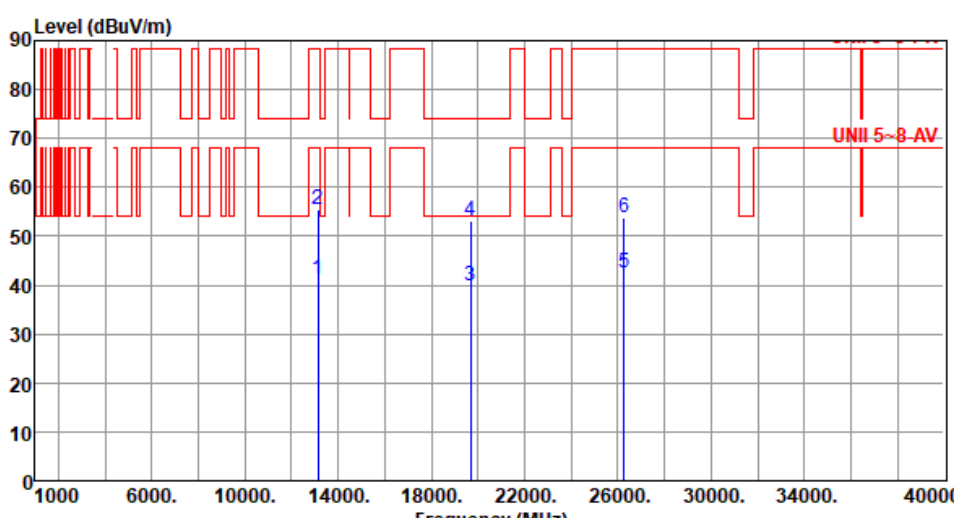


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6565																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13130.00</td><td>41.32</td><td>68.20</td><td>-26.88</td><td>35.39</td><td>5.93</td><td>Average</td><td>100</td><td>37</td></tr><tr><td>2</td><td>13130.00</td><td>55.59</td><td>88.20</td><td>-32.61</td><td>49.66</td><td>5.93</td><td>Peak</td><td>100</td><td>37</td></tr><tr><td>3</td><td>19695.00</td><td>39.93</td><td>54.00</td><td>-14.07</td><td>37.43</td><td>2.50</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>4</td><td>19695.00</td><td>53.06</td><td>74.00</td><td>-20.94</td><td>50.56</td><td>2.50</td><td>Peak</td><td>100</td><td>68</td></tr><tr><td>5</td><td>26260.00</td><td>42.41</td><td>68.20</td><td>-25.79</td><td>33.93</td><td>8.48</td><td>Average</td><td>100</td><td>144</td></tr><tr><td>6</td><td>26260.00</td><td>53.79</td><td>88.20</td><td>-34.41</td><td>45.31</td><td>8.48</td><td>Peak</td><td>100</td><td>144</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13130.00	41.32	68.20	-26.88	35.39	5.93	Average	100	37	2	13130.00	55.59	88.20	-32.61	49.66	5.93	Peak	100	37	3	19695.00	39.93	54.00	-14.07	37.43	2.50	Average	100	68	4	19695.00	53.06	74.00	-20.94	50.56	2.50	Peak	100	68	5	26260.00	42.41	68.20	-25.79	33.93	8.48	Average	100	144	6	26260.00	53.79	88.20	-34.41	45.31	8.48	Peak	100	144
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13130.00	41.32	68.20	-26.88	35.39	5.93	Average	100	37																																																																
2	13130.00	55.59	88.20	-32.61	49.66	5.93	Peak	100	37																																																																
3	19695.00	39.93	54.00	-14.07	37.43	2.50	Average	100	68																																																																
4	19695.00	53.06	74.00	-20.94	50.56	2.50	Peak	100	68																																																																
5	26260.00	42.41	68.20	-25.79	33.93	8.48	Average	100	144																																																																
6	26260.00	53.79	88.20	-34.41	45.31	8.48	Peak	100	144																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

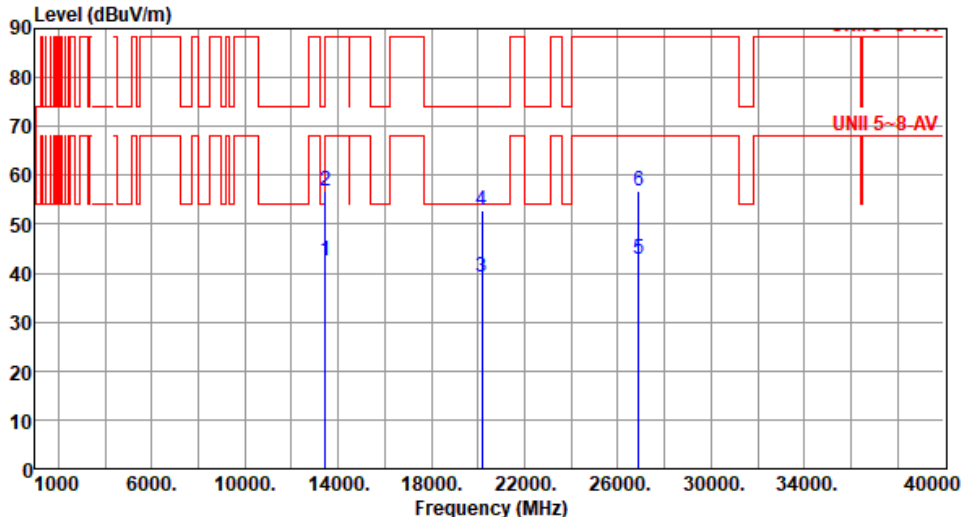


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13450.00</td><td>42.58</td><td>68.20</td><td>-25.62</td><td>36.42</td><td>6.16</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>2</td><td>13450.00</td><td>56.67</td><td>88.20</td><td>-31.53</td><td>50.51</td><td>6.16</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>3</td><td>20175.00</td><td>39.35</td><td>54.00</td><td>-14.65</td><td>36.48</td><td>2.87</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>4</td><td>20175.00</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>49.86</td><td>2.87</td><td>Peak</td><td>100</td><td>68</td></tr><tr><td>5</td><td>26900.00</td><td>42.83</td><td>68.20</td><td>-25.37</td><td>33.93</td><td>8.90</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>6</td><td>26900.00</td><td>56.76</td><td>88.20</td><td>-31.44</td><td>47.86</td><td>8.90</td><td>Peak</td><td>100</td><td>128</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13450.00	42.58	68.20	-25.62	36.42	6.16	Average	100	21	2	13450.00	56.67	88.20	-31.53	50.51	6.16	Peak	100	21	3	20175.00	39.35	54.00	-14.65	36.48	2.87	Average	100	68	4	20175.00	52.73	74.00	-21.27	49.86	2.87	Peak	100	68	5	26900.00	42.83	68.20	-25.37	33.93	8.90	Average	100	128	6	26900.00	56.76	88.20	-31.44	47.86	8.90	Peak	100	128
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13450.00	42.58	68.20	-25.62	36.42	6.16	Average	100	21																																																																
2	13450.00	56.67	88.20	-31.53	50.51	6.16	Peak	100	21																																																																
3	20175.00	39.35	54.00	-14.65	36.48	2.87	Average	100	68																																																																
4	20175.00	52.73	74.00	-21.27	49.86	2.87	Peak	100	68																																																																
5	26900.00	42.83	68.20	-25.37	33.93	8.90	Average	100	128																																																																
6	26900.00	56.76	88.20	-31.44	47.86	8.90	Peak	100	128																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

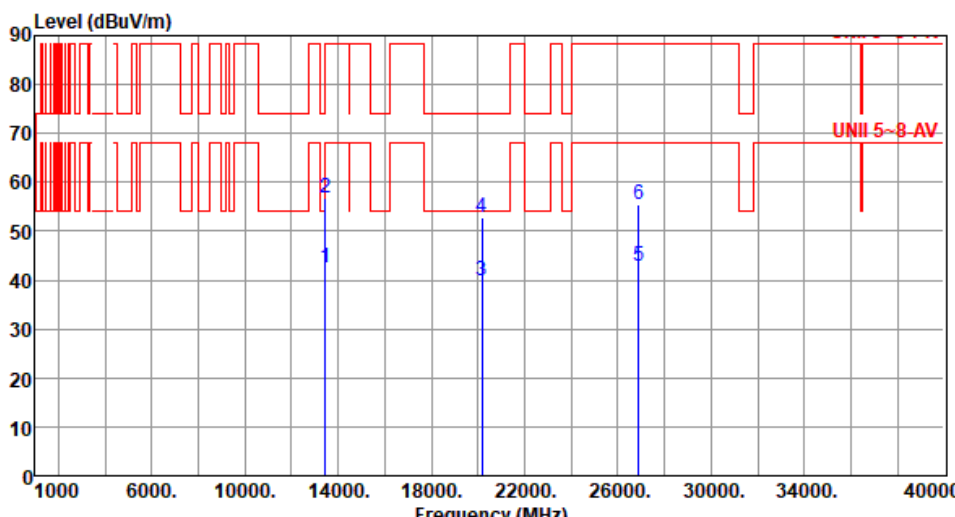


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13450.00</td><td>42.61</td><td>68.20</td><td>-25.59</td><td>36.45</td><td>6.16</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>2</td><td>13450.00</td><td>56.73</td><td>88.20</td><td>-31.47</td><td>50.57</td><td>6.16</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>3</td><td>20175.00</td><td>39.72</td><td>54.00</td><td>-14.28</td><td>36.85</td><td>2.87</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>4</td><td>20175.00</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>49.86</td><td>2.87</td><td>Peak</td><td>100</td><td>64</td></tr><tr><td>5</td><td>26900.00</td><td>42.85</td><td>68.20</td><td>-25.35</td><td>33.95</td><td>8.90</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>6</td><td>26900.00</td><td>55.57</td><td>88.20</td><td>-32.63</td><td>46.67</td><td>8.90</td><td>Peak</td><td>100</td><td>135</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13450.00	42.61	68.20	-25.59	36.45	6.16	Average	100	27	2	13450.00	56.73	88.20	-31.47	50.57	6.16	Peak	100	27	3	20175.00	39.72	54.00	-14.28	36.85	2.87	Average	100	64	4	20175.00	52.73	74.00	-21.27	49.86	2.87	Peak	100	64	5	26900.00	42.85	68.20	-25.35	33.95	8.90	Average	100	135	6	26900.00	55.57	88.20	-32.63	46.67	8.90	Peak	100	135
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13450.00	42.61	68.20	-25.59	36.45	6.16	Average	100	27																																																																
2	13450.00	56.73	88.20	-31.47	50.57	6.16	Peak	100	27																																																																
3	20175.00	39.72	54.00	-14.28	36.85	2.87	Average	100	64																																																																
4	20175.00	52.73	74.00	-21.27	49.86	2.87	Peak	100	64																																																																
5	26900.00	42.85	68.20	-25.35	33.95	8.90	Average	100	135																																																																
6	26900.00	55.57	88.20	-32.63	46.67	8.90	Peak	100	135																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

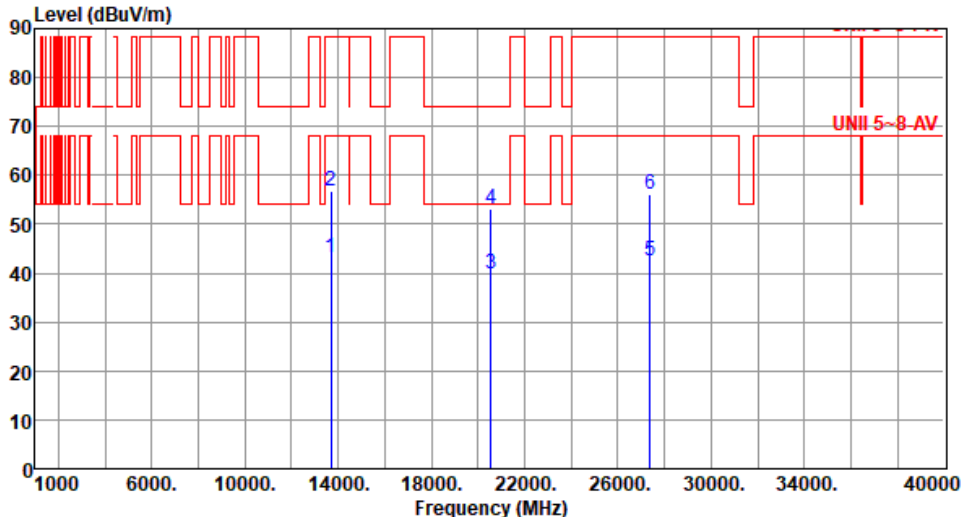


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13690.00</td><td>43.12</td><td>68.20</td><td>-25.08</td><td>36.89</td><td>6.23</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>2</td><td>13690.00</td><td>56.84</td><td>88.20</td><td>-31.36</td><td>50.61</td><td>6.23</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>3</td><td>20535.00</td><td>39.79</td><td>54.00</td><td>-14.21</td><td>36.67</td><td>3.12</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>4</td><td>20535.00</td><td>53.19</td><td>74.00</td><td>-20.81</td><td>50.07</td><td>3.12</td><td>Peak</td><td>100</td><td>43</td></tr><tr><td>5</td><td>27380.00</td><td>42.55</td><td>68.20</td><td>-25.65</td><td>33.92</td><td>8.63</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>6</td><td>27380.00</td><td>55.96</td><td>88.20</td><td>-32.24</td><td>47.33</td><td>8.63</td><td>Peak</td><td>100</td><td>79</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13690.00	43.12	68.20	-25.08	36.89	6.23	Average	100	124	2	13690.00	56.84	88.20	-31.36	50.61	6.23	Peak	100	124	3	20535.00	39.79	54.00	-14.21	36.67	3.12	Average	100	43	4	20535.00	53.19	74.00	-20.81	50.07	3.12	Peak	100	43	5	27380.00	42.55	68.20	-25.65	33.92	8.63	Average	100	79	6	27380.00	55.96	88.20	-32.24	47.33	8.63	Peak	100	79
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13690.00	43.12	68.20	-25.08	36.89	6.23	Average	100	124																																																																
2	13690.00	56.84	88.20	-31.36	50.61	6.23	Peak	100	124																																																																
3	20535.00	39.79	54.00	-14.21	36.67	3.12	Average	100	43																																																																
4	20535.00	53.19	74.00	-20.81	50.07	3.12	Peak	100	43																																																																
5	27380.00	42.55	68.20	-25.65	33.92	8.63	Average	100	79																																																																
6	27380.00	55.96	88.20	-32.24	47.33	8.63	Peak	100	79																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

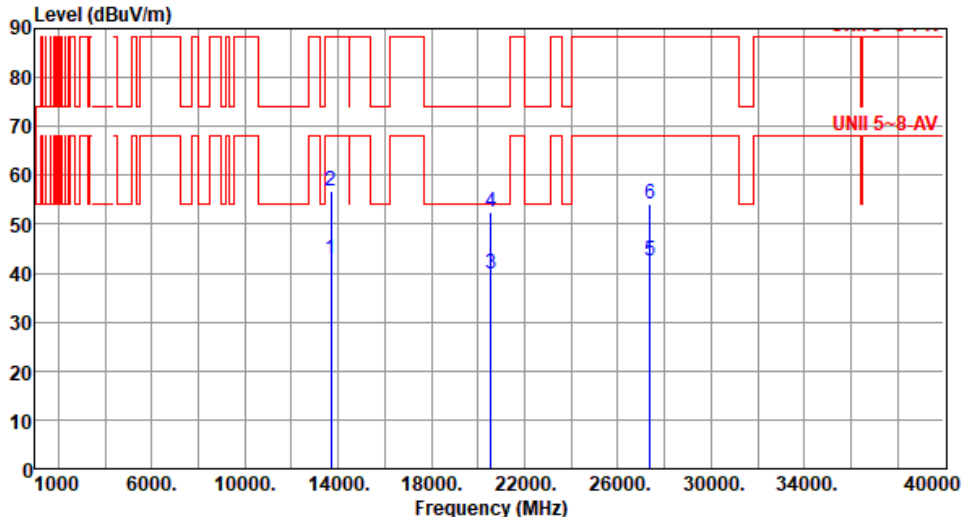

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg 1 13690.00 42.75 68.20 -25.45 36.52 6.23 Average 100 37 2 13690.00 56.64 88.20 -31.56 50.41 6.23 Peak 100 37 3 20535.00 39.71 54.00 -14.29 36.59 3.12 Average 100 66 4 20535.00 52.33 74.00 -21.67 49.21 3.12 Peak 100 66 5 27380.00 42.64 68.20 -25.56 34.01 8.63 Average 100 147 6 27380.00 54.18 88.20 -34.02 45.55 8.63 Peak 100 147 Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			

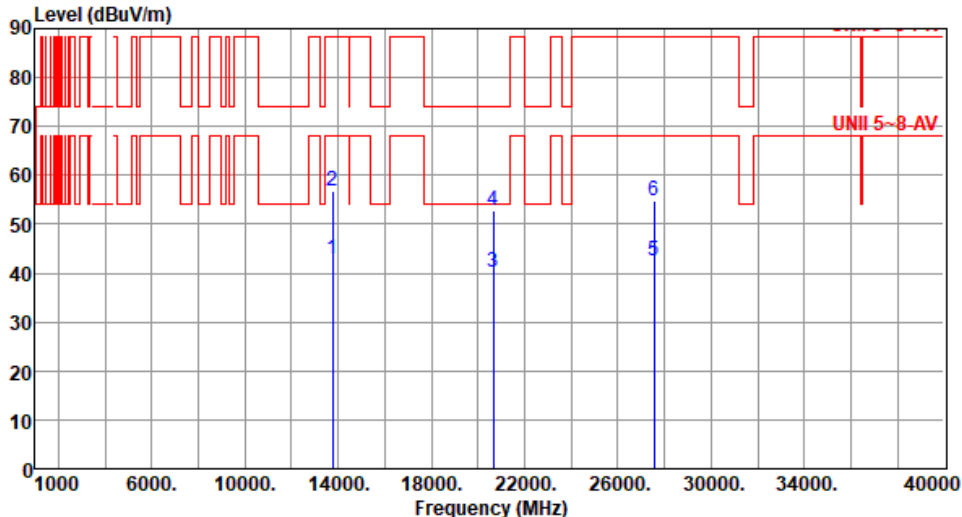

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6885
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg 113770.0042.9568.20-25.2536.686.27Average10038 213770.0056.6888.20-31.5250.416.27Peak10038 320655.0040.1854.00-13.8236.723.46Average10078 420655.0052.9274.00-21.0849.463.46Peak10078 527540.0042.6368.20-25.5733.808.83Average100136 627540.0054.9188.20-33.2946.088.83Peak100136			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			