



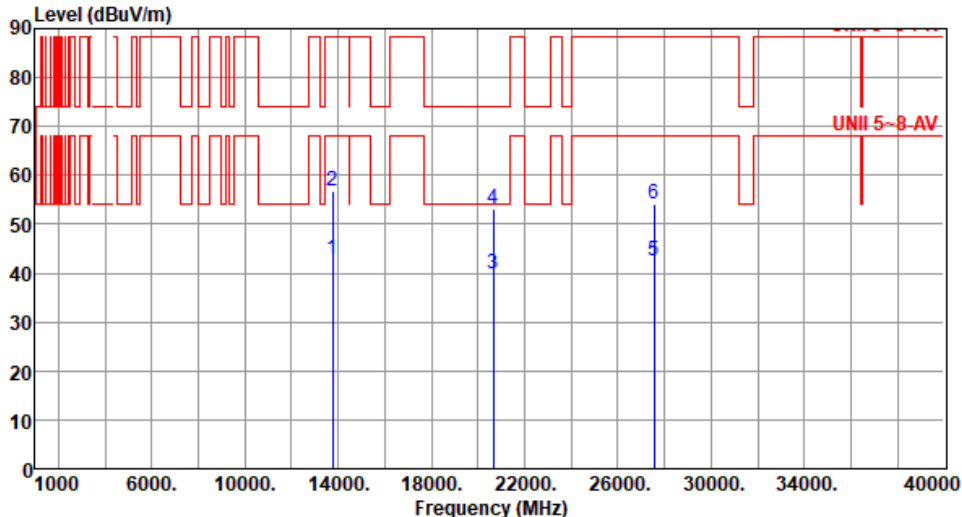


Modulation	be EHT40-OFDMA		Test Freq. (MHz)		6885																																																																										
Polarization	Vertical																																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13770.00</td><td>42.93</td><td>68.20</td><td>-25.27</td><td>36.66</td><td>6.27</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>2</td><td>13770.00</td><td>56.81</td><td>88.20</td><td>-31.39</td><td>50.54</td><td>6.27</td><td>Peak</td><td>100</td><td>23</td></tr><tr><td>3</td><td>20655.00</td><td>39.73</td><td>54.00</td><td>-14.27</td><td>36.27</td><td>3.46</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>4</td><td>20655.00</td><td>53.19</td><td>74.00</td><td>-20.81</td><td>49.73</td><td>3.46</td><td>Peak</td><td>100</td><td>53</td></tr><tr><td>5</td><td>27540.00</td><td>42.65</td><td>68.20</td><td>-25.55</td><td>33.82</td><td>8.83</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>6</td><td>27540.00</td><td>53.98</td><td>88.20</td><td>-34.22</td><td>45.15</td><td>8.83</td><td>Peak</td><td>100</td><td>114</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13770.00	42.93	68.20	-25.27	36.66	6.27	Average	100	23	2	13770.00	56.81	88.20	-31.39	50.54	6.27	Peak	100	23	3	20655.00	39.73	54.00	-14.27	36.27	3.46	Average	100	53	4	20655.00	53.19	74.00	-20.81	49.73	3.46	Peak	100	53	5	27540.00	42.65	68.20	-25.55	33.82	8.83	Average	100	114	6	27540.00	53.98	88.20	-34.22	45.15	8.83	Peak	100	114
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	13770.00	42.93	68.20	-25.27	36.66	6.27	Average	100	23																																																																						
2	13770.00	56.81	88.20	-31.39	50.54	6.27	Peak	100	23																																																																						
3	20655.00	39.73	54.00	-14.27	36.27	3.46	Average	100	53																																																																						
4	20655.00	53.19	74.00	-20.81	49.73	3.46	Peak	100	53																																																																						
5	27540.00	42.65	68.20	-25.55	33.82	8.83	Average	100	114																																																																						
6	27540.00	53.98	88.20	-34.22	45.15	8.83	Peak	100	114																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

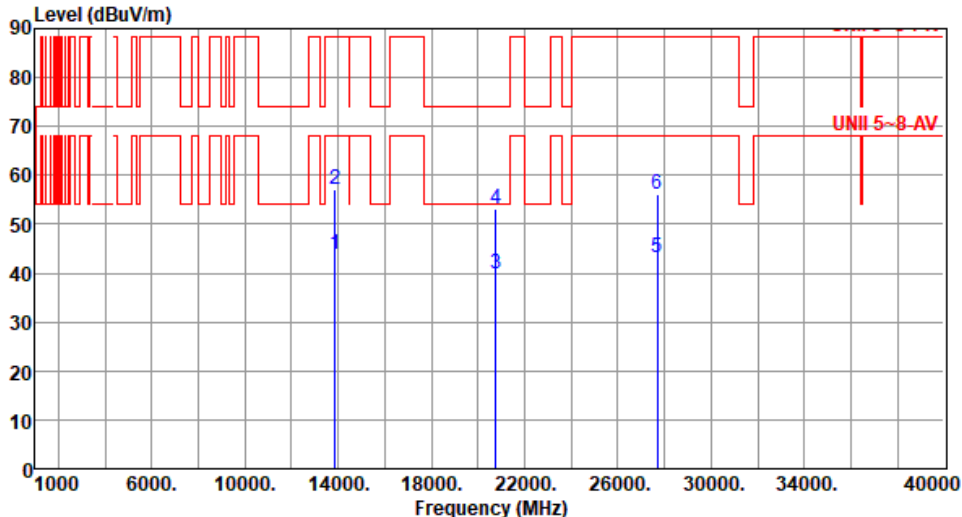


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13850.00	43.76	68.20	-24.44	37.31	6.45	Average	100	143
2	13850.00	57.18	88.20	-31.02	50.73	6.45	Peak	100	143
3	20775.00	39.72	54.00	-14.28	35.98	3.74	Average	100	114
4	20775.00	53.06	74.00	-20.94	49.32	3.74	Peak	100	114
5	27700.00	43.06	68.20	-25.14	34.15	8.91	Average	100	68
6	27700.00	56.16	88.20	-32.04	47.25	8.91	Peak	100	68

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

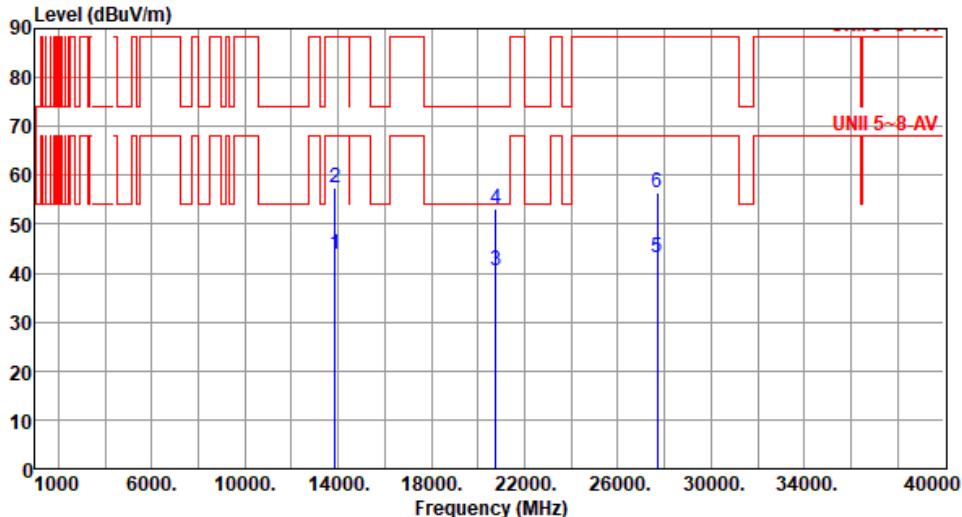


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13850.00</td><td>43.72</td><td>68.20</td><td>-24.48</td><td>37.27</td><td>6.45</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>2</td><td>13850.00</td><td>57.39</td><td>88.20</td><td>-30.81</td><td>50.94</td><td>6.45</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>3</td><td>20775.00</td><td>40.45</td><td>54.00</td><td>-13.55</td><td>36.71</td><td>3.74</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>4</td><td>20775.00</td><td>53.23</td><td>74.00</td><td>-20.77</td><td>49.49</td><td>3.74</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>5</td><td>27700.00</td><td>43.14</td><td>68.20</td><td>-25.06</td><td>34.23</td><td>8.91</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>6</td><td>27700.00</td><td>56.37</td><td>88.20</td><td>-31.83</td><td>47.46</td><td>8.91</td><td>Peak</td><td>100</td><td>54</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13850.00	43.72	68.20	-24.48	37.27	6.45	Average	100	125	2	13850.00	57.39	88.20	-30.81	50.94	6.45	Peak	100	125	3	20775.00	40.45	54.00	-13.55	36.71	3.74	Average	100	102	4	20775.00	53.23	74.00	-20.77	49.49	3.74	Peak	100	102	5	27700.00	43.14	68.20	-25.06	34.23	8.91	Average	100	54	6	27700.00	56.37	88.20	-31.83	47.46	8.91	Peak	100	54
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13850.00	43.72	68.20	-24.48	37.27	6.45	Average	100	125																																																																
2	13850.00	57.39	88.20	-30.81	50.94	6.45	Peak	100	125																																																																
3	20775.00	40.45	54.00	-13.55	36.71	3.74	Average	100	102																																																																
4	20775.00	53.23	74.00	-20.77	49.49	3.74	Peak	100	102																																																																
5	27700.00	43.14	68.20	-25.06	34.23	8.91	Average	100	54																																																																
6	27700.00	56.37	88.20	-31.83	47.46	8.91	Peak	100	54																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

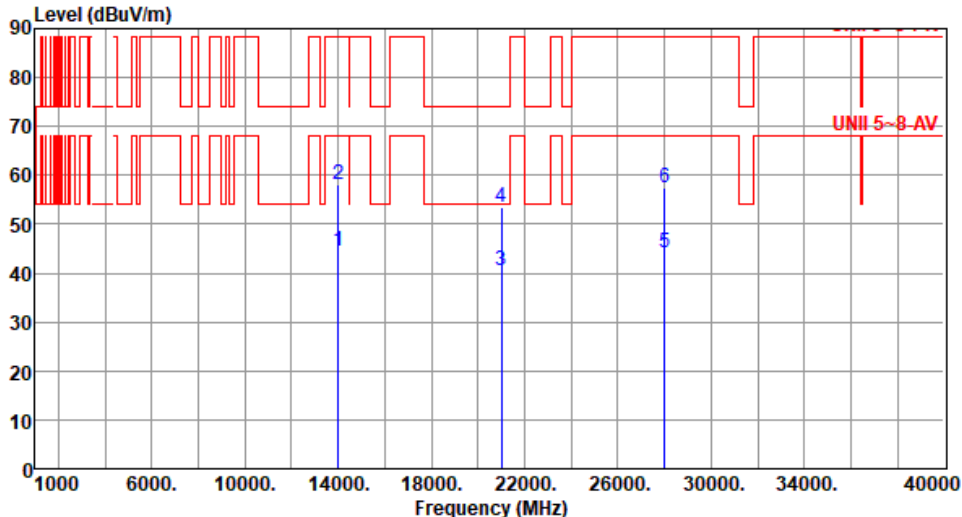

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dB reading dB/m High Table dBuV/m dB dBuV dB/m cm deg 1 14010.00 44.40 68.20 -23.80 37.62 6.78 Average 100 43 2 14010.00 58.15 88.20 -30.05 51.37 6.78 Peak 100 43 3 21015.00 40.38 54.00 -13.62 36.61 3.77 Average 100 105 4 21015.00 53.49 74.00 -20.51 49.72 3.77 Peak 100 105 5 28020.00 44.23 68.20 -23.97 34.85 9.38 Average 100 85 6 28020.00 57.41 88.20 -30.79 48.03 9.38 Peak 100 85 Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			

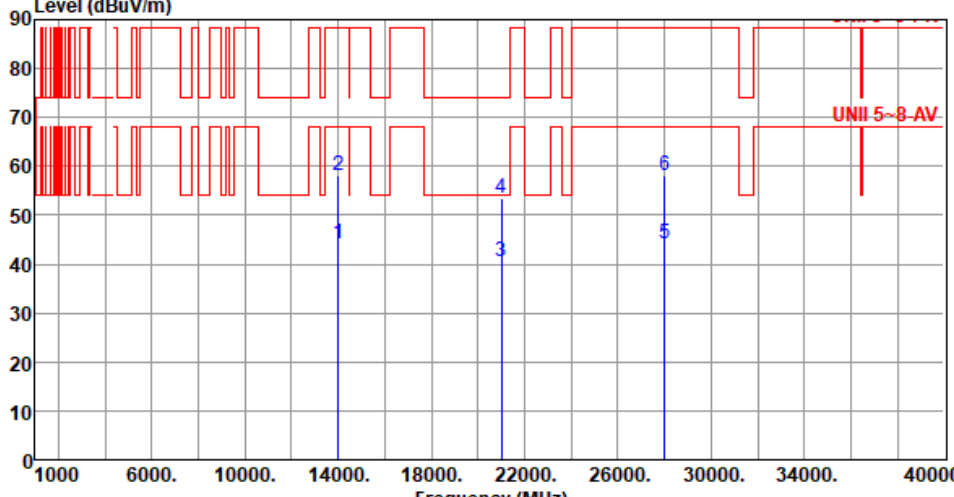

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14010.00	44.18	68.20	-24.02	37.40	6.78	Average	100	25
2	14010.00	57.96	88.20	-30.24	51.18	6.78	Peak	100	25
3	21015.00	40.42	54.00	-13.58	36.65	3.77	Average	100	62
4	21015.00	53.41	74.00	-20.59	49.64	3.77	Peak	100	62
5	28020.00	44.18	68.20	-24.02	34.80	9.38	Average	100	137
6	28020.00	58.19	88.20	-30.01	48.81	9.38	Peak	100	137

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) UNII 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>47.67</td><td>68.20</td><td>-20.53</td><td>42.71</td><td>4.96</td><td>Average</td><td>197</td><td>82</td></tr><tr><td>2</td><td>7125.00</td><td>59.25</td><td>88.20</td><td>-28.95</td><td>54.29</td><td>4.96</td><td>Peak</td><td>197</td><td>82</td></tr><tr><td>3</td><td>14170.00</td><td>44.56</td><td>68.20</td><td>-23.64</td><td>37.45</td><td>7.11</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>4</td><td>14170.00</td><td>57.72</td><td>88.20</td><td>-30.48</td><td>50.61</td><td>7.11</td><td>Peak</td><td>100</td><td>169</td></tr><tr><td>5</td><td>21255.00</td><td>40.63</td><td>54.00</td><td>-13.37</td><td>36.48</td><td>4.15</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>6</td><td>21255.00</td><td>54.02</td><td>74.00</td><td>-19.98</td><td>49.87</td><td>4.15</td><td>Peak</td><td>100</td><td>103</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.67	68.20	-20.53	42.71	4.96	Average	197	82	2	7125.00	59.25	88.20	-28.95	54.29	4.96	Peak	197	82	3	14170.00	44.56	68.20	-23.64	37.45	7.11	Average	100	169	4	14170.00	57.72	88.20	-30.48	50.61	7.11	Peak	100	169	5	21255.00	40.63	54.00	-13.37	36.48	4.15	Average	100	103	6	21255.00	54.02	74.00	-19.98	49.87	4.15	Peak	100	103
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.67	68.20	-20.53	42.71	4.96	Average	197	82																																																																
2	7125.00	59.25	88.20	-28.95	54.29	4.96	Peak	197	82																																																																
3	14170.00	44.56	68.20	-23.64	37.45	7.11	Average	100	169																																																																
4	14170.00	57.72	88.20	-30.48	50.61	7.11	Peak	100	169																																																																
5	21255.00	40.63	54.00	-13.37	36.48	4.15	Average	100	103																																																																
6	21255.00	54.02	74.00	-19.98	49.87	4.15	Peak	100	103																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>47.59</td><td>68.20</td><td>-20.61</td><td>42.63</td><td>4.96</td><td>Average</td><td>355</td><td>11</td></tr><tr><td>2</td><td>7125.00</td><td>59.28</td><td>88.20</td><td>-28.92</td><td>54.32</td><td>4.96</td><td>Peak</td><td>355</td><td>11</td></tr><tr><td>3</td><td>14170.00</td><td>44.31</td><td>68.20</td><td>-23.89</td><td>37.20</td><td>7.11</td><td>Average</td><td>100</td><td>149</td></tr><tr><td>4</td><td>14170.00</td><td>58.09</td><td>88.20</td><td>-30.11</td><td>50.98</td><td>7.11</td><td>Peak</td><td>100</td><td>149</td></tr><tr><td>5</td><td>21255.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>36.53</td><td>4.15</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>6</td><td>21255.00</td><td>54.18</td><td>74.00</td><td>-19.82</td><td>50.03</td><td>4.15</td><td>Peak</td><td>100</td><td>122</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.59	68.20	-20.61	42.63	4.96	Average	355	11	2	7125.00	59.28	88.20	-28.92	54.32	4.96	Peak	355	11	3	14170.00	44.31	68.20	-23.89	37.20	7.11	Average	100	149	4	14170.00	58.09	88.20	-30.11	50.98	7.11	Peak	100	149	5	21255.00	40.68	54.00	-13.32	36.53	4.15	Average	100	122	6	21255.00	54.18	74.00	-19.82	50.03	4.15	Peak	100	122
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.59	68.20	-20.61	42.63	4.96	Average	355	11																																																																
2	7125.00	59.28	88.20	-28.92	54.32	4.96	Peak	355	11																																																																
3	14170.00	44.31	68.20	-23.89	37.20	7.11	Average	100	149																																																																
4	14170.00	58.09	88.20	-30.11	50.98	7.11	Peak	100	149																																																																
5	21255.00	40.68	54.00	-13.32	36.53	4.15	Average	100	122																																																																
6	21255.00	54.18	74.00	-19.82	50.03	4.15	Peak	100	122																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Unwanted Emissions (Above 1GHz) for be EHT80-OFDMA

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>45.83</td><td>68.20</td><td>-22.37</td><td>44.60</td><td>1.23</td><td>Average</td><td>152</td><td>318</td></tr><tr><td>2</td><td>5925.00</td><td>57.91</td><td>88.20</td><td>-30.29</td><td>56.68</td><td>1.23</td><td>Peak</td><td>152</td><td>318</td></tr><tr><td>3</td><td>11970.00</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>35.39</td><td>6.46</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>4</td><td>11970.00</td><td>54.97</td><td>74.00</td><td>-19.03</td><td>48.51</td><td>6.46</td><td>Peak</td><td>100</td><td>53</td></tr><tr><td>5</td><td>17955.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>31.11</td><td>11.57</td><td>Average</td><td>100</td><td>119</td></tr><tr><td>6</td><td>17955.00</td><td>54.79</td><td>74.00</td><td>-19.21</td><td>43.22</td><td>11.57</td><td>Peak</td><td>100</td><td>119</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	45.83	68.20	-22.37	44.60	1.23	Average	152	318	2	5925.00	57.91	88.20	-30.29	56.68	1.23	Peak	152	318	3	11970.00	41.85	54.00	-12.15	35.39	6.46	Average	100	53	4	11970.00	54.97	74.00	-19.03	48.51	6.46	Peak	100	53	5	17955.00	42.68	54.00	-11.32	31.11	11.57	Average	100	119	6	17955.00	54.79	74.00	-19.21	43.22	11.57	Peak	100	119
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	45.83	68.20	-22.37	44.60	1.23	Average	152	318																																																																
2	5925.00	57.91	88.20	-30.29	56.68	1.23	Peak	152	318																																																																
3	11970.00	41.85	54.00	-12.15	35.39	6.46	Average	100	53																																																																
4	11970.00	54.97	74.00	-19.03	48.51	6.46	Peak	100	53																																																																
5	17955.00	42.68	54.00	-11.32	31.11	11.57	Average	100	119																																																																
6	17955.00	54.79	74.00	-19.21	43.22	11.57	Peak	100	119																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

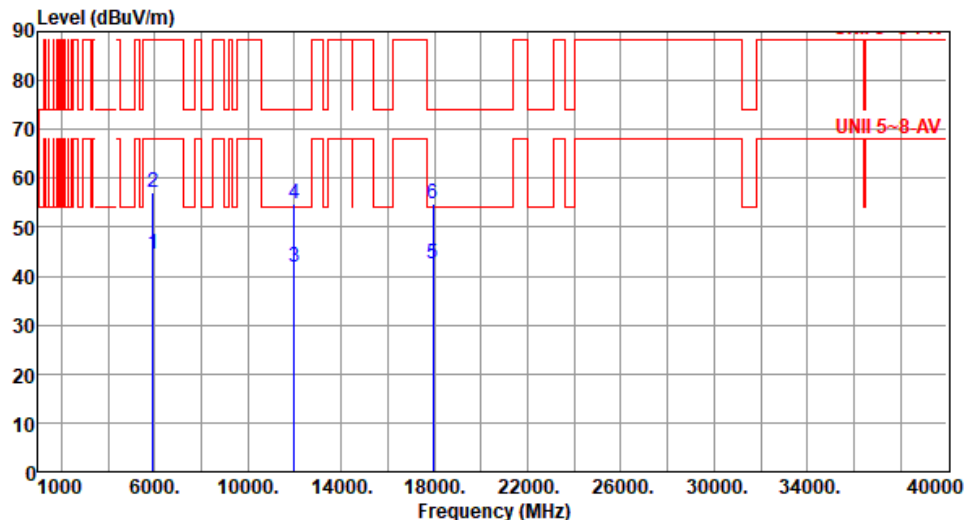Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985																																																																																								
Polarization	Vertical																																																																																										
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																																											
																																																																																											
	<table><tr><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>44.41</td><td>68.20</td><td>-23.79</td><td>43.18</td><td>1.23</td><td>Average</td><td>100</td><td>331</td></tr><tr><td>2</td><td>5925.00</td><td>57.16</td><td>88.20</td><td>-31.04</td><td>55.93</td><td>1.23</td><td>Peak</td><td>100</td><td>331</td></tr><tr><td>3</td><td>11970.00</td><td>41.86</td><td>54.00</td><td>-12.14</td><td>35.40</td><td>6.46</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>4</td><td>11970.00</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>48.36</td><td>6.46</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>5</td><td>17955.00</td><td>42.63</td><td>54.00</td><td>-11.37</td><td>31.06</td><td>11.57</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>6</td><td>17955.00</td><td>54.67</td><td>74.00</td><td>-19.33</td><td>43.10</td><td>11.57</td><td>Peak</td><td>100</td><td>122</td></tr></table>	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level			reading			High	Table								cm	deg	1	5925.00	44.41	68.20	-23.79	43.18	1.23	Average	100	331	2	5925.00	57.16	88.20	-31.04	55.93	1.23	Peak	100	331	3	11970.00	41.86	54.00	-12.14	35.40	6.46	Average	100	38	4	11970.00	54.82	74.00	-19.18	48.36	6.46	Peak	100	38	5	17955.00	42.63	54.00	-11.37	31.06	11.57	Average	100	122	6	17955.00	54.67	74.00	-19.33	43.10	11.57	Peak	100	122			
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																			
MHz	level			reading			High	Table																																																																																			
							cm	deg																																																																																			
1	5925.00	44.41	68.20	-23.79	43.18	1.23	Average	100	331																																																																																		
2	5925.00	57.16	88.20	-31.04	55.93	1.23	Peak	100	331																																																																																		
3	11970.00	41.86	54.00	-12.14	35.40	6.46	Average	100	38																																																																																		
4	11970.00	54.82	74.00	-19.18	48.36	6.46	Peak	100	38																																																																																		
5	17955.00	42.63	54.00	-11.37	31.06	11.57	Average	100	122																																																																																		
6	17955.00	54.67	74.00	-19.33	43.10	11.57	Peak	100	122																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																											

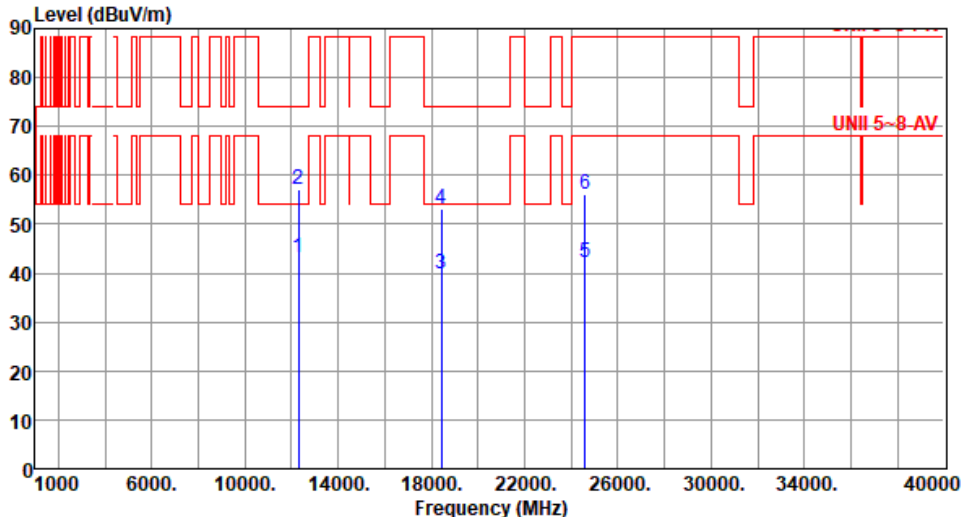

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12290.00</td><td>43.25</td><td>54.00</td><td>-10.75</td><td>36.87</td><td>6.38</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>2</td><td>12290.00</td><td>57.23</td><td>74.00</td><td>-16.77</td><td>50.85</td><td>6.38</td><td>Peak</td><td>100</td><td>64</td></tr><tr><td>3</td><td>18435.00</td><td>39.81</td><td>54.00</td><td>-14.19</td><td>38.36</td><td>1.45</td><td>Average</td><td>100</td><td>93</td></tr><tr><td>4</td><td>18435.00</td><td>53.21</td><td>74.00</td><td>-20.79</td><td>51.76</td><td>1.45</td><td>Peak</td><td>100</td><td>93</td></tr><tr><td>5</td><td>24580.00</td><td>42.31</td><td>68.20</td><td>-25.89</td><td>34.01</td><td>8.30</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>6</td><td>24580.00</td><td>56.14</td><td>88.20</td><td>-32.06</td><td>47.84</td><td>8.30</td><td>Peak</td><td>100</td><td>133</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12290.00	43.25	54.00	-10.75	36.87	6.38	Average	100	64	2	12290.00	57.23	74.00	-16.77	50.85	6.38	Peak	100	64	3	18435.00	39.81	54.00	-14.19	38.36	1.45	Average	100	93	4	18435.00	53.21	74.00	-20.79	51.76	1.45	Peak	100	93	5	24580.00	42.31	68.20	-25.89	34.01	8.30	Average	100	133	6	24580.00	56.14	88.20	-32.06	47.84	8.30	Peak	100	133
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12290.00	43.25	54.00	-10.75	36.87	6.38	Average	100	64																																																																
2	12290.00	57.23	74.00	-16.77	50.85	6.38	Peak	100	64																																																																
3	18435.00	39.81	54.00	-14.19	38.36	1.45	Average	100	93																																																																
4	18435.00	53.21	74.00	-20.79	51.76	1.45	Peak	100	93																																																																
5	24580.00	42.31	68.20	-25.89	34.01	8.30	Average	100	133																																																																
6	24580.00	56.14	88.20	-32.06	47.84	8.30	Peak	100	133																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m) UNII 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12290.00</td><td>42.97</td><td>54.00</td><td>-11.03</td><td>36.59</td><td>6.38</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>2</td><td>12290.00</td><td>57.15</td><td>74.00</td><td>-16.85</td><td>50.77</td><td>6.38</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>3</td><td>18435.00</td><td>39.78</td><td>54.00</td><td>-14.22</td><td>38.33</td><td>1.45</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>4</td><td>18435.00</td><td>52.19</td><td>74.00</td><td>-21.81</td><td>50.74</td><td>1.45</td><td>Peak</td><td>100</td><td>112</td></tr><tr><td>5</td><td>24580.00</td><td>42.51</td><td>68.20</td><td>-25.69</td><td>34.21</td><td>8.30</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>6</td><td>24580.00</td><td>55.37</td><td>88.20</td><td>-32.83</td><td>47.07</td><td>8.30</td><td>Peak</td><td>100</td><td>85</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12290.00	42.97	54.00	-11.03	36.59	6.38	Average	100	29	2	12290.00	57.15	74.00	-16.85	50.77	6.38	Peak	100	29	3	18435.00	39.78	54.00	-14.22	38.33	1.45	Average	100	112	4	18435.00	52.19	74.00	-21.81	50.74	1.45	Peak	100	112	5	24580.00	42.51	68.20	-25.69	34.21	8.30	Average	100	85	6	24580.00	55.37	88.20	-32.83	47.07	8.30	Peak	100	85
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12290.00	42.97	54.00	-11.03	36.59	6.38	Average	100	29																																																																
2	12290.00	57.15	74.00	-16.85	50.77	6.38	Peak	100	29																																																																
3	18435.00	39.78	54.00	-14.22	38.33	1.45	Average	100	112																																																																
4	18435.00	52.19	74.00	-21.81	50.74	1.45	Peak	100	112																																																																
5	24580.00	42.51	68.20	-25.69	34.21	8.30	Average	100	85																																																																
6	24580.00	55.37	88.20	-32.83	47.07	8.30	Peak	100	85																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80-OFDMA		Test Freq. (MHz)		6385																																																																										
Polarization	Horizontal																																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12770.00</td><td>42.87</td><td>68.20</td><td>-25.33</td><td>36.60</td><td>6.27</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>2</td><td>12770.00</td><td>57.36</td><td>88.20</td><td>-30.84</td><td>51.09</td><td>6.27</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>3</td><td>19155.00</td><td>39.39</td><td>54.00</td><td>-14.61</td><td>37.16</td><td>2.23</td><td>Average</td><td>100</td><td>87</td></tr><tr><td>4</td><td>19155.00</td><td>52.65</td><td>74.00</td><td>-21.35</td><td>50.42</td><td>2.23</td><td>Peak</td><td>100</td><td>87</td></tr><tr><td>5</td><td>25540.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>34.43</td><td>8.28</td><td>Average</td><td>100</td><td>131</td></tr><tr><td>6</td><td>25540.00</td><td>56.22</td><td>88.20</td><td>-31.98</td><td>47.94</td><td>8.28</td><td>Peak</td><td>100</td><td>131</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12770.00	42.87	68.20	-25.33	36.60	6.27	Average	100	45	2	12770.00	57.36	88.20	-30.84	51.09	6.27	Peak	100	45	3	19155.00	39.39	54.00	-14.61	37.16	2.23	Average	100	87	4	19155.00	52.65	74.00	-21.35	50.42	2.23	Peak	100	87	5	25540.00	42.71	68.20	-25.49	34.43	8.28	Average	100	131	6	25540.00	56.22	88.20	-31.98	47.94	8.28	Peak	100	131
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	12770.00	42.87	68.20	-25.33	36.60	6.27	Average	100	45																																																																						
2	12770.00	57.36	88.20	-30.84	51.09	6.27	Peak	100	45																																																																						
3	19155.00	39.39	54.00	-14.61	37.16	2.23	Average	100	87																																																																						
4	19155.00	52.65	74.00	-21.35	50.42	2.23	Peak	100	87																																																																						
5	25540.00	42.71	68.20	-25.49	34.43	8.28	Average	100	131																																																																						
6	25540.00	56.22	88.20	-31.98	47.94	8.28	Peak	100	131																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

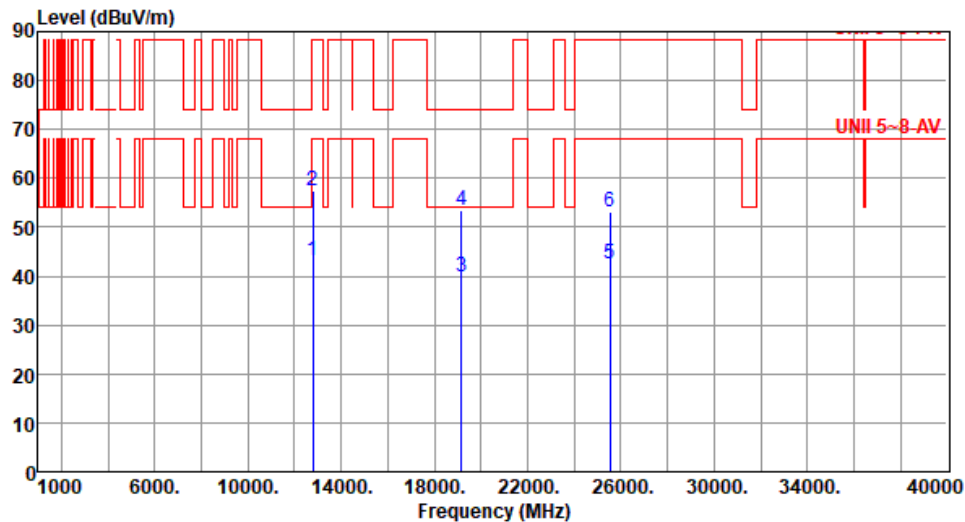


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12770.00	43.17	68.20	-25.03	36.90	6.27	Average	100	53
2	12770.00	57.29	88.20	-30.91	51.02	6.27	Peak	100	53
3	19155.00	39.71	54.00	-14.29	37.48	2.23	Average	100	94
4	19155.00	53.49	74.00	-20.51	51.26	2.23	Peak	100	94
5	25540.00	42.61	68.20	-25.59	34.33	8.28	Average	100	132
6	25540.00	53.29	88.20	-34.91	45.01	8.28	Peak	100	132
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

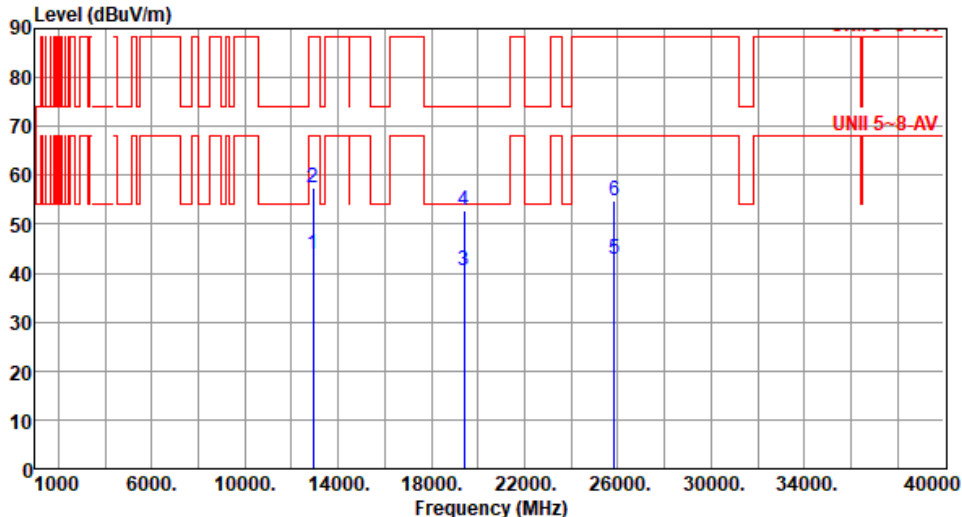


Modulation	be EHT80-OFDMA		Test Freq. (MHz)		6465																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																																																			
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12930.00</td><td>43.75</td><td>68.20</td><td>-24.45</td><td>37.30</td><td>6.45</td><td>Average</td><td>100</td><td>86</td></tr><tr><td>2</td><td>12930.00</td><td>57.58</td><td>88.20</td><td>-30.62</td><td>51.13</td><td>6.45</td><td>Peak</td><td>100</td><td>86</td></tr><tr><td>3</td><td>19395.00</td><td>40.62</td><td>54.00</td><td>-13.38</td><td>38.39</td><td>2.23</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>4</td><td>19395.00</td><td>52.79</td><td>74.00</td><td>-21.21</td><td>50.56</td><td>2.23</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>5</td><td>25860.00</td><td>42.73</td><td>68.20</td><td>-25.47</td><td>34.62</td><td>8.11</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>6</td><td>25860.00</td><td>54.83</td><td>88.20</td><td>-33.37</td><td>46.72</td><td>8.11</td><td>Peak</td><td>100</td><td>127</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12930.00	43.75	68.20	-24.45	37.30	6.45	Average	100	86	2	12930.00	57.58	88.20	-30.62	51.13	6.45	Peak	100	86	3	19395.00	40.62	54.00	-13.38	38.39	2.23	Average	100	26	4	19395.00	52.79	74.00	-21.21	50.56	2.23	Peak	100	26	5	25860.00	42.73	68.20	-25.47	34.62	8.11	Average	100	127	6	25860.00	54.83	88.20	-33.37	46.72	8.11	Peak	100	127
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	12930.00	43.75	68.20	-24.45	37.30	6.45	Average	100	86																																																																																										
2	12930.00	57.58	88.20	-30.62	51.13	6.45	Peak	100	86																																																																																										
3	19395.00	40.62	54.00	-13.38	38.39	2.23	Average	100	26																																																																																										
4	19395.00	52.79	74.00	-21.21	50.56	2.23	Peak	100	26																																																																																										
5	25860.00	42.73	68.20	-25.47	34.62	8.11	Average	100	127																																																																																										
6	25860.00	54.83	88.20	-33.37	46.72	8.11	Peak	100	127																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

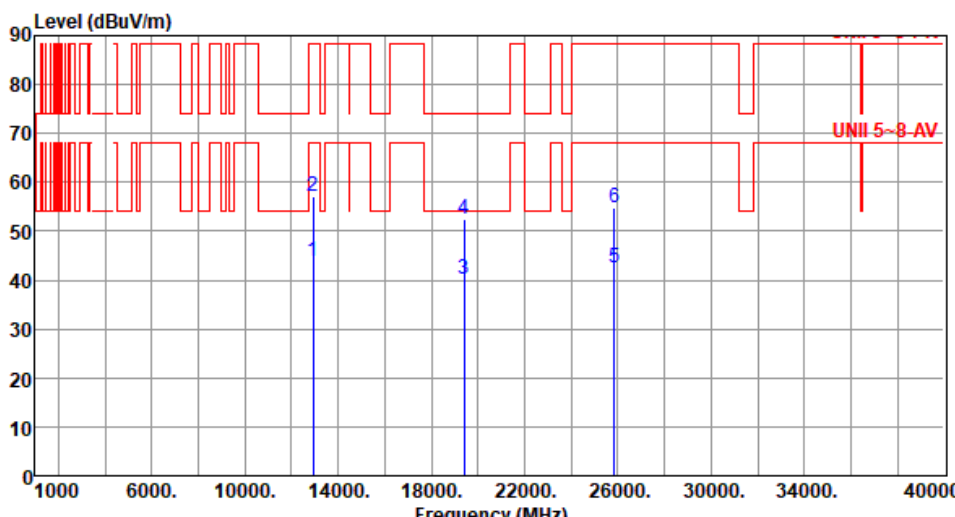

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12930.00</td><td>43.76</td><td>68.20</td><td>-24.44</td><td>37.31</td><td>6.45</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>2</td><td>12930.00</td><td>57.07</td><td>88.20</td><td>-31.13</td><td>50.62</td><td>6.45</td><td>Peak</td><td>100</td><td>71</td></tr><tr><td>3</td><td>19395.00</td><td>40.19</td><td>54.00</td><td>-13.81</td><td>37.96</td><td>2.23</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>4</td><td>19395.00</td><td>52.63</td><td>74.00</td><td>-21.37</td><td>50.40</td><td>2.23</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>5</td><td>25860.00</td><td>42.45</td><td>68.20</td><td>-25.75</td><td>34.34</td><td>8.11</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td>25860.00</td><td>54.87</td><td>88.20</td><td>-33.33</td><td>46.76</td><td>8.11</td><td>Peak</td><td>100</td><td>177</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12930.00	43.76	68.20	-24.44	37.31	6.45	Average	100	71	2	12930.00	57.07	88.20	-31.13	50.62	6.45	Peak	100	71	3	19395.00	40.19	54.00	-13.81	37.96	2.23	Average	100	122	4	19395.00	52.63	74.00	-21.37	50.40	2.23	Peak	100	122	5	25860.00	42.45	68.20	-25.75	34.34	8.11	Average	100	177	6	25860.00	54.87	88.20	-33.33	46.76	8.11	Peak	100	177
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12930.00	43.76	68.20	-24.44	37.31	6.45	Average	100	71																																																																
2	12930.00	57.07	88.20	-31.13	50.62	6.45	Peak	100	71																																																																
3	19395.00	40.19	54.00	-13.81	37.96	2.23	Average	100	122																																																																
4	19395.00	52.63	74.00	-21.37	50.40	2.23	Peak	100	122																																																																
5	25860.00	42.45	68.20	-25.75	34.34	8.11	Average	100	177																																																																
6	25860.00	54.87	88.20	-33.33	46.76	8.11	Peak	100	177																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

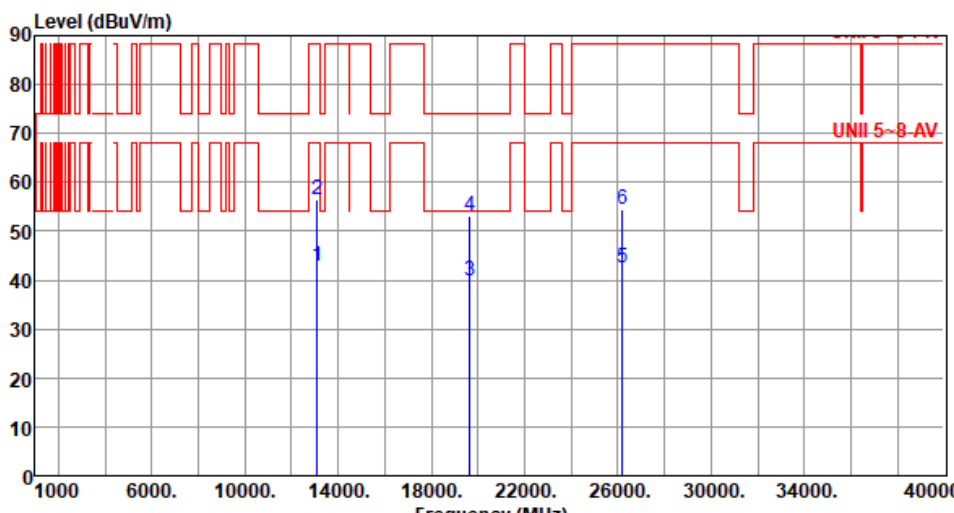

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13090.00</td><td>42.84</td><td>68.20</td><td>-25.36</td><td>36.85</td><td>5.99</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>2</td><td>13090.00</td><td>56.32</td><td>88.20</td><td>-31.88</td><td>50.33</td><td>5.99</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>3</td><td>19635.00</td><td>39.97</td><td>54.00</td><td>-14.03</td><td>37.57</td><td>2.40</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>4</td><td>19635.00</td><td>53.28</td><td>74.00</td><td>-20.72</td><td>50.88</td><td>2.40</td><td>Peak</td><td>100</td><td>104</td></tr><tr><td>5</td><td>26180.00</td><td>42.65</td><td>68.20</td><td>-25.55</td><td>34.31</td><td>8.34</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>6</td><td>26180.00</td><td>54.39</td><td>88.20</td><td>-33.81</td><td>46.05</td><td>8.34</td><td>Peak</td><td>100</td><td>156</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13090.00	42.84	68.20	-25.36	36.85	5.99	Average	100	47	2	13090.00	56.32	88.20	-31.88	50.33	5.99	Peak	100	47	3	19635.00	39.97	54.00	-14.03	37.57	2.40	Average	100	104	4	19635.00	53.28	74.00	-20.72	50.88	2.40	Peak	100	104	5	26180.00	42.65	68.20	-25.55	34.31	8.34	Average	100	156	6	26180.00	54.39	88.20	-33.81	46.05	8.34	Peak	100	156
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13090.00	42.84	68.20	-25.36	36.85	5.99	Average	100	47																																																																
2	13090.00	56.32	88.20	-31.88	50.33	5.99	Peak	100	47																																																																
3	19635.00	39.97	54.00	-14.03	37.57	2.40	Average	100	104																																																																
4	19635.00	53.28	74.00	-20.72	50.88	2.40	Peak	100	104																																																																
5	26180.00	42.65	68.20	-25.55	34.31	8.34	Average	100	156																																																																
6	26180.00	54.39	88.20	-33.81	46.05	8.34	Peak	100	156																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13090.00</td><td>43.15</td><td>68.20</td><td>-25.05</td><td>37.16</td><td>5.99</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>2</td><td>13090.00</td><td>56.96</td><td>88.20</td><td>-31.24</td><td>50.97</td><td>5.99</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>3</td><td>19635.00</td><td>39.98</td><td>54.00</td><td>-14.02</td><td>37.58</td><td>2.40</td><td>Average</td><td>100</td><td>13</td></tr><tr><td>4</td><td>19635.00</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>51.21</td><td>2.40</td><td>Peak</td><td>100</td><td>13</td></tr><tr><td>5</td><td>26180.00</td><td>42.85</td><td>68.20</td><td>-25.35</td><td>34.51</td><td>8.34</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>6</td><td>26180.00</td><td>54.39</td><td>88.20</td><td>-33.81</td><td>46.05</td><td>8.34</td><td>Peak</td><td>100</td><td>126</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13090.00	43.15	68.20	-25.05	37.16	5.99	Average	100	55	2	13090.00	56.96	88.20	-31.24	50.97	5.99	Peak	100	55	3	19635.00	39.98	54.00	-14.02	37.58	2.40	Average	100	13	4	19635.00	53.61	74.00	-20.39	51.21	2.40	Peak	100	13	5	26180.00	42.85	68.20	-25.35	34.51	8.34	Average	100	126	6	26180.00	54.39	88.20	-33.81	46.05	8.34	Peak	100	126
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13090.00	43.15	68.20	-25.05	37.16	5.99	Average	100	55																																																																
2	13090.00	56.96	88.20	-31.24	50.97	5.99	Peak	100	55																																																																
3	19635.00	39.98	54.00	-14.02	37.58	2.40	Average	100	13																																																																
4	19635.00	53.61	74.00	-20.39	51.21	2.40	Peak	100	13																																																																
5	26180.00	42.85	68.20	-25.35	34.51	8.34	Average	100	126																																																																
6	26180.00	54.39	88.20	-33.81	46.05	8.34	Peak	100	126																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13250.00</td><td>43.72</td><td>54.00</td><td>-10.28</td><td>37.92</td><td>5.80</td><td>Average</td><td>100</td><td>37</td></tr><tr><td>2</td><td>13250.00</td><td>56.65</td><td>74.00</td><td>-17.35</td><td>50.85</td><td>5.80</td><td>Peak</td><td>100</td><td>37</td></tr><tr><td>3</td><td>19875.00</td><td>40.18</td><td>54.00</td><td>-13.82</td><td>37.44</td><td>2.74</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>4</td><td>19875.00</td><td>52.61</td><td>74.00</td><td>-21.39</td><td>49.87</td><td>2.74</td><td>Peak</td><td>100</td><td>85</td></tr><tr><td>5</td><td>26500.00</td><td>43.58</td><td>68.20</td><td>-24.62</td><td>34.98</td><td>8.60</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>6</td><td>26500.00</td><td>56.24</td><td>88.20</td><td>-31.96</td><td>47.64</td><td>8.60</td><td>Peak</td><td>100</td><td>117</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13250.00	43.72	54.00	-10.28	37.92	5.80	Average	100	37	2	13250.00	56.65	74.00	-17.35	50.85	5.80	Peak	100	37	3	19875.00	40.18	54.00	-13.82	37.44	2.74	Average	100	85	4	19875.00	52.61	74.00	-21.39	49.87	2.74	Peak	100	85	5	26500.00	43.58	68.20	-24.62	34.98	8.60	Average	100	117	6	26500.00	56.24	88.20	-31.96	47.64	8.60	Peak	100	117
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13250.00	43.72	54.00	-10.28	37.92	5.80	Average	100	37																																																																
2	13250.00	56.65	74.00	-17.35	50.85	5.80	Peak	100	37																																																																
3	19875.00	40.18	54.00	-13.82	37.44	2.74	Average	100	85																																																																
4	19875.00	52.61	74.00	-21.39	49.87	2.74	Peak	100	85																																																																
5	26500.00	43.58	68.20	-24.62	34.98	8.60	Average	100	117																																																																
6	26500.00	56.24	88.20	-31.96	47.64	8.60	Peak	100	117																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg 113250.0043.7554.00-10.2537.955.80Average10040 213250.0056.7774.00-17.2350.975.80Peak10040 319875.0040.2954.00-13.7137.552.74Average10074 419875.0052.5874.00-21.4249.842.74Peak10074 526500.0043.4668.20-24.7434.868.60Average100118 626500.0056.1988.20-32.0147.598.60Peak100118 Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			

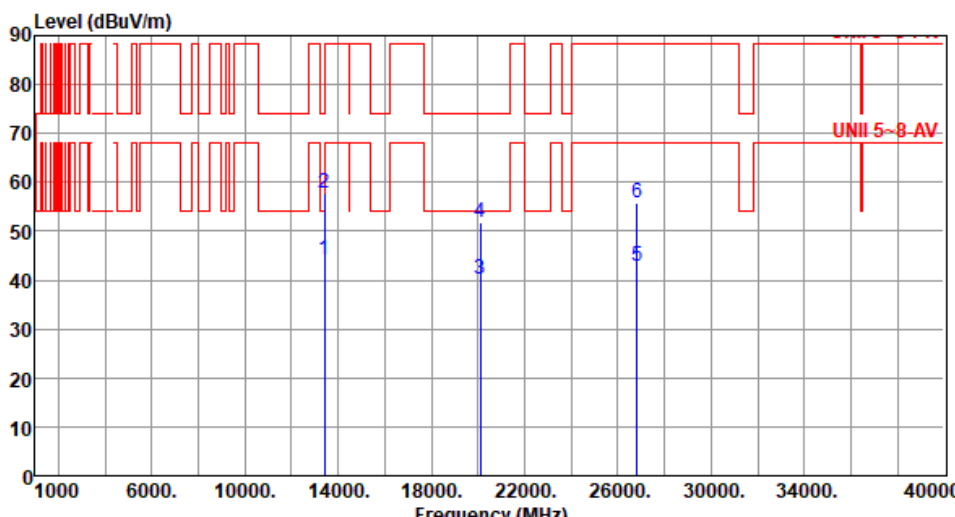


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13410.00</td><td>44.23</td><td>68.20</td><td>-23.97</td><td>38.06</td><td>6.17</td><td>Average</td><td>100</td><td>78</td></tr><tr><td>2</td><td>13410.00</td><td>57.67</td><td>88.20</td><td>-30.53</td><td>51.50</td><td>6.17</td><td>Peak</td><td>100</td><td>78</td></tr><tr><td>3</td><td>20115.00</td><td>40.03</td><td>54.00</td><td>-13.97</td><td>37.15</td><td>2.88</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>4</td><td>20115.00</td><td>51.89</td><td>74.00</td><td>-22.11</td><td>49.01</td><td>2.88</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>5</td><td>26820.00</td><td>42.83</td><td>68.20</td><td>-25.37</td><td>33.92</td><td>8.91</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>6</td><td>26820.00</td><td>55.83</td><td>88.20</td><td>-32.37</td><td>46.92</td><td>8.91</td><td>Peak</td><td>100</td><td>36</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13410.00	44.23	68.20	-23.97	38.06	6.17	Average	100	78	2	13410.00	57.67	88.20	-30.53	51.50	6.17	Peak	100	78	3	20115.00	40.03	54.00	-13.97	37.15	2.88	Average	100	124	4	20115.00	51.89	74.00	-22.11	49.01	2.88	Peak	100	124	5	26820.00	42.83	68.20	-25.37	33.92	8.91	Average	100	36	6	26820.00	55.83	88.20	-32.37	46.92	8.91	Peak	100	36
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13410.00	44.23	68.20	-23.97	38.06	6.17	Average	100	78																																																																
2	13410.00	57.67	88.20	-30.53	51.50	6.17	Peak	100	78																																																																
3	20115.00	40.03	54.00	-13.97	37.15	2.88	Average	100	124																																																																
4	20115.00	51.89	74.00	-22.11	49.01	2.88	Peak	100	124																																																																
5	26820.00	42.83	68.20	-25.37	33.92	8.91	Average	100	36																																																																
6	26820.00	55.83	88.20	-32.37	46.92	8.91	Peak	100	36																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13410.00</td><td>44.29</td><td>68.20</td><td>-23.91</td><td>38.12</td><td>6.17</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>2</td><td>13410.00</td><td>57.67</td><td>88.20</td><td>-30.53</td><td>51.50</td><td>6.17</td><td>Peak</td><td>100</td><td>63</td></tr><tr><td>3</td><td>20115.00</td><td>39.88</td><td>54.00</td><td>-14.12</td><td>37.00</td><td>2.88</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>4</td><td>20115.00</td><td>52.24</td><td>74.00</td><td>-21.76</td><td>49.36</td><td>2.88</td><td>Peak</td><td>100</td><td>104</td></tr><tr><td>5</td><td>26820.00</td><td>42.96</td><td>68.20</td><td>-25.24</td><td>34.05</td><td>8.91</td><td>Average</td><td>100</td><td>164</td></tr><tr><td>6</td><td>26820.00</td><td>55.48</td><td>88.20</td><td>-32.72</td><td>46.57</td><td>8.91</td><td>Peak</td><td>100</td><td>164</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13410.00	44.29	68.20	-23.91	38.12	6.17	Average	100	63	2	13410.00	57.67	88.20	-30.53	51.50	6.17	Peak	100	63	3	20115.00	39.88	54.00	-14.12	37.00	2.88	Average	100	104	4	20115.00	52.24	74.00	-21.76	49.36	2.88	Peak	100	104	5	26820.00	42.96	68.20	-25.24	34.05	8.91	Average	100	164	6	26820.00	55.48	88.20	-32.72	46.57	8.91	Peak	100	164
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13410.00	44.29	68.20	-23.91	38.12	6.17	Average	100	63																																																																
2	13410.00	57.67	88.20	-30.53	51.50	6.17	Peak	100	63																																																																
3	20115.00	39.88	54.00	-14.12	37.00	2.88	Average	100	104																																																																
4	20115.00	52.24	74.00	-21.76	49.36	2.88	Peak	100	104																																																																
5	26820.00	42.96	68.20	-25.24	34.05	8.91	Average	100	164																																																																
6	26820.00	55.48	88.20	-32.72	46.57	8.91	Peak	100	164																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

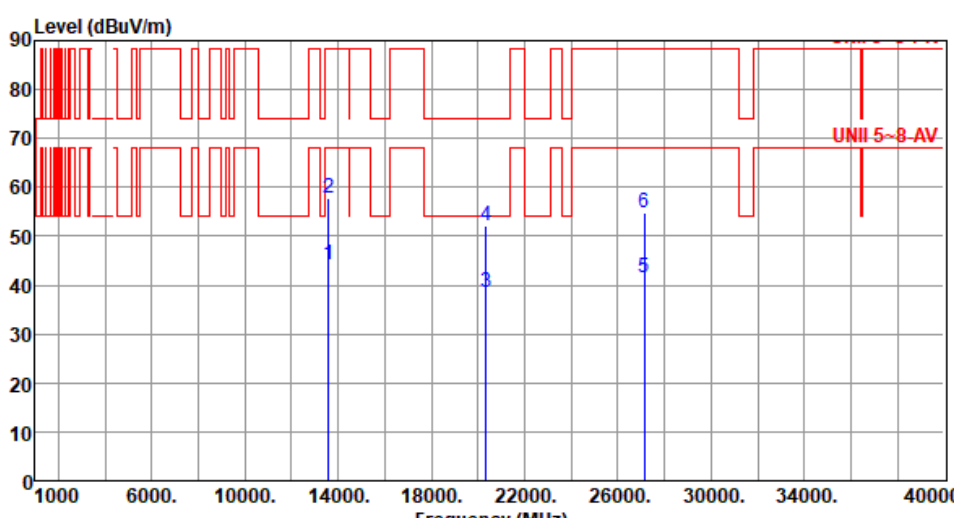


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785																				
Polarization	Horizontal																						
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																							
 <table><tr><th>Frequency (MHz)</th><th>Level (dBUV/m)</th><th>Limit (dBUV/m)</th><th>Margin (dB)</th></tr><tr><td>14000</td><td>60</td><td>60</td><td>0</td></tr><tr><td>22000</td><td>60</td><td>60</td><td>0</td></tr><tr><td>26000</td><td>60</td><td>60</td><td>0</td></tr><tr><td>34000</td><td>60</td><td>60</td><td>0</td></tr></table>				Frequency (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	14000	60	60	0	22000	60	60	0	26000	60	60	0	34000	60	60	0
Frequency (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)																				
14000	60	60	0																				
22000	60	60	0																				
26000	60	60	0																				
34000	60	60	0																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13570.00</td><td>44.59</td><td>68.20</td><td>-23.61</td><td>38.41</td><td>6.18</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>2</td><td>13570.00</td><td>57.71</td><td>88.20</td><td>-30.49</td><td>51.53</td><td>6.18</td><td>Peak</td><td>100</td><td>116</td></tr><tr><td>3</td><td>20355.00</td><td>38.57</td><td>54.00</td><td>-15.43</td><td>35.64</td><td>2.93</td><td>Average</td><td>100</td><td>73</td></tr><tr><td>4</td><td>20355.00</td><td>52.58</td><td>74.00</td><td>-21.42</td><td>49.65</td><td>2.93</td><td>Peak</td><td>100</td><td>73</td></tr><tr><td>5</td><td>27140.00</td><td>41.86</td><td>68.20</td><td>-26.34</td><td>33.24</td><td>8.62</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>6</td><td>27140.00</td><td>55.82</td><td>88.20</td><td>-32.38</td><td>47.20</td><td>8.62</td><td>Peak</td><td>100</td><td>127</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13570.00	44.59	68.20	-23.61	38.41	6.18	Average	100	116	2	13570.00	57.71	88.20	-30.49	51.53	6.18	Peak	100	116	3	20355.00	38.57	54.00	-15.43	35.64	2.93	Average	100	73	4	20355.00	52.58	74.00	-21.42	49.65	2.93	Peak	100	73	5	27140.00	41.86	68.20	-26.34	33.24	8.62	Average	100	127	6	27140.00	55.82	88.20	-32.38	47.20	8.62	Peak	100	127
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13570.00	44.59	68.20	-23.61	38.41	6.18	Average	100	116																																																																
2	13570.00	57.71	88.20	-30.49	51.53	6.18	Peak	100	116																																																																
3	20355.00	38.57	54.00	-15.43	35.64	2.93	Average	100	73																																																																
4	20355.00	52.58	74.00	-21.42	49.65	2.93	Peak	100	73																																																																
5	27140.00	41.86	68.20	-26.34	33.24	8.62	Average	100	127																																																																
6	27140.00	55.82	88.20	-32.38	47.20	8.62	Peak	100	127																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

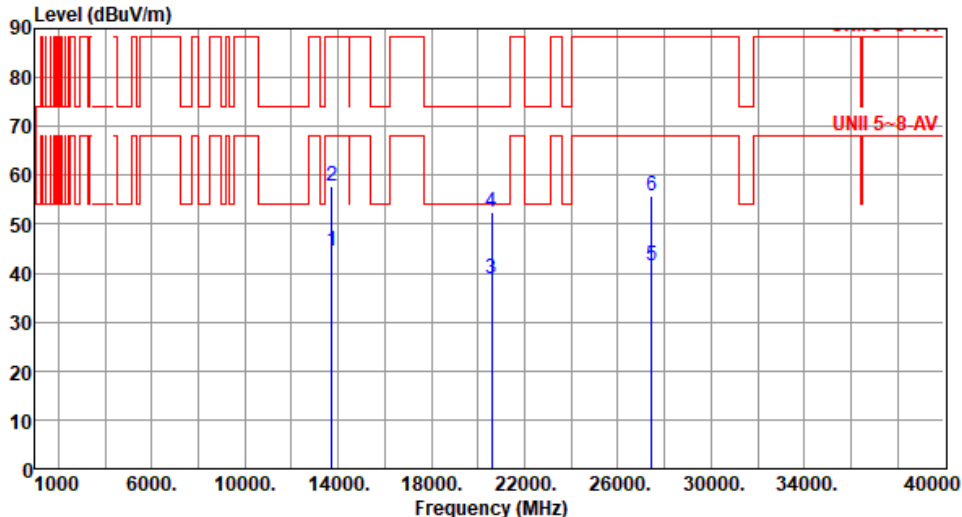


Modulation	be EHT80-OFDMA		Test Freq. (MHz)		6865																																																																										
Polarization	Horizontal																																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13730.00</td><td>44.59</td><td>68.20</td><td>-23.61</td><td>38.35</td><td>6.24</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>2</td><td>13730.00</td><td>57.66</td><td>88.20</td><td>-30.54</td><td>51.42</td><td>6.24</td><td>Peak</td><td>100</td><td>204</td></tr><tr><td>3</td><td>20595.00</td><td>38.73</td><td>54.00</td><td>-15.27</td><td>35.44</td><td>3.29</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>4</td><td>20595.00</td><td>52.51</td><td>74.00</td><td>-21.49</td><td>49.22</td><td>3.29</td><td>Peak</td><td>100</td><td>85</td></tr><tr><td>5</td><td>27460.00</td><td>41.62</td><td>68.20</td><td>-26.58</td><td>32.87</td><td>8.75</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>6</td><td>27460.00</td><td>55.73</td><td>88.20</td><td>-32.47</td><td>46.98</td><td>8.75</td><td>Peak</td><td>100</td><td>115</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13730.00	44.59	68.20	-23.61	38.35	6.24	Average	100	204	2	13730.00	57.66	88.20	-30.54	51.42	6.24	Peak	100	204	3	20595.00	38.73	54.00	-15.27	35.44	3.29	Average	100	85	4	20595.00	52.51	74.00	-21.49	49.22	3.29	Peak	100	85	5	27460.00	41.62	68.20	-26.58	32.87	8.75	Average	100	115	6	27460.00	55.73	88.20	-32.47	46.98	8.75	Peak	100	115
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	13730.00	44.59	68.20	-23.61	38.35	6.24	Average	100	204																																																																						
2	13730.00	57.66	88.20	-30.54	51.42	6.24	Peak	100	204																																																																						
3	20595.00	38.73	54.00	-15.27	35.44	3.29	Average	100	85																																																																						
4	20595.00	52.51	74.00	-21.49	49.22	3.29	Peak	100	85																																																																						
5	27460.00	41.62	68.20	-26.58	32.87	8.75	Average	100	115																																																																						
6	27460.00	55.73	88.20	-32.47	46.98	8.75	Peak	100	115																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

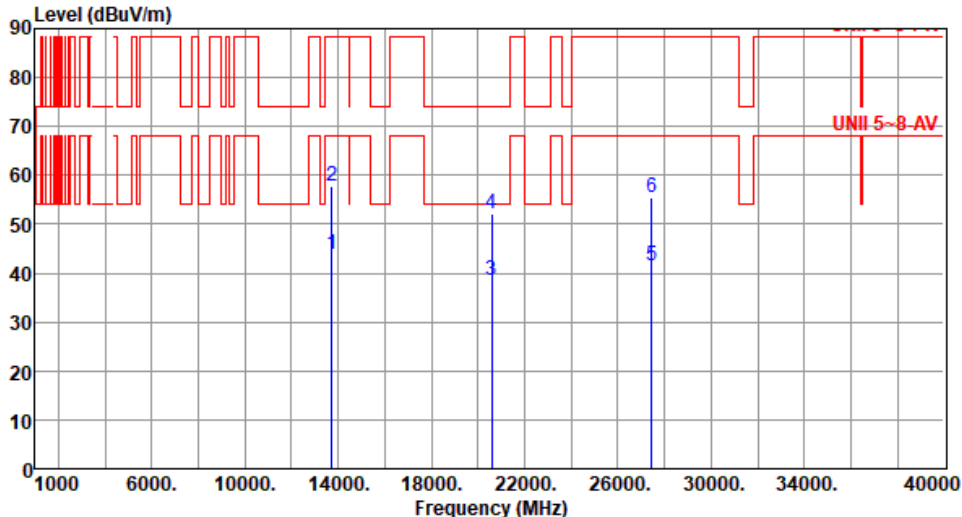


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13730.00</td><td>43.97</td><td>68.20</td><td>-24.23</td><td>37.73</td><td>6.24</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>2</td><td>13730.00</td><td>57.91</td><td>88.20</td><td>-30.29</td><td>51.67</td><td>6.24</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>3</td><td>20595.00</td><td>38.46</td><td>54.00</td><td>-15.54</td><td>35.17</td><td>3.29</td><td>Average</td><td>100</td><td>141</td></tr><tr><td>4</td><td>20595.00</td><td>51.98</td><td>74.00</td><td>-22.02</td><td>48.69</td><td>3.29</td><td>Peak</td><td>100</td><td>141</td></tr><tr><td>5</td><td>27460.00</td><td>41.56</td><td>68.20</td><td>-26.64</td><td>32.81</td><td>8.75</td><td>Average</td><td>100</td><td>179</td></tr><tr><td>6</td><td>27460.00</td><td>55.39</td><td>88.20</td><td>-32.81</td><td>46.64</td><td>8.75</td><td>Peak</td><td>100</td><td>179</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13730.00	43.97	68.20	-24.23	37.73	6.24	Average	100	39	2	13730.00	57.91	88.20	-30.29	51.67	6.24	Peak	100	39	3	20595.00	38.46	54.00	-15.54	35.17	3.29	Average	100	141	4	20595.00	51.98	74.00	-22.02	48.69	3.29	Peak	100	141	5	27460.00	41.56	68.20	-26.64	32.81	8.75	Average	100	179	6	27460.00	55.39	88.20	-32.81	46.64	8.75	Peak	100	179
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13730.00	43.97	68.20	-24.23	37.73	6.24	Average	100	39																																																																
2	13730.00	57.91	88.20	-30.29	51.67	6.24	Peak	100	39																																																																
3	20595.00	38.46	54.00	-15.54	35.17	3.29	Average	100	141																																																																
4	20595.00	51.98	74.00	-22.02	48.69	3.29	Peak	100	141																																																																
5	27460.00	41.56	68.20	-26.64	32.81	8.75	Average	100	179																																																																
6	27460.00	55.39	88.20	-32.81	46.64	8.75	Peak	100	179																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

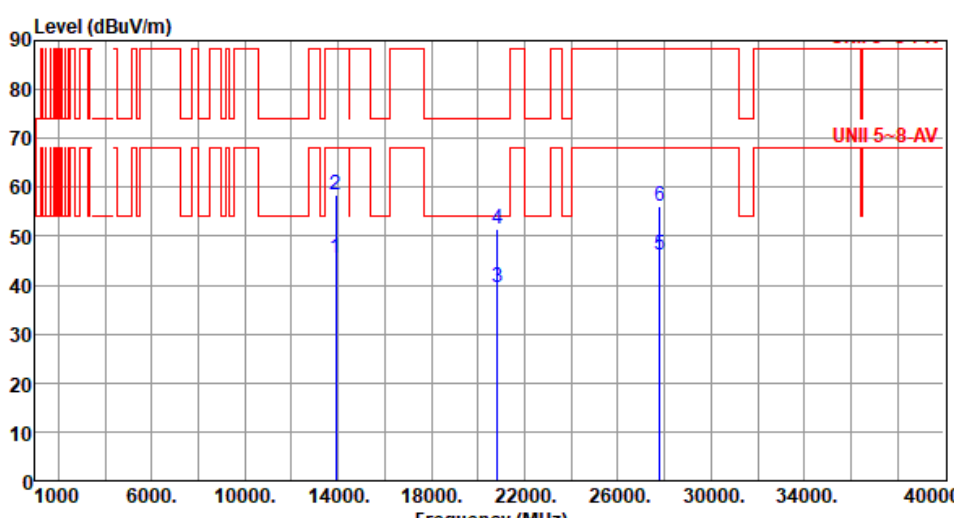

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13890.00</td><td>45.51</td><td>68.20</td><td>-22.69</td><td>38.93</td><td>6.58</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>2</td><td>13890.00</td><td>58.36</td><td>88.20</td><td>-29.84</td><td>51.78</td><td>6.58</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>3</td><td>20835.00</td><td>39.57</td><td>54.00</td><td>-14.43</td><td>35.83</td><td>3.74</td><td>Average</td><td>100</td><td>69</td></tr><tr><td>4</td><td>20835.00</td><td>51.41</td><td>74.00</td><td>-22.59</td><td>47.67</td><td>3.74</td><td>Peak</td><td>100</td><td>69</td></tr><tr><td>5</td><td>27780.00</td><td>46.01</td><td>68.20</td><td>-22.19</td><td>37.02</td><td>8.99</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>6</td><td>27780.00</td><td>56.12</td><td>88.20</td><td>-32.08</td><td>47.13</td><td>8.99</td><td>Peak</td><td>100</td><td>112</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13890.00	45.51	68.20	-22.69	38.93	6.58	Average	100	27	2	13890.00	58.36	88.20	-29.84	51.78	6.58	Peak	100	27	3	20835.00	39.57	54.00	-14.43	35.83	3.74	Average	100	69	4	20835.00	51.41	74.00	-22.59	47.67	3.74	Peak	100	69	5	27780.00	46.01	68.20	-22.19	37.02	8.99	Average	100	112	6	27780.00	56.12	88.20	-32.08	47.13	8.99	Peak	100	112
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13890.00	45.51	68.20	-22.69	38.93	6.58	Average	100	27																																																																
2	13890.00	58.36	88.20	-29.84	51.78	6.58	Peak	100	27																																																																
3	20835.00	39.57	54.00	-14.43	35.83	3.74	Average	100	69																																																																
4	20835.00	51.41	74.00	-22.59	47.67	3.74	Peak	100	69																																																																
5	27780.00	46.01	68.20	-22.19	37.02	8.99	Average	100	112																																																																
6	27780.00	56.12	88.20	-32.08	47.13	8.99	Peak	100	112																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

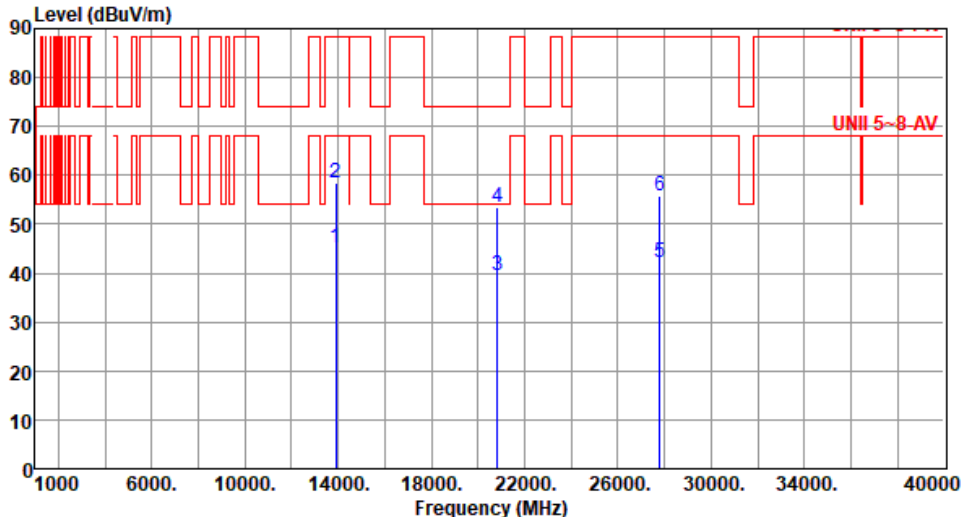


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13890.00	45.26	68.20	-22.94	38.68	6.58	Average	100	35
2	13890.00	58.46	88.20	-29.74	51.88	6.58	Peak	100	35
3	20835.00	39.44	54.00	-14.56	35.70	3.74	Average	100	68
4	20835.00	53.44	74.00	-20.56	49.70	3.74	Peak	100	68
5	27780.00	42.11	68.20	-26.09	33.12	8.99	Average	100	114
6	27780.00	55.65	88.20	-32.55	46.66	8.99	Peak	100	114

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.31</td><td>68.20</td><td>-19.89</td><td>43.35</td><td>4.96</td><td>Average</td><td>196</td><td>84</td></tr><tr><td>2</td><td>7125.00</td><td>60.03</td><td>88.20</td><td>-28.17</td><td>55.07</td><td>4.96</td><td>Peak</td><td>196</td><td>84</td></tr><tr><td>3</td><td>14170.00</td><td>44.52</td><td>68.20</td><td>-23.68</td><td>37.41</td><td>7.11</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>4</td><td>14170.00</td><td>57.72</td><td>88.20</td><td>-30.48</td><td>50.61</td><td>7.11</td><td>Peak</td><td>100</td><td>143</td></tr><tr><td>5</td><td>21255.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>36.53</td><td>4.15</td><td>Average</td><td>100</td><td>93</td></tr><tr><td>6</td><td>21255.00</td><td>53.92</td><td>74.00</td><td>-20.08</td><td>49.77</td><td>4.15</td><td>Peak</td><td>100</td><td>93</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.31	68.20	-19.89	43.35	4.96	Average	196	84	2	7125.00	60.03	88.20	-28.17	55.07	4.96	Peak	196	84	3	14170.00	44.52	68.20	-23.68	37.41	7.11	Average	100	143	4	14170.00	57.72	88.20	-30.48	50.61	7.11	Peak	100	143	5	21255.00	40.68	54.00	-13.32	36.53	4.15	Average	100	93	6	21255.00	53.92	74.00	-20.08	49.77	4.15	Peak	100	93
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.31	68.20	-19.89	43.35	4.96	Average	196	84																																																																
2	7125.00	60.03	88.20	-28.17	55.07	4.96	Peak	196	84																																																																
3	14170.00	44.52	68.20	-23.68	37.41	7.11	Average	100	143																																																																
4	14170.00	57.72	88.20	-30.48	50.61	7.11	Peak	100	143																																																																
5	21255.00	40.68	54.00	-13.32	36.53	4.15	Average	100	93																																																																
6	21255.00	53.92	74.00	-20.08	49.77	4.15	Peak	100	93																																																																

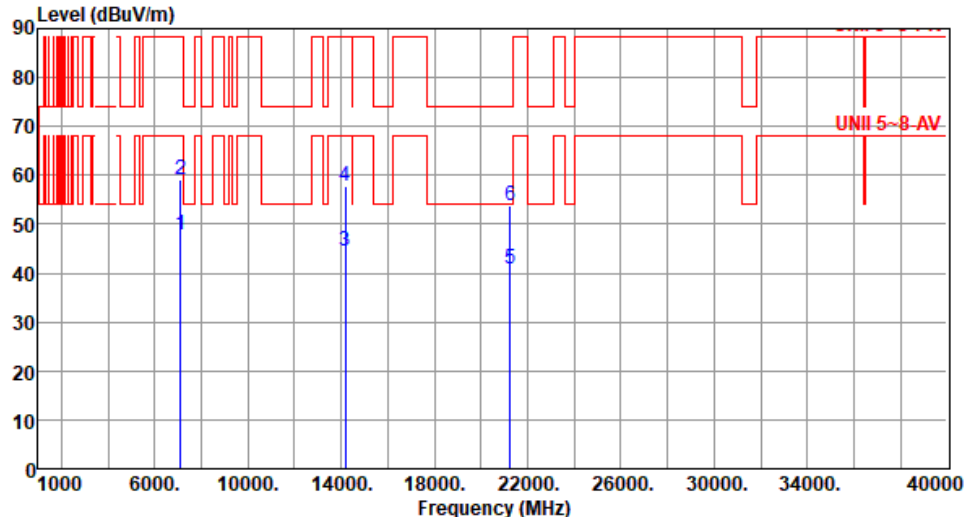

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>47.82</td><td>68.20</td><td>-20.38</td><td>42.86</td><td>4.96</td><td>Average</td><td>349</td><td>18</td></tr><tr><td>2</td><td>7125.00</td><td>59.22</td><td>88.20</td><td>-28.98</td><td>54.26</td><td>4.96</td><td>Peak</td><td>349</td><td>18</td></tr><tr><td>3</td><td>14170.00</td><td>44.53</td><td>68.20</td><td>-23.67</td><td>37.42</td><td>7.11</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>4</td><td>14170.00</td><td>57.75</td><td>88.20</td><td>-30.45</td><td>50.64</td><td>7.11</td><td>Peak</td><td>100</td><td>157</td></tr><tr><td>5</td><td>21255.00</td><td>40.78</td><td>54.00</td><td>-13.22</td><td>36.63</td><td>4.15</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>6</td><td>21255.00</td><td>53.93</td><td>74.00</td><td>-20.07</td><td>49.78</td><td>4.15</td><td>Peak</td><td>100</td><td>123</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.82	68.20	-20.38	42.86	4.96	Average	349	18	2	7125.00	59.22	88.20	-28.98	54.26	4.96	Peak	349	18	3	14170.00	44.53	68.20	-23.67	37.42	7.11	Average	100	157	4	14170.00	57.75	88.20	-30.45	50.64	7.11	Peak	100	157	5	21255.00	40.78	54.00	-13.22	36.63	4.15	Average	100	123	6	21255.00	53.93	74.00	-20.07	49.78	4.15	Peak	100	123
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.82	68.20	-20.38	42.86	4.96	Average	349	18																																																																
2	7125.00	59.22	88.20	-28.98	54.26	4.96	Peak	349	18																																																																
3	14170.00	44.53	68.20	-23.67	37.42	7.11	Average	100	157																																																																
4	14170.00	57.75	88.20	-30.45	50.64	7.11	Peak	100	157																																																																
5	21255.00	40.78	54.00	-13.22	36.63	4.15	Average	100	123																																																																
6	21255.00	53.93	74.00	-20.07	49.78	4.15	Peak	100	123																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									


Unwanted Emissions (Above 1GHz) for be EHT160-OFDMA

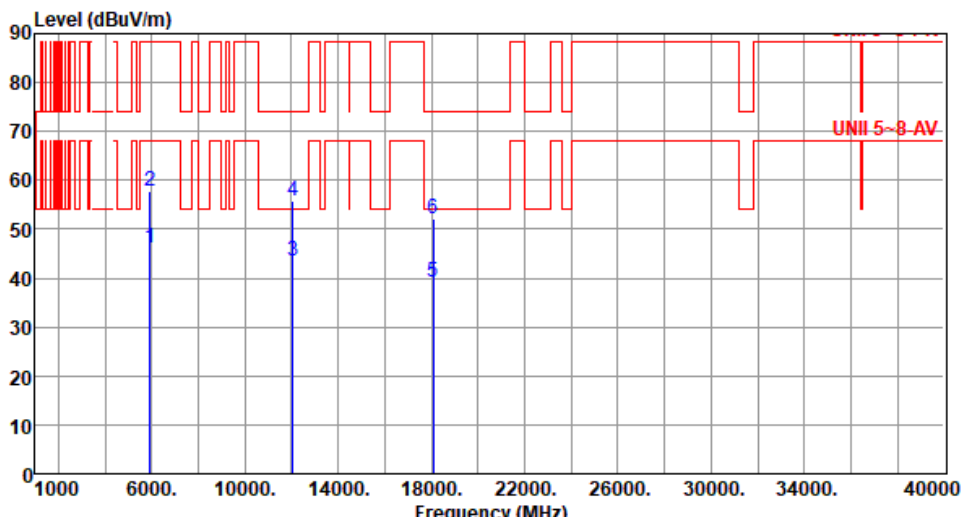Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																																													
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>46.11</td><td>68.20</td><td>-22.09</td><td>44.88</td><td>1.23</td><td>Average</td><td>203</td><td>75</td></tr><tr><td>2</td><td>5925.00</td><td>57.68</td><td>88.20</td><td>-30.52</td><td>56.45</td><td>1.23</td><td>Peak</td><td>203</td><td>75</td></tr><tr><td>3</td><td>12050.00</td><td>43.67</td><td>54.00</td><td>-10.33</td><td>36.97</td><td>6.70</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>4</td><td>12050.00</td><td>55.92</td><td>74.00</td><td>-18.08</td><td>49.22</td><td>6.70</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>5</td><td>18075.00</td><td>39.19</td><td>54.00</td><td>-14.81</td><td>37.26</td><td>1.93</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>6</td><td>18075.00</td><td>52.02</td><td>74.00</td><td>-21.98</td><td>50.09</td><td>1.93</td><td>Peak</td><td>100</td><td>137</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5925.00	46.11	68.20	-22.09	44.88	1.23	Average	203	75	2	5925.00	57.68	88.20	-30.52	56.45	1.23	Peak	203	75	3	12050.00	43.67	54.00	-10.33	36.97	6.70	Average	100	54	4	12050.00	55.92	74.00	-18.08	49.22	6.70	Peak	100	54	5	18075.00	39.19	54.00	-14.81	37.26	1.93	Average	100	137	6	18075.00	52.02	74.00	-21.98	50.09	1.93	Peak	100	137
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	5925.00	46.11	68.20	-22.09	44.88	1.23	Average	203	75																																																																																				
2	5925.00	57.68	88.20	-30.52	56.45	1.23	Peak	203	75																																																																																				
3	12050.00	43.67	54.00	-10.33	36.97	6.70	Average	100	54																																																																																				
4	12050.00	55.92	74.00	-18.08	49.22	6.70	Peak	100	54																																																																																				
5	18075.00	39.19	54.00	-14.81	37.26	1.93	Average	100	137																																																																																				
6	18075.00	52.02	74.00	-21.98	50.09	1.93	Peak	100	137																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>43.82</td><td>68.20</td><td>-24.38</td><td>42.59</td><td>1.23</td><td>Average</td><td>355</td><td>10</td></tr><tr><td>2</td><td>5925.00</td><td>56.19</td><td>88.20</td><td>-32.01</td><td>54.96</td><td>1.23</td><td>Peak</td><td>355</td><td>10</td></tr><tr><td>3</td><td>12050.00</td><td>43.62</td><td>54.00</td><td>-10.38</td><td>36.92</td><td>6.70</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>4</td><td>12050.00</td><td>55.89</td><td>74.00</td><td>-18.11</td><td>49.19</td><td>6.70</td><td>Peak</td><td>100</td><td>104</td></tr><tr><td>5</td><td>18075.00</td><td>39.05</td><td>54.00</td><td>-14.95</td><td>37.12</td><td>1.93</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>6</td><td>18075.00</td><td>52.43</td><td>74.00</td><td>-21.57</td><td>50.50</td><td>1.93</td><td>Peak</td><td>100</td><td>173</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.82	68.20	-24.38	42.59	1.23	Average	355	10	2	5925.00	56.19	88.20	-32.01	54.96	1.23	Peak	355	10	3	12050.00	43.62	54.00	-10.38	36.92	6.70	Average	100	104	4	12050.00	55.89	74.00	-18.11	49.19	6.70	Peak	100	104	5	18075.00	39.05	54.00	-14.95	37.12	1.93	Average	100	173	6	18075.00	52.43	74.00	-21.57	50.50	1.93	Peak	100	173
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.82	68.20	-24.38	42.59	1.23	Average	355	10																																																																
2	5925.00	56.19	88.20	-32.01	54.96	1.23	Peak	355	10																																																																
3	12050.00	43.62	54.00	-10.38	36.92	6.70	Average	100	104																																																																
4	12050.00	55.89	74.00	-18.11	49.19	6.70	Peak	100	104																																																																
5	18075.00	39.05	54.00	-14.95	37.12	1.93	Average	100	173																																																																
6	18075.00	52.43	74.00	-21.57	50.50	1.93	Peak	100	173																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

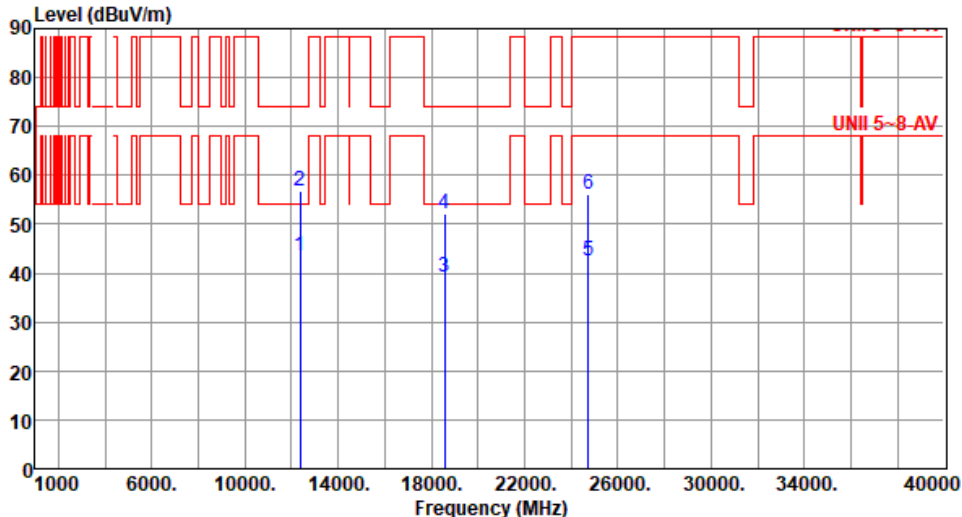


Modulation	be EHT160-OFDMA		Test Freq. (MHz)		6185																																																																										
Polarization	Horizontal																																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12370.00</td><td>43.42</td><td>54.00</td><td>-10.58</td><td>37.10</td><td>6.32</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>2</td><td>12370.00</td><td>56.71</td><td>74.00</td><td>-17.29</td><td>50.39</td><td>6.32</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>3</td><td>18555.00</td><td>39.25</td><td>54.00</td><td>-14.75</td><td>37.82</td><td>1.43</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>4</td><td>18555.00</td><td>52.19</td><td>74.00</td><td>-21.81</td><td>50.76</td><td>1.43</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>5</td><td>24740.00</td><td>42.36</td><td>68.20</td><td>-25.84</td><td>33.84</td><td>8.52</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>6</td><td>24740.00</td><td>56.29</td><td>88.20</td><td>-31.91</td><td>47.77</td><td>8.52</td><td>Peak</td><td>100</td><td>124</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12370.00	43.42	54.00	-10.58	37.10	6.32	Average	100	60	2	12370.00	56.71	74.00	-17.29	50.39	6.32	Peak	100	60	3	18555.00	39.25	54.00	-14.75	37.82	1.43	Average	100	30	4	18555.00	52.19	74.00	-21.81	50.76	1.43	Peak	100	30	5	24740.00	42.36	68.20	-25.84	33.84	8.52	Average	100	124	6	24740.00	56.29	88.20	-31.91	47.77	8.52	Peak	100	124
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	12370.00	43.42	54.00	-10.58	37.10	6.32	Average	100	60																																																																						
2	12370.00	56.71	74.00	-17.29	50.39	6.32	Peak	100	60																																																																						
3	18555.00	39.25	54.00	-14.75	37.82	1.43	Average	100	30																																																																						
4	18555.00	52.19	74.00	-21.81	50.76	1.43	Peak	100	30																																																																						
5	24740.00	42.36	68.20	-25.84	33.84	8.52	Average	100	124																																																																						
6	24740.00	56.29	88.20	-31.91	47.77	8.52	Peak	100	124																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

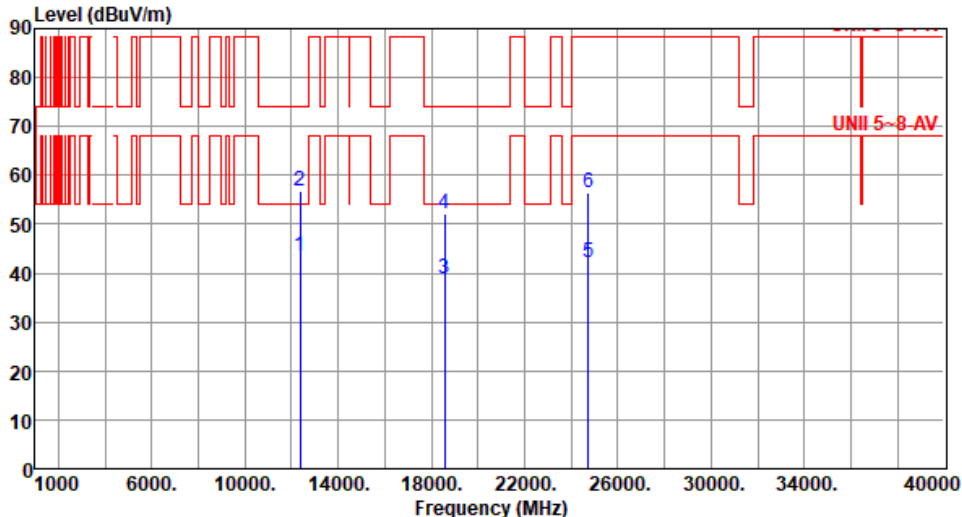


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185																																																												
Polarization	Vertical																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dB reading dB/m High Table dBuV/m dB dBuV dB dBuV dB/m cm deg <table><tr><td>1</td><td>12370.00</td><td>43.46</td><td>54.00</td><td>-10.54</td><td>37.14</td><td>6.32</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>2</td><td>12370.00</td><td>56.69</td><td>74.00</td><td>-17.31</td><td>50.37</td><td>6.32</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>3</td><td>18555.00</td><td>38.78</td><td>54.00</td><td>-15.22</td><td>37.35</td><td>1.43</td><td>Average</td><td>100</td><td>73</td></tr><tr><td>4</td><td>18555.00</td><td>52.16</td><td>74.00</td><td>-21.84</td><td>50.73</td><td>1.43</td><td>Peak</td><td>100</td><td>73</td></tr><tr><td>5</td><td>24740.00</td><td>42.13</td><td>68.20</td><td>-26.07</td><td>33.61</td><td>8.52</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td>24740.00</td><td>56.38</td><td>88.20</td><td>-31.82</td><td>47.86</td><td>8.52</td><td>Peak</td><td>100</td><td>29</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				1	12370.00	43.46	54.00	-10.54	37.14	6.32	Average	100	102	2	12370.00	56.69	74.00	-17.31	50.37	6.32	Peak	100	102	3	18555.00	38.78	54.00	-15.22	37.35	1.43	Average	100	73	4	18555.00	52.16	74.00	-21.84	50.73	1.43	Peak	100	73	5	24740.00	42.13	68.20	-26.07	33.61	8.52	Average	100	29	6	24740.00	56.38	88.20	-31.82	47.86	8.52	Peak	100	29
1	12370.00	43.46	54.00	-10.54	37.14	6.32	Average	100	102																																																						
2	12370.00	56.69	74.00	-17.31	50.37	6.32	Peak	100	102																																																						
3	18555.00	38.78	54.00	-15.22	37.35	1.43	Average	100	73																																																						
4	18555.00	52.16	74.00	-21.84	50.73	1.43	Peak	100	73																																																						
5	24740.00	42.13	68.20	-26.07	33.61	8.52	Average	100	29																																																						
6	24740.00	56.38	88.20	-31.82	47.86	8.52	Peak	100	29																																																						

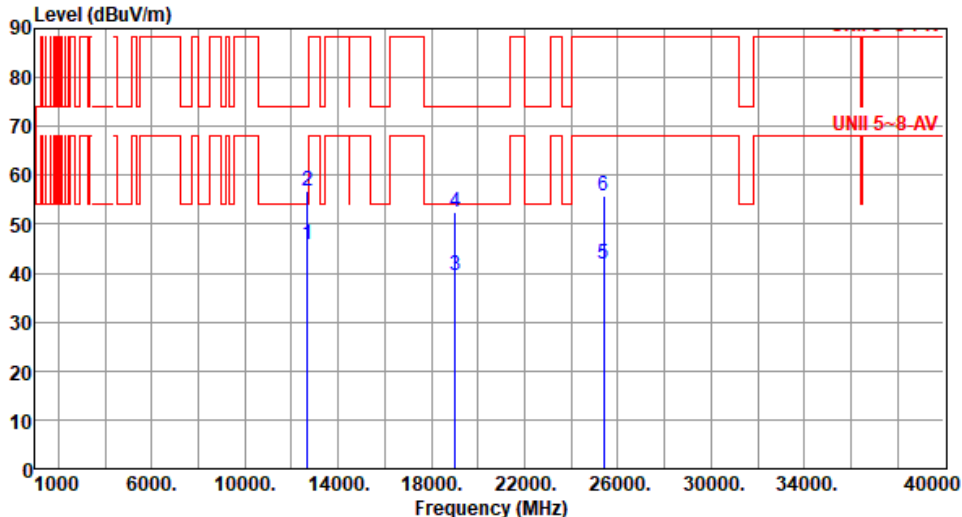


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg 112690.0045.7554.00-8.2539.586.17Average10068 212690.0056.7374.00-17.2750.566.17Peak10068 319035.0039.5454.00-14.4637.402.14Average10077 419035.0052.3874.00-21.6250.242.14Peak10077 525380.0041.8268.20-26.3833.488.34Average100129 625380.0055.8688.20-32.3447.528.34Peak100129 Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			

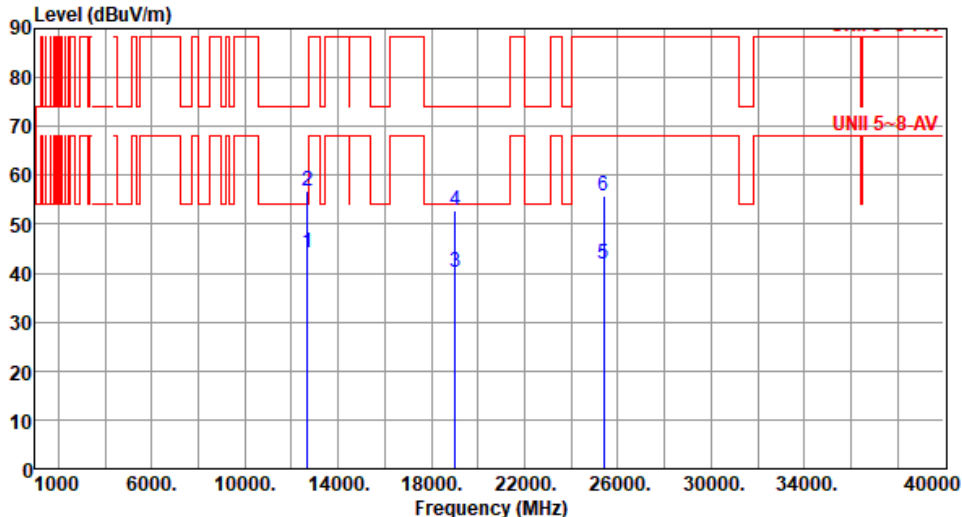

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65									
Level (dBUV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	12690.00	44.15	54.00	-9.85	37.98	6.17	Average	100	42
2	12690.00	56.67	74.00	-17.33	50.50	6.17	Peak	100	42
3	19035.00	40.08	54.00	-13.92	37.94	2.14	Average	100	76
4	19035.00	52.82	74.00	-21.18	50.68	2.14	Peak	100	76
5	25380.00	41.86	68.20	-26.34	33.52	8.34	Average	100	136
6	25380.00	55.83	88.20	-32.37	47.49	8.34	Peak	100	136

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

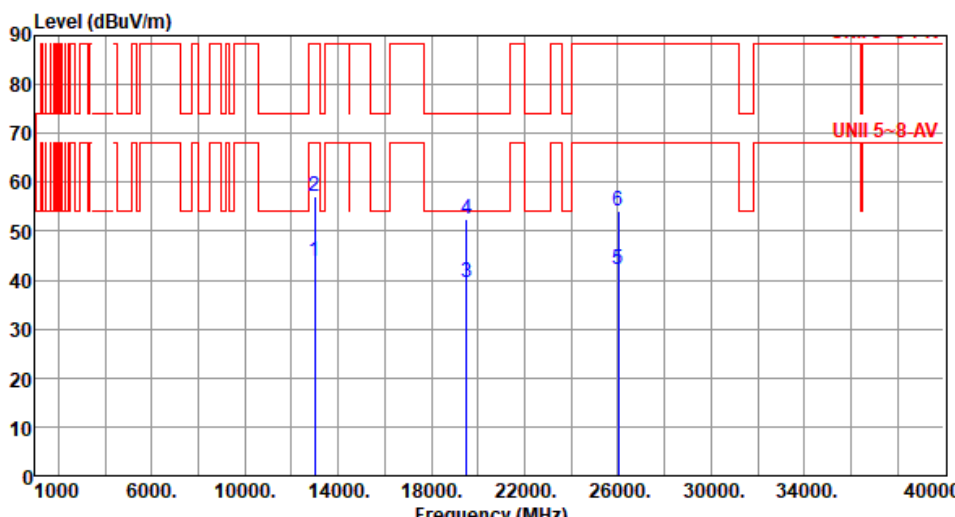

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13010.00	43.92	68.20	-24.28	37.51	6.41	Average	100	74
2	13010.00	57.24	88.20	-30.96	50.83	6.41	Peak	100	74
3	19515.00	39.67	54.00	-14.33	37.46	2.21	Average	100	142
4	19515.00	52.57	74.00	-21.43	50.36	2.21	Peak	100	142
5	26020.00	42.03	68.20	-26.17	34.02	8.01	Average	100	197
6	26020.00	54.18	88.20	-34.02	46.17	8.01	Peak	100	197


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13010.00	43.98	68.20	-24.22	37.57	6.41	Average	100	34
2	13010.00	57.24	88.20	-30.96	50.83	6.41	Peak	100	34
3	19515.00	39.56	54.00	-14.44	37.35	2.21	Average	100	108
4	19515.00	52.49	74.00	-21.51	50.28	2.21	Peak	100	108
5	26020.00	41.80	68.20	-26.40	33.79	8.01	Average	100	73
6	26020.00	53.86	88.20	-34.34	45.85	8.01	Peak	100	73

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

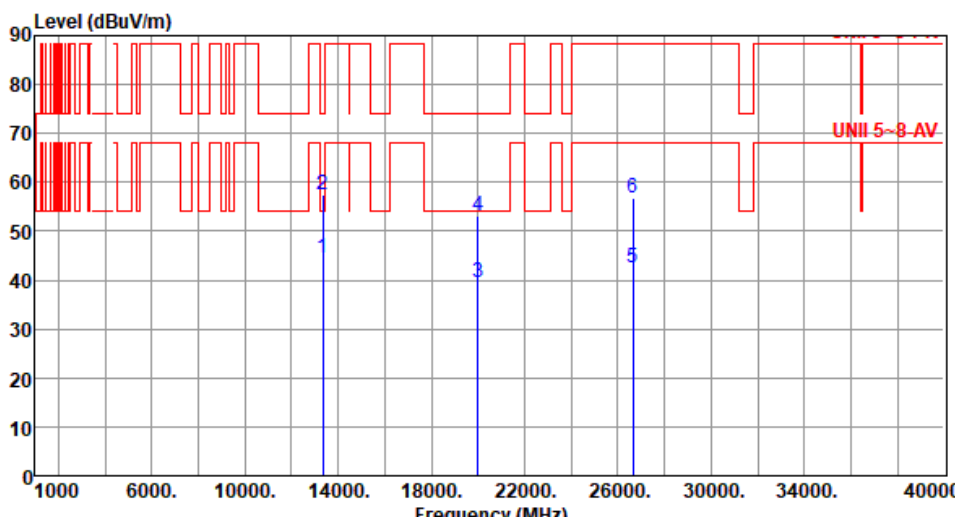

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13330.00</td><td>44.53</td><td>54.00</td><td>-9.47</td><td>38.69</td><td>5.84</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2</td><td>13330.00</td><td>57.33</td><td>74.00</td><td>-16.67</td><td>51.49</td><td>5.84</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>3</td><td>19995.00</td><td>39.47</td><td>54.00</td><td>-14.53</td><td>36.57</td><td>2.90</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>4</td><td>19995.00</td><td>53.13</td><td>74.00</td><td>-20.87</td><td>50.23</td><td>2.90</td><td>Peak</td><td>100</td><td>107</td></tr><tr><td>5</td><td>26660.00</td><td>42.67</td><td>68.20</td><td>-25.53</td><td>33.85</td><td>8.82</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>6</td><td>26660.00</td><td>56.73</td><td>88.20</td><td>-31.47</td><td>47.91</td><td>8.82</td><td>Peak</td><td>100</td><td>45</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13330.00	44.53	54.00	-9.47	38.69	5.84	Average	100	211	2	13330.00	57.33	74.00	-16.67	51.49	5.84	Peak	100	211	3	19995.00	39.47	54.00	-14.53	36.57	2.90	Average	100	107	4	19995.00	53.13	74.00	-20.87	50.23	2.90	Peak	100	107	5	26660.00	42.67	68.20	-25.53	33.85	8.82	Average	100	45	6	26660.00	56.73	88.20	-31.47	47.91	8.82	Peak	100	45
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13330.00	44.53	54.00	-9.47	38.69	5.84	Average	100	211																																																																
2	13330.00	57.33	74.00	-16.67	51.49	5.84	Peak	100	211																																																																
3	19995.00	39.47	54.00	-14.53	36.57	2.90	Average	100	107																																																																
4	19995.00	53.13	74.00	-20.87	50.23	2.90	Peak	100	107																																																																
5	26660.00	42.67	68.20	-25.53	33.85	8.82	Average	100	45																																																																
6	26660.00	56.73	88.20	-31.47	47.91	8.82	Peak	100	45																																																																

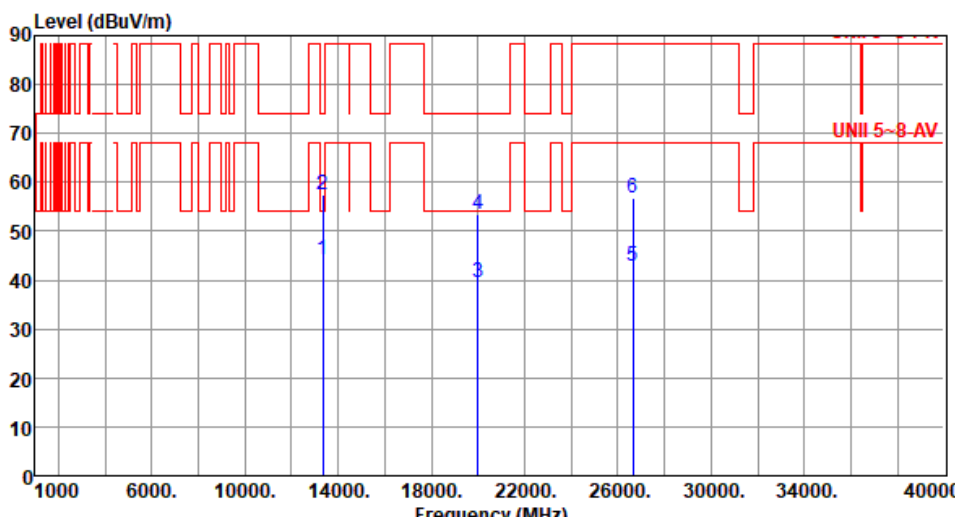

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13330.00</td><td>44.28</td><td>54.00</td><td>-9.72</td><td>38.44</td><td>5.84</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>2</td><td>13330.00</td><td>57.41</td><td>74.00</td><td>-16.59</td><td>51.57</td><td>5.84</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>3</td><td>19995.00</td><td>39.62</td><td>54.00</td><td>-14.38</td><td>36.72</td><td>2.90</td><td>Average</td><td>100</td><td>78</td></tr><tr><td>4</td><td>19995.00</td><td>53.31</td><td>74.00</td><td>-20.69</td><td>50.41</td><td>2.90</td><td>Peak</td><td>100</td><td>78</td></tr><tr><td>5</td><td>26660.00</td><td>42.75</td><td>68.20</td><td>-25.45</td><td>33.93</td><td>8.82</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>6</td><td>26660.00</td><td>56.84</td><td>88.20</td><td>-31.36</td><td>48.02</td><td>8.82</td><td>Peak</td><td>100</td><td>205</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13330.00	44.28	54.00	-9.72	38.44	5.84	Average	100	134	2	13330.00	57.41	74.00	-16.59	51.57	5.84	Peak	100	134	3	19995.00	39.62	54.00	-14.38	36.72	2.90	Average	100	78	4	19995.00	53.31	74.00	-20.69	50.41	2.90	Peak	100	78	5	26660.00	42.75	68.20	-25.45	33.93	8.82	Average	100	205	6	26660.00	56.84	88.20	-31.36	48.02	8.82	Peak	100	205
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13330.00	44.28	54.00	-9.72	38.44	5.84	Average	100	134																																																																
2	13330.00	57.41	74.00	-16.59	51.57	5.84	Peak	100	134																																																																
3	19995.00	39.62	54.00	-14.38	36.72	2.90	Average	100	78																																																																
4	19995.00	53.31	74.00	-20.69	50.41	2.90	Peak	100	78																																																																
5	26660.00	42.75	68.20	-25.45	33.93	8.82	Average	100	205																																																																
6	26660.00	56.84	88.20	-31.36	48.02	8.82	Peak	100	205																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT160-OFDMA		Test Freq. (MHz)		6825																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																																																			
<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13650.00</td><td>45.14</td><td>68.20</td><td>-23.06</td><td>38.93</td><td>6.21</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>2</td><td>13650.00</td><td>58.37</td><td>88.20</td><td>-29.83</td><td>52.16</td><td>6.21</td><td>Peak</td><td>100</td><td>107</td></tr><tr><td>3</td><td>20475.00</td><td>39.73</td><td>54.00</td><td>-14.27</td><td>36.72</td><td>3.01</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>4</td><td>20475.00</td><td>52.26</td><td>74.00</td><td>-21.74</td><td>49.25</td><td>3.01</td><td>Peak</td><td>100</td><td>156</td></tr><tr><td>5</td><td>27300.00</td><td>42.78</td><td>68.20</td><td>-25.42</td><td>34.26</td><td>8.52</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>6</td><td>27300.00</td><td>55.72</td><td>88.20</td><td>-32.48</td><td>47.20</td><td>8.52</td><td>Peak</td><td>100</td><td>58</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13650.00	45.14	68.20	-23.06	38.93	6.21	Average	100	107	2	13650.00	58.37	88.20	-29.83	52.16	6.21	Peak	100	107	3	20475.00	39.73	54.00	-14.27	36.72	3.01	Average	100	156	4	20475.00	52.26	74.00	-21.74	49.25	3.01	Peak	100	156	5	27300.00	42.78	68.20	-25.42	34.26	8.52	Average	100	58	6	27300.00	55.72	88.20	-32.48	47.20	8.52	Peak	100	58
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13650.00	45.14	68.20	-23.06	38.93	6.21	Average	100	107																																																																																										
2	13650.00	58.37	88.20	-29.83	52.16	6.21	Peak	100	107																																																																																										
3	20475.00	39.73	54.00	-14.27	36.72	3.01	Average	100	156																																																																																										
4	20475.00	52.26	74.00	-21.74	49.25	3.01	Peak	100	156																																																																																										
5	27300.00	42.78	68.20	-25.42	34.26	8.52	Average	100	58																																																																																										
6	27300.00	55.72	88.20	-32.48	47.20	8.52	Peak	100	58																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13650.00</td><td>44.85</td><td>68.20</td><td>-23.35</td><td>38.64</td><td>6.21</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>2</td><td>13650.00</td><td>58.42</td><td>88.20</td><td>-29.78</td><td>52.21</td><td>6.21</td><td>Peak</td><td>100</td><td>52</td></tr><tr><td>3</td><td>20475.00</td><td>39.73</td><td>54.00</td><td>-14.27</td><td>36.72</td><td>3.01</td><td>Average</td><td>100</td><td>87</td></tr><tr><td>4</td><td>20475.00</td><td>52.36</td><td>74.00</td><td>-21.64</td><td>49.35</td><td>3.01</td><td>Peak</td><td>100</td><td>87</td></tr><tr><td>5</td><td>27300.00</td><td>42.82</td><td>68.20</td><td>-25.38</td><td>34.30</td><td>8.52</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>6</td><td>27300.00</td><td>55.86</td><td>88.20</td><td>-32.34</td><td>47.34</td><td>8.52</td><td>Peak</td><td>100</td><td>145</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13650.00	44.85	68.20	-23.35	38.64	6.21	Average	100	52	2	13650.00	58.42	88.20	-29.78	52.21	6.21	Peak	100	52	3	20475.00	39.73	54.00	-14.27	36.72	3.01	Average	100	87	4	20475.00	52.36	74.00	-21.64	49.35	3.01	Peak	100	87	5	27300.00	42.82	68.20	-25.38	34.30	8.52	Average	100	145	6	27300.00	55.86	88.20	-32.34	47.34	8.52	Peak	100	145
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13650.00	44.85	68.20	-23.35	38.64	6.21	Average	100	52																																																																
2	13650.00	58.42	88.20	-29.78	52.21	6.21	Peak	100	52																																																																
3	20475.00	39.73	54.00	-14.27	36.72	3.01	Average	100	87																																																																
4	20475.00	52.36	74.00	-21.64	49.35	3.01	Peak	100	87																																																																
5	27300.00	42.82	68.20	-25.38	34.30	8.52	Average	100	145																																																																
6	27300.00	55.86	88.20	-32.34	47.34	8.52	Peak	100	145																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.28</td><td>68.20</td><td>-19.92</td><td>43.32</td><td>4.96</td><td>Average</td><td>211</td><td>65</td></tr><tr><td>2</td><td>7125.00</td><td>59.58</td><td>88.20</td><td>-28.62</td><td>54.62</td><td>4.96</td><td>Peak</td><td>211</td><td>65</td></tr><tr><td>3</td><td>13970.00</td><td>46.28</td><td>68.20</td><td>-21.92</td><td>39.56</td><td>6.72</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>4</td><td>13970.00</td><td>58.43</td><td>88.20</td><td>-29.77</td><td>51.71</td><td>6.72</td><td>Peak</td><td>100</td><td>79</td></tr><tr><td>5</td><td>20955.00</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>36.51</td><td>3.74</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>6</td><td>20955.00</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>49.75</td><td>3.74</td><td>Peak</td><td>100</td><td>127</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.28	68.20	-19.92	43.32	4.96	Average	211	65	2	7125.00	59.58	88.20	-28.62	54.62	4.96	Peak	211	65	3	13970.00	46.28	68.20	-21.92	39.56	6.72	Average	100	79	4	13970.00	58.43	88.20	-29.77	51.71	6.72	Peak	100	79	5	20955.00	40.25	54.00	-13.75	36.51	3.74	Average	100	127	6	20955.00	53.49	74.00	-20.51	49.75	3.74	Peak	100	127
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.28	68.20	-19.92	43.32	4.96	Average	211	65																																																																
2	7125.00	59.58	88.20	-28.62	54.62	4.96	Peak	211	65																																																																
3	13970.00	46.28	68.20	-21.92	39.56	6.72	Average	100	79																																																																
4	13970.00	58.43	88.20	-29.77	51.71	6.72	Peak	100	79																																																																
5	20955.00	40.25	54.00	-13.75	36.51	3.74	Average	100	127																																																																
6	20955.00	53.49	74.00	-20.51	49.75	3.74	Peak	100	127																																																																

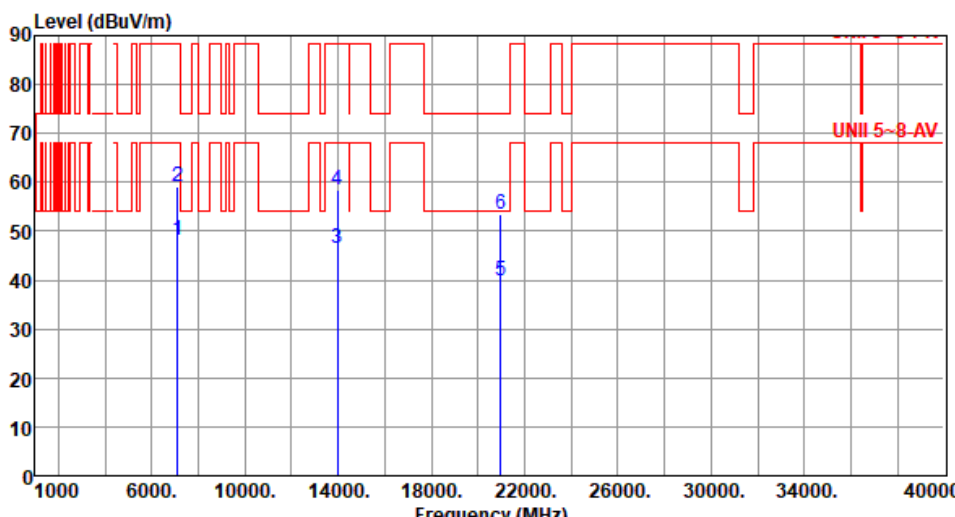


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.19</td><td>68.20</td><td>-20.01</td><td>43.23</td><td>4.96</td><td>Average</td><td>349</td><td>17</td></tr><tr><td>2</td><td>7125.00</td><td>59.24</td><td>88.20</td><td>-28.96</td><td>54.28</td><td>4.96</td><td>Peak</td><td>349</td><td>17</td></tr><tr><td>3</td><td>13970.00</td><td>46.37</td><td>68.20</td><td>-21.83</td><td>39.65</td><td>6.72</td><td>Average</td><td>100</td><td>93</td></tr><tr><td>4</td><td>13970.00</td><td>58.48</td><td>88.20</td><td>-29.72</td><td>51.76</td><td>6.72</td><td>Peak</td><td>100</td><td>93</td></tr><tr><td>5</td><td>20955.00</td><td>39.89</td><td>54.00</td><td>-14.11</td><td>36.15</td><td>3.74</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>6</td><td>20955.00</td><td>53.41</td><td>74.00</td><td>-20.59</td><td>49.67</td><td>3.74</td><td>Peak</td><td>100</td><td>158</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.19	68.20	-20.01	43.23	4.96	Average	349	17	2	7125.00	59.24	88.20	-28.96	54.28	4.96	Peak	349	17	3	13970.00	46.37	68.20	-21.83	39.65	6.72	Average	100	93	4	13970.00	58.48	88.20	-29.72	51.76	6.72	Peak	100	93	5	20955.00	39.89	54.00	-14.11	36.15	3.74	Average	100	158	6	20955.00	53.41	74.00	-20.59	49.67	3.74	Peak	100	158
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.19	68.20	-20.01	43.23	4.96	Average	349	17																																																																
2	7125.00	59.24	88.20	-28.96	54.28	4.96	Peak	349	17																																																																
3	13970.00	46.37	68.20	-21.83	39.65	6.72	Average	100	93																																																																
4	13970.00	58.48	88.20	-29.72	51.76	6.72	Peak	100	93																																																																
5	20955.00	39.89	54.00	-14.11	36.15	3.74	Average	100	158																																																																
6	20955.00	53.41	74.00	-20.59	49.67	3.74	Peak	100	158																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									


Unwanted Emissions (Above 1GHz) for be EHT320-OFDMA

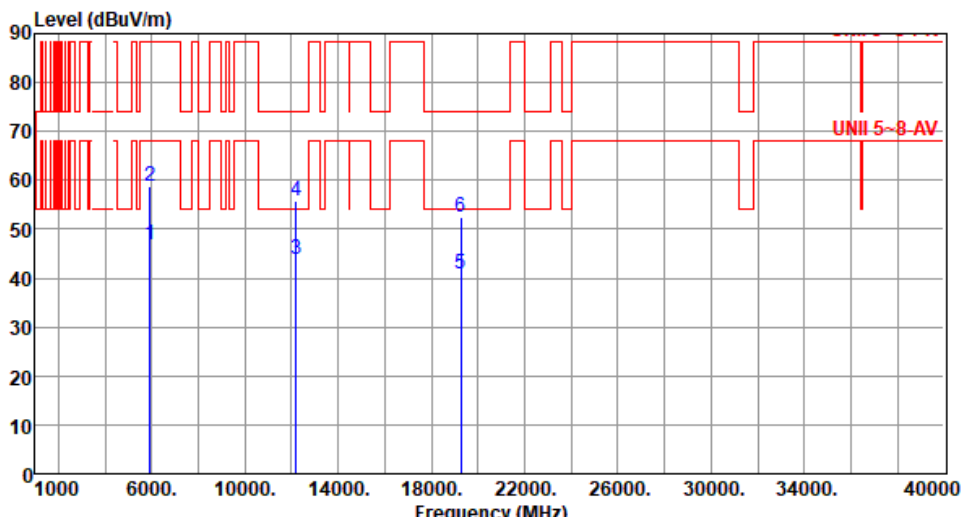Modulation	be EHT320-OFDMA		Test Freq. (MHz)		6105																																																																										
Polarization	Horizontal																																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																															
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>46.76</td><td>68.20</td><td>-21.44</td><td>45.53</td><td>1.23</td><td>Average</td><td>204</td><td>85</td></tr><tr><td>2</td><td>5925.00</td><td>58.76</td><td>88.20</td><td>-29.44</td><td>57.53</td><td>1.23</td><td>Peak</td><td>204</td><td>85</td></tr><tr><td>3</td><td>12210.00</td><td>43.82</td><td>54.00</td><td>-10.18</td><td>37.29</td><td>6.53</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>4</td><td>12210.00</td><td>55.85</td><td>74.00</td><td>-18.15</td><td>49.32</td><td>6.53</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>5</td><td>19275.00</td><td>40.92</td><td>54.00</td><td>-13.08</td><td>38.64</td><td>2.28</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>6</td><td>19275.00</td><td>52.31</td><td>74.00</td><td>-21.69</td><td>50.03</td><td>2.28</td><td>Peak</td><td>100</td><td>211</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	46.76	68.20	-21.44	45.53	1.23	Average	204	85	2	5925.00	58.76	88.20	-29.44	57.53	1.23	Peak	204	85	3	12210.00	43.82	54.00	-10.18	37.29	6.53	Average	100	134	4	12210.00	55.85	74.00	-18.15	49.32	6.53	Peak	100	134	5	19275.00	40.92	54.00	-13.08	38.64	2.28	Average	100	211	6	19275.00	52.31	74.00	-21.69	50.03	2.28	Peak	100	211
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	5925.00	46.76	68.20	-21.44	45.53	1.23	Average	204	85																																																																						
2	5925.00	58.76	88.20	-29.44	57.53	1.23	Peak	204	85																																																																						
3	12210.00	43.82	54.00	-10.18	37.29	6.53	Average	100	134																																																																						
4	12210.00	55.85	74.00	-18.15	49.32	6.53	Peak	100	134																																																																						
5	19275.00	40.92	54.00	-13.08	38.64	2.28	Average	100	211																																																																						
6	19275.00	52.31	74.00	-21.69	50.03	2.28	Peak	100	211																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

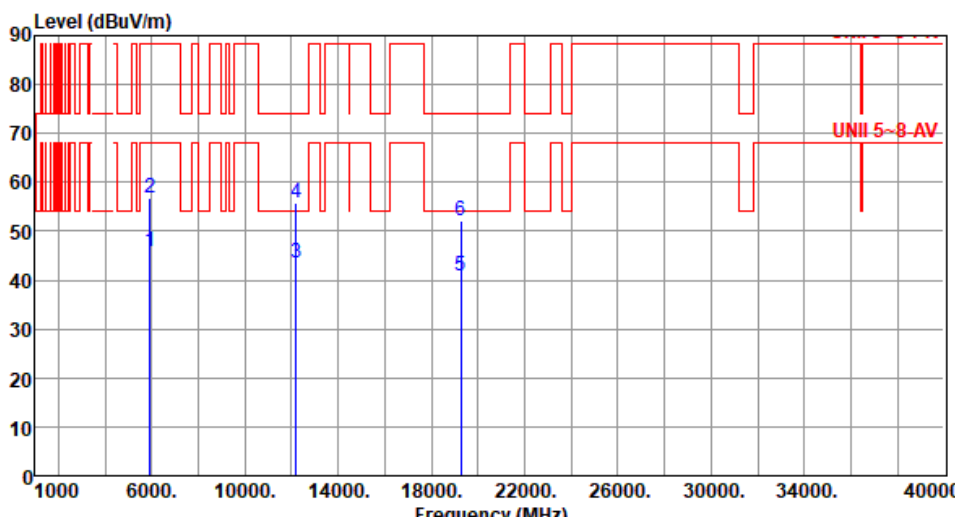


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>45.77</td><td>68.20</td><td>-22.43</td><td>44.54</td><td>1.23</td><td>Average</td><td>345</td><td>25</td></tr><tr><td>2</td><td>5925.00</td><td>56.86</td><td>88.20</td><td>-31.34</td><td>55.63</td><td>1.23</td><td>Peak</td><td>345</td><td>25</td></tr><tr><td>3</td><td>12210.00</td><td>43.65</td><td>54.00</td><td>-10.35</td><td>37.12</td><td>6.53</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>4</td><td>12210.00</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>49.19</td><td>6.53</td><td>Peak</td><td>100</td><td>202</td></tr><tr><td>5</td><td>19275.00</td><td>40.87</td><td>54.00</td><td>-13.13</td><td>38.59</td><td>2.28</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>6</td><td>19275.00</td><td>52.16</td><td>74.00</td><td>-21.84</td><td>49.88</td><td>2.28</td><td>Peak</td><td>100</td><td>125</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	45.77	68.20	-22.43	44.54	1.23	Average	345	25	2	5925.00	56.86	88.20	-31.34	55.63	1.23	Peak	345	25	3	12210.00	43.65	54.00	-10.35	37.12	6.53	Average	100	202	4	12210.00	55.72	74.00	-18.28	49.19	6.53	Peak	100	202	5	19275.00	40.87	54.00	-13.13	38.59	2.28	Average	100	125	6	19275.00	52.16	74.00	-21.84	49.88	2.28	Peak	100	125
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	45.77	68.20	-22.43	44.54	1.23	Average	345	25																																																																
2	5925.00	56.86	88.20	-31.34	55.63	1.23	Peak	345	25																																																																
3	12210.00	43.65	54.00	-10.35	37.12	6.53	Average	100	202																																																																
4	12210.00	55.72	74.00	-18.28	49.19	6.53	Peak	100	202																																																																
5	19275.00	40.87	54.00	-13.13	38.59	2.28	Average	100	125																																																																
6	19275.00	52.16	74.00	-21.84	49.88	2.28	Peak	100	125																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

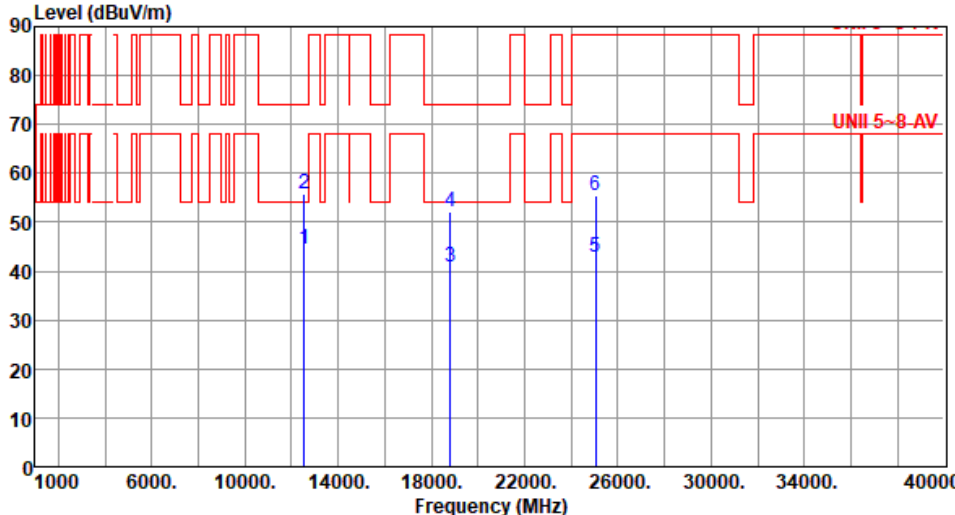


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6265																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12530.00</td><td>44.63</td><td>54.00</td><td>-9.37</td><td>38.66</td><td>5.97</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>2</td><td>12530.00</td><td>55.79</td><td>74.00</td><td>-18.21</td><td>49.82</td><td>5.97</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>3</td><td>18795.00</td><td>40.83</td><td>54.00</td><td>-13.17</td><td>38.82</td><td>2.01</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>18795.00</td><td>51.98</td><td>74.00</td><td>-22.02</td><td>49.97</td><td>2.01</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>5</td><td>25060.00</td><td>42.76</td><td>68.20</td><td>-25.44</td><td>34.15</td><td>8.61</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>6</td><td>25060.00</td><td>55.49</td><td>88.20</td><td>-32.71</td><td>46.88</td><td>8.61</td><td>Peak</td><td>100</td><td>223</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12530.00	44.63	54.00	-9.37	38.66	5.97	Average	100	118	2	12530.00	55.79	74.00	-18.21	49.82	5.97	Peak	100	118	3	18795.00	40.83	54.00	-13.17	38.82	2.01	Average	100	67	4	18795.00	51.98	74.00	-22.02	49.97	2.01	Peak	100	67	5	25060.00	42.76	68.20	-25.44	34.15	8.61	Average	100	223	6	25060.00	55.49	88.20	-32.71	46.88	8.61	Peak	100	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12530.00	44.63	54.00	-9.37	38.66	5.97	Average	100	118																																																																
2	12530.00	55.79	74.00	-18.21	49.82	5.97	Peak	100	118																																																																
3	18795.00	40.83	54.00	-13.17	38.82	2.01	Average	100	67																																																																
4	18795.00	51.98	74.00	-22.02	49.97	2.01	Peak	100	67																																																																
5	25060.00	42.76	68.20	-25.44	34.15	8.61	Average	100	223																																																																
6	25060.00	55.49	88.20	-32.71	46.88	8.61	Peak	100	223																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

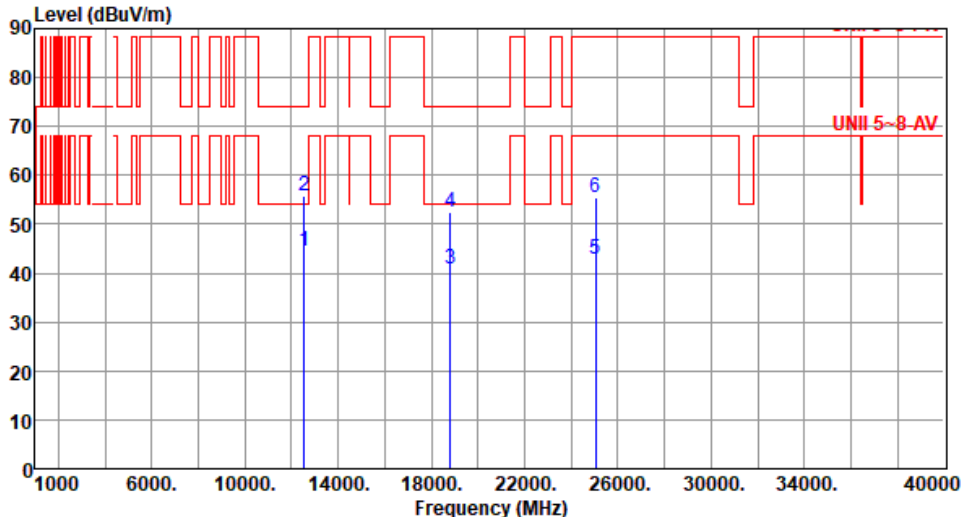

Modulation	be EHT320-OFDMA		Test Freq. (MHz)		6265																																																																																														
Polarization	Vertical																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12530.00</td><td>44.64</td><td>54.00</td><td>-9.36</td><td>38.67</td><td>5.97</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>2</td><td>12530.00</td><td>55.80</td><td>74.00</td><td>-18.20</td><td>49.83</td><td>5.97</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>3</td><td>18795.00</td><td>40.97</td><td>54.00</td><td>-13.03</td><td>38.96</td><td>2.01</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>4</td><td>18795.00</td><td>52.37</td><td>74.00</td><td>-21.63</td><td>50.36</td><td>2.01</td><td>Peak</td><td>100</td><td>71</td></tr><tr><td>5</td><td>25060.00</td><td>42.75</td><td>68.20</td><td>-25.45</td><td>34.14</td><td>8.61</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td>25060.00</td><td>55.35</td><td>88.20</td><td>-32.85</td><td>46.74</td><td>8.61</td><td>Peak</td><td>100</td><td>29</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12530.00	44.64	54.00	-9.36	38.67	5.97	Average	100	146	2	12530.00	55.80	74.00	-18.20	49.83	5.97	Peak	100	146	3	18795.00	40.97	54.00	-13.03	38.96	2.01	Average	100	71	4	18795.00	52.37	74.00	-21.63	50.36	2.01	Peak	100	71	5	25060.00	42.75	68.20	-25.45	34.14	8.61	Average	100	29	6	25060.00	55.35	88.20	-32.85	46.74	8.61	Peak	100	29
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	12530.00	44.64	54.00	-9.36	38.67	5.97	Average	100	146																																																																																										
2	12530.00	55.80	74.00	-18.20	49.83	5.97	Peak	100	146																																																																																										
3	18795.00	40.97	54.00	-13.03	38.96	2.01	Average	100	71																																																																																										
4	18795.00	52.37	74.00	-21.63	50.36	2.01	Peak	100	71																																																																																										
5	25060.00	42.75	68.20	-25.45	34.14	8.61	Average	100	29																																																																																										
6	25060.00	55.35	88.20	-32.85	46.74	8.61	Peak	100	29																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

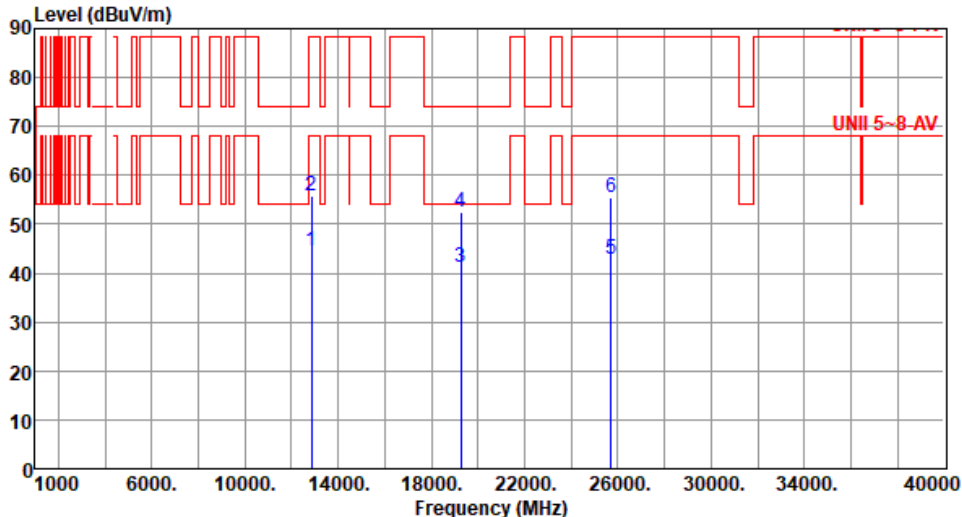


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12850.00</td><td>44.58</td><td>68.20</td><td>-23.62</td><td>38.21</td><td>6.37</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>2</td><td>12850.00</td><td>55.64</td><td>88.20</td><td>-32.56</td><td>49.27</td><td>6.37</td><td>Peak</td><td>100</td><td>72</td></tr><tr><td>3</td><td>19275.00</td><td>41.23</td><td>54.00</td><td>-12.77</td><td>38.95</td><td>2.28</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>19275.00</td><td>52.35</td><td>74.00</td><td>-21.65</td><td>50.07</td><td>2.28</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>5</td><td>25700.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>34.46</td><td>8.25</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>6</td><td>25700.00</td><td>55.43</td><td>88.20</td><td>-32.77</td><td>47.18</td><td>8.25</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12850.00	44.58	68.20	-23.62	38.21	6.37	Average	100	72	2	12850.00	55.64	88.20	-32.56	49.27	6.37	Peak	100	72	3	19275.00	41.23	54.00	-12.77	38.95	2.28	Average	100	114	4	19275.00	52.35	74.00	-21.65	50.07	2.28	Peak	100	114	5	25700.00	42.71	68.20	-25.49	34.46	8.25	Average	100	204	6	25700.00	55.43	88.20	-32.77	47.18	8.25	Peak	100	204
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12850.00	44.58	68.20	-23.62	38.21	6.37	Average	100	72																																																																
2	12850.00	55.64	88.20	-32.56	49.27	6.37	Peak	100	72																																																																
3	19275.00	41.23	54.00	-12.77	38.95	2.28	Average	100	114																																																																
4	19275.00	52.35	74.00	-21.65	50.07	2.28	Peak	100	114																																																																
5	25700.00	42.71	68.20	-25.49	34.46	8.25	Average	100	204																																																																
6	25700.00	55.43	88.20	-32.77	47.18	8.25	Peak	100	204																																																																



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12850.00</td><td>44.57</td><td>68.20</td><td>-23.63</td><td>38.20</td><td>6.37</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>2</td><td>12850.00</td><td>55.72</td><td>88.20</td><td>-32.48</td><td>49.35</td><td>6.37</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>3</td><td>19275.00</td><td>40.83</td><td>54.00</td><td>-13.17</td><td>38.55</td><td>2.28</td><td>Average</td><td>100</td><td>226</td></tr><tr><td>4</td><td>19275.00</td><td>52.37</td><td>74.00</td><td>-21.63</td><td>50.09</td><td>2.28</td><td>Peak</td><td>100</td><td>226</td></tr><tr><td>5</td><td>25700.00</td><td>42.58</td><td>68.20</td><td>-25.62</td><td>34.33</td><td>8.25</td><td>Average</td><td>100</td><td>86</td></tr><tr><td>6</td><td>25700.00</td><td>55.26</td><td>88.20</td><td>-32.94</td><td>47.01</td><td>8.25</td><td>Peak</td><td>100</td><td>86</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12850.00	44.57	68.20	-23.63	38.20	6.37	Average	100	134	2	12850.00	55.72	88.20	-32.48	49.35	6.37	Peak	100	134	3	19275.00	40.83	54.00	-13.17	38.55	2.28	Average	100	226	4	19275.00	52.37	74.00	-21.63	50.09	2.28	Peak	100	226	5	25700.00	42.58	68.20	-25.62	34.33	8.25	Average	100	86	6	25700.00	55.26	88.20	-32.94	47.01	8.25	Peak	100	86
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12850.00	44.57	68.20	-23.63	38.20	6.37	Average	100	134																																																																
2	12850.00	55.72	88.20	-32.48	49.35	6.37	Peak	100	134																																																																
3	19275.00	40.83	54.00	-13.17	38.55	2.28	Average	100	226																																																																
4	19275.00	52.37	74.00	-21.63	50.09	2.28	Peak	100	226																																																																
5	25700.00	42.58	68.20	-25.62	34.33	8.25	Average	100	86																																																																
6	25700.00	55.26	88.20	-32.94	47.01	8.25	Peak	100	86																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

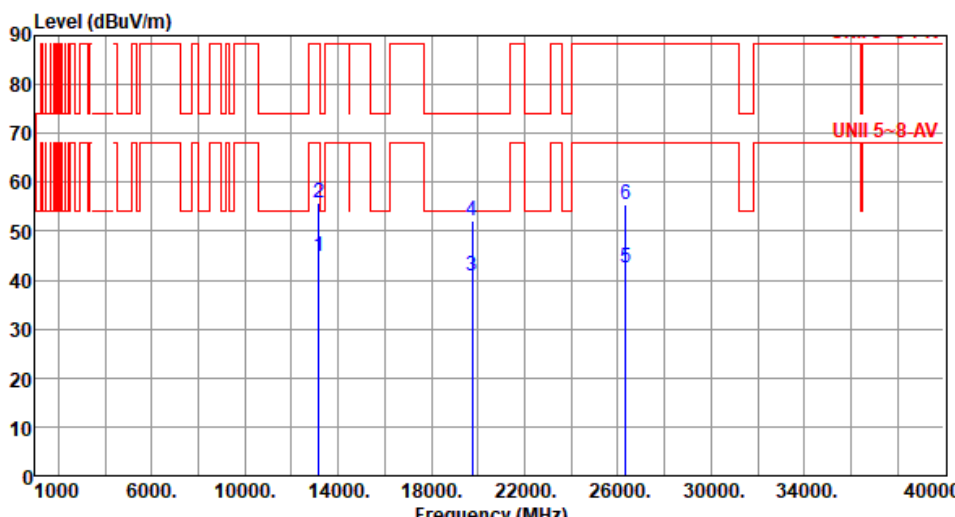


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13170.00</td><td>44.73</td><td>68.20</td><td>-23.47</td><td>38.81</td><td>5.92</td><td>Average</td><td>100</td><td>183</td></tr><tr><td>2</td><td>13170.00</td><td>55.72</td><td>88.20</td><td>-32.48</td><td>49.80</td><td>5.92</td><td>Peak</td><td>100</td><td>183</td></tr><tr><td>3</td><td>19755.00</td><td>40.96</td><td>54.00</td><td>-13.04</td><td>38.37</td><td>2.59</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>4</td><td>19755.00</td><td>52.08</td><td>74.00</td><td>-21.92</td><td>49.49</td><td>2.59</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>5</td><td>26340.00</td><td>42.56</td><td>68.20</td><td>-25.64</td><td>34.03</td><td>8.53</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>6</td><td>26340.00</td><td>55.39</td><td>88.20</td><td>-32.81</td><td>46.86</td><td>8.53</td><td>Peak</td><td>100</td><td>57</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13170.00	44.73	68.20	-23.47	38.81	5.92	Average	100	183	2	13170.00	55.72	88.20	-32.48	49.80	5.92	Peak	100	183	3	19755.00	40.96	54.00	-13.04	38.37	2.59	Average	100	126	4	19755.00	52.08	74.00	-21.92	49.49	2.59	Peak	100	126	5	26340.00	42.56	68.20	-25.64	34.03	8.53	Average	100	57	6	26340.00	55.39	88.20	-32.81	46.86	8.53	Peak	100	57
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13170.00	44.73	68.20	-23.47	38.81	5.92	Average	100	183																																																																
2	13170.00	55.72	88.20	-32.48	49.80	5.92	Peak	100	183																																																																
3	19755.00	40.96	54.00	-13.04	38.37	2.59	Average	100	126																																																																
4	19755.00	52.08	74.00	-21.92	49.49	2.59	Peak	100	126																																																																
5	26340.00	42.56	68.20	-25.64	34.03	8.53	Average	100	57																																																																
6	26340.00	55.39	88.20	-32.81	46.86	8.53	Peak	100	57																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13170.00</td><td>44.61</td><td>68.20</td><td>-23.59</td><td>38.69</td><td>5.92</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>2</td><td>13170.00</td><td>55.73</td><td>88.20</td><td>-32.47</td><td>49.81</td><td>5.92</td><td>Peak</td><td>100</td><td>133</td></tr><tr><td>3</td><td>19755.00</td><td>40.85</td><td>54.00</td><td>-13.15</td><td>38.26</td><td>2.59</td><td>Average</td><td>100</td><td>192</td></tr><tr><td>4</td><td>19755.00</td><td>52.19</td><td>74.00</td><td>-21.81</td><td>49.60</td><td>2.59</td><td>Peak</td><td>100</td><td>192</td></tr><tr><td>5</td><td>26340.00</td><td>42.67</td><td>68.20</td><td>-25.53</td><td>34.14</td><td>8.53</td><td>Average</td><td>100</td><td>94</td></tr><tr><td>6</td><td>26340.00</td><td>55.37</td><td>88.20</td><td>-32.83</td><td>46.84</td><td>8.53</td><td>Peak</td><td>100</td><td>94</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13170.00	44.61	68.20	-23.59	38.69	5.92	Average	100	133	2	13170.00	55.73	88.20	-32.47	49.81	5.92	Peak	100	133	3	19755.00	40.85	54.00	-13.15	38.26	2.59	Average	100	192	4	19755.00	52.19	74.00	-21.81	49.60	2.59	Peak	100	192	5	26340.00	42.67	68.20	-25.53	34.14	8.53	Average	100	94	6	26340.00	55.37	88.20	-32.83	46.84	8.53	Peak	100	94
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13170.00	44.61	68.20	-23.59	38.69	5.92	Average	100	133																																																																
2	13170.00	55.73	88.20	-32.47	49.81	5.92	Peak	100	133																																																																
3	19755.00	40.85	54.00	-13.15	38.26	2.59	Average	100	192																																																																
4	19755.00	52.19	74.00	-21.81	49.60	2.59	Peak	100	192																																																																
5	26340.00	42.67	68.20	-25.53	34.14	8.53	Average	100	94																																																																
6	26340.00	55.37	88.20	-32.83	46.84	8.53	Peak	100	94																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

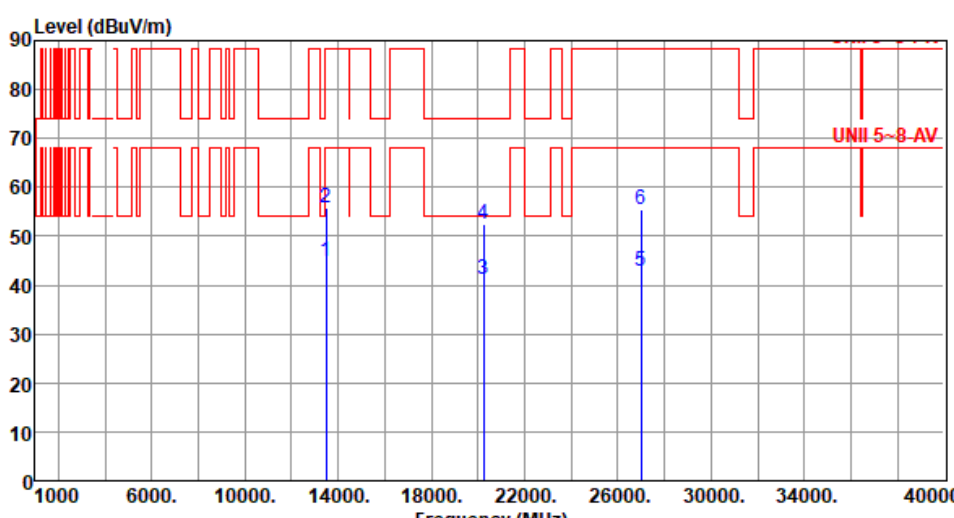


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13490.00</td><td>44.75</td><td>68.20</td><td>-23.45</td><td>38.60</td><td>6.15</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>2</td><td>13490.00</td><td>55.86</td><td>88.20</td><td>-32.34</td><td>49.71</td><td>6.15</td><td>Peak</td><td>100</td><td>152</td></tr><tr><td>3</td><td>20235.00</td><td>41.22</td><td>54.00</td><td>-12.78</td><td>38.35</td><td>2.87</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>20235.00</td><td>52.45</td><td>74.00</td><td>-21.55</td><td>49.58</td><td>2.87</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>5</td><td>26980.00</td><td>42.68</td><td>68.20</td><td>-25.52</td><td>33.80</td><td>8.88</td><td>Average</td><td>100</td><td>95</td></tr><tr><td>6</td><td>26980.00</td><td>55.47</td><td>88.20</td><td>-32.73</td><td>46.59</td><td>8.88</td><td>Peak</td><td>100</td><td>95</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13490.00	44.75	68.20	-23.45	38.60	6.15	Average	100	152	2	13490.00	55.86	88.20	-32.34	49.71	6.15	Peak	100	152	3	20235.00	41.22	54.00	-12.78	38.35	2.87	Average	100	67	4	20235.00	52.45	74.00	-21.55	49.58	2.87	Peak	100	67	5	26980.00	42.68	68.20	-25.52	33.80	8.88	Average	100	95	6	26980.00	55.47	88.20	-32.73	46.59	8.88	Peak	100	95
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13490.00	44.75	68.20	-23.45	38.60	6.15	Average	100	152																																																																
2	13490.00	55.86	88.20	-32.34	49.71	6.15	Peak	100	152																																																																
3	20235.00	41.22	54.00	-12.78	38.35	2.87	Average	100	67																																																																
4	20235.00	52.45	74.00	-21.55	49.58	2.87	Peak	100	67																																																																
5	26980.00	42.68	68.20	-25.52	33.80	8.88	Average	100	95																																																																
6	26980.00	55.47	88.20	-32.73	46.59	8.88	Peak	100	95																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

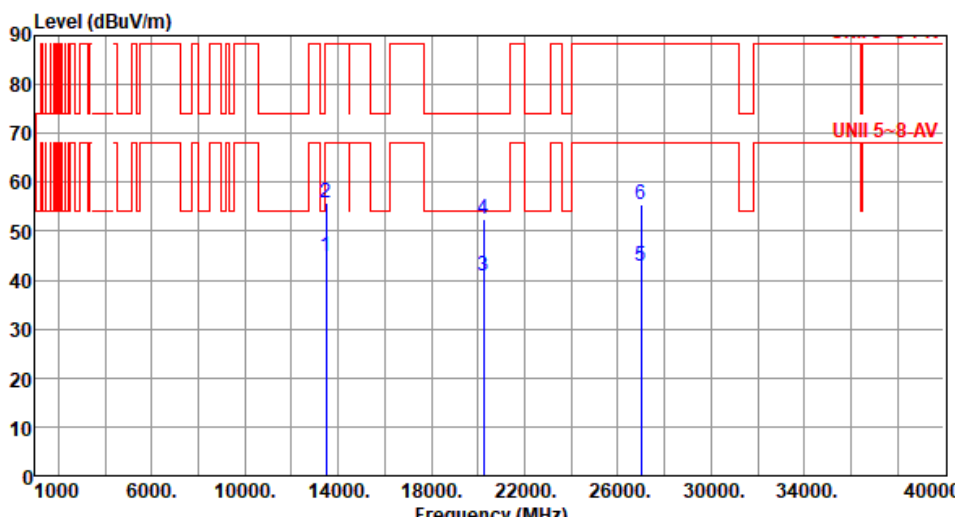

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13490.00</td><td>44.74</td><td>68.20</td><td>-23.46</td><td>38.59</td><td>6.15</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>2</td><td>13490.00</td><td>55.78</td><td>88.20</td><td>-32.42</td><td>49.63</td><td>6.15</td><td>Peak</td><td>100</td><td>51</td></tr><tr><td>3</td><td>20235.00</td><td>40.98</td><td>54.00</td><td>-13.02</td><td>38.11</td><td>2.87</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>4</td><td>20235.00</td><td>52.31</td><td>74.00</td><td>-21.69</td><td>49.44</td><td>2.87</td><td>Peak</td><td>100</td><td>117</td></tr><tr><td>5</td><td>26980.00</td><td>42.76</td><td>68.20</td><td>-25.44</td><td>33.88</td><td>8.88</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>6</td><td>26980.00</td><td>55.52</td><td>88.20</td><td>-32.68</td><td>46.64</td><td>8.88</td><td>Peak</td><td>100</td><td>84</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13490.00	44.74	68.20	-23.46	38.59	6.15	Average	100	51	2	13490.00	55.78	88.20	-32.42	49.63	6.15	Peak	100	51	3	20235.00	40.98	54.00	-13.02	38.11	2.87	Average	100	117	4	20235.00	52.31	74.00	-21.69	49.44	2.87	Peak	100	117	5	26980.00	42.76	68.20	-25.44	33.88	8.88	Average	100	84	6	26980.00	55.52	88.20	-32.68	46.64	8.88	Peak	100	84
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13490.00	44.74	68.20	-23.46	38.59	6.15	Average	100	51																																																																
2	13490.00	55.78	88.20	-32.42	49.63	6.15	Peak	100	51																																																																
3	20235.00	40.98	54.00	-13.02	38.11	2.87	Average	100	117																																																																
4	20235.00	52.31	74.00	-21.69	49.44	2.87	Peak	100	117																																																																
5	26980.00	42.76	68.20	-25.44	33.88	8.88	Average	100	84																																																																
6	26980.00	55.52	88.20	-32.68	46.64	8.88	Peak	100	84																																																																

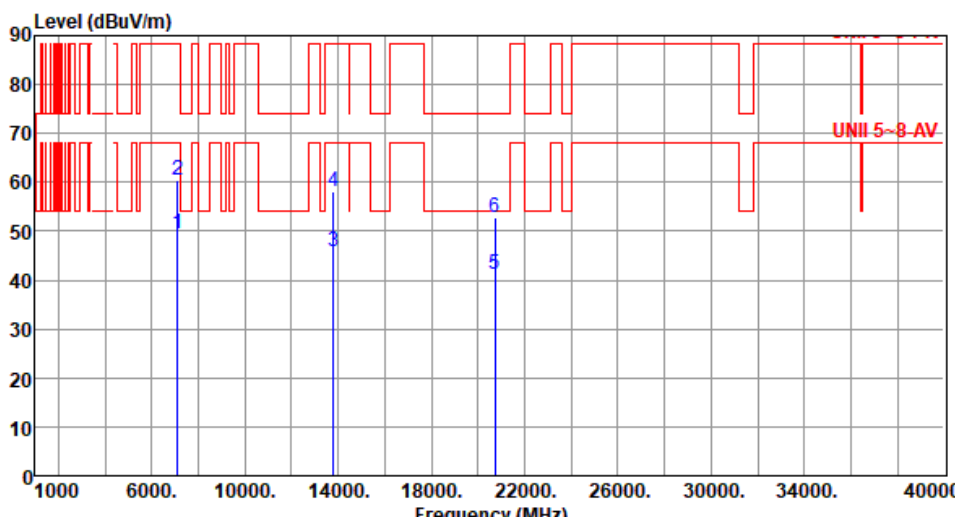

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>49.62</td><td>68.20</td><td>-18.58</td><td>44.66</td><td>4.96</td><td>Average</td><td>201</td><td>85</td></tr><tr><td>2</td><td>7125.00</td><td>60.42</td><td>88.20</td><td>-27.78</td><td>55.46</td><td>4.96</td><td>Peak</td><td>201</td><td>85</td></tr><tr><td>3</td><td>13810.00</td><td>45.96</td><td>68.20</td><td>-22.24</td><td>39.65</td><td>6.31</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>4</td><td>13810.00</td><td>58.27</td><td>88.20</td><td>-29.93</td><td>51.96</td><td>6.31</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>5</td><td>20715.00</td><td>41.27</td><td>54.00</td><td>-12.73</td><td>37.64</td><td>3.63</td><td>Average</td><td>100</td><td>196</td></tr><tr><td>6</td><td>20715.00</td><td>52.67</td><td>74.00</td><td>-21.33</td><td>49.04</td><td>3.63</td><td>Peak</td><td>100</td><td>196</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	49.62	68.20	-18.58	44.66	4.96	Average	201	85	2	7125.00	60.42	88.20	-27.78	55.46	4.96	Peak	201	85	3	13810.00	45.96	68.20	-22.24	39.65	6.31	Average	100	137	4	13810.00	58.27	88.20	-29.93	51.96	6.31	Peak	100	137	5	20715.00	41.27	54.00	-12.73	37.64	3.63	Average	100	196	6	20715.00	52.67	74.00	-21.33	49.04	3.63	Peak	100	196
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	49.62	68.20	-18.58	44.66	4.96	Average	201	85																																																																
2	7125.00	60.42	88.20	-27.78	55.46	4.96	Peak	201	85																																																																
3	13810.00	45.96	68.20	-22.24	39.65	6.31	Average	100	137																																																																
4	13810.00	58.27	88.20	-29.93	51.96	6.31	Peak	100	137																																																																
5	20715.00	41.27	54.00	-12.73	37.64	3.63	Average	100	196																																																																
6	20715.00	52.67	74.00	-21.33	49.04	3.63	Peak	100	196																																																																



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain With path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT20	5	6195	6194	-67.45	1.06	-68.51	-62	Ceased
				-69.95	1.06	-71.01	-62	Minimal
				-87.45	1.06	-88.51	-62	Normal
	6	6475	6474	-66.66	1.01	-67.67	-62	Ceased
				-70.16	1.01	-71.17	-62	Minimal
				-86.66	1.01	-87.67	-62	Normal
	7	6695	6694	-65.66	1.12	-66.78	-62	Ceased
				-69.66	1.12	-70.78	-62	Minimal
				-85.66	1.12	-86.78	-62	Normal
	8	6995	6994	-63.37	1.09	-64.46	-62	Ceased
				-65.87	1.09	-66.96	-62	Minimal
				-83.37	1.09	-84.46	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)



Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain with path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT320	5	6105	5950	-67.33	1.06	-68.39	-62	Ceased
				-68.33	1.06	-69.39	-62	Minimal
				-87.33	1.06	-88.39	-62	Normal
	6 / 7	6585	6580	-67.97	1.01	-68.98	-62	Ceased
				-69.67	1.01	-70.68	-62	Minimal
				-87.97	1.01	-88.98	-62	Normal
	7 / 8	6905	6900	-66.86	1.09	-67.95	-62	Ceased
				-68.36	1.09	-69.45	-62	Minimal
				-86.86	1.09	-87.95	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)


Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT20	5	6195	6194	-67.45	-68.51	V	V	V	V	V	V	V	V	V	V	100	90
	6	6475	6474	-66.66	-67.67	V	V	V	V	V	V	X	V	V	V	90	90
	7	6695	6694	-65.66	-66.78	V	V	V	V	V	V	V	V	V	V	100	90
	8	6995	6994	-63.37	-64.46	V	V	V	V	V	X	V	V	V	V	90	90

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT320	5	6105	5950	-67.33	-68.39	V	V	V	V	V	X	V	V	V	V	90	90
			6100	-67.63	-68.69	V	V	V	V	V	V	V	V	V	V	100	90
			6260	-68.44	-69.5	V	V	V	V	V	V	V	V	V	V	100	90
	6 / 7	6585	6430	-68.75	-69.76	V	V	V	V	V	V	V	V	V	V	100	90
			6580	-67.97	-68.98	V	V	V	V	V	V	V	V	V	V	100	90
			6740	-68.95	-69.96	V	V	V	V	V	V	V	V	V	V	100	90
	7 / 8	6905	6750	-68.76	-69.85	V	V	V	V	V	V	V	V	V	V	100	90
			6900	-66.86	-67.95	V	V	V	V	V	V	V	V	V	V	100	90
			7060	-67.32	-68.41	V	V	V	V	V	X	V	V	V	V	90	90


Test plot of Incumbent signal

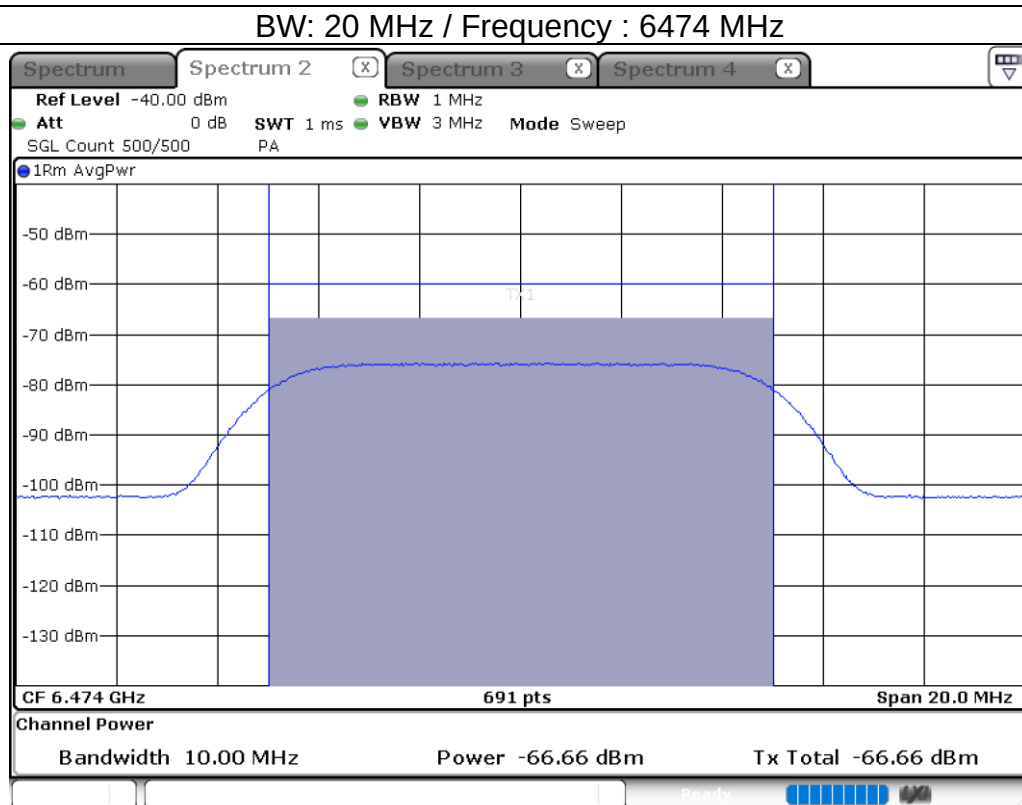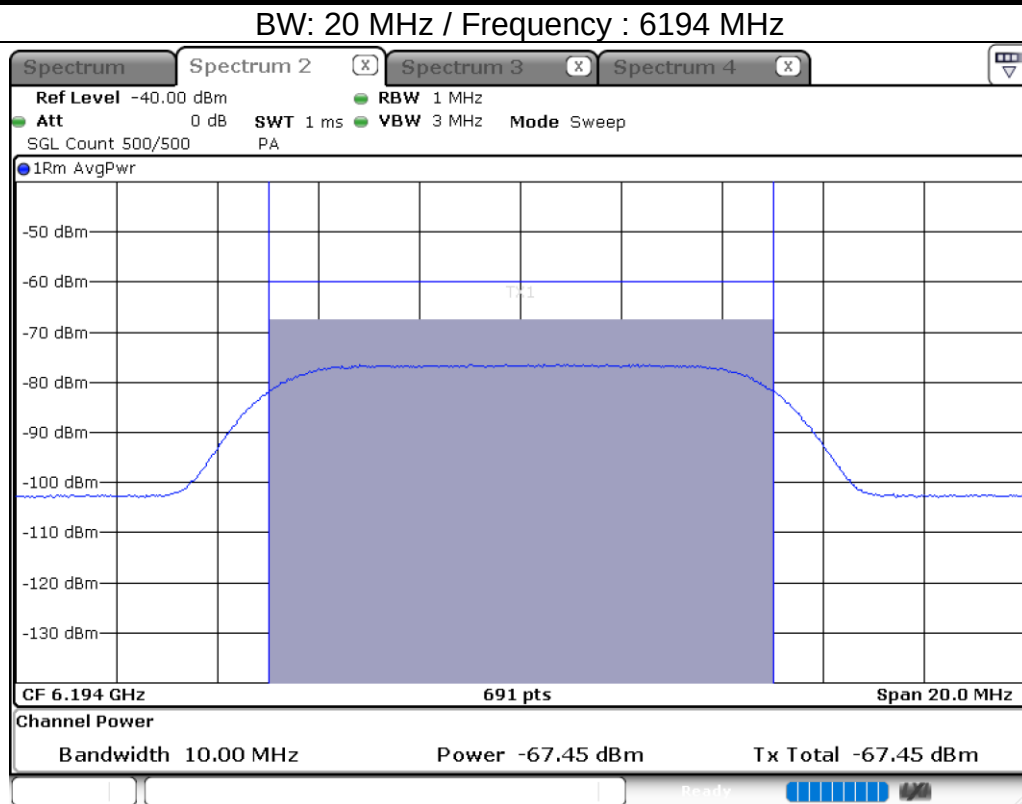


BW: 20 MHz / Frequency : 6694 MHz

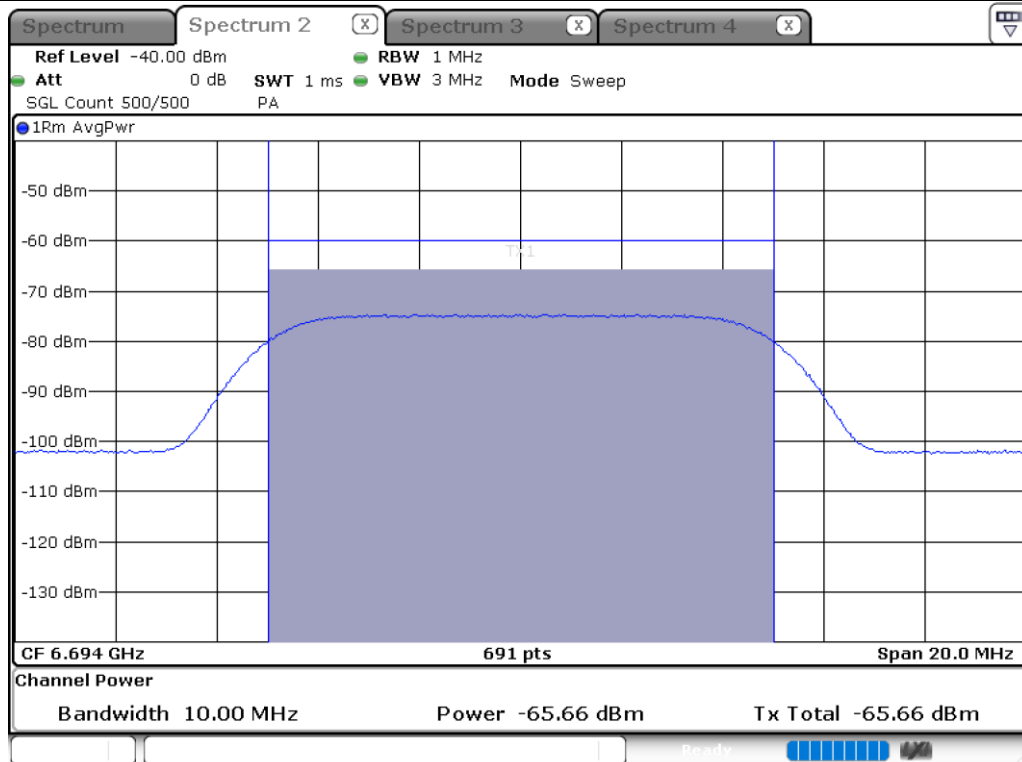


BW: 20 MHz / Frequency : 6994MHz

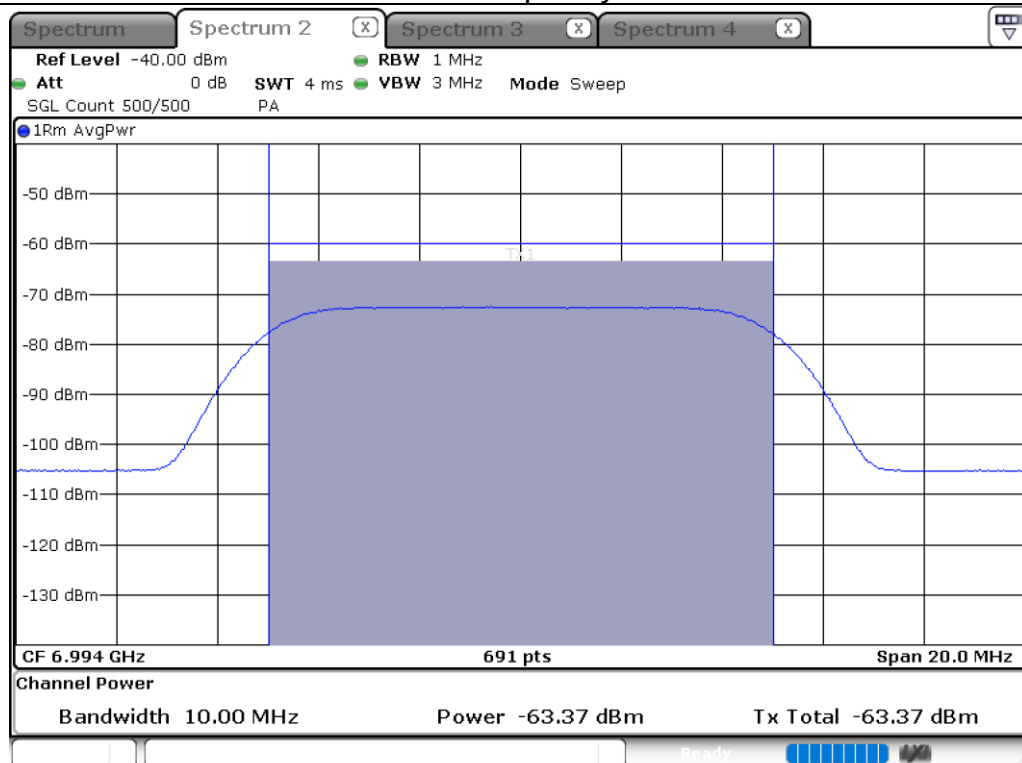


BW: 320 MHz / Frequency : 5950 MHz

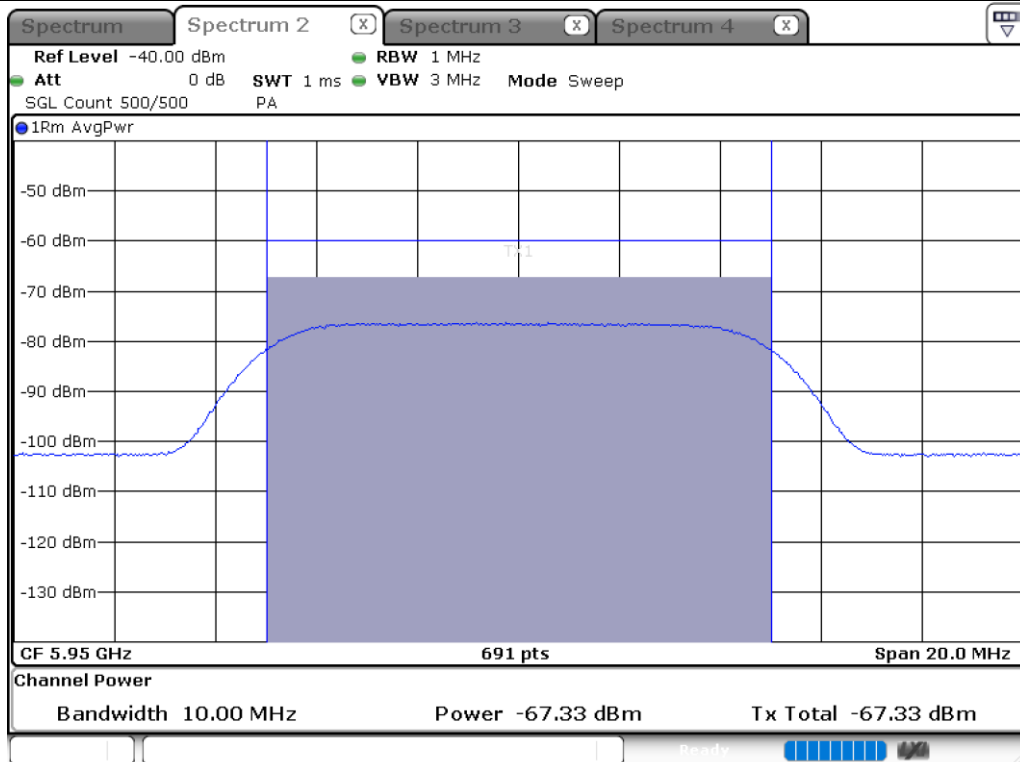


BW: 320 MHz / Frequency : 6100 MHz

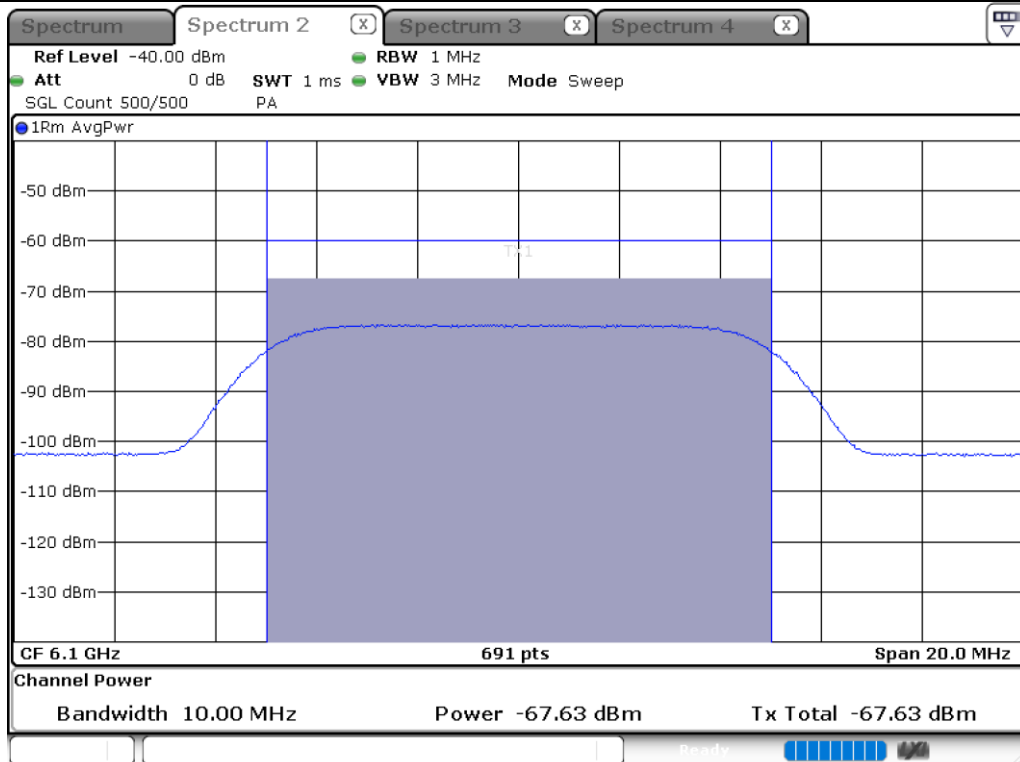


BW: 320 MHz / Frequency : 6260 MHz

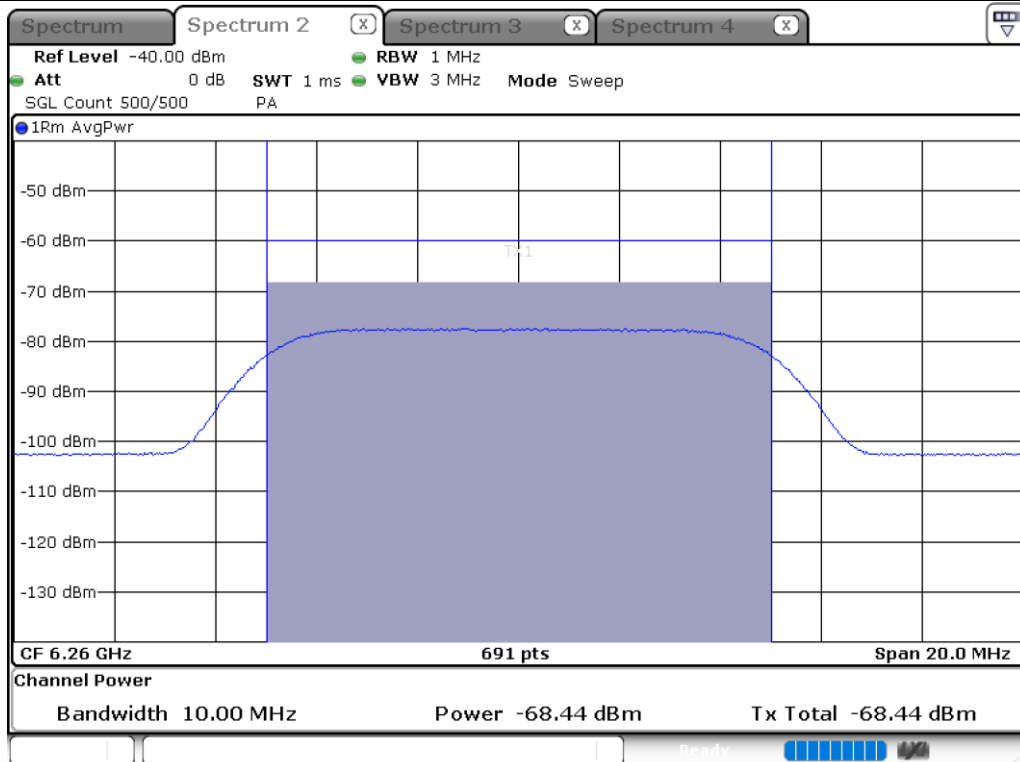


BW: 320 MHz / Frequency : 6430 MHz

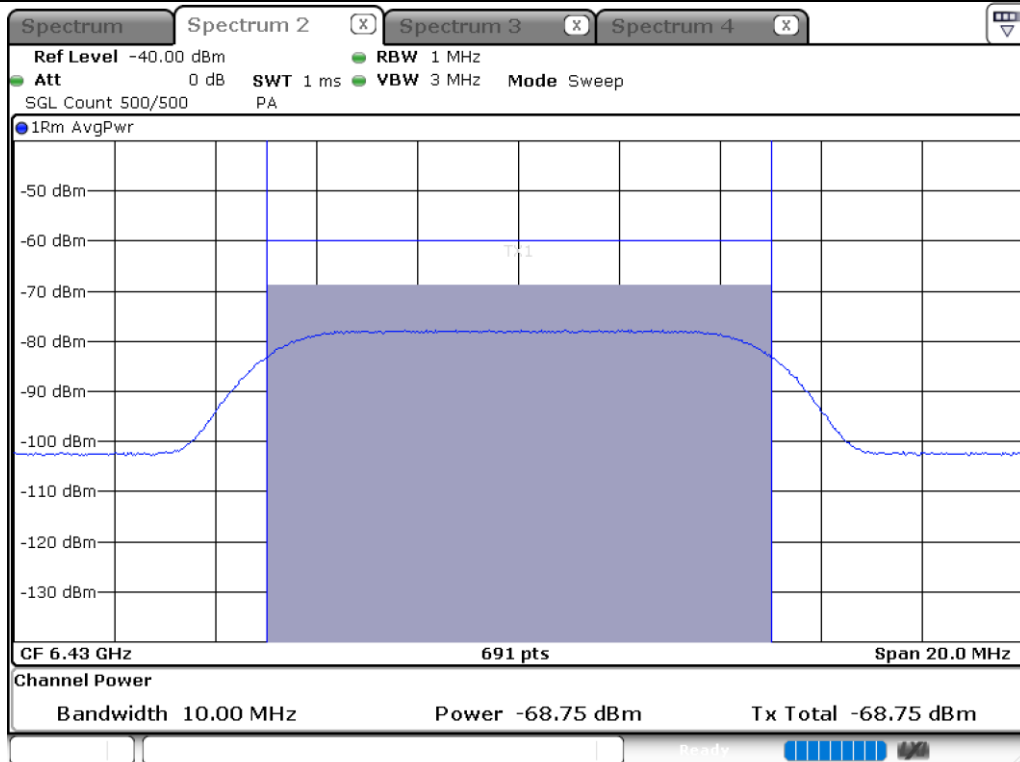


BW: 320 MHz / Frequency : 6580 MHz

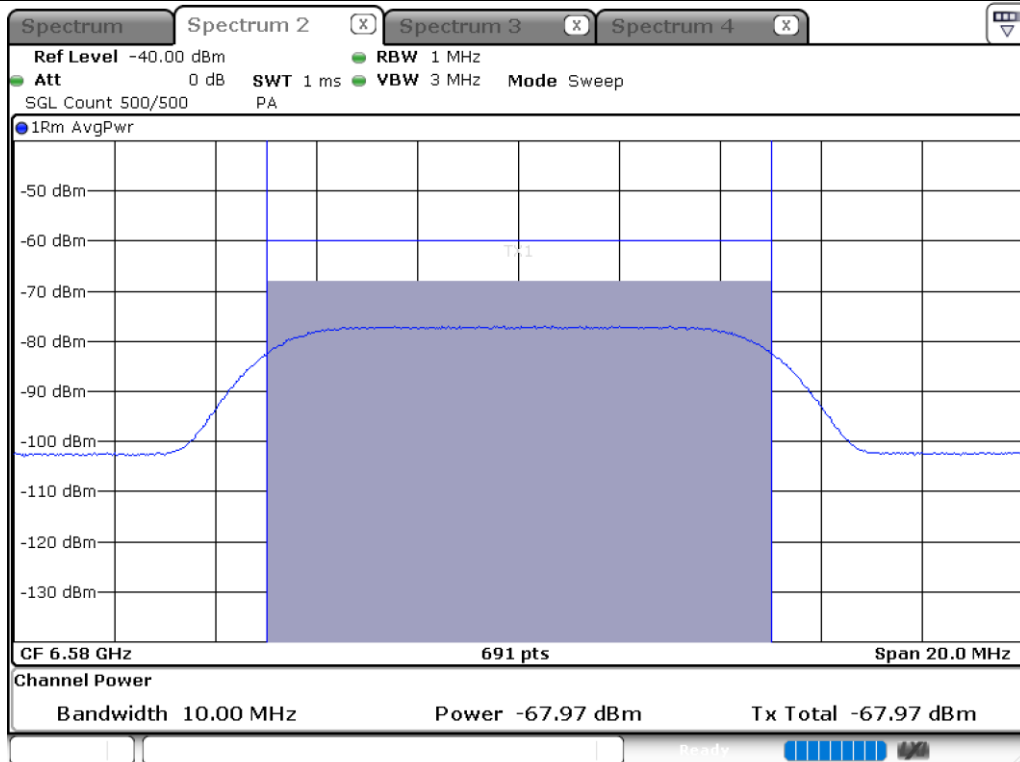


BW: 320 MHz / Frequency : 6740 MHz

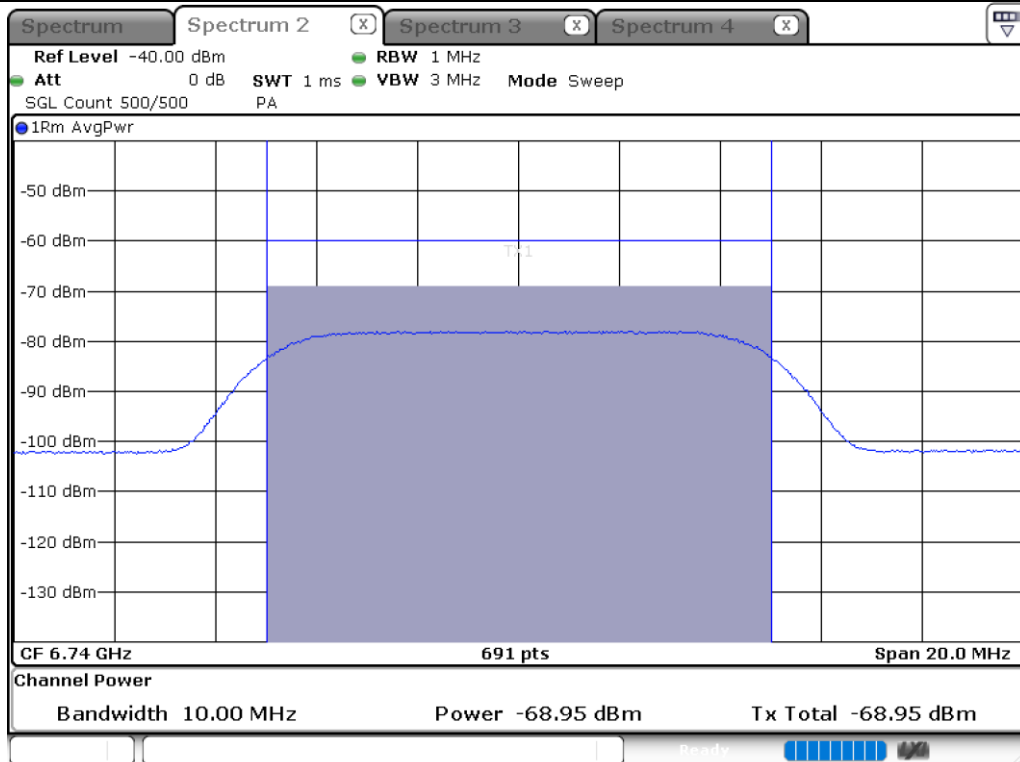


BW: 320 MHz / Frequency : 6750 MHz

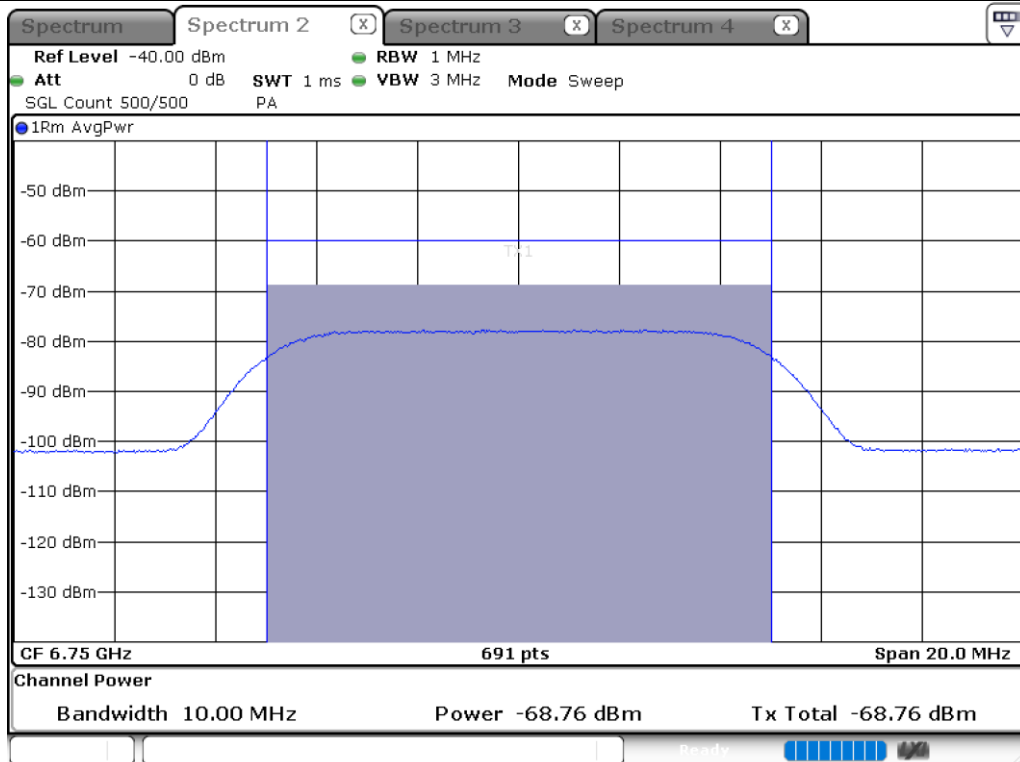



BW: 320 MHz / Frequency : 6900 MHz

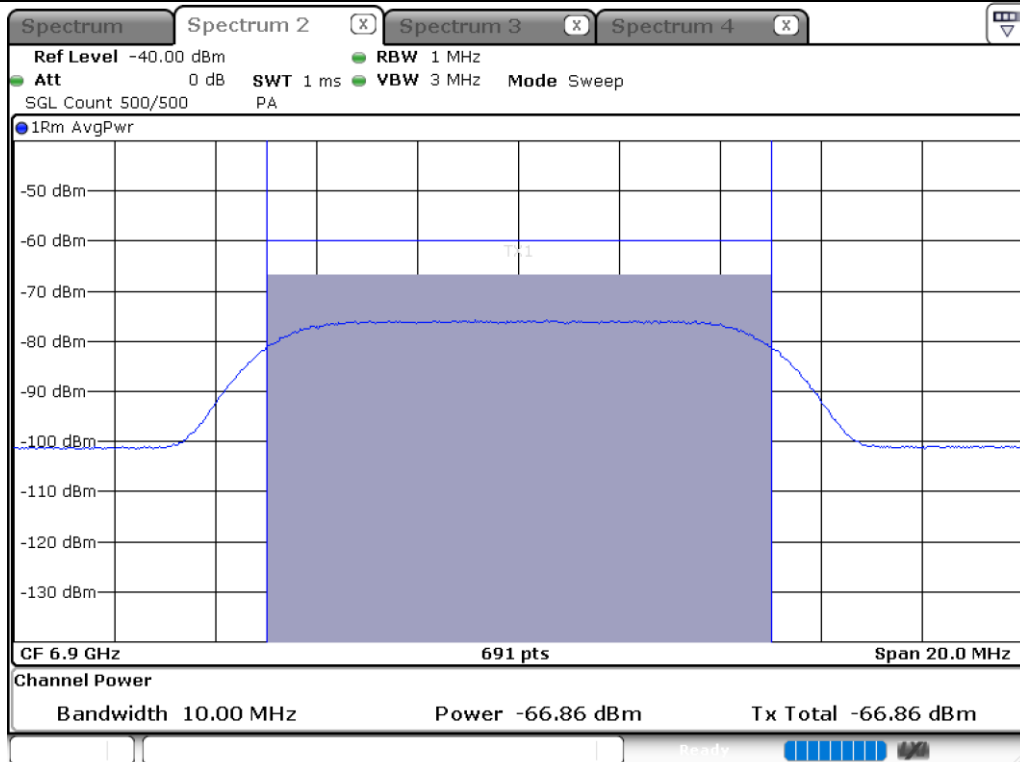

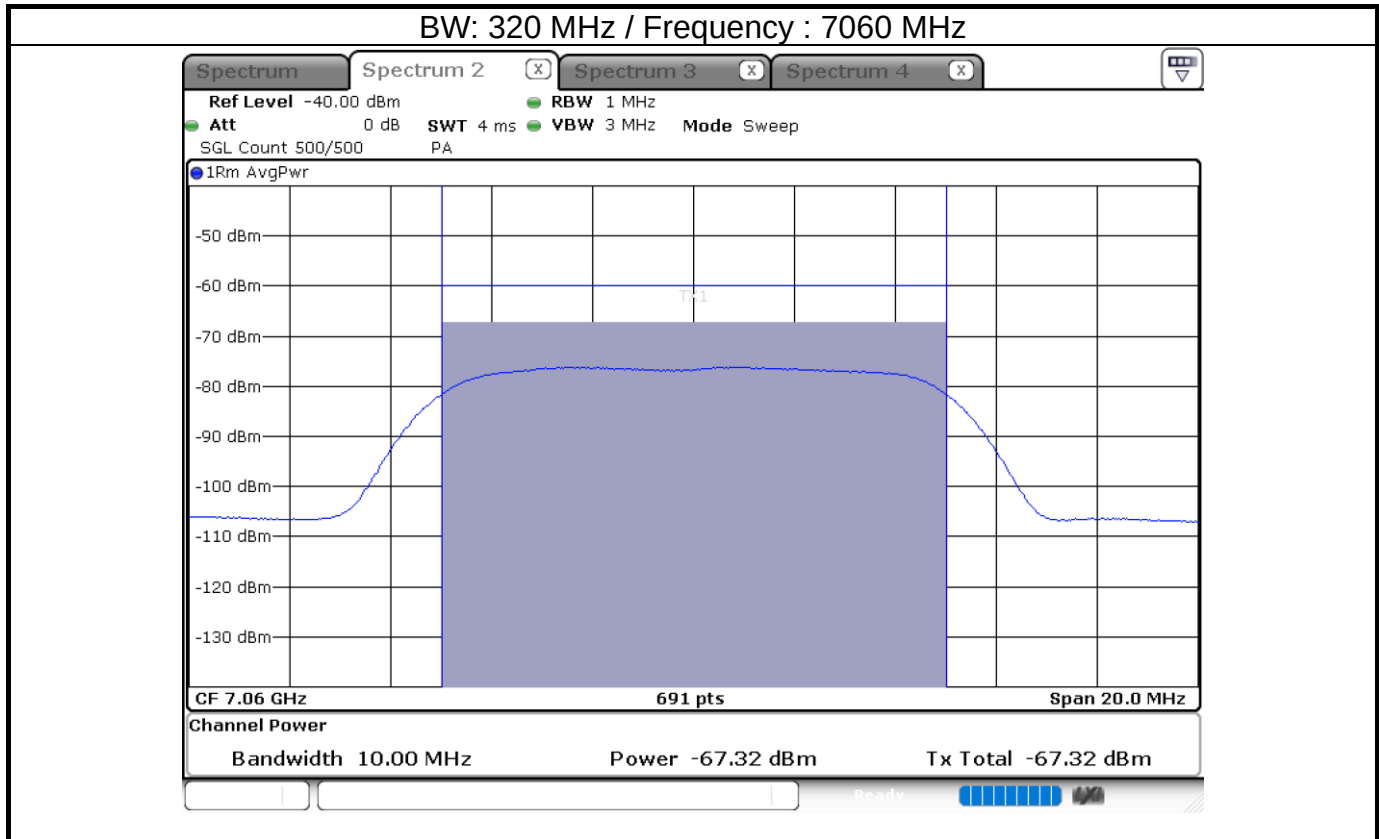


Test plot of Contention Based Protocol EUT Normal transmission

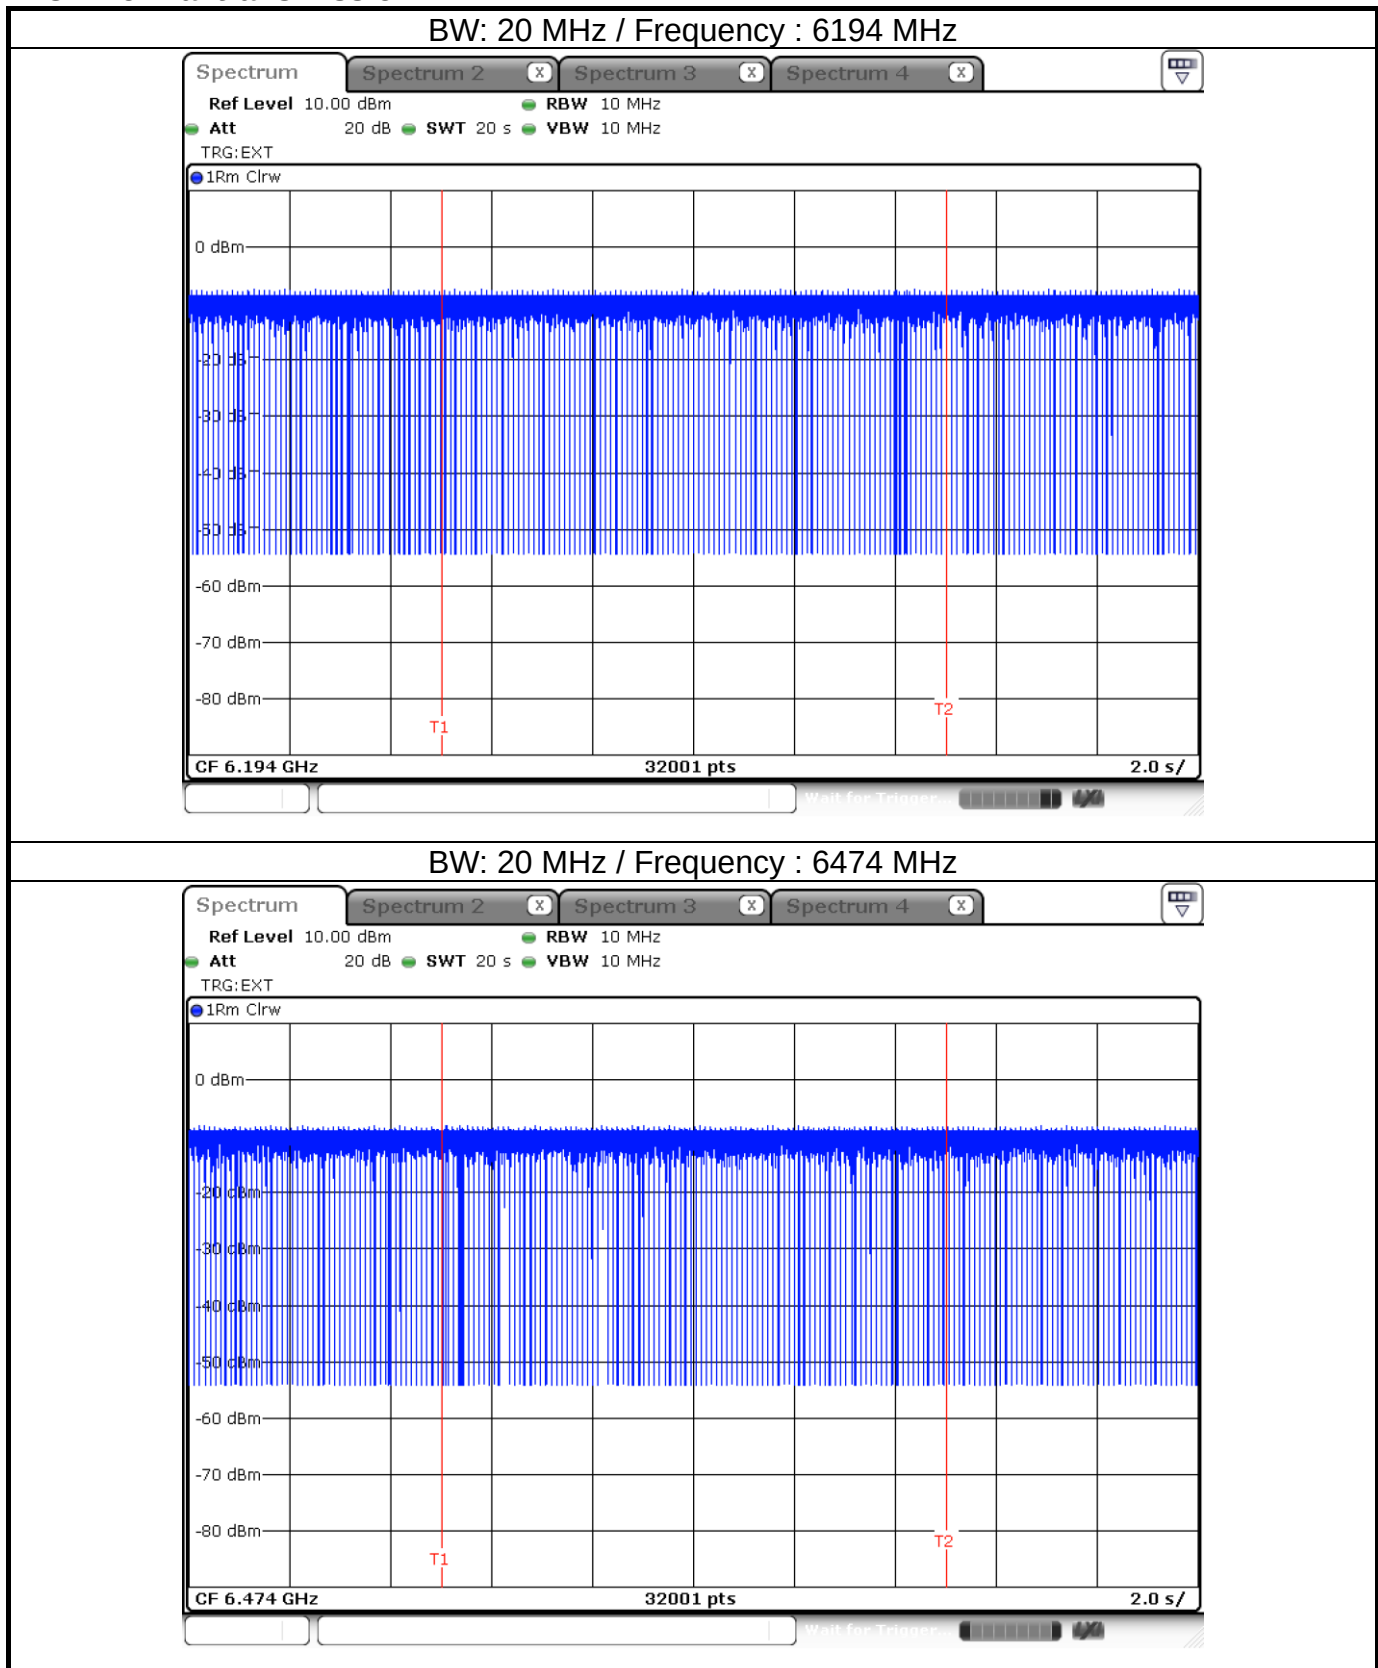


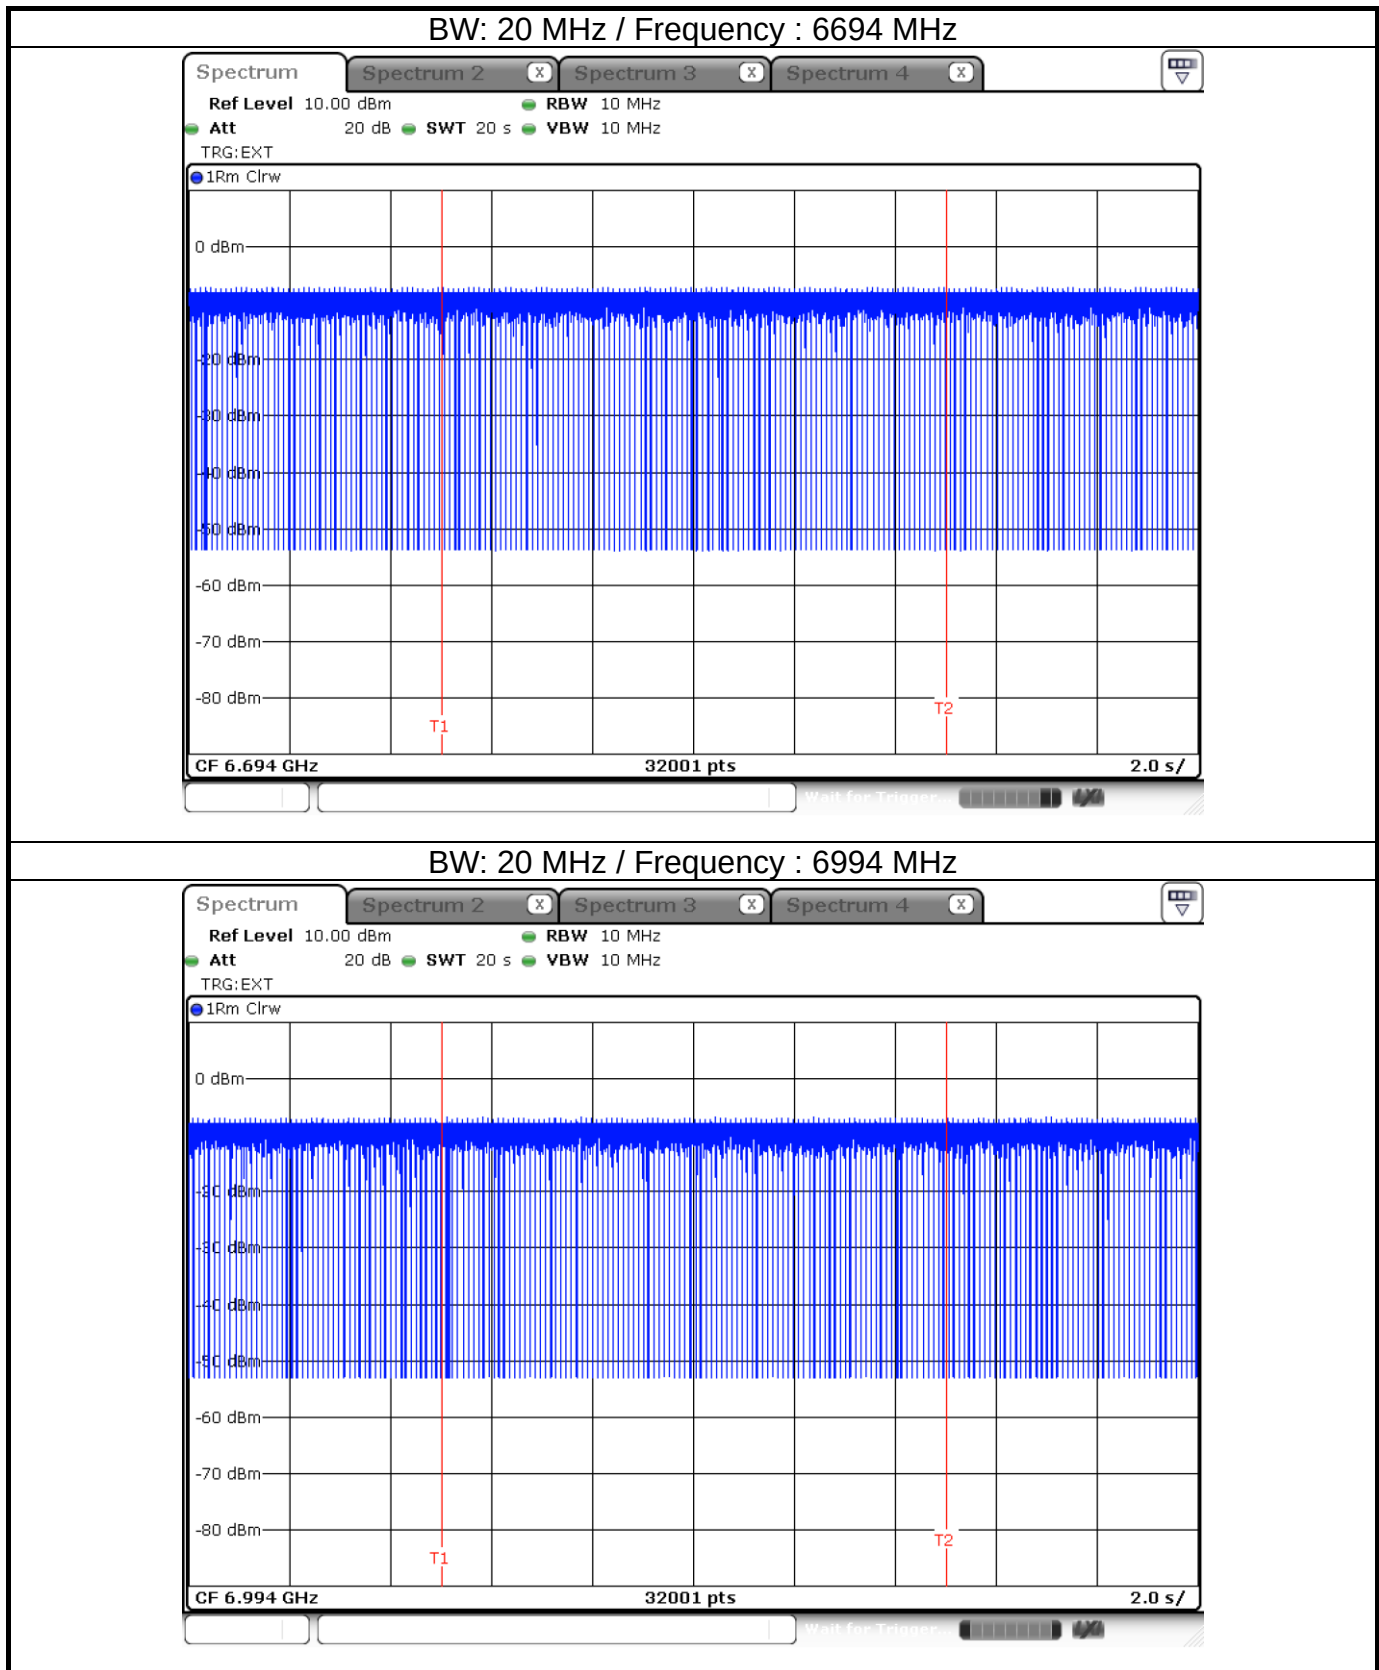


BW: 320 MHz / Frequency : 5950 MHz


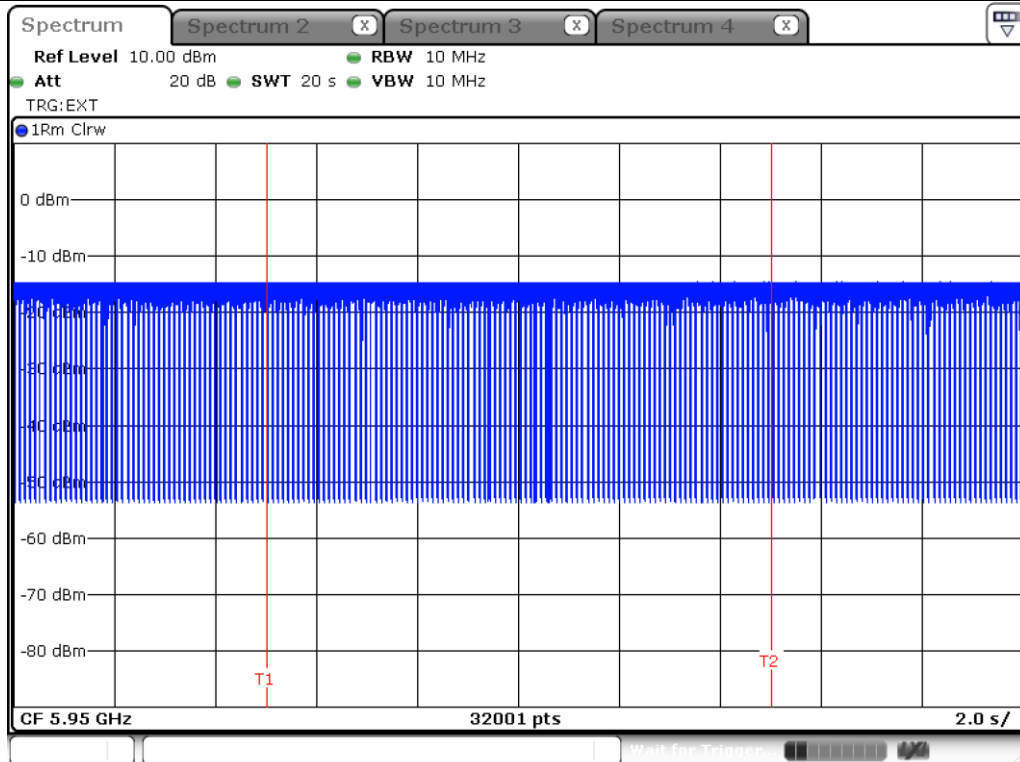


BW: 320 MHz / Frequency : 6580 MHz

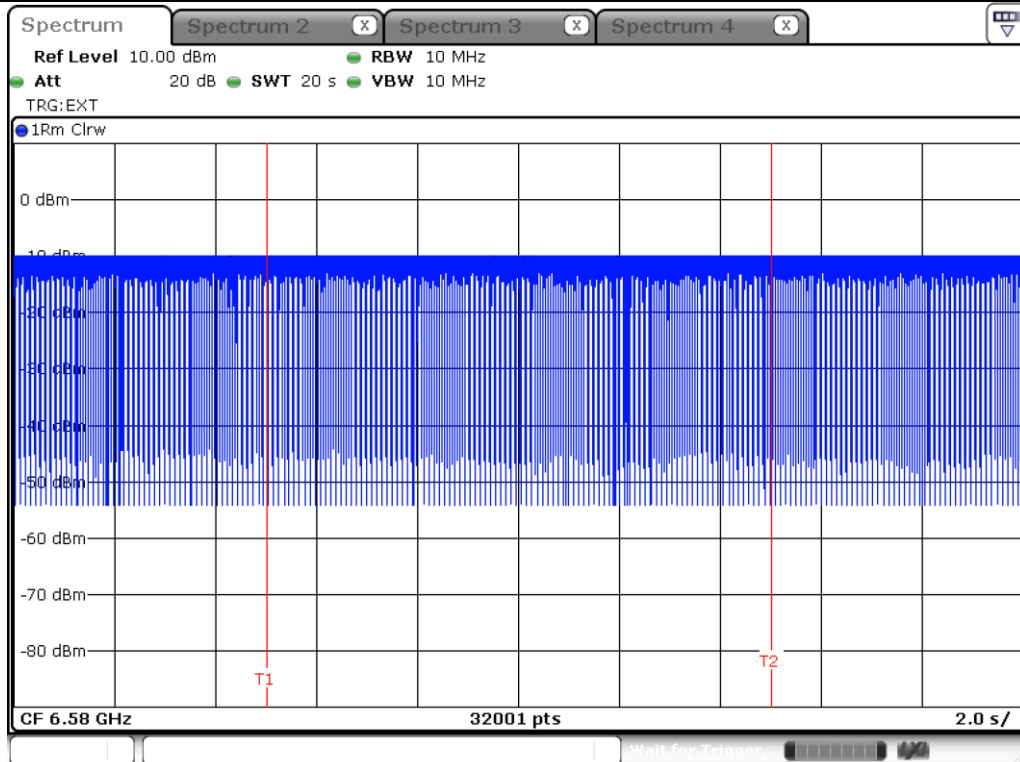


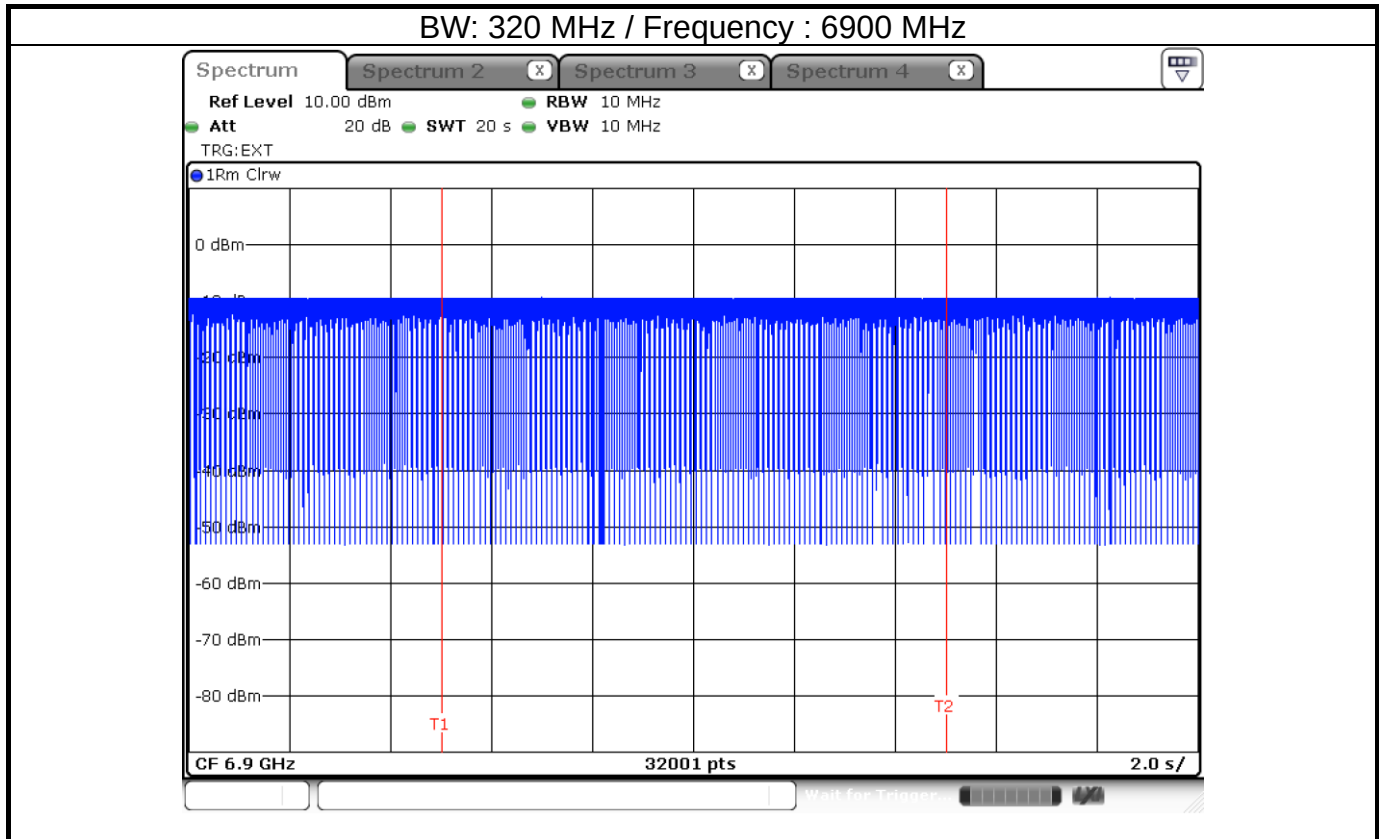


EUT Minimal transmission

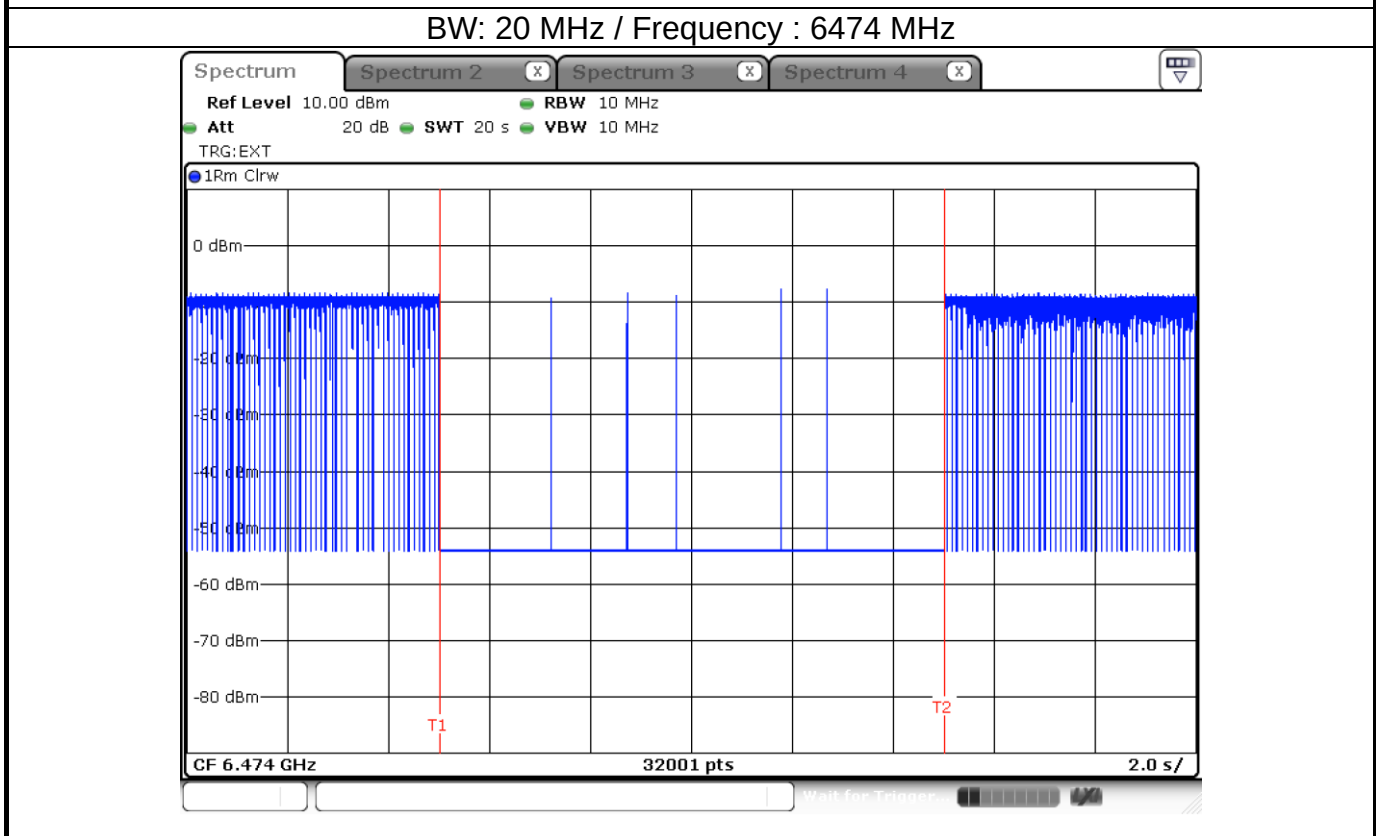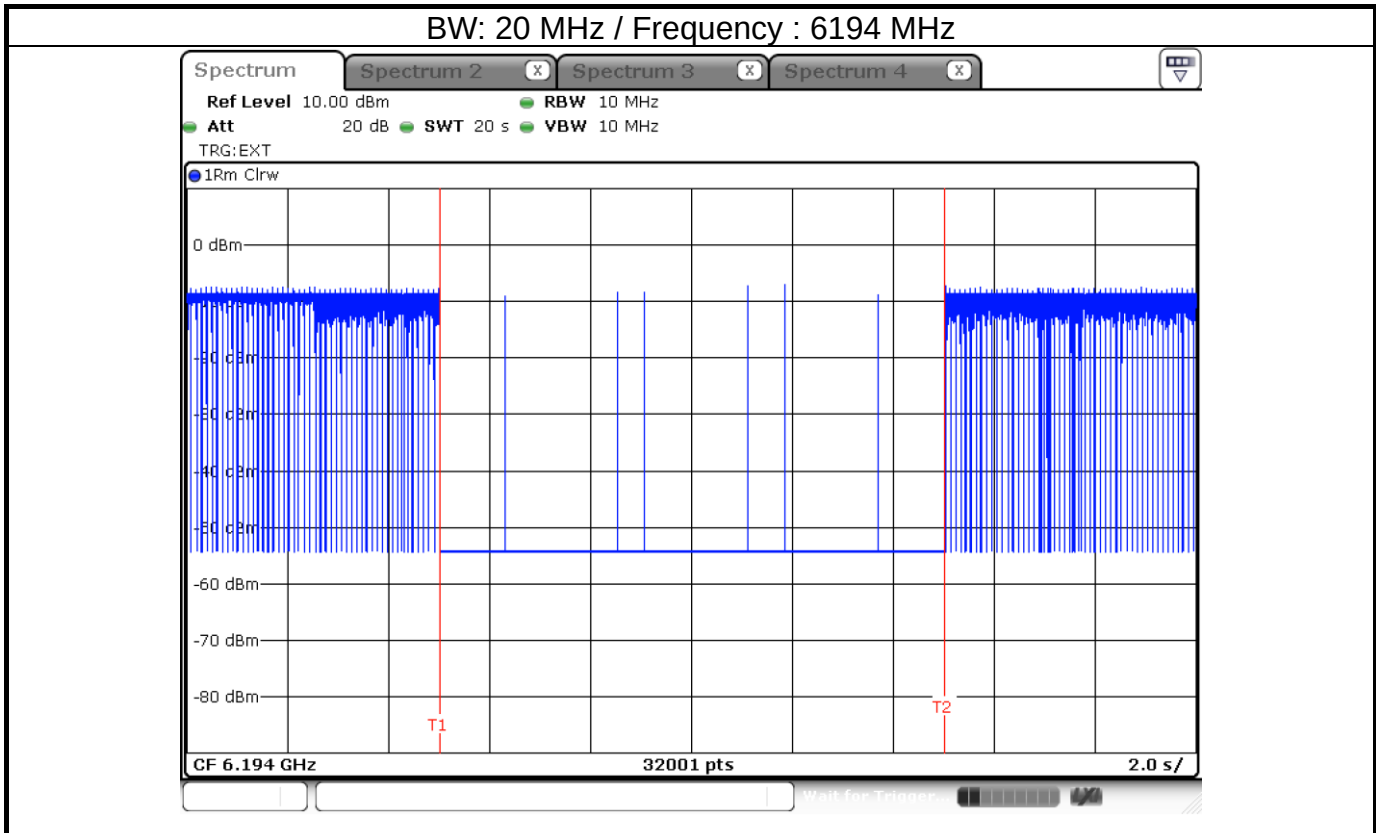


BW: 20 MHz / Frequency : 6694 MHz

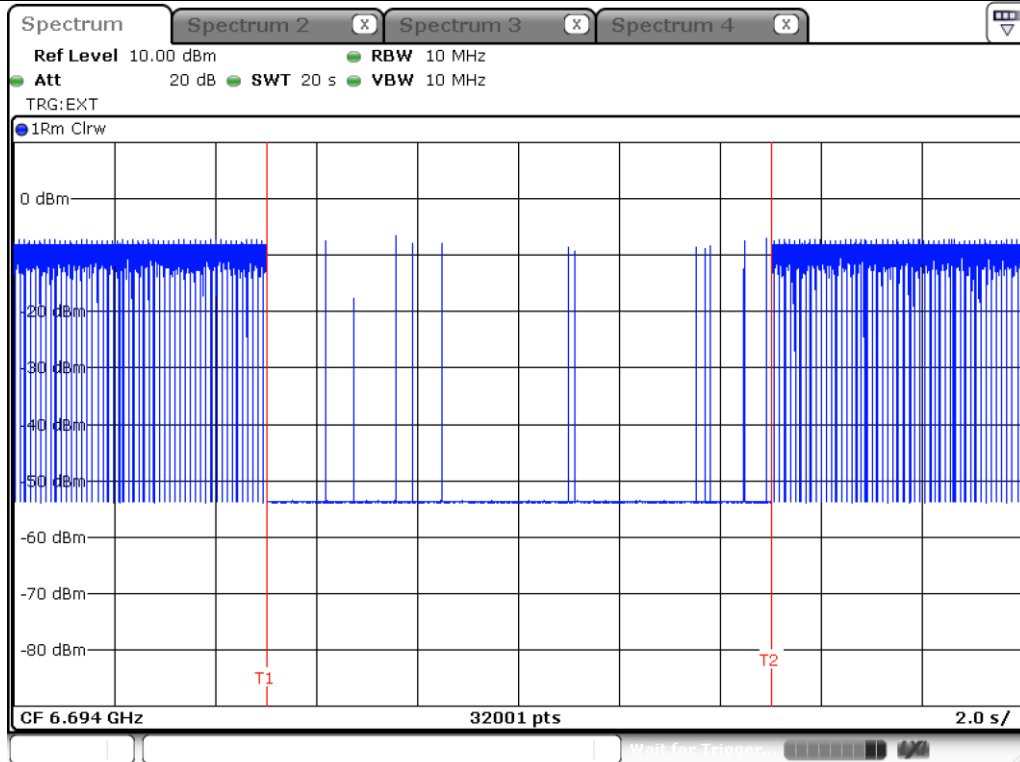


BW: 20 MHz / Frequency : 6994 MHz

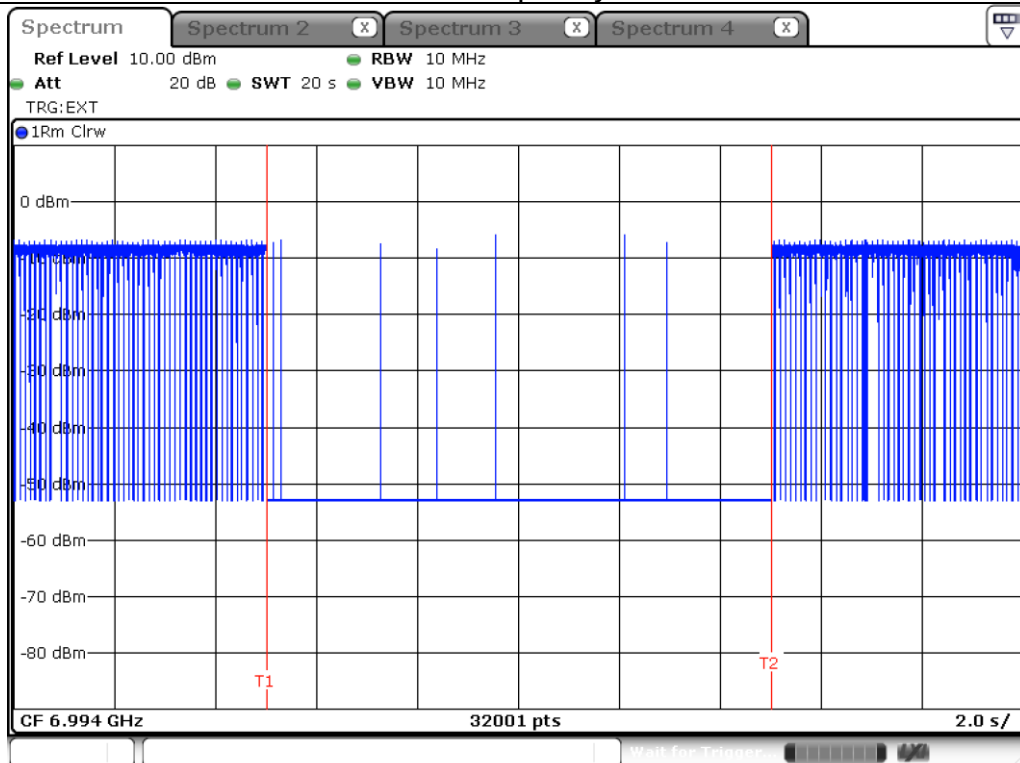


BW: 320 MHz / Frequency : 5950 MHz


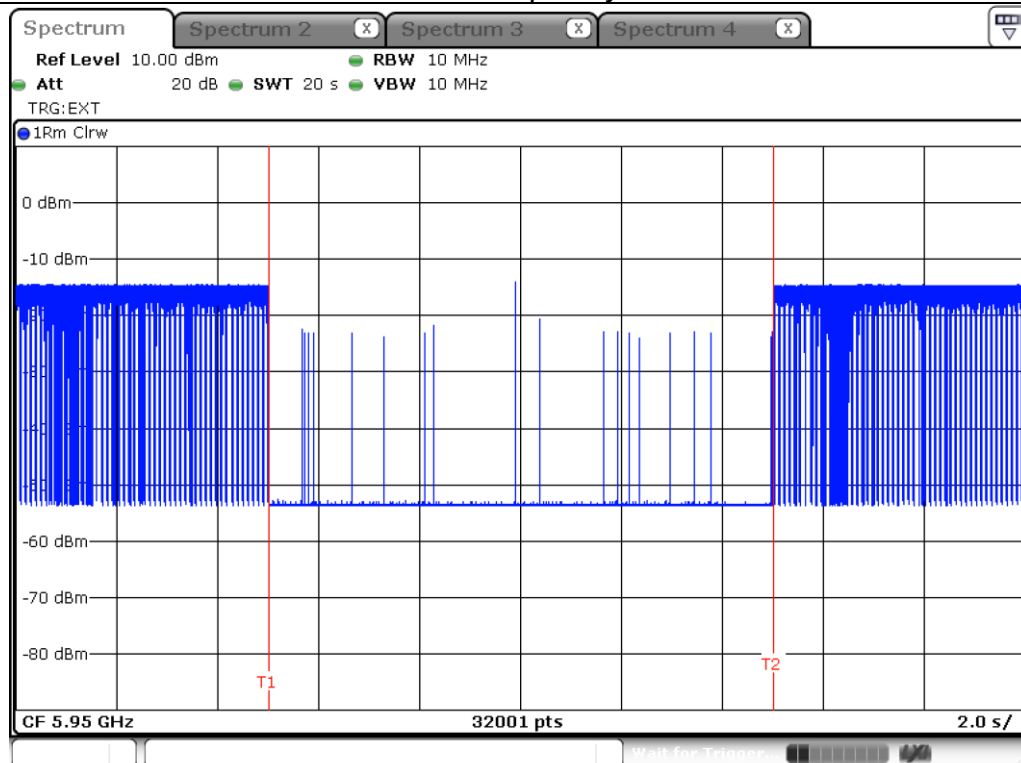


BW: 320 MHz / Frequency : 6580MHz


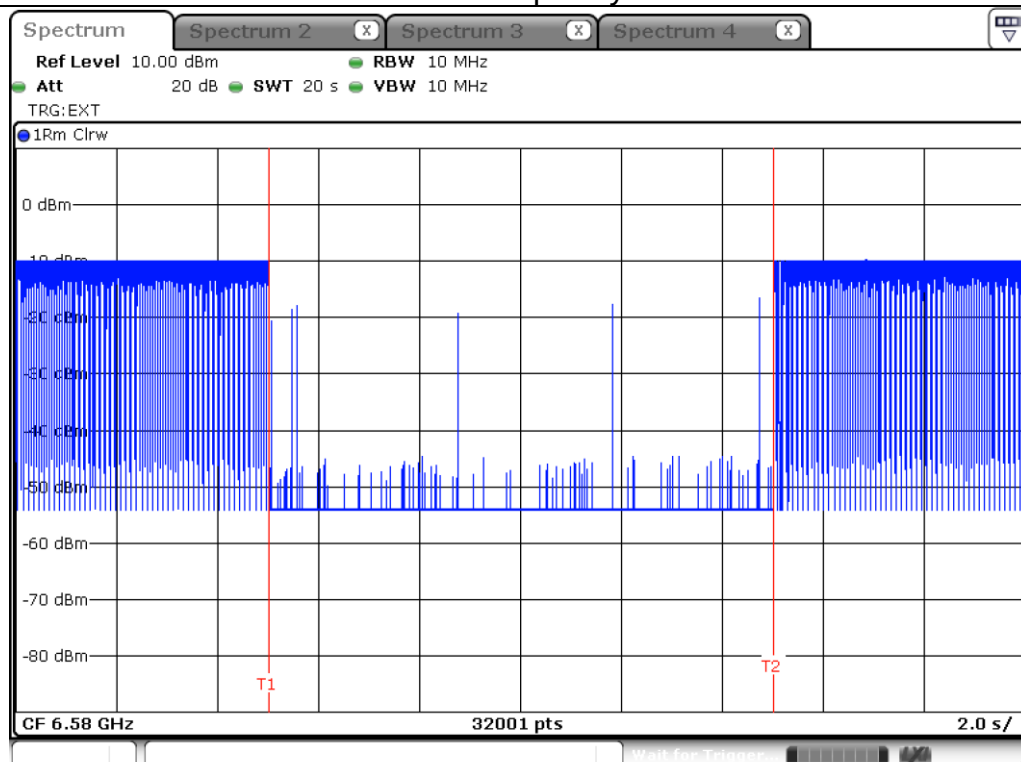


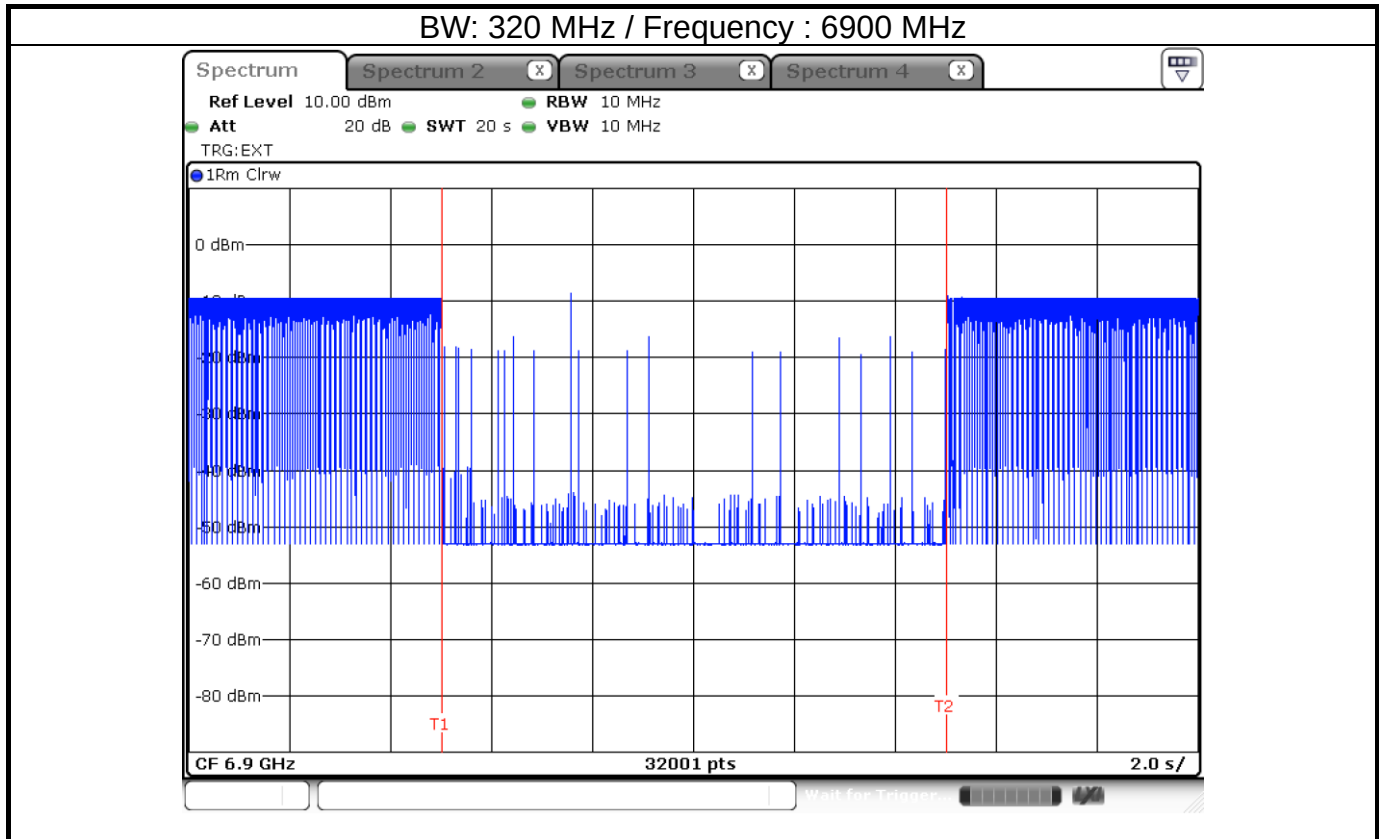


EUT ceased transmission

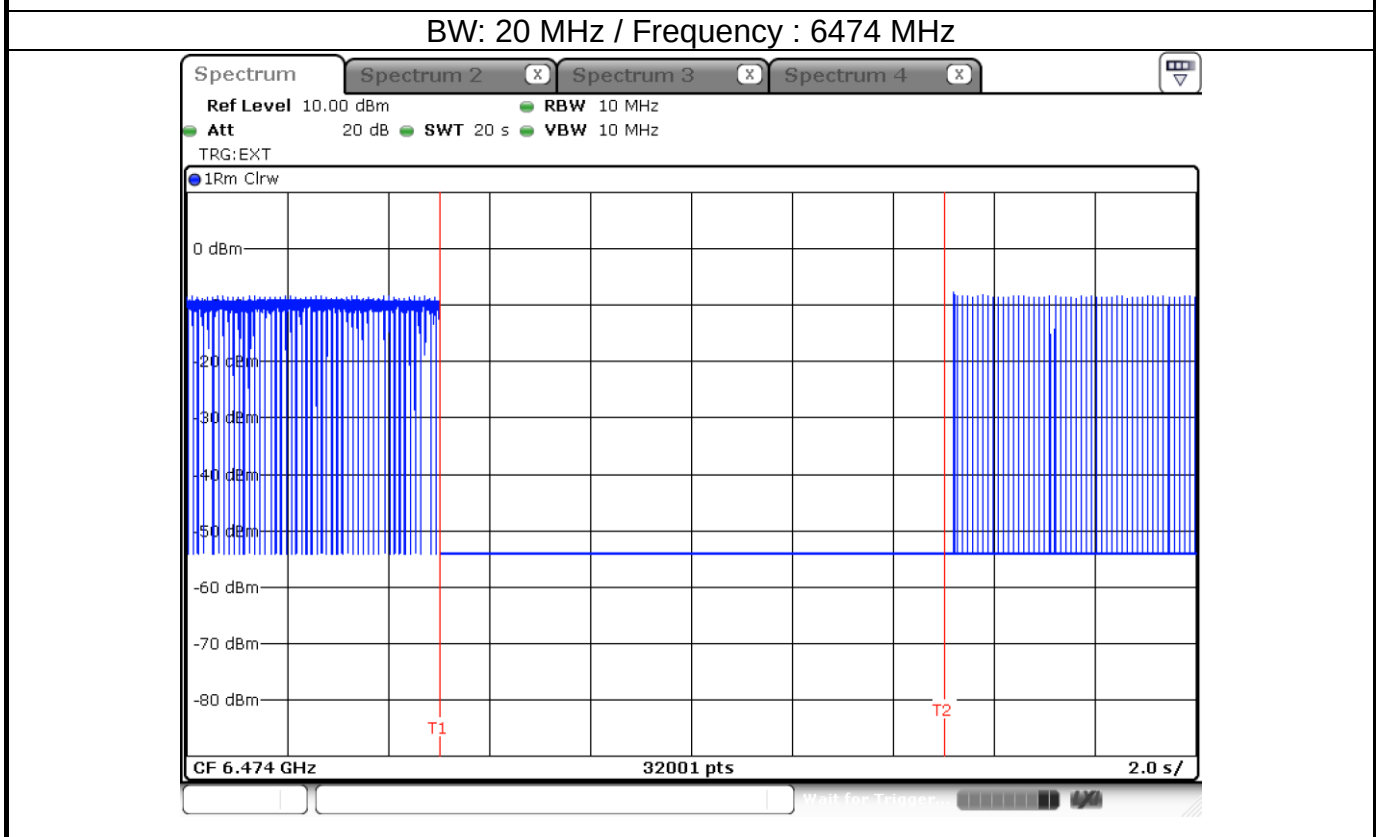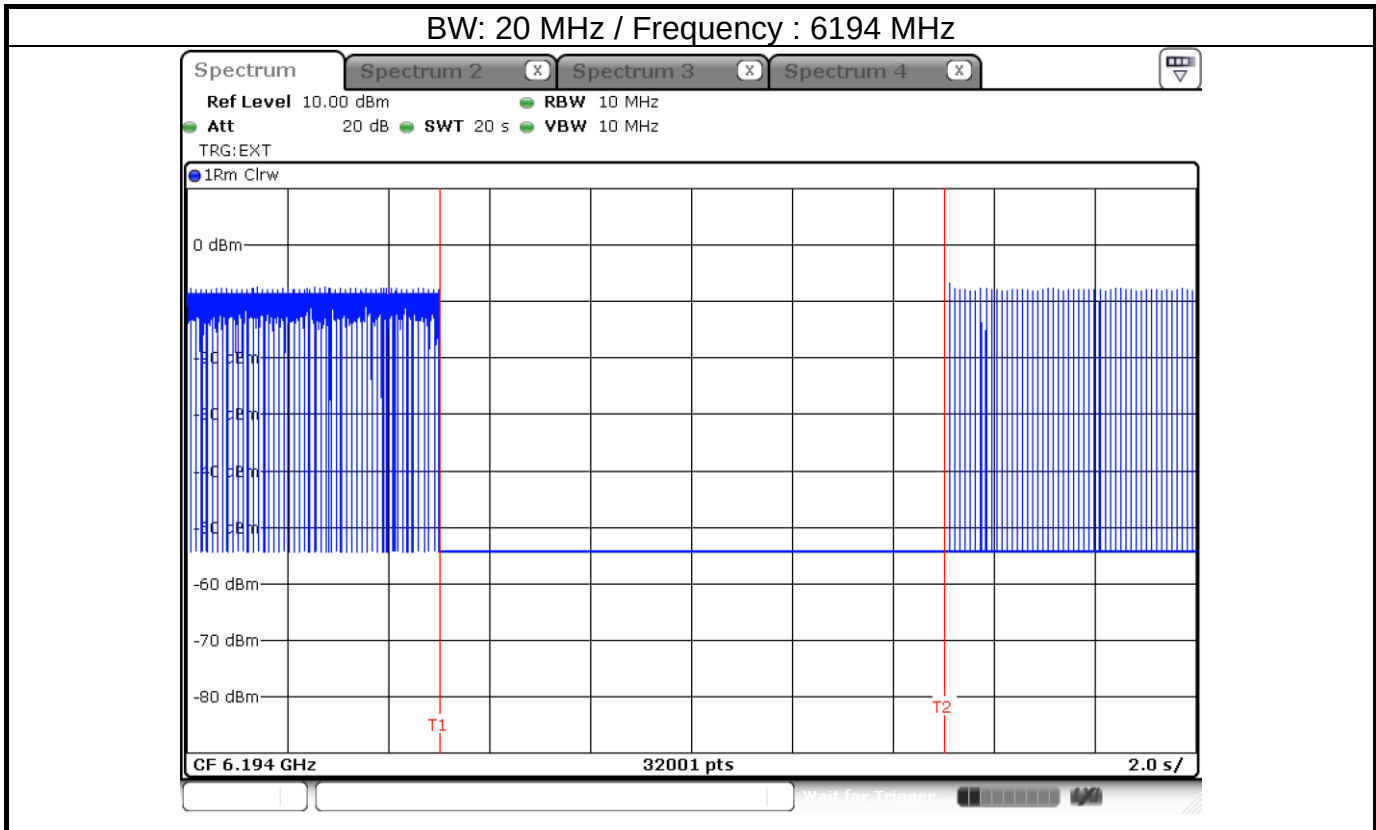



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

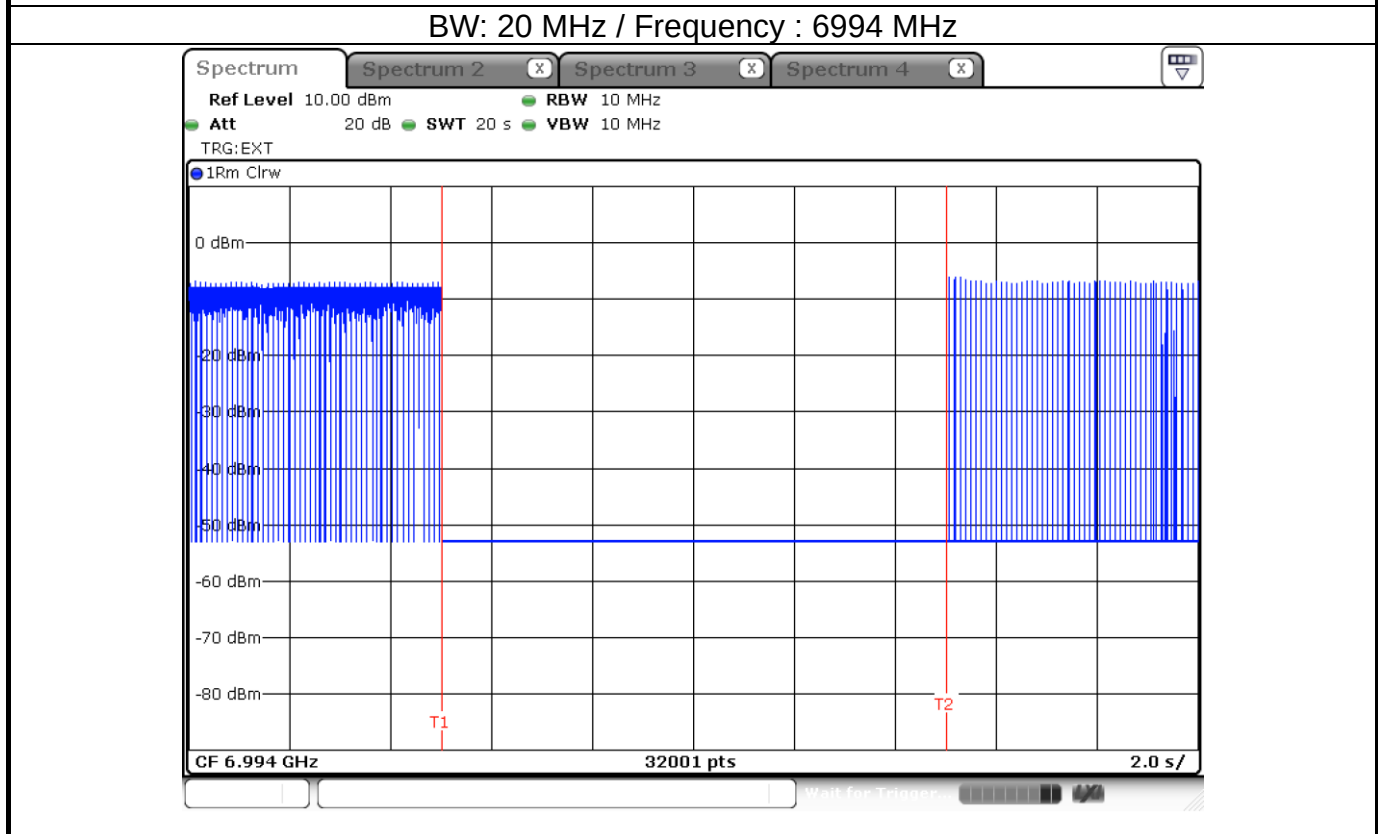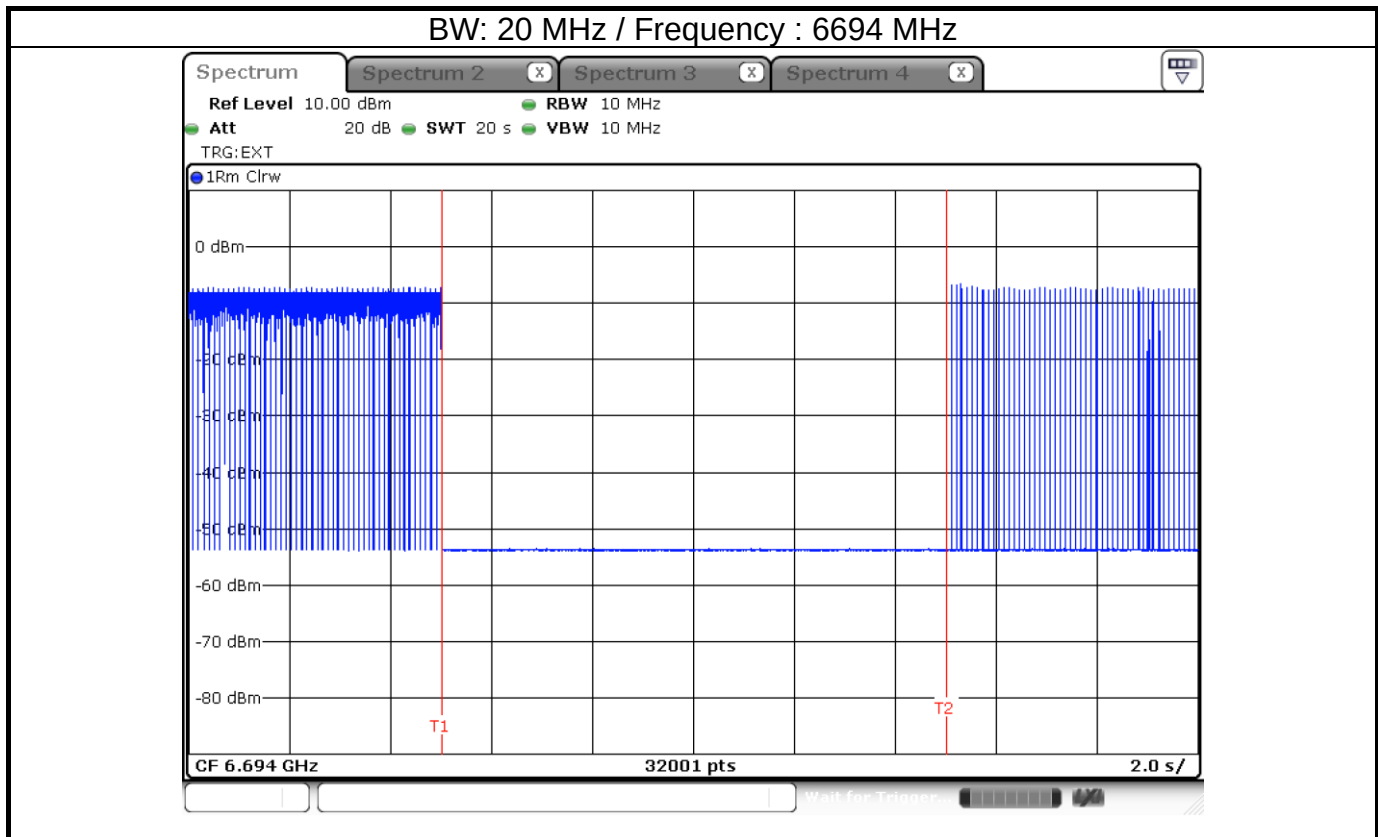


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

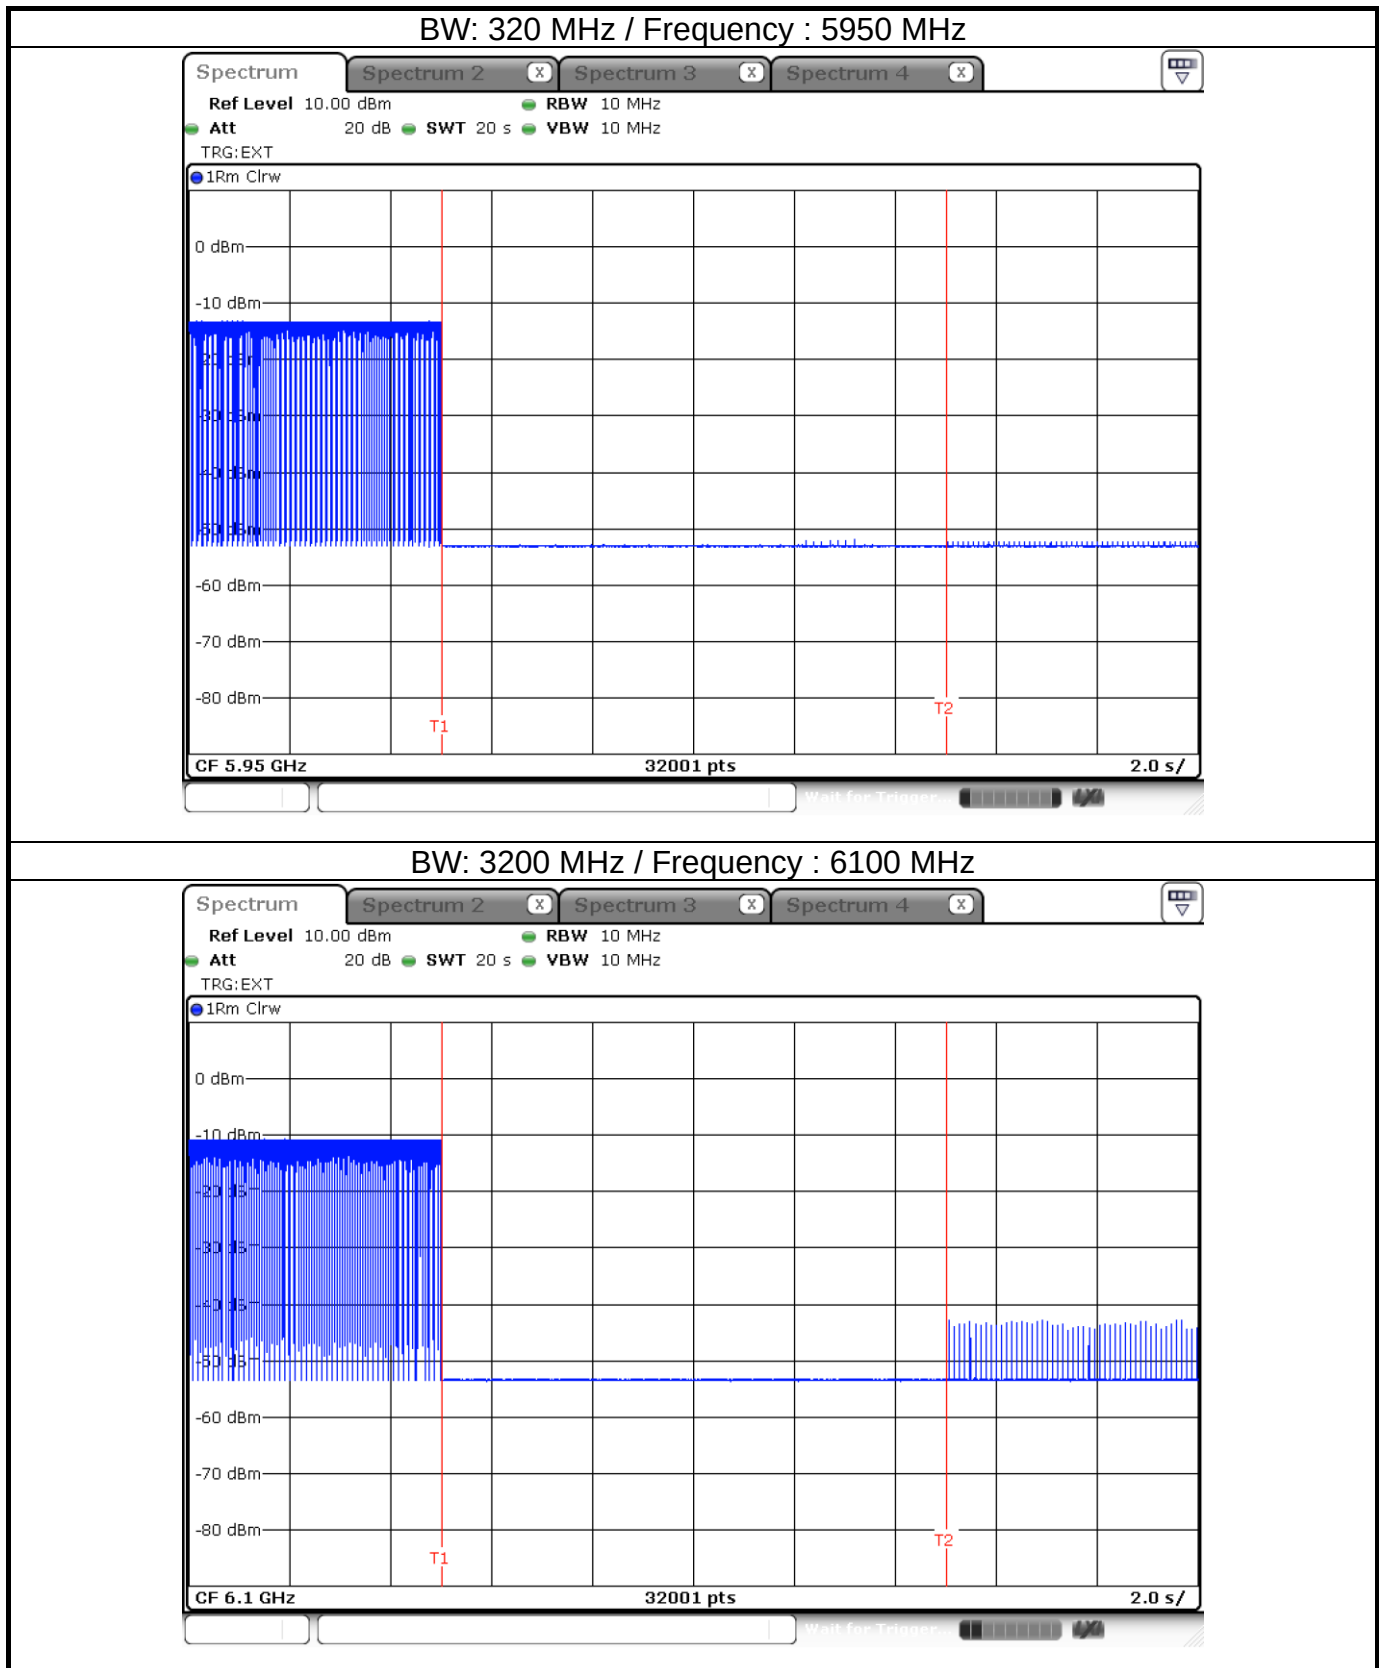



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

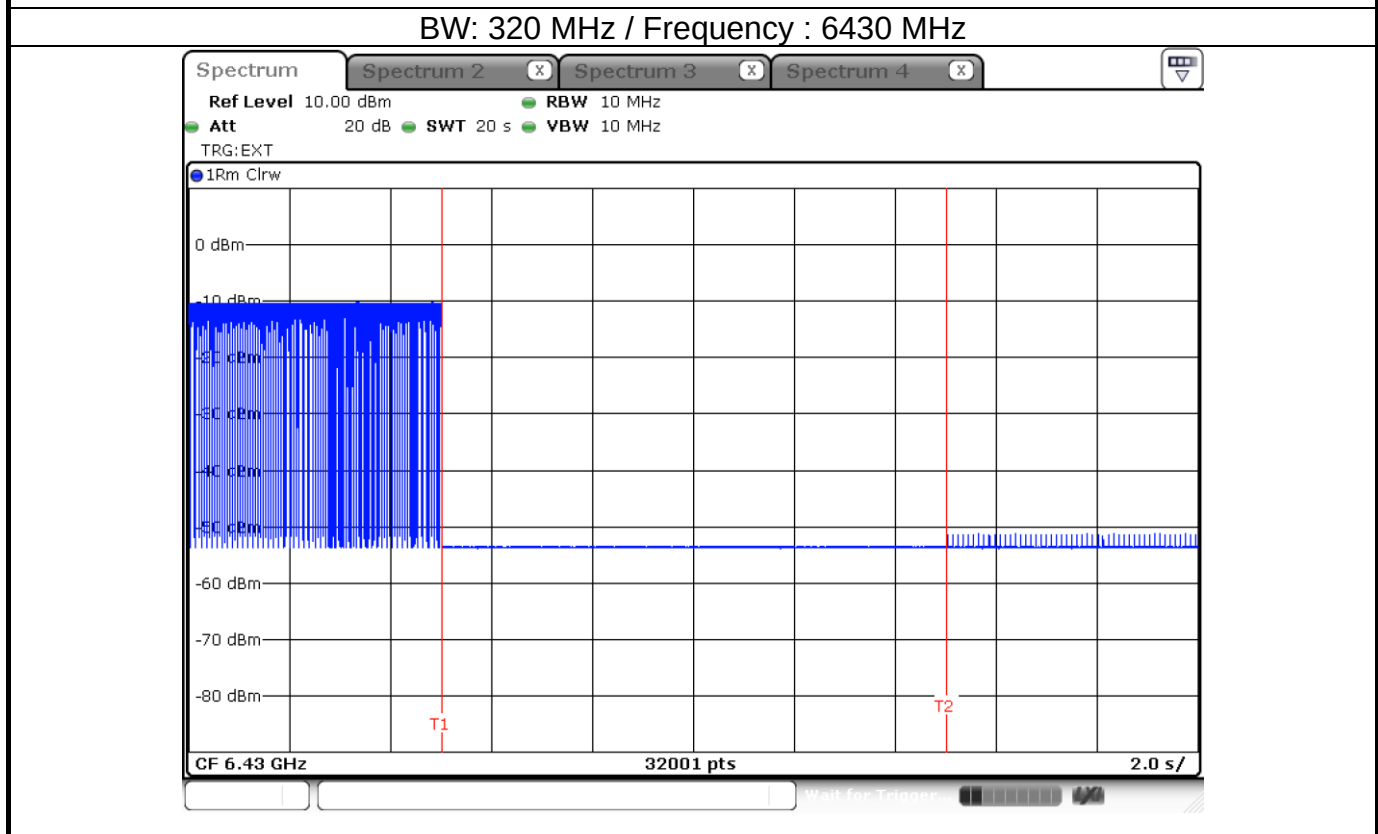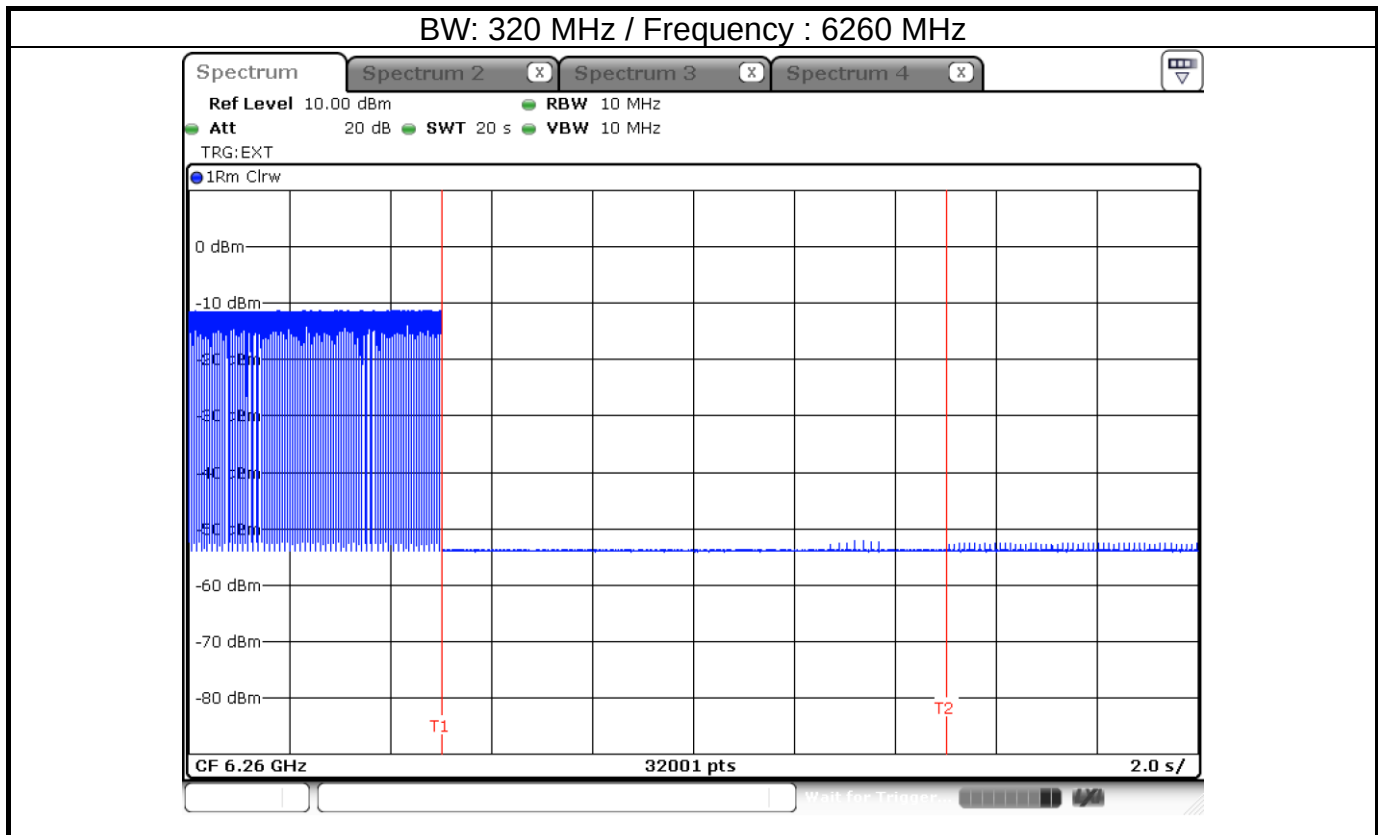


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

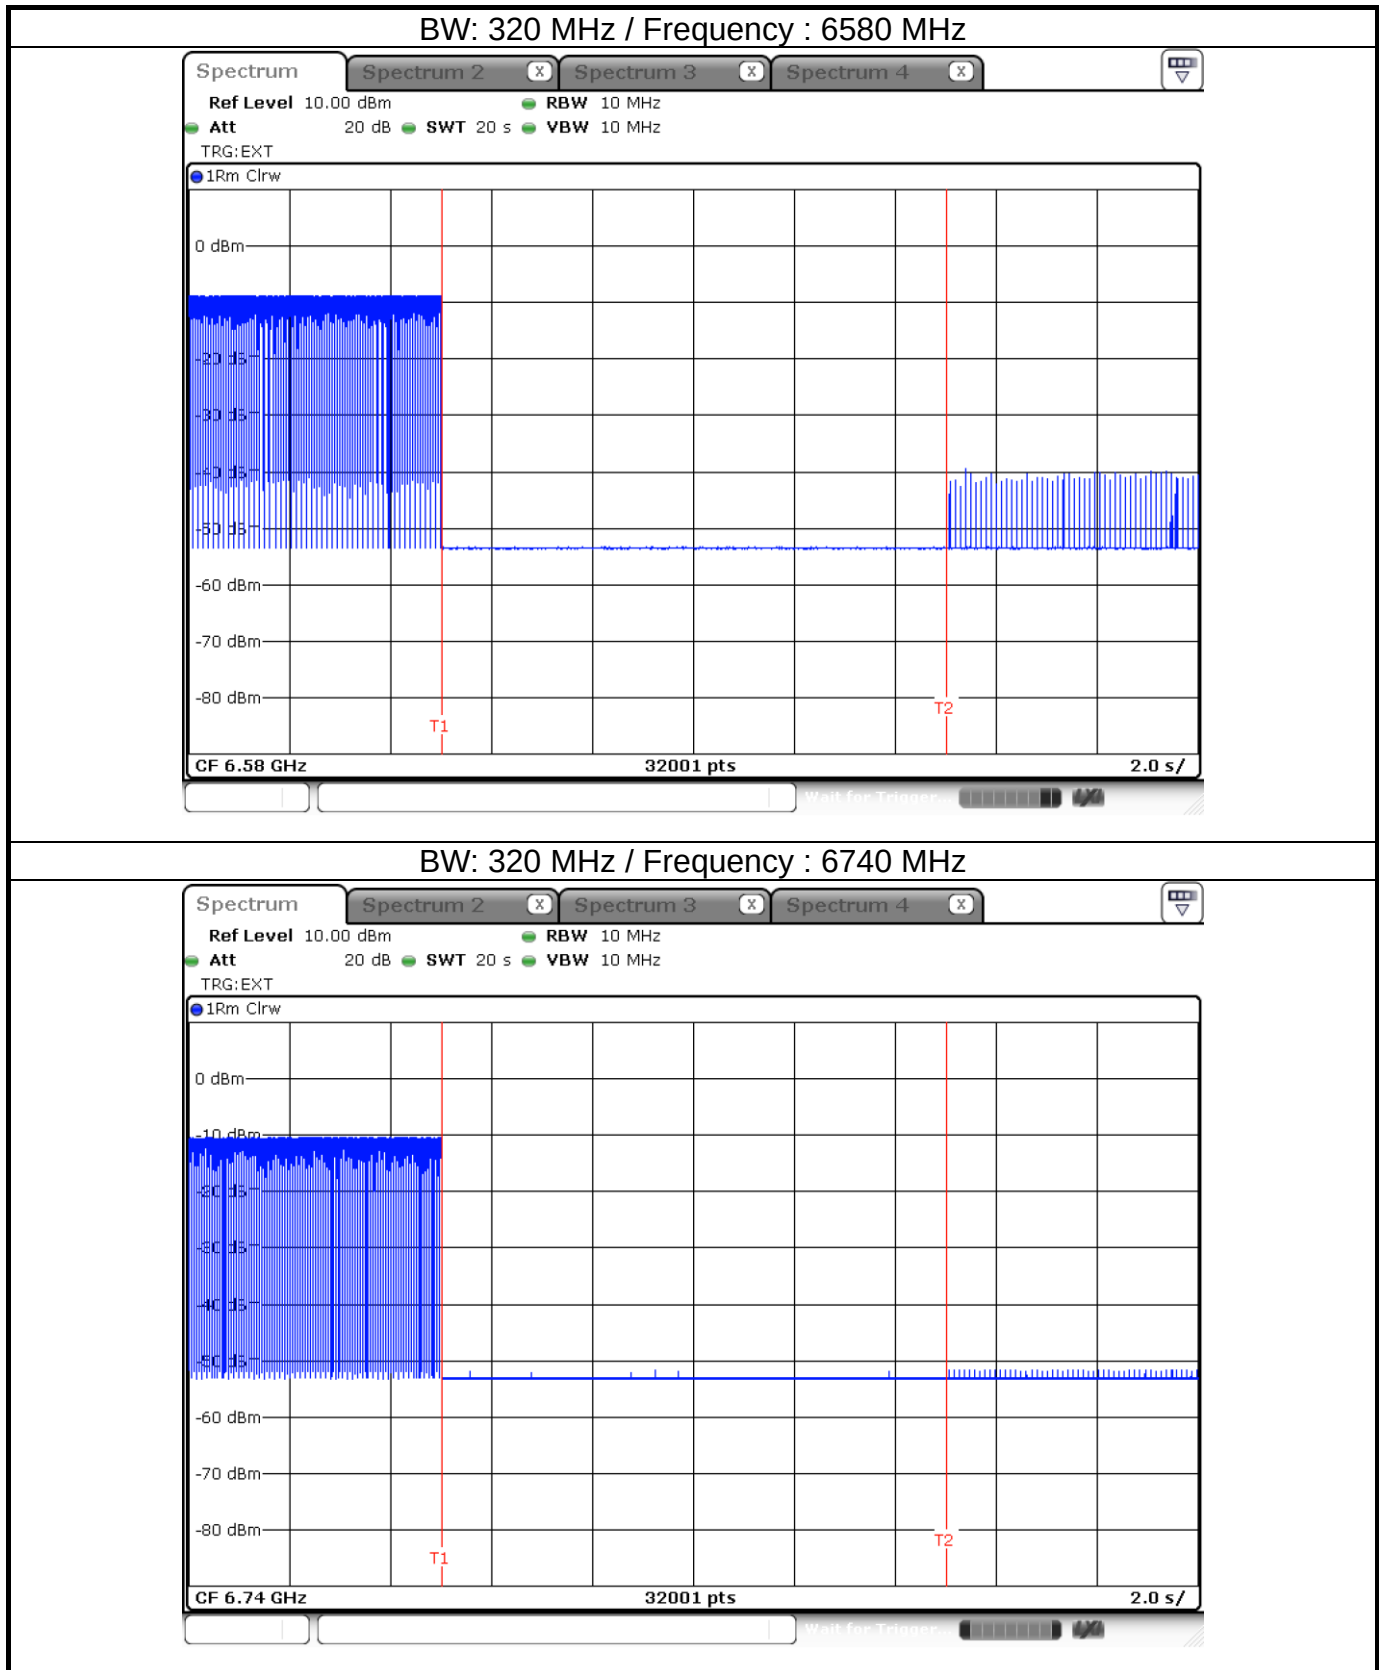

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

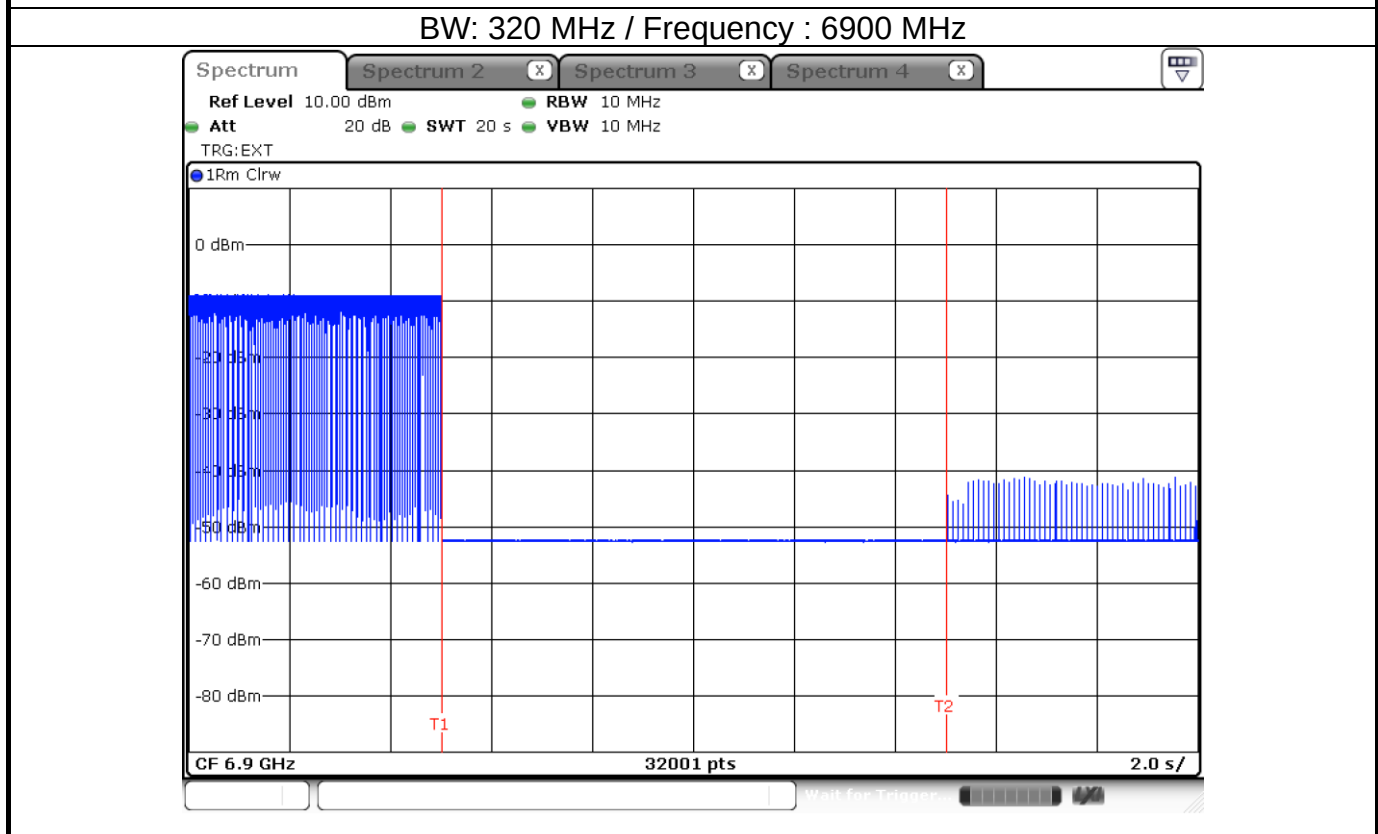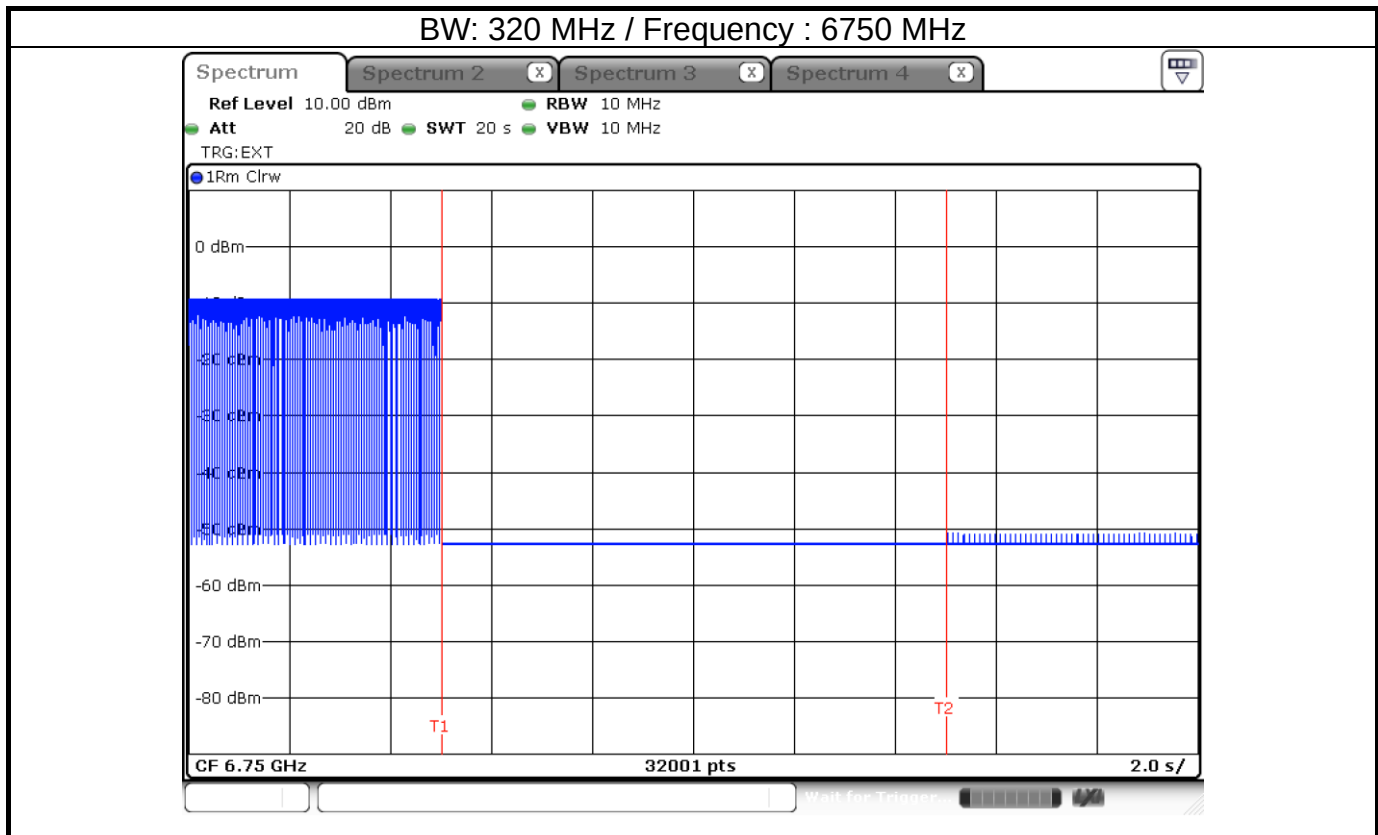

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

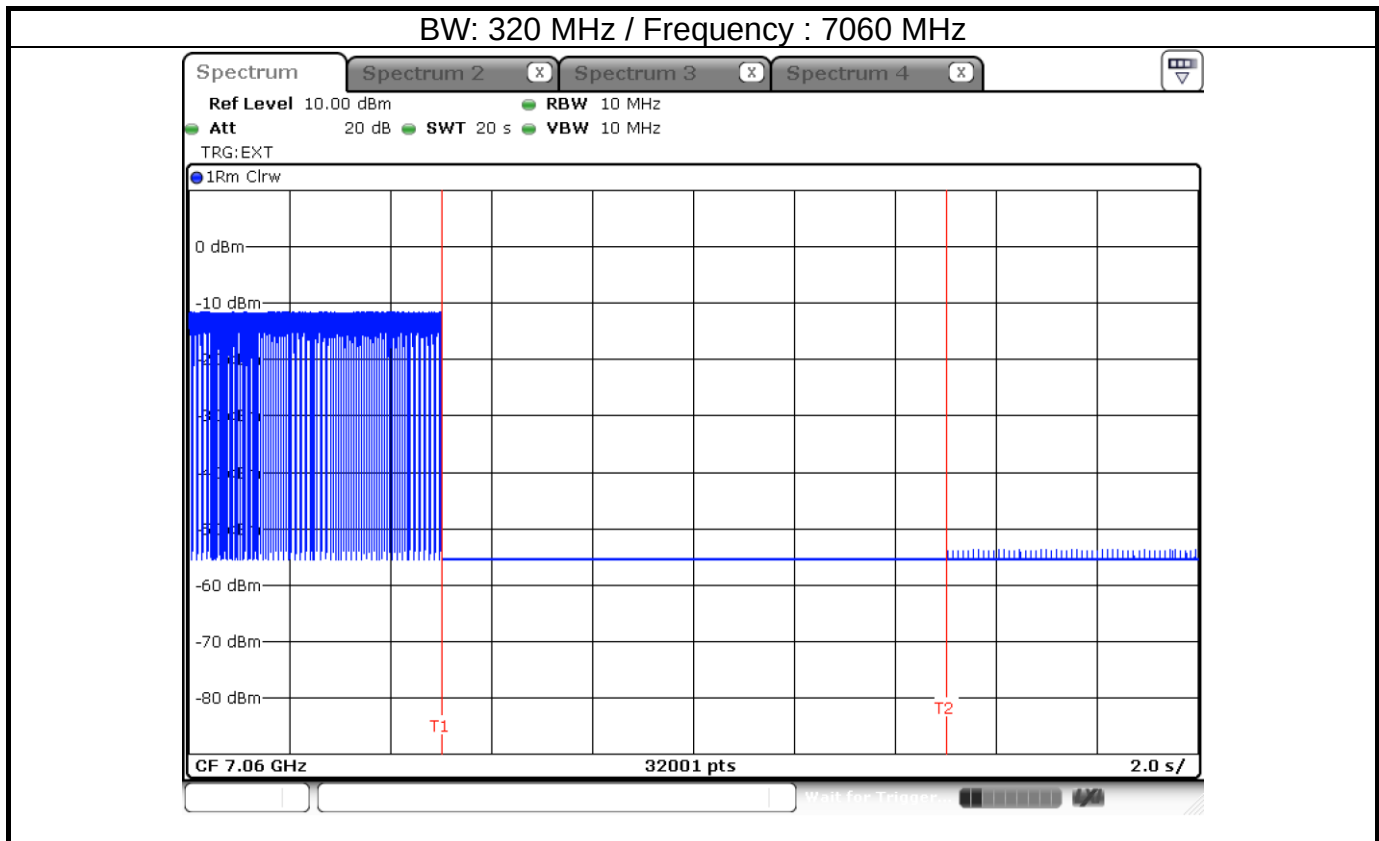

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.