


FCC Test Report

FCC ID : MXF-W1700K2
Equipment : Wi-Fi 7 Router
Model No. : W1700K
Brand Name : LUMEN
Applicant : Gemtek Technology Co., Ltd.
Address : No. 15-1 Zhonghua Road, Hsinchu Industrial
Park, Hukou, Hsinchu, Taiwan, 30352.
Standard : 47 CFR FCC Part 15.407
Equipment Class / Type : ☒ 6SD: Standard power access point
☐ 6FC: Fixed client
☐ 6FX: Standard client
Received Date : May 07, 2025
Tested Date : May 21 ~ Jun. 13, 2025

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	10
1.3	Test Setup Chart	10
1.4	The Equipment List	11
1.5	Test Standards	12
1.6	Reference Guidance	12
1.7	Deviation from Test Standard and Measurement Procedure.....	12
1.8	Measurement Uncertainty	13
2	TEST CONFIGURATION.....	14
2.1	Testing Facility	14
2.2	Test Modes and Channel Details	15
3	TRANSMITTER TEST RESULTS	17
3.1	Emission Bandwidth	17
3.2	RF Output Power.....	18
3.3	Power Spectral Density	20
3.4	Unwanted Emissions.....	21
3.5	In-Band Emissions	24
3.6	Frequency Stability.....	26
3.7	AC Power Line Conducted Emissions	27
4	TEST LABORATORY INFORMATION	28
 Appendix A. Emission Bandwidth		
Appendix B. RF Output Power		
Appendix C. Power Spectral Density		
Appendix D. Unwanted Emissions		
Appendix E. In-Band Emissions		
Appendix F. Frequency Stability		
Appendix G. AC Power Line Conducted Emissions		

Release Record

Report No.	Version	Description	Issued Date
FR560201-02AO	Rev. 01	Initial issue	Nov. 20, 2025

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 18.524MHz 38.08 (Margin -11.92dB) - AV	Pass
15.407(b)(6) 15.209	Unwanted Emission	[dBuV/m at 3m]: 5923.83 MHz 66.69 (Margin -1.51dB) - AV	Pass
15.407(b)(7)	In-Band Emissions (Mask)	Meet the requirement of limit	Pass
15.407(a)(10)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)(4)	RF Output Power (e.i.r.p)	Max Power [dBm]: Non-beamforming mode 5925-6425MHz: 33.49 6525-6875MHz: 33.38 Beamforming mode 5925-6425MHz: 35.51 6525-6875MHz: 35.34	Pass
15.407(a)(4)	Power Spectral Density (e.i.r.p)	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5925 ~ 6425 6525 ~ 6875	11a	5955 ~ 6415 6535 ~ 6855	1 ~ 93 [24] 117 ~ 181 [17]	4	6 Mbps
5925 ~ 6425 6525 ~ 6875	ax (HE20)	5955 ~ 6415 6535 ~ 6855	1 ~ 93 [24] 117 ~ 181 [17]	4	MCS 0-11
5925 ~ 6425 6525 ~ 6875	ax (HE40)	5965 ~ 6405 6565 ~ 6845	3 ~ 91 [12] 123 ~ 179 [8]	4	MCS 0-11
5925 ~ 6425 6525 ~ 6875	ax (HE80)	5985 ~ 6385 6625 ~ 6785	7~ 87[6] 135~167[3]	4	MCS 0-11
5925 ~ 6425 6525 ~ 6875	ax (HE160)	6025 ~ 6345 6665	15 ~ 79 [3] 143 [1]	4	MCS 0-11
5925 ~ 6425 6525 ~ 6875	be (EHT20)	5955 ~ 6415 6535 ~ 6855	1 ~ 93 [24] 117 ~ 181 [17]	4	MCS 0-13
5925 ~ 6425 6525 ~ 6875	be (EHT40)	5965 ~ 6405 6565 ~ 6845	3 ~ 91 [12] 123 ~ 179 [8]	4	MCS 0-13
5925 ~ 6425 6525 ~ 6875	be (EHT80)	5985 ~ 6385 6625 ~ 6785	7~ 87[6] 135~167[3]	4	MCS 0-13
5925 ~ 6425 6525 ~ 6875	be (EHT160)	6025 ~ 6345 6665	15 ~ 79 [3] 143 [1]	4	MCS 0-13
5925 ~ 6425	be (EHT320)	6105 ~ 6265	31 ~ 63 [2]	4	MCS 0-13
Note 1: OFDM/OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM and 4096QAM modulation.					

1.1.2 Antenna Details

Brand	Model	Type	Connector	Operating Frequencies (MHz) / Gain (dBi)	
				5925~6425	6525~6875
Gemtek	WAPE-269BE_6E_Ant1	PIFA	UFL	1.32	2.26
Gemtek	WAPE-269BE_6E_Ant2	PIFA	UFL	2.35	2.75
Gemtek	WAPE-269BE_6E_Ant3	PIFA	UFL	3.32	3.14
Gemtek	WAPE-269BE_6E_Ant4	PIFA	UFL	2.73	2.6
Gemtek	WAPE-269BE_6E_Ant5	PIFA	UFL	4.29	4.39

1.1.3 Configuration of Equipment under Test (EUT)

Power Supply Type	12Vdc from AC adapter	
Beamforming	☒ Support	☐ Not support
RU Configuration	☒ Full RU	☐ Partial RU
Channel Puncturing	☐ Support	☒ Not support

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: LUCENT TRANS ELECTRONICS CO., LTD. Model: 1A133-LHHL I/P: 100-120Vac, 50/60Hz, 1.4A O/P: 12V=4.0A, 48.0W Power Line: 1.8m non-shielded without core
2	AC adapter	Brand: MOSO Model: MS-V4000R120-050A0-US I/P: 100-120Vac, 50/60Hz, 1.3A max O/P: 12V=4.0A, 48.0W Power Line: 1.8m non-shielded without core
3	Fan	Brand: Power Logic Technology Inc. Model: PLA06010S12M Rating: 12Vdc, max.0.15A, max.1.8W
4	Fan	Brand: Shenzhen fuzhineng Electronics Co., Ltd Model: FDF6010S12M Rating: 12Vdc, max.0.18A, max.1.32W

1.1.5 Channel List

802.11a / ax HE20 / be EHT20							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	45	6175	89	6395	153	6715
5	5975	49	6195	93	6415	157	6735
9	5995	53	6215	117	6535	161	6755
13	6015	57	6235	121	6555	165	6775
17	6035	61	6255	125	6575	169	6795
21	6055	65	6275	129	6595	173	6815
25	6075	69	6295	133	6615	177	6835
29	6095	73	6315	137	6635	181	6855
33	6115	77	6335	141	6655	---	---
37	6135	81	6355	145	6675	---	---
41	6155	85	6375	149	6695	---	---

802.11ax HE40 / be EHT40							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	43	6165	83	6365	147	6685
11	6005	51	6205	91	6405	155	6725
19	6045	59	6245	123	6565	163	6765
27	6085	67	6285	131	6605	171	6805
35	6125	75	6325	139	6645	179	6845

802.11ax HE80 / be EHT80							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	55	6225	135	6625	---	---
23	6065	71	6305	151	6705	---	---
39	6145	87	6385	167	6785	---	---

802.11ax HE160 / be EHT160							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
15	6025	47	6185	79	6345	143	6665

802.11ax HE320 / be EHT320							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
31	6105	63	6265	---	---	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	QATool, Version: 0.0.2.99		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11a	97.84%	0.09
	be EHT20-OFDMA	98.62%	0.06
	be EHT40-OFDMA	97.48%	0.11
	be EHT80-OFDMA	95.67%	0.19
	be EHT160-OFDMA	91.75%	0.37
	be EHT320-OFDMA	85.05%	0.70


1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)	Power Index	
		Non-beamforming mode	Beamforming mode
11a	5955	22	---
11a	6175	22	---
11a	6415	22	---
11a	6535	22	---
11a	6715	22	---
11a	6855	22	---
be EHT20-OFDMA	5955	22	44
be EHT20-OFDMA	6175	22	44
be EHT20-OFDMA	6415	22	44
be EHT20-OFDMA	6535	22	44
be EHT20-OFDMA	6715	22	43
be EHT20-OFDMA	6855	22	44
be EHT40-OFDMA	5965	21	42
be EHT40-OFDMA	6005	22.5	46
be EHT40-OFDMA	6165	22.5	46
be EHT40-OFDMA	6405	22.5	45
be EHT40-OFDMA	6565	23	46
be EHT40-OFDMA	6725	22.5	44
be EHT40-OFDMA	6845	23	46
be EHT80-OFDMA	5985	20.5	41
be EHT80-OFDMA	6065	23.5	47
be EHT80-OFDMA	6145	23.5	47
be EHT80-OFDMA	6385	23.5	46
be EHT80-OFDMA	6625	23	46
be EHT80-OFDMA	6705	23	45
be EHT80-OFDMA	6785	23.5	47
be EHT160-OFDMA	6025	20.5	41
be EHT160-OFDMA	6185	22.5	45
be EHT160-OFDMA	6345	22	43
be EHT160-OFDMA	6665	21	42
be EHT320-OFDMA	6105	21.5	43
be EHT320-OFDMA	6265	22	44

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Laptop	DELL	Latitude 5400	DoC	---
2	Laptop	DELL	Latitude E5470	DoC	---
3	RJ45 Load	ICC	---	---	---
4	RJ45 Connector	ICC	RJ45 Connector	---	---

1.3 Test Setup Chart

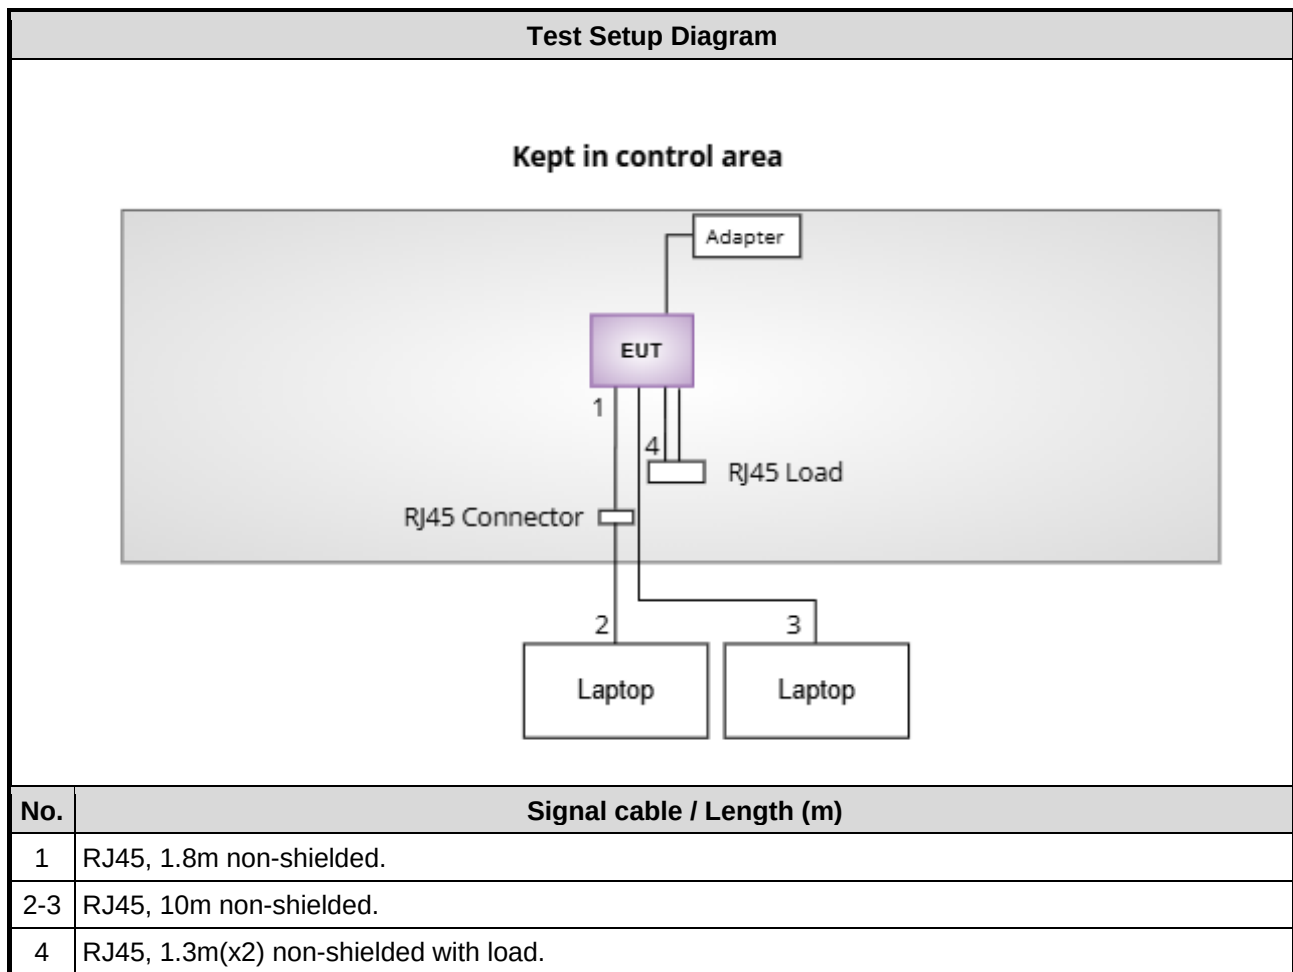

1.4 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	May 07 ~ Jun. 06, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 11, 2025	Mar. 10, 2026
Spectrum Analyzer	R&S	FSV40	101498	Nov. 12, 2024	Nov. 11, 2025
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 05, 2024	Nov. 04, 2025
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 09, 2024	Aug. 08, 2025
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Nov. 28, 2024	Nov. 27, 2025
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 18, 2024	Nov. 17, 2025
Preamplifier	EMC	EMC02325	980225	Jun. 17, 2024	Jun. 16, 2025
Preamplifier	EMC	EMC118A45SE	980898	Jul. 05, 2024	Jul. 04, 2025
Preamplifier	EMC	EMC184045SE	980903	Jul. 30, 2024	Jul. 29, 2025
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 02, 2024	Oct. 01, 2025
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 02, 2024	Oct. 01, 2025
LF cable 11M	EMC	EMCCFD400-NW-NW-1 1000	200801	Oct. 02, 2024	Oct. 01, 2025
LF cable 1M	EMC	EMCCFD400-NM-NM-1 000	160502	Oct. 02, 2024	Oct. 01, 2025
RF Cable	EMC	EMC104-35M-35M-8000	210920	Oct. 02, 2024	Oct. 01, 2025
RF Cable	EMC	EMC104-35M-35M-3000	210922	Oct. 02, 2024	Oct. 01, 2025
Attenuator	Pasternack	PE7005-10	10-1	Oct. 02, 2024	Oct. 01, 2025
HIGHPASS FILTER 7.5-18G	STI	STI15-9722	STI-HP7.5G-A	Oct. 02, 2024	Oct. 01, 2025
Measurement Software	Sporton	SENSE-EMI	V5.11	NA	NA
Measurement Software	Sporton	SENSE-15407_NII	V5.11	NA	NA
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	May 26 ~ Jun. 10, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101910	Apr. 18, 2025	Apr. 17, 2026
Power Meter	Anritsu	ML2495A	1241002	Nov. 26, 2024	Nov. 25, 2025
Power Sensor	Anritsu	MA2411B	1207366	Nov. 26, 2024	Nov. 25, 2025
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Jul. 01, 2024	Jun. 30, 2025
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 27, 2024	Dec. 26, 2025
Attenuator	Pasternack	PE7005-10	10-2	Oct. 04, 2024	Oct. 03, 2025
Measurement Software	Sporton	SENSE-15407_NII	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Test Date	Jun. 09, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 25, 2025	Feb. 24, 2026
LISN	R&S	ENV216	101579	May 07, 2025	May.06, 2026
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Mar. 21, 2025	Mar. 20, 2026
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Oct. 09, 2024	Oct. 08, 2025
50 ohm terminal	NA	50	01	Jun. 19, 2024	Jun. 18, 2025
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.407

ANSI C63.10-2020

ANSI C63.4-2014 + C63.4a-2017

1.6 Reference Guidance

FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03r

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Frequency error	$\pm 1 \times 10^{-9}$
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.41 dB
Radiated emission > 1 GHz	± 4.59 dB
Time	$\pm 0.1\%$
Temperature	± 0.4 °C

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corp.
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 33381, Taiwan, R.O.C.

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Non-beamforming mode				
AC Power Line Conducted Emissions	be EHT80-OFDMA	6385	MCS 0	---
Unwanted Emissions ≤1GHz	be EHT80-OFDMA	6385	MCS 0	---
Unwanted Emissions >1GHz Emission Bandwidth Power Spectral Density In-Band Emissions	11a	5955 / 6175 / 6415 / 6535 / 6715 / 6855	6Mbps	---
	be EHT20-OFDMA	5955 / 6175 / 6415 / 6535 / 6715 / 6855	MCS 0	---
	be EHT40-OFDMA	5965 / 6165 / 6405 / 6565 / 6725 / 6845	MCS 0	
	be EHT80-OFDMA	5985 / 6145 / 6385 / 6625 / 6705 / 6785	MCS 0	
	be EHT160-OFDMA	6025 / 6185 / 6345 / 6665	MCS 0	
	be EHT320-OFDMA	6105 / 6265	MCS 0	---
RF Output Power	11a	5955 / 6175 / 6415 / 6535 / 6715 / 6855	6Mbps	---
	be EHT20-OFDMA	5955 / 6175 / 6415 / 6535 / 6715 / 6855	MCS 0	---
	be EHT40-OFDMA	5965 / 6005 / 6165 / 6405 / 6565 / 6725 / 6845	MCS 0	
	be EHT80-OFDMA	5985 / 6065 / 6145 / 6385 / 6625 / 6705 / 6785	MCS 0	
	be EHT160-OFDMA	6025 / 6185 / 6345 / 6665	MCS 0	
	be EHT320-OFDMA	6105 / 6265	MCS 0	---
Frequency Stability	Un-modulation	6175 / 6715	---	---
NOTE: - The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane results were found as the worst case and were shown in this report. - Two AC adapter (LUCENT TRANS ELECTRONICS CO., LTD. and MOSO) had been covered during the pretest, and found that MOSO worst case and was selected for final test. - Two Fans (Power Logic Technology Inc. and Shenzhen fuzhineng Electronics Co., Ltd) had been covered during the pretest, and found that Power Logic Technology Inc. was the worst case and was selected for final test. - Non-beamforming and beamforming mode had been covered during the pretest. The worst mode is Non-beamforming thus Non-beamforming is tested for all test items.				

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Beamforming mode				
RF Output Power	be EHT20-OFDMA	5955 / 6175 / 6415 / 6535 / 6715 / 6855	MCS 0	---
	be EHT40-OFDMA	5965 / 6005 / 6165 / 6405 / 6565 / 6725 / 6845	MCS 0	
	be EHT80-OFDMA	5985 / 6065 /6145 / 6385 / 6625 / 6705 / 6785	MCS 0	
	be EHT160-OFDMA	6025 / 6185 / 6345 / 6665	MCS 0	
	be EHT320-OFDMA	6105 / 6265	MCS 0	
NOTE:				
1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane results were found as the worst case and were shown in this report. 2. Two AC adapter (LUCENT TRANS ELECTRONICS CO., LTD. and MOSO) had been covered during the pretest, and found that MOSO worst case and was selected for final test. 3. Two Fans (Power Logic Technology Inc. and Shenzhen fuzhineng Electronics Co., Ltd) had been covered during the pretest, and found that Power Logic Technology Inc. was the worst case and was selected for final test. 4. Non-beamforming and beamforming mode had been covered during the pretest. The worst mode is Non-beamforming thus Non-beamforming is tested for all test items.				

3 Transmitter Test Results

3.1 Emission Bandwidth

3.1.1 Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

3.1.2 Test Procedures


26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW.
2. Set VBW $\geq$ 3 RBW.
3. Sample detection and single sweep mode shall be used.
4. Use the 99 % power bandwidth function of the instrument.

3.1.3 Test Setup



3.1.4 Test Result

Ambient Condition	24°C / 62-68%	Tested By	Roger Lu
-------------------	---------------	-----------	----------

Refer to Appendix A.

3.2 RF Output Power

3.2.1 Limit

Frequency Band	Operating Mode	Maximum EIRP Limit
5925 ~ 6425 MHz 6525 ~ 6875 MHz	☒ Standard power access point	36 dBm For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
	☐ Fixed client	36 dBm For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
	☐ Standard client	30 dBm

3.2.2 Test Procedures


Method PM-G (Measurement using a gated RF average power meter)

1. Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
2. EIRP = Measured conducted power + Antenna gain

Spectrum analyzer

1. Set RBW = 1MHz, VBW = 3MHz, Sweep time = Auto, Detector = RMS.
2. Trace average at least 100 traces in power averaging mode.
3. Compute power by integrating the spectrum across the 26 dB EBW.
4. Add $10 \log(1/X)$, X:duty cycle) if duty cycle is <98%.
5. EIRP = Measured conducted power + Antenna gain

3.2.3 Test Setup

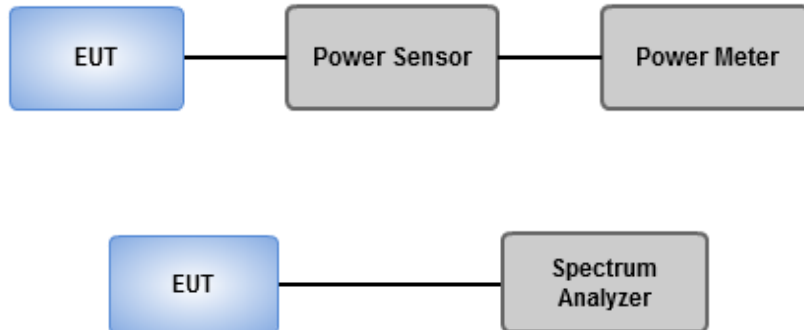

3.2.4 Test Result

Ambient Condition	24°C / 62-68%	Tested By	Roger Lu
--------------------------	---------------	------------------	----------

Refer to Appendix B.

3.3 Power Spectral Density

3.3.1 Limit

Frequency Band	Operating Mode	Limit
5925 ~ 6425 MHz 6525 ~ 6875 MHz	☒ Standard power access point	EIRP: 23 dBm / 1 MHz
	☐ Fixed client	EIRP: 23 dBm / 1 MHz
	☐ Standard client	EIRP: 17 dBm / 1 MHz

3.3.2 Test Procedures


Duty cycle $\geq$ 98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.
4. EIRP PSD = Measured conducted power density + Antenna gain

Duty cycle < 98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.
6. EIRP PSD = Measured conducted power density + Antenna gain

3.3.3 Test Setup



3.3.4 Test Result

Ambient Condition	24°C / 62-68%	Tested By	Roger Lu
-------------------	---------------	-----------	----------

Refer to Appendix C.

3.4 Unwanted Emissions

3.4.1 Limit of Unwanted Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit		
Operating Band	PK Limit	AV Limit
5.925 – 6.875 GHz	e.i.r.p. -7 dBm [88.2 dBuV/m@3m]	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Radiated Emissions below 1 GHz

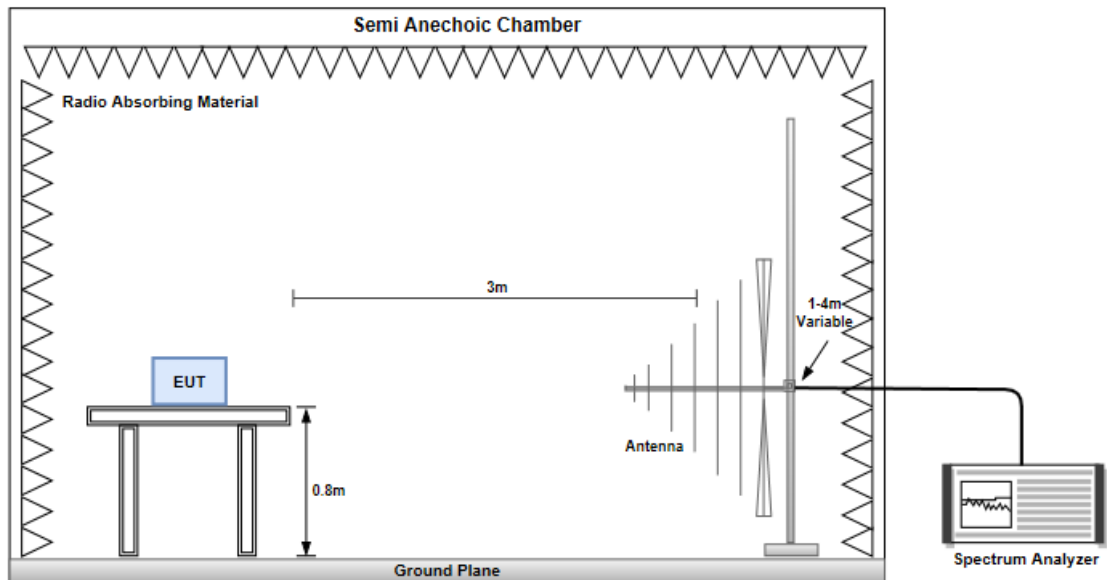

Radiated Emissions above 1 GHz

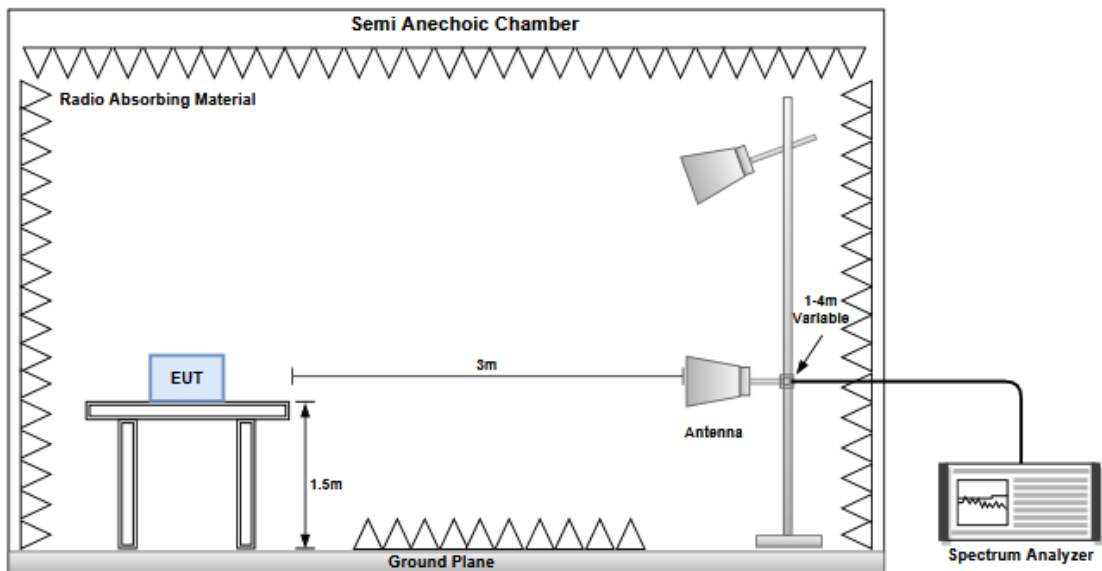

3.4.4 Test Results


Ambient Condition	23-25°C / 61-66%	Tested By	Roger / Brad Wu
--------------------------	------------------	------------------	-----------------

Refer to Appendix D.

3.5 In-Band Emissions

3.5.1 Limit


Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

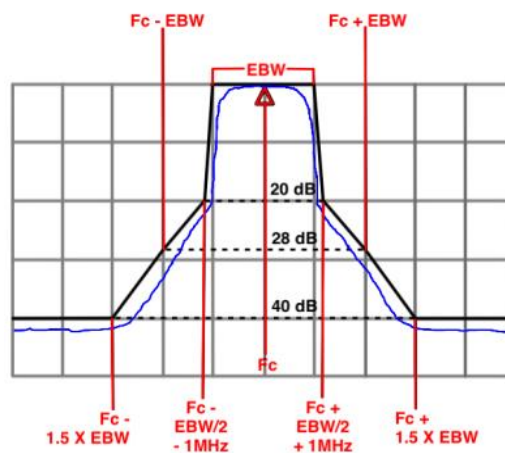

3.5.2 Test Procedures

1. Connect output of the antenna port to a spectrum analyzer
2. Set the reference level of the measuring equipment
3. Measure the 26 dB EBW
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

3.5.3 Test Setup



3.5.4 Test Results

Ambient Condition	24°C / 62-68%	Tested By	Roger Lu
-------------------	---------------	-----------	----------

Refer to Appendix E.

3.6 Frequency Stability


3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 20 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under normal and extreme condition for temperature and voltage.

3.6.3 Test Setup

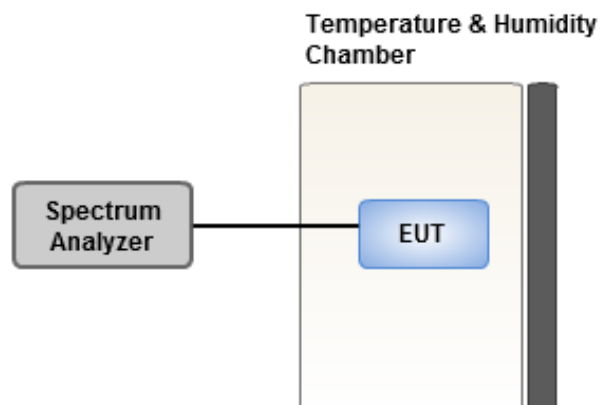

3.6.4 Test Result of Frequency Stability

Ambient Condition	24°C / 62-68%	Tested By	Roger Lu
--------------------------	---------------	------------------	----------

Refer to Appendix F.

3.7 AC Power Line Conducted Emissions

3.7.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.7.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.7.3 Test Setup

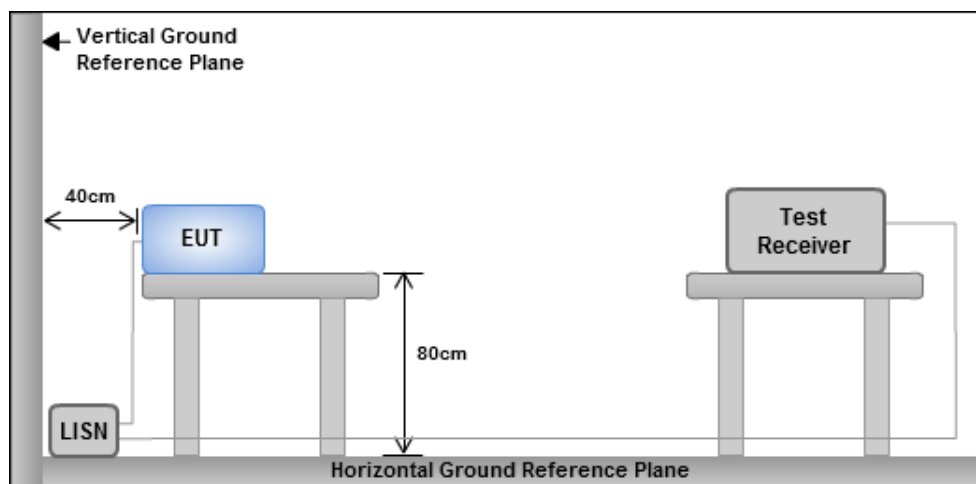

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.7.4 Test Result

Refer to Appendix G.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	39.534M	16.74M	16M7D1D	29.7M	16.459M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	34.848M	19.019M	19M0D1D	19.998M	18.894M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	79.464M	38.082M	38M1D1D	39.6M	37.744M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	166.848M	78.153M	78M2D1D	80.256M	77.273M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	314.16M	157.583M	158MD1D	162.096M	156.183M
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	365.376M	317.349M	317MD1D	328.416M	314.808M
6.525-6.875GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	42.702M	21.899M	21M9D1D	31.944M	16.556M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	38.412M	19.227M	19M2D1D	22.506M	18.938M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	81.312M	38.699M	38M7D1D	64.944M	37.998M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	161.568M	79.145M	79M1D1D	106.392M	77.59M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	313.632M	157.341M	157MD1D	168.96M	156.782M

Max-N dB = Maximum 26dB down bandwidth

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 26dB down bandwidth

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX										
5955MHz	Pass	Inf	39.534M	16.74M	37.224M	16.728M	33.594M	16.642M	33.594M	16.694M
6175MHz	Pass	Inf	34.056M	16.538M	38.808M	16.631M	37.29M	16.722M	32.142M	16.593M
6415MHz	Pass	Inf	34.584M	16.556M	36.036M	16.647M	36.102M	16.642M	29.7M	16.459M
6535MHz	Pass	Inf	39.93M	17.025M	36.564M	16.71M	31.944M	16.556M	34.386M	16.661M
6715MHz	Pass	Inf	42.702M	19.747M	42.57M	21.899M	39.336M	16.954M	39.468M	17.008M
6855MHz	Pass	Inf	38.28M	16.688M	42.24M	17.749M	41.778M	17.648M	38.412M	16.732M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA										
5955MHz	Pass	Inf	32.604M	18.965M	34.848M	18.999M	26.862M	18.991M	31.152M	19.006M
6175MHz	Pass	Inf	29.37M	18.981M	20.526M	18.95M	29.766M	19.019M	32.934M	19.003M
6415MHz	Pass	Inf	19.998M	18.894M	21.978M	18.957M	20.064M	18.954M	20.064M	18.921M
6535MHz	Pass	Inf	32.67M	19.006M	30.162M	18.999M	26.4M	18.976M	24.552M	18.973M
6715MHz	Pass	Inf	35.574M	19.073M	38.412M	19.227M	31.614M	19.044M	22.506M	19.016M
6855MHz	Pass	Inf	26.994M	18.938M	32.67M	19.019M	33.132M	19.033M	27.06M	18.953M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA										
5965MHz	Pass	Inf	39.732M	37.774M	39.864M	37.775M	39.6M	37.863M	39.6M	37.744M
6165MHz	Pass	Inf	64.284M	37.968M	48.444M	37.867M	79.464M	38.082M	64.944M	37.943M
6405MHz	Pass	Inf	40.524M	37.906M	66M	38.026M	59.928M	37.948M	48.18M	37.881M
6565MHz	Pass	Inf	69.828M	38.147M	69.96M	38.101M	72.732M	38.098M	65.736M	38.096M
6725MHz	Pass	Inf	71.412M	38.175M	79.992M	38.699M	73.524M	38.084M	64.944M	37.998M
6845MHz	Pass	Inf	74.844M	38.016M	81.312M	38.538M	80.784M	38.272M	70.62M	38.02M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA										
5985MHz	Pass	Inf	89.232M	77.479M	92.4M	77.411M	80.256M	77.273M	80.256M	77.459M
6145MHz	Pass	Inf	139.92M	78.029M	149.952M	77.891M	151.272M	78.153M	140.448M	78.134M
6385MHz	Pass	Inf	124.608M	77.883M	166.848M	78.046M	128.04M	77.891M	144.672M	77.816M
6625MHz	Pass	Inf	156.024M	77.871M	139.392M	77.941M	106.392M	77.59M	123.024M	77.766M
6705MHz	Pass	Inf	130.152M	78.364M	134.64M	79.145M	111.936M	77.811M	111.144M	77.848M
6785MHz	Pass	Inf	150.48M	78.073M	161.568M	78.359M	152.592M	78.115M	130.944M	77.927M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA										
6025MHz	Pass	Inf	162.624M	156.377M	162.096M	156.183M	162.624M	156.25M	162.624M	156.314M
6185MHz	Pass	Inf	313.104M	157.574M	314.16M	157.524M	303.6M	157.583M	308.352M	157.362M
6345MHz	Pass	Inf	162.624M	156.916M	162.624M	156.964M	162.624M	157.039M	162.624M	157.019M
6665MHz	Pass	Inf	229.68M	157.019M	313.632M	157.341M	171.072M	156.782M	168.96M	156.849M
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA										
6105MHz	Pass	Inf	328.416M	316.261M	330.528M	316.601M	333.696M	316.172M	328.416M	314.808M
6265MHz	Pass	Inf	329.472M	317.31M	365.376M	317.349M	329.472M	316.863M	329.472M	316.218M



Port X-N dB = 26dB down bandwidth

Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5955MHz

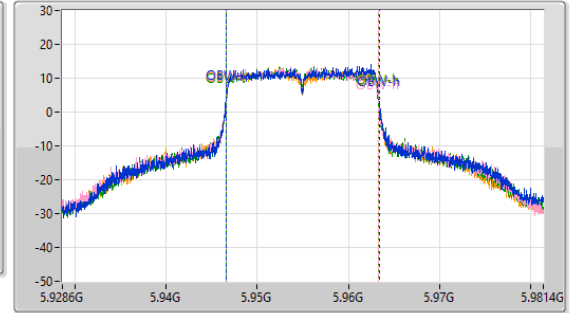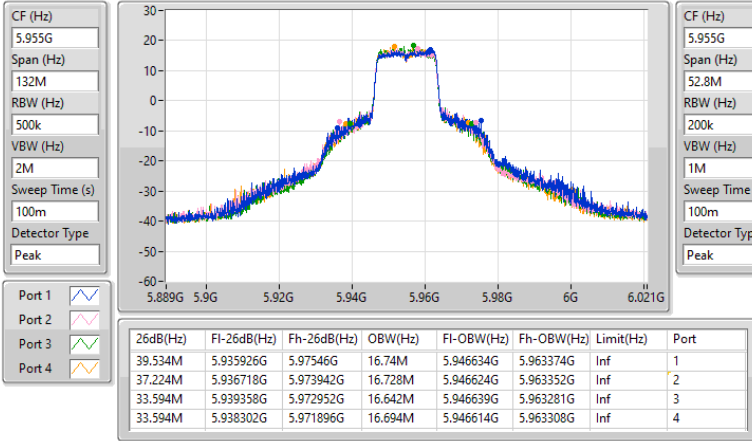

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6175MHz

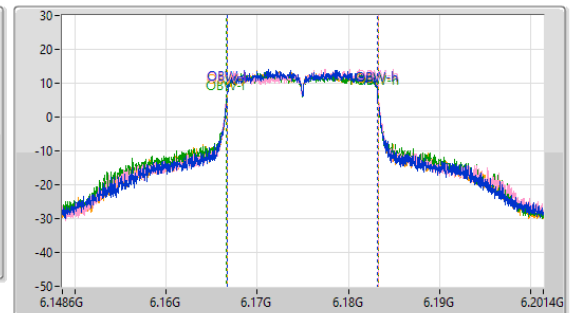
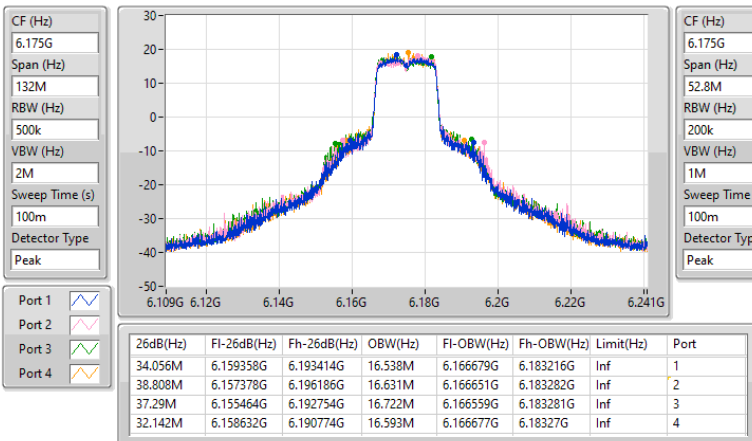




5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



6415MHz

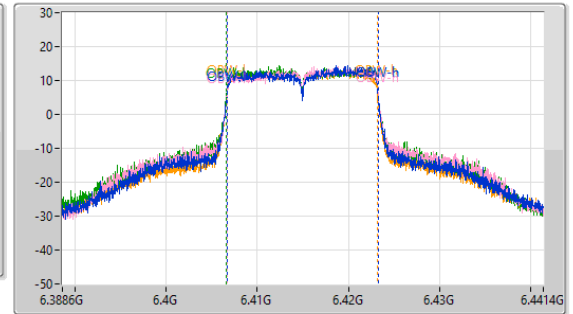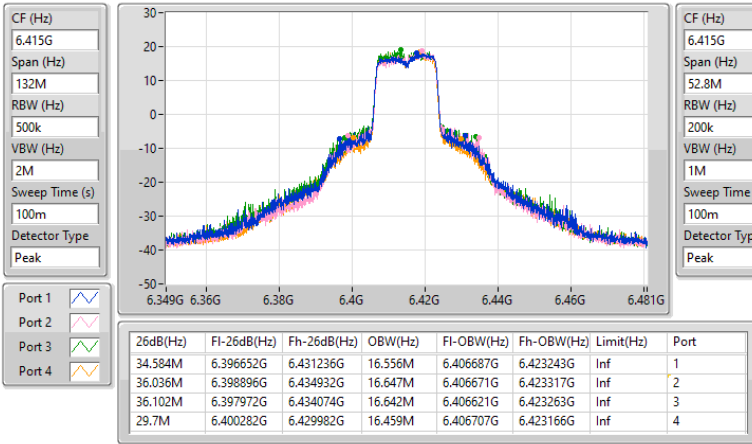

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6535MHz

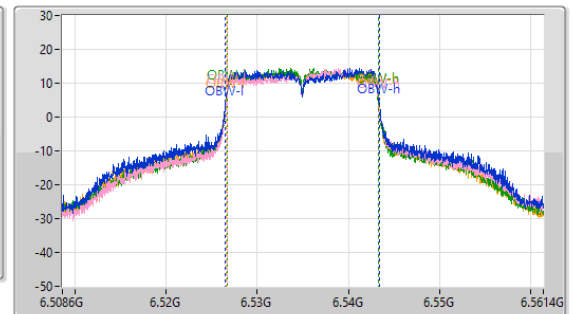
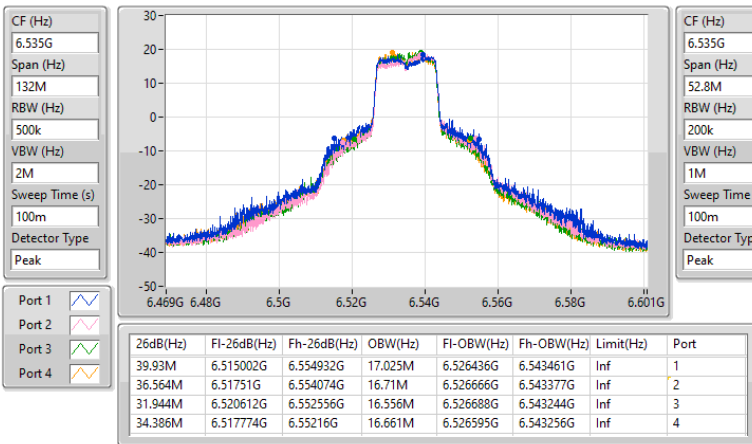




6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



6715MHz

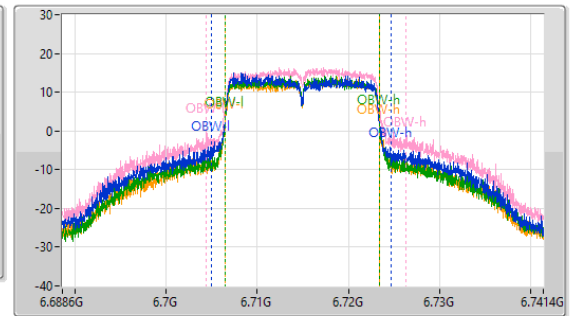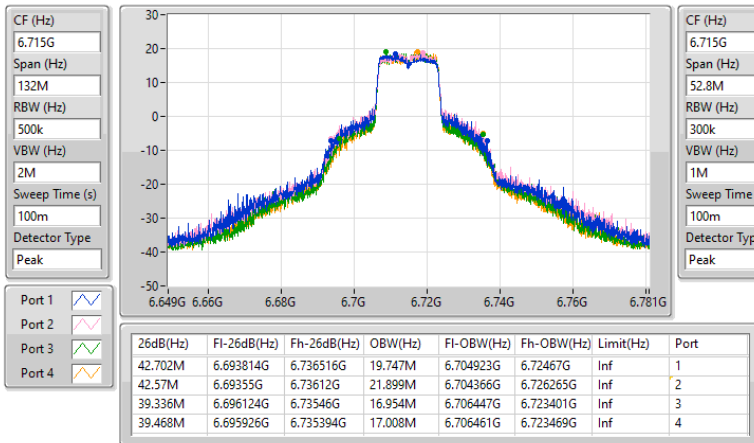

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6855MHz

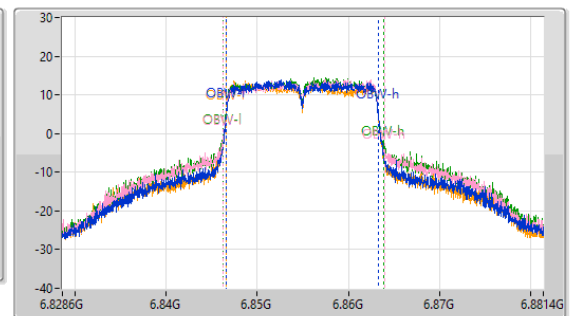
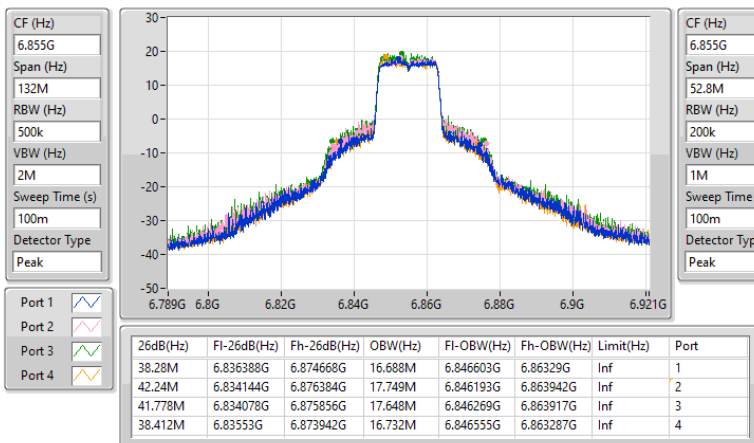




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5955MHz

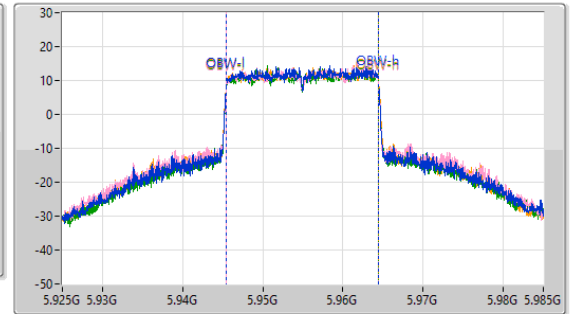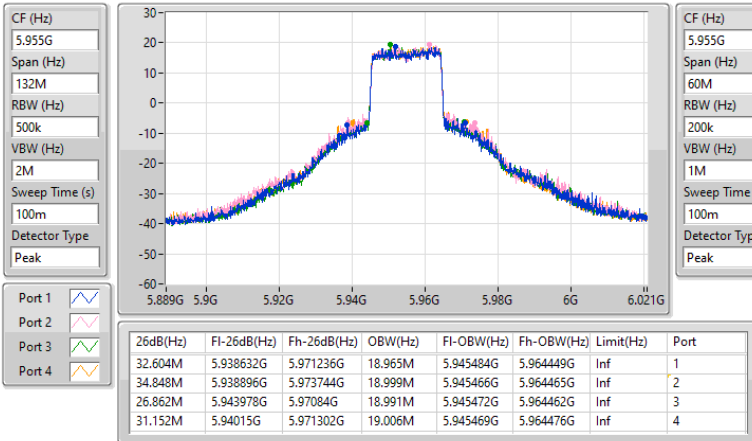

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6175MHz

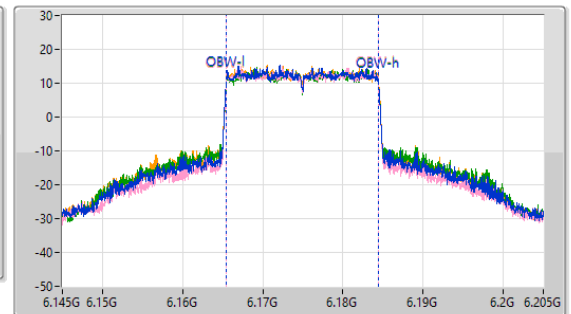
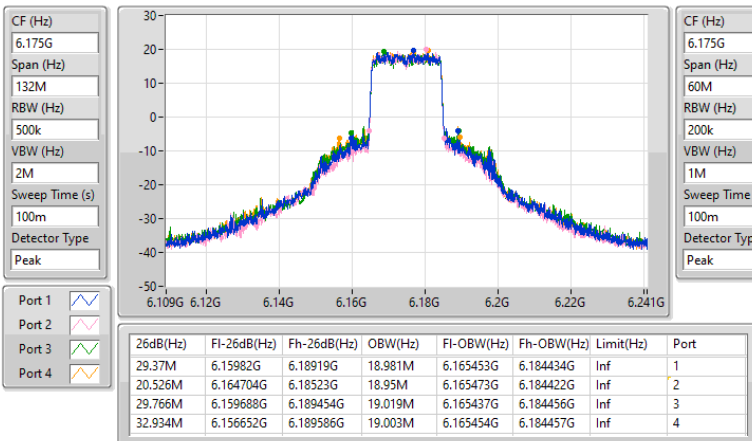




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6415MHz

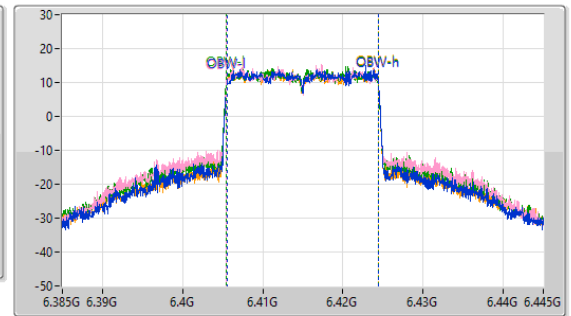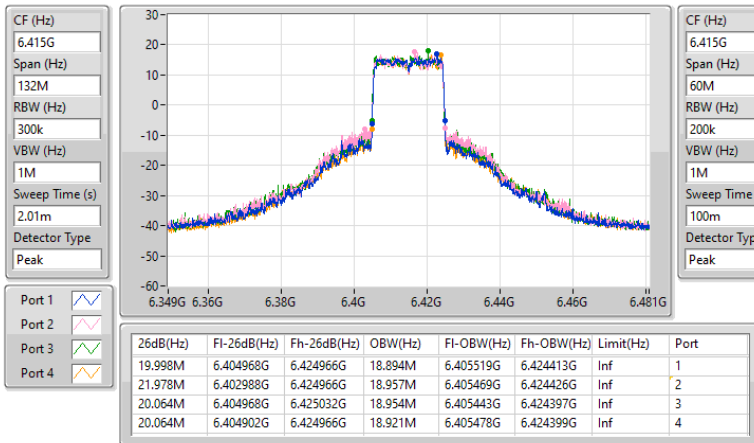

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6535MHz

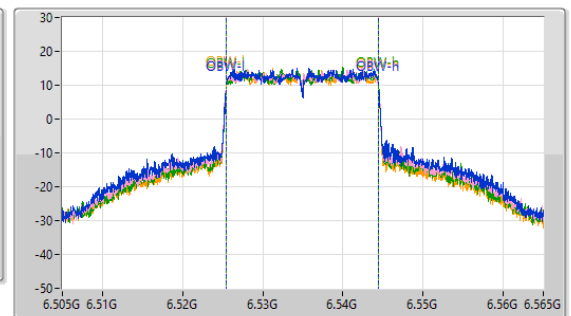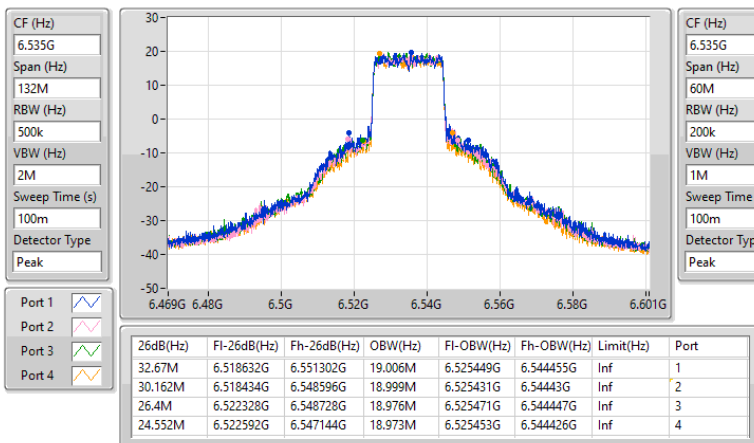




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6715MHz

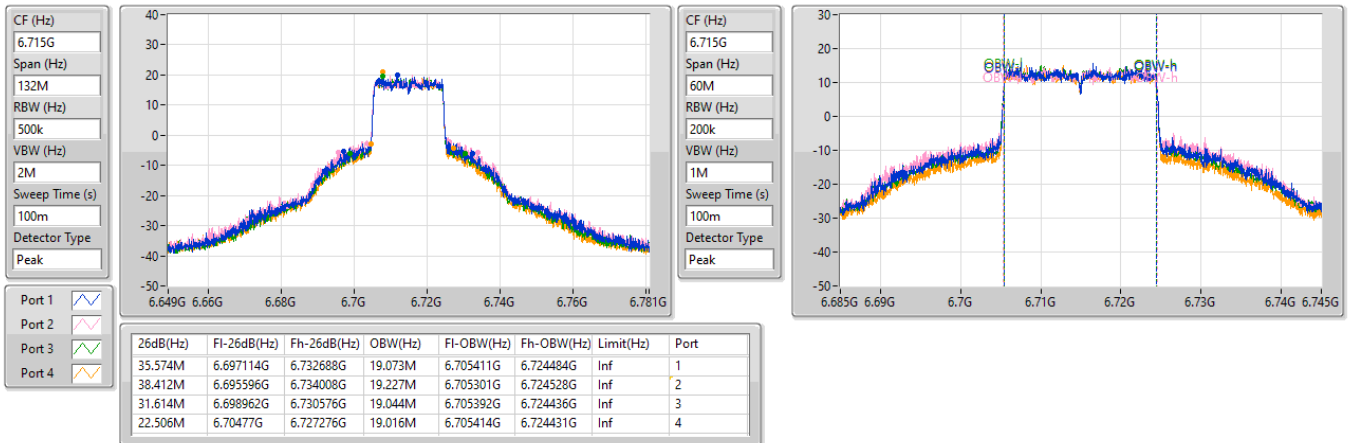

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6855MHz

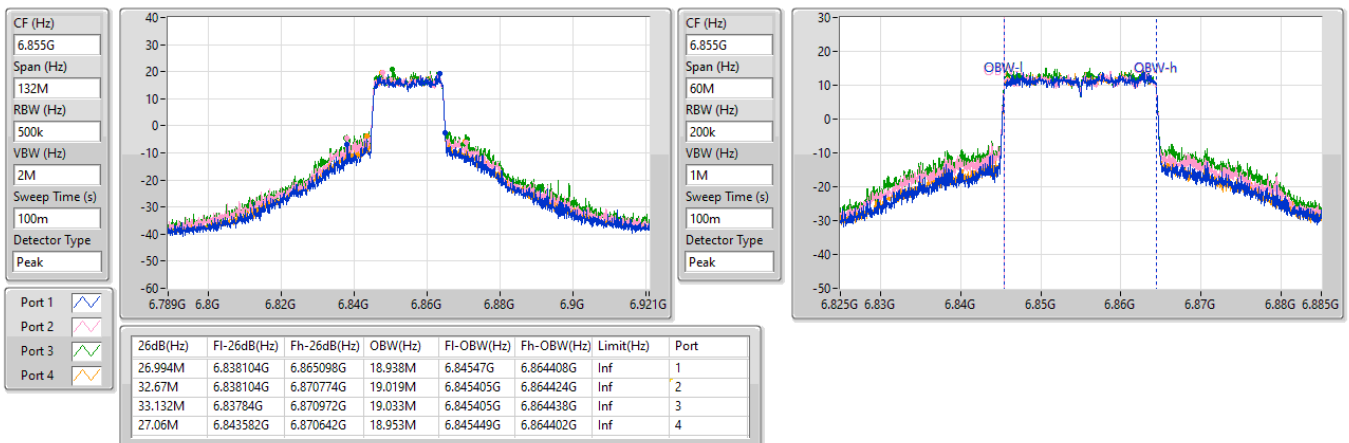




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


5965MHz

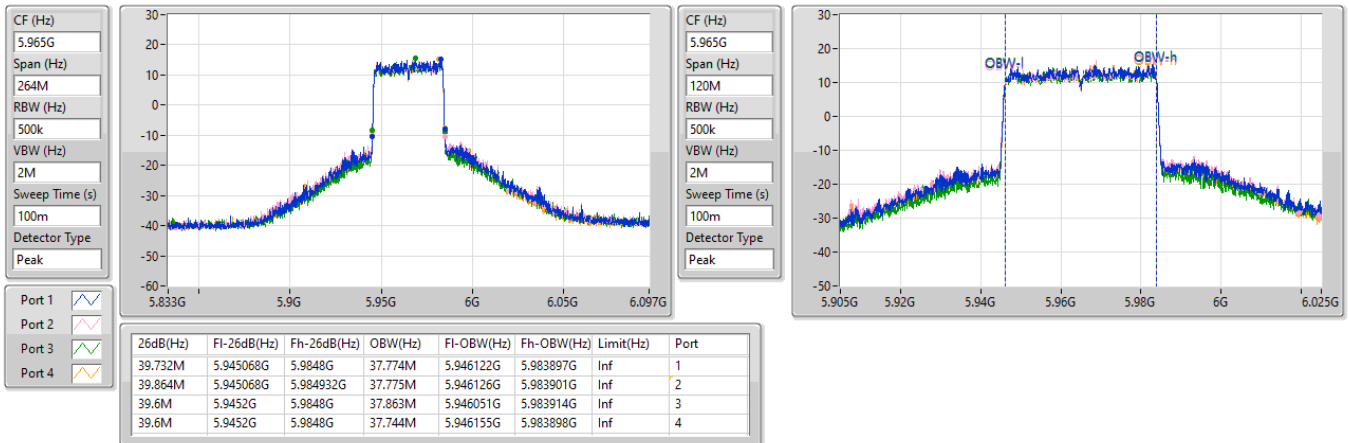

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6165MHz

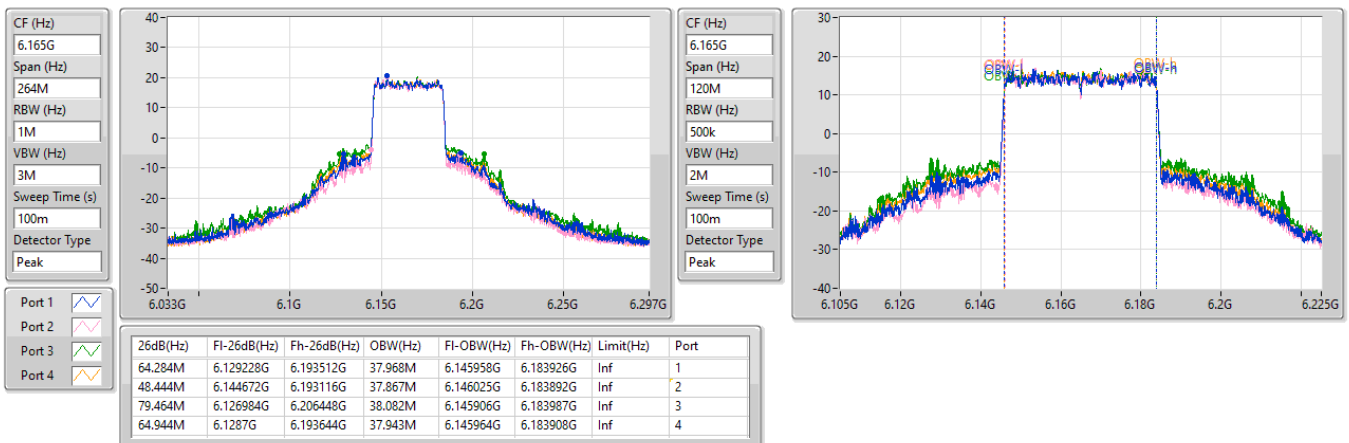




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6405MHz

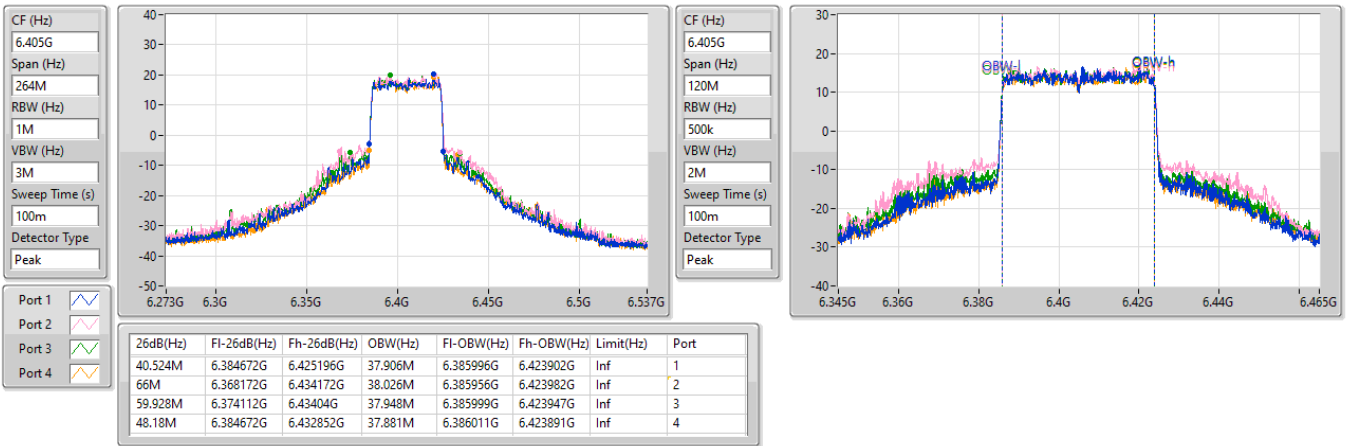

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6565MHz

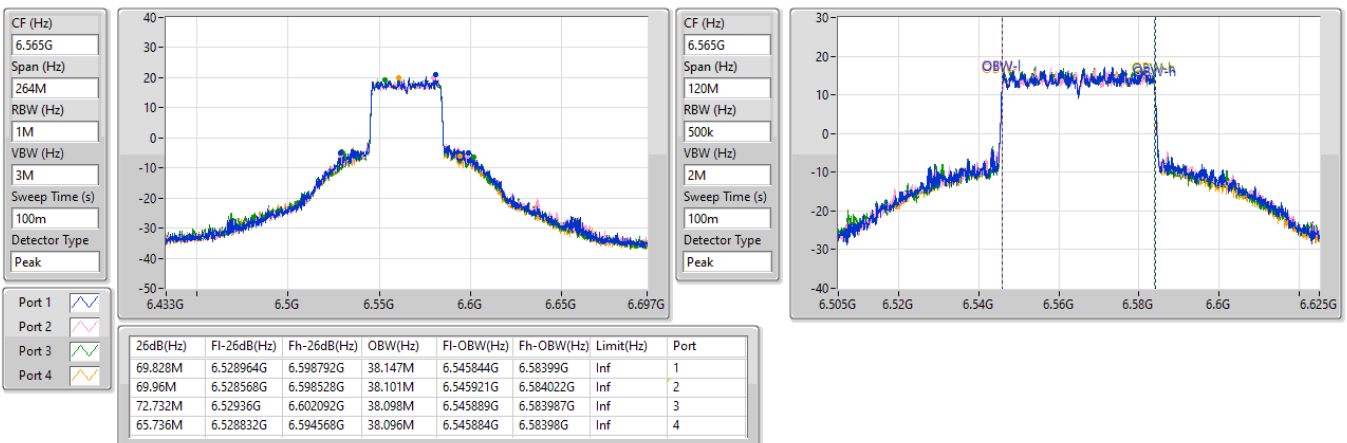




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6725MHz

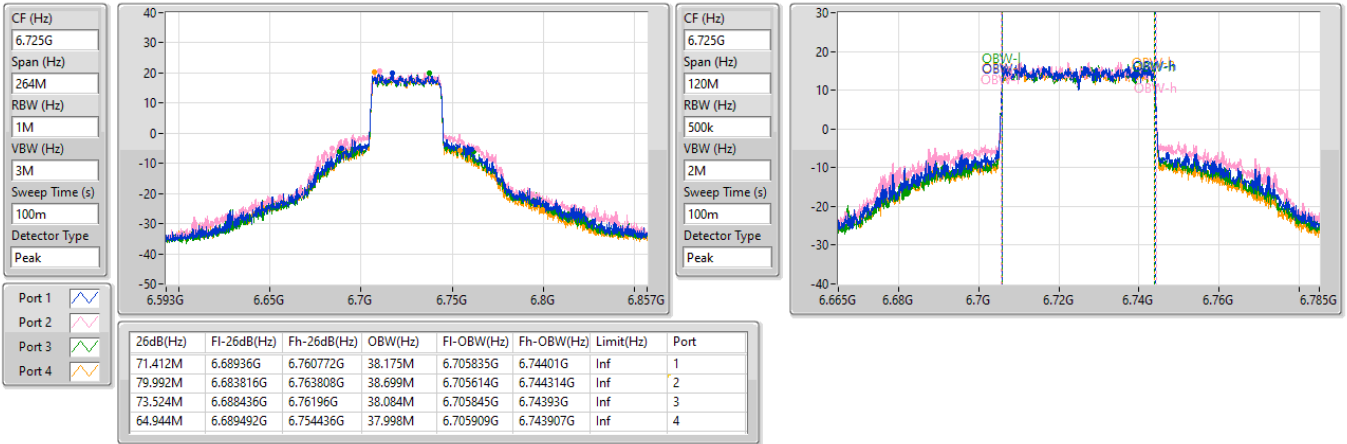

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6845MHz


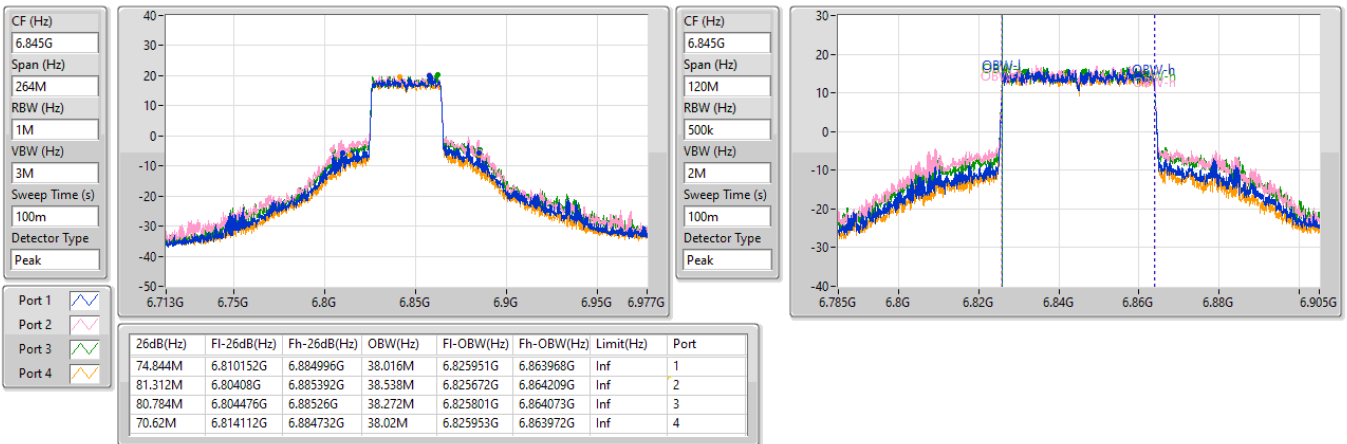




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



5985MHz

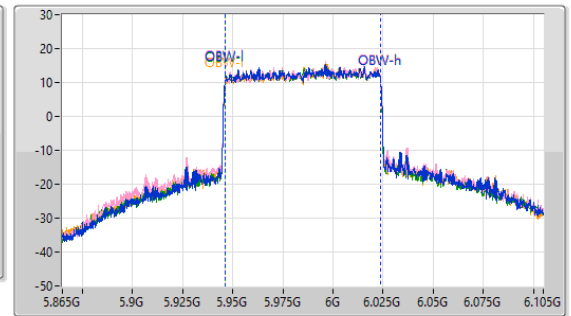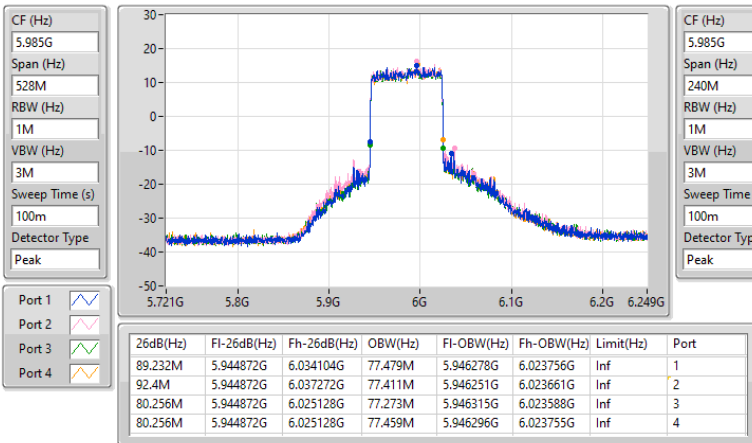

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6145MHz

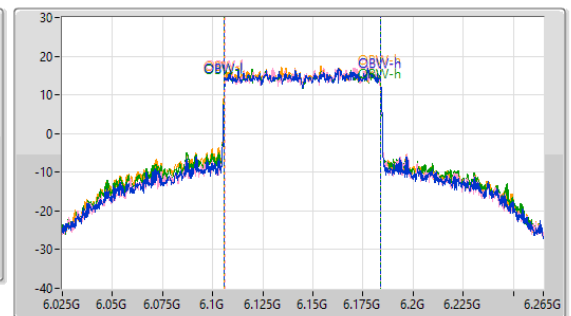
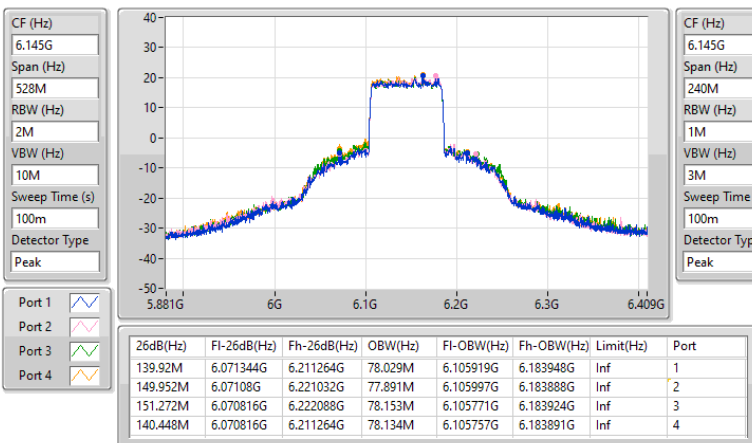




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6385MHz

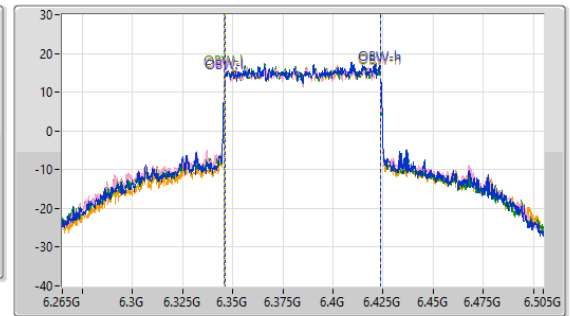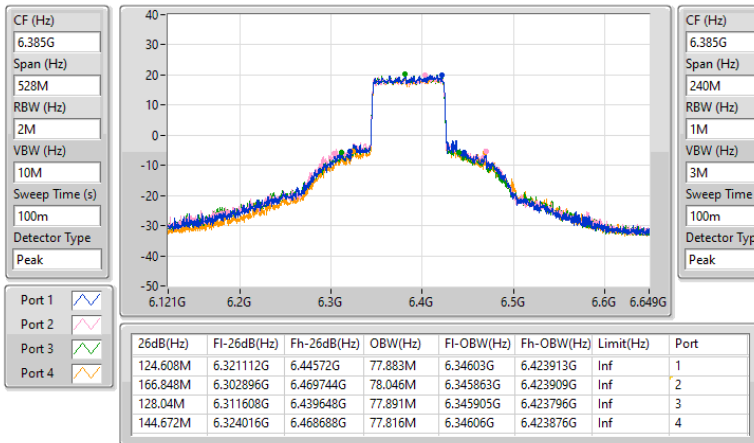

5.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6625MHz

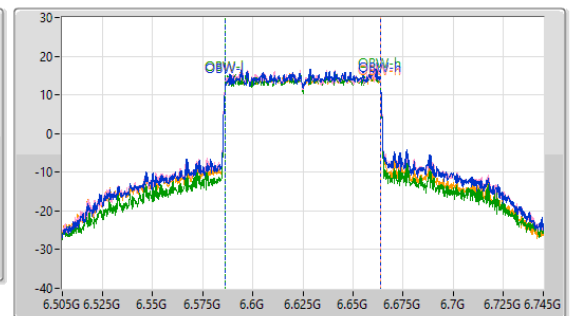
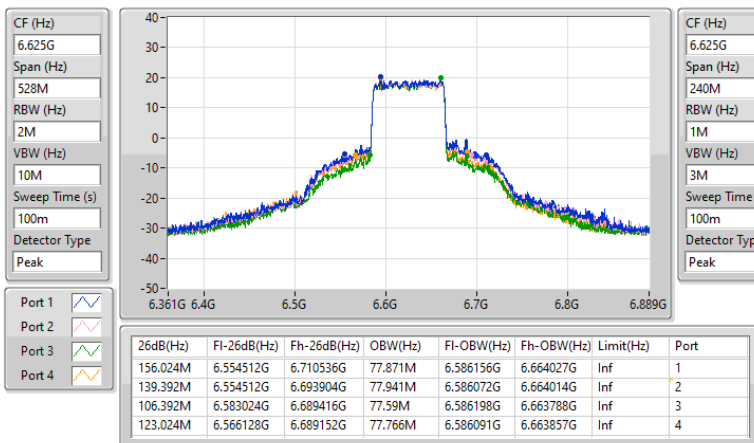




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6705MHz

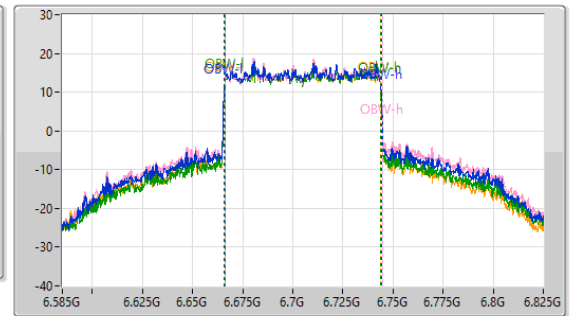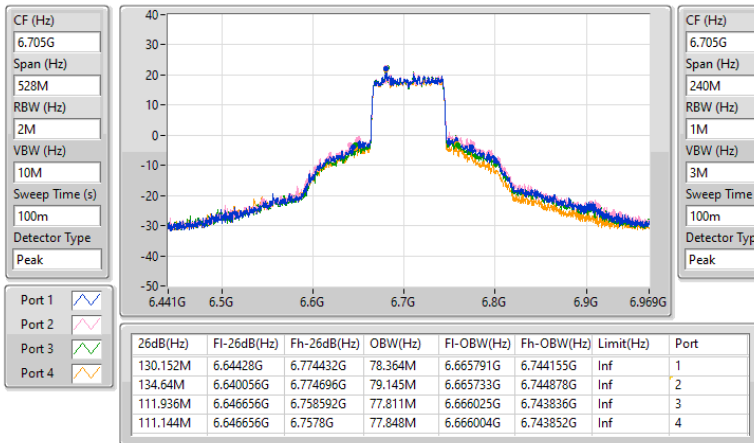

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6785MHz

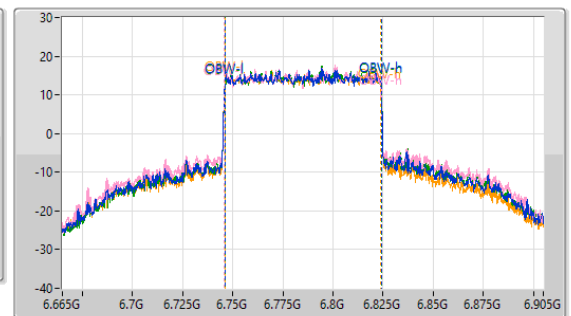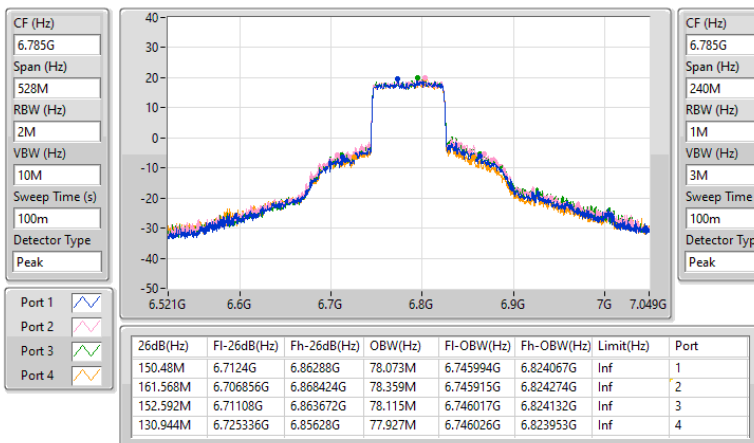




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6025MHz

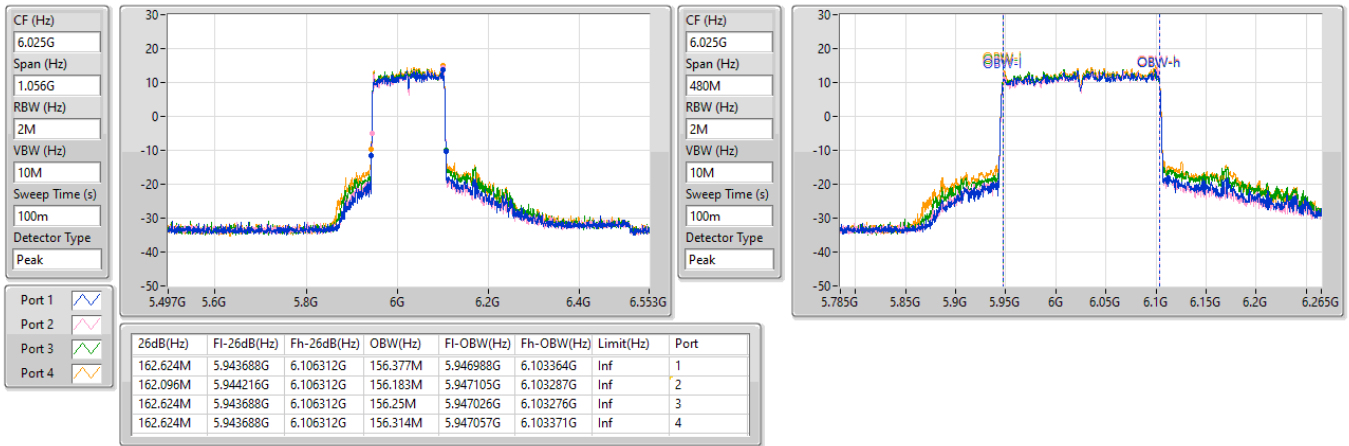

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6185MHz


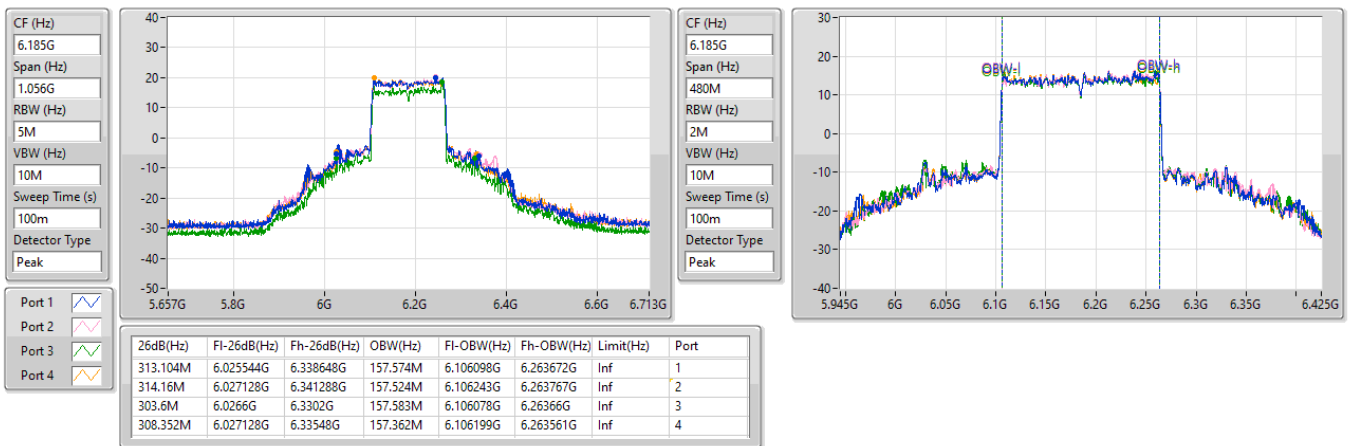




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6345MHz

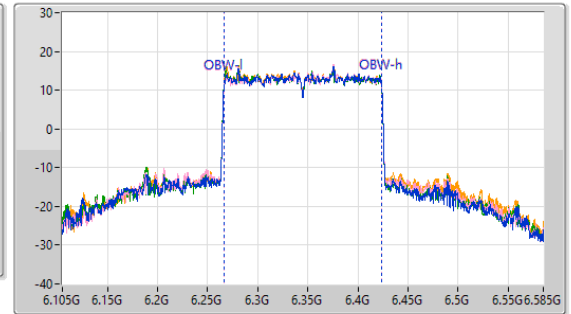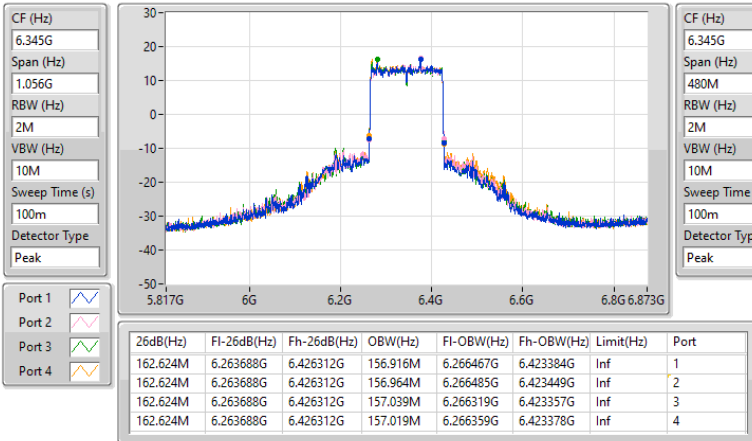

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6665MHz

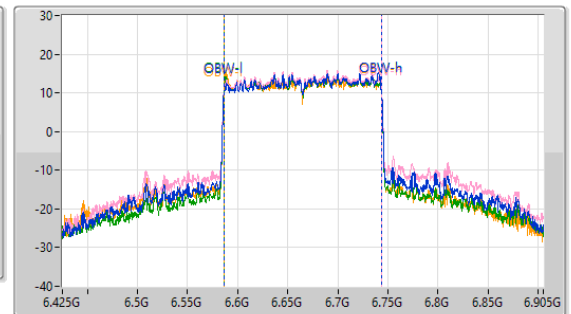
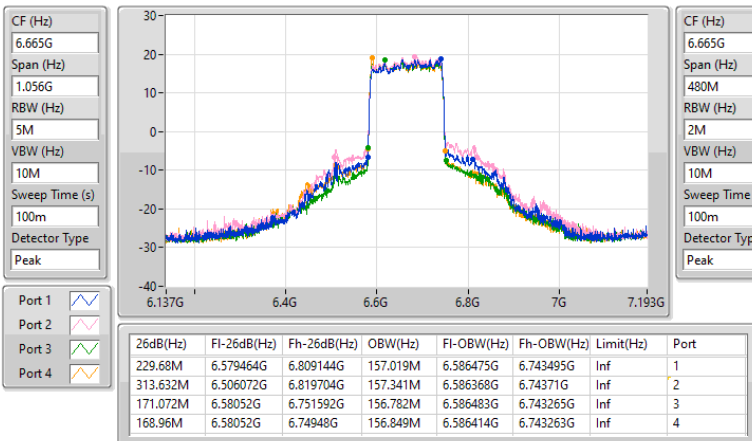




5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW



6105MHz

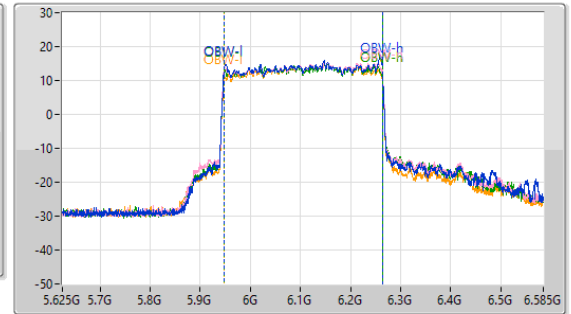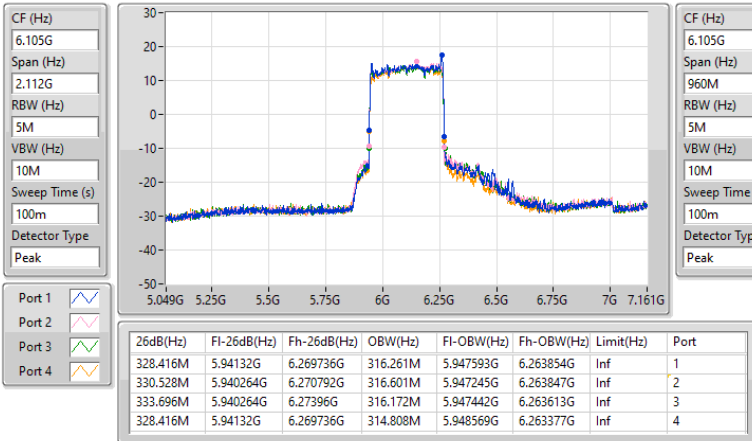

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6265MHz

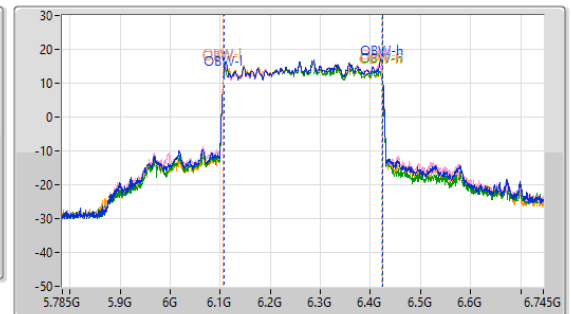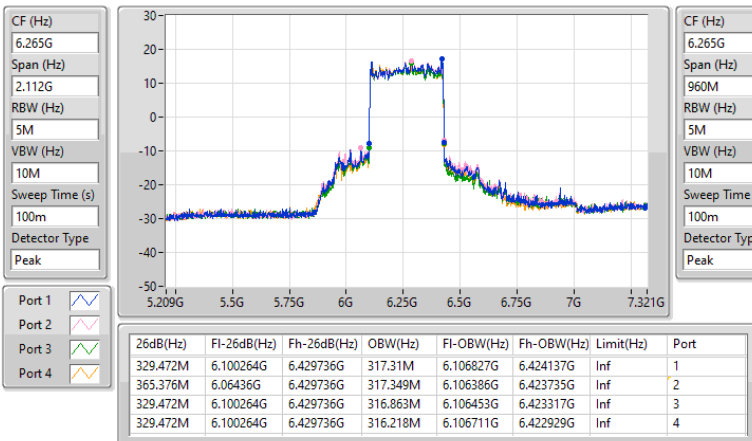

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	30.10	1.02329	33.42	2.19786
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	30.14	1.03276	33.46	2.21820
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	30.11	1.02565	33.43	2.20293
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	30.17	1.03992	33.49	2.23357
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	29.05	0.80353	32.37	1.72584
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	27.40	0.54954	30.72	1.18032
6.525-6.875GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	30.05	1.01158	33.19	2.08449
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	30.16	1.03753	33.30	2.13796
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	30.24	1.05682	33.38	2.17771
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	30.17	1.03992	33.31	2.14289
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	27.79	0.60117	30.93	1.23880

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX										
5955MHz	Pass	3.32	23.57	23.33	23.22	23.21	29.36	Inf	32.68	36.00
6175MHz	Pass	3.32	24.1	24.21	23.91	24.09	30.10	Inf	33.42	36.00
6415MHz	Pass	3.32	23.71	24.01	24.08	23.68	29.89	Inf	33.21	36.00
6535MHz	Pass	3.14	23.89	23.83	24.33	24.03	30.04	Inf	33.18	36.00
6715MHz	Pass	3.14	23.86	23.87	23.82	23.84	29.87	Inf	33.01	36.00
6855MHz	Pass	3.14	23.9	24.28	24.21	23.72	30.05	Inf	33.19	36.00
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA										
5955MHz	Pass	3.32	23.67	23.34	23.35	23.19	29.41	Inf	32.73	36.00
6175MHz	Pass	3.32	24.35	24.01	23.61	24.45	30.14	Inf	33.46	36.00
6415MHz	Pass	3.32	23.66	23.85	24.02	23.55	29.79	Inf	33.11	36.00
6535MHz	Pass	3.14	24.14	24.15	24.1	24.15	30.16	Inf	33.30	36.00
6715MHz	Pass	3.14	23.85	24.55	24.01	23.86	30.10	Inf	33.24	36.00
6855MHz	Pass	3.14	23.71	24.23	24.32	23.53	29.98	Inf	33.12	36.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA										
5965MHz	Pass	3.32	22.32	22.12	21.83	21.96	28.08	Inf	31.40	36.00
6005MHz	Pass	3.32	24.16	24.06	23.59	24.21	30.03	Inf	33.35	36.00
6165MHz	Pass	3.32	24.29	24.01	23.73	24.3	30.11	Inf	33.43	36.00
6405MHz	Pass	3.32	23.91	23.82	23.95	23.51	29.82	Inf	33.14	36.00
6565MHz	Pass	3.14	24.13	24.05	24.45	23.93	30.16	Inf	33.30	36.00
6725MHz	Pass	3.14	24.02	24.62	23.92	23.66	30.09	Inf	33.23	36.00
6845MHz	Pass	3.14	23.98	24.55	24.23	24.08	30.24	Inf	33.38	36.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA										
5985MHz	Pass	3.32	21.96	21.76	21.52	21.79	27.78	Inf	31.10	36.00
6065MHz	Pass	3.32	23.94	23.92	23.66	24.28	29.98	Inf	33.30	36.00
6145MHz	Pass	3.32	24.05	23.86	23.79	24.39	30.05	Inf	33.37	36.00
6385MHz	Pass	3.32	23.96	24.41	24.23	23.97	30.17	Inf	33.49	36.00
6625MHz	Pass	3.14	23.91	24.07	24.01	24.02	30.02	Inf	33.16	36.00
6705MHz	Pass	3.14	23.92	24.65	23.91	23.65	30.07	Inf	33.21	36.00
6785MHz	Pass	3.14	23.96	24.25	24.35	24.02	30.17	Inf	33.31	36.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA										
6025MHz	Pass	3.32	21.01	20.97	21.28	21.76	27.29	Inf	30.61	36.00
6185MHz	Pass	3.32	23.36	22.96	22.81	22.98	29.05	Inf	32.37	36.00
6345MHz	Pass	3.32	22.13	22.21	22.31	22.22	28.24	Inf	31.56	36.00
6665MHz	Pass	3.14	21.74	22.21	21.54	21.55	27.79	Inf	30.93	36.00
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA										
6105MHz	Pass	3.32	21.37	21.33	21.08	20.73	27.16	Inf	30.48	36.00
6265MHz	Pass	3.32	21.66	21.71	21.01	21.09	27.40	Inf	30.72	36.00

DG = Directional Gain; Port X = Port X output power

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	29.83	0.96161	35.46	3.51560
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	29.87	0.97051	35.50	3.54813
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	29.88	0.97275	35.51	3.55631
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	28.92	0.77983	34.55	2.85102
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	27.25	0.53088	32.88	1.94089
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	29.87	0.97051	35.32	3.40408
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	29.89	0.97499	35.34	3.41979
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	29.89	0.97499	35.34	3.41979
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	27.67	0.58479	33.12	2.05116

**Conducted Output Power(Average)****Appendix B****Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.63	23.56	23.14	23.03	23.69	29.38	Inf	35.01	36.00
6175MHz	Pass	5.63	23.54	24.05	23.61	24.02	29.83	Inf	35.46	36.00
6415MHz	Pass	5.63	23.65	23.56	23.81	23.62	29.68	Inf	35.31	36.00
6535MHz	Pass	5.45	23.75	23.96	23.84	23.78	29.85	Inf	35.30	36.00
6715MHz	Pass	5.45	23.68	24.04	24.02	23.61	29.86	Inf	35.31	36.00
6855MHz	Pass	5.45	23.39	24.38	24.02	23.53	29.87	Inf	35.32	36.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	5.63	21.69	22.14	21.63	22.44	28.01	Inf	33.64	36.00
6005MHz	Pass	5.63	23.83	23.52	23.72	24.13	29.83	Inf	35.46	36.00
6165MHz	Pass	5.63	23.96	23.58	23.84	24.01	29.87	Inf	35.50	36.00
6405MHz	Pass	5.63	23.66	23.57	24.11	23.44	29.72	Inf	35.35	36.00
6565MHz	Pass	5.45	23.76	24.12	24.11	23.44	29.89	Inf	35.34	36.00
6725MHz	Pass	5.45	23.46	24.22	23.82	23.59	29.80	Inf	35.25	36.00
6845MHz	Pass	5.45	23.69	24.35	23.74	23.61	29.88	Inf	35.33	36.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.63	21.62	21.74	21.82	21.69	27.74	Inf	33.37	36.00
6065MHz	Pass	5.63	23.85	23.61	23.79	23.88	29.80	Inf	35.43	36.00
6145MHz	Pass	5.63	23.8	23.74	23.86	23.95	29.86	Inf	35.49	36.00
6385MHz	Pass	5.63	23.71	23.92	24.16	23.61	29.88	Inf	35.51	36.00
6625MHz	Pass	5.45	24.12	24.01	23.38	23.54	29.79	Inf	35.24	36.00
6705MHz	Pass	5.45	23.49	24.31	24.06	23.56	29.89	Inf	35.34	36.00
6785MHz	Pass	5.45	23.62	23.71	23.94	24.12	29.87	Inf	35.32	36.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.63	20.77	20.86	20.81	21.65	27.06	Inf	32.69	36.00
6185MHz	Pass	5.63	22.68	23.26	22.54	23.08	28.92	Inf	34.55	36.00
6345MHz	Pass	5.63	22.18	21.64	22.16	22.19	28.07	Inf	33.70	36.00
6665MHz	Pass	5.45	21.44	21.85	21.87	21.41	27.67	Inf	33.12	36.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.63	21.19	21.23	20.94	20.85	27.08	Inf	32.71	36.00
6265MHz	Pass	5.63	21.46	21.49	20.81	21.12	27.25	Inf	32.88	36.00

DG = Directional Gain; Port X = Port X output power
Refers to antenna document for DG Gain.

**Summary**

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	17.11	22.74
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	16.48	22.11
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	13.61	19.24
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	11.02	16.65
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	6.78	12.41
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	2.81	8.44
6.525-6.875GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	17.41	22.86
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	16.44	21.89
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	13.66	19.11
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	10.62	16.07
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	5.47	10.92

RBW = 1MHz



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX										
5955MHz	Pass	5.63	11.21	10.99	10.73	11.97	17.05	Inf	22.68	23.00
6175MHz	Pass	5.63	11.56	11.7	10.91	11.48	17.11	Inf	22.74	23.00
6415MHz	Pass	5.63	11	11.23	11.54	11	16.88	Inf	22.51	23.00
6535MHz	Pass	5.45	11.08	11.31	11.97	11.55	17.13	Inf	22.58	23.00
6715MHz	Pass	5.45	12	12.04	11.57	11.47	17.41	Inf	22.86	23.00
6855MHz	Pass	5.45	11.12	12.19	11.88	11.24	17.22	Inf	22.67	23.00
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA										
5955MHz	Pass	5.63	9.82	10.28	10.03	9.93	15.82	Inf	21.45	23.00
6175MHz	Pass	5.63	10.85	11.26	10.78	11.12	16.48	Inf	22.11	23.00
6415MHz	Pass	5.63	10.35	10.97	10.76	10.00	16.27	Inf	21.90	23.00
6535MHz	Pass	5.45	10.32	10.27	11.04	10.66	16.44	Inf	21.89	23.00
6715MHz	Pass	5.45	10.80	10.93	10.86	9.99	16.31	Inf	21.76	23.00
6855MHz	Pass	5.45	10.01	10.18	11.00	10.14	16.10	Inf	21.55	23.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA										
5965MHz	Pass	5.63	6.11	6.05	5.85	6.16	11.74	Inf	17.37	23.00
6165MHz	Pass	5.63	7.98	8.12	7.65	7.91	13.61	Inf	19.24	23.00
6405MHz	Pass	5.63	7.20	8.35	7.87	7.15	13.30	Inf	18.93	23.00
6565MHz	Pass	5.45	7.96	8.04	8.44	7.64	13.66	Inf	19.11	23.00
6725MHz	Pass	5.45	8.01	8.34	8.00	7.33	13.62	Inf	19.07	23.00
6845MHz	Pass	5.45	7.96	8.52	8.84	7.54	13.61	Inf	19.06	23.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA										
5985MHz	Pass	5.63	2.63	2.83	2.41	3.04	8.39	Inf	14.02	23.00
6145MHz	Pass	5.63	5.01	5.48	4.70	5.40	10.82	Inf	16.45	23.00
6385MHz	Pass	5.63	5.47	5.23	5.62	4.95	11.02	Inf	16.65	23.00
6625MHz	Pass	5.45	5.11	5.08	4.91	4.45	10.62	Inf	16.07	23.00
6705MHz	Pass	5.45	4.93	5.03	4.89	4.08	10.46	Inf	15.91	23.00
6785MHz	Pass	5.45	4.72	4.60	4.76	4.66	10.50	Inf	15.95	23.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA										
6025MHz	Pass	5.63	-1.27	-1.15	-0.73	-0.07	4.91	Inf	10.54	23.00
6185MHz	Pass	5.63	1.50	1.68	0.95	1.08	6.78	Inf	12.41	23.00
6345MHz	Pass	5.63	0.24	0.57	0.70	0.26	6.15	Inf	11.78	23.00
6665MHz	Pass	5.45	-0.35	0.15	-0.44	-0.71	5.47	Inf	10.92	23.00
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA										
6105MHz	Pass	5.63	-3.18	-2.33	-2.95	-3.31	2.55	Inf	8.18	23.00
6265MHz	Pass	5.63	-2.42	-2.24	-2.97	-3.24	2.81	Inf	8.44	23.00

DG = Directional Gain; RBW = 1MHz


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

Refers to antenna document for DG Gain.

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5955MHz

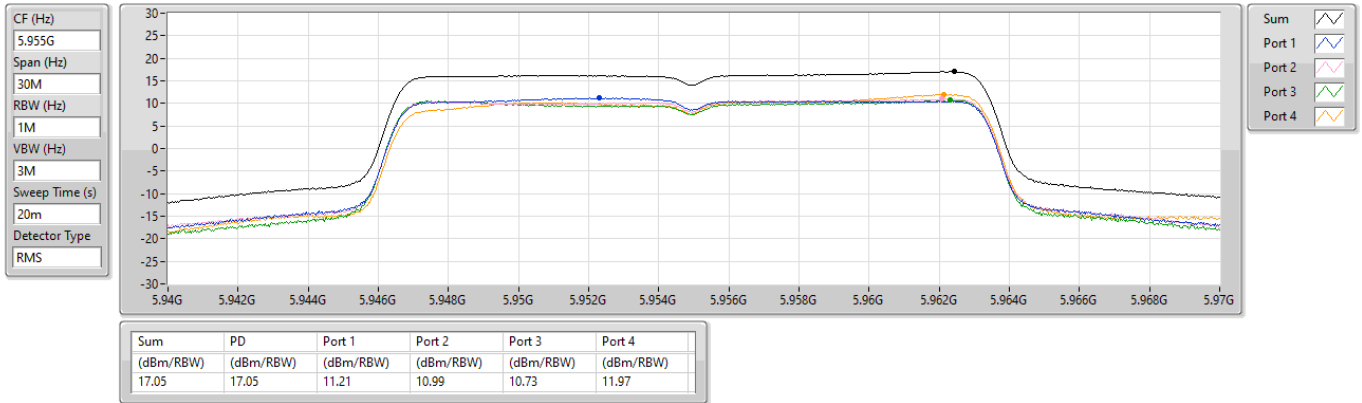

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6175MHz

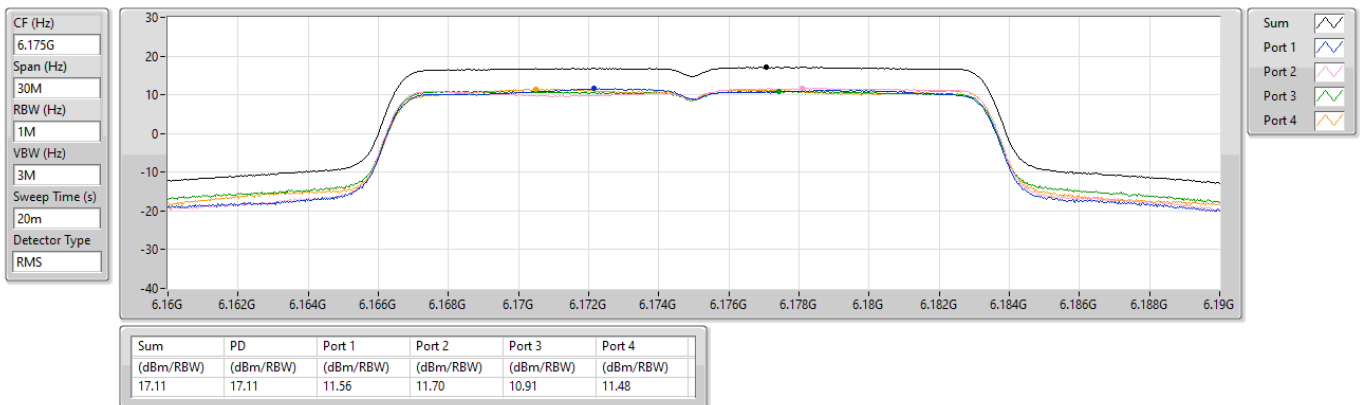

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6415MHz

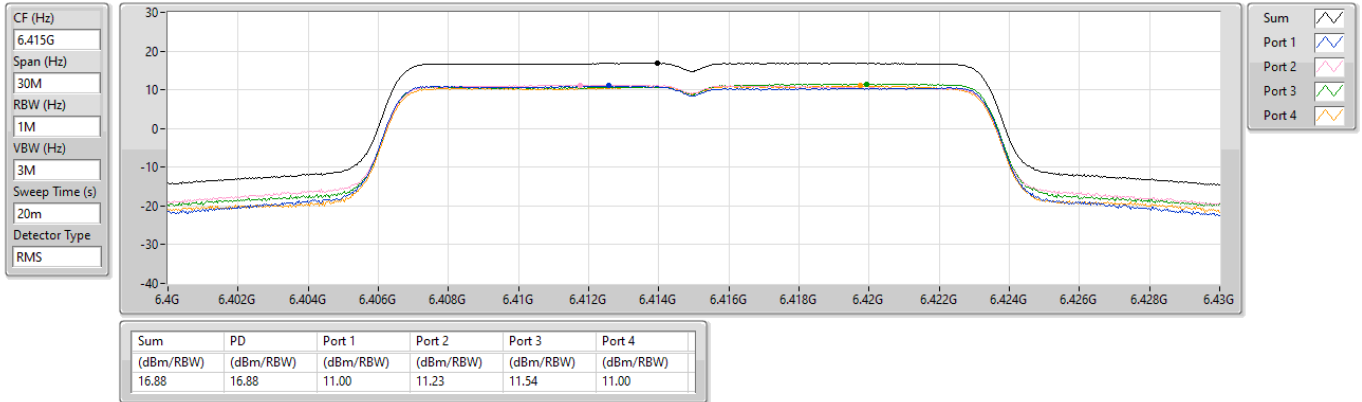

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6535MHz

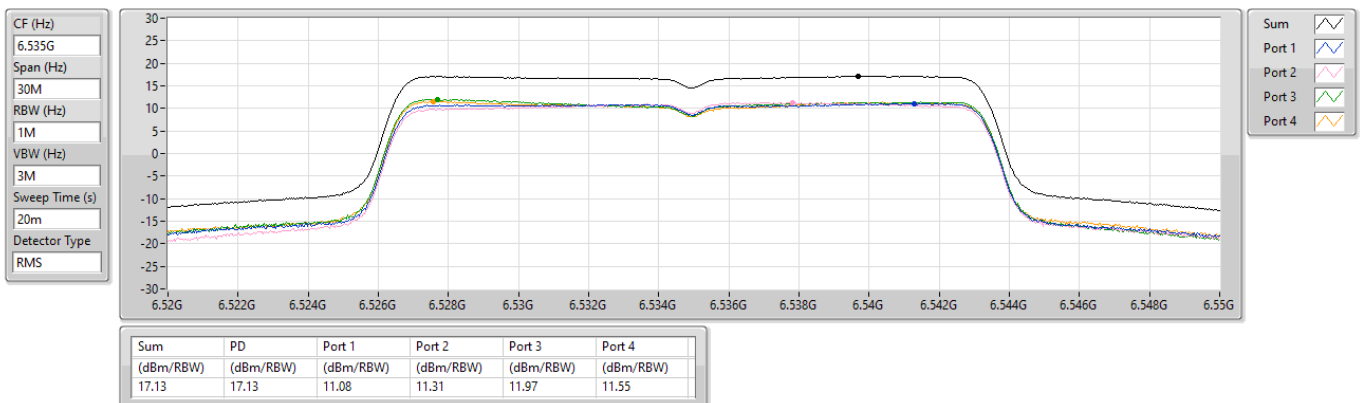

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6715MHz

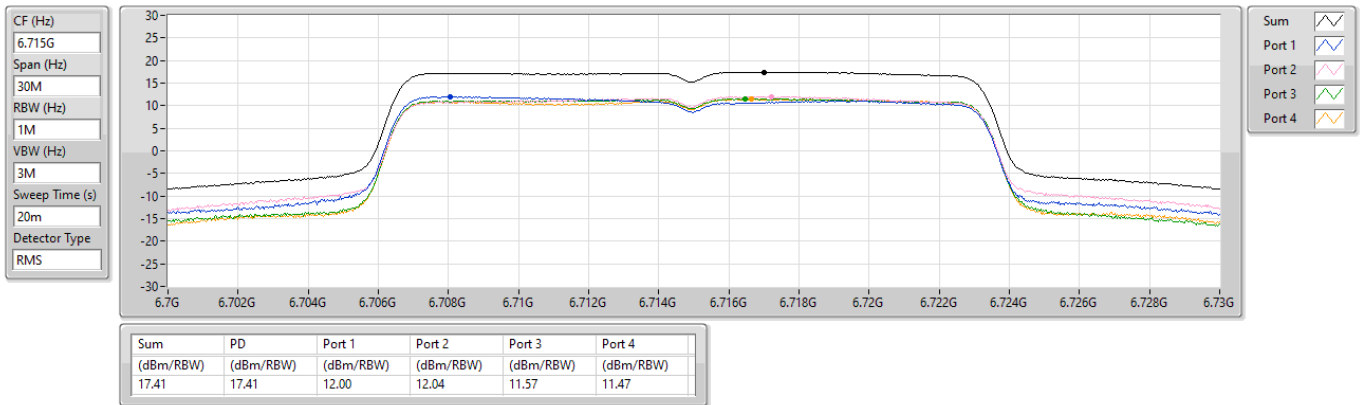

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6855MHz

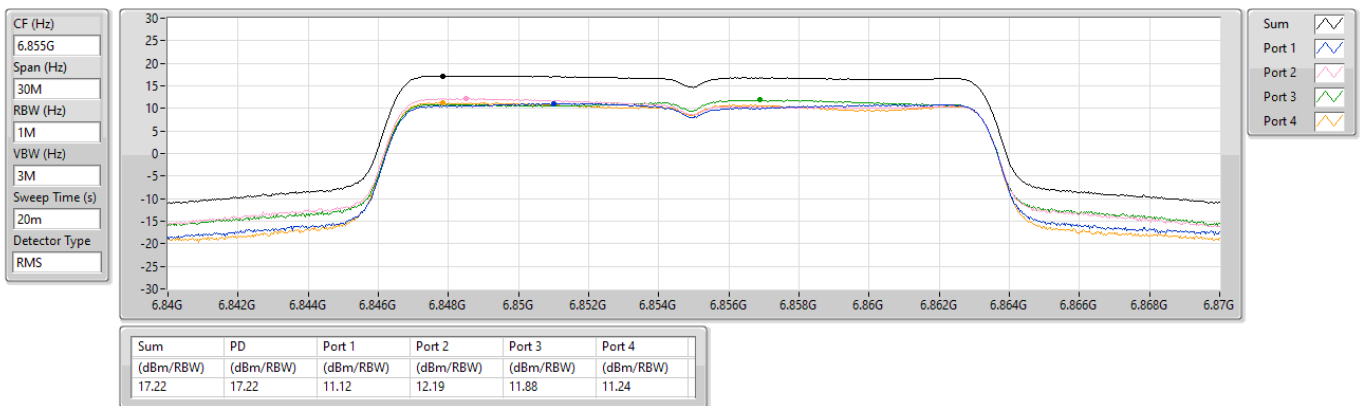

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5955MHz

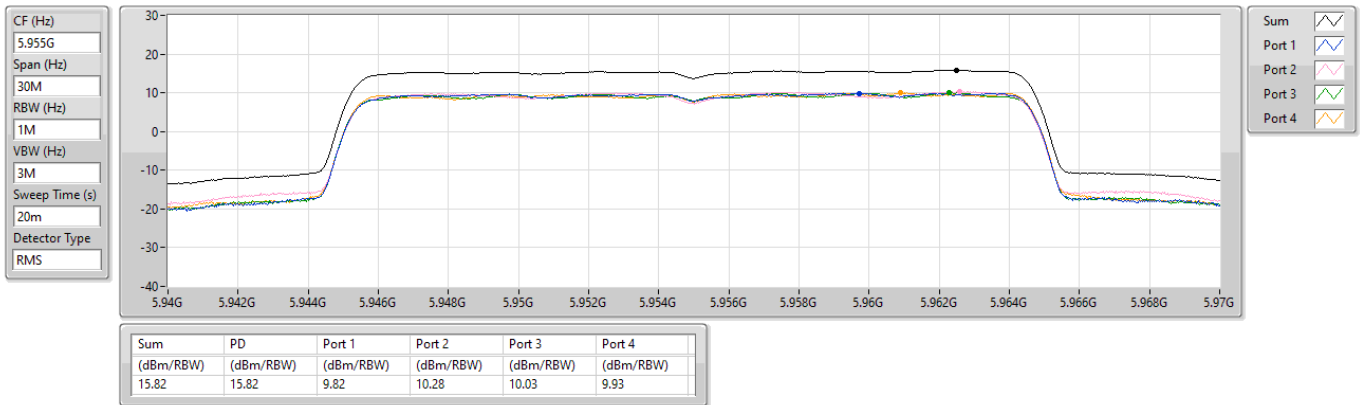

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6175MHz

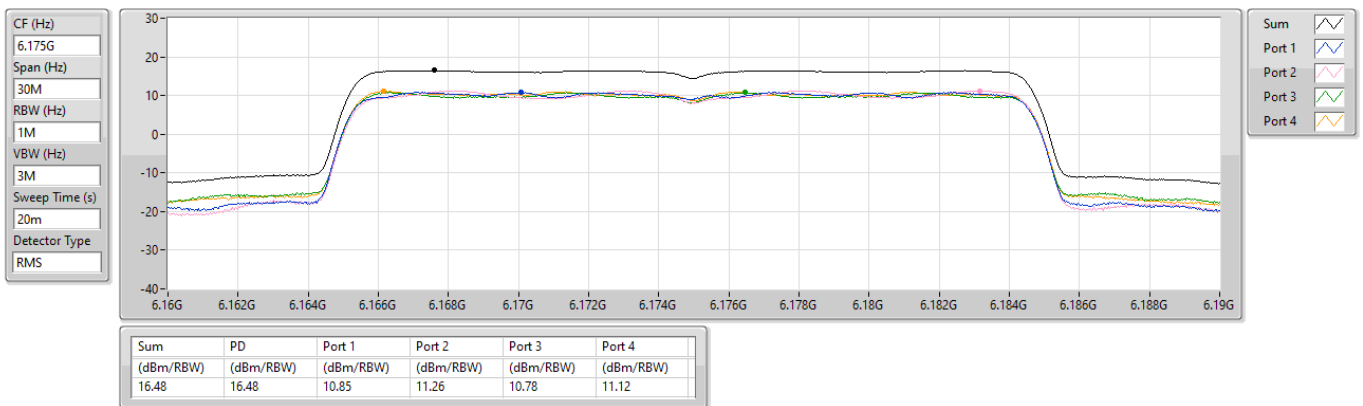

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6415MHz

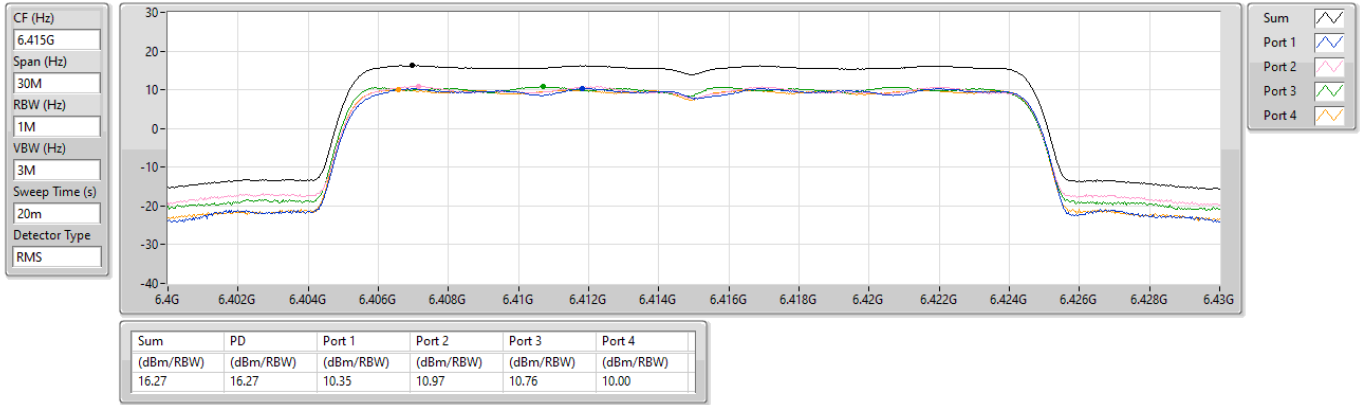

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6535MHz

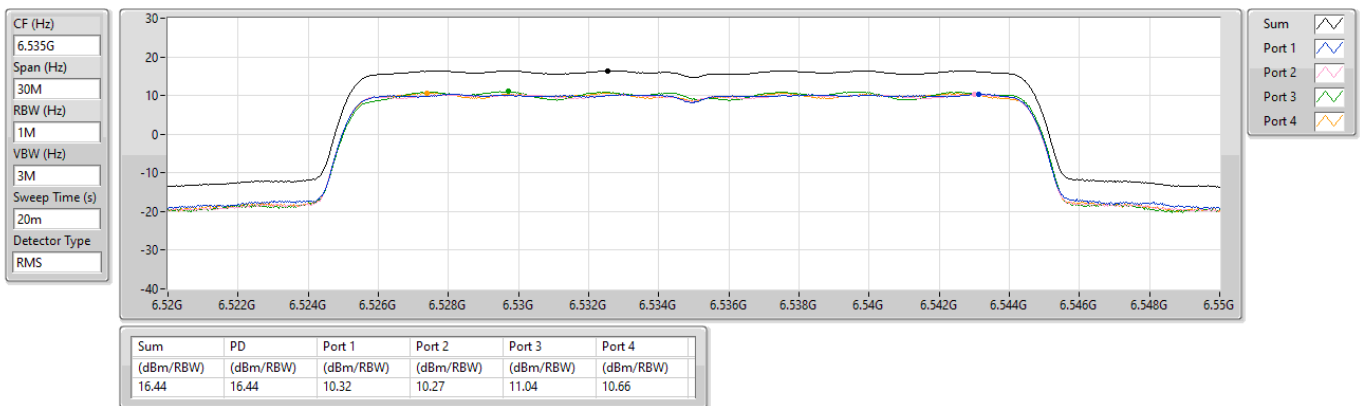

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6715MHz

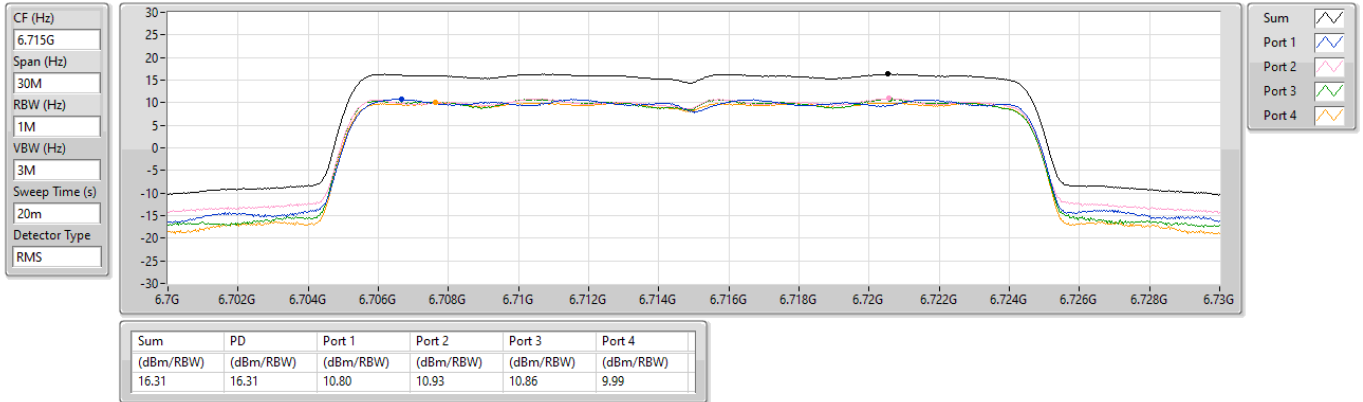

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6855MHz

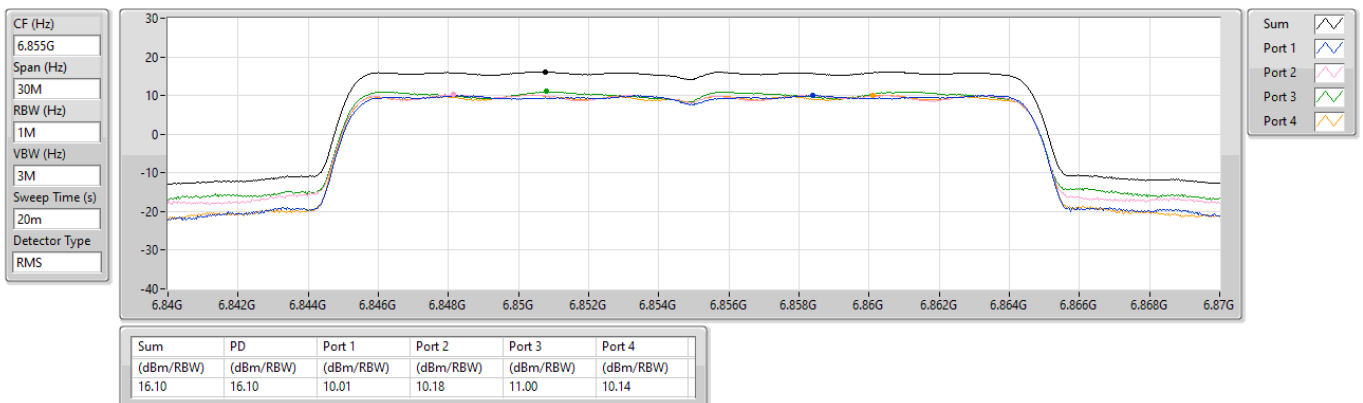

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5965MHz

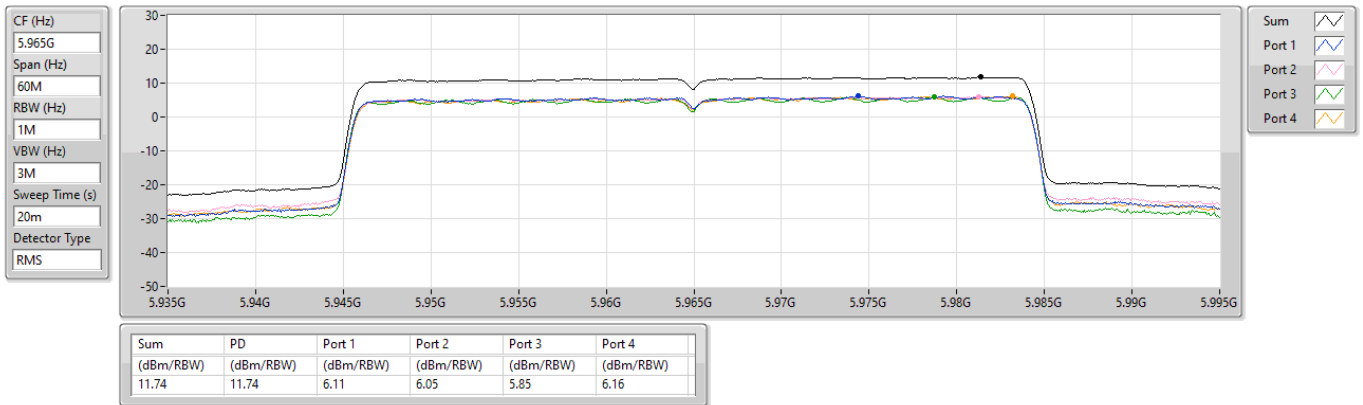

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6165MHz

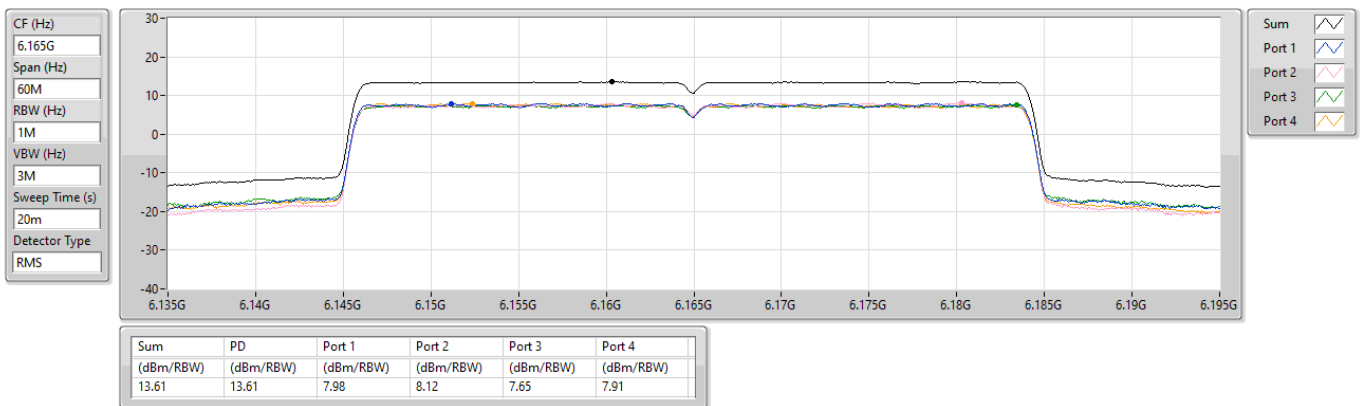




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6405MHz

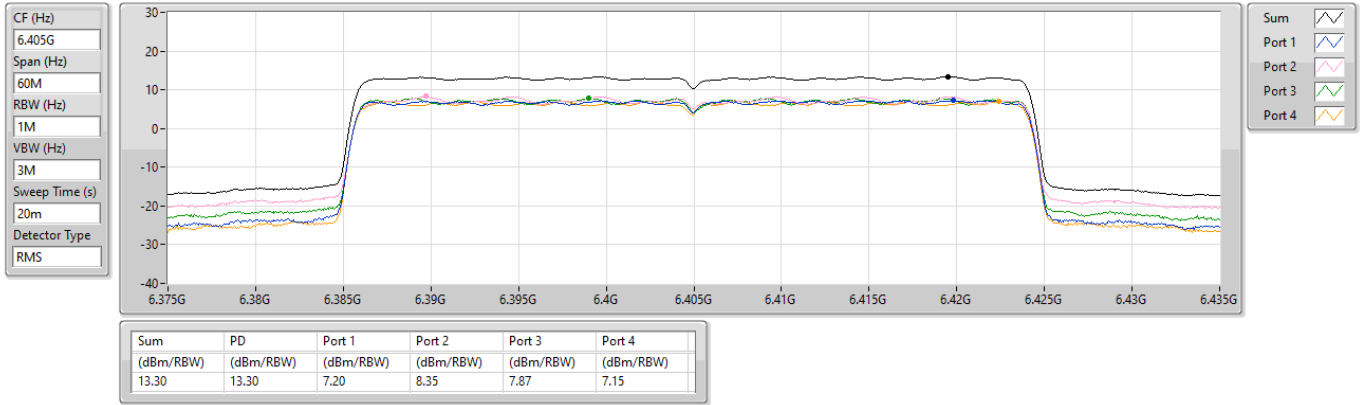

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6565MHz

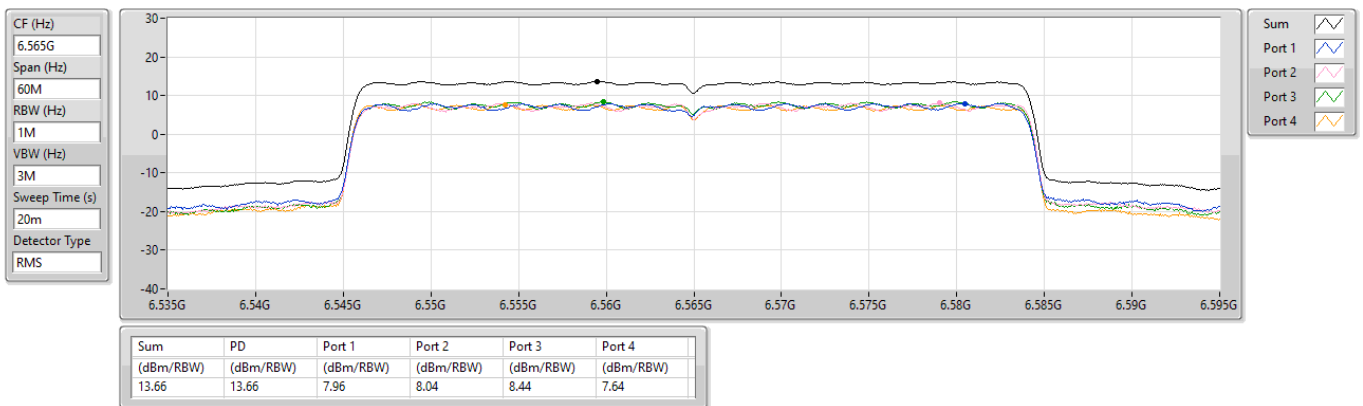

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6725MHz

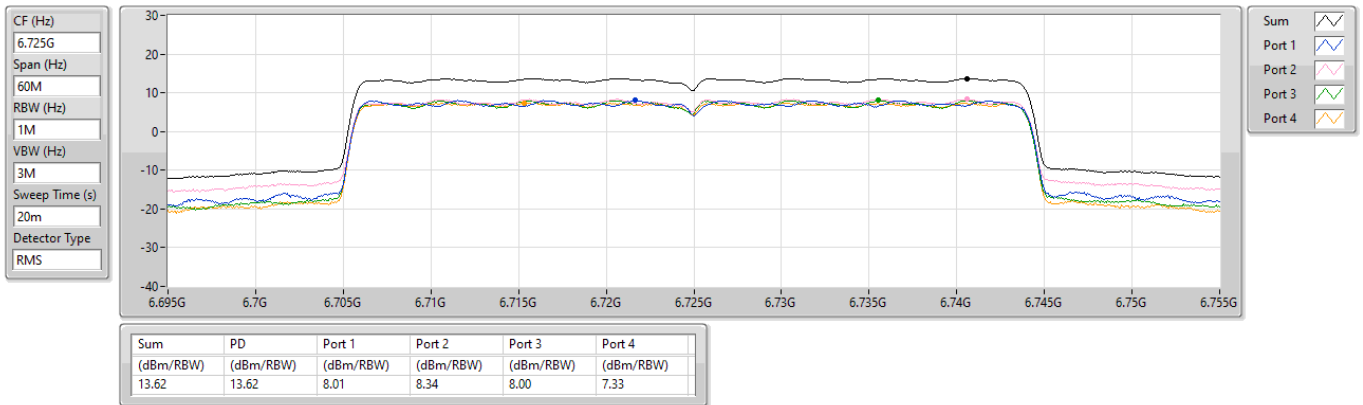

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6845MHz

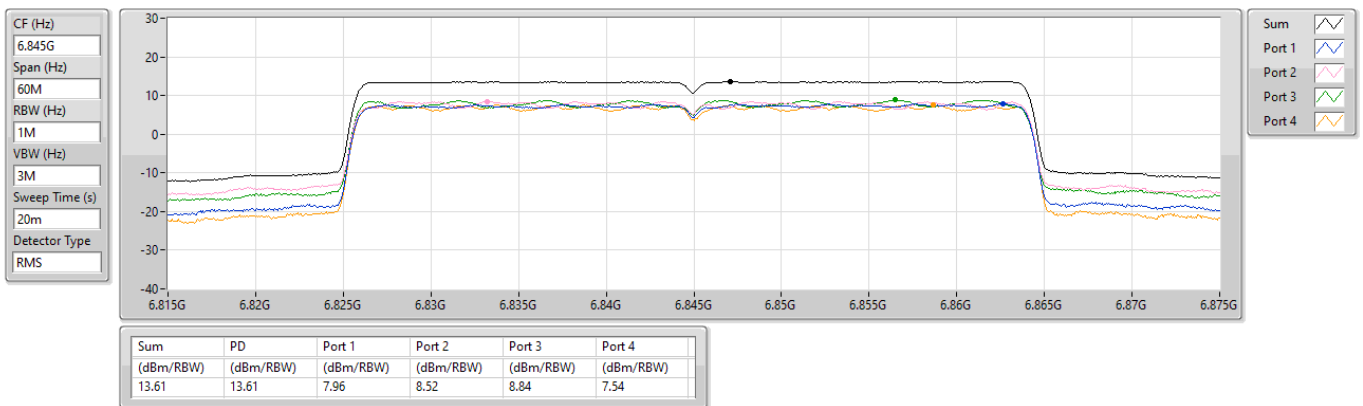

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


5985MHz

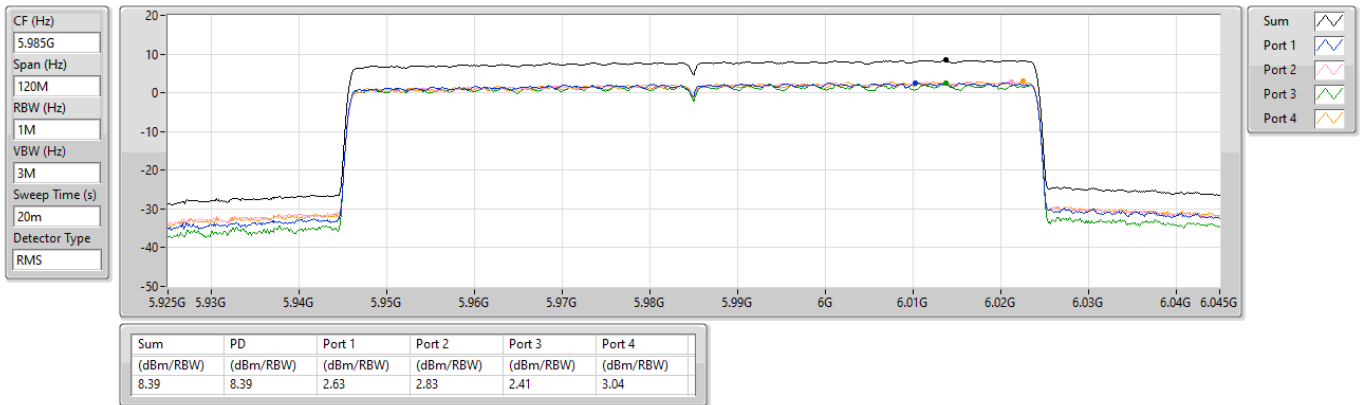

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6145MHz

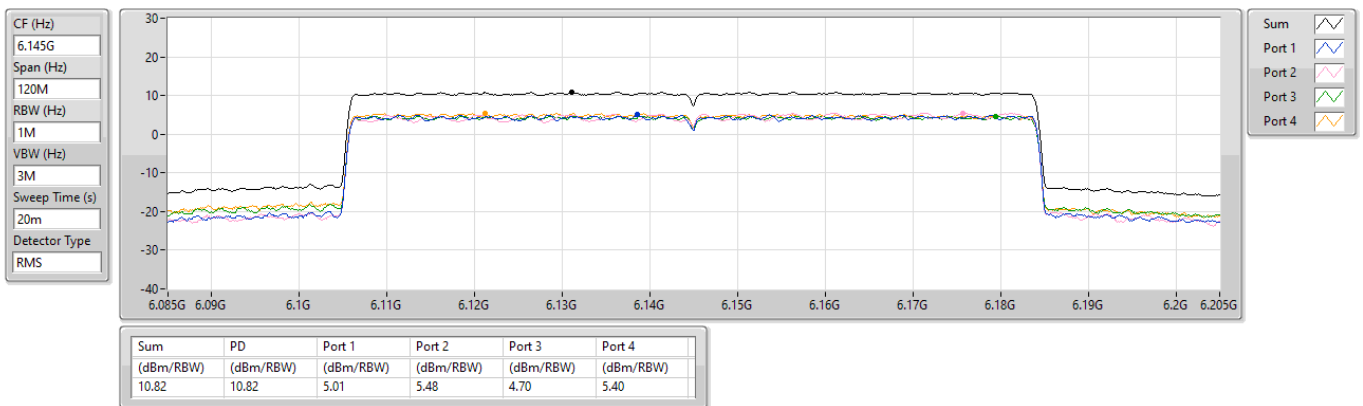

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6385MHz

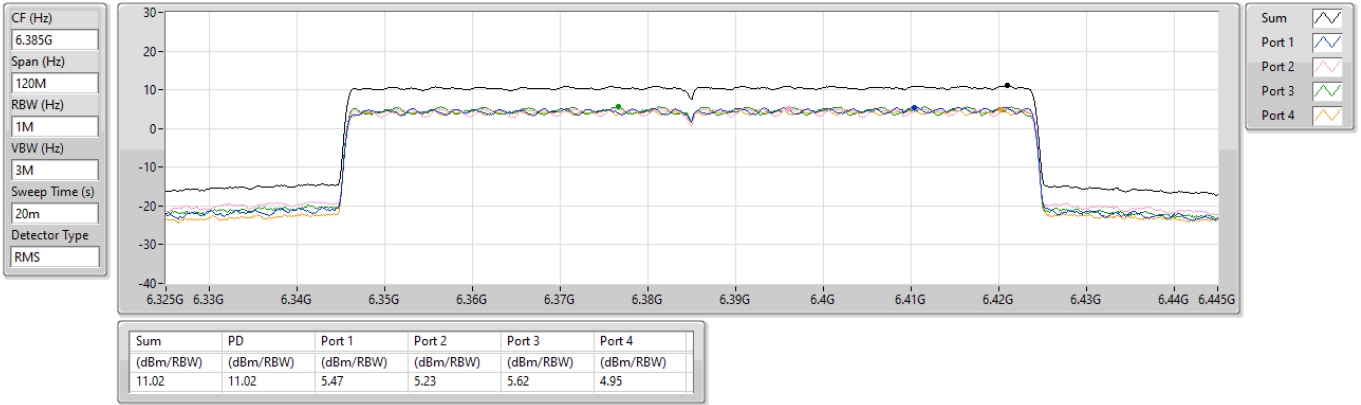

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6625MHz

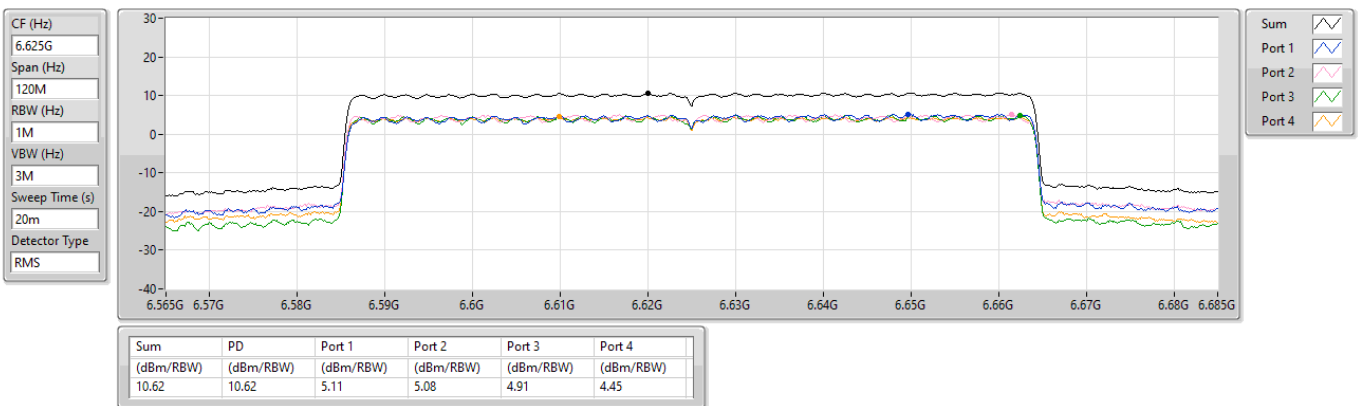

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6705MHz

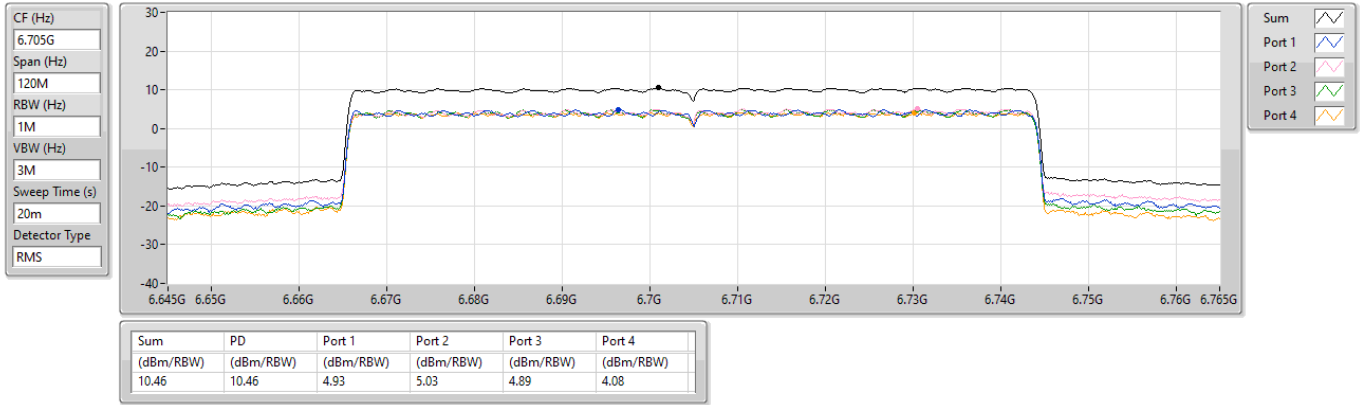

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6785MHz

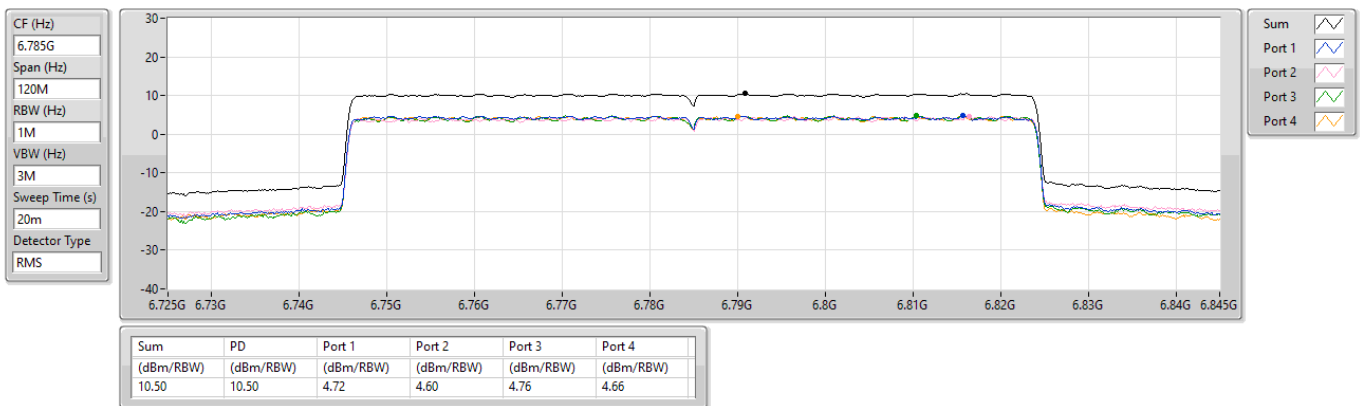

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6025MHz

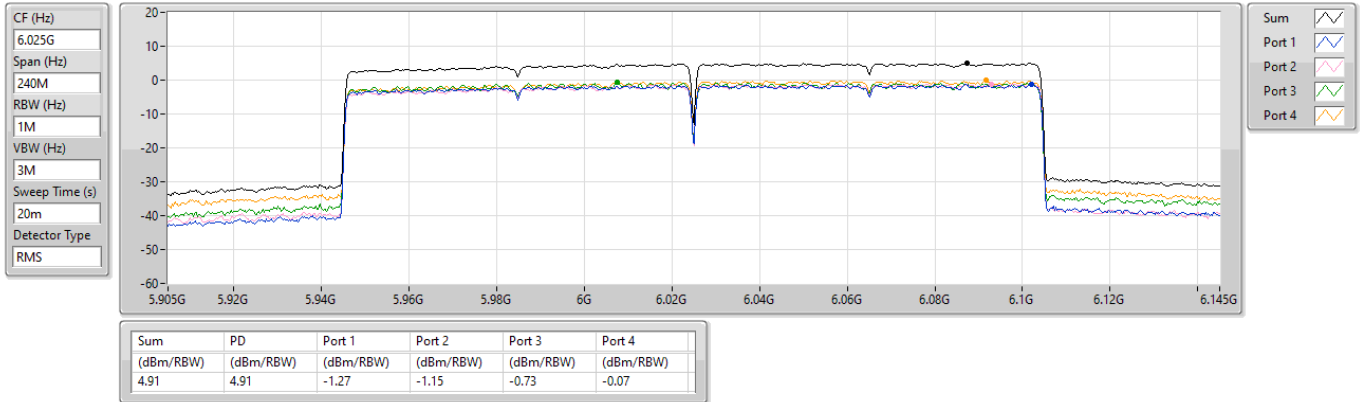

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6185MHz

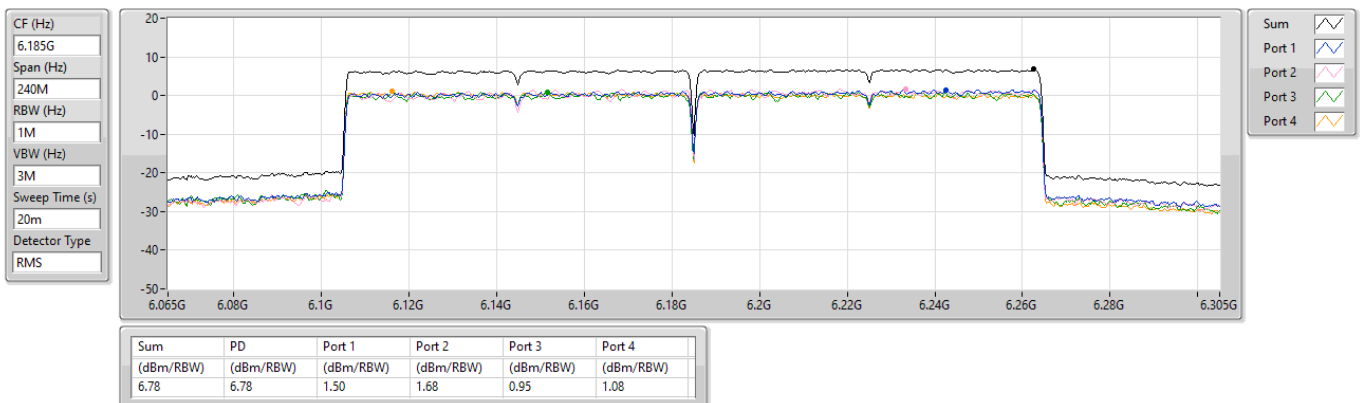

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6345MHz

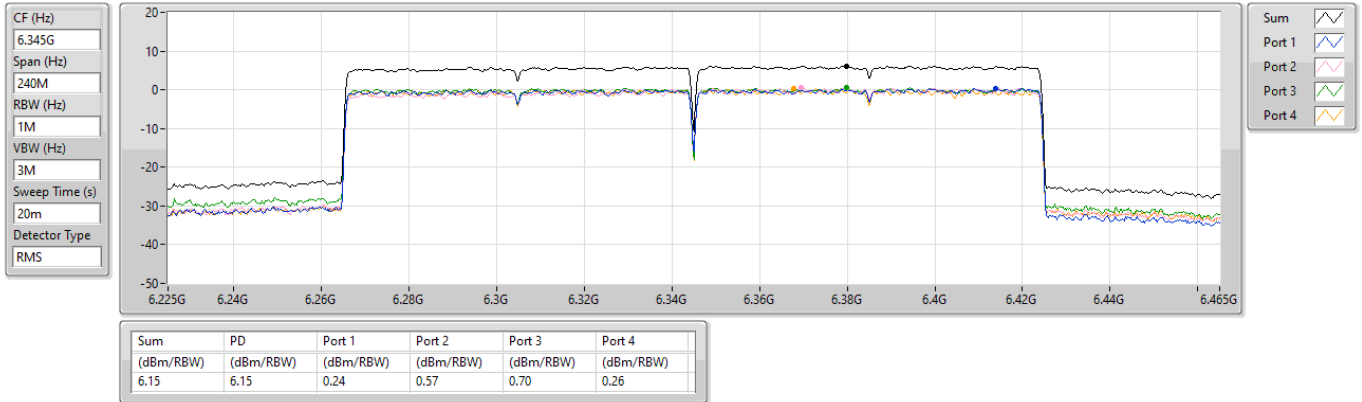

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6665MHz

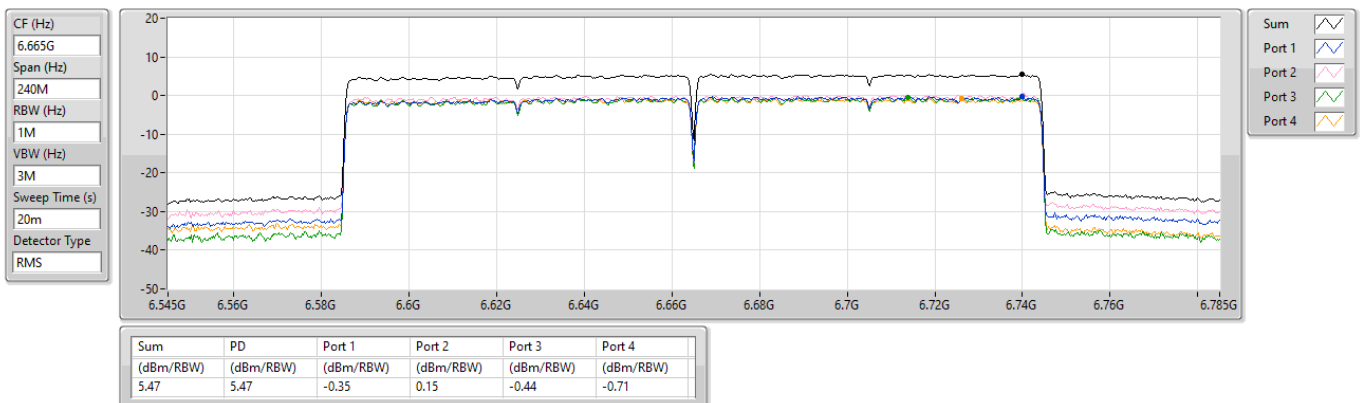




5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6105MHz

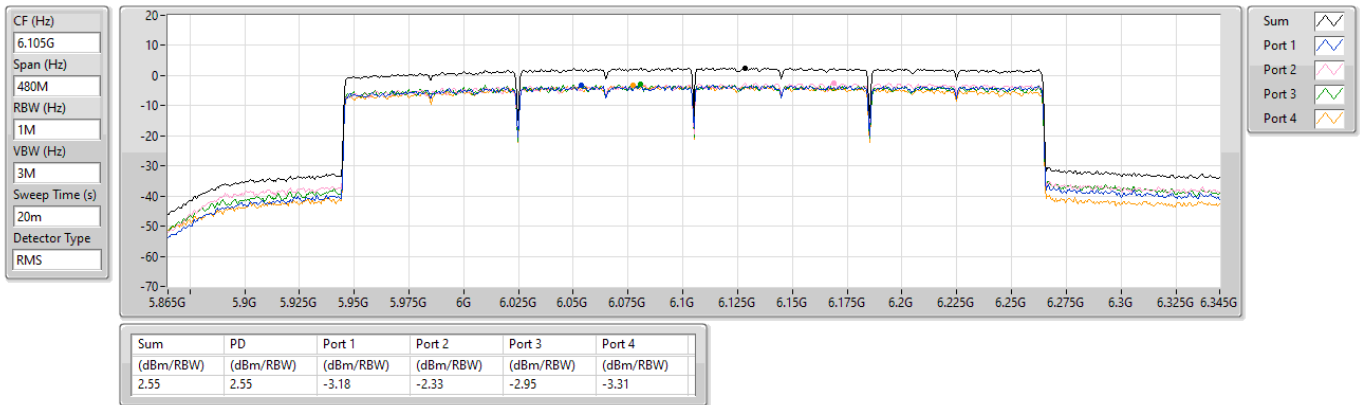

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6265MHz

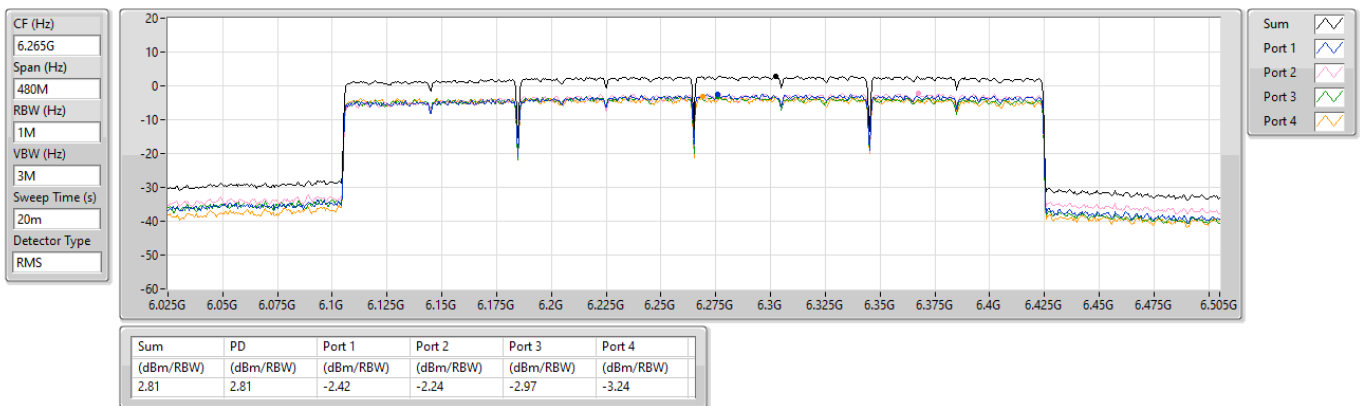




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	45.25M	36.95	40.00	-3.05	Vertical


Mode 1

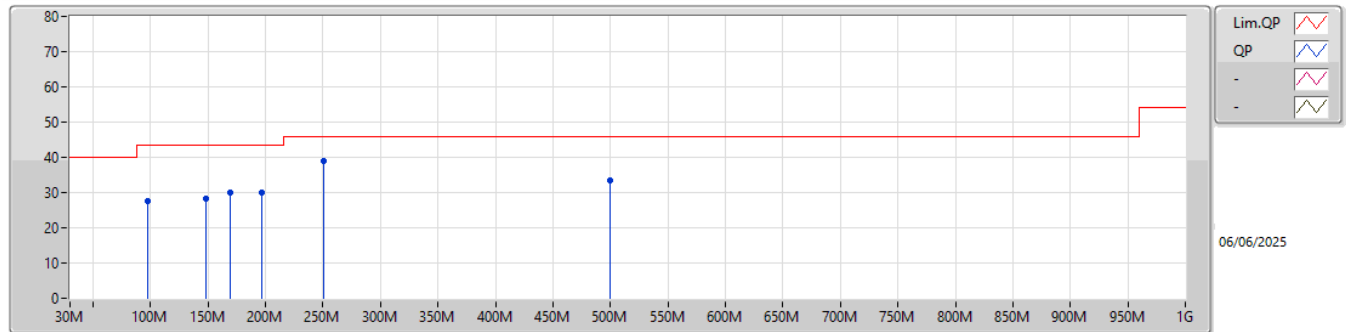

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	97.15M	27.64	43.50	-15.86	-13.59	3	Horizontal	-	-	-	41.23	13.62	1.01	28.22		
PK	148.66M	28.35	43.50	-15.15	-8.82	3	Horizontal	-	-	-	37.17	18.23	1.20	28.25		
PK	169.45M	29.88	43.50	-13.62	-9.10	3	Horizontal	-	-	-	38.98	17.86	1.30	28.26		
PK	196.61M	30.16	43.50	-13.34	-11.44	3	Horizontal	-	-	-	41.60	15.44	1.40	28.28		
PK	250.47M	38.95	46.00	-7.05	-9.76	3	Horizontal	-	-	-	48.71	16.92	1.57	28.25		
PK	499.87M	33.42	46.00	-12.58	-3.36	3	Horizontal	-	-	-	36.78	22.80	2.04	28.20		



Mode 1

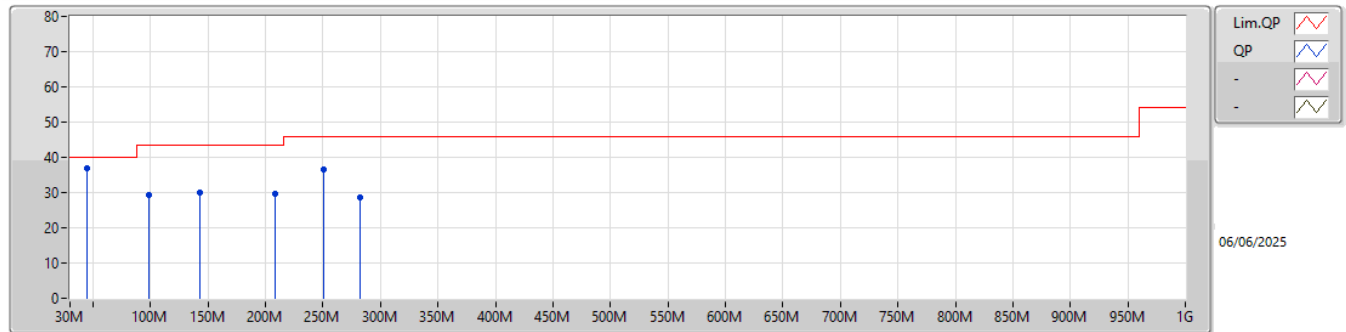


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	45.25M	36.95	40.00	-3.05	-8.50	3	Vertical	235	1.00	-	45.45	19.02	0.61	28.13		
PK	98.44M	29.45	43.50	-14.05	-13.47	3	Vertical	-	-	-	42.92	13.74	1.02	28.23		
PK	143.41M	29.86	43.50	-13.64	-8.93	3	Vertical	-	-	-	38.79	18.14	1.18	28.25		
PK	208.51M	29.74	43.50	-13.76	-11.78	3	Vertical	-	-	-	41.52	15.06	1.44	28.28		
PK	250.21M	36.58	46.00	-9.42	-9.77	3	Vertical	-	-	-	46.35	16.91	1.57	28.25		
PK	282.49M	28.55	46.00	-17.45	-8.28	3	Vertical	-	-	-	36.83	18.25	1.71	28.24		

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	AV	3.999G	48.26	54	-5.74	3	Vertical	209	1.18	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	AV	3.999G	48.25	54	-5.75	3	Vertical	207	1.18	-
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	AV	3.999G	48.45	54	-5.55	3	Vertical	216	1.18	-
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	AV	3.999G	48.32	54	-5.68	3	Vertical	215	1.22	-
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	AV	3.999G	48.29	54	-5.71	3	Vertical	215	1.16	-
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	AV	3.999G	48.46	54	-5.54	3	Vertical	219	1.14	-
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	AV	3.999G	48.32	54	-5.68	3	Vertical	205	1.12	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	AV	3.999G	48.25	54	-5.75	3	Vertical	201	1.14	-
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	AV	3.999G	48.29	54	-5.71	3	Vertical	208	1.12	-
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	AV	3.999G	48.45	54	-5.55	3	Vertical	213	1.15	-
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	AV	3.999G	48.42	54	-5.58	3	Vertical	212	1.14	-

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX


5955MHz_TX

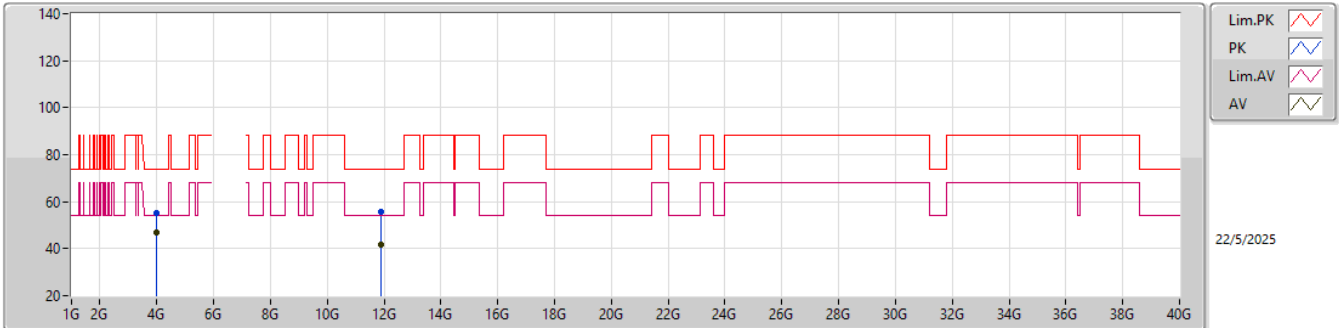

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	3.999G	47.14	54.00	-6.86	49.31	3	Horizontal	215	1.00	-	29.80	6.02	37.99				
PK	3.999G	55.08	74.00	-18.92	57.25	3	Horizontal	215	1.00	-	29.80	6.02	37.99				
AV	11.91G	41.89	54.00	-12.11	35.46	3	Horizontal	249	1.20	-	39.10	10.22	42.89				
PK	11.91G	55.53	74.00	-18.47	49.10	3	Horizontal	249	1.20	-	39.10	10.22	42.89				

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX


5955MHz_TX

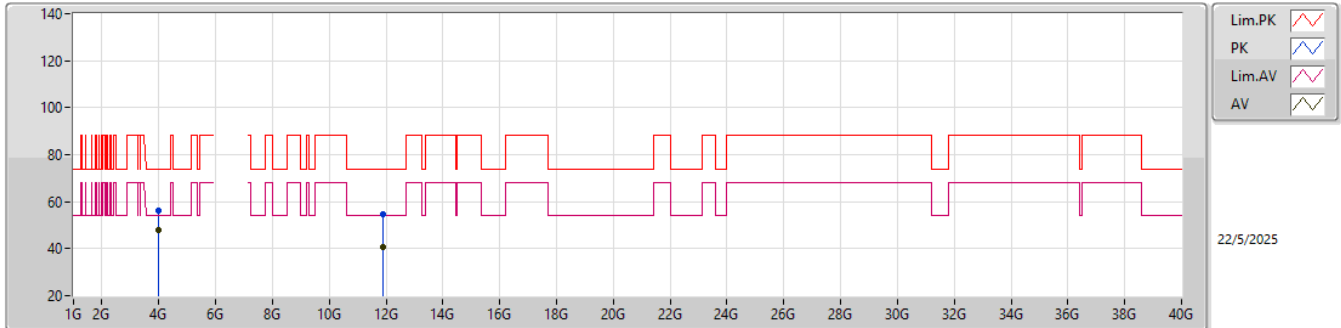

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	47.92	54.00	-6.08	50.09	3	Vertical	216	1.25	-	29.80	6.02	37.99			
PK	3.999G	56.14	74.00	-17.86	58.31	3	Vertical	216	1.25	-	29.80	6.02	37.99			
AV	11.91G	40.64	54.00	-13.36	34.21	3	Vertical	256	1.00	-	39.10	10.22	42.89			
PK	11.91G	54.63	74.00	-19.37	48.20	3	Vertical	256	1.00	-	39.10	10.22	42.89			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX


6175MHz_TX

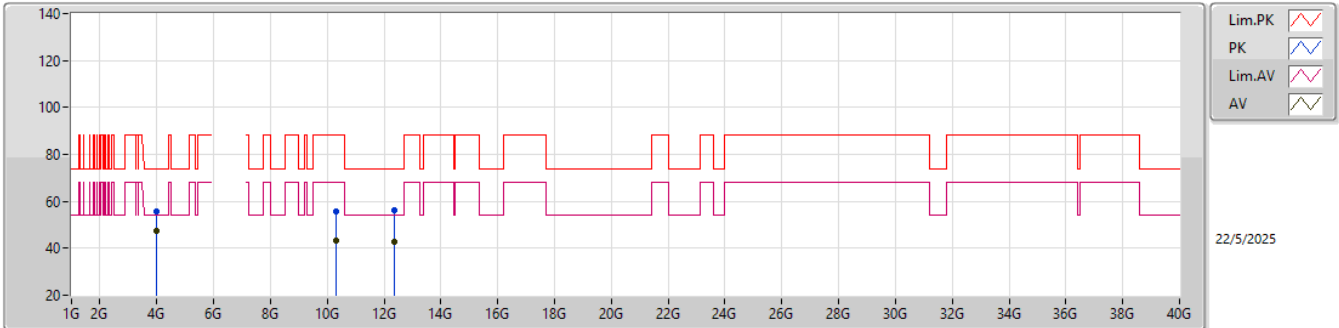

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	47.64	54.00	-6.36	49.81	3	Horizontal	201	1.00	-	29.80	6.02	37.99			
PK	3.999G	55.58	74.00	-18.42	57.75	3	Horizontal	201	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.36	68.20	-24.84	35.87	3	Horizontal	124	1.00	-	39.55	9.99	42.05			
PK	10.312G	55.79	88.20	-32.41	48.30	3	Horizontal	124	1.00	-	39.55	9.99	42.05			
AV	12.35G	42.93	54.00	-11.07	35.83	3	Horizontal	234	1.16	-	39.30	10.31	42.51			
PK	12.35G	56.35	74.00	-17.65	49.25	3	Horizontal	234	1.16	-	39.30	10.31	42.51			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX


6175MHz_TX

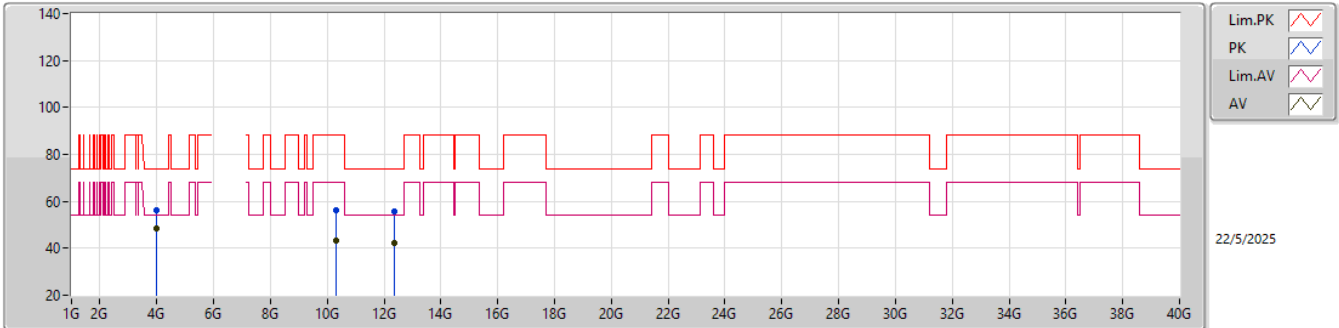

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.26	54.00	-5.74	50.43	3	Vertical	209	1.18	-	29.80	6.02	37.99			
PK	3.999G	56.11	74.00	-17.89	58.28	3	Vertical	209	1.18	-	29.80	6.02	37.99			
AV	10.312G	43.16	68.20	-25.04	35.67	3	Vertical	162	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.15	88.20	-32.05	48.66	3	Vertical	162	1.00	-	39.55	9.99	42.05			
AV	12.35G	42.50	54.00	-11.50	35.40	3	Vertical	248	1.00	-	39.30	10.31	42.51			
PK	12.35G	55.83	74.00	-18.17	48.73	3	Vertical	248	1.00	-	39.30	10.31	42.51			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX


6415MHz_TX

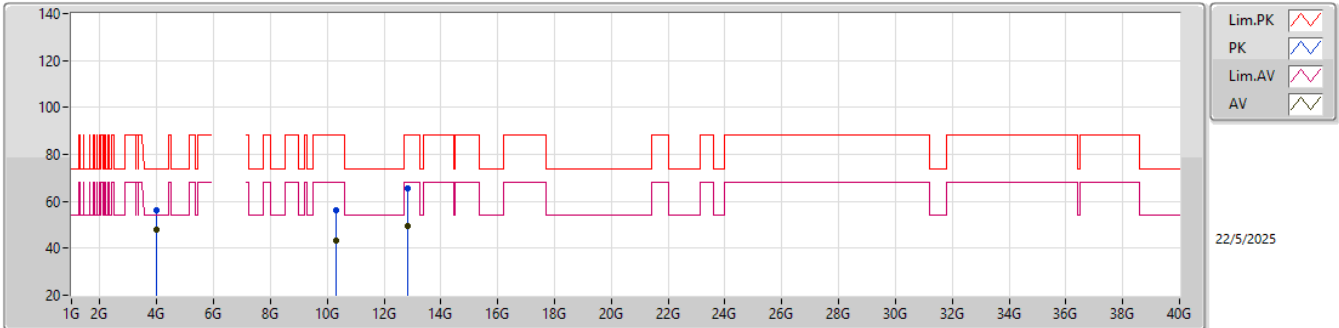

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.16	54.00	-5.84	50.33	3	Horizontal	214	1.15	-	29.80	6.02	37.99			
PK	3.999G	56.09	74.00	-17.91	58.26	3	Horizontal	214	1.15	-	29.80	6.02	37.99			
AV	10.312G	43.35	68.20	-24.85	35.86	3	Horizontal	168	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.22	88.20	-31.98	48.73	3	Horizontal	168	1.00	-	39.55	9.99	42.05			
AV	12.83G	49.31	68.20	-18.89	42.48	3	Horizontal	277	1.34	-	39.66	10.45	43.28			
PK	12.83G	65.68	88.20	-22.52	58.85	3	Horizontal	277	1.34	-	39.66	10.45	43.28			

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX


6415MHz_TX

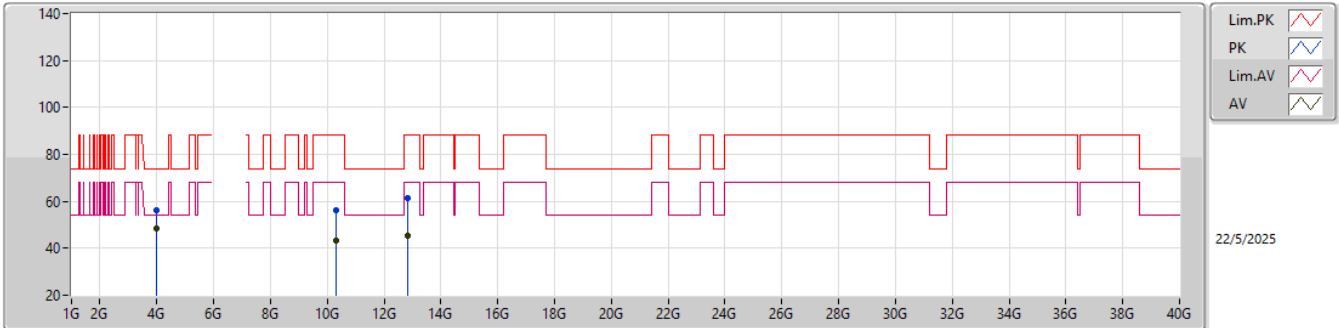

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.25	54.00	-5.75	50.42	3	Vertical	204	1.16	-	29.80	6.02	37.99			
PK	3.999G	56.19	74.00	-17.81	58.36	3	Vertical	204	1.16	-	29.80	6.02	37.99			
AV	10.312G	43.42	68.20	-24.78	35.93	3	Vertical	161	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.38	88.20	-31.82	48.89	3	Vertical	161	1.00	-	39.55	9.99	42.05			
AV	12.83G	45.28	68.20	-22.92	38.45	3	Vertical	223	3.13	-	39.66	10.45	43.28			
PK	12.83G	61.30	88.20	-26.90	54.47	3	Vertical	223	3.13	-	39.66	10.45	43.28			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX


6535MHz_TX

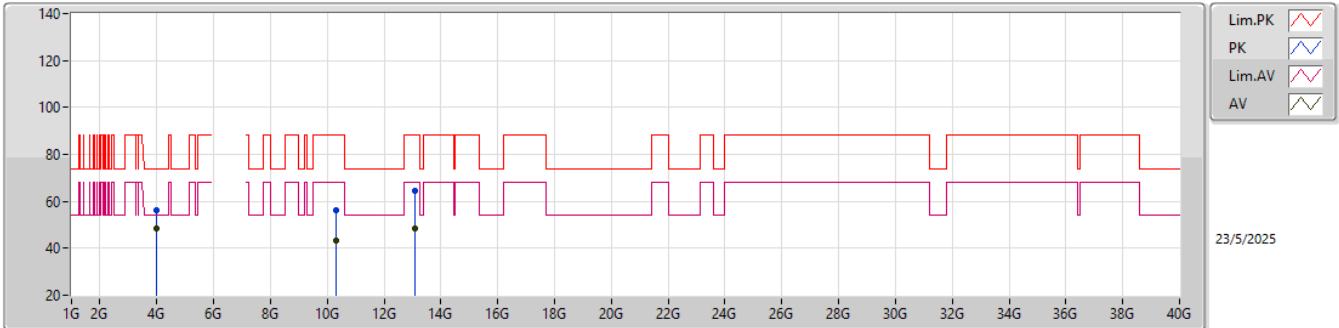

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.26	54.00	-5.74	50.43	3	Horizontal	209	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.05	74.00	-17.95	58.22	3	Horizontal	209	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.35	68.20	-24.85	35.86	3	Horizontal	128	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.24	88.20	-31.96	48.75	3	Horizontal	128	1.00	-	39.55	9.99	42.05			
AV	13.07G	48.31	68.20	-19.89	42.18	3	Horizontal	257	1.64	-	39.46	10.53	43.86			
PK	13.07G	64.55	88.20	-23.65	58.42	3	Horizontal	257	1.64	-	39.46	10.53	43.86			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX


6535MHz_TX

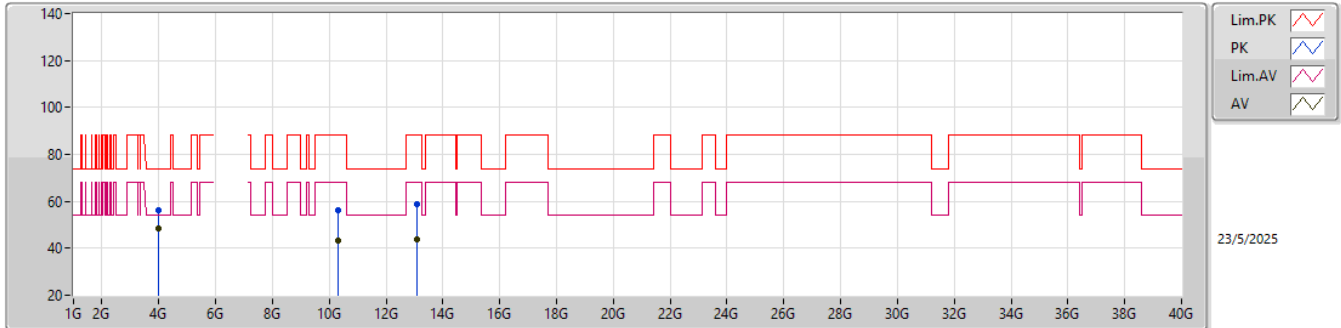

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.22	54.00	-5.78	50.39	3	Vertical	209	1.17	-	29.80	6.02	37.99			
PK	3.999G	56.15	74.00	-17.85	58.32	3	Vertical	209	1.17	-	29.80	6.02	37.99			
AV	10.312G	43.36	68.20	-24.84	35.87	3	Vertical	156	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.38	88.20	-31.82	48.89	3	Vertical	156	1.00	-	39.55	9.99	42.05			
AV	13.07G	43.96	68.20	-24.24	37.83	3	Vertical	249	3.17	-	39.46	10.53	43.86			
PK	13.07G	58.91	88.20	-29.29	52.78	3	Vertical	249	3.17	-	39.46	10.53	43.86			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX


6715MHz_TX

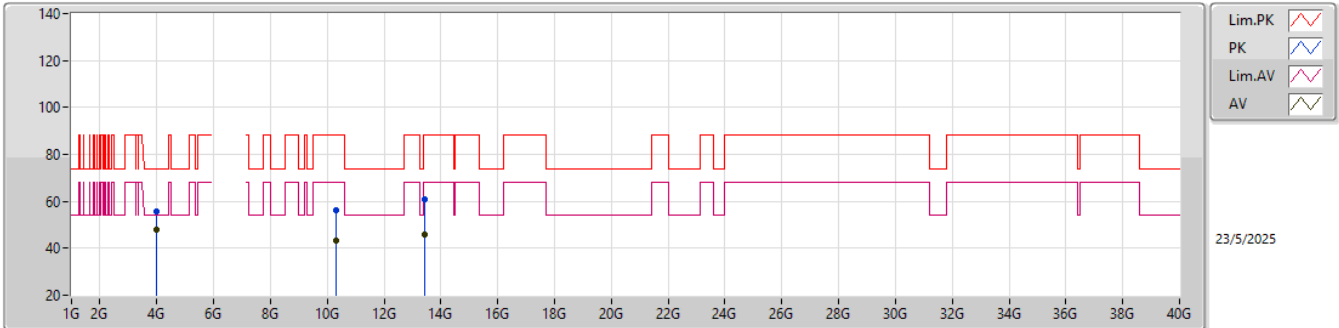

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	47.95	54.00	-6.05	50.12	3	Horizontal	201	1.00	-	29.80	6.02	37.99			
PK	3.999G	55.84	74.00	-18.16	58.01	3	Horizontal	201	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.19	68.20	-25.01	35.70	3	Horizontal	138	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.24	88.20	-31.96	48.75	3	Horizontal	138	1.00	-	39.55	9.99	42.05			
AV	13.43G	45.98	68.20	-22.22	39.76	3	Horizontal	285	1.82	-	40.02	10.61	44.41			
PK	13.43G	61.01	88.20	-27.19	54.79	3	Horizontal	285	1.82	-	40.02	10.61	44.41			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX


6715MHz_TX

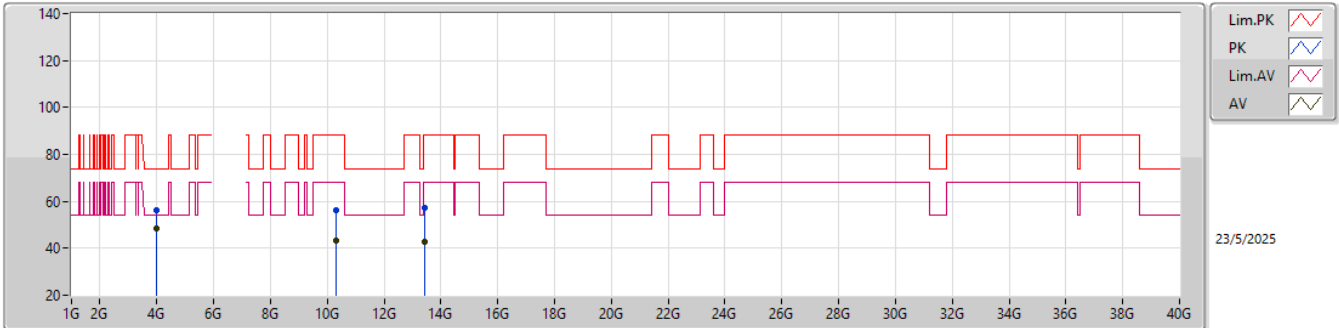

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.32	54.00	-5.68	50.49	3	Vertical	205	1.12	-	29.80	6.02	37.99			
PK	3.999G	56.21	74.00	-17.79	58.38	3	Vertical	205	1.12	-	29.80	6.02	37.99			
AV	10.312G	43.22	68.20	-24.98	35.73	3	Vertical	149	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.13	88.20	-32.07	48.64	3	Vertical	149	1.00	-	39.55	9.99	42.05			
AV	13.43G	42.75	68.20	-25.45	36.53	3	Vertical	226	1.18	-	40.02	10.61	44.41			
PK	13.43G	57.05	88.20	-31.15	50.83	3	Vertical	226	1.18	-	40.02	10.61	44.41			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX


6855MHz_TX

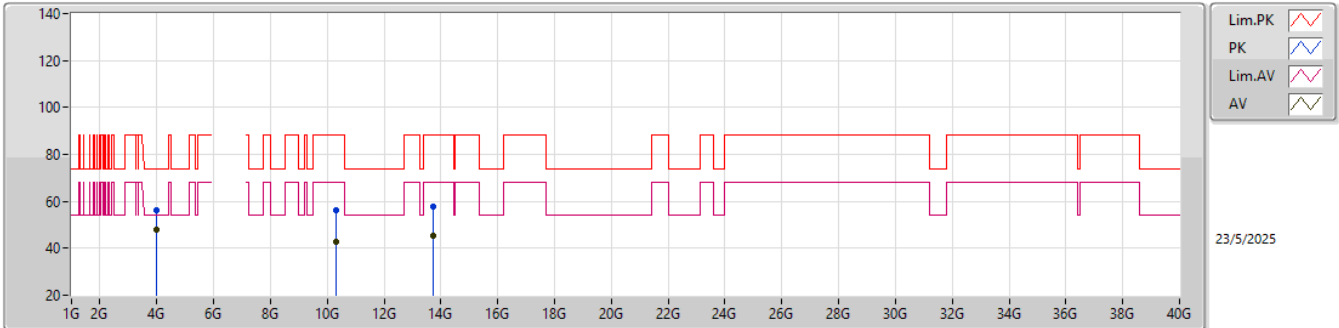

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	47.85	54.00	-6.15	50.02	3	Horizontal	209	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.02	74.00	-17.98	58.19	3	Horizontal	209	1.00	-	29.80	6.02	37.99			
AV	10.312G	42.81	68.20	-25.39	35.32	3	Horizontal	154	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.39	88.20	-31.81	48.90	3	Horizontal	154	1.00	-	39.55	9.99	42.05			
AV	13.71G	45.20	68.20	-23.00	38.93	3	Horizontal	220	3.29	-	40.30	10.68	44.71			
PK	13.71G	57.94	88.20	-30.26	51.67	3	Horizontal	220	3.29	-	40.30	10.68	44.71			

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX


6855MHz_TX

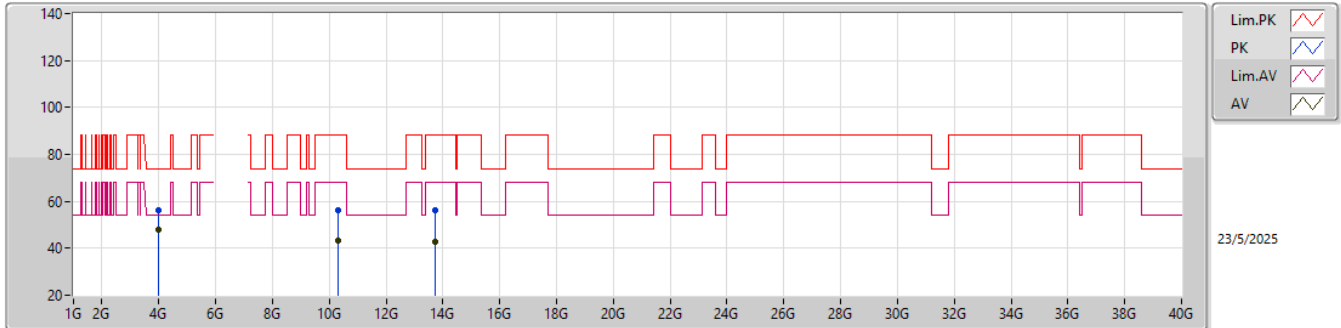

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.11	54.00	-5.89	50.28	3	Vertical	304	1.15	-	29.80	6.02	37.99			
PK	3.999G	56.04	74.00	-17.96	58.21	3	Vertical	304	1.15	-	29.80	6.02	37.99			
AV	10.312G	43.44	68.20	-24.76	35.95	3	Vertical	161	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.42	88.20	-31.78	48.93	3	Vertical	161	1.00	-	39.55	9.99	42.05			
AV	13.71G	42.55	68.20	-25.65	36.28	3	Vertical	101	1.00	-	40.30	10.68	44.71			
PK	13.71G	56.32	88.20	-31.88	50.05	3	Vertical	101	1.00	-	40.30	10.68	44.71			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5955MHz_TX

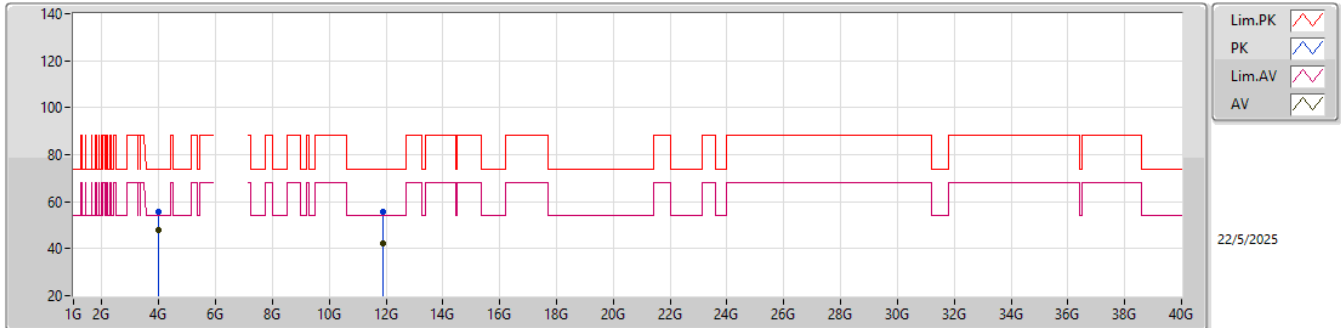

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	3.999G	47.75	54.00	-6.25	49.92	3	Horizontal	213	1.00	-	29.80	6.02	37.99				
PK	3.999G	55.62	74.00	-18.38	57.79	3	Horizontal	213	1.00	-	29.80	6.02	37.99				
AV	11.91G	42.33	54.00	-11.67	35.90	3	Horizontal	238	1.22	-	39.10	10.22	42.89				
PK	11.91G	55.63	74.00	-18.37	49.20	3	Horizontal	238	1.22	-	39.10	10.22	42.89				

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5955MHz_TX

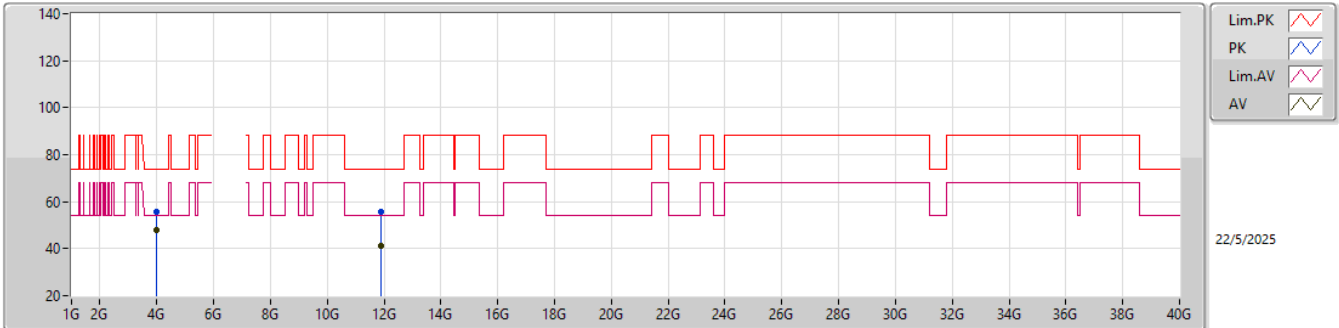

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	3.999G	48.09	54.00	-5.91	50.26	3	Vertical	214	1.15	-	29.80	6.02	37.99				
PK	3.999G	55.92	74.00	-18.08	58.09	3	Vertical	214	1.15	-	29.80	6.02	37.99				
AV	11.91G	41.25	54.00	-12.75	34.82	3	Vertical	9	1.76	-	39.10	10.22	42.89				
PK	11.91G	55.75	74.00	-18.25	49.32	3	Vertical	9	1.76	-	39.10	10.22	42.89				

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6175MHz_TX

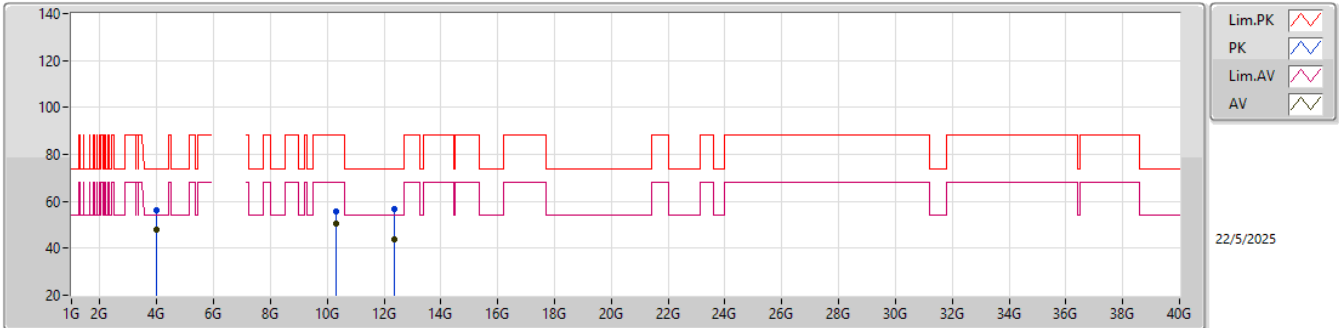

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.12	54.00	-5.88	50.29	3	Horizontal	201	1.00	-	29.80	6.02	37.99			
PK	3.999G	55.96	74.00	-18.04	58.13	3	Horizontal	201	1.00	-	29.80	6.02	37.99			
AV	10.312G	50.74	68.20	-17.46	43.25	3	Horizontal	136	1.00	-	39.55	9.99	42.05			
PK	10.312G	55.81	88.20	-32.39	48.32	3	Horizontal	136	1.00	-	39.55	9.99	42.05			
AV	12.35G	43.64	54.00	-10.36	36.54	3	Horizontal	223	1.35	-	39.30	10.31	42.51			
PK	12.35G	56.48	74.00	-17.52	49.38	3	Horizontal	223	1.35	-	39.30	10.31	42.51			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6175MHz_TX

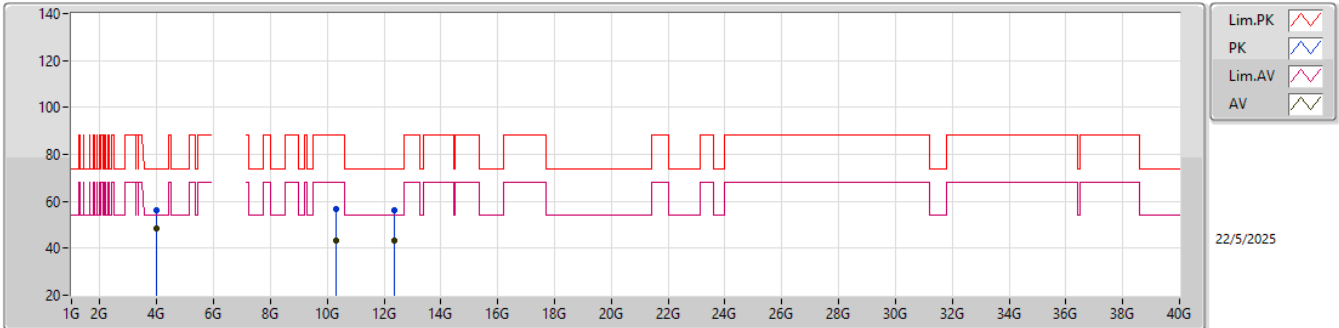

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.24	54.00	-5.76	50.41	3	Vertical	219	1.15	-	29.80	6.02	37.99			
PK	3.999G	56.09	74.00	-17.91	58.26	3	Vertical	219	1.15	-	29.80	6.02	37.99			
AV	10.312G	43.38	68.20	-24.82	35.89	3	Vertical	148	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.52	88.20	-31.68	49.03	3	Vertical	148	1.00	-	39.55	9.99	42.05			
AV	12.35G	43.51	54.00	-10.49	36.41	3	Vertical	186	1.00	-	39.30	10.31	42.51			
PK	12.35G	56.29	74.00	-17.71	49.19	3	Vertical	186	1.00	-	39.30	10.31	42.51			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6415MHz_TX

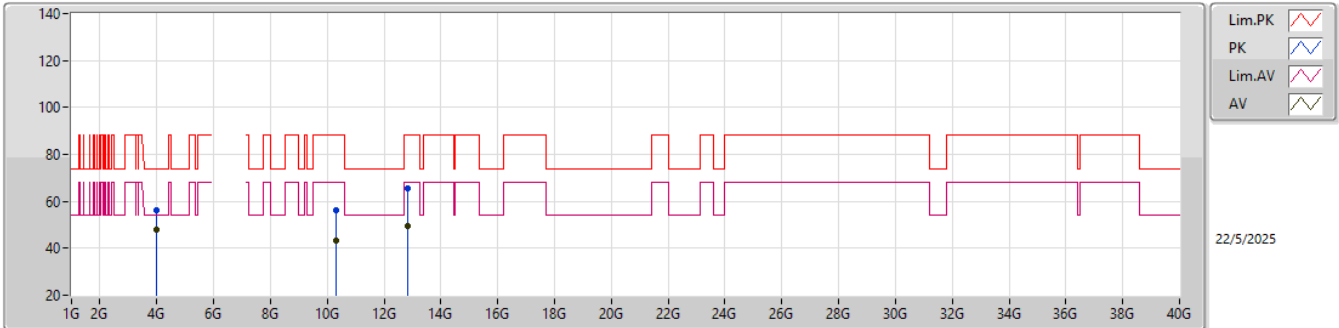

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.14	54.00	-5.86	50.31	3	Horizontal	201	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.03	74.00	-17.97	58.20	3	Horizontal	201	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.06	68.20	-25.14	35.57	3	Horizontal	158	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.38	88.20	-31.82	48.89	3	Horizontal	158	1.00	-	39.55	9.99	42.05			
AV	12.83G	49.74	68.20	-18.46	42.91	3	Horizontal	260	1.32	-	39.66	10.45	43.28			
PK	12.83G	65.68	88.20	-22.52	58.85	3	Horizontal	260	1.32	-	39.66	10.45	43.28			

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6415MHz_TX

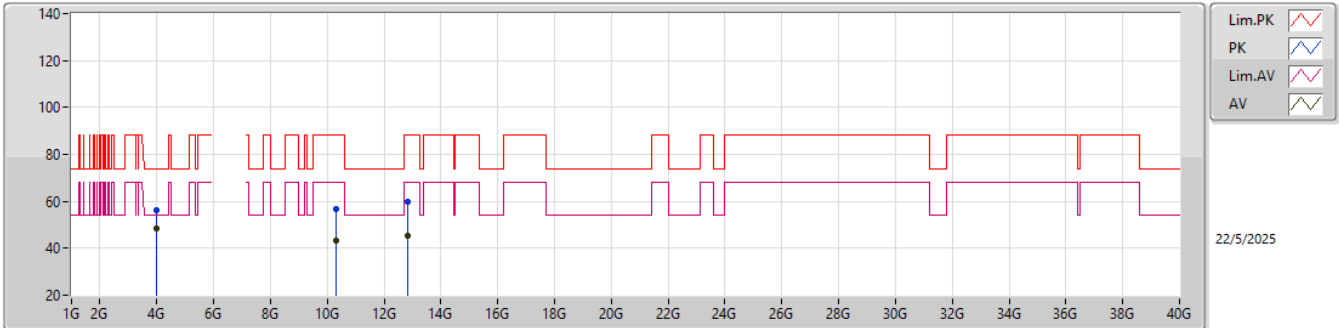

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.25	54.00	-5.75	50.42	3	Vertical	207	1.18	-	29.80	6.02	37.99			
PK	3.999G	56.12	74.00	-17.88	58.29	3	Vertical	207	1.18	-	29.80	6.02	37.99			
AV	10.312G	43.29	68.20	-24.91	35.80	3	Vertical	161	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.48	88.20	-31.72	48.99	3	Vertical	161	1.00	-	39.55	9.99	42.05			
AV	12.83G	45.17	68.20	-23.03	38.34	3	Vertical	276	1.38	-	39.66	10.45	43.28			
PK	12.83G	59.82	88.20	-28.38	52.99	3	Vertical	276	1.38	-	39.66	10.45	43.28			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6535MHz_TX

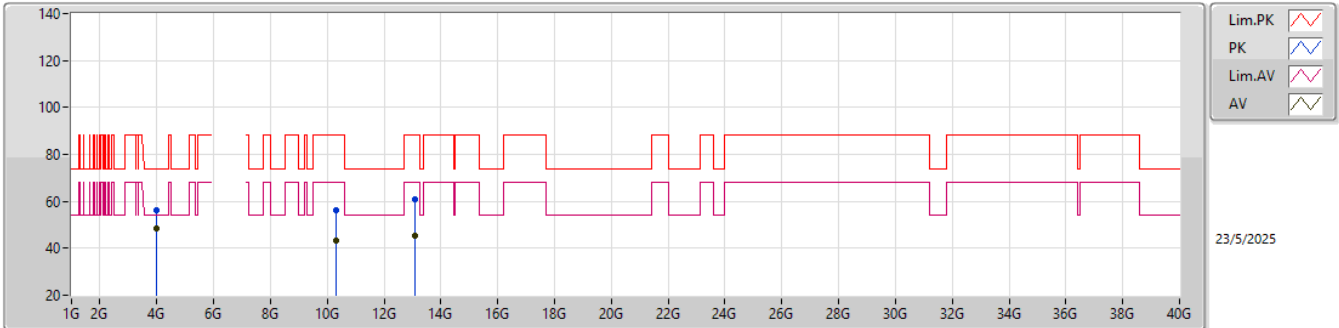

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.22	54.00	-5.78	50.39	3	Horizontal	229	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.34	74.00	-17.66	58.51	3	Horizontal	229	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.45	68.20	-24.75	35.96	3	Horizontal	141	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.34	88.20	-31.86	48.85	3	Horizontal	141	1.00	-	39.55	9.99	42.05			
AV	13.07G	45.40	68.20	-22.80	39.27	3	Horizontal	280	3.15	-	39.46	10.53	43.86			
PK	13.07G	60.94	88.20	-27.26	54.81	3	Horizontal	280	3.15	-	39.46	10.53	43.86			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6535MHz_TX

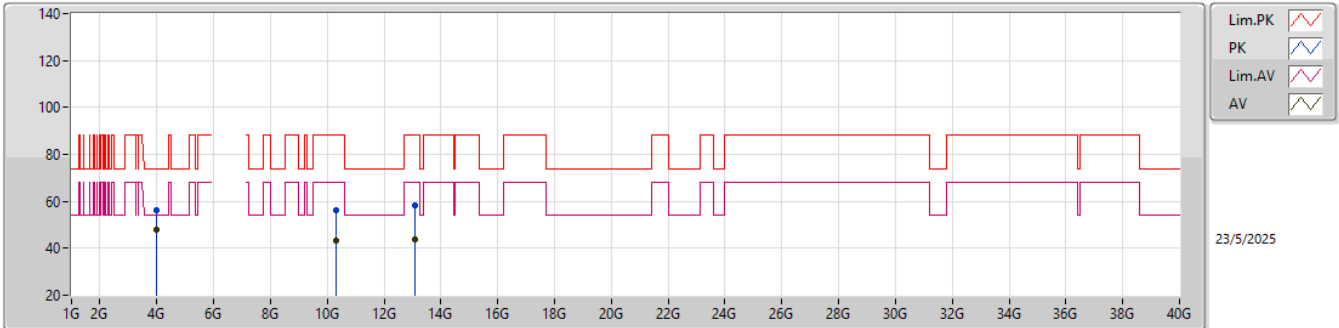

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.16	54.00	-5.84	50.33	3	Vertical	201	1.12	-	29.80	6.02	37.99			
PK	3.999G	56.13	74.00	-17.87	58.30	3	Vertical	201	1.12	-	29.80	6.02	37.99			
AV	10.312G	43.18	68.20	-25.02	35.69	3	Vertical	151	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.15	88.20	-32.05	48.66	3	Vertical	151	1.00	-	39.55	9.99	42.05			
AV	13.07G	43.73	68.20	-24.47	37.60	3	Vertical	244	2.99	-	39.46	10.53	43.86			
PK	13.07G	58.04	88.20	-30.16	51.91	3	Vertical	244	2.99	-	39.46	10.53	43.86			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6715MHz_TX

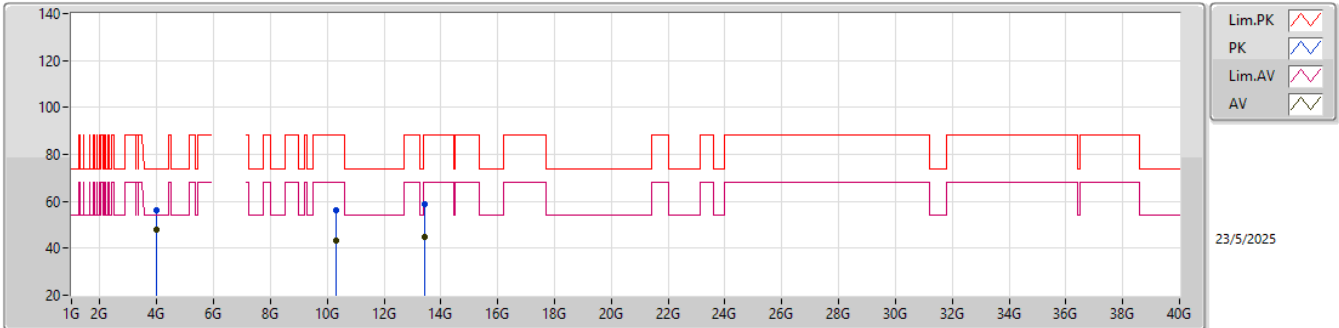

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	47.92	54.00	-6.08	50.09	3	Horizontal	209	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.16	74.00	-17.84	58.33	3	Horizontal	209	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.45	68.20	-24.75	35.96	3	Horizontal	122	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.14	88.20	-32.06	48.65	3	Horizontal	122	1.00	-	39.55	9.99	42.05			
AV	13.43G	45.05	68.20	-23.15	38.83	3	Horizontal	281	1.79	-	40.02	10.61	44.41			
PK	13.43G	58.92	88.20	-29.28	52.70	3	Horizontal	281	1.79	-	40.02	10.61	44.41			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6715MHz_TX

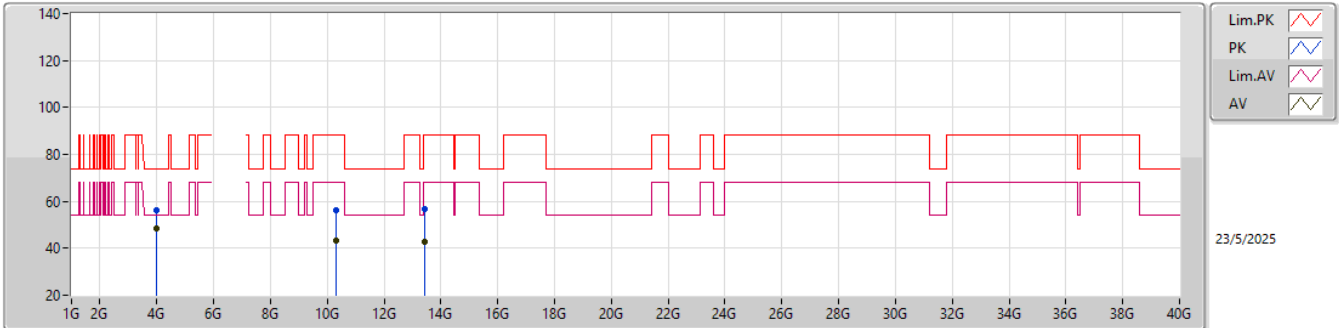

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.25	54.00	-5.75	50.42	3	Vertical	201	1.14	-	29.80	6.02	37.99			
PK	3.999G	56.21	74.00	-17.79	58.38	3	Vertical	201	1.14	-	29.80	6.02	37.99			
AV	10.312G	43.28	68.20	-24.92	35.79	3	Vertical	153	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.29	88.20	-31.91	48.80	3	Vertical	153	1.00	-	39.55	9.99	42.05			
AV	13.43G	42.91	68.20	-25.29	36.69	3	Vertical	59	1.00	-	40.02	10.61	44.41			
PK	13.43G	56.49	88.20	-31.71	50.27	3	Vertical	59	1.00	-	40.02	10.61	44.41			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6855MHz_TX

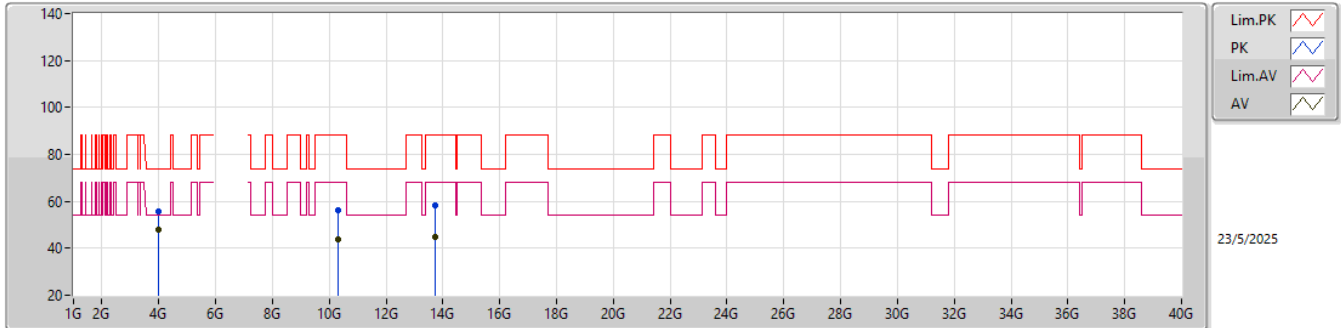

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	47.72	54.00	-6.28	49.89	3	Horizontal	204	1.00	-	29.80	6.02	37.99			
PK	3.999G	55.86	74.00	-18.14	58.03	3	Horizontal	204	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.58	68.20	-24.62	36.09	3	Horizontal	121	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.39	88.20	-31.81	48.90	3	Horizontal	121	1.00	-	39.55	9.99	42.05			
AV	13.71G	44.77	68.20	-23.43	38.50	3	Horizontal	213	1.34	-	40.30	10.68	44.71			
PK	13.71G	58.30	88.20	-29.90	52.03	3	Horizontal	213	1.34	-	40.30	10.68	44.71			

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX


6855MHz_TX

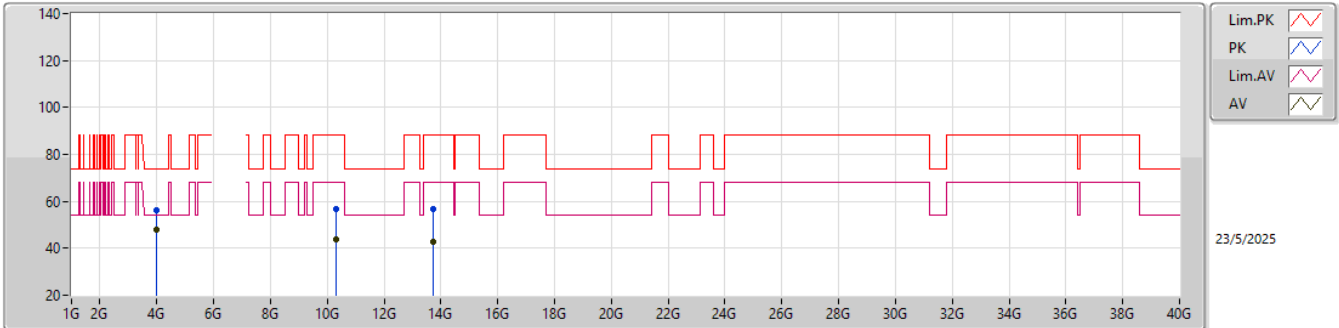

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.12	54.00	-5.88	50.29	3	Vertical	201	1.13	-	29.80	6.02	37.99			
PK	3.999G	56.31	74.00	-17.69	58.48	3	Vertical	201	1.13	-	29.80	6.02	37.99			
AV	10.312G	43.55	68.20	-24.65	36.06	3	Vertical	162	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.48	88.20	-31.72	48.99	3	Vertical	162	1.00	-	39.55	9.99	42.05			
AV	13.71G	42.60	68.20	-25.60	36.33	3	Vertical	9	1.00	-	40.30	10.68	44.71			
PK	13.71G	56.90	88.20	-31.30	50.63	3	Vertical	9	1.00	-	40.30	10.68	44.71			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5965MHz_TX

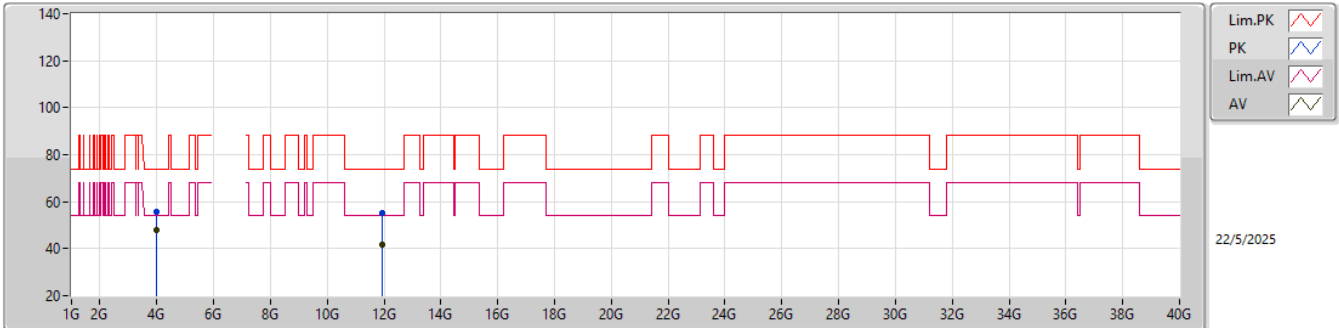

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	3.999G	47.84	54.00	-6.16	50.01	3	Horizontal	2015	1.00	-	29.80	6.02	37.99				
PK	3.999G	55.61	74.00	-18.39	57.78	3	Horizontal	2015	1.00	-	29.80	6.02	37.99				
AV	11.93G	41.69	54.00	-12.31	35.26	3	Horizontal	17	1.00	-	39.10	10.22	42.89				
PK	11.93G	55.16	74.00	-18.84	48.73	3	Horizontal	17	1.00	-	39.10	10.22	42.89				

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


5965MHz_TX

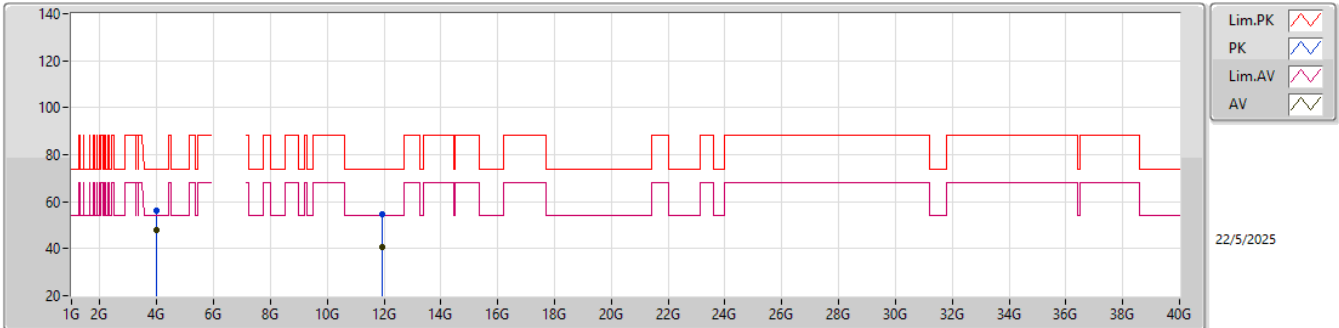

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	3.999G	48.02	54.00	-5.98	50.19	3	Vertical	215	1.16	-	29.80	6.02	37.99				
PK	3.999G	56.14	74.00	-17.86	58.31	3	Vertical	215	1.16	-	29.80	6.02	37.99				
AV	11.93G	40.94	54.00	-13.06	34.51	3	Vertical	199	1.00	-	39.10	10.22	42.89				
PK	11.93G	54.57	74.00	-19.43	48.14	3	Vertical	199	1.00	-	39.10	10.22	42.89				

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6165MHz_TX

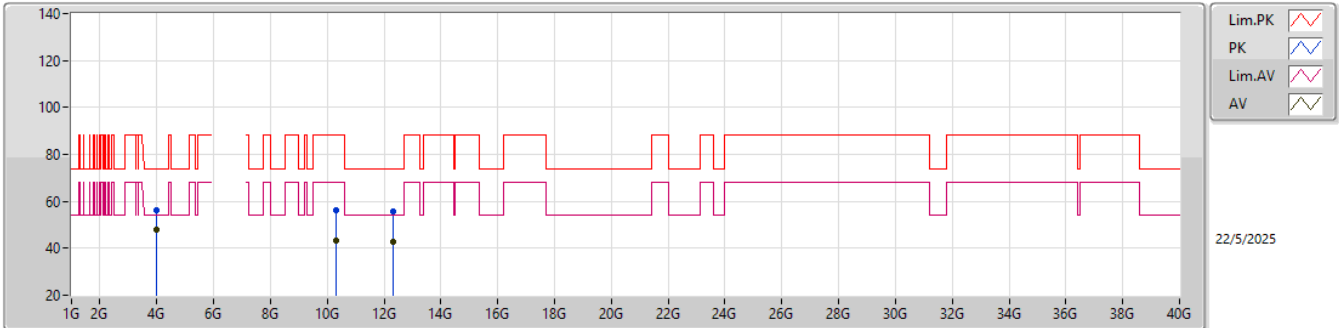

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	47.89	54.00	-6.11	50.06	3	Horizontal	192	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.05	74.00	-17.95	58.22	3	Horizontal	192	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.08	68.20	-25.12	35.59	3	Horizontal	141	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.25	88.20	-31.95	48.76	3	Horizontal	141	1.00	-	39.55	9.99	42.05			
AV	12.33G	42.64	54.00	-11.36	35.49	3	Horizontal	26	1.00	-	39.38	10.30	42.53			
PK	12.33G	55.68	74.00	-18.32	48.53	3	Horizontal	26	1.00	-	39.38	10.30	42.53			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6165MHz_TX

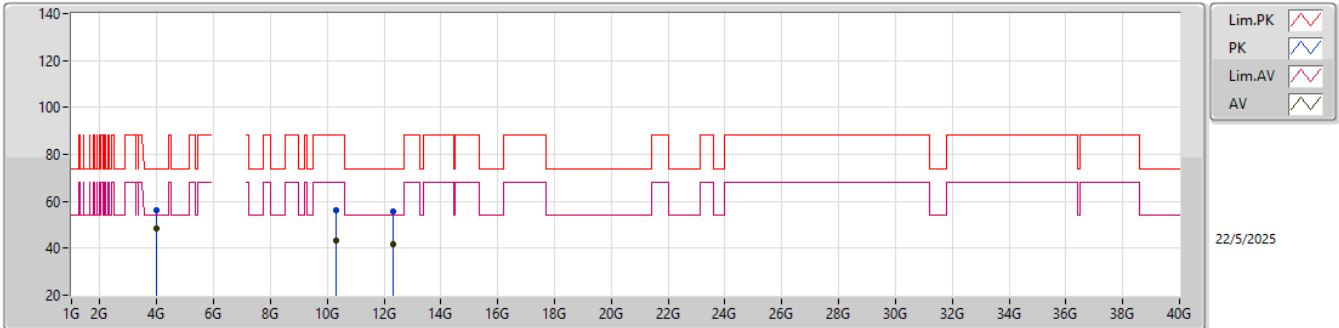

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.25	54.00	-5.75	50.42	3	Vertical	213	1.16	-	29.80	6.02	37.99			
PK	3.999G	56.17	74.00	-17.83	58.34	3	Vertical	213	1.16	-	29.80	6.02	37.99			
AV	10.312G	43.42	68.20	-24.78	35.93	3	Vertical	152	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.36	88.20	-31.84	48.87	3	Vertical	152	1.00	-	39.55	9.99	42.05			
AV	12.33G	41.84	54.00	-12.16	34.69	3	Vertical	267	1.00	-	39.38	10.30	42.53			
PK	12.33G	55.50	74.00	-18.50	48.35	3	Vertical	267	1.00	-	39.38	10.30	42.53			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6405MHz_TX

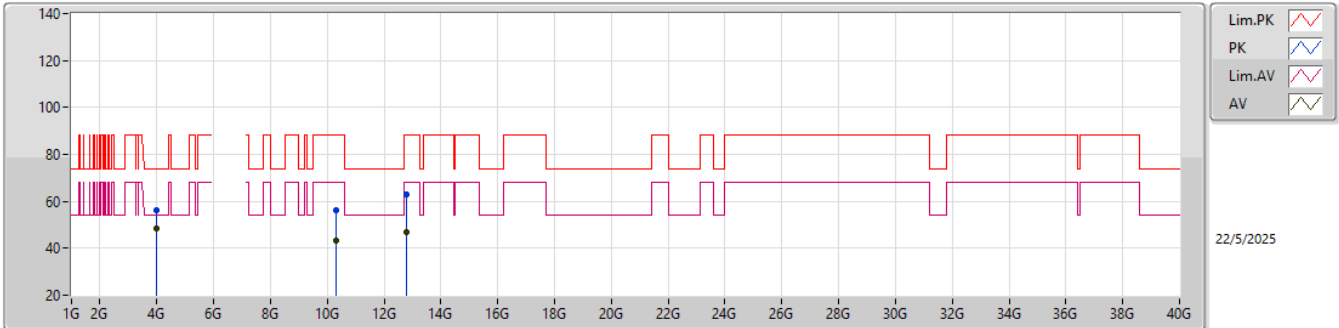

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.26	54.00	-5.74	50.43	3	Horizontal	192	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.33	74.00	-17.67	58.50	3	Horizontal	192	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.32	68.20	-24.88	35.83	3	Horizontal	131	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.28	88.20	-31.92	48.79	3	Horizontal	131	1.00	-	39.55	9.99	42.05			
AV	12.81G	46.65	68.20	-21.55	39.80	3	Horizontal	277	1.21	-	39.62	10.45	43.22			
PK	12.81G	62.94	88.20	-25.26	56.09	3	Horizontal	277	1.21	-	39.62	10.45	43.22			

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6405MHz_TX

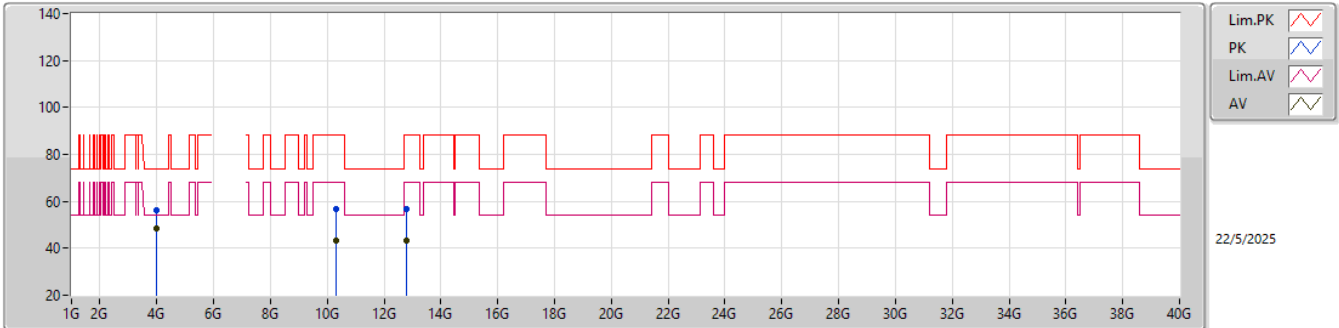

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.45	54.00	-5.55	50.62	3	Vertical	216	1.18	-	29.80	6.02	37.99			
PK	3.999G	56.42	74.00	-17.58	58.59	3	Vertical	216	1.18	-	29.80	6.02	37.99			
AV	10.312G	43.44	68.20	-24.76	35.95	3	Vertical	169	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.48	88.20	-31.72	48.99	3	Vertical	169	1.00	-	39.55	9.99	42.05			
AV	12.81G	43.15	68.20	-25.05	36.30	3	Vertical	220	3.11	-	39.62	10.45	43.22			
PK	12.81G	56.81	88.20	-31.39	49.96	3	Vertical	220	3.11	-	39.62	10.45	43.22			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6565MHz_TX

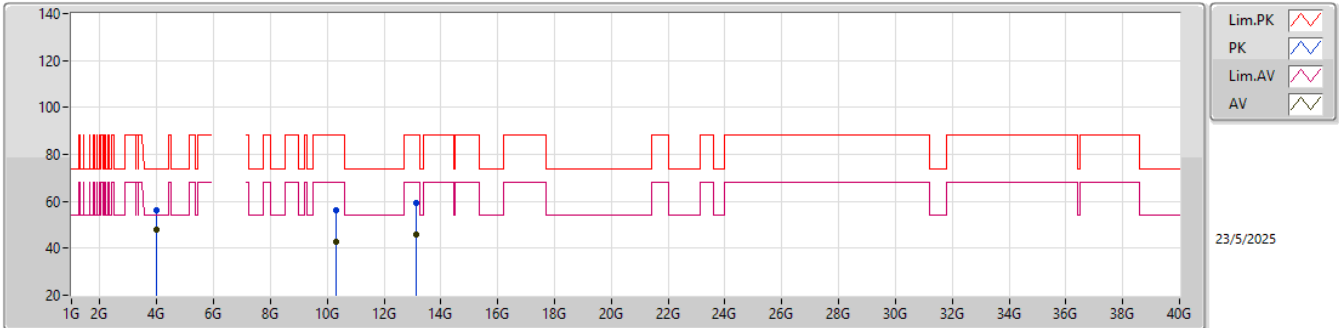

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	47.85	54.00	-6.15	50.02	3	Horizontal	194	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.02	74.00	-17.98	58.19	3	Horizontal	194	1.00	-	29.80	6.02	37.99			
AV	10.312G	42.81	68.20	-25.39	35.32	3	Horizontal	135	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.14	88.20	-32.06	48.65	3	Horizontal	135	1.00	-	39.55	9.99	42.05			
AV	13.13G	45.77	68.20	-22.43	39.60	3	Horizontal	258	1.14	-	39.58	10.54	43.95			
PK	13.13G	59.47	88.20	-28.73	53.30	3	Horizontal	258	1.14	-	39.58	10.54	43.95			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6565MHz_TX

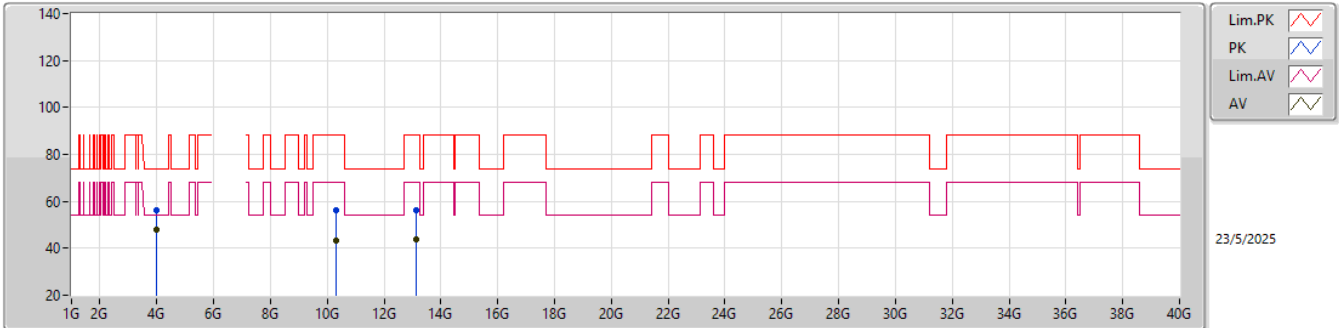

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.05	54.00	-5.95	50.22	3	Vertical	202	1.11	-	29.80	6.02	37.99			
PK	3.999G	55.98	74.00	-18.02	58.15	3	Vertical	202	1.11	-	29.80	6.02	37.99			
AV	10.312G	43.45	68.20	-24.75	35.96	3	Vertical	158	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.22	88.20	-31.98	48.73	3	Vertical	158	1.00	-	39.55	9.99	42.05			
AV	13.13G	43.68	68.20	-24.52	37.51	3	Vertical	279	1.25	-	39.58	10.54	43.95			
PK	13.13G	56.32	88.20	-31.88	50.15	3	Vertical	279	1.25	-	39.58	10.54	43.95			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6725MHz_TX

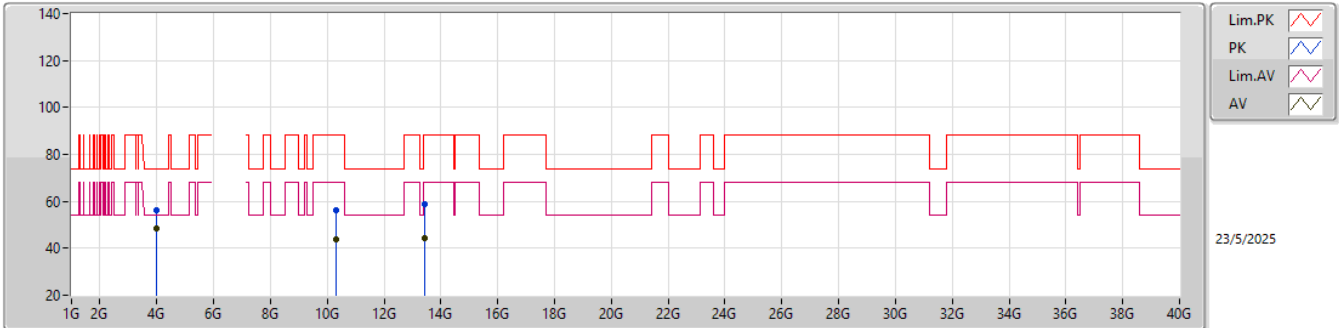

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.26	54.00	-5.74	50.43	3	Horizontal	209	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.15	74.00	-17.85	58.32	3	Horizontal	209	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.62	68.20	-24.58	36.13	3	Horizontal	118	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.39	88.20	-31.81	48.90	3	Horizontal	118	1.00	-	39.55	9.99	42.05			
AV	13.45G	44.19	68.20	-24.01	37.90	3	Horizontal	278	1.89	-	40.10	10.62	44.43			
PK	13.45G	58.76	88.20	-29.44	52.47	3	Horizontal	278	1.89	-	40.10	10.62	44.43			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6725MHz_TX

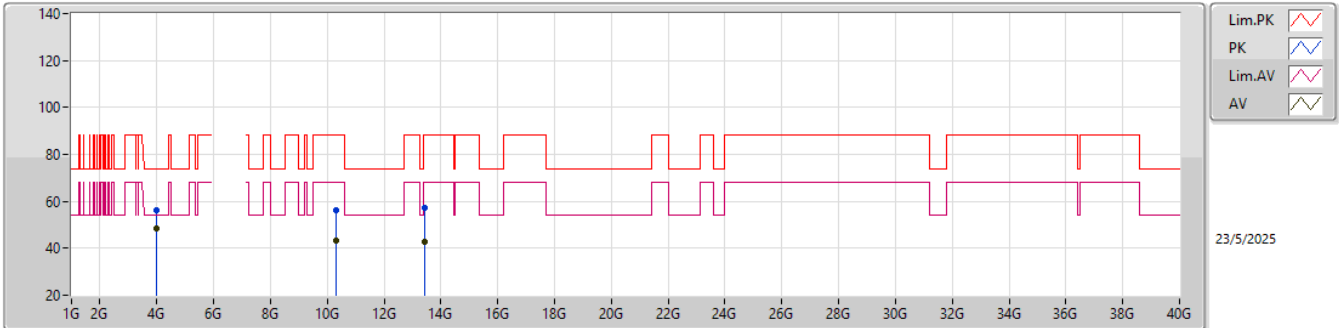

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.29	54.00	-5.71	50.46	3	Vertical	208	1.12	-	29.80	6.02	37.99			
PK	3.999G	56.18	74.00	-17.82	58.35	3	Vertical	208	1.12	-	29.80	6.02	37.99			
AV	10.312G	43.27	68.20	-24.93	35.78	3	Vertical	144	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.14	88.20	-32.06	48.65	3	Vertical	144	1.00	-	39.55	9.99	42.05			
AV	13.45G	42.93	68.20	-25.27	36.64	3	Vertical	123	1.00	-	40.10	10.62	44.43			
PK	13.45G	56.99	88.20	-31.21	50.70	3	Vertical	123	1.00	-	40.10	10.62	44.43			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6845MHz_TX

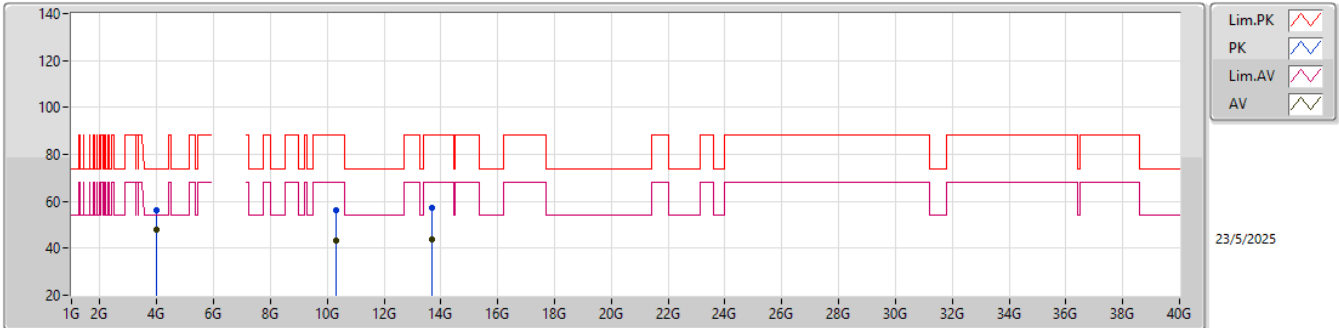

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.15	54.00	-5.85	50.32	3	Horizontal	206	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.07	74.00	-17.93	58.24	3	Horizontal	206	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.52	68.20	-24.68	36.03	3	Horizontal	138	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.44	88.20	-31.76	48.95	3	Horizontal	138	1.00	-	39.55	9.99	42.05			
AV	13.69G	43.94	68.20	-24.26	37.67	3	Horizontal	222	3.15	-	40.28	10.68	44.69			
PK	13.69G	57.25	88.20	-30.95	50.98	3	Horizontal	222	3.15	-	40.28	10.68	44.69			

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX


6845MHz_TX

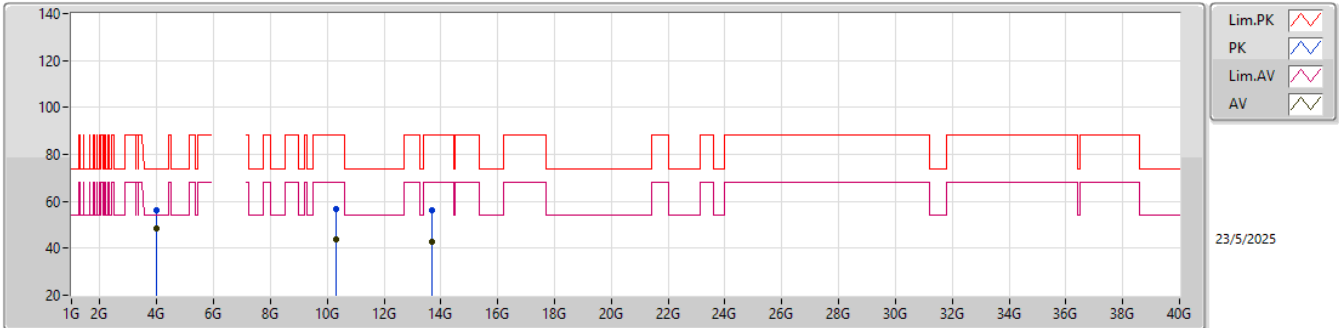

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.26	54.00	-5.74	50.43	3	Vertical	211	1.15	-	29.80	6.02	37.99			
PK	3.999G	56.14	74.00	-17.86	58.31	3	Vertical	211	1.15	-	29.80	6.02	37.99			
AV	10.312G	43.62	68.20	-24.58	36.13	3	Vertical	161	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.54	88.20	-31.66	49.05	3	Vertical	161	1.00	-	39.55	9.99	42.05			
AV	13.69G	42.95	68.20	-25.25	36.68	3	Vertical	216	1.00	-	40.28	10.68	44.69			
PK	13.69G	56.26	88.20	-31.94	49.99	3	Vertical	216	1.00	-	40.28	10.68	44.69			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5985MHz_TX

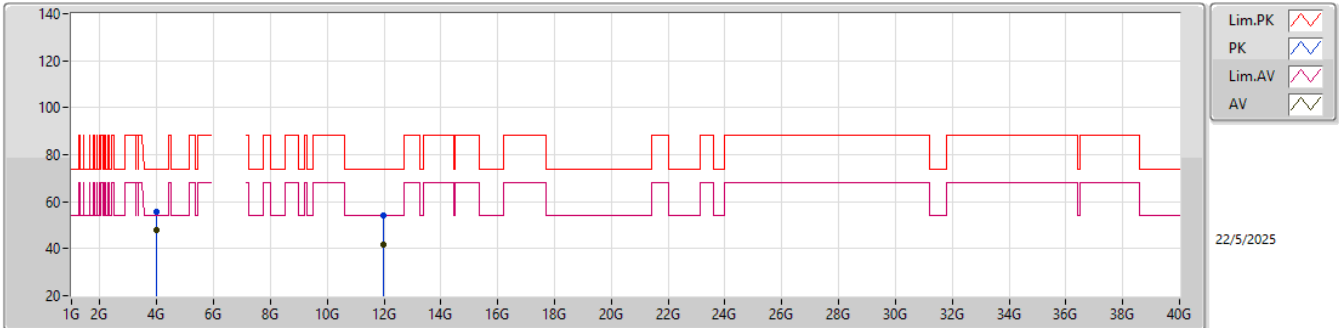

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	3.999G	47.92	54.00	-6.08	50.09	3	Horizontal	212	1.00	-	29.80	6.02	37.99				
PK	3.999G	55.81	74.00	-18.19	57.98	3	Horizontal	212	1.00	-	29.80	6.02	37.99				
AV	11.97G	41.81	54.00	-12.19	35.30	3	Horizontal	312	1.00	-	39.18	10.23	42.90				
PK	11.97G	54.25	74.00	-19.75	47.74	3	Horizontal	312	1.00	-	39.18	10.23	42.90				

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5985MHz_TX

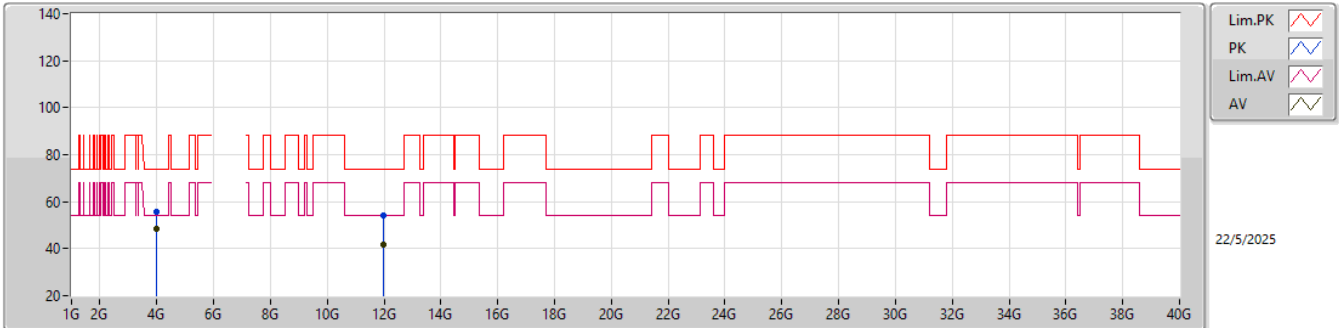

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.22	54.00	-5.78	50.39	3	Vertical	216	1.00	-	29.80	6.02	37.99			
PK	3.999G	55.86	74.00	-18.14	58.03	3	Vertical	216	1.00	-	29.80	6.02	37.99			
AV	11.97G	41.74	54.00	-12.26	35.23	3	Vertical	13	1.00	-	39.18	10.23	42.90			
PK	11.97G	54.13	74.00	-19.87	47.62	3	Vertical	13	1.00	-	39.18	10.23	42.90			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6145MHz_TX

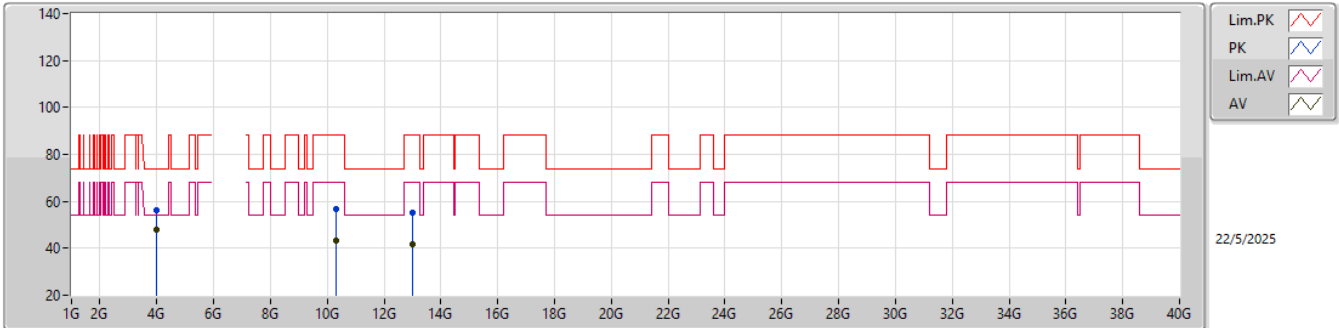

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.12	54.00	-5.88	50.29	3	Horizontal	205	1.00	-	29.80	6.02	37.99			
PK	3.999G	55.96	74.00	-18.04	58.13	3	Horizontal	205	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.24	68.20	-24.96	35.75	3	Horizontal	129	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.49	88.20	-31.71	49.00	3	Horizontal	129	1.00	-	39.55	9.99	42.05			
AV	12.99G	41.92	68.20	-26.28	35.42	3	Horizontal	280	1.00	-	39.72	10.51	43.73			
PK	12.99G	55.18	88.20	-33.02	48.68	3	Horizontal	280	1.00	-	39.72	10.51	43.73			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6145MHz_TX

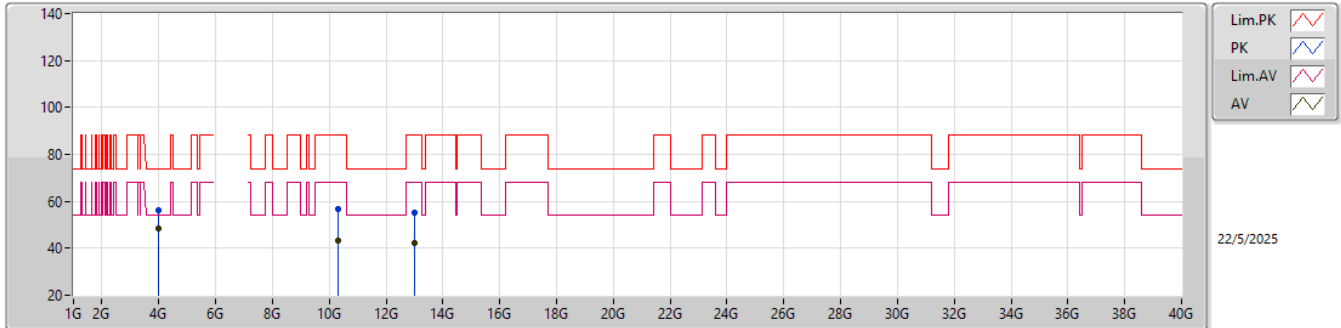

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.29	54.00	-5.71	50.46	3	Vertical	219	1.16	-	29.80	6.02	37.99			
PK	3.999G	56.31	74.00	-17.69	58.48	3	Vertical	219	1.16	-	29.80	6.02	37.99			
AV	10.312G	43.28	68.20	-24.92	35.79	3	Vertical	158	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.61	88.20	-31.59	49.12	3	Vertical	158	1.00	-	39.55	9.99	42.05			
AV	12.99G	42.11	68.20	-26.09	35.61	3	Vertical	177	1.00	-	39.72	10.51	43.73			
PK	12.99G	55.33	88.20	-32.87	48.83	3	Vertical	177	1.00	-	39.72	10.51	43.73			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6385MHz_TX

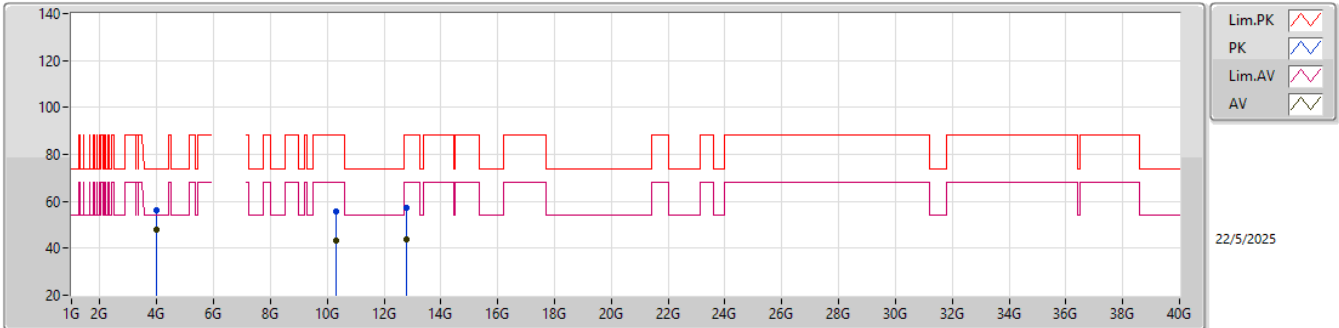

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.16	54.00	-5.84	50.33	3	Horizontal	205	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.19	74.00	-17.81	58.36	3	Horizontal	205	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.12	68.20	-25.08	35.63	3	Horizontal	142	1.00	-	39.55	9.99	42.05			
PK	10.312G	55.91	88.20	-32.29	48.42	3	Horizontal	142	1.00	-	39.55	9.99	42.05			
AV	12.77G	43.83	68.20	-24.37	37.09	3	Horizontal	274	1.21	-	39.42	10.43	43.11			
PK	12.77G	57.22	88.20	-30.98	50.48	3	Horizontal	274	1.21	-	39.42	10.43	43.11			

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6385MHz_TX

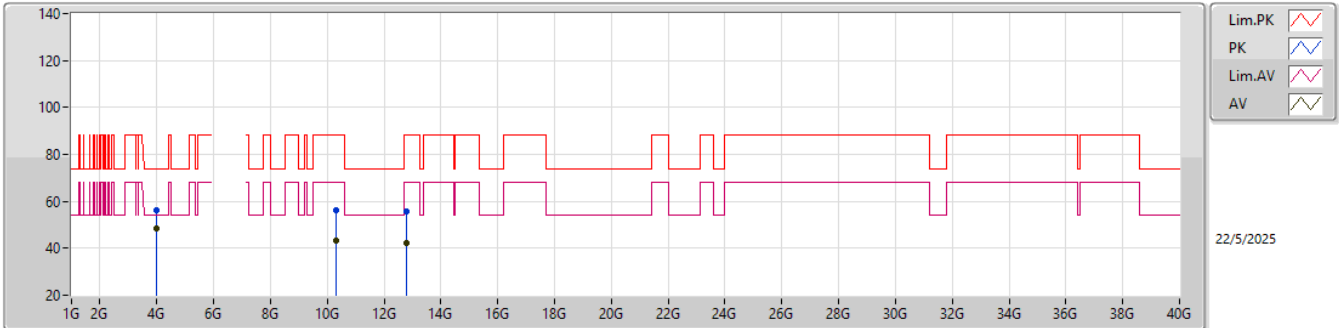

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.32	54.00	-5.68	50.49	3	Vertical	215	1.22	-	29.80	6.02	37.99			
PK	3.999G	56.36	74.00	-17.64	58.53	3	Vertical	215	1.22	-	29.80	6.02	37.99			
AV	10.312G	43.34	68.20	-24.86	35.85	3	Vertical	161	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.28	88.20	-31.92	48.79	3	Vertical	161	1.00	-	39.55	9.99	42.05			
AV	12.77G	42.22	68.20	-25.98	35.48	3	Vertical	206	1.00	-	39.42	10.43	43.11			
PK	12.77G	55.74	88.20	-32.46	49.00	3	Vertical	206	1.00	-	39.42	10.43	43.11			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6625MHz_TX

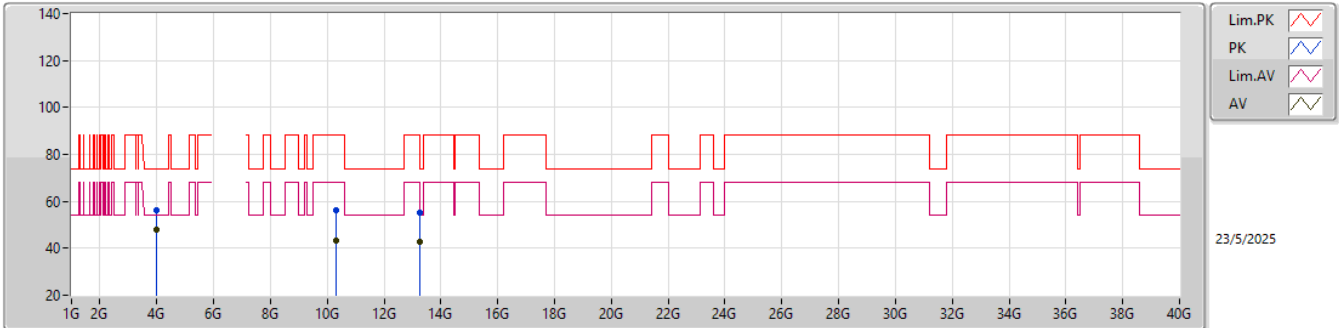

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.04	54.00	-5.96	50.21	3	Horizontal	195	1.00	-	29.80	6.02	37.99			
PK	3.999G	55.98	74.00	-18.02	58.15	3	Horizontal	195	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.52	68.20	-24.68	36.03	3	Horizontal	146	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.14	88.20	-32.06	48.65	3	Horizontal	146	1.00	-	39.55	9.99	42.05			
AV	13.25G	42.56	54.00	-11.44	36.52	3	Horizontal	61	1.00	-	39.60	10.57	44.13			
PK	13.25G	54.92	74.00	-19.08	48.88	3	Horizontal	61	1.00	-	39.60	10.57	44.13			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6625MHz_TX

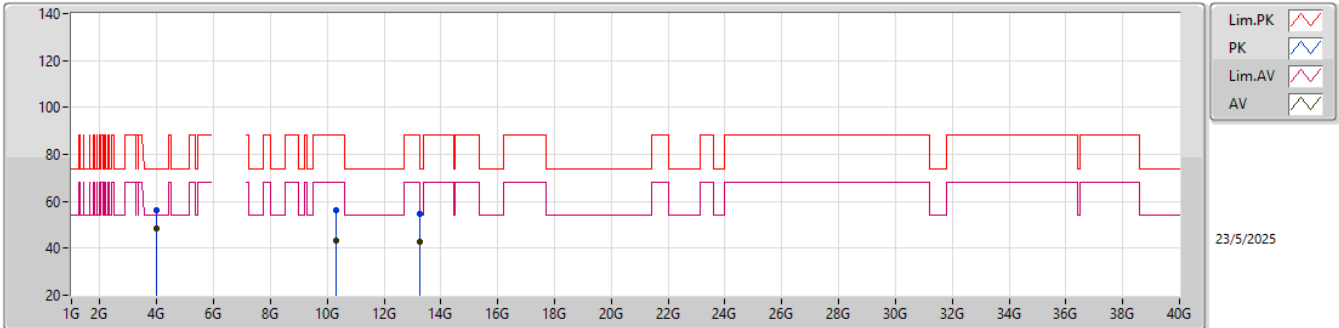

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.36	54.00	-5.64	50.53	3	Vertical	216	1.15	-	29.80	6.02	37.99			
PK	3.999G	56.31	74.00	-17.69	58.48	3	Vertical	216	1.15	-	29.80	6.02	37.99			
AV	10.312G	43.19	68.20	-25.01	35.70	3	Vertical	151	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.22	88.20	-31.98	48.73	3	Vertical	151	1.00	-	39.55	9.99	42.05			
AV	13.25G	42.69	54.00	-11.31	36.65	3	Vertical	61	1.00	-	39.60	10.57	44.13			
PK	13.25G	54.69	74.00	-19.31	48.65	3	Vertical	61	1.00	-	39.60	10.57	44.13			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6705MHz_TX

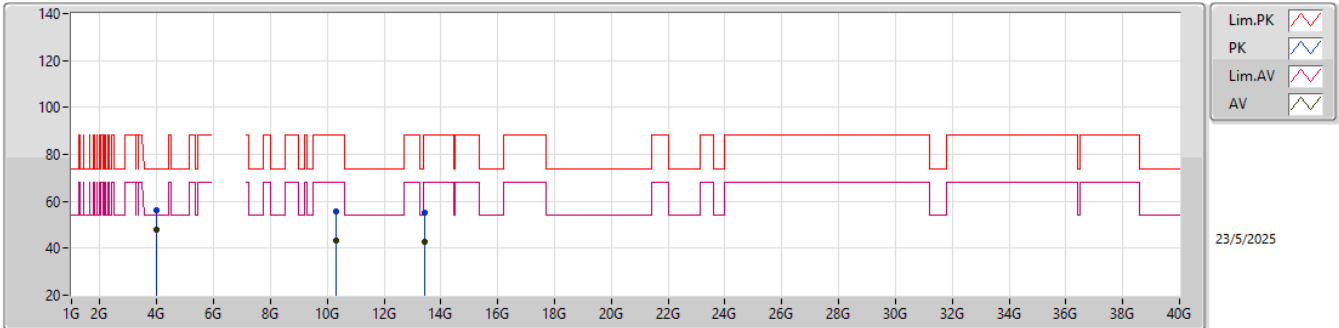

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.11	54.00	-5.89	50.28	3	Horizontal	198	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.25	74.00	-17.75	58.42	3	Horizontal	198	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.26	68.20	-24.94	35.77	3	Horizontal	154	1.00	-	39.55	9.99	42.05			
PK	10.312G	55.92	88.20	-32.28	48.43	3	Horizontal	154	1.00	-	39.55	9.99	42.05			
AV	13.41G	42.80	68.20	-25.40	36.62	3	Horizontal	259	1.00	-	39.94	10.61	44.37			
PK	13.41G	54.96	88.20	-33.24	48.78	3	Horizontal	259	1.00	-	39.94	10.61	44.37			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6705MHz_TX

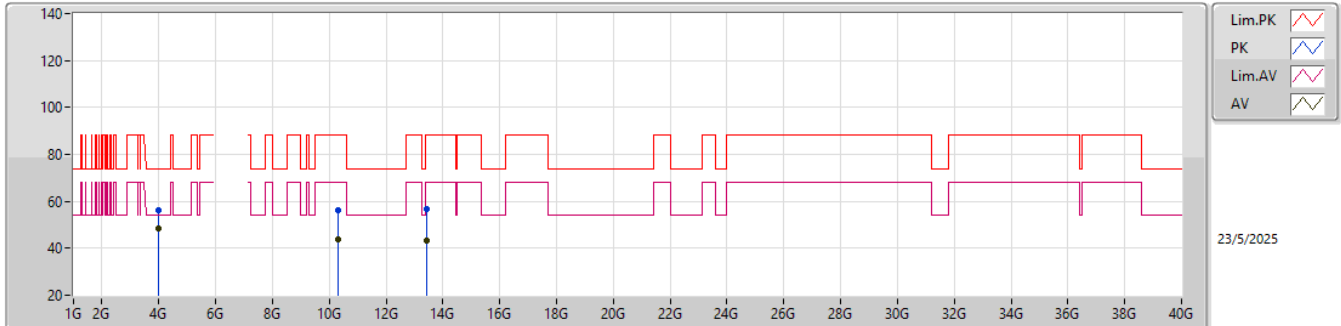

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.45	54.00	-5.55	50.62	3	Vertical	213	1.15	-	29.80	6.02	37.99			
PK	3.999G	56.31	74.00	-17.69	58.48	3	Vertical	213	1.15	-	29.80	6.02	37.99			
AV	10.312G	43.58	68.20	-24.62	36.09	3	Vertical	153	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.45	88.20	-31.75	48.96	3	Vertical	153	1.00	-	39.55	9.99	42.05			
AV	13.41G	43.39	68.20	-24.81	37.21	3	Vertical	259	1.34	-	39.94	10.61	44.37			
PK	13.41G	56.58	88.20	-31.62	50.40	3	Vertical	259	1.34	-	39.94	10.61	44.37			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6785MHz_TX

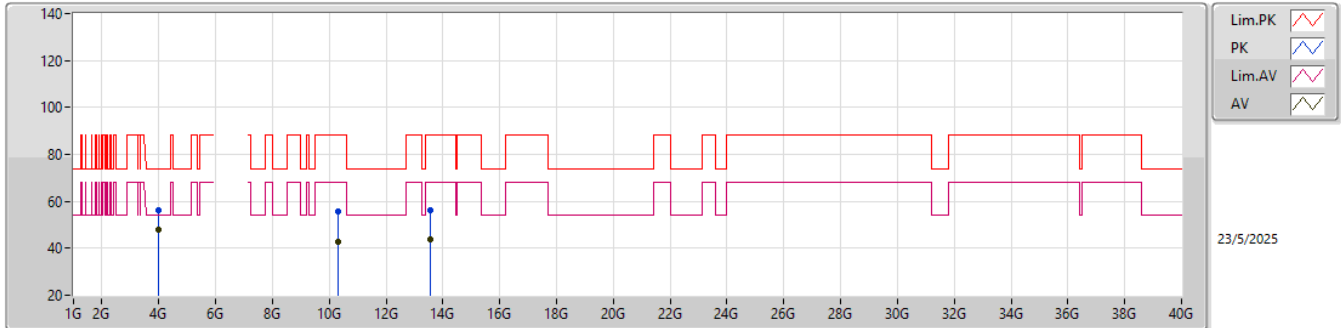

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.05	54.00	-5.95	50.22	3	Horizontal	203	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.17	74.00	-17.83	58.34	3	Horizontal	203	1.00	-	29.80	6.02	37.99			
AV	10.312G	42.91	68.20	-25.29	35.42	3	Horizontal	119	1.00	-	39.55	9.99	42.05			
PK	10.312G	55.89	88.20	-32.31	48.40	3	Horizontal	119	1.00	-	39.55	9.99	42.05			
AV	13.57G	43.54	68.20	-24.66	37.11	3	Horizontal	305	1.00	-	40.36	10.65	44.58			
PK	13.57G	56.22	88.20	-31.98	49.79	3	Horizontal	305	1.00	-	40.36	10.65	44.58			

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX


6785MHz_TX

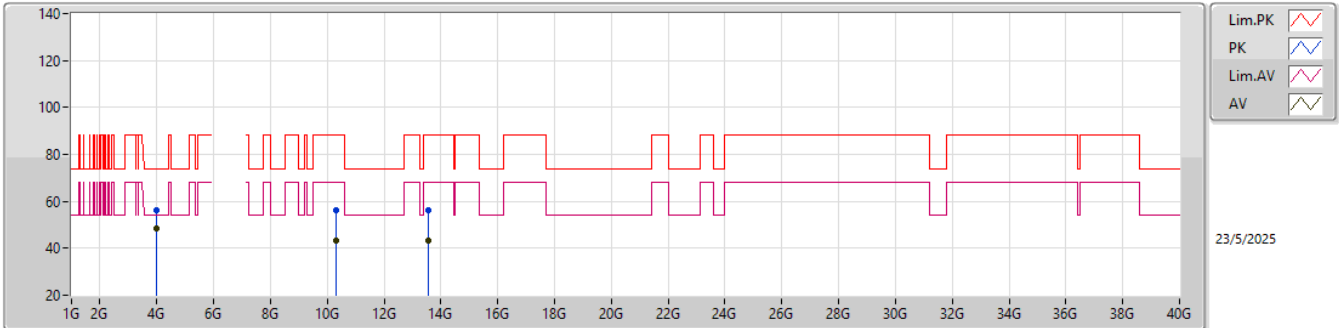

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.26	54.00	-5.74	50.43	3	Vertical	209	1.16	-	29.80	6.02	37.99			
PK	3.999G	56.24	74.00	-17.76	58.41	3	Vertical	209	1.16	-	29.80	6.02	37.99			
AV	10.312G	43.45	68.20	-24.75	35.96	3	Vertical	157	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.29	88.20	-31.91	48.80	3	Vertical	157	1.00	-	39.55	9.99	42.05			
AV	13.57G	43.38	68.20	-24.82	36.95	3	Vertical	170	1.00	-	40.36	10.65	44.58			
PK	13.57G	56.32	88.20	-31.88	49.89	3	Vertical	170	1.00	-	40.36	10.65	44.58			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX


6025MHz_TX

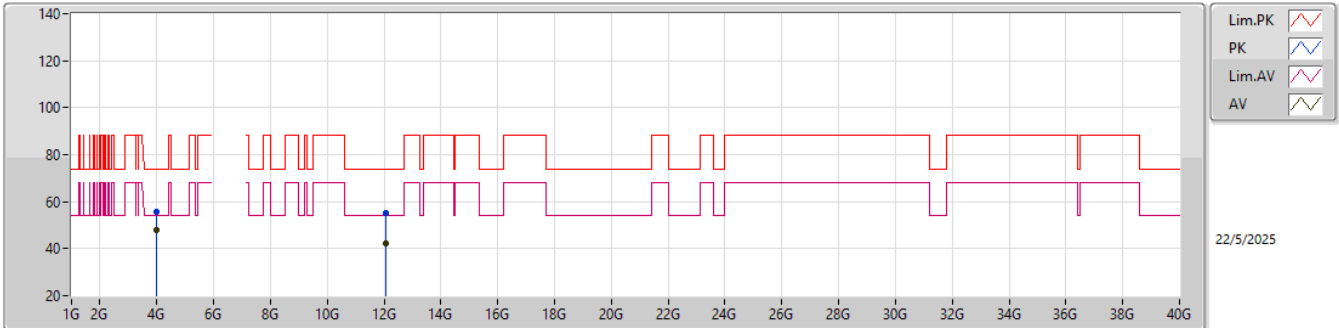

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	3.999G	47.85	54.00	-6.15	50.02	3	Horizontal	216	1.00	-	29.80	6.02	37.99				
PK	3.999G	55.62	74.00	-18.38	57.79	3	Horizontal	216	1.00	-	29.80	6.02	37.99				
AV	12.05G	42.37	54.00	-11.63	35.48	3	Horizontal	350	1.00	-	39.50	10.24	42.85				
PK	12.05G	55.23	74.00	-18.77	48.34	3	Horizontal	350	1.00	-	39.50	10.24	42.85				

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX


6025MHz_TX

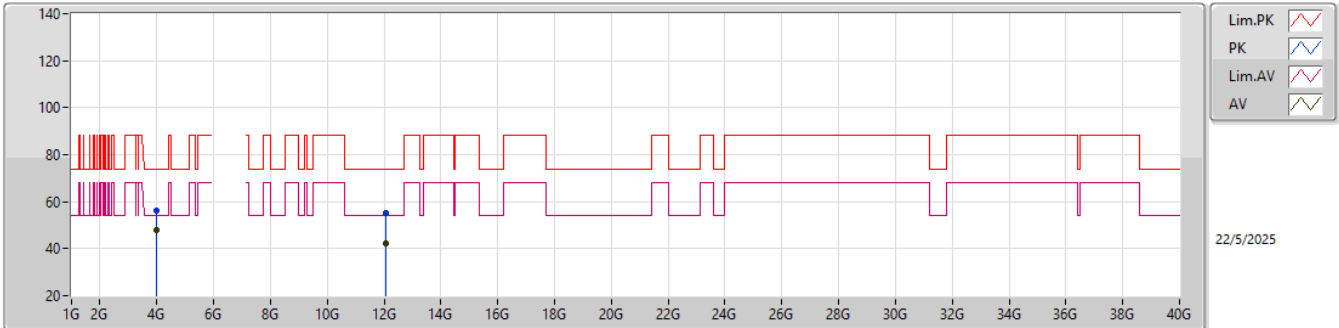

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.14	54.00	-5.86	50.31	3	Vertical	219	1.16	-	29.80	6.02	37.99			
PK	3.999G	56.05	74.00	-17.95	58.22	3	Vertical	219	1.16	-	29.80	6.02	37.99			
AV	12.05G	42.21	54.00	-11.79	35.32	3	Vertical	96	1.00	-	39.50	10.24	42.85			
PK	12.05G	55.10	74.00	-18.90	48.21	3	Vertical	96	1.00	-	39.50	10.24	42.85			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX


6185MHz_TX

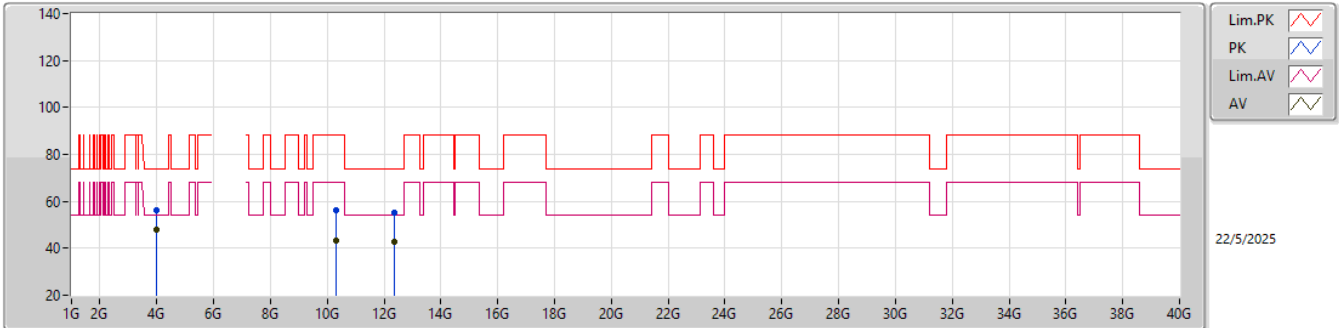

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.16	54.00	-5.84	50.33	3	Horizontal	195	1.00	-	29.80	6.02	37.99			
PK	3.999G	56.12	74.00	-17.88	58.29	3	Horizontal	195	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.05	68.20	-25.15	35.56	3	Horizontal	129	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.28	88.20	-31.92	48.79	3	Horizontal	129	1.00	-	39.55	9.99	42.05			
AV	12.37G	43.00	54.00	-11.00	35.96	3	Horizontal	115	1.00	-	39.22	10.31	42.49			
PK	12.37G	55.28	74.00	-18.72	48.24	3	Horizontal	115	1.00	-	39.22	10.31	42.49			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX


6185MHz_TX

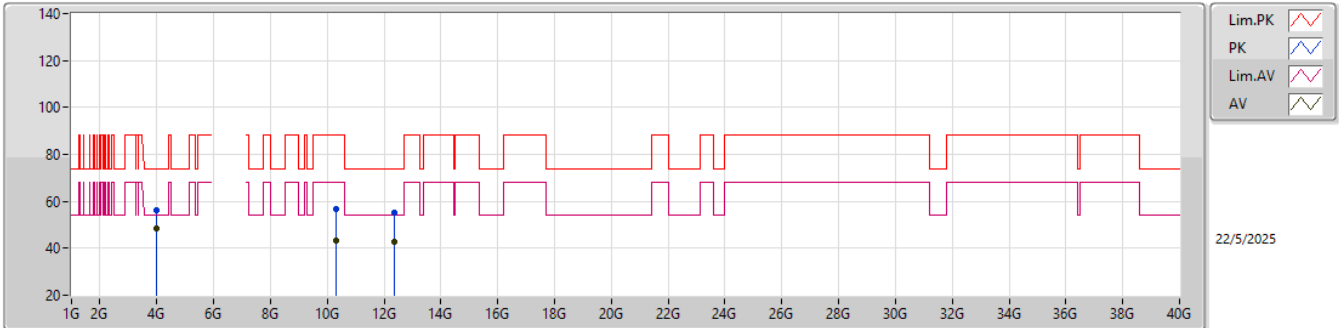

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.29	54.00	-5.71	50.46	3	Vertical	215	1.16	-	29.80	6.02	37.99			
PK	3.999G	56.08	74.00	-17.92	58.25	3	Vertical	215	1.16	-	29.80	6.02	37.99			
AV	10.312G	43.26	68.20	-24.94	35.77	3	Vertical	158	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.49	88.20	-31.71	49.00	3	Vertical	158	1.00	-	39.55	9.99	42.05			
AV	12.37G	42.90	54.00	-11.10	35.86	3	Vertical	20	1.00	-	39.22	10.31	42.49			
PK	12.37G	55.21	74.00	-18.79	48.17	3	Vertical	20	1.00	-	39.22	10.31	42.49			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX


6345MHz_TX

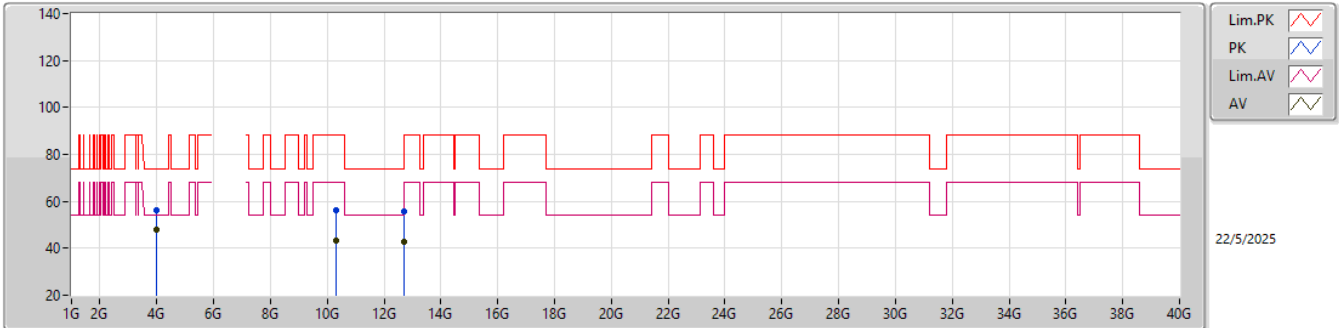

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	47.84	54.00	-6.16	50.01	3	Horizontal	209	1.00	-	29.80	6.02	37.99			
PK	3.999G	55.96	74.00	-18.04	58.13	3	Horizontal	209	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.36	68.20	-24.84	35.87	3	Horizontal	128	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.15	88.20	-32.05	48.66	3	Horizontal	128	1.00	-	39.55	9.99	42.05			
AV	12.69G	42.78	54.00	-11.22	35.94	3	Horizontal	69	1.00	-	39.32	10.40	42.88			
PK	12.69G	55.53	74.00	-18.47	48.69	3	Horizontal	69	1.00	-	39.32	10.40	42.88			

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX


6345MHz_TX

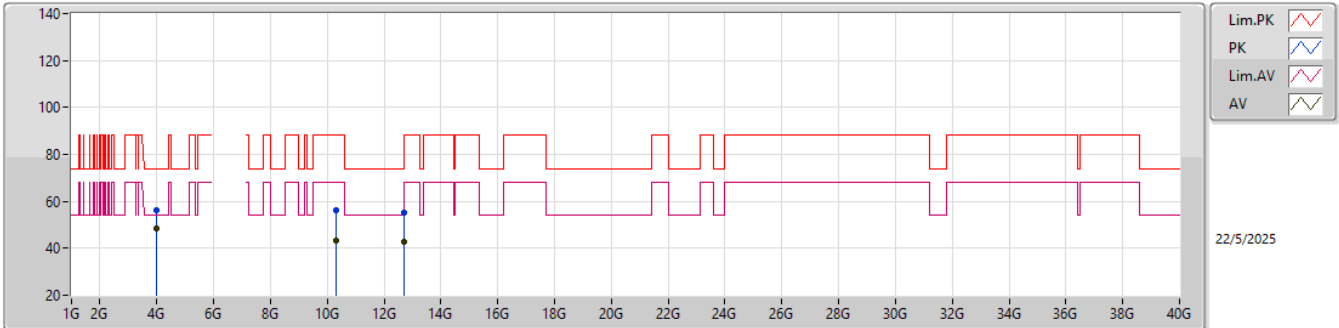

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.27	54.00	-5.73	50.44	3	Vertical	219	1.14	-	29.80	6.02	37.99			
PK	3.999G	56.29	74.00	-17.71	58.46	3	Vertical	219	1.14	-	29.80	6.02	37.99			
AV	10.312G	43.24	68.20	-24.96	35.75	3	Vertical	161	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.29	88.20	-31.91	48.80	3	Vertical	161	1.00	-	39.55	9.99	42.05			
AV	12.69G	42.89	54.00	-11.11	36.05	3	Vertical	146	1.00	-	39.32	10.40	42.88			
PK	12.69G	54.99	74.00	-19.01	48.15	3	Vertical	146	1.00	-	39.32	10.40	42.88			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX


6665MHz_TX

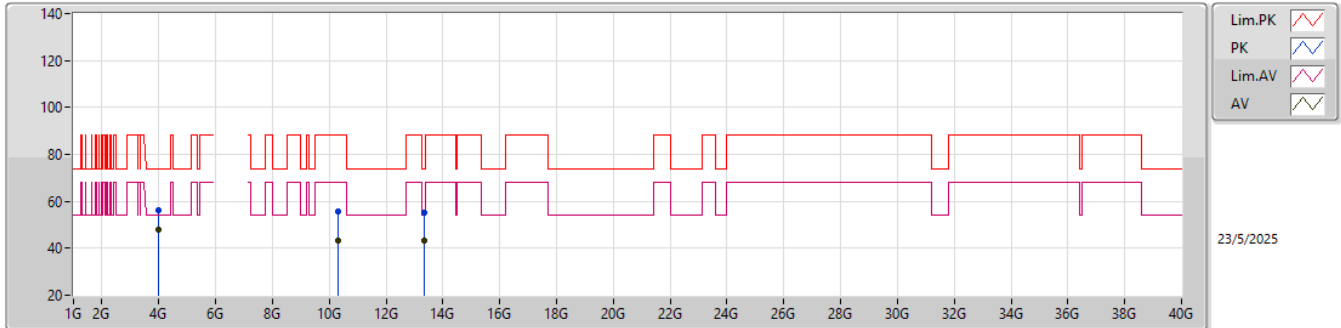

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.16	54.00	-5.84	50.33	3	Horizontal	204	1.00	-	29.80	6.02	37.99			
PK	3.999G	55.98	74.00	-18.02	58.15	3	Horizontal	204	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.36	68.20	-24.84	35.87	3	Horizontal	115	1.00	-	39.55	9.99	42.05			
PK	10.312G	55.93	88.20	-32.27	48.44	3	Horizontal	115	1.00	-	39.55	9.99	42.05			
AV	13.33G	43.32	54.00	-10.68	37.26	3	Horizontal	166	1.00	-	39.72	10.59	44.25			
PK	13.33G	55.38	74.00	-18.62	49.32	3	Horizontal	166	1.00	-	39.72	10.59	44.25			

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX


6665MHz_TX

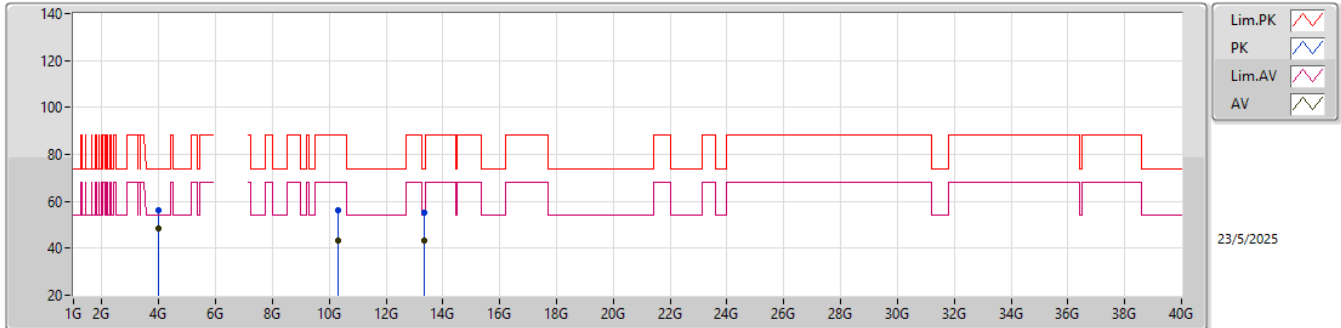

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.42	54.00	-5.58	50.59	3	Vertical	212	1.14	-	29.80	6.02	37.99			
PK	3.999G	56.31	74.00	-17.69	58.48	3	Vertical	212	1.14	-	29.80	6.02	37.99			
AV	10.312G	43.35	68.20	-24.85	35.86	3	Vertical	146	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.28	88.20	-31.92	48.79	3	Vertical	146	1.00	-	39.55	9.99	42.05			
AV	13.33G	43.16	54.00	-10.84	37.10	3	Vertical	269	1.00	-	39.72	10.59	44.25			
PK	13.33G	55.26	74.00	-18.74	49.20	3	Vertical	269	1.00	-	39.72	10.59	44.25			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX


6105MHz_TX

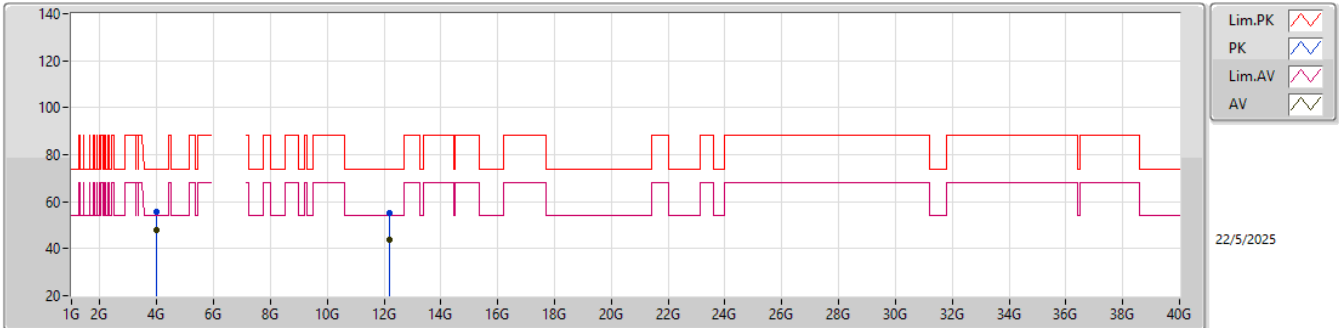

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	47.74	54.00	-6.26	49.91	3	Horizontal	203	1.00	-	29.80	6.02	37.99			
PK	3.999G	55.46	74.00	-18.54	57.63	3	Horizontal	203	1.00	-	29.80	6.02	37.99			
AV	12.21G	43.55	54.00	-10.45	36.46	3	Horizontal	118	1.00	-	39.48	10.28	42.67			
PK	12.21G	54.95	74.00	-19.05	47.86	3	Horizontal	118	1.00	-	39.48	10.28	42.67			

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX


6105MHz_TX

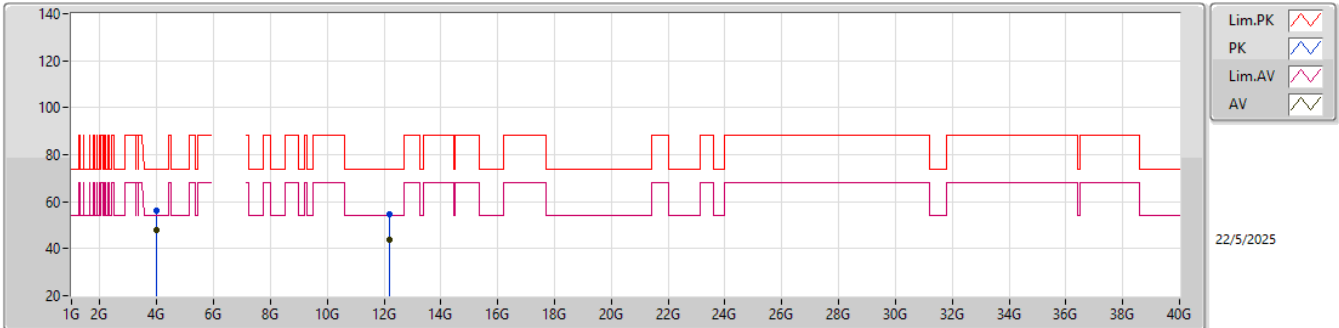

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	3.999G	48.02	54.00	-5.98	50.19	3	Vertical	224	1.16	-	29.80	6.02	37.99				
PK	3.999G	56.41	74.00	-17.59	58.58	3	Vertical	224	1.16	-	29.80	6.02	37.99				
AV	12.21G	44.01	54.00	-9.99	36.92	3	Vertical	311	1.00	-	39.48	10.28	42.67				
PK	12.21G	54.85	74.00	-19.15	47.76	3	Vertical	311	1.00	-	39.48	10.28	42.67				

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX


6265MHz_TX

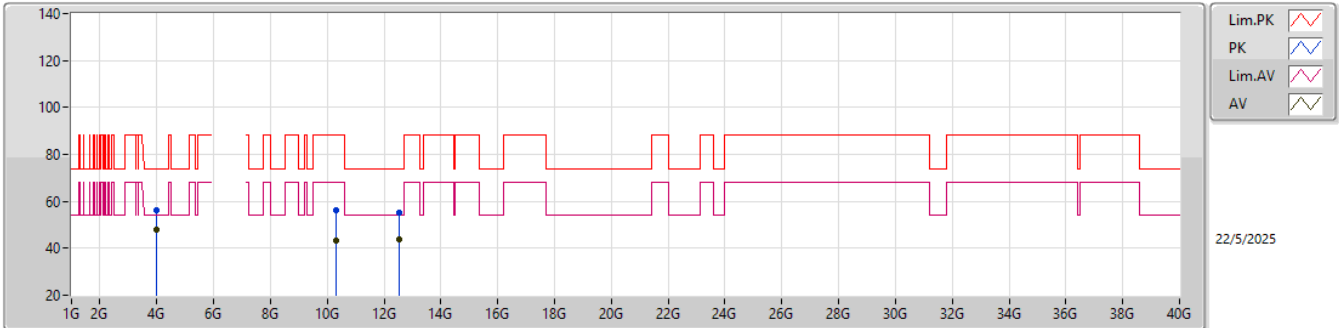

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	47.92	54.00	-6.08	50.09	3	Horizontal	205	1.00	-	29.80	6.02	37.99			
PK	3.999G	55.96	74.00	-18.04	58.13	3	Horizontal	205	1.00	-	29.80	6.02	37.99			
AV	10.312G	43.08	68.20	-25.12	35.59	3	Horizontal	119	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.21	88.20	-31.99	48.72	3	Horizontal	119	1.00	-	39.55	9.99	42.05			
AV	12.53G	43.69	54.00	-10.31	36.73	3	Horizontal	215	1.00	-	39.04	10.35	42.43			
PK	12.53G	54.94	74.00	-19.06	47.98	3	Horizontal	215	1.00	-	39.04	10.35	42.43			


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

6265MHz_TX

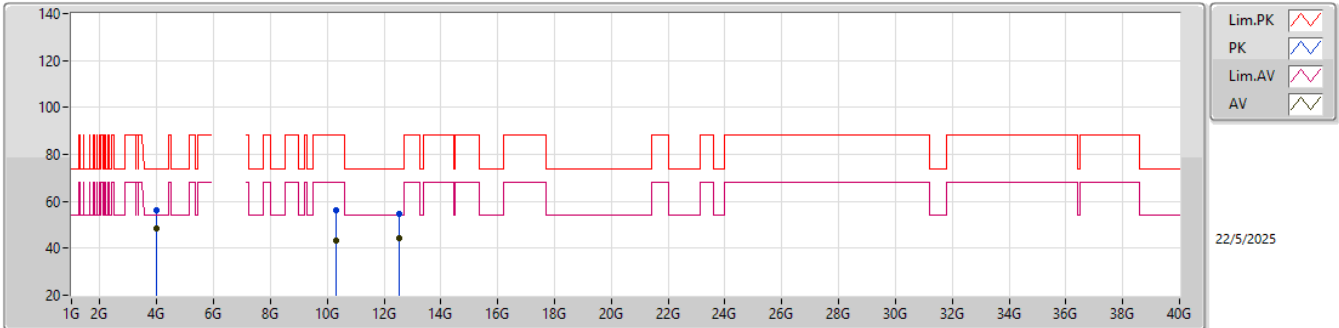



Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	3.999G	48.46	54.00	-5.54	50.63	3	Vertical	219	1.14	-	29.80	6.02	37.99			
PK	3.999G	56.42	74.00	-17.58	58.59	3	Vertical	219	1.14	-	29.80	6.02	37.99			
AV	10.312G	43.15	68.20	-25.05	35.66	3	Vertical	158	1.00	-	39.55	9.99	42.05			
PK	10.312G	56.24	88.20	-31.96	48.75	3	Vertical	158	1.00	-	39.55	9.99	42.05			
AV	12.53G	44.31	54.00	-9.69	37.35	3	Vertical	154	1.00	-	39.04	10.35	42.43			
PK	12.53G	54.85	74.00	-19.15	47.89	3	Vertical	154	1.00	-	39.04	10.35	42.43			

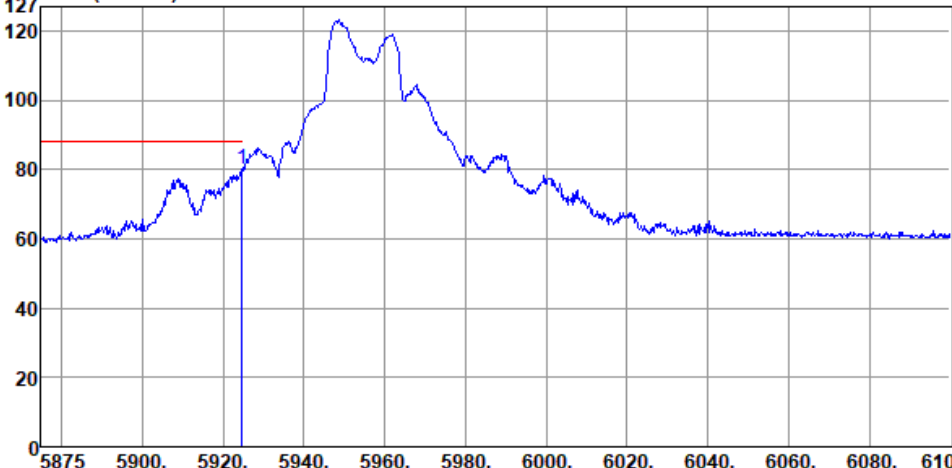

Modulation	11a	Test Freq. (MHz)	5955						
Polarization	Horizontal-Peak Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5924.73	80.02	88.20	-8.18	78.85	1.17	Peak	194	20

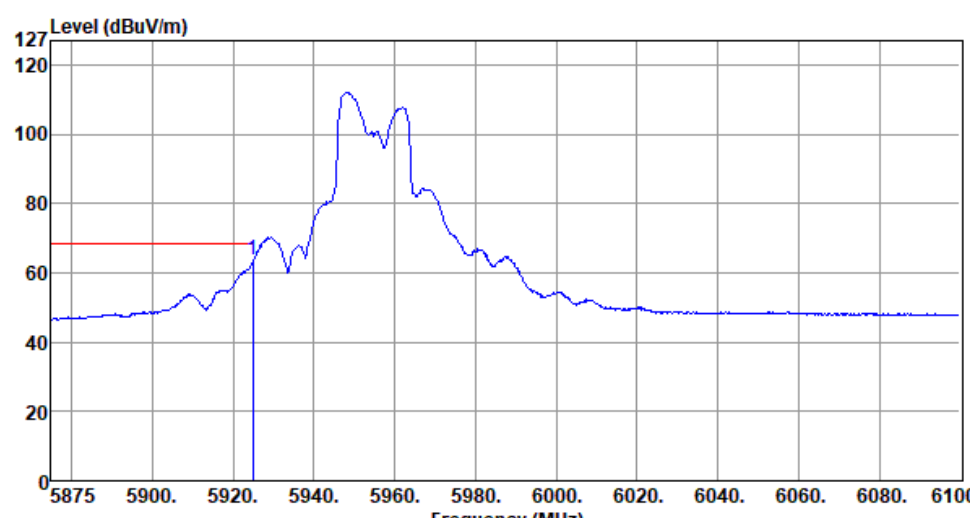



Modulation	11a	Test Freq. (MHz)	5955						
Polarization	Horizontal-Average Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5924.95	63.65	68.20	-4.55	62.48	1.17	Average	194	20

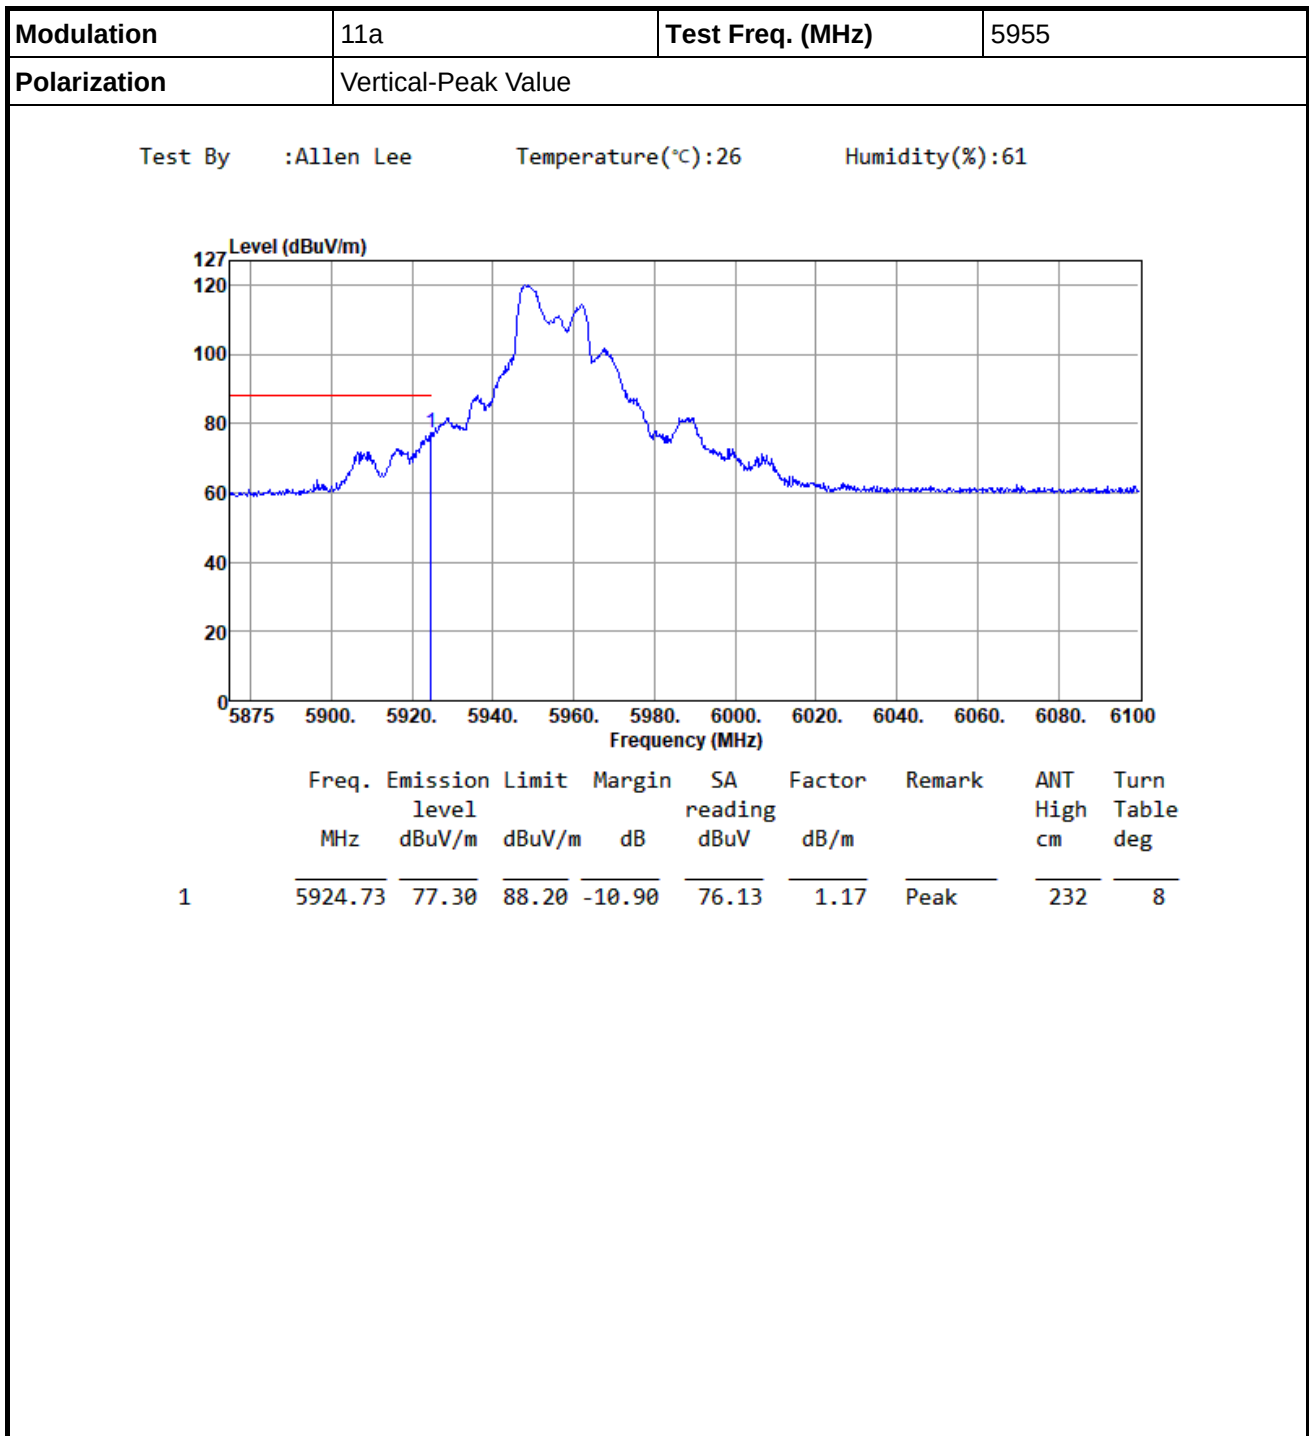





Modulation	11a	Test Freq. (MHz)	5955
Polarization	Vertical -Average Value		
Test By :Allen Lee Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			

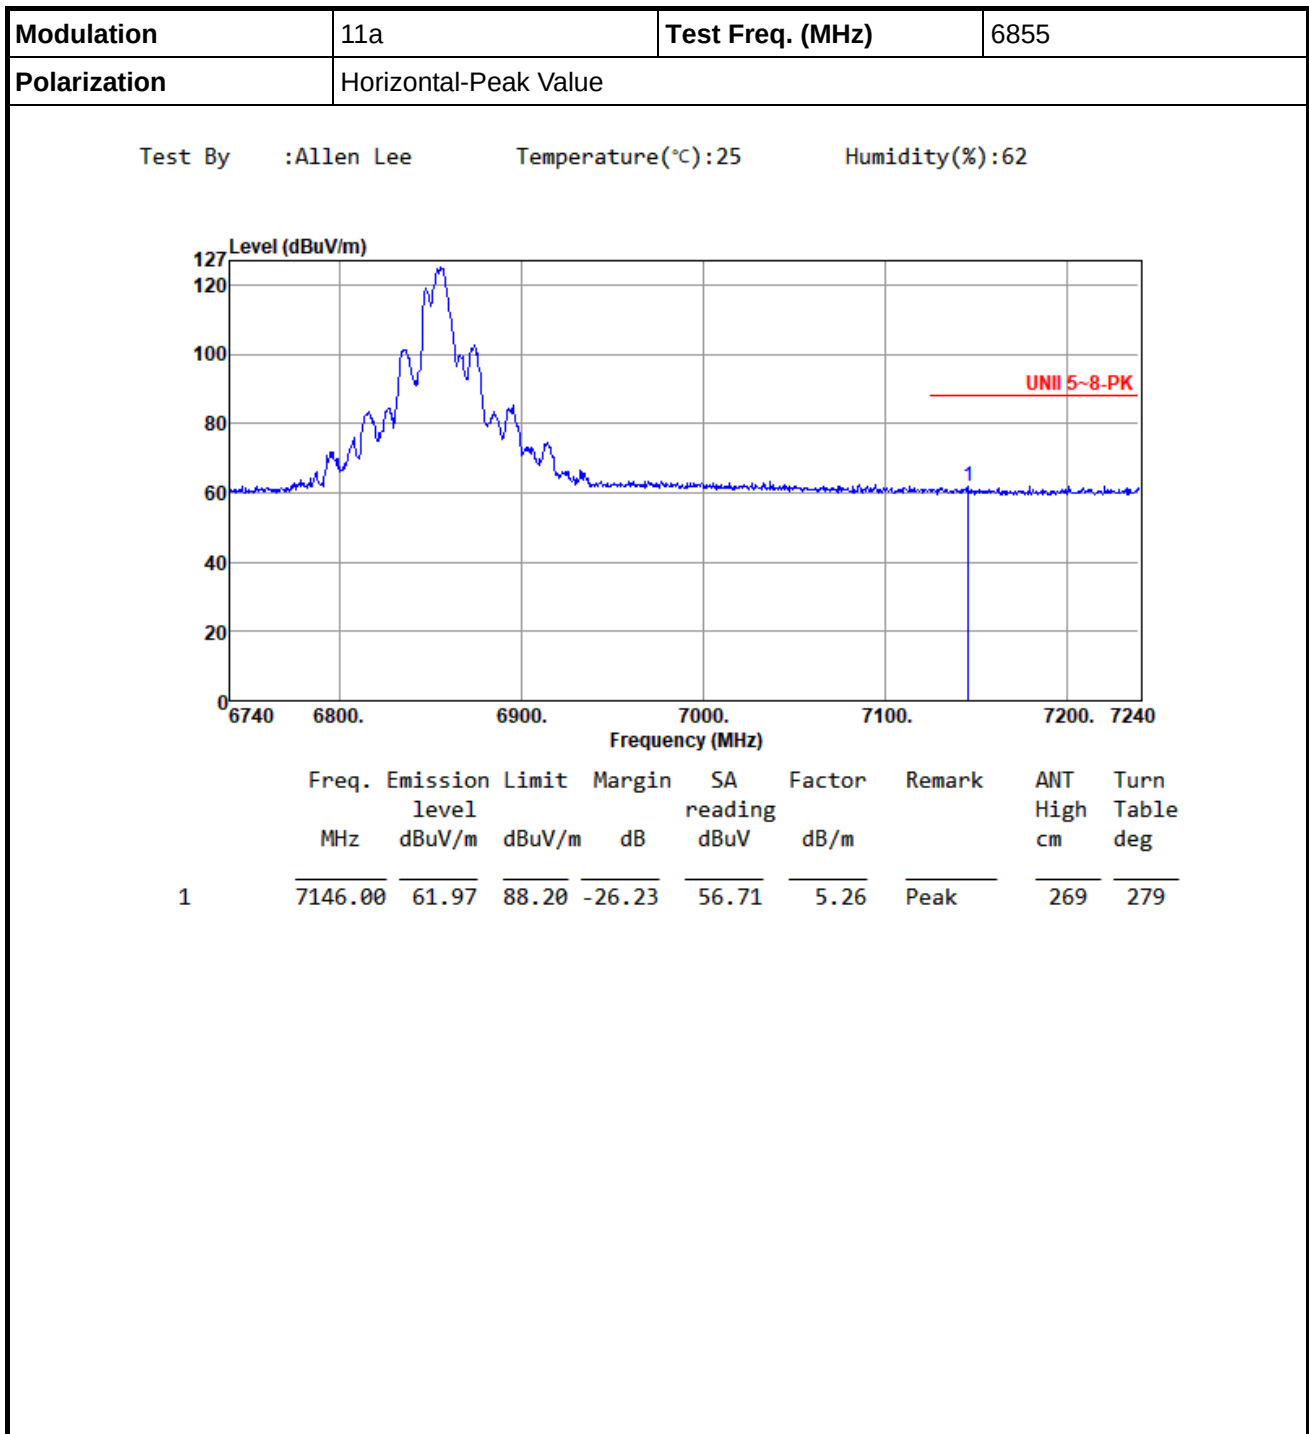


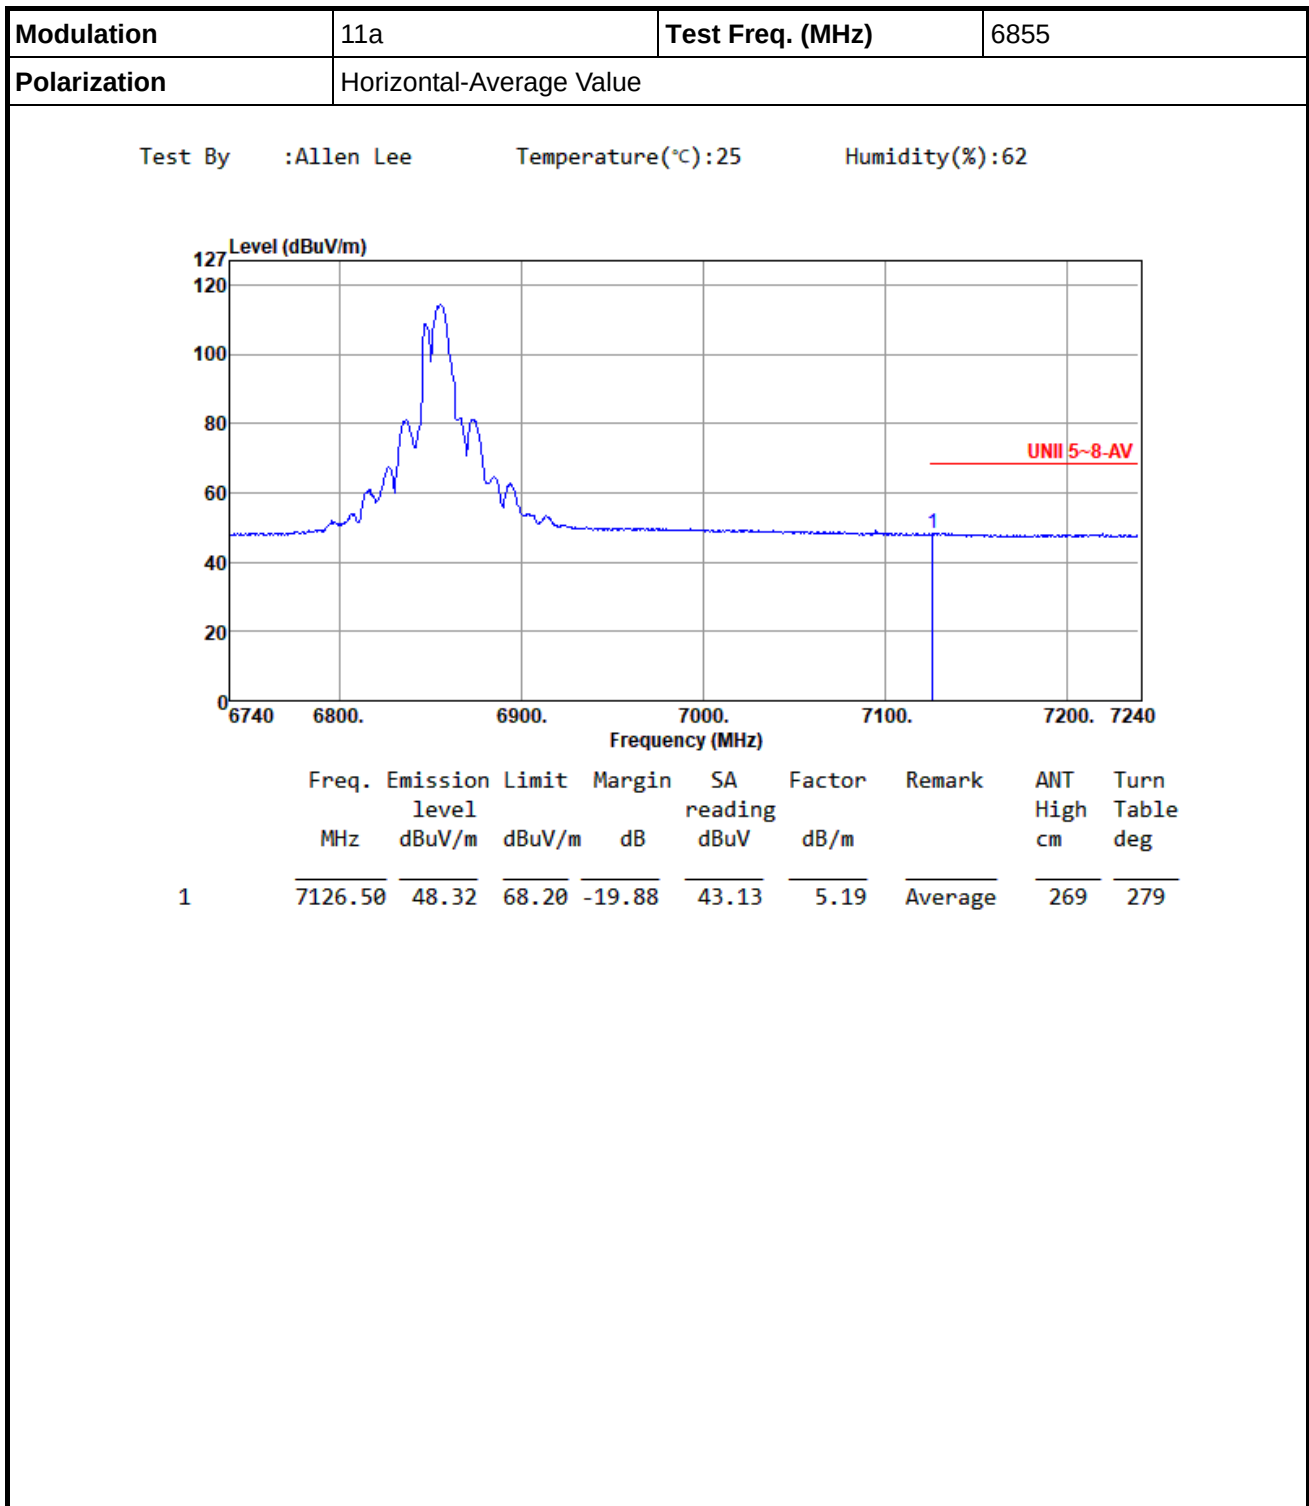

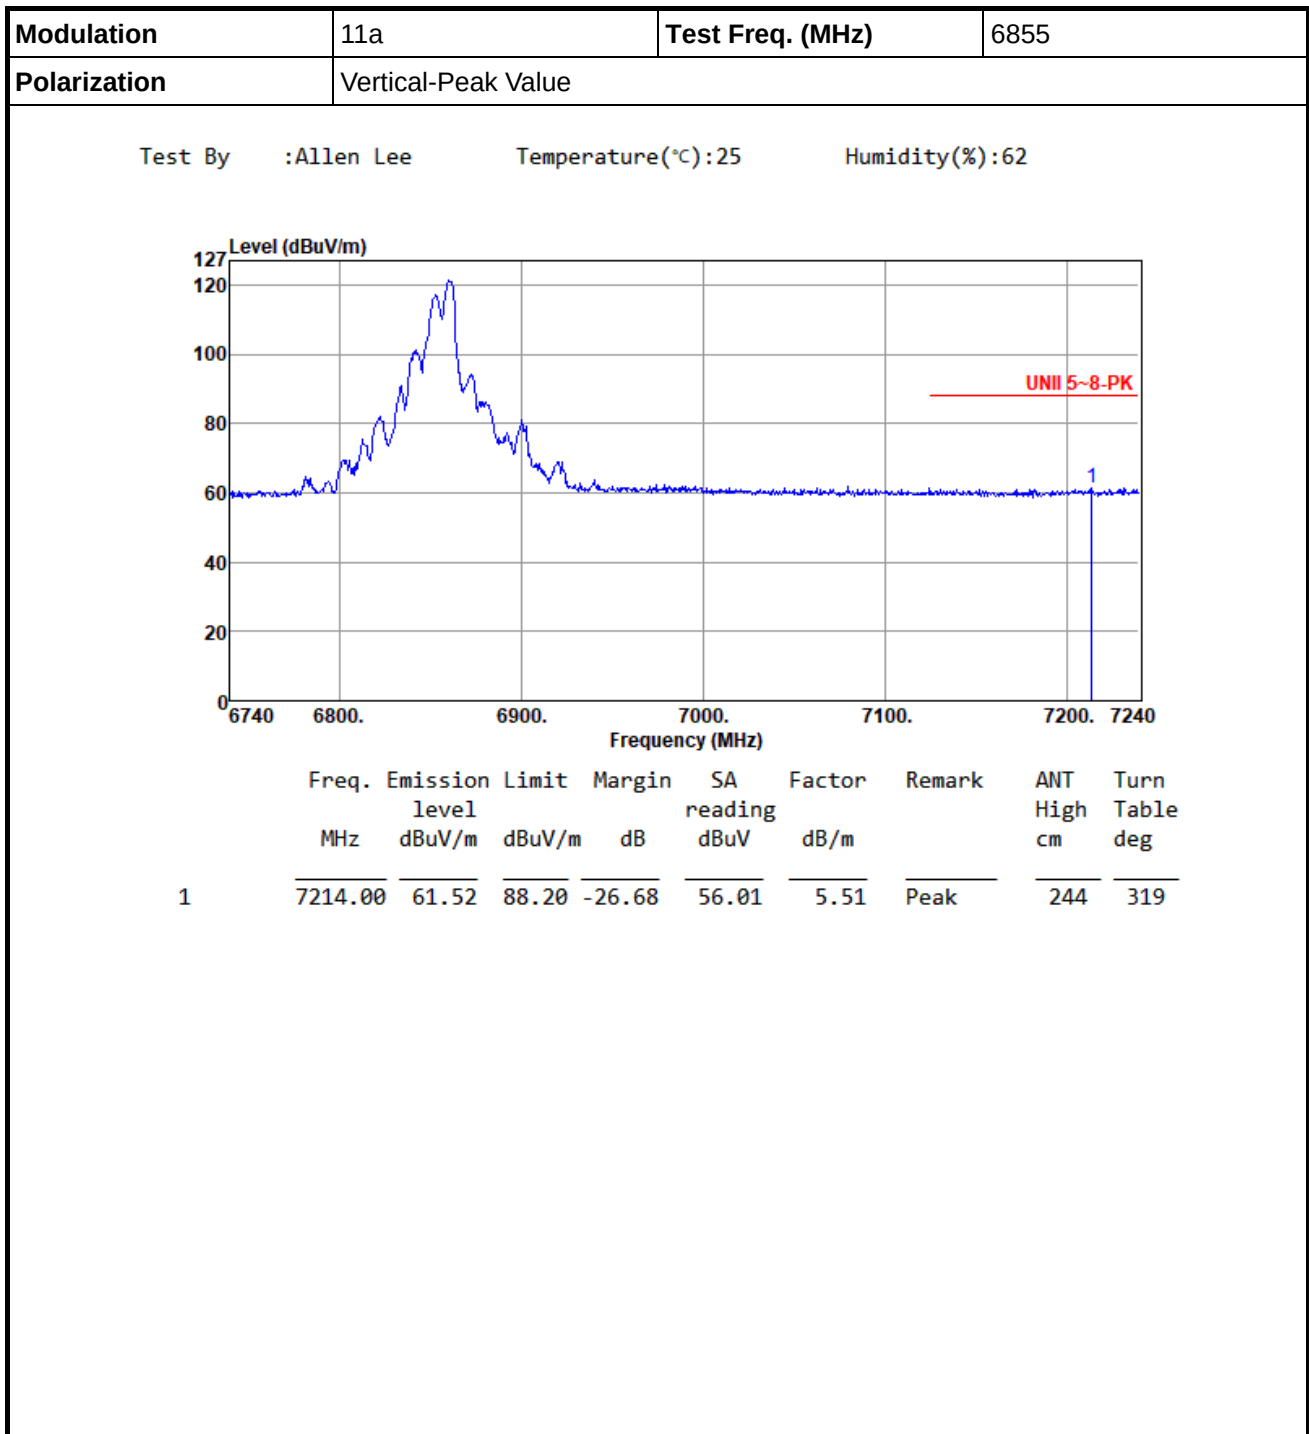


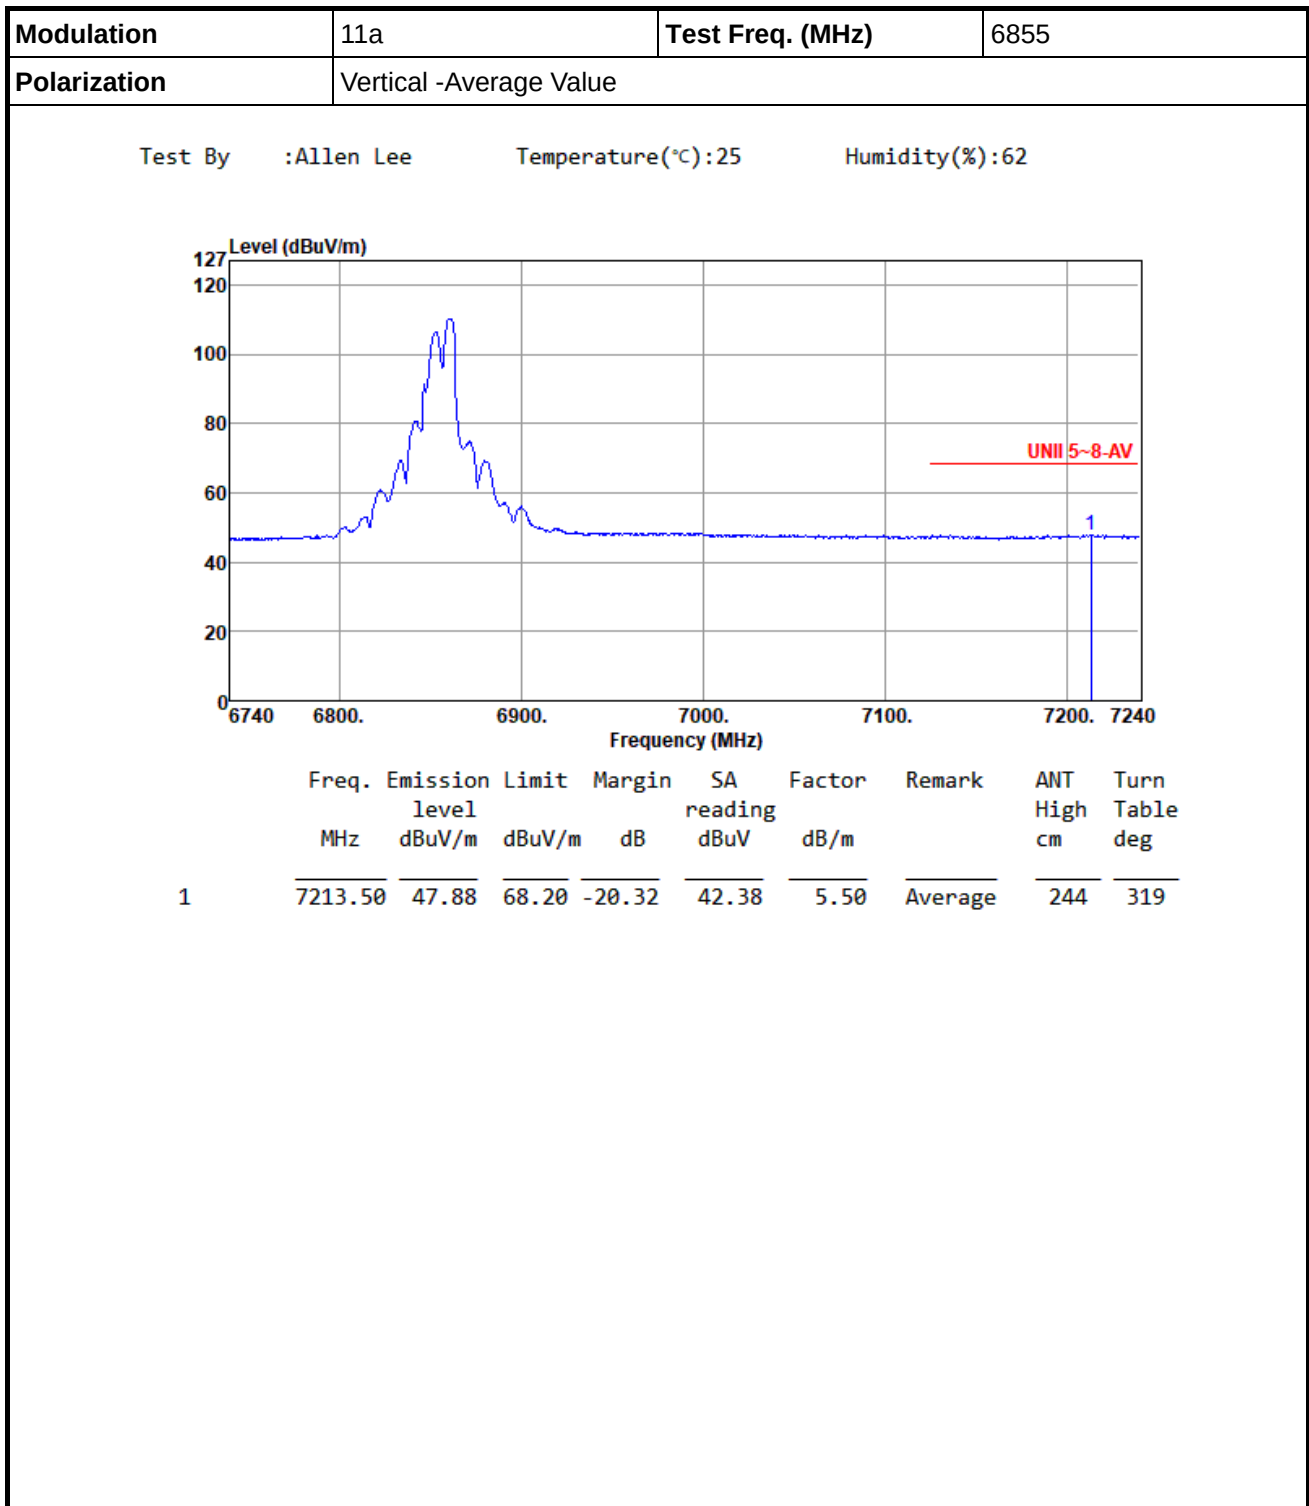

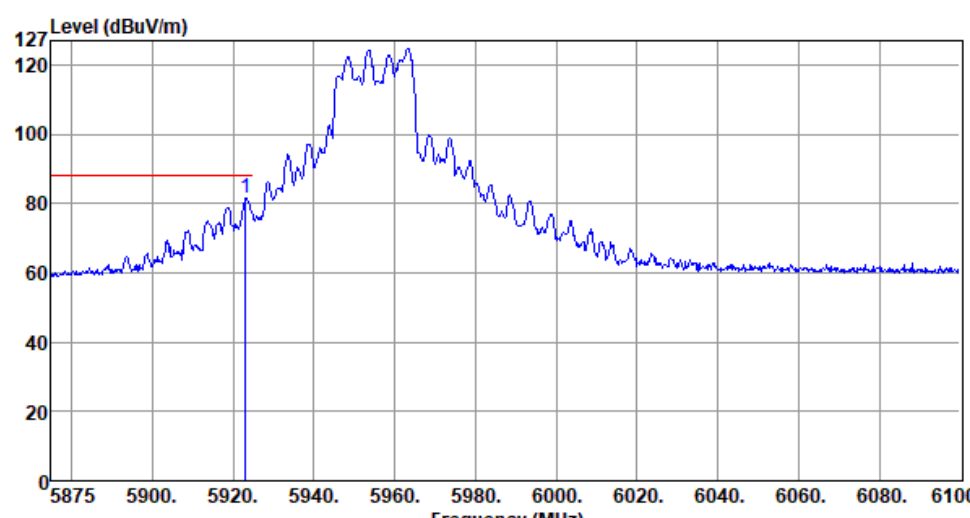



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																				
Polarization	Horizontal-Peak Value																						
Test By :Allen Lee Temperature(°C):26 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5923.15</td><td>81.56</td><td>88.20</td><td>-6.64</td><td>80.39</td><td>1.17</td><td>Peak</td><td>227</td><td>39</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5923.15	81.56	88.20	-6.64	80.39	1.17	Peak	227	39
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5923.15	81.56	88.20	-6.64	80.39	1.17	Peak	227	39														

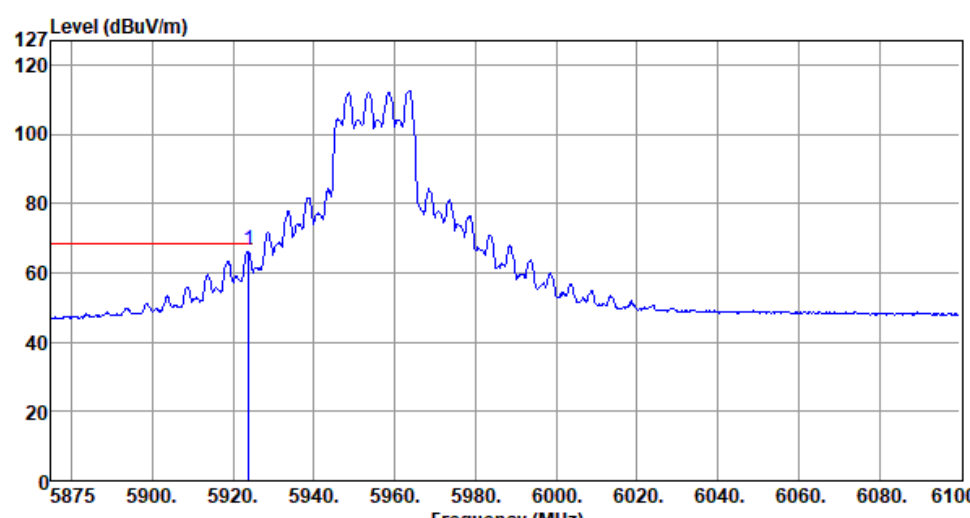


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																				
Polarization	Horizontal-Average Value																						
Test By :Allen Lee Temperature(°C):26 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5923.83</td><td>66.69</td><td>68.20</td><td>-1.51</td><td>65.52</td><td>1.17</td><td>Average</td><td>227</td><td>39</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5923.83	66.69	68.20	-1.51	65.52	1.17	Average	227	39
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5923.83	66.69	68.20	-1.51	65.52	1.17	Average	227	39														

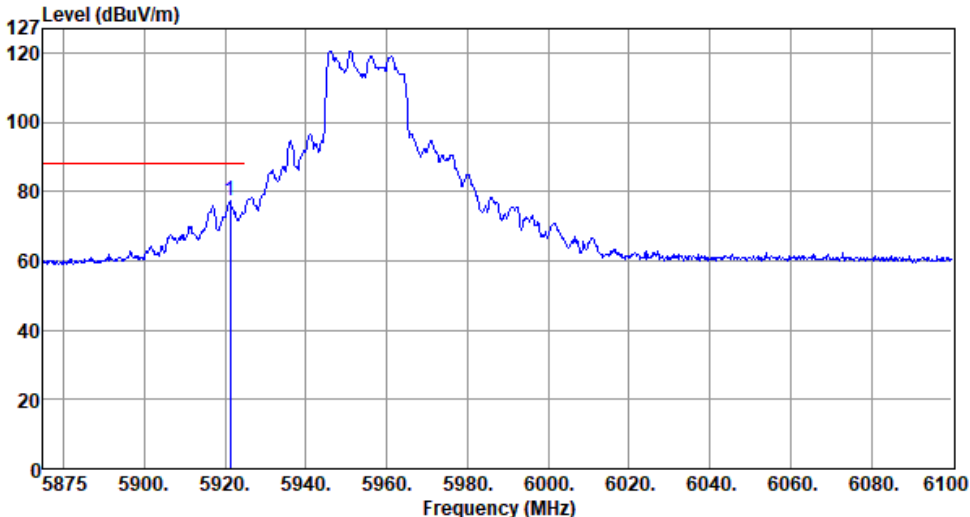

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																																								
Polarization	Vertical-Peak Value																																										
Test By :Allen Lee Temperature(°C):26 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz)																																											
<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5921.35</td><td>77.24</td><td>88.20</td><td>-10.96</td><td>76.07</td><td>1.17</td><td>Peak</td><td>309</td><td>13</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	5921.35	77.24	88.20	-10.96	76.07	1.17	Peak	309	13
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
								cm	deg																																		
1	5921.35	77.24	88.20	-10.96	76.07	1.17	Peak	309	13																																		

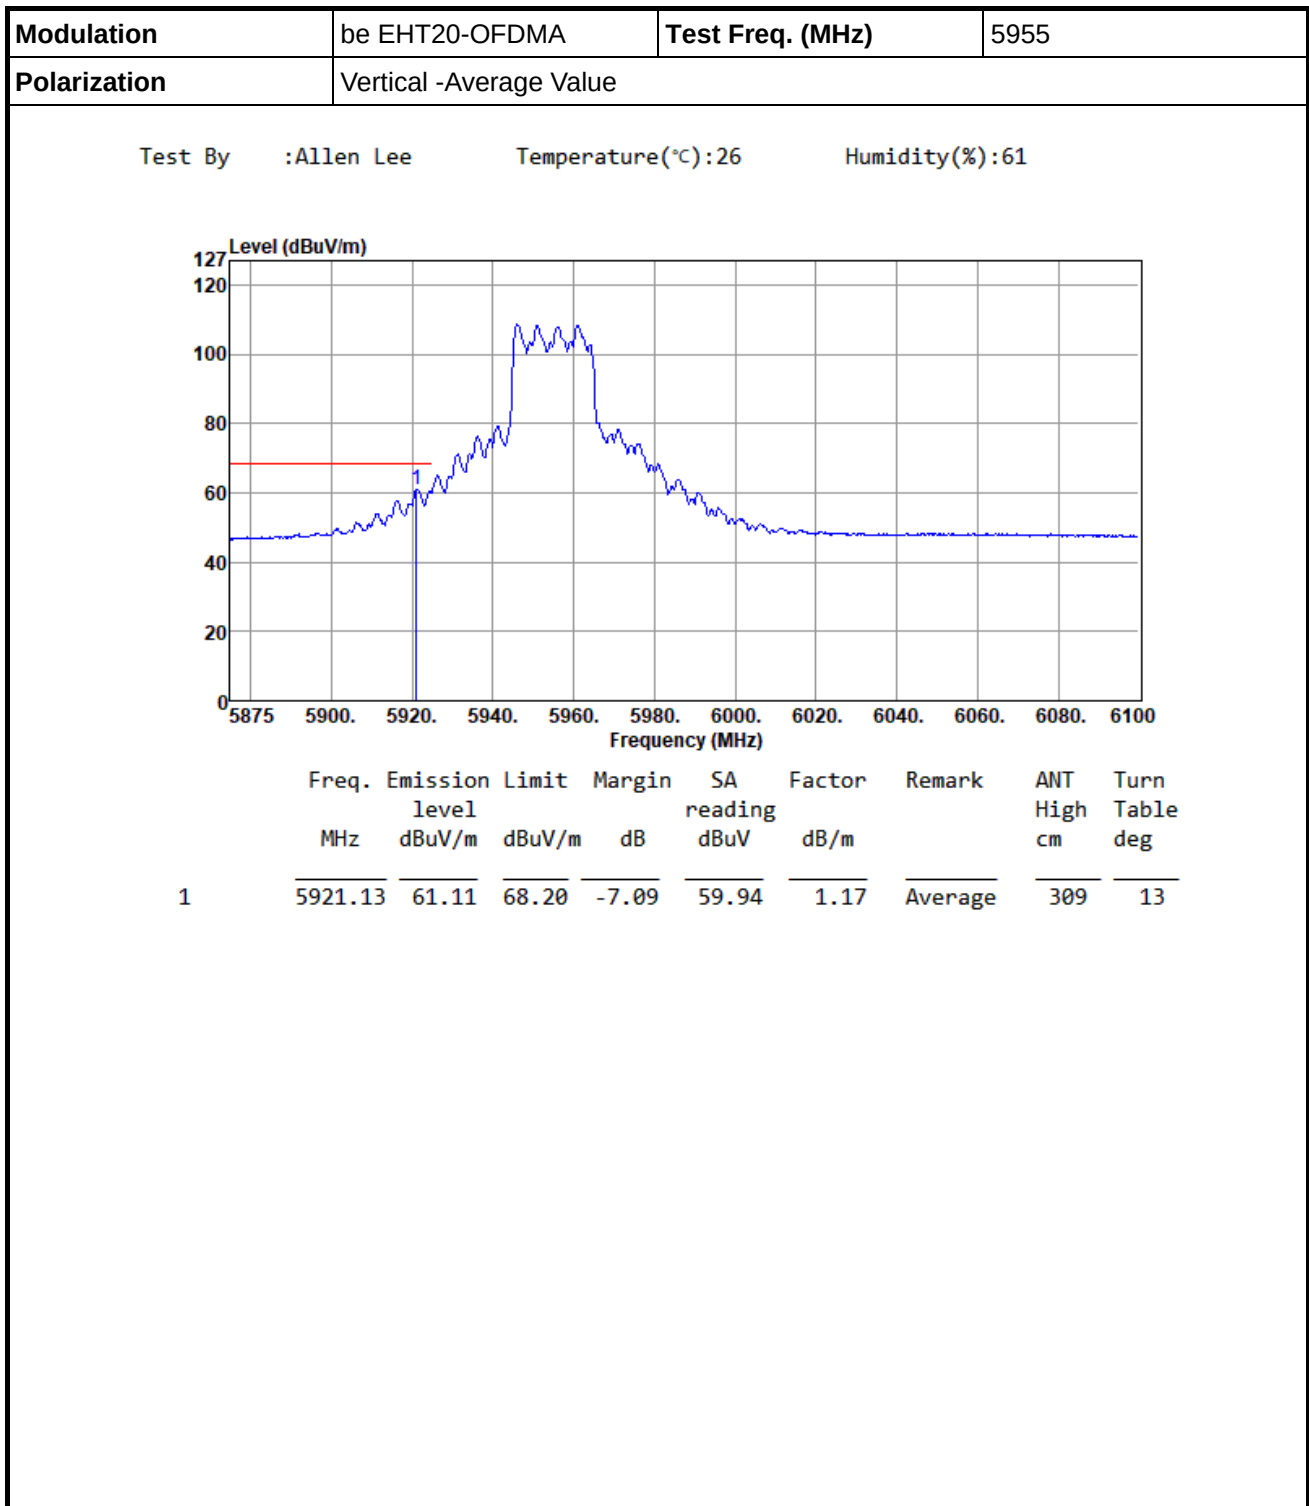

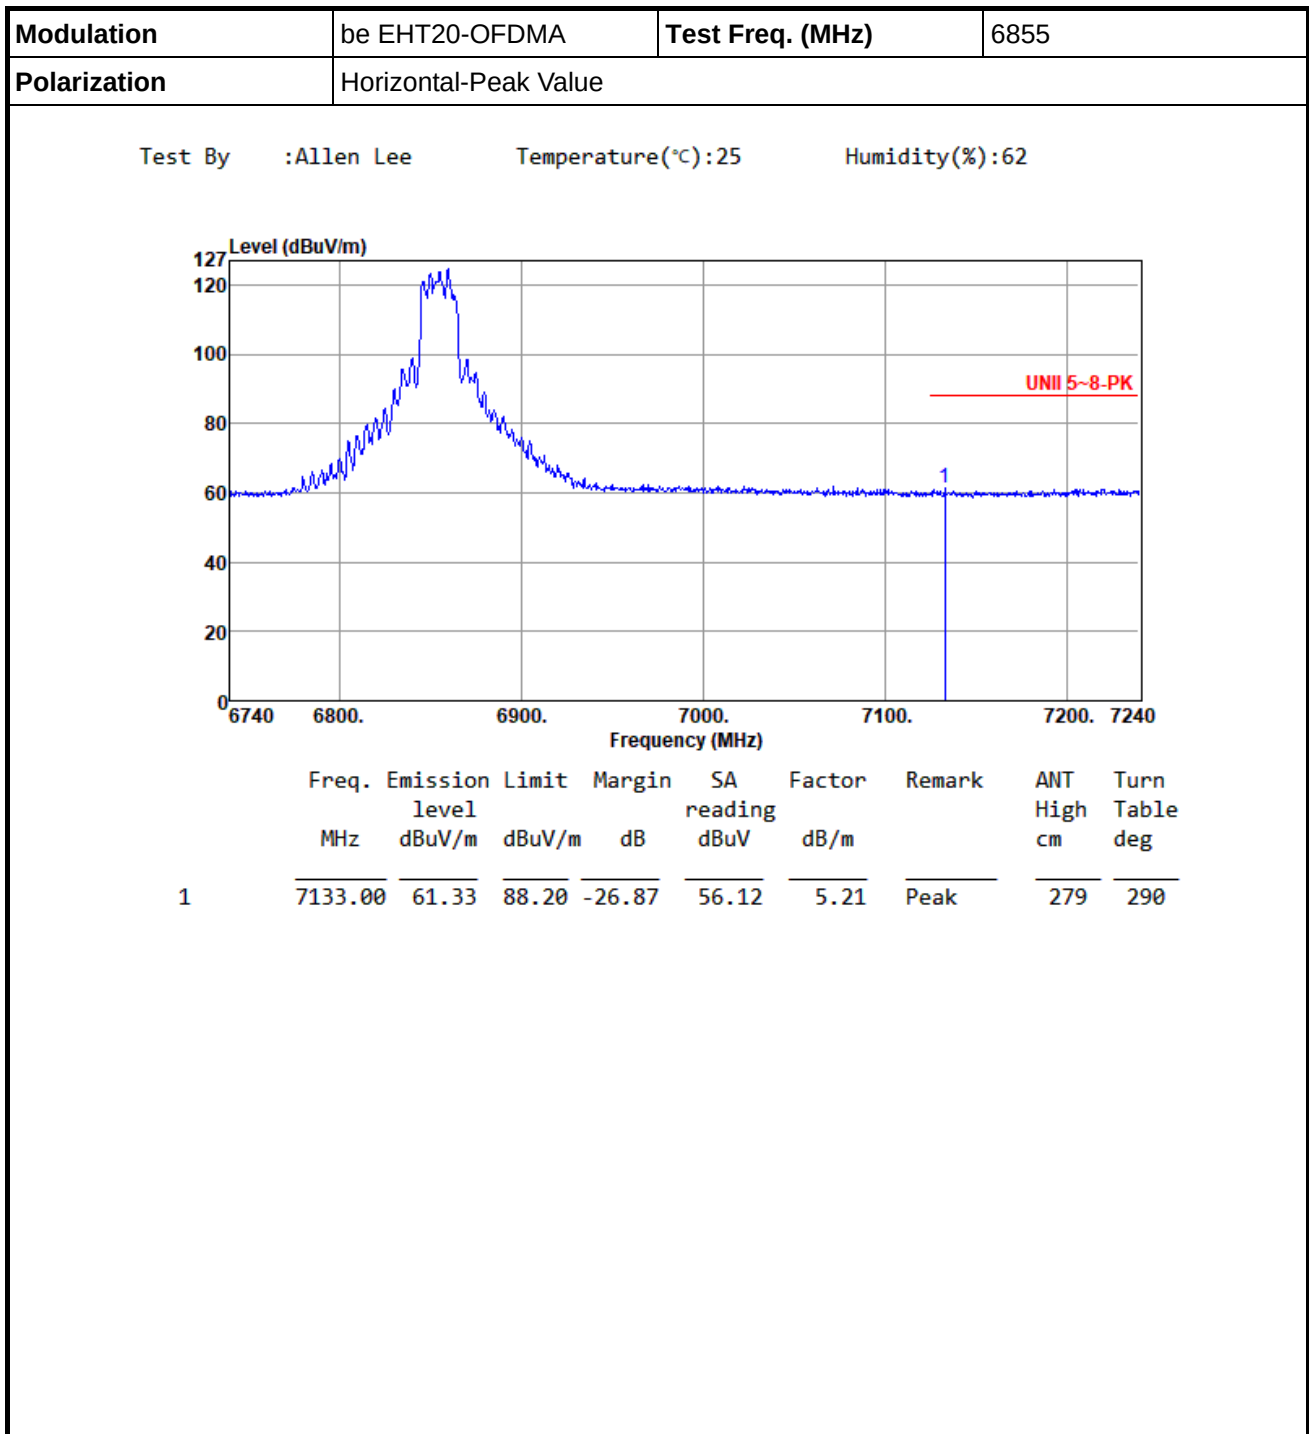



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855
Polarization	Horizontal-Average Value		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855
Polarization	Vertical-Peak Value		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855
Polarization	Vertical -Average Value		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965
Polarization	Horizontal-Peak Value		
Test By :Allen Lee Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965
Polarization	Horizontal-Average Value		
Test By :Allen Lee Temperature(°C):26 Humidity(%):61			
Level (dBUV/m)			

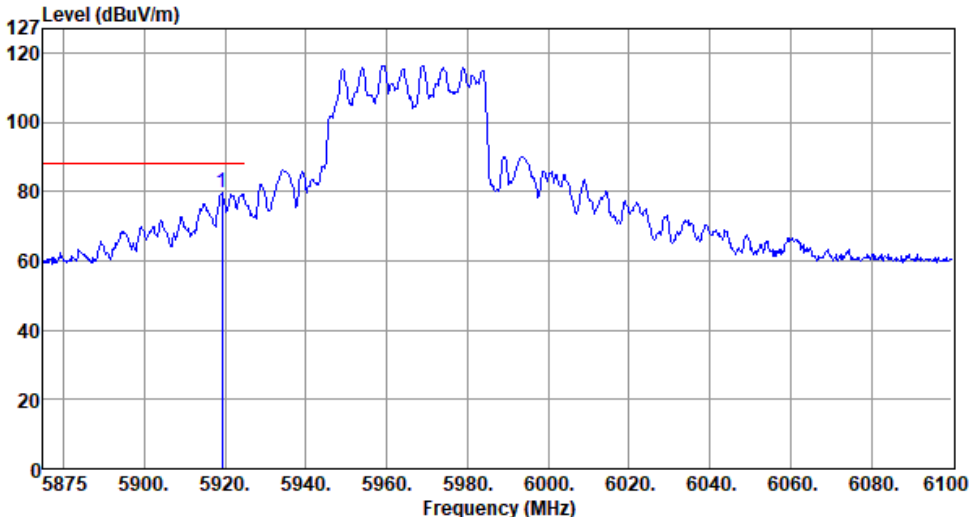



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965																																				
Polarization	Vertical-Peak Value																																						
Test By :Allen Lee Temperature(°C):26 Humidity(%):61																																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5919.33</td><td>79.69</td><td>88.20</td><td>-8.51</td><td>78.52</td><td>1.17</td><td>Peak</td><td>327</td><td>7</td></tr></table>											Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5919.33	79.69	88.20	-8.51	78.52	1.17	Peak	327	7
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																														
1	5919.33	79.69	88.20	-8.51	78.52	1.17	Peak	327	7																														

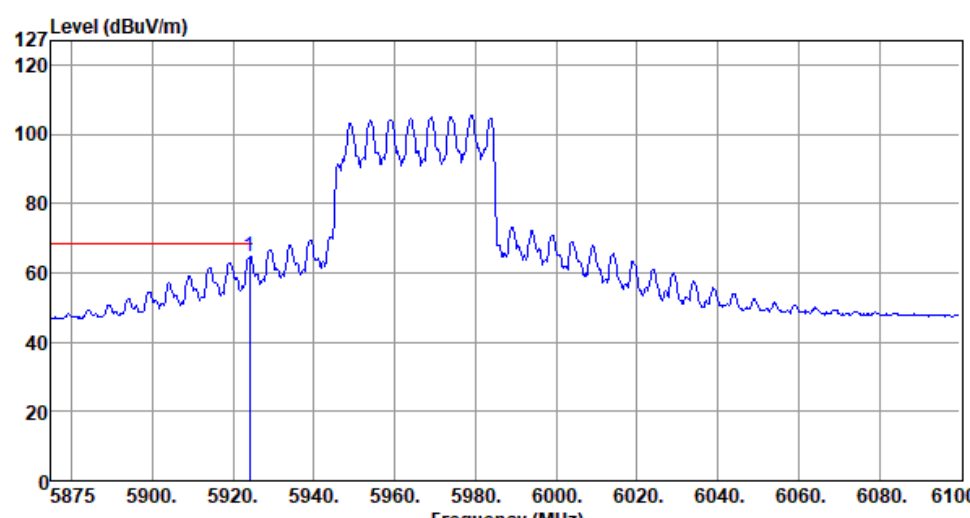


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5924.05	64.85	68.20	-3.35	63.68	1.17	Average	327	7

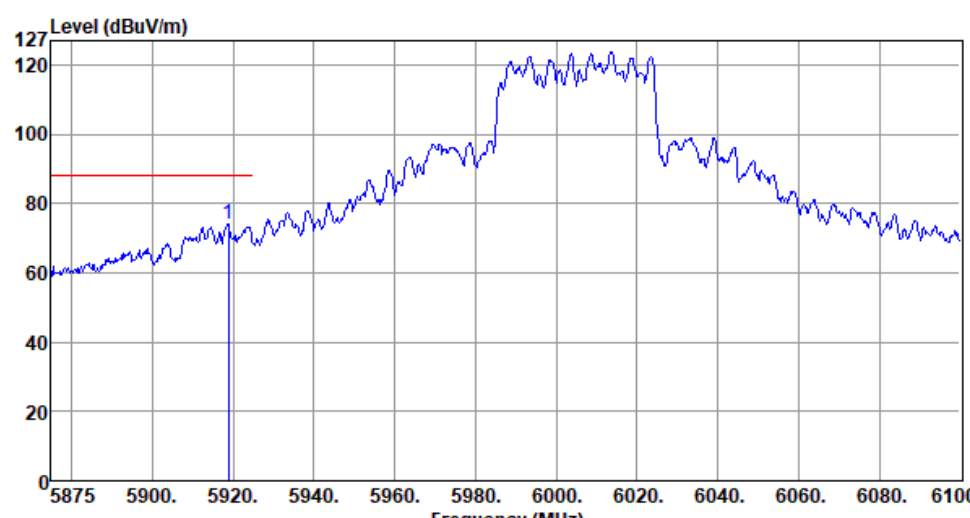


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6005						
Polarization	Horizontal-Peak Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5918.88	74.02	88.20	-14.18	72.85	1.17	Peak	207	41

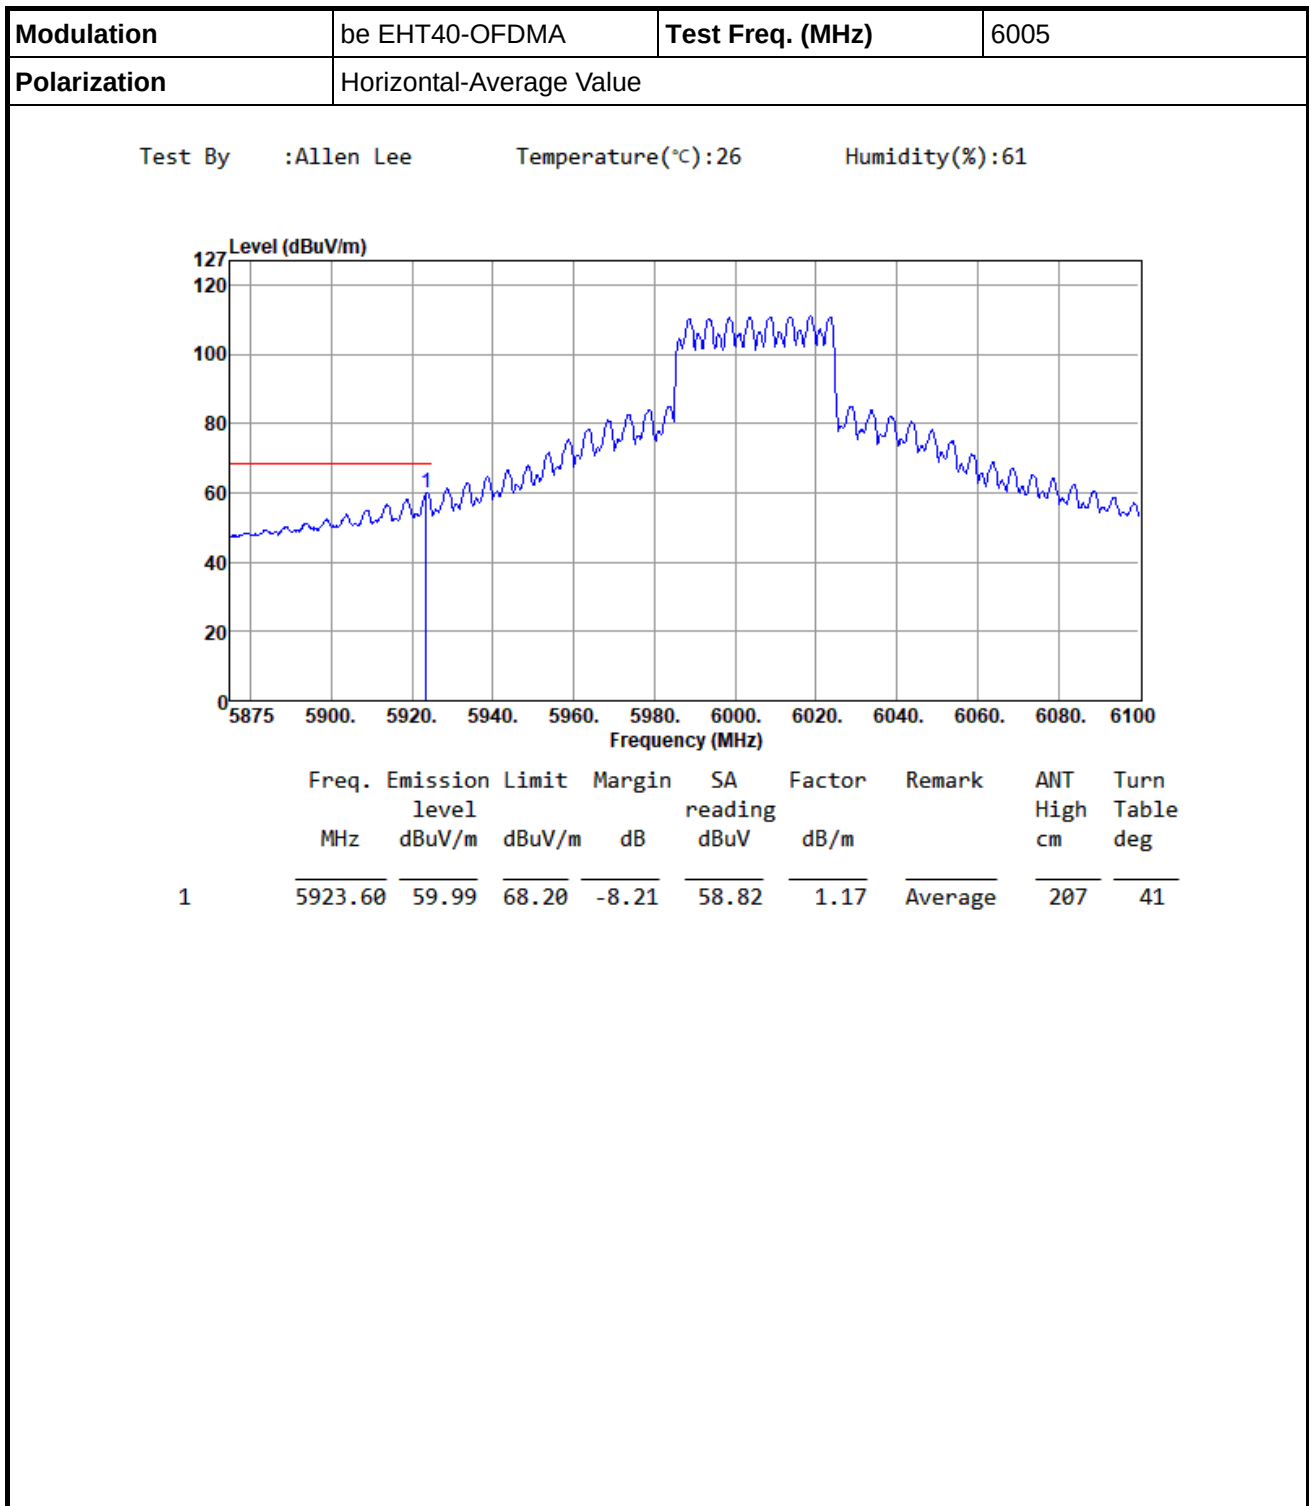

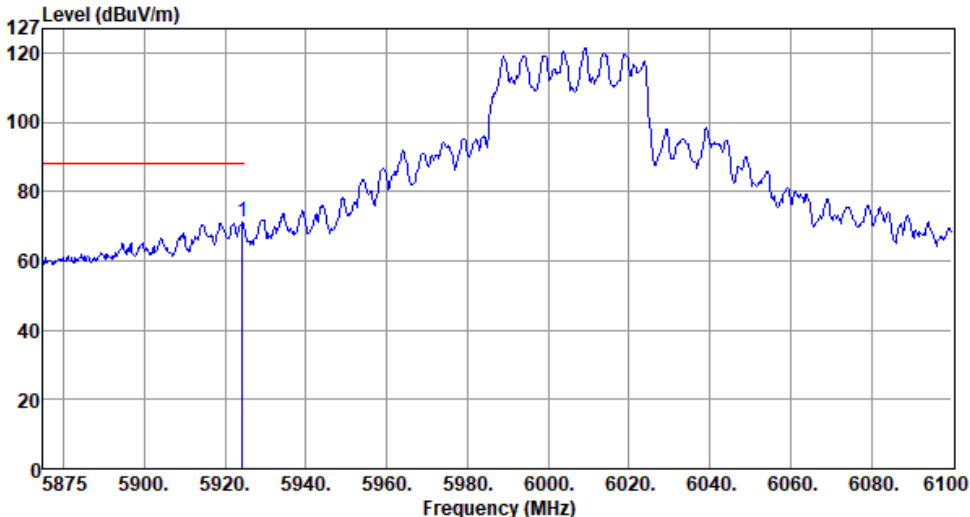



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6005						
Polarization	Vertical-Peak Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5924.28	71.24	88.20	-16.96	70.07	1.17	Peak	209	17

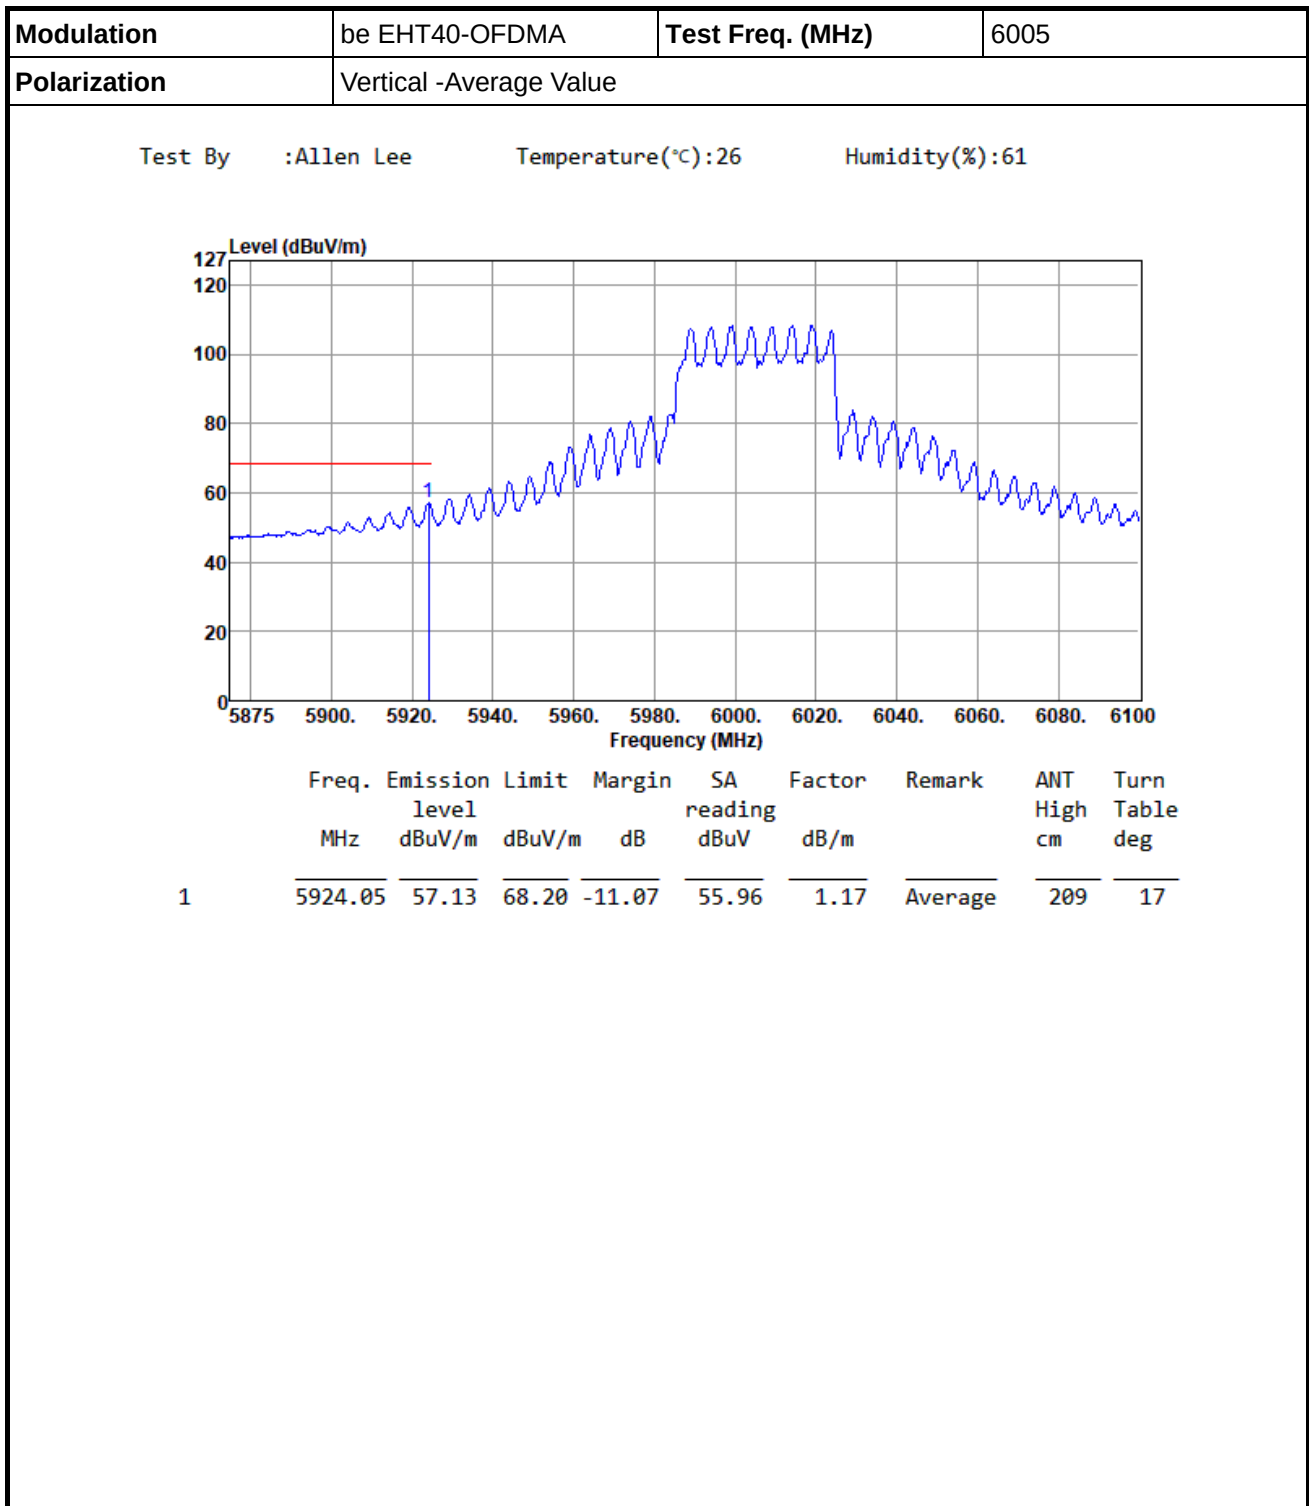



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965
Polarization	Horizontal-Peak Value		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			

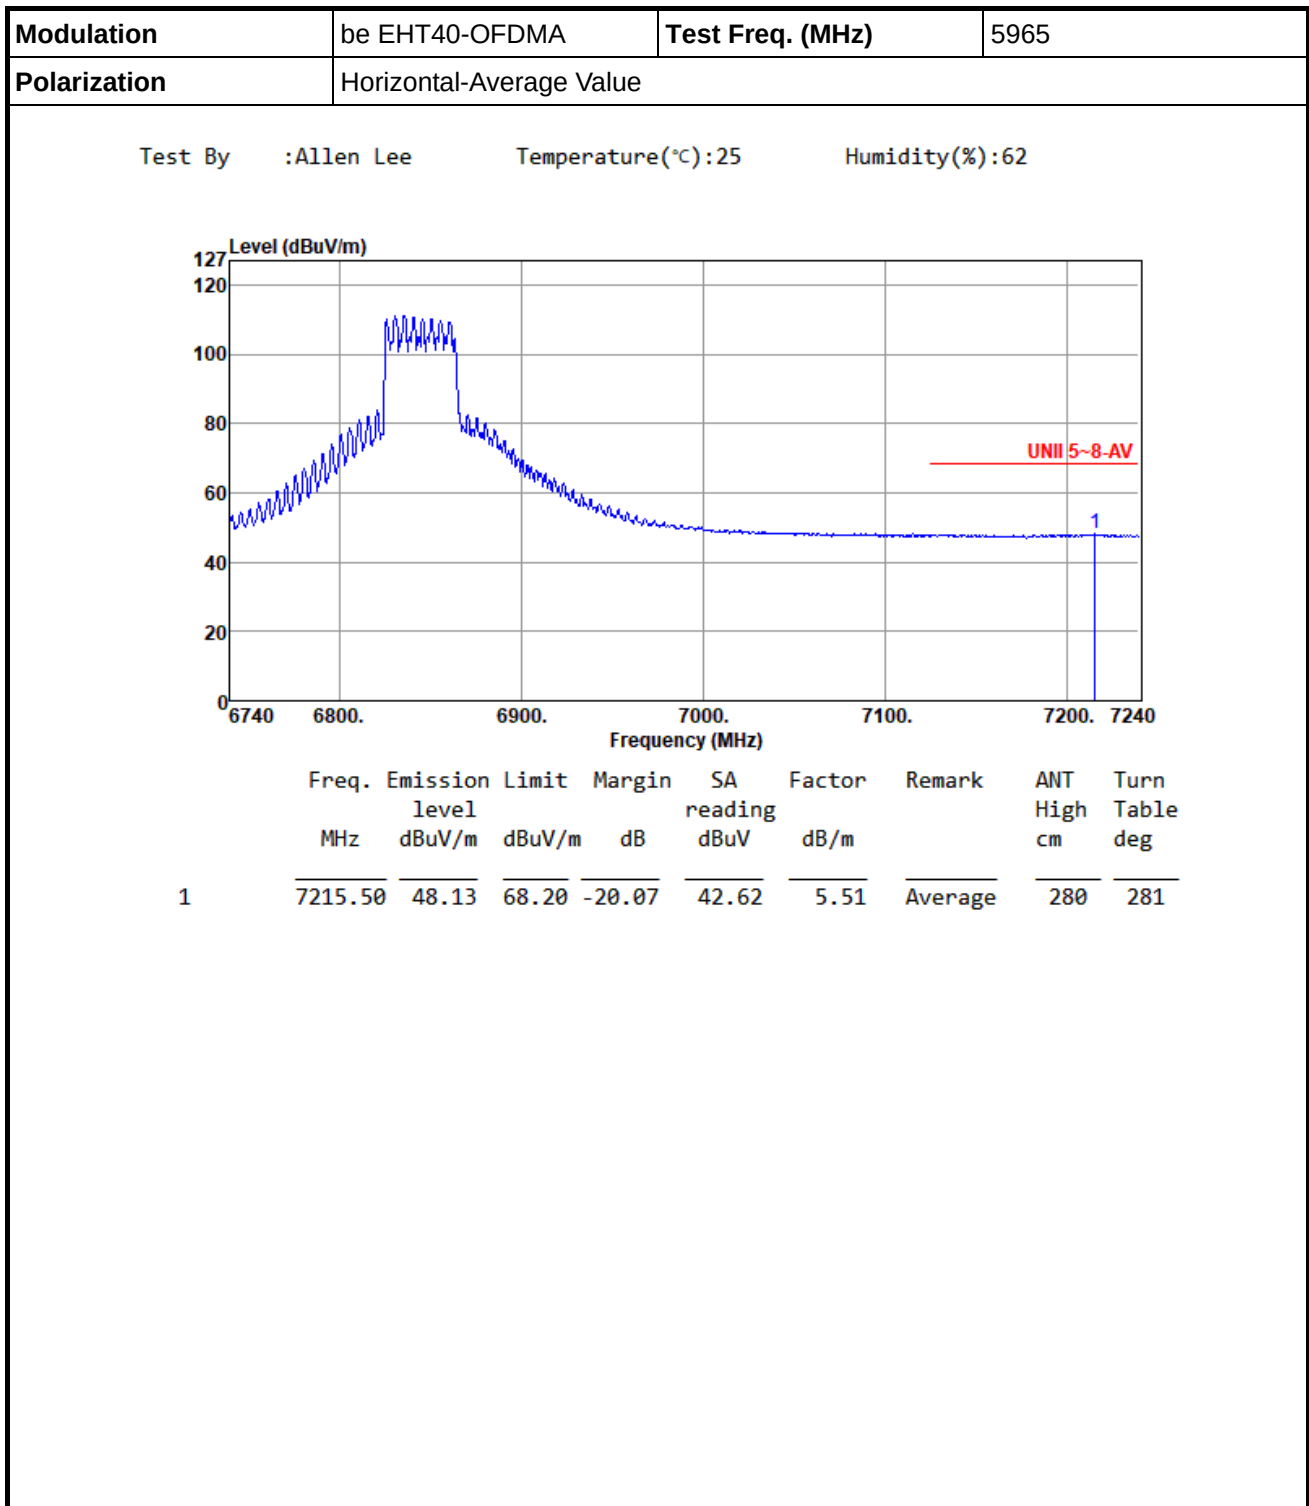


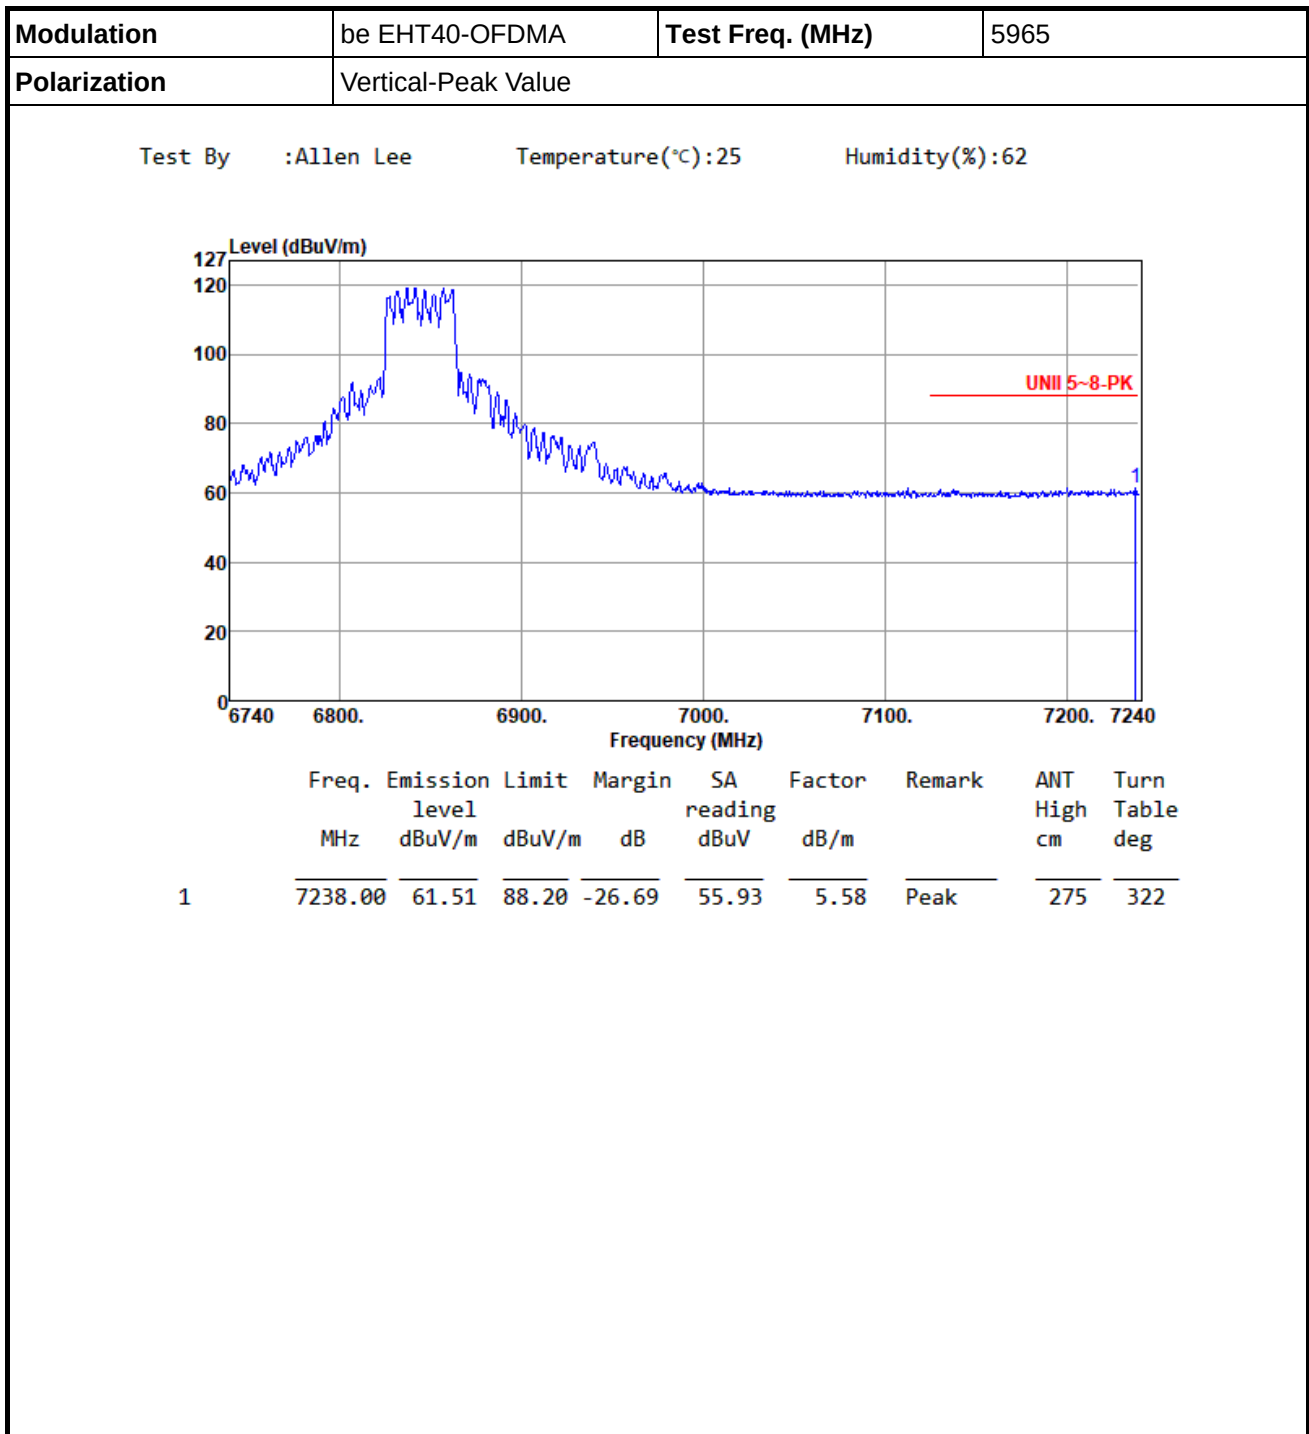



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965
Polarization	Vertical -Average Value		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			

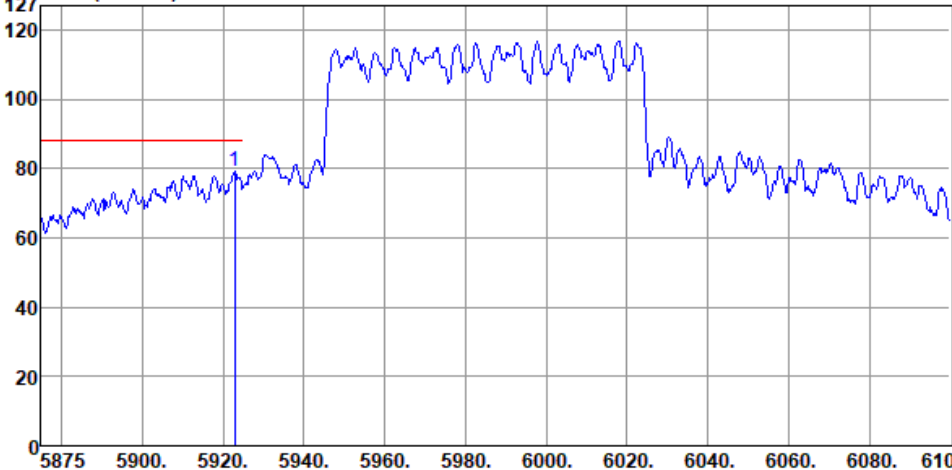


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985						
Polarization	Horizontal-Peak Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5922.93	79.11	88.20	-9.09	77.94	1.17	Peak	227	41




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985
Polarization	Horizontal-Average Value		
Test By :Allen Lee Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			

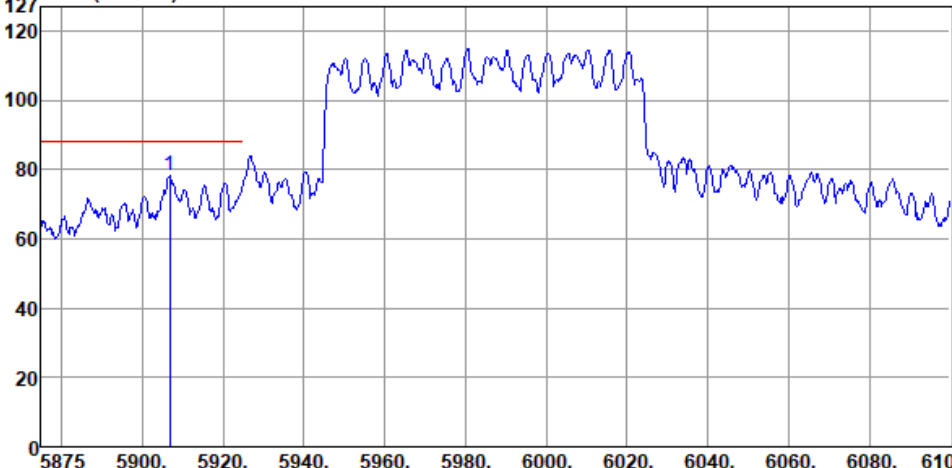

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985																										
Polarization	Vertical-Peak Value																												
Test By :Allen Lee Temperature(°C):26 Humidity(%):61																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5906.73</td><td>78.25</td><td>88.20</td><td>-9.95</td><td>77.08</td><td>1.17</td><td>Peak</td><td>331</td><td>333</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5906.73	78.25	88.20	-9.95	77.08	1.17	Peak	331	333
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																				
1	5906.73	78.25	88.20	-9.95	77.08	1.17	Peak	331	333																				

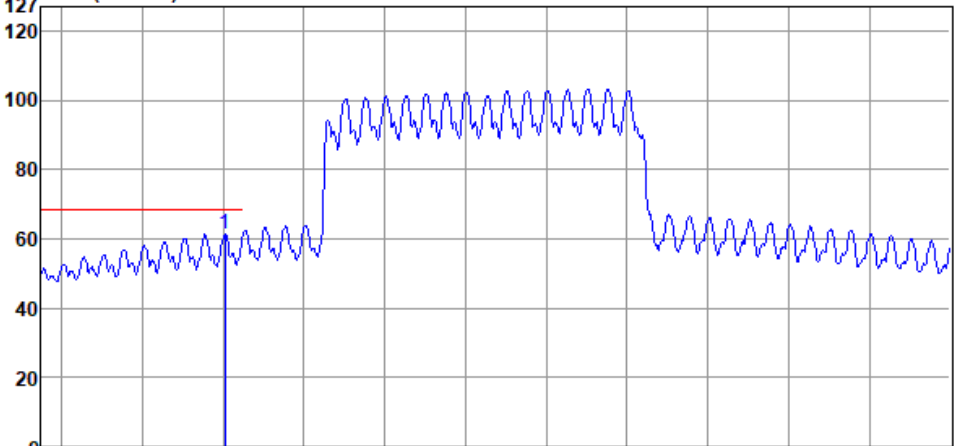


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5920.45	61.45	68.20	-6.75	60.28	1.17	Average	331	333




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6065						
Polarization	Horizontal-Peak Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m) <									

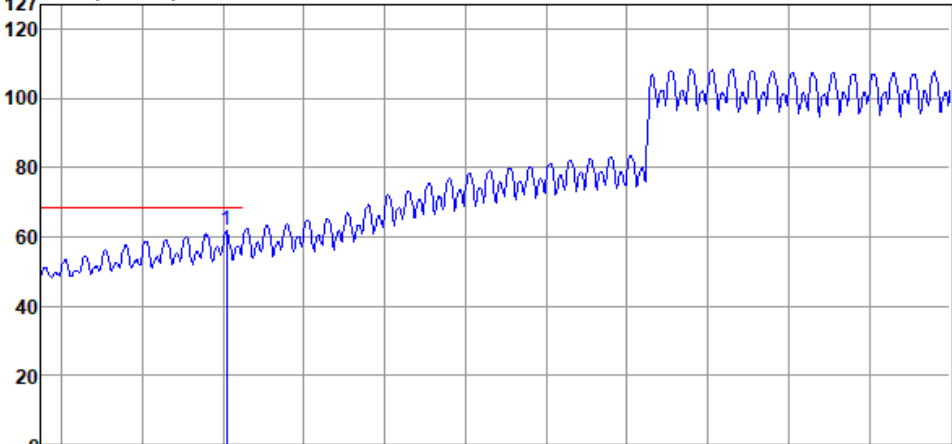

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6065						
Polarization	Horizontal-Average Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5920.90	61.65	68.20	-6.55	60.48	1.17	Average	204	44

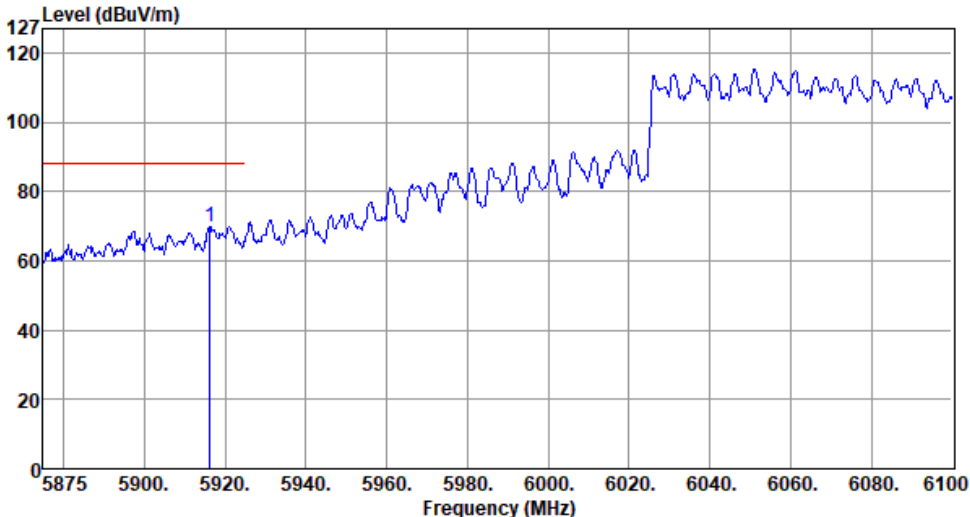


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6065						
Polarization	Vertical-Peak Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBUV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg
1	5916.18	69.87	88.20	-18.33	68.70	1.17	Peak	203	2




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6065
Polarization	Vertical -Average Value		
Test By :Allen Lee Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) <			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785
Polarization	Horizontal-Peak Value		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			

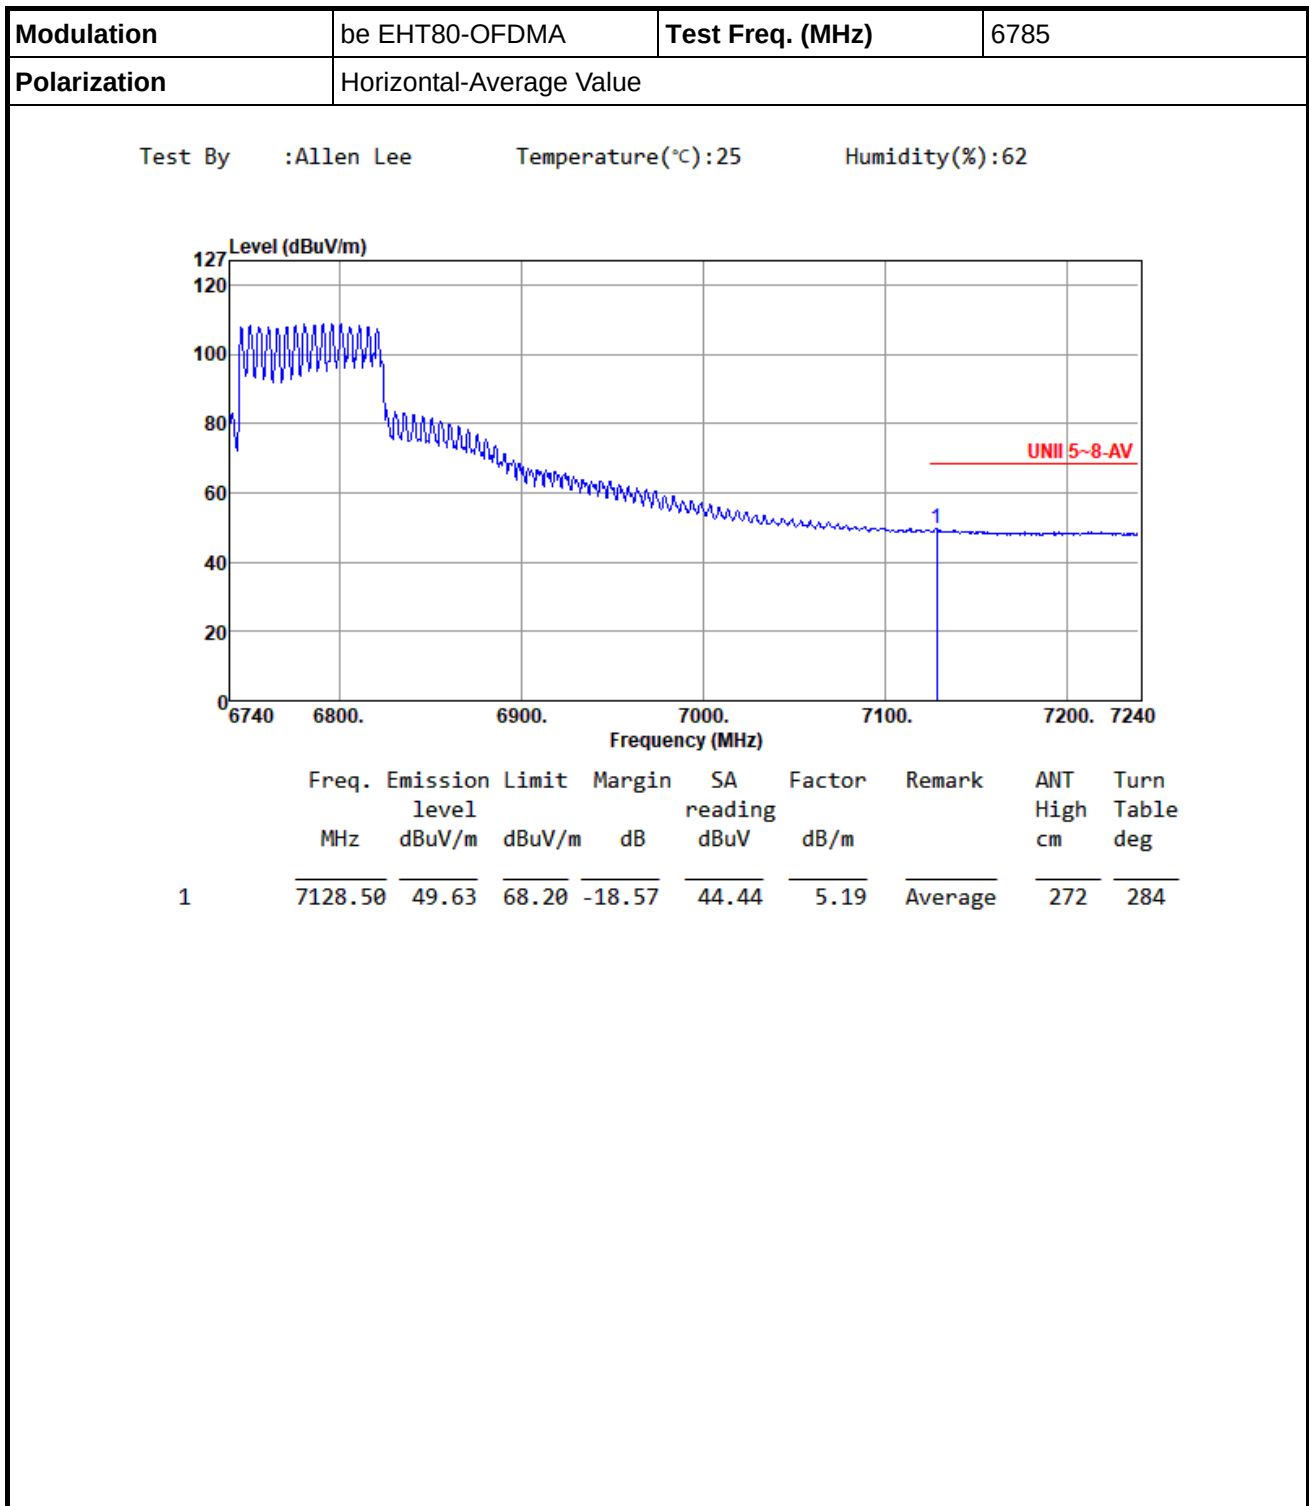

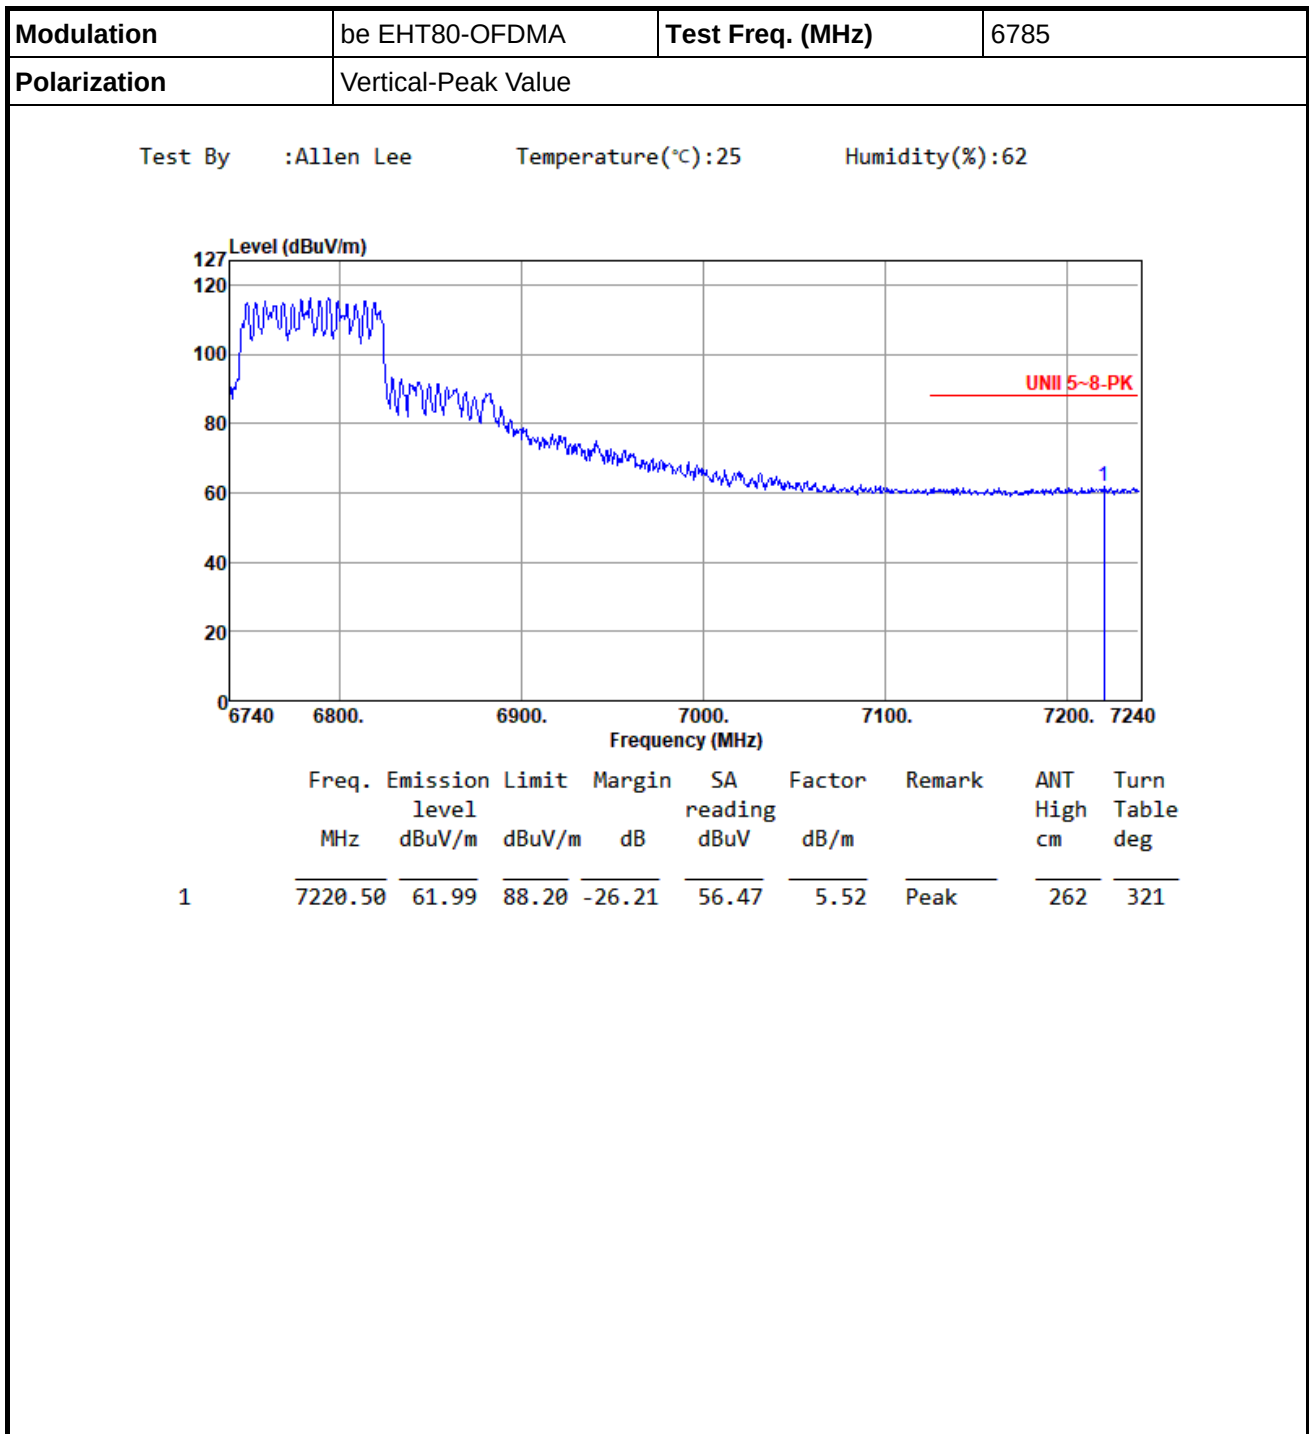



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785																											
Polarization	Vertical -Average Value																													
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																														
Level (dBuV/m) 127 120 100 80 60 40 20 0 6740 6800. 6900. 7000. 7100. 7200. 7240 UNII 5~8-AV 1 Frequency (MHz) <table><tr><td>Freq.</td><td>Emission level</td><td>Limit</td><td>Margin</td><td>SA reading</td><td>Factor</td><td>Remark</td><td>ANT High</td><td>Turn Table</td></tr><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>7213.00</td><td>48.33</td><td>68.20</td><td>-19.87</td><td>42.83</td><td>5.50</td><td>Average</td><td>262 321</td></tr></table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	7213.00	48.33	68.20	-19.87	42.83	5.50	Average	262 321
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																						
1	7213.00	48.33	68.20	-19.87	42.83	5.50	Average	262 321																						




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025
Polarization	Horizontal-Peak Value		

Test By :Allen Lee


Temperature(°C):26

Humidity(%):61

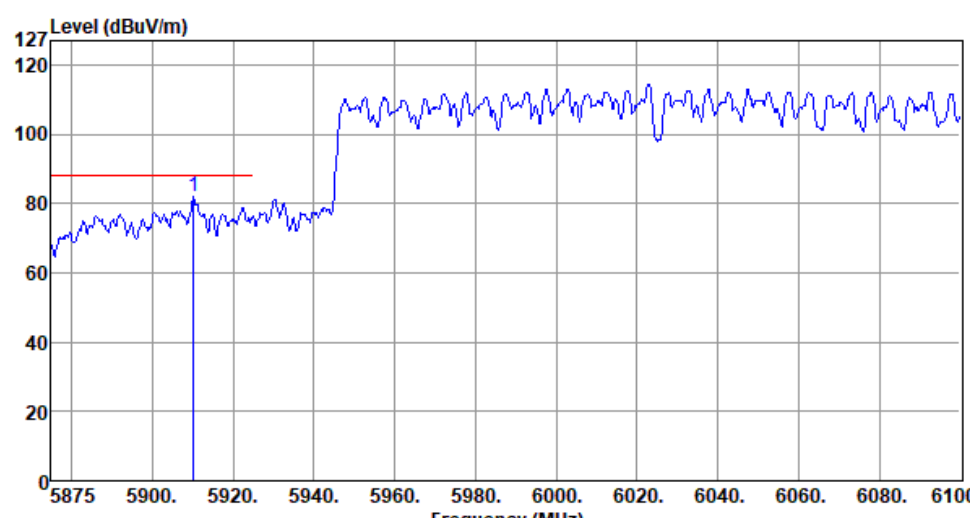

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5910.25	81.92	88.20	-6.28	80.75	1.17	Peak	228	31

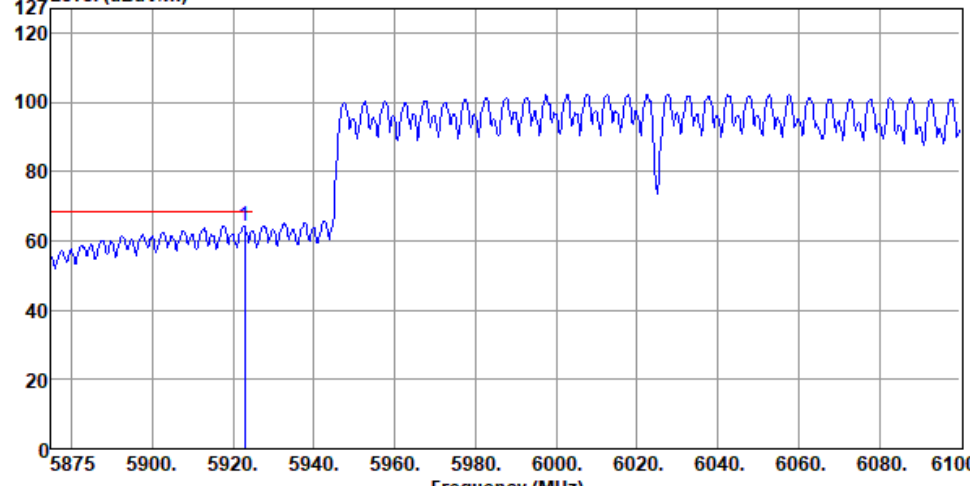


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025						
Polarization	Horizontal-Average Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5922.94	64.41	68.20	-3.79	63.24	1.17	Average	228	31




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025
Polarization	Vertical-Peak Value		
Test By :Allen Lee Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			

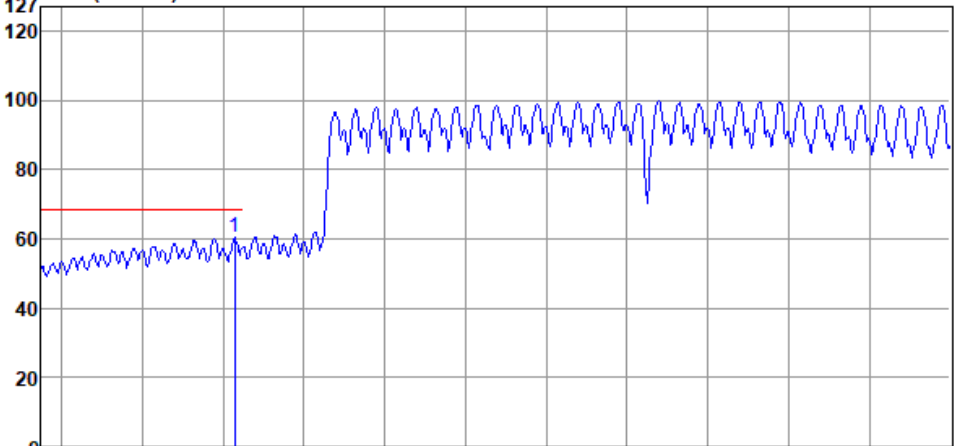


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5922.94	60.23	68.20	-7.97	59.06	1.17	Average	323	6

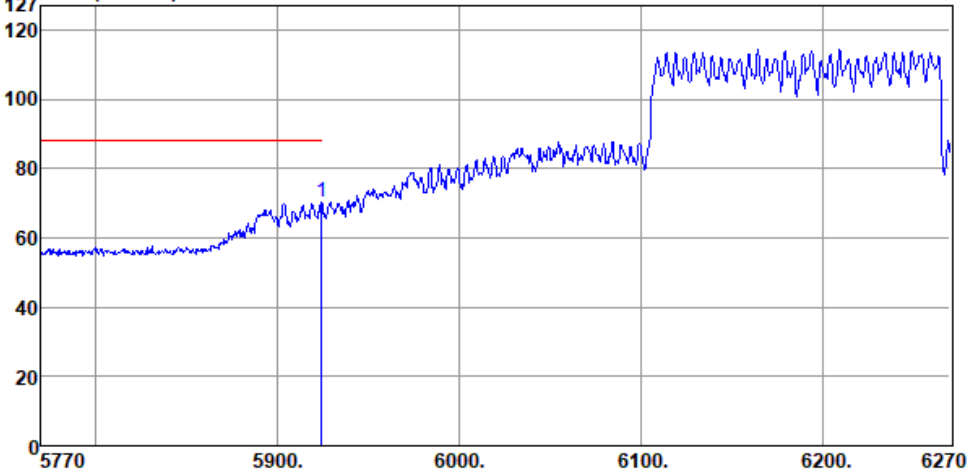

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185						
Polarization	Horizontal-Peak Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5924.00	70.17	88.20	-18.03	69.00	1.17	Peak	211	19

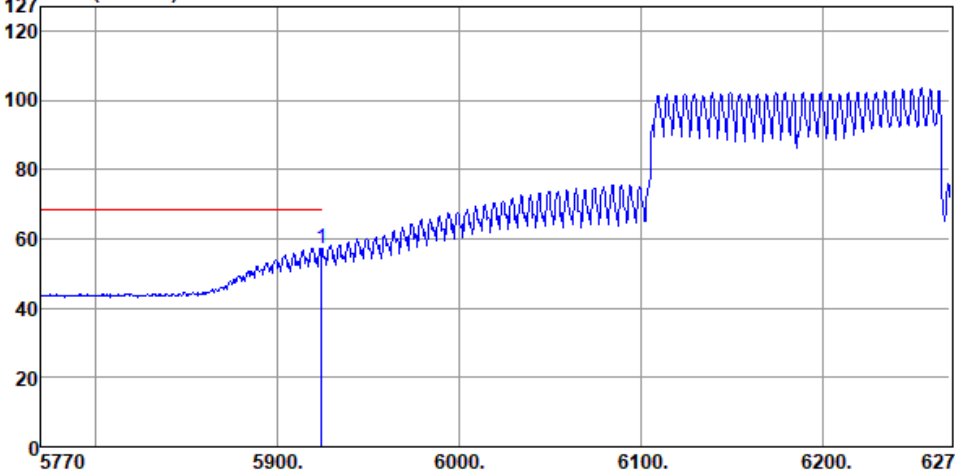

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185						
Polarization	Horizontal-Average Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5924.00	57.41	68.20	-10.79	56.24	1.17	Average	211	19



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185
Polarization	Vertical-Peak Value		

Test By :Allen Lee


Temperature(°C):26

Humidity(%):61

Level (dBuV/m)

</

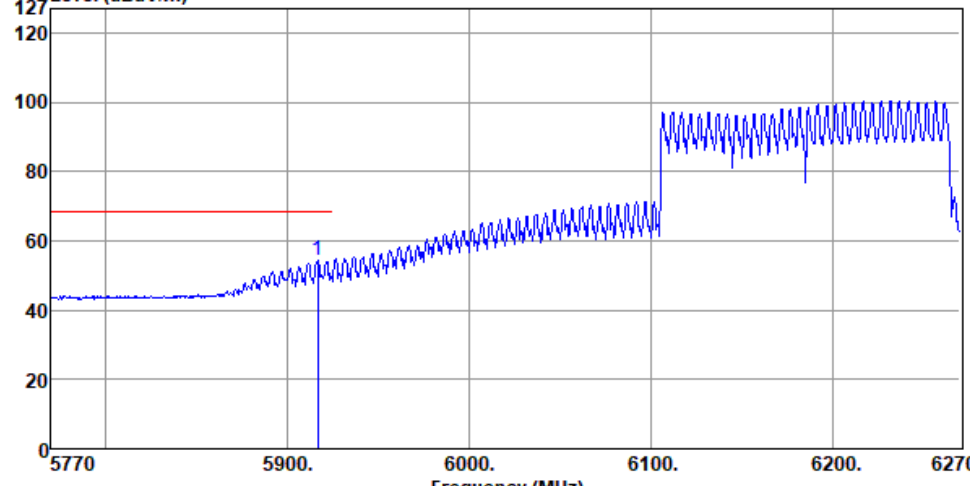

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5916.50	54.30	68.20	-13.90	53.13	1.17	Average	204	29



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665																				
Polarization	Horizontal-Peak Value																						
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																							
Level (dBuV/m) 127 120 100 80 60 40 20 0 6580 6700. 6800. 6900. 7000. 7100. 7240 UNII 5-8-PK 1 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7164.76</td><td>62.96</td><td>88.20</td><td>-25.24</td><td>57.63</td><td>5.33</td><td>Peak</td><td>278</td><td>289</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7164.76	62.96	88.20	-25.24	57.63	5.33	Peak	278	289
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	7164.76	62.96	88.20	-25.24	57.63	5.33	Peak	278	289														



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665
Polarization	Horizontal-Average Value		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665
Polarization	Vertical-Peak Value		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665
Polarization	Vertical -Average Value		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			

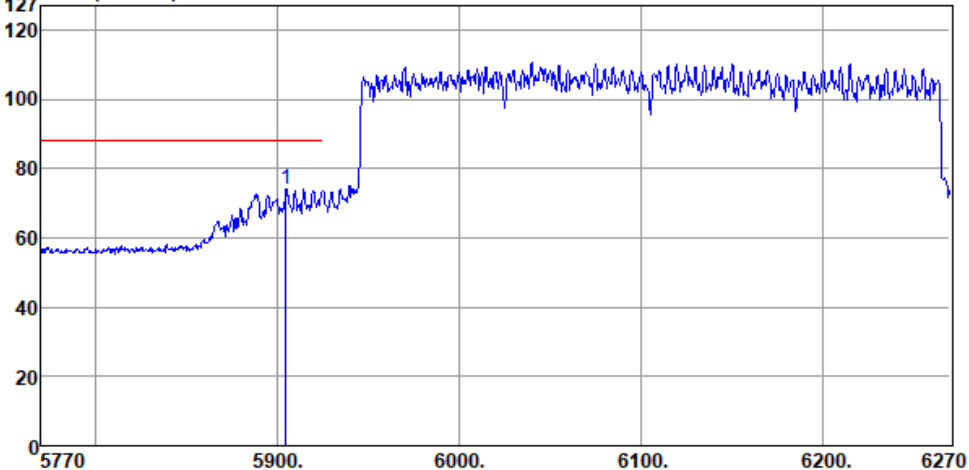


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105						
Polarization	Horizontal-Peak Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5904.50	74.19	88.20	-14.01	73.02	1.17	Peak	227	26

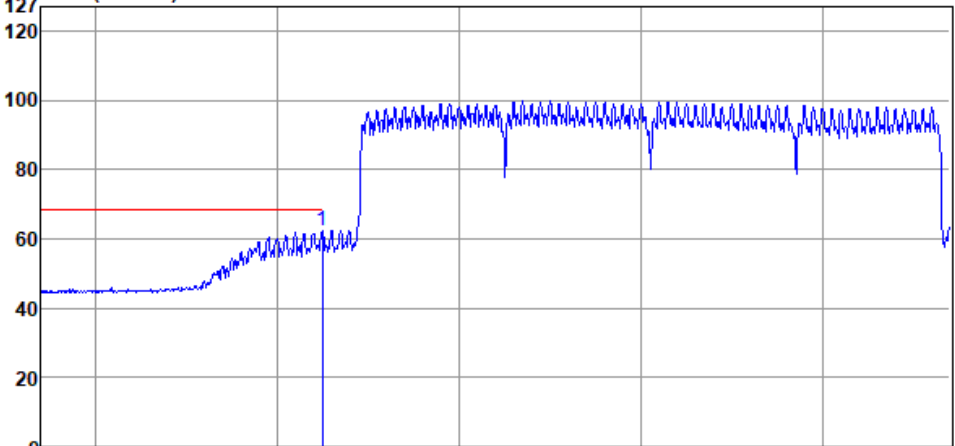


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105						
Polarization	Horizontal-Average Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5924.50	62.52	68.20	-5.68	61.35	1.17	Average	227	26

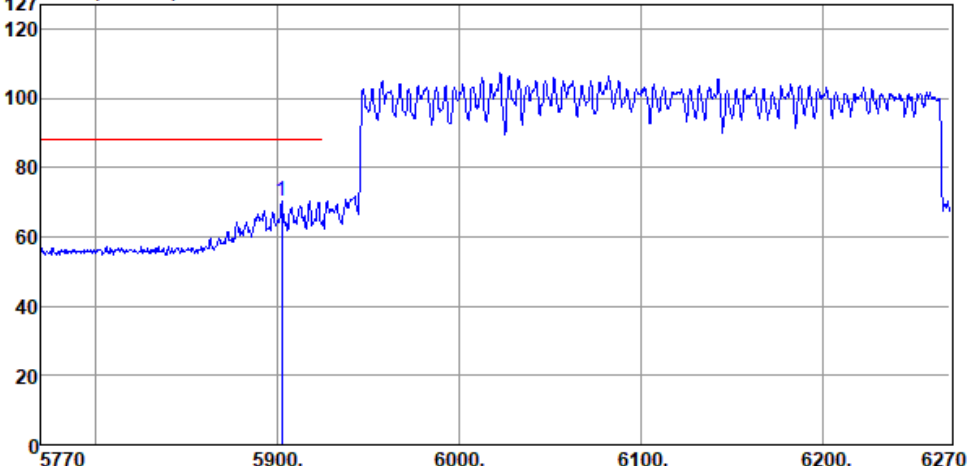

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105						
Polarization	Vertical-Peak Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5902.50	70.48	88.20	-17.72	69.31	1.17	Peak	327	16

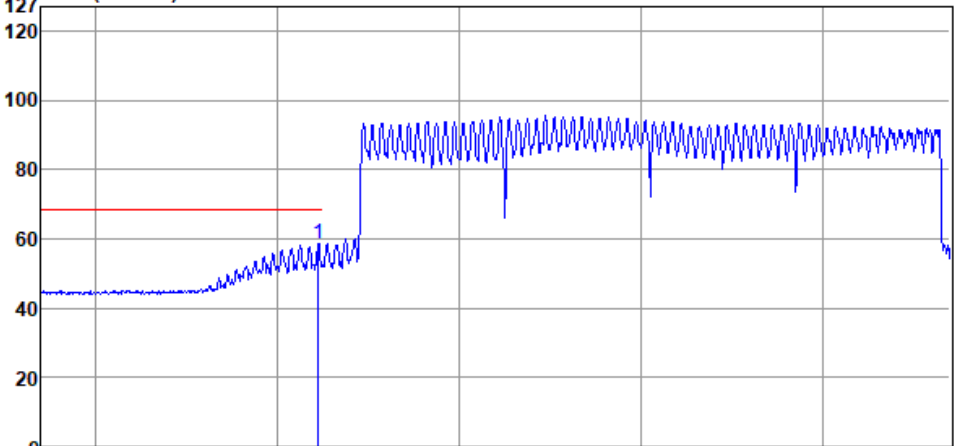

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5922.50	58.70	68.20	-9.50	57.53	1.17	Average	327	16

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.1763G	9.49	6.1577G	-17.86	-10.63	-7.23	4
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.42079G	7.11	6.3849G	-36.27	-32.55	-3.72	3
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	5.97439G	4.59	6.0244G	-37.91	-35.29	-2.62	1
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.02016G	4.52	6.1058G	-38.77	-35.48	-3.29	3
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.37137G	4.19	6.1026G	-35.85	-35.58	-0.27	3
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.2778G	4.65	6.7594G	-39.15	-35.35	-3.80	3
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.536G	10.28	6.5523G	-21.29	-9.90	-11.39	3
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.72039G	8.59	6.6818G	-35.26	-30.81	-4.45	4
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.74058G	9.81	6.766G	-17.18	-10.19	-6.99	2
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.71059G	9.07	6.7738G	-15.08	-10.99	-4.09	2
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.71055G	7.64	6.9226G	-35.80	-32.36	-3.44	3



Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11a_Nss1,(6Mbps)_4TX								
5955MHz	Pass	5.96239G	9.46	5.9758G	-23.91	-10.55	-13.36	1
5955MHz	Pass	5.9557G	9.13	5.9746G	-22.74	-10.67	-12.07	2
5955MHz	Pass	5.9537G	9.25	5.9732G	-22.02	-10.96	-11.06	3
5955MHz	Pass	5.9513G	9.01	5.973G	-22.02	-11.09	-10.93	4
6175MHz	Pass	6.1724G	9.60	6.1565G	-18.51	-10.63	-7.88	1
6175MHz	Pass	6.18259G	9.73	6.1546G	-20.22	-10.17	-10.05	2
6175MHz	Pass	6.16981G	9.16	6.1553G	-20.29	-10.86	-9.43	3
6175MHz	Pass	6.1763G	9.49	6.1577G	-17.86	-10.63	-7.23	4
6415MHz	Pass	6.4199G	10.30	6.3973G	-23.55	-9.86	-13.69	1
6415MHz	Pass	6.4198G	10.11	6.4338G	-22.69	-10.09	-12.60	2
6415MHz	Pass	6.4123G	9.83	6.3964G	-23.32	-10.21	-13.11	3
6415MHz	Pass	6.4198G	9.47	6.3993G	-22.72	-11.92	-10.80	4
6535MHz	Pass	6.54229G	10.31	6.5139G	-24.02	-9.75	-14.27	1
6535MHz	Pass	6.5398G	10.29	6.5545G	-23.01	-9.81	-13.20	2
6535MHz	Pass	6.536G	10.28	6.5523G	-21.29	-9.90	-11.39	3
6535MHz	Pass	6.5374G	9.73	6.5167G	-22.26	-10.32	-11.94	4
6715MHz	Pass	6.70761G	10.48	6.6926G	-24.08	-9.54	-14.54	1
6715MHz	Pass	6.7162G	10.61	6.6927G	-23.79	-9.40	-14.39	2
6715MHz	Pass	6.7166G	10.19	6.6942G	-23.28	-9.87	-13.41	3
6715MHz	Pass	6.7165G	9.93	6.6939G	-24.03	-10.23	-13.80	4
6855MHz	Pass	6.86259G	9.46	6.8752G	-23.86	-10.57	-13.29	1
6855MHz	Pass	6.84921G	10.57	6.8327G	-24.48	-9.50	-14.98	2
6855MHz	Pass	6.8576G	10.47	6.877G	-24.13	-9.57	-14.56	3
6855MHz	Pass	6.84811G	9.64	6.8755G	-24.50	-10.49	-14.01	4
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA								
5955MHz	Pass	5.9598G	8.40	5.9734G	-21.85	-12.18	-9.67	1
5955MHz	Pass	5.96219G	8.85	5.9736G	-20.30	-11.24	-9.06	2
5955MHz	Pass	5.96239G	8.70	5.9728G	-21.13	-13.47	-7.66	3
5955MHz	Pass	5.96409G	8.58	5.9741G	-21.70	-12.81	-8.89	4
6175MHz	Pass	6.17G	9.64	6.157G	-22.05	-11.80	-10.25	1
6175MHz	Pass	6.18029G	8.93	6.1466G	-32.86	-28.93	-3.93	2
6175MHz	Pass	6.16961G	8.92	6.1574G	-20.08	-12.22	-7.86	3
6175MHz	Pass	6.16621G	9.22	6.1559G	-21.45	-11.74	-9.71	4
6415MHz	Pass	6.4168G	6.75	6.387G	-36.20	-30.85	-5.35	1
6415MHz	Pass	6.40711G	7.27	6.3975G	-23.40	-15.48	-7.92	2
6415MHz	Pass	6.42079G	7.11	6.3849G	-36.27	-32.55	-3.72	3
6415MHz	Pass	6.4138G	6.32	6.4455G	-38.03	-33.68	-4.35	4
6535MHz	Pass	6.5385G	9.75	6.5183G	-18.66	-10.56	-8.10	1
6535MHz	Pass	6.52811G	9.60	6.5185G	-20.47	-10.90	-9.57	2
6535MHz	Pass	6.52961G	9.85	6.5173G	-21.96	-13.42	-8.54	3
6535MHz	Pass	6.52741G	9.31	6.4973G	-39.27	-30.69	-8.58	4


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6715MHz	Pass	6.70661G	9.32	6.6962G	-18.83	-10.69	-8.14	1
6715MHz	Pass	6.72059G	9.53	6.7352G	-18.81	-10.37	-8.44	2
6715MHz	Pass	6.7105G	9.42	6.6979G	-19.24	-10.74	-8.50	3
6715MHz	Pass	6.72039G	8.59	6.6818G	-35.26	-30.81	-4.45	4
6855MHz	Pass	6.86259G	8.24	6.8953G	-42.51	-31.60	-10.91	1
6855MHz	Pass	6.8506G	8.56	6.8742G	-22.01	-12.41	-9.60	2
6855MHz	Pass	6.86069G	9.38	6.8741G	-20.98	-11.41	-9.57	3
6855MHz	Pass	6.86049G	8.49	6.8712G	-23.23	-12.58	-10.65	4
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA								
5965MHz	Pass	5.97439G	4.59	6.0244G	-37.91	-35.29	-2.62	1
5965MHz	Pass	5.98078G	4.60	6.0266G	-38.53	-35.40	-3.13	2
5965MHz	Pass	5.97879G	4.58	6.0242G	-38.68	-35.30	-3.38	3
5965MHz	Pass	5.98318G	4.62	6.0236G	-39.67	-34.90	-4.77	4
6165MHz	Pass	6.15401G	8.87	6.1292G	-21.79	-11.81	-9.98	1
6165MHz	Pass	6.17959G	8.76	6.092G	-37.61	-31.24	-6.37	2
6165MHz	Pass	6.17019G	8.97	6.2058G	-20.90	-11.04	-9.86	3
6165MHz	Pass	6.15201G	9.09	6.1302G	-19.96	-11.25	-8.71	4
6405MHz	Pass	6.41979G	8.67	6.3444G	-35.02	-31.22	-3.80	1
6405MHz	Pass	6.4098G	9.64	6.37G	-19.71	-10.61	-9.10	2
6405MHz	Pass	6.39901G	9.21	6.3688G	-22.63	-12.24	-10.39	3
6405MHz	Pass	6.39741G	8.51	6.4774G	-39.64	-31.49	-8.15	4
6565MHz	Pass	6.57999G	9.34	6.6026G	-19.10	-11.06	-8.04	1
6565MHz	Pass	6.569G	9.27	6.529G	-19.52	-10.73	-8.79	2
6565MHz	Pass	6.57879G	9.62	6.5262G	-21.40	-10.70	-10.70	3
6565MHz	Pass	6.57859G	8.90	6.5306G	-19.94	-11.23	-8.71	4
6725MHz	Pass	6.71161G	9.41	6.762G	-17.74	-10.66	-7.08	1
6725MHz	Pass	6.74058G	9.81	6.766G	-17.18	-10.19	-6.99	2
6725MHz	Pass	6.73579G	9.38	6.7636G	-20.06	-10.81	-9.25	3
6725MHz	Pass	6.73019G	8.80	6.6914G	-19.24	-11.23	-8.01	4
6845MHz	Pass	6.86278G	9.07	6.8836G	-20.86	-10.97	-9.89	1
6845MHz	Pass	6.83341G	9.62	6.8888G	-19.46	-10.81	-8.65	2
6845MHz	Pass	6.86158G	9.97	6.8864G	-18.89	-10.03	-8.86	3
6845MHz	Pass	6.85859G	8.56	6.8818G	-22.74	-11.55	-11.19	4
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA								
5985MHz	Pass	6.01857G	4.28	6.1162G	-40.93	-35.01	-5.92	1
5985MHz	Pass	6.02056G	4.77	6.1238G	-41.29	-35.23	-6.06	2
5985MHz	Pass	6.02016G	4.52	6.1058G	-38.77	-35.48	-3.29	3
5985MHz	Pass	6.02256G	4.44	6.1058G	-39.69	-35.56	-4.13	4
6145MHz	Pass	6.17337G	9.07	6.0734G	-19.33	-11.00	-8.33	1
6145MHz	Pass	6.16098G	9.81	6.2218G	-19.97	-10.28	-9.69	2
6145MHz	Pass	6.17937G	8.98	6.0678G	-18.57	-11.08	-7.49	3
6145MHz	Pass	6.12902G	9.65	6.0734G	-17.06	-10.39	-6.67	4

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6385MHz	Pass	6.41657G	8.91	6.311G	-21.32	-11.83	-9.49	1
6385MHz	Pass	6.41177G	9.46	6.3118G	-18.13	-10.55	-7.58	2
6385MHz	Pass	6.42096G	9.12	6.315G	-19.32	-11.13	-8.19	3
6385MHz	Pass	6.39019G	8.98	6.4534G	-19.91	-11.26	-8.65	4
6625MHz	Pass	6.64938G	9.28	6.705G	-17.84	-10.82	-7.02	1
6625MHz	Pass	6.61581G	9.20	6.7002G	-16.34	-11.32	-5.02	2
6625MHz	Pass	6.66056G	8.83	6.4666G	-36.83	-30.90	-5.93	3
6625MHz	Pass	6.61941G	8.60	6.557G	-18.50	-12.13	-6.37	4
6705MHz	Pass	6.73697G	8.91	6.7774G	-16.77	-11.88	-4.89	1
6705MHz	Pass	6.71059G	9.07	6.7738G	-15.08	-10.99	-4.09	2
6705MHz	Pass	6.74096G	9.01	6.7806G	-18.91	-13.70	-5.21	3
6705MHz	Pass	6.701G	8.33	6.6278G	-20.37	-14.69	-5.68	4
6785MHz	Pass	6.77341G	8.31	6.8622G	-20.18	-11.79	-8.39	1
6785MHz	Pass	6.80738G	8.90	6.867G	-18.49	-11.12	-7.37	2
6785MHz	Pass	6.80938G	8.83	6.8626G	-18.47	-11.20	-7.27	3
6785MHz	Pass	6.76142G	8.53	6.8606G	-20.75	-12.60	-8.15	4
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA								
6025MHz	Pass	6.09773G	2.99	6.273G	-43.35	-37.01	-6.34	1
6025MHz	Pass	6.09933G	3.21	6.2666G	-43.26	-36.56	-6.70	2
6025MHz	Pass	6.03299G	3.29	6.273G	-41.05	-36.71	-4.34	3
6025MHz	Pass	6.03939G	4.00	6.269G	-41.19	-36.00	-5.19	4
6185MHz	Pass	6.24654G	9.47	6.0266G	-21.36	-10.57	-10.79	1
6185MHz	Pass	6.25693G	10.11	6.3434G	-21.88	-9.91	-11.97	2
6185MHz	Pass	6.24014G	8.91	6.0314G	-20.02	-11.13	-8.89	3
6185MHz	Pass	6.16102G	9.19	6.029G	-21.11	-10.85	-10.26	4
6345MHz	Pass	6.41933G	4.33	6.1018G	-37.43	-35.56	-1.87	1
6345MHz	Pass	6.36978G	4.42	6.1018G	-36.26	-35.47	-0.79	2
6345MHz	Pass	6.37137G	4.19	6.1026G	-35.85	-35.58	-0.27	3
6345MHz	Pass	6.35139G	4.44	6.101G	-37.52	-35.56	-1.96	4
6665MHz	Pass	6.69777G	7.93	7.005G	-40.69	-31.60	-9.09	1
6665MHz	Pass	6.69297G	8.37	6.8234G	-22.60	-11.66	-10.94	2
6665MHz	Pass	6.71055G	7.64	6.9226G	-35.80	-32.36	-3.44	3
6665MHz	Pass	6.71855G	7.51	6.4066G	-36.12	-32.49	-3.63	4
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA								
6105MHz	Pass	6.1162G	5.21	6.5978G	-39.46	-34.79	-4.67	1
6105MHz	Pass	6.2584G	5.06	6.5994G	-38.84	-34.84	-4.00	2
6105MHz	Pass	6.1146G	4.61	6.5978G	-38.88	-34.83	-4.05	3
6105MHz	Pass	6.1194G	4.62	6.5962G	-40.55	-35.28	-5.27	4
6265MHz	Pass	6.2986G	5.46	6.7514G	-38.36	-33.97	-4.39	1
6265MHz	Pass	6.2778G	5.57	6.8218G	-39.39	-34.43	-4.96	2
6265MHz	Pass	6.2778G	4.65	6.7594G	-39.15	-35.35	-3.80	3
6265MHz	Pass	6.2123G	4.60	6.7578G	-39.63	-35.30	-4.33	4

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


5955MHz_TX

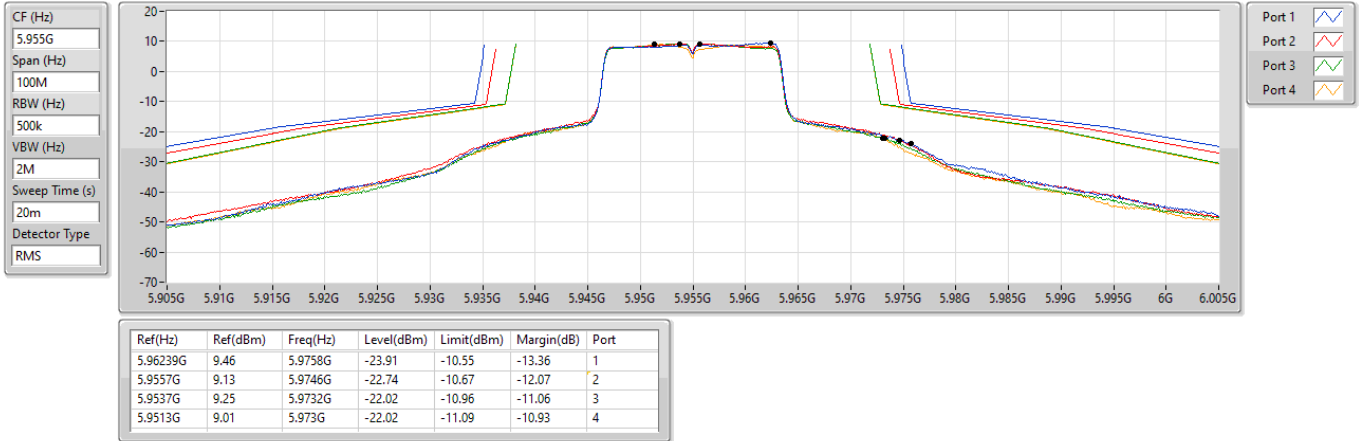

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6175MHz_TX

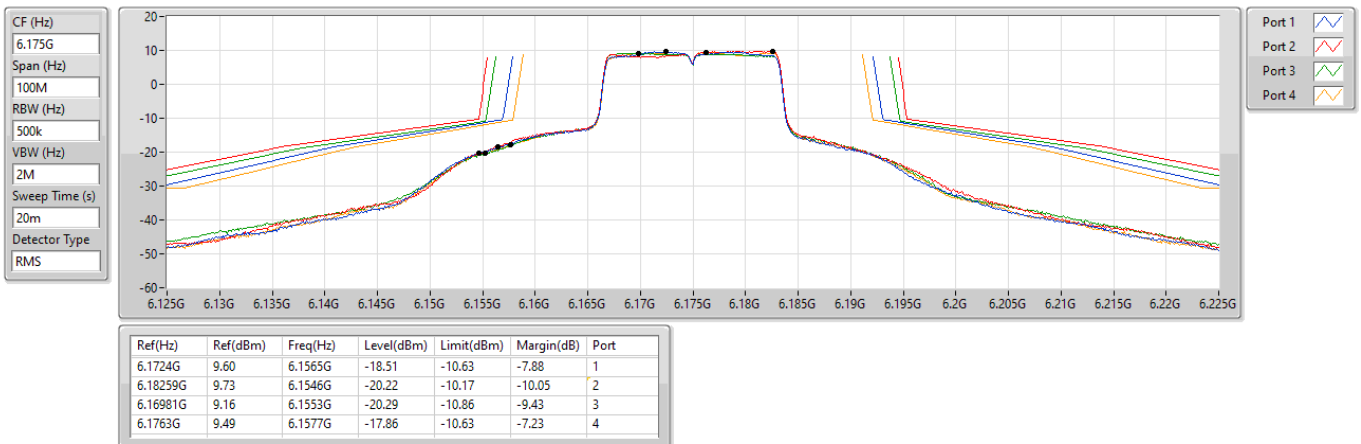

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6415MHz_TX

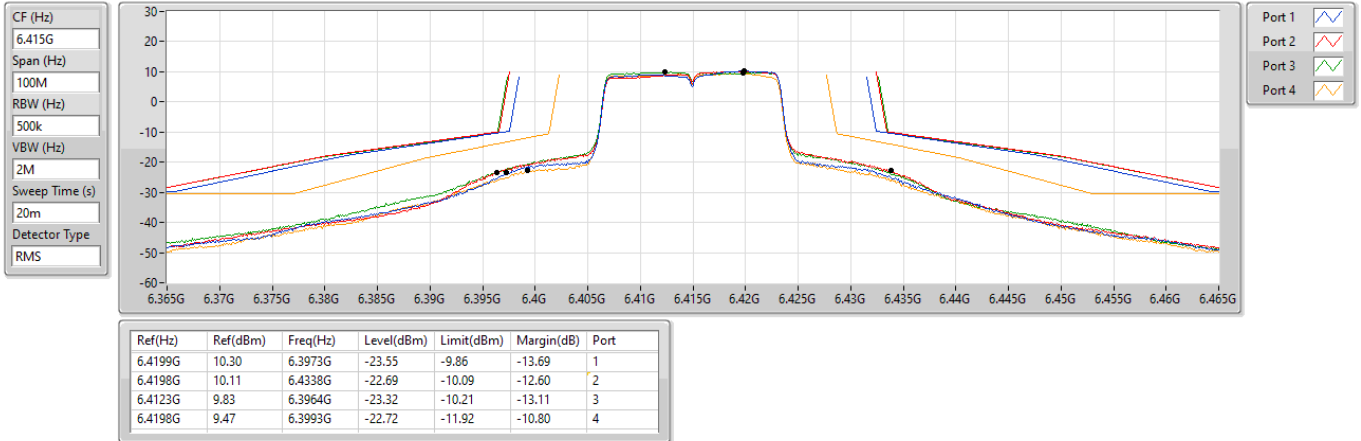

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6535MHz_TX

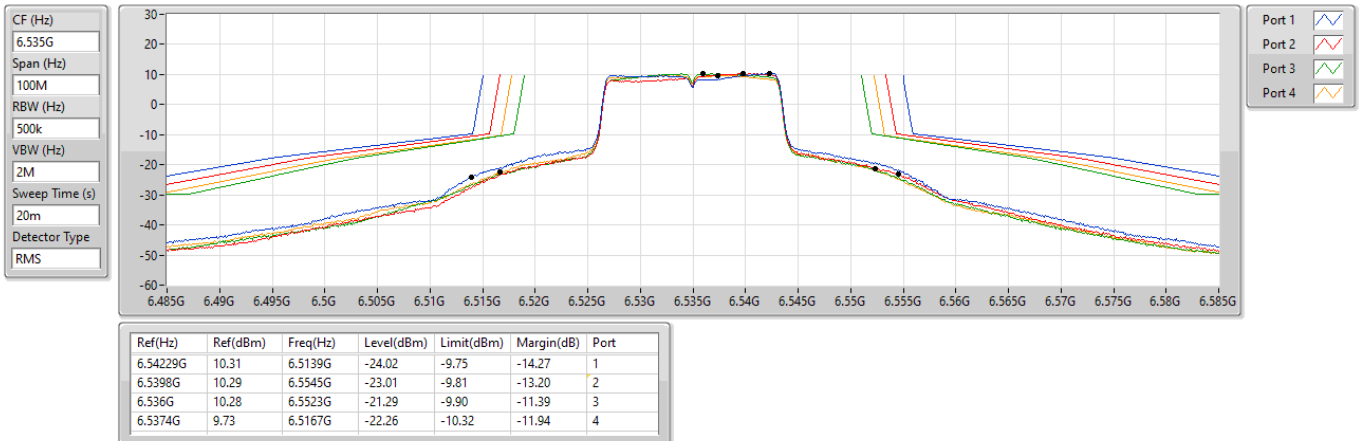

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6715MHz_TX

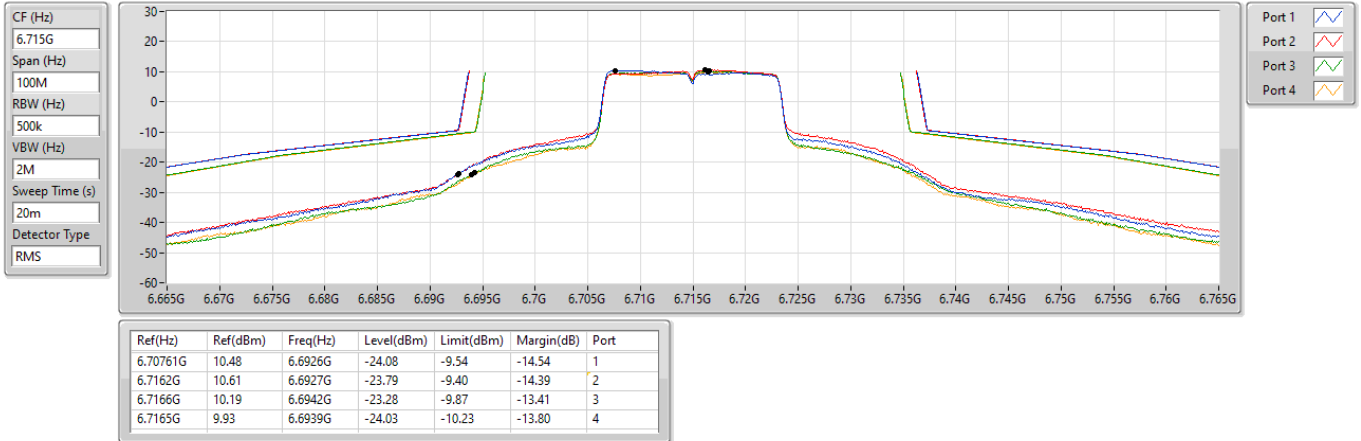

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6855MHz_TX

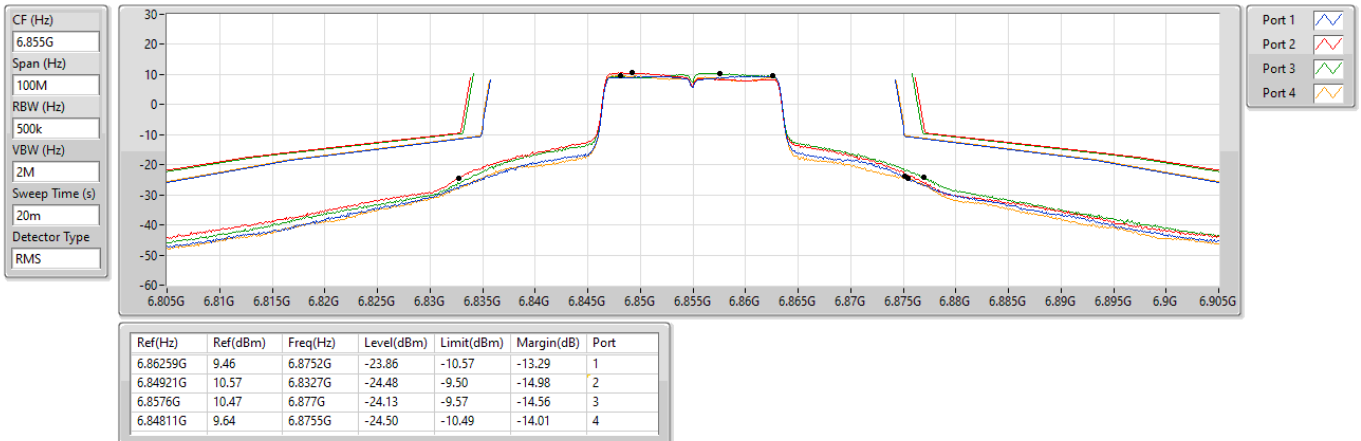

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


5955MHz_TX

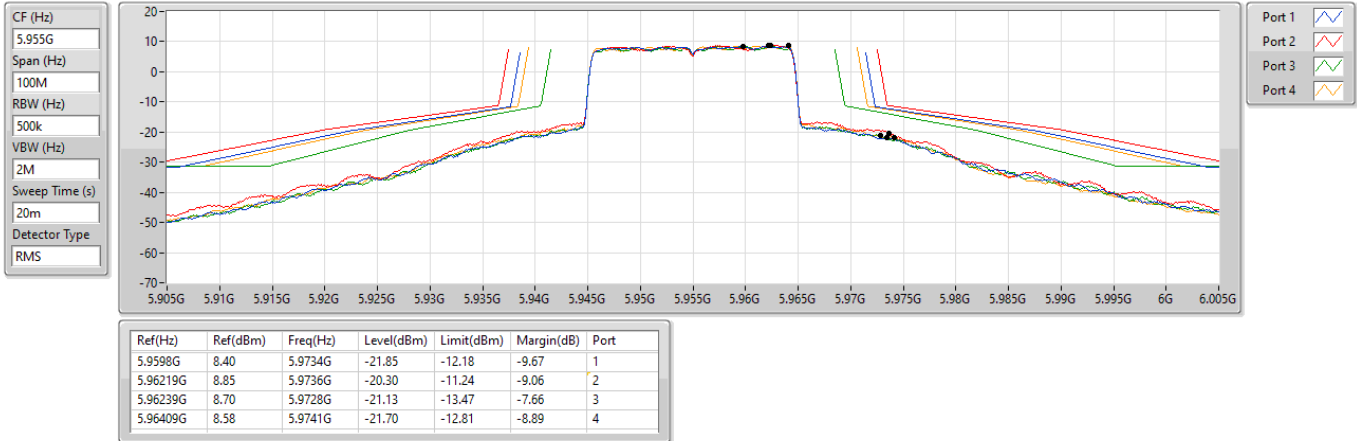

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6175MHz_TX

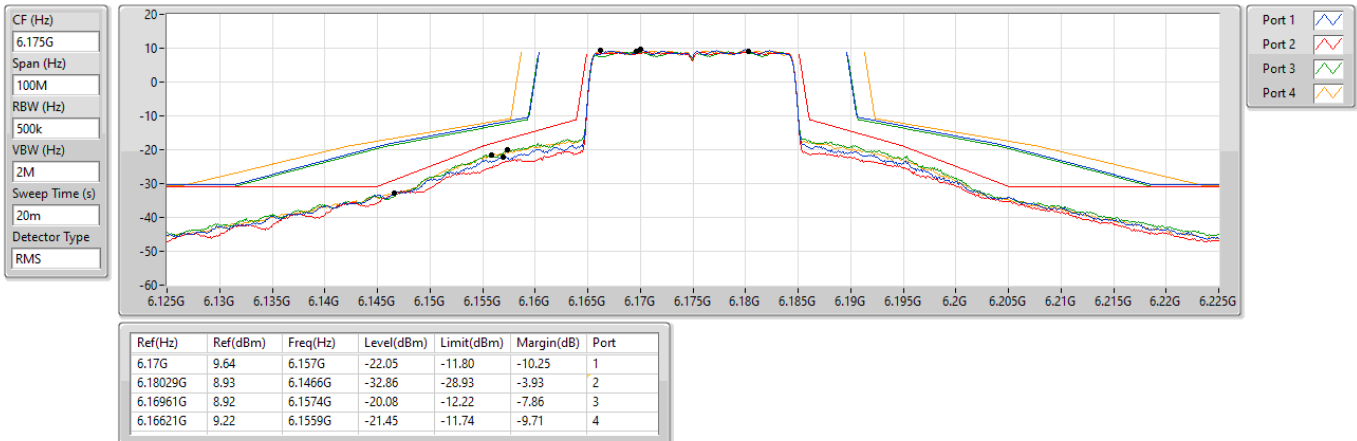

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6415MHz_TX

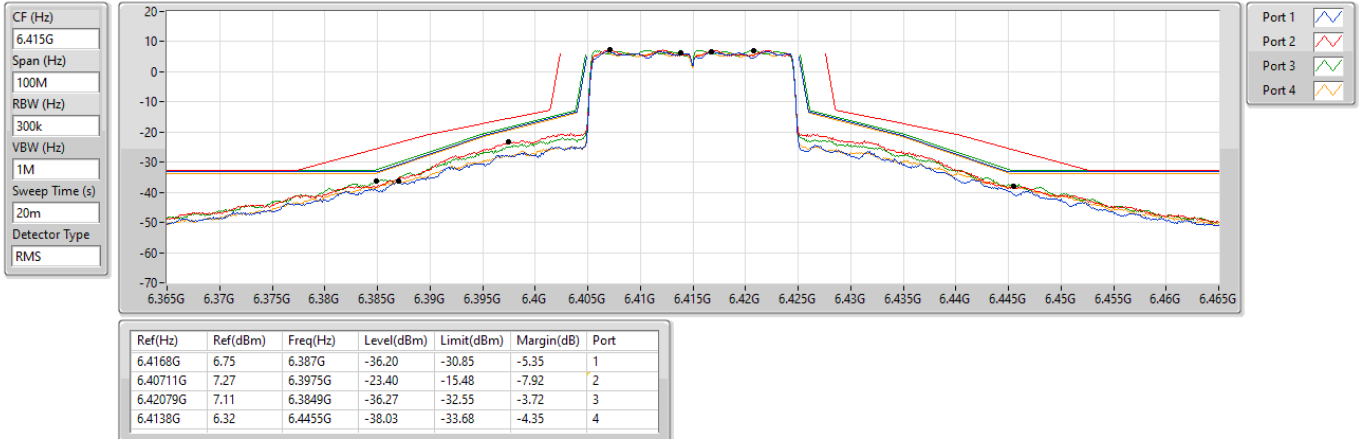

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6535MHz_TX

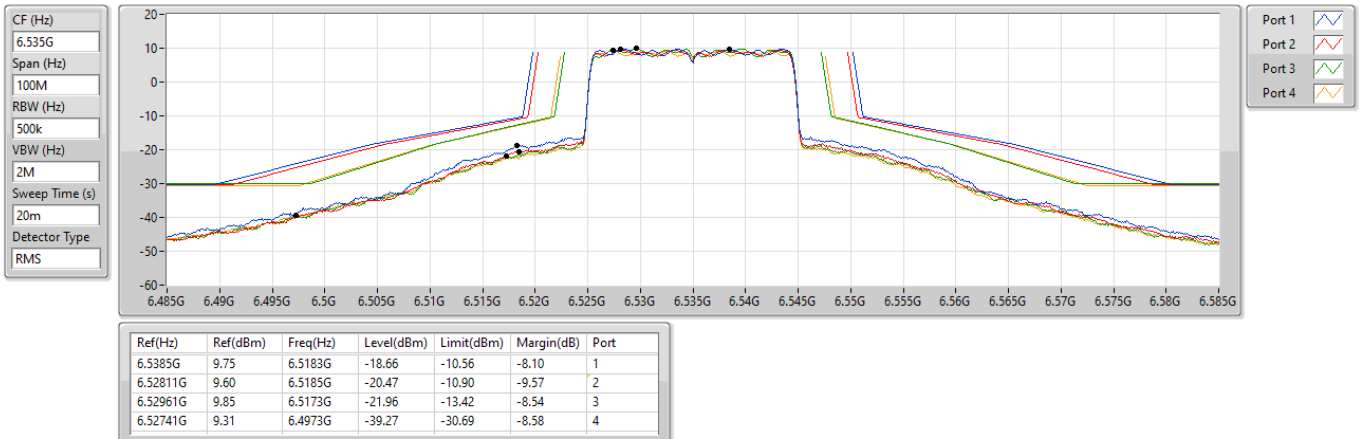

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6715MHz_TX

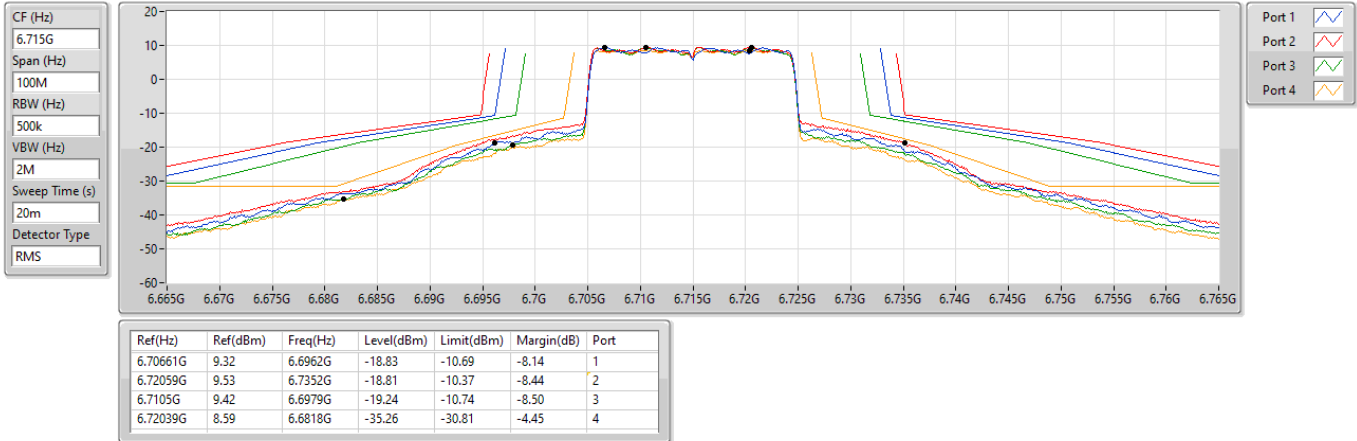

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6855MHz_TX

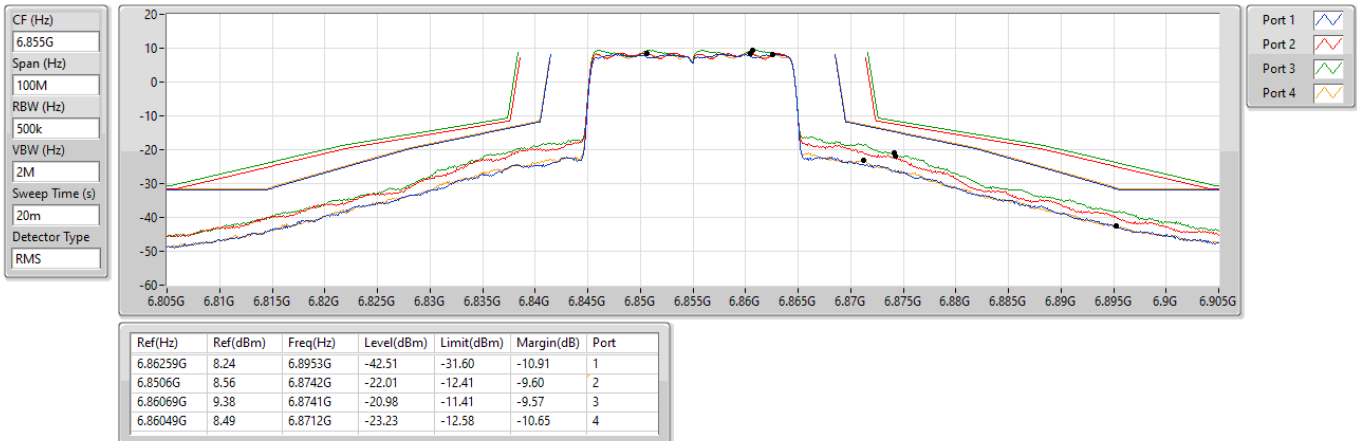

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


5965MHz_TX

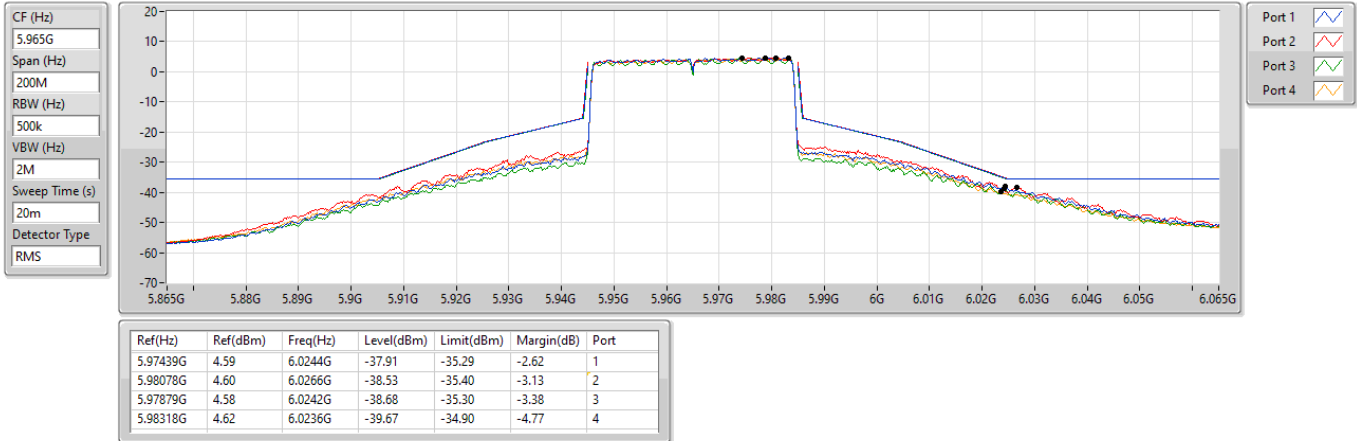

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6165MHz_TX

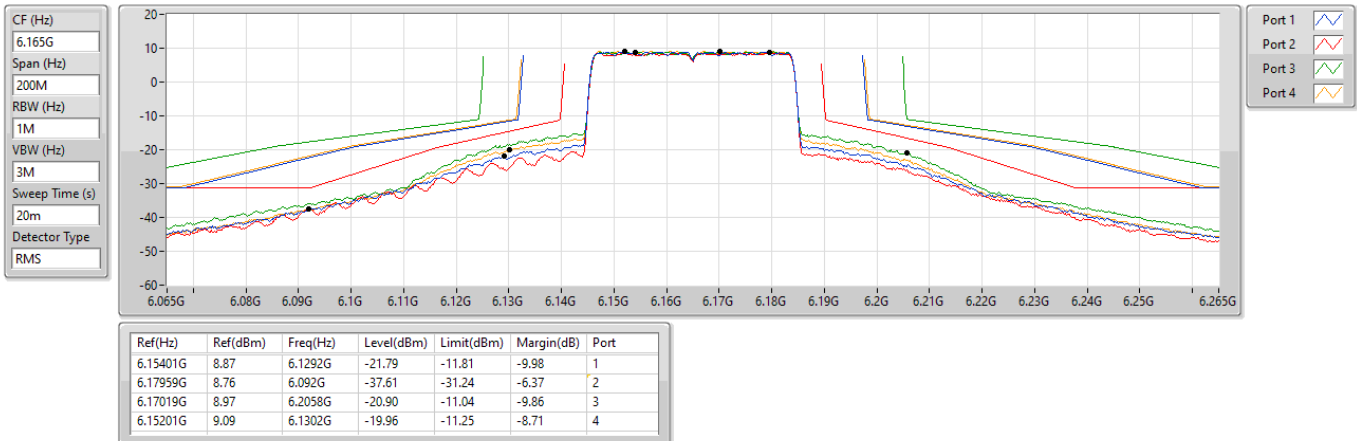

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6405MHz_TX

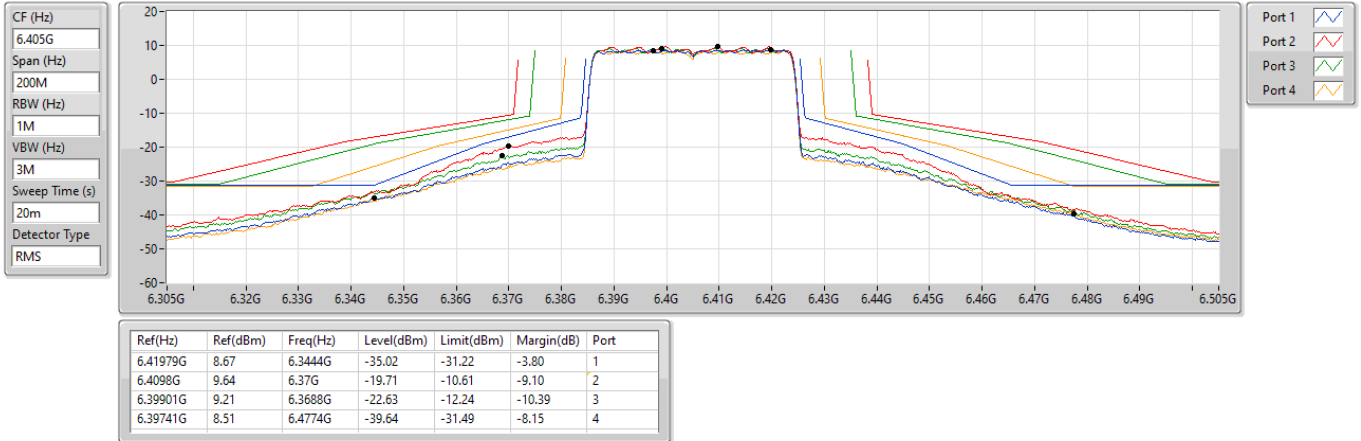

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6565MHz_TX

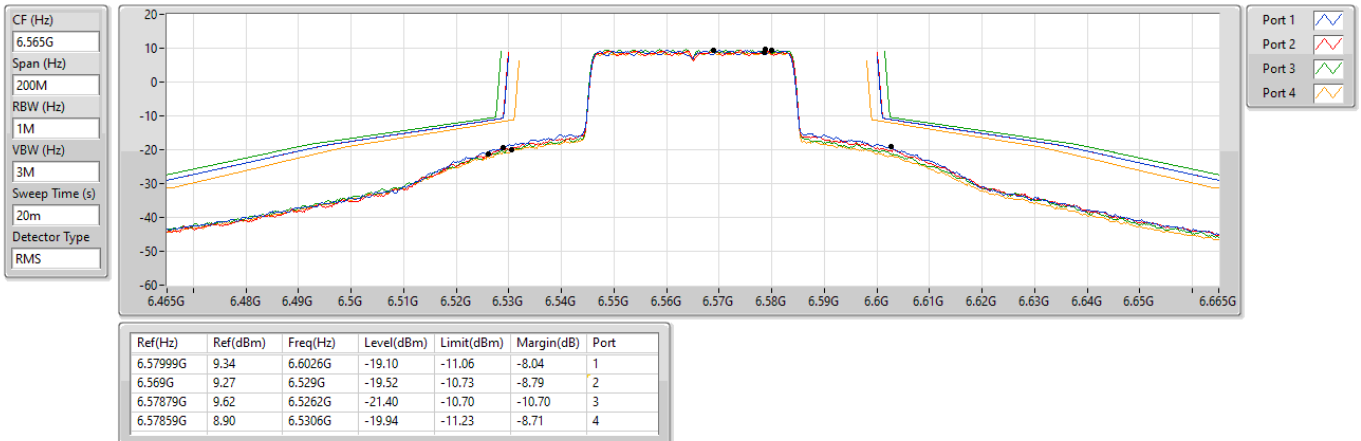

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6725MHz_TX

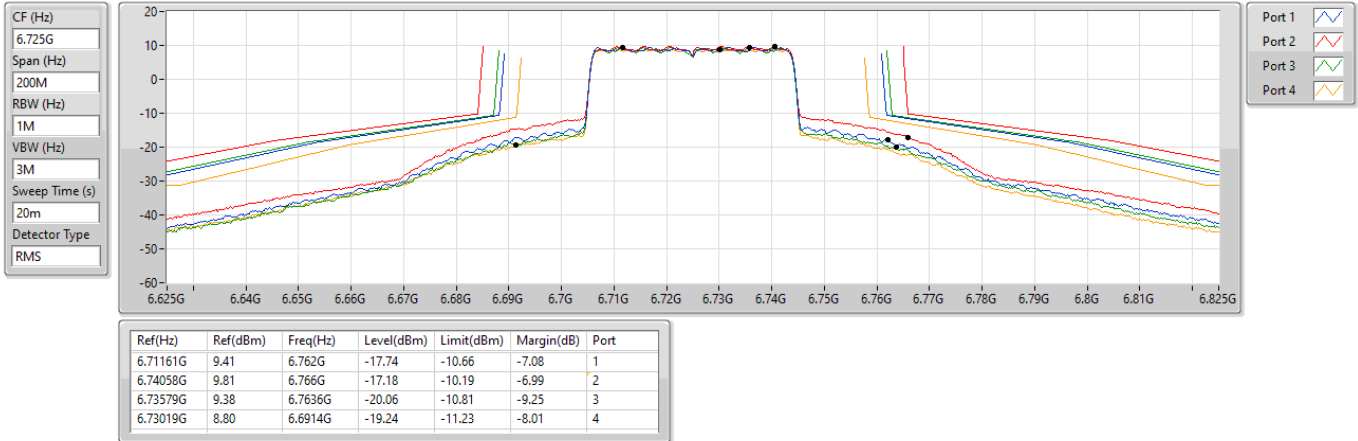

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6845MHz_TX

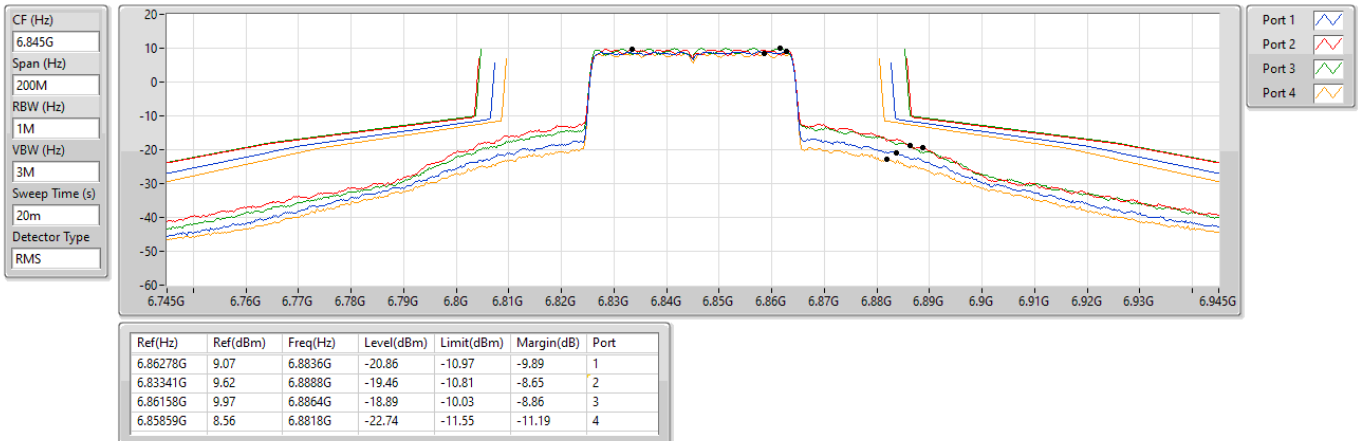

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


5985MHz_TX

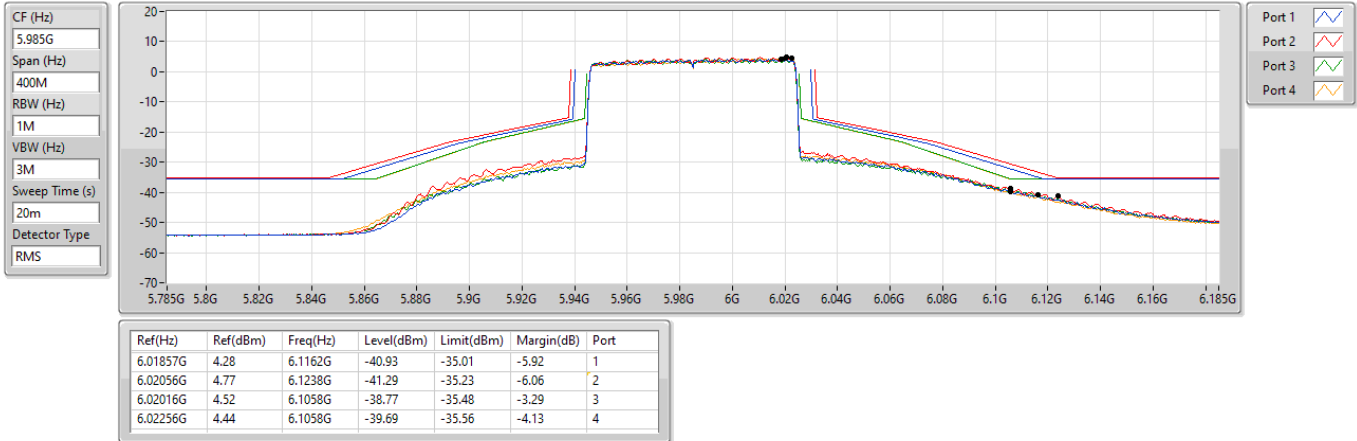

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6145MHz_TX

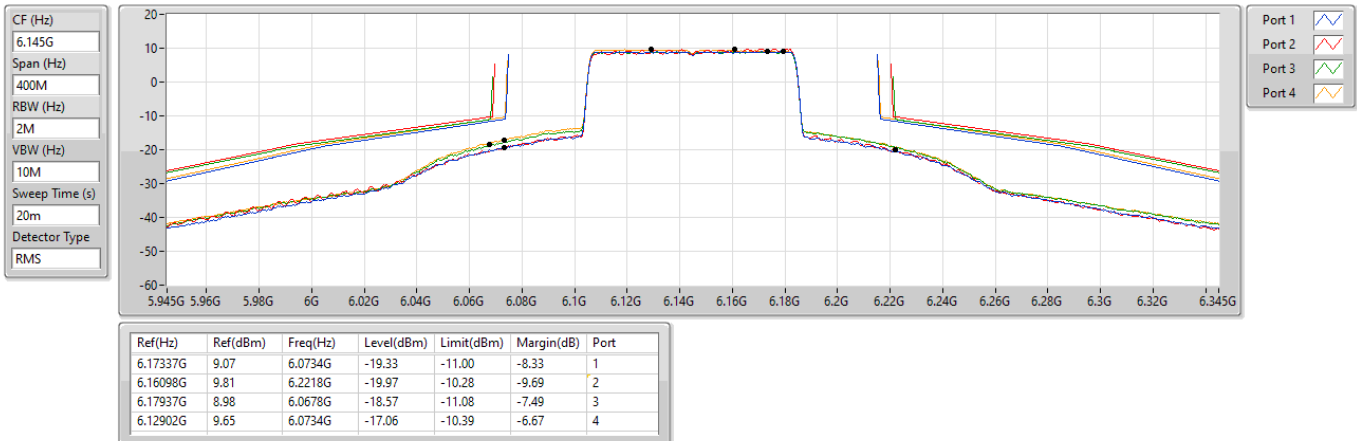

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6385MHz_TX

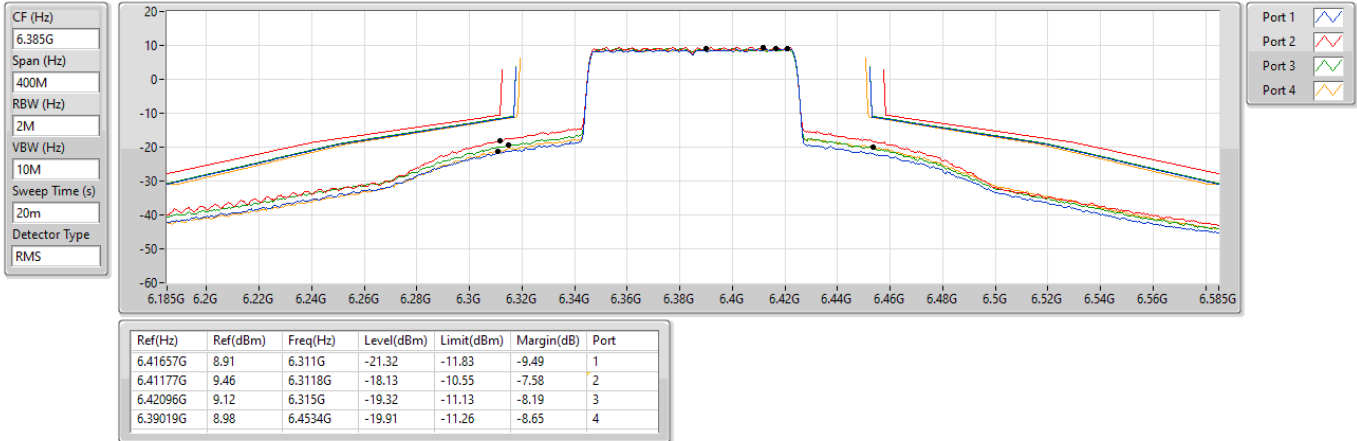

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6625MHz_TX

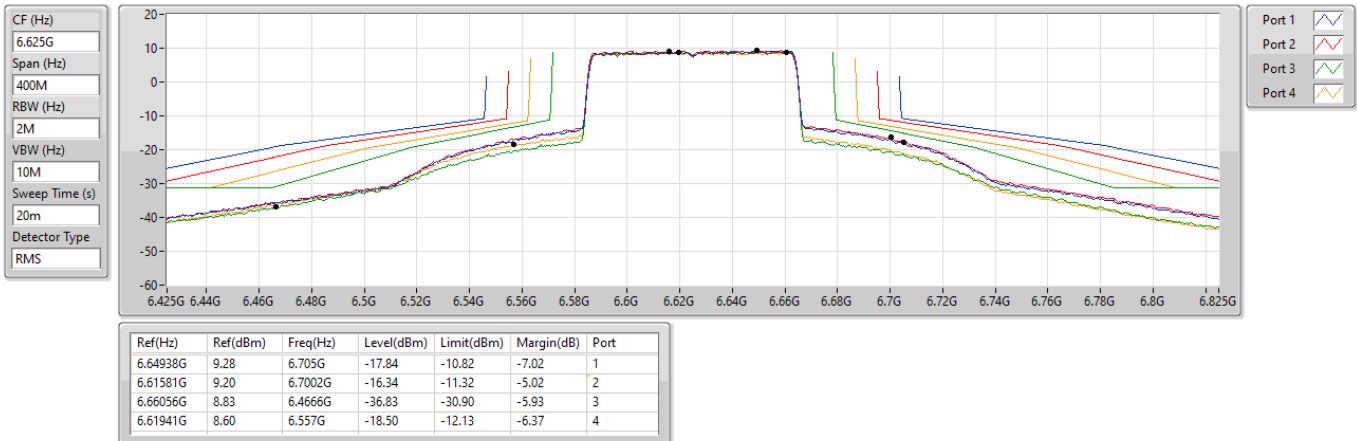

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6705MHz_TX

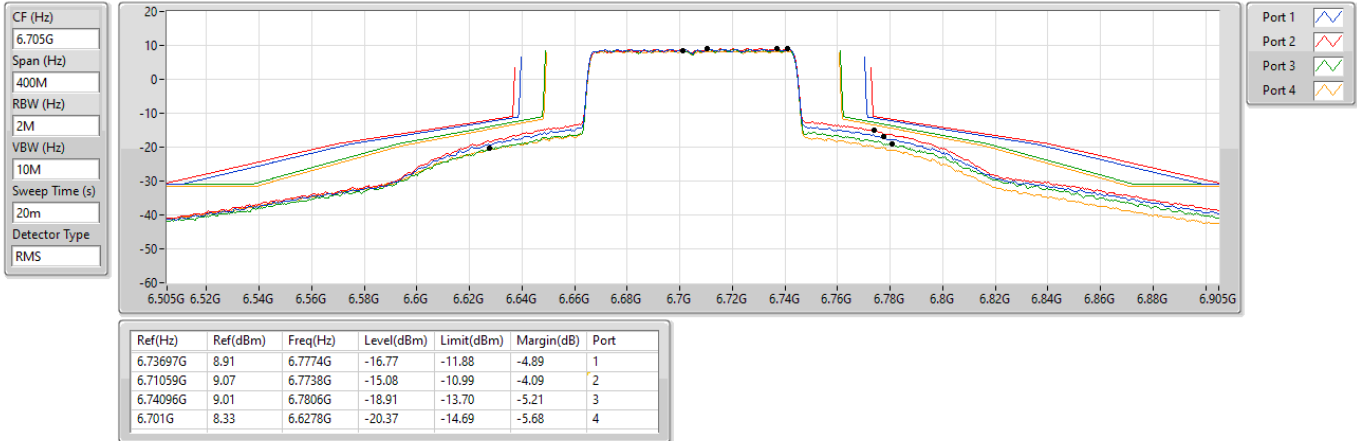

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK

6785MHz_TX

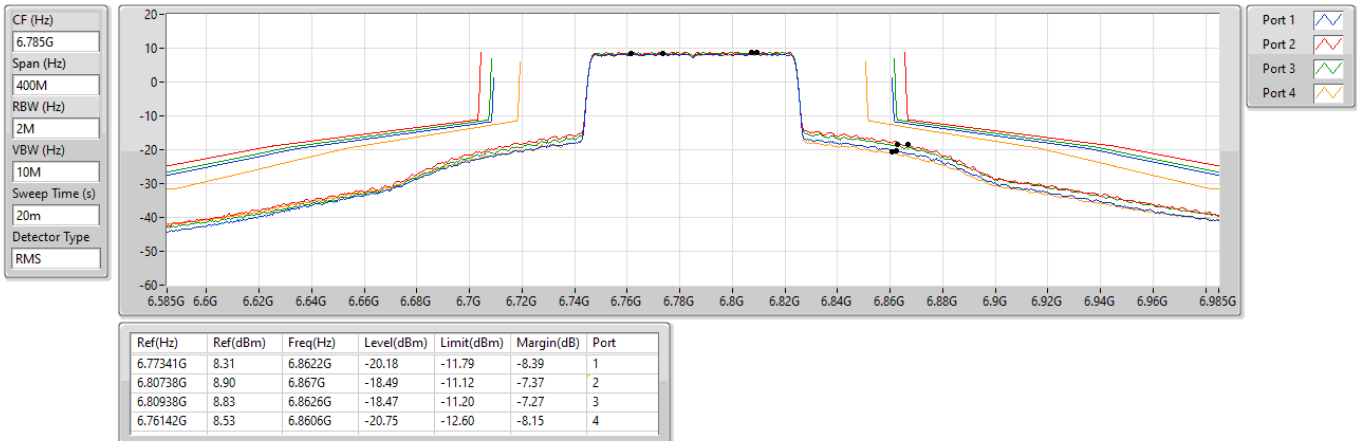




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6025MHz_TX

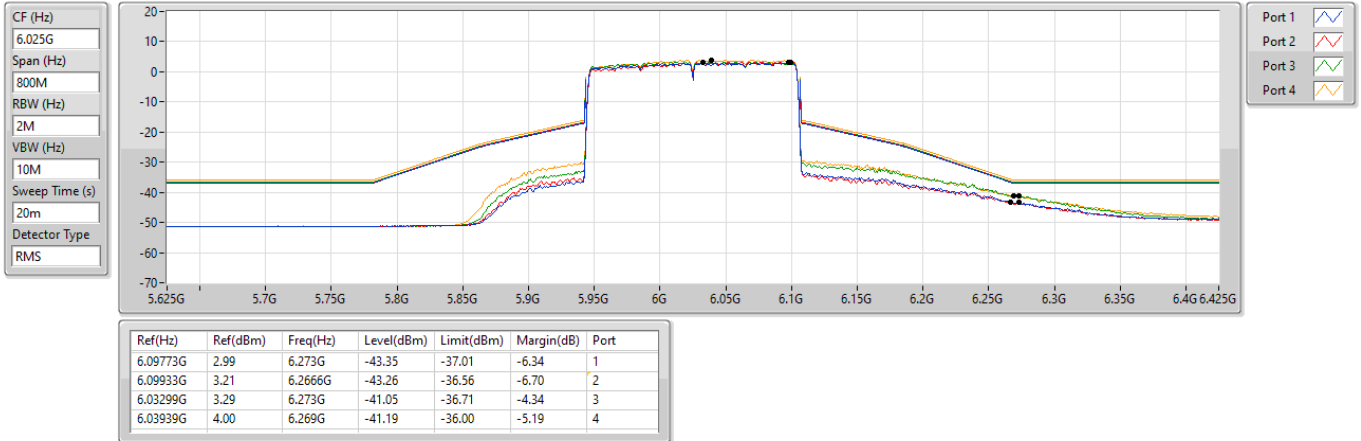

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6185MHz_TX

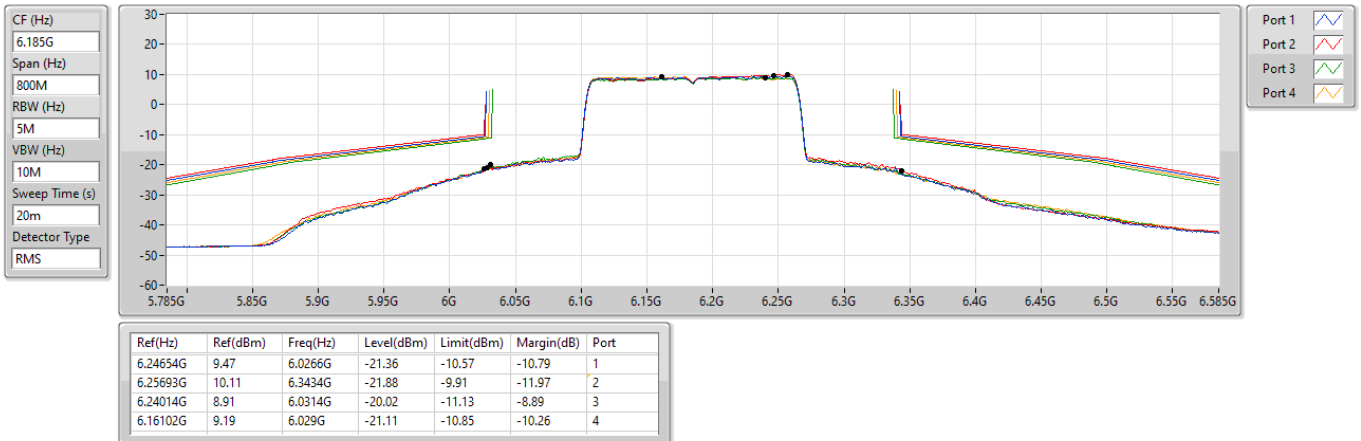

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6345MHz_TX

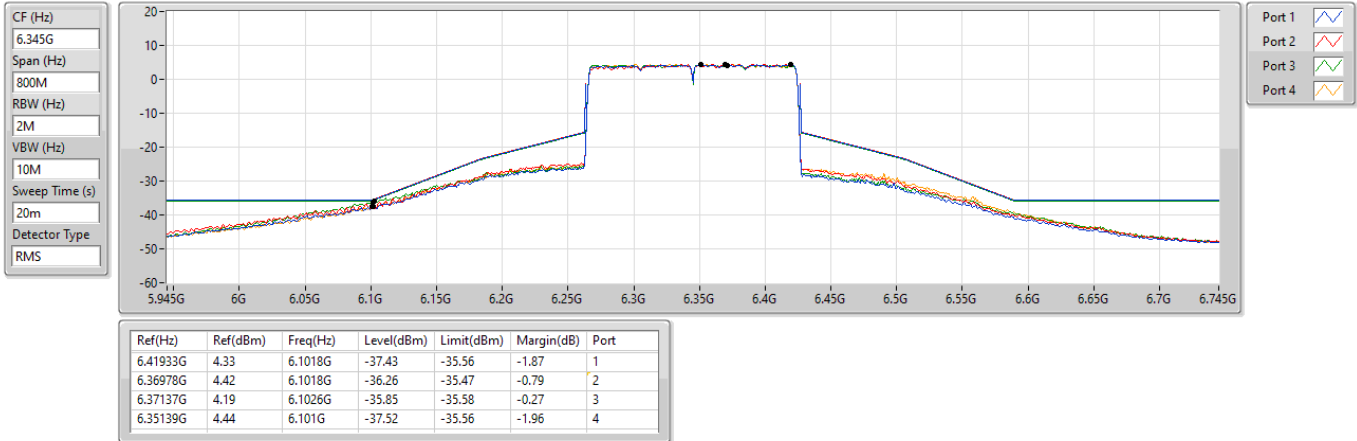

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6665MHz_TX

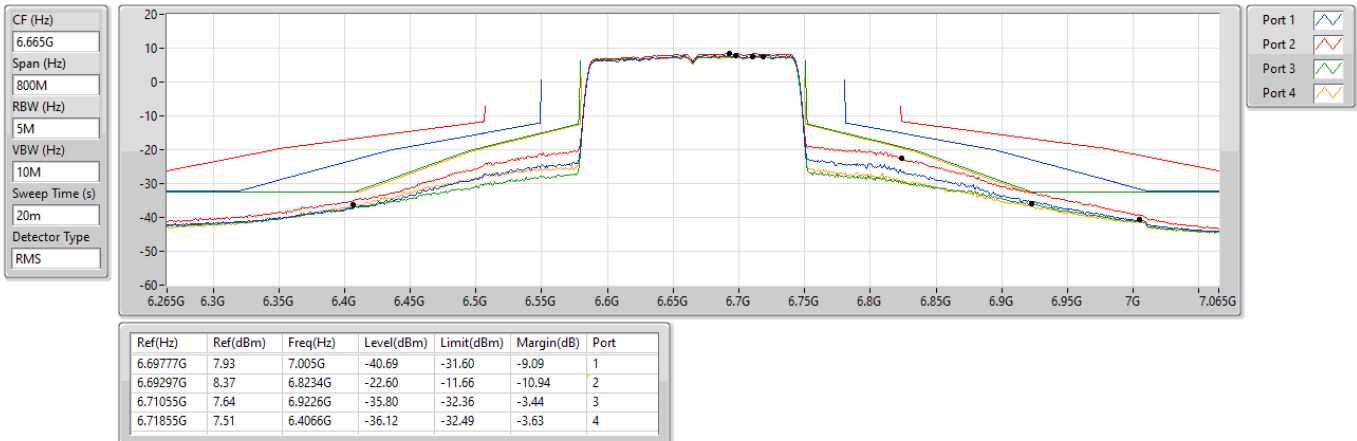

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6105MHz_TX

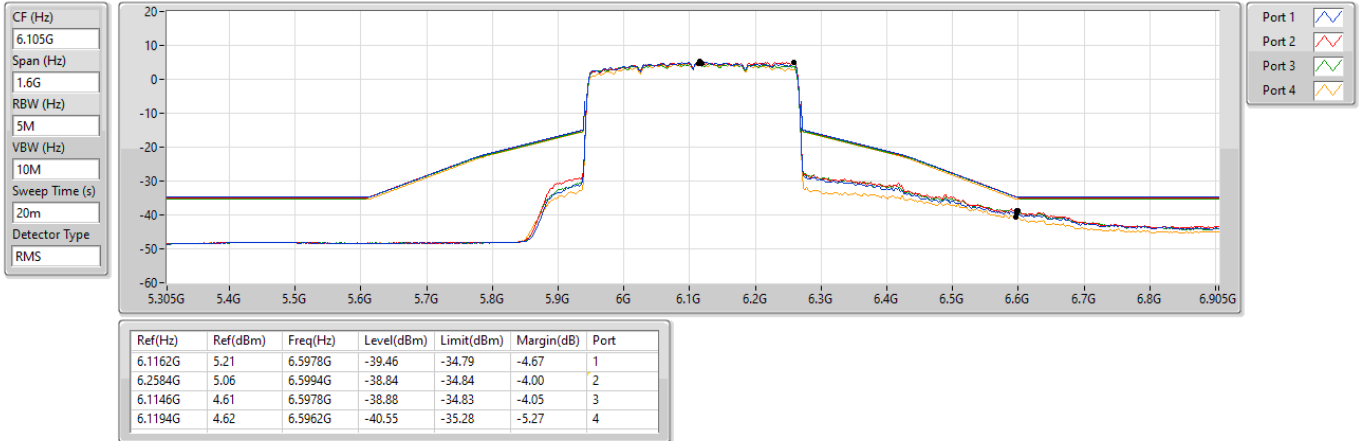

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK

6265MHz_TX

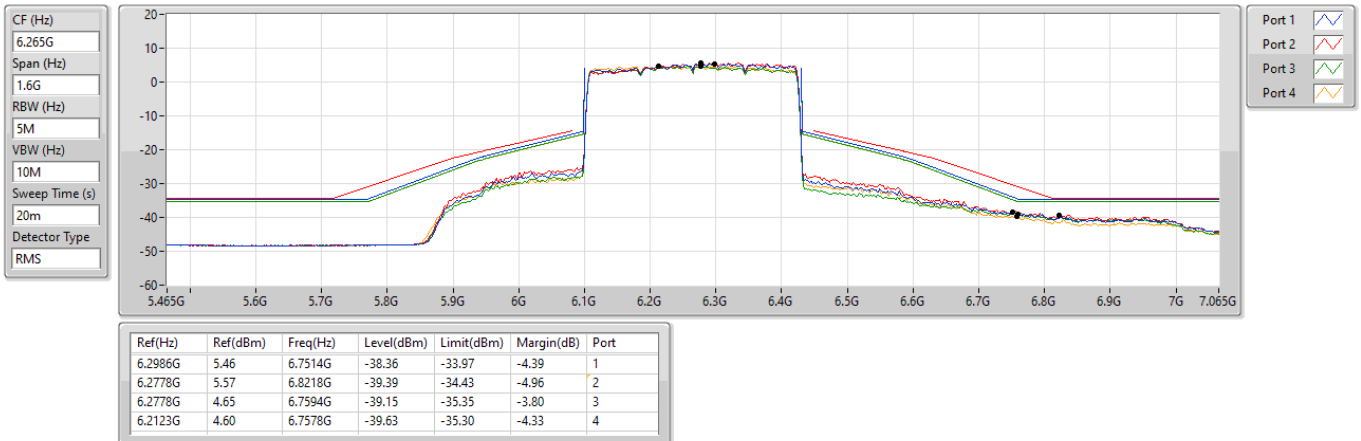

Frequency: 6175 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-7.45	-7.38	-7.21	-7.22
T20°C Vmin	-7.71	-7.29	-7.68	-7.65
T40°C Vnom	-11.02	-10.83	-10.59	-11.03
T30°C Vnom	-10.50	-10.71	-10.09	-10.21
T20°C Vnom	-9.04	-8.89	-8.85	-8.37
T10°C Vnom	-5.50	-5.81	-5.54	-5.53
T0°C Vnom	-4.12	-3.97	-4.33	-3.75
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -30	

Frequency: 6715 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-6.71	-6.18	-7.03	-6.71
T20°C Vmin	-7.47	-7.10	-7.57	-7.43
T40°C Vnom	-9.95	-9.68	-10.30	-9.33
T30°C Vnom	-9.80	-9.91	-9.33	-9.74
T20°C Vnom	-8.42	-8.32	-8.57	-8.13
T10°C Vnom	-5.20	-5.09	-4.75	-4.63
T0°C Vnom	-3.65	-3.06	-3.40	-3.81
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -30	




Modulation Mode	be EHT80-OFDMA	Test Freq. (MHz)	6385
Power Phase	Line		

Test by : Brad Wu

Temperature: 23°C

Humidity: 65%

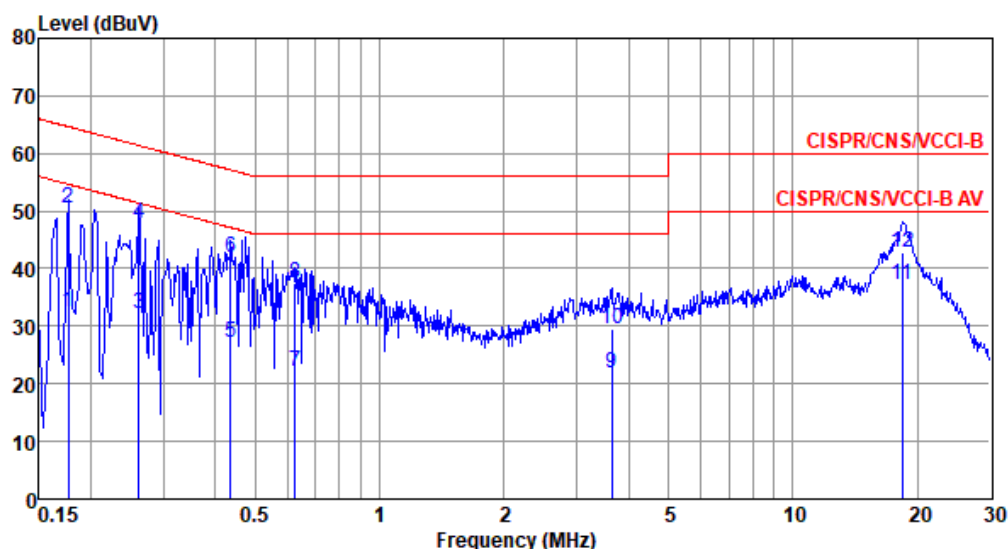

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.177	32.39	54.64	-22.25	22.43	9.64	0.08	0.24	Average
2	0.177	50.50	64.64	-14.14	40.54	9.64	0.08	0.24	QP
3	0.262	32.14	51.38	-19.24	22.14	9.64	0.08	0.28	Average
4	0.262	47.73	61.38	-13.65	37.73	9.64	0.08	0.28	QP
5	0.435	27.24	47.15	-19.91	17.18	9.64	0.09	0.33	Average
6	0.435	41.85	57.15	-15.30	31.79	9.64	0.09	0.33	QP
7	0.624	22.21	46.00	-23.79	12.12	9.64	0.09	0.36	Average
8	0.624	37.35	56.00	-18.65	27.26	9.64	0.09	0.36	QP
9	3.642	21.73	46.00	-24.27	11.38	9.67	0.21	0.47	Average
10	3.642	29.63	56.00	-26.37	19.28	9.67	0.21	0.47	QP
11*	18.426	37.30	50.00	-12.70	26.47	9.69	0.53	0.61	Average
12	18.426	42.93	60.00	-17.07	32.10	9.69	0.53	0.61	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	be EHT80-OFDMA	Test Freq. (MHz)	6385
Power Phase	Neutral		

Test by : Brad Wu

Temperature: 23°C

Humidity: 65%

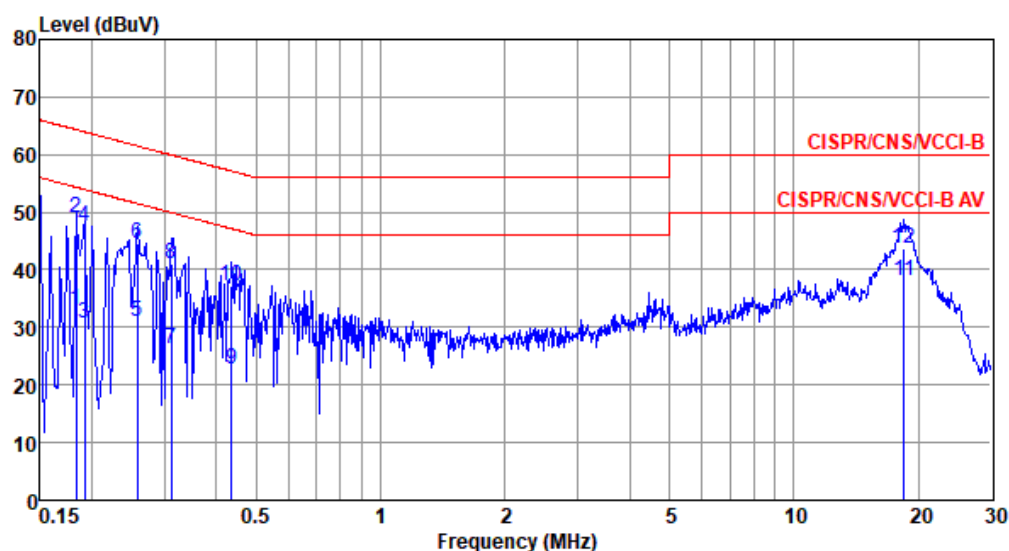

	Freq MHz	Level dBUV	Limit dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.183	33.16	54.33	-21.17	23.26	9.64	0.08	0.18	Average
2	0.183	49.06	64.33	-15.27	39.16	9.64	0.08	0.18	QP
3	0.192	30.84	53.93	-23.09	20.93	9.64	0.08	0.19	Average
4	0.192	47.65	63.93	-16.28	37.74	9.64	0.08	0.19	QP
5	0.258	30.92	51.51	-20.59	20.98	9.64	0.08	0.22	Average
6	0.258	44.66	61.51	-16.85	34.72	9.64	0.08	0.22	QP
7	0.312	26.28	49.93	-23.65	16.32	9.63	0.09	0.24	Average
8	0.312	41.06	59.93	-18.87	31.10	9.63	0.09	0.24	QP
9	0.435	22.84	47.15	-24.31	12.85	9.63	0.09	0.27	Average
10	0.435	37.21	57.15	-19.94	27.22	9.63	0.09	0.27	QP
11*	18.524	38.08	50.00	-11.92	27.14	9.78	0.54	0.62	Average
12	18.524	43.79	60.00	-16.21	32.85	9.78	0.54	0.62	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).