


FCC Co-Location Test Report

FCC ID : MXF-WRTQ411BE
Equipment : Wi-Fi 7 Tri-Band 5G FWA
Model No. : WNRFQQ-113BE
Brand Name : Gemtek
Applicant : Gemtek Technology Co., Ltd.
Address : No. 15-1 Zhonghua Road, Hsinchu Industrial
Park, Hukou, Hsinchu, Taiwan, 30352.
Standard : 47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
47 CFR FCC Part 22 Subpart H
47 CFR FCC Part 24 Subpart E
47 CFR FCC Part 27
47 CFR FCC Part 90
47 CFR FCC Part 96
Received Date : Apr. 17, 2026
Tested Date : May 11 ~ May 12, 2026

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Manager

Approved by:


Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	The Equipment List	8
1.3	Test Standards	9
1.4	Reference Guidance	9
1.5	Deviation from Test Standard and Measurement Procedure.....	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION.....	10
2.1	Testing Facility	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Unwanted Emissions into Restricted Frequency Bands	11
4	TEST LABORATORY INFORMATION	14

Appendix A. Unwanted Emissions Into Restricted Frequency Bands

Release Record

Report No.	Version	Description	Issued Date
FR613001-01CO	Rev. 01	Initial issue	Jul. 17, 2026

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.209 2.1053 / 22.917(a) 2.1053 / 24.238(a) 2.1053 / 27.53(c)(2) 2.1053 / 27.53 (f) 2.1053 / 27.53 (g) 2.1053 / 27.53 (h) 2.1053 / 27.53(a)(4) 2.1053 / 27.53(m)(4) 2.1053 / 27.53(n)(2) 2.1053 / 27.53(l)(2) 2.1053 / 90.691 2.1053 / 90.543(f) 2.1053 / 96.41	Radiated Emissions	[dBuV/m at 3m]: 45.52MHz 36.79 (Margin -3.21dB) - PK	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

WLAN	
Operating Frequency	802.11b/g/n/ax/be: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax/be: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz, 5745 ~ 5825 MHz 5925 MHz ~ 6425 MHz; 6425 MHz ~ 6525 MHz; 6525 MHz ~ 6875 MHz; 6875 MHz ~ 7125 MHz
Modulation Type	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax/be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM/ 4096QAM)

The device contains a certified WWAN module, FCC ID: ZQ6-AC5035M2

LTE	
Operating Frequency	B2 / B4 / B5 / B7 / B12 / B13 / B14 / B17 / B25 / B26 B30 / B38 / B41 / B42 / B43 / B48 / B66 / B70 / B71
Modulation Type	QPSK / 16QAM / 64QAM/ 256QAM
NR	
Operating Frequency	n2 / n5 / n7 / n12 / n13 / n14 / n25 / n26 / n30 n38 / n41 / n66 / n70 / n71 / n77 / n78
Modulation Type	DFT-s-OFDM PI/2 BPSK / QPSK / 16QAM / 64QAM / 256 QAM CP-OFDM QPSK / 16QAM / 64QAM / 256 QAM

1.1.2 Antenna Details

2.4GHz

Model	Type	Connector	Gain (dBi)
2.4G_ANT1	Dipole	UFL	2.12
2.4G_ANT2	Dipole	UFL	1.81
2.4G_ANT3	Dipole	UFL	2.01
2.4G_ANT4	Dipole	UFL	2.33

5GHz

Ant. No.	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)			
				5150~5250	5250~5350	5470~5725	5725~5850
1	5G_ANT1	Dipole	UFL	2.16	2.77	2.16	2.58
2	5G_ANT2	Dipole	UFL	2.22	2.84	2.97	2.05
3	5G_ANT3	Dipole	UFL	2.76	2.63	2.69	2.92
4	5G_ANT4	Dipole	UFL	2.19	2.53	2.71	2.22

6GHz

Model	Type	Connector	Operating Frequencies (MHz) / Gain (dBi)			
			5925~6425	6425~6525	6525~6875	6875~7125
6G_ANT1	Dipole	UFL	2.07	2.63	2.31	2.18
6G_ANT2	Dipole	UFL	2.12	2.55	2.57	2.54
6G_ANT3	Dipole	UFL	2.16	2.6	2.27	2.59
6G_ANT4	Dipole	UFL	2.62	2.13	2.4	2.45

LTE

Brand	PN	Type	Connector	LTE band	Gain (dBi)
TSKY	A8-A003-00199	Dipole	SMA	Band 2, 4, 25, 66	2.51
				Band 5, 13, 26	-1.18
				Band 7, 30	4.17
				Band 12, 17	-0.71
				Band 14	-0.18
				Band 38, 41	4.2
				Band 42	3.06
				Band 43	2.46
				Band 48	3.46
				Band 70	3.51
				Band 71	-0.47

5G NR

Brand	PN	Type	Connector	5G NR band	Gain (dBi)
TSKY	A8-A003-00199	Dipole	R-SMA	n2, 25, 66	2.51
				n5, 13, 26	-1.18
				n7, 30	4.17
				n12	-0.71
				n14	-0.18
				n38, 41	4.2
				n70	3.51
				n71	-0.47
				n77	3.26
				n78	3.06

1.1.3 Power Supply Type of Equipment under Test (EUT)

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: MOSO Model: MS-V4000R120-050A0-US I/P: 100-240Vac, 50/60Hz, 1.3A max. O/P: 12V=4A, 48W Power Line: 1.5m non-shielded without core
2	AC adapter	Brand: LUCENT TRANS Model: 1A133-LHHH-F I/P: 100-240Vac, 50/60Hz, 1.4A max. O/P: 12V=4A, 48W Power Line: 1.5m non-shielded without core
3	RJ45 (RAPID CONN)	1.5m non-shielded without core
4	RJ45 (TUNGLI)	1.5m non-shielded without core

1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	May 11 ~ May 12, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Apr. 02, 2026	Apr. 01, 2027
Spectrum Analyzer	R&S	FSV40	101498	Nov. 06, 2025	Nov. 05, 2026
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2025	Nov. 16, 2026
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Sep. 05, 2025	Sep. 04, 2026
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 19, 2025	Dec. 18, 2026
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 28, 2025	Nov. 27, 2026
Preamplifier	EMC	EMC02325	980225	Jun. 13, 2025	Jun. 12, 2026
Preamplifier	EMC	EMC118A45SE	980898	Jun. 24, 2025	Jun. 23, 2026
Preamplifier	EMC	EMC184045SE	980903	Aug. 08, 2025	Aug. 07, 2026
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 01, 2025	Sep. 30, 2026
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 01, 2025	Sep. 30, 2026
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 01, 2025	Sep. 30, 2026
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 01, 2025	Sep. 30, 2026
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 01, 2025	Sep. 30, 2026
RF Cable	EMC	EMC104-35M-35M- 3000	210922	Oct. 01, 2025	Sep. 30, 2026
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 01, 2025	Sep. 30, 2026
Attenuator	Pasternack	PE7005-10	10-1	Oct. 01, 2025	Sep. 30, 2026
HIGHPASS FILTER 1.5-15G	WHK	WHK1.5/15G-10ST	21	Oct. 01, 2025	Sep. 30, 2026
HIGHPASS FILTER 3.1-18G	WHK	WHK3.1/18G-10SS	39	Oct. 01, 2025	Sep. 30, 2026
HIGHPASS FILTER 1-6G	WHK	WHKS1000-6SS	12	Oct. 01, 2025	Sep. 30, 2026
HIGHPASS FILTER	WI	WHKX4.5-18G-10S S	37	Oct. 01, 2025	Sep. 30, 2026
LOWPASS FILTER	WI	WLKS1100-12SS	2	Oct. 01, 2025	Sep. 30, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.3 Test Standards

47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
ANSI C63.10-2020 + Cor.1-2023
ANSI C63.4-2014 + C63.4a-2017
47 CFR FCC Part 22 Subpart H
47 CFR FCC Part 24 Subpart E
47 CFR FCC Part 27
47 CFR FCC Part 90
47 CFR FCC Part 96
ANSI C63.26-2015

1.4 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
FCC KDB 412172 D01 Determining ERP and EIRP v01r01
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

1.5 Deviation from Test Standard and Measurement Procedure

None

1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Unwanted Emission $\leq$ 1GHz	± 3.41 dB
Unwanted Emission $>$ 1GHz	± 4.59 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item: Unwanted Emissions	
Test Mode	Modulation
1	5G NR n13 BW:5MHz 779.5MHz (CH155900) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz
2	5G NR n26 BW:5MHz 846.5MHz (CH 169300) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz
3	5G NR n70 BW:5MHz 1707.5MHz (CH 341500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz
4	5G NR n25 BW:5MHz 1907.5MHz (CH 381500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz
5	5G NR n30 BW:5MHz 2307.5MHz (CH 461500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz
6	5G NR n41 BW:20MHz 2679.99MHz (CH 535998) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz
7	5G NR n77 BW:10MHz 3455.01MHz (CH 630334) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz
NOTE: The selected channel is the maximum power channel of Wi-Fi + 5GNR mode.	

3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Un-restricted band emissions above 1GHz Limit		
Operating Band	PK Limit	AV Limit
5.925 – 7.125 GHz	e.i.r.p. -7 dBm [88.2 dBuV/m@3m]	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).		

3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.1.3 Test Setup

Radiated Emissions below 1 GHz

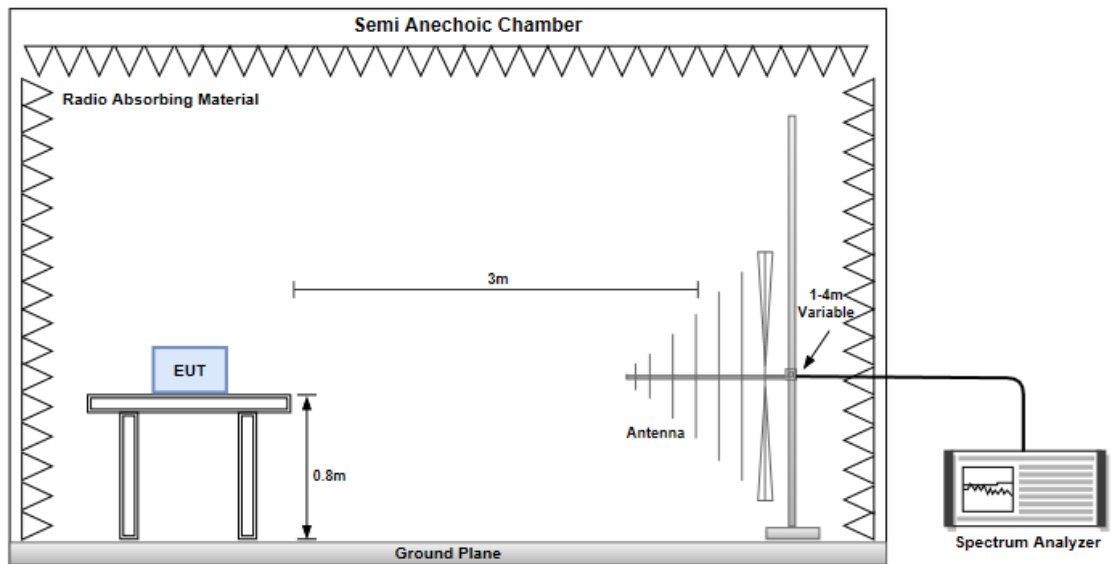

Radiated Emissions above 1 GHz

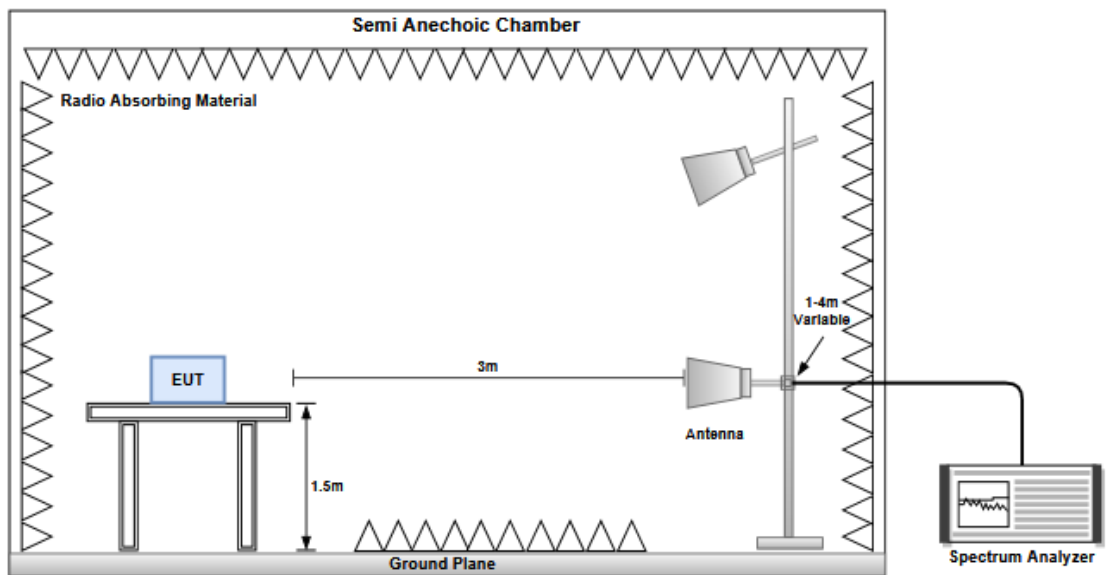

3.1.4 Test Results

Refer to Appendix A.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Zhonghe

Tel: 886-2-2222-0288

1F, No. 6, Jiankang Road, Zhonghe
District, New Taipei City 235045,
Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.


Tel: 886-3-271-8666


Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==

Unwanted Emissions (Below 1GHz)

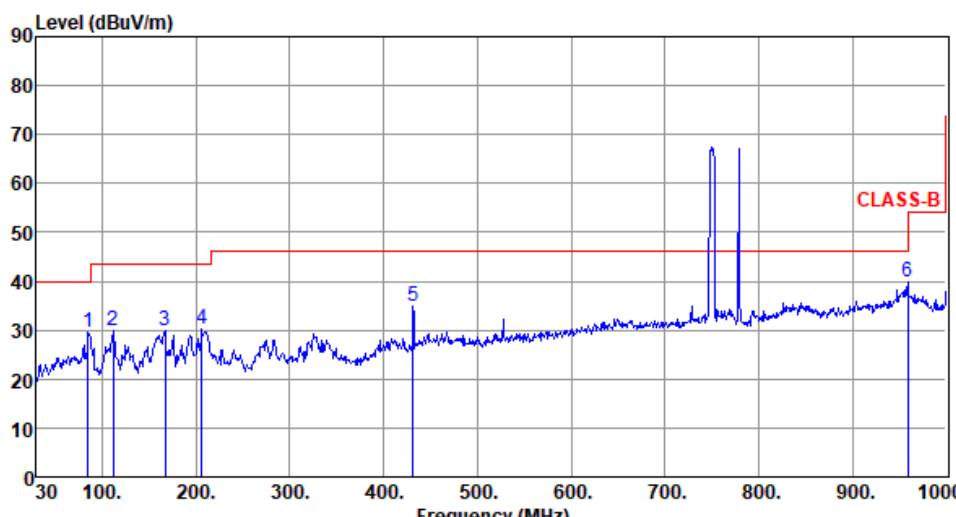Modulation	5G NR n13 BW:5MHz 779.5MHz (CH155900) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																																																		
Polarization	Horizontal			Mode			1																																																																																												
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>85.29</td><td>29.44</td><td>40.00</td><td>-10.56</td><td>44.10</td><td>-14.66</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>111.48</td><td>30.04</td><td>43.50</td><td>-13.46</td><td>41.77</td><td>-11.73</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>166.77</td><td>30.04</td><td>43.50</td><td>-13.46</td><td>39.13</td><td>-9.09</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>206.54</td><td>30.36</td><td>43.50</td><td>-13.14</td><td>42.27</td><td>-11.91</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>431.58</td><td>34.73</td><td>46.00</td><td>-11.27</td><td>39.11</td><td>-4.38</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>959.26</td><td>39.77</td><td>46.00</td><td>-6.23</td><td>34.03</td><td>5.74</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	85.29	29.44	40.00	-10.56	44.10	-14.66	Peak	---	---	2	111.48	30.04	43.50	-13.46	41.77	-11.73	Peak	---	---	3	166.77	30.04	43.50	-13.46	39.13	-9.09	Peak	---	---	4	206.54	30.36	43.50	-13.14	42.27	-11.91	Peak	---	---	5	431.58	34.73	46.00	-11.27	39.11	-4.38	Peak	---	---	6	959.26	39.77	46.00	-6.23	34.03	5.74	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
					dBuV			cm	deg																																																																																										
1	85.29	29.44	40.00	-10.56	44.10	-14.66	Peak	---	---																																																																																										
2	111.48	30.04	43.50	-13.46	41.77	-11.73	Peak	---	---																																																																																										
3	166.77	30.04	43.50	-13.46	39.13	-9.09	Peak	---	---																																																																																										
4	206.54	30.36	43.50	-13.14	42.27	-11.91	Peak	---	---																																																																																										
5	431.58	34.73	46.00	-11.27	39.11	-4.38	Peak	---	---																																																																																										
6	959.26	39.77	46.00	-6.23	34.03	5.74	Peak	---	---																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			

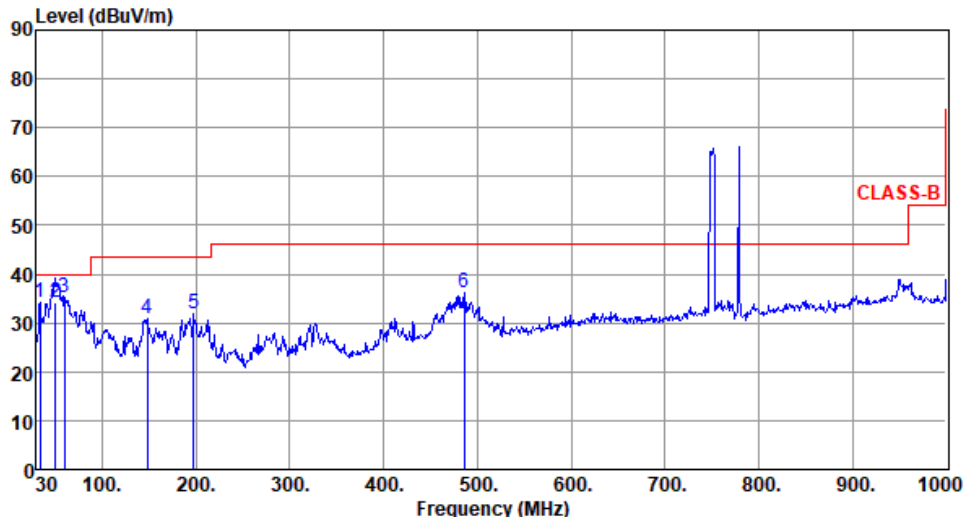
Modulation		5G NR n13 BW:5MHz 779.5MHz (CH155900) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																													
Polarization		Vertical		Mode		1																																																																									
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																															
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>33.88</td><td>34.18</td><td>40.00</td><td>-5.82</td><td>43.79</td><td>-9.61</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>50.30</td><td>34.09</td><td>40.00</td><td>-5.91</td><td>42.34</td><td>-8.25</td><td>QP</td><td>126</td><td>337</td></tr><tr><td>3</td><td>60.07</td><td>35.29</td><td>40.00</td><td>-4.71</td><td>44.13</td><td>-8.84</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>148.34</td><td>30.86</td><td>43.50</td><td>-12.64</td><td>39.68</td><td>-8.82</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>197.81</td><td>31.93</td><td>43.50</td><td>-11.57</td><td>43.73</td><td>-11.80</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>485.90</td><td>36.23</td><td>46.00</td><td>-9.77</td><td>39.37</td><td>-3.14</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	33.88	34.18	40.00	-5.82	43.79	-9.61	Peak	---	---	2	50.30	34.09	40.00	-5.91	42.34	-8.25	QP	126	337	3	60.07	35.29	40.00	-4.71	44.13	-8.84	Peak	---	---	4	148.34	30.86	43.50	-12.64	39.68	-8.82	Peak	---	---	5	197.81	31.93	43.50	-11.57	43.73	-11.80	Peak	---	---	6	485.90	36.23	46.00	-9.77	39.37	-3.14	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	33.88	34.18	40.00	-5.82	43.79	-9.61	Peak	---	---																																																																						
2	50.30	34.09	40.00	-5.91	42.34	-8.25	QP	126	337																																																																						
3	60.07	35.29	40.00	-4.71	44.13	-8.84	Peak	---	---																																																																						
4	148.34	30.86	43.50	-12.64	39.68	-8.82	Peak	---	---																																																																						
5	197.81	31.93	43.50	-11.57	43.73	-11.80	Peak	---	---																																																																						
6	485.90	36.23	46.00	-9.77	39.37	-3.14	Peak	---	---																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																															



Modulation	5G NR n26 BW:5MHz 846.5MHz (CH 169300) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Horizontal			Mode			2		
Test By :Akun Chung Temperature(°C):26 Humidity(%):67									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	86.26	29.11	40.00	-10.89	43.91	-14.80	Peak	---	---
2	111.48	29.55	43.50	-13.95	41.28	-11.73	Peak	---	---
3	165.80	29.67	43.50	-13.83	38.69	-9.02	Peak	---	---
4	226.91	30.02	46.00	-15.98	41.86	-11.84	Peak	---	---
5	325.85	29.81	46.00	-16.19	37.04	-7.23	Peak	---	---
6	431.58	34.48	46.00	-11.52	38.86	-4.38	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

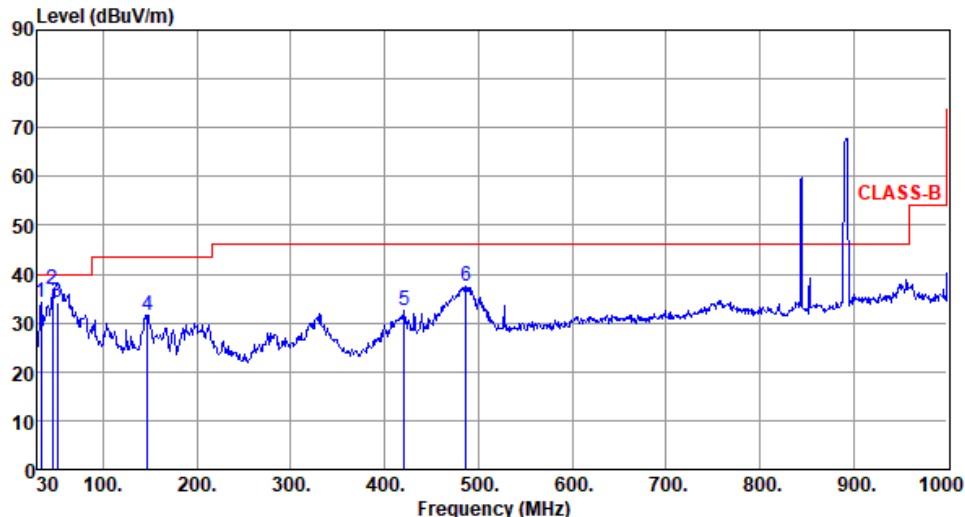

Modulation	5G NR n26 BW:5MHz 846.5MHz (CH 169300) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																																																
Polarization	Vertical		Mode		2																																																																																												
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>33.88</td><td>34.12</td><td>40.00</td><td>-5.88</td><td>43.73</td><td>-9.61</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>45.52</td><td>36.79</td><td>40.00</td><td>-3.21</td><td>45.18</td><td>-8.39</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>51.34</td><td>34.25</td><td>40.00</td><td>-5.75</td><td>42.43</td><td>-8.18</td><td>QP</td><td>120</td><td>339</td></tr><tr><td>4</td><td>147.37</td><td>31.69</td><td>43.50</td><td>-11.81</td><td>40.43</td><td>-8.74</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>420.91</td><td>32.63</td><td>46.00</td><td>-13.37</td><td>37.29</td><td>-4.66</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>486.87</td><td>37.37</td><td>46.00</td><td>-8.63</td><td>40.47</td><td>-3.10</td><td>Peak</td><td>---</td><td>---</td></tr></table>									Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	33.88	34.12	40.00	-5.88	43.73	-9.61	Peak	---	---	2	45.52	36.79	40.00	-3.21	45.18	-8.39	Peak	---	---	3	51.34	34.25	40.00	-5.75	42.43	-8.18	QP	120	339	4	147.37	31.69	43.50	-11.81	40.43	-8.74	Peak	---	---	5	420.91	32.63	46.00	-13.37	37.29	-4.66	Peak	---	---	6	486.87	37.37	46.00	-8.63	40.47	-3.10	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																								
1	33.88	34.12	40.00	-5.88	43.73	-9.61	Peak	---	---																																																																																								
2	45.52	36.79	40.00	-3.21	45.18	-8.39	Peak	---	---																																																																																								
3	51.34	34.25	40.00	-5.75	42.43	-8.18	QP	120	339																																																																																								
4	147.37	31.69	43.50	-11.81	40.43	-8.74	Peak	---	---																																																																																								
5	420.91	32.63	46.00	-13.37	37.29	-4.66	Peak	---	---																																																																																								
6	486.87	37.37	46.00	-8.63	40.47	-3.10	Peak	---	---																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																	



Modulation	5G NR n70 BW:5MHz 1707.5MHz (CH 341500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																													
Polarization	Horizontal		Mode		3																																																																									
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																														
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>106.63</td><td>32.44</td><td>43.50</td><td>-11.06</td><td>44.69</td><td>-12.25</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>191.99</td><td>31.29</td><td>43.50</td><td>-12.21</td><td>42.61</td><td>-11.32</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>331.67</td><td>31.29</td><td>46.00</td><td>-14.71</td><td>38.38</td><td>-7.09</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>491.72</td><td>32.79</td><td>46.00</td><td>-13.21</td><td>35.71</td><td>-2.92</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>774.96</td><td>37.21</td><td>46.00</td><td>-8.79</td><td>34.32</td><td>2.89</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>943.74</td><td>39.15</td><td>46.00</td><td>-6.85</td><td>33.82</td><td>5.33</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>										Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	106.63	32.44	43.50	-11.06	44.69	-12.25	Peak	---	---	2	191.99	31.29	43.50	-12.21	42.61	-11.32	Peak	---	---	3	331.67	31.29	46.00	-14.71	38.38	-7.09	Peak	---	---	4	491.72	32.79	46.00	-13.21	35.71	-2.92	Peak	---	---	5	774.96	37.21	46.00	-8.79	34.32	2.89	Peak	---	---	6	943.74	39.15	46.00	-6.85	33.82	5.33	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																					
1	106.63	32.44	43.50	-11.06	44.69	-12.25	Peak	---	---																																																																					
2	191.99	31.29	43.50	-12.21	42.61	-11.32	Peak	---	---																																																																					
3	331.67	31.29	46.00	-14.71	38.38	-7.09	Peak	---	---																																																																					
4	491.72	32.79	46.00	-13.21	35.71	-2.92	Peak	---	---																																																																					
5	774.96	37.21	46.00	-8.79	34.32	2.89	Peak	---	---																																																																					
6	943.74	39.15	46.00	-6.85	33.82	5.33	Peak	---	---																																																																					
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																														



Modulation	5G NR n70 BW:5MHz 1707.5MHz (CH 341500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																												
Polarization	Vertical		Mode		3																																																																								
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>39.70</td><td>35.58</td><td>40.00</td><td>-4.42</td><td>44.49</td><td>-8.91</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>48.43</td><td>36.55</td><td>40.00</td><td>-3.45</td><td>44.87</td><td>-8.32</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>58.13</td><td>33.76</td><td>40.00</td><td>-6.24</td><td>42.59</td><td>-8.83</td><td>QP</td><td>142</td><td>341</td></tr><tr><td>4</td><td>149.31</td><td>34.87</td><td>43.50</td><td>-8.63</td><td>43.70</td><td>-8.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>487.84</td><td>36.64</td><td>46.00</td><td>-9.36</td><td>39.70</td><td>-3.06</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>943.74</td><td>40.36</td><td>46.00</td><td>-5.64</td><td>35.03</td><td>5.33</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>									Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	39.70	35.58	40.00	-4.42	44.49	-8.91	Peak	---	---	2	48.43	36.55	40.00	-3.45	44.87	-8.32	Peak	---	---	3	58.13	33.76	40.00	-6.24	42.59	-8.83	QP	142	341	4	149.31	34.87	43.50	-8.63	43.70	-8.83	Peak	---	---	5	487.84	36.64	46.00	-9.36	39.70	-3.06	Peak	---	---	6	943.74	40.36	46.00	-5.64	35.03	5.33	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																				
1	39.70	35.58	40.00	-4.42	44.49	-8.91	Peak	---	---																																																																				
2	48.43	36.55	40.00	-3.45	44.87	-8.32	Peak	---	---																																																																				
3	58.13	33.76	40.00	-6.24	42.59	-8.83	QP	142	341																																																																				
4	149.31	34.87	43.50	-8.63	43.70	-8.83	Peak	---	---																																																																				
5	487.84	36.64	46.00	-9.36	39.70	-3.06	Peak	---	---																																																																				
6	943.74	40.36	46.00	-5.64	35.03	5.33	Peak	---	---																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																													



Modulation	5G NR n25 BW:5MHz 1907.5MHz (CH 381500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																													
Polarization	Horizontal		Mode		4																																																																									
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																														
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>105.66</td><td>33.24</td><td>43.50</td><td>-10.26</td><td>45.53</td><td>-12.29</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>191.99</td><td>31.14</td><td>43.50</td><td>-12.36</td><td>42.46</td><td>-11.32</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>431.58</td><td>33.10</td><td>46.00</td><td>-12.90</td><td>37.48</td><td>-4.38</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>488.81</td><td>33.07</td><td>46.00</td><td>-12.93</td><td>36.08</td><td>-3.01</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>775.93</td><td>37.87</td><td>46.00</td><td>-8.13</td><td>34.97</td><td>2.90</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>943.74</td><td>40.83</td><td>46.00</td><td>-5.17</td><td>35.50</td><td>5.33</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>										Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	105.66	33.24	43.50	-10.26	45.53	-12.29	Peak	---	---	2	191.99	31.14	43.50	-12.36	42.46	-11.32	Peak	---	---	3	431.58	33.10	46.00	-12.90	37.48	-4.38	Peak	---	---	4	488.81	33.07	46.00	-12.93	36.08	-3.01	Peak	---	---	5	775.93	37.87	46.00	-8.13	34.97	2.90	Peak	---	---	6	943.74	40.83	46.00	-5.17	35.50	5.33	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																					
1	105.66	33.24	43.50	-10.26	45.53	-12.29	Peak	---	---																																																																					
2	191.99	31.14	43.50	-12.36	42.46	-11.32	Peak	---	---																																																																					
3	431.58	33.10	46.00	-12.90	37.48	-4.38	Peak	---	---																																																																					
4	488.81	33.07	46.00	-12.93	36.08	-3.01	Peak	---	---																																																																					
5	775.93	37.87	46.00	-8.13	34.97	2.90	Peak	---	---																																																																					
6	943.74	40.83	46.00	-5.17	35.50	5.33	Peak	---	---																																																																					
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																														



Modulation	5G NR n25 BW:5MHz 1907.5MHz (CH 381500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																																																	
Polarization	Vertical		Mode		4																																																																																													
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																																																		
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>39.70</td><td>35.03</td><td>40.00</td><td>-4.97</td><td>43.94</td><td>-8.91</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>52.31</td><td>34.09</td><td>40.00</td><td>-5.91</td><td>42.37</td><td>-8.28</td><td>QP</td><td>144</td><td>338</td></tr><tr><td>3</td><td>148.34</td><td>36.53</td><td>43.50</td><td>-6.97</td><td>45.35</td><td>-8.82</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>491.72</td><td>35.72</td><td>46.00</td><td>-10.28</td><td>38.64</td><td>-2.92</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>776.90</td><td>39.28</td><td>46.00</td><td>-6.72</td><td>36.38</td><td>2.90</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>943.74</td><td>40.46</td><td>46.00</td><td>-5.54</td><td>35.13</td><td>5.33</td><td>Peak</td><td>---</td><td>---</td></tr></table>										Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	39.70	35.03	40.00	-4.97	43.94	-8.91	Peak	---	---	2	52.31	34.09	40.00	-5.91	42.37	-8.28	QP	144	338	3	148.34	36.53	43.50	-6.97	45.35	-8.82	Peak	---	---	4	491.72	35.72	46.00	-10.28	38.64	-2.92	Peak	---	---	5	776.90	39.28	46.00	-6.72	36.38	2.90	Peak	---	---	6	943.74	40.46	46.00	-5.54	35.13	5.33	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																									
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																									
					dBuV			cm	deg																																																																																									
1	39.70	35.03	40.00	-4.97	43.94	-8.91	Peak	---	---																																																																																									
2	52.31	34.09	40.00	-5.91	42.37	-8.28	QP	144	338																																																																																									
3	148.34	36.53	43.50	-6.97	45.35	-8.82	Peak	---	---																																																																																									
4	491.72	35.72	46.00	-10.28	38.64	-2.92	Peak	---	---																																																																																									
5	776.90	39.28	46.00	-6.72	36.38	2.90	Peak	---	---																																																																																									
6	943.74	40.46	46.00	-5.54	35.13	5.33	Peak	---	---																																																																																									
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																		



Modulation	5G NR n30 BW:5MHz 2307.5MHz (CH 461500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																																																		
Polarization	Horizontal			Mode			5																																																																																												
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																																																			
Level (dBUV/m) CLASS-B Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>91.11</td><td>30.72</td><td>43.50</td><td>-12.78</td><td>45.41</td><td>-14.69</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>105.66</td><td>33.06</td><td>43.50</td><td>-10.44</td><td>45.35</td><td>-12.29</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>192.96</td><td>31.98</td><td>43.50</td><td>-11.52</td><td>43.49</td><td>-11.51</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>310.33</td><td>30.74</td><td>46.00</td><td>-15.26</td><td>38.35</td><td>-7.61</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>431.58</td><td>32.60</td><td>46.00</td><td>-13.40</td><td>36.98</td><td>-4.38</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>494.63</td><td>33.15</td><td>46.00</td><td>-12.85</td><td>35.99</td><td>-2.84</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	91.11	30.72	43.50	-12.78	45.41	-14.69	Peak	---	---	2	105.66	33.06	43.50	-10.44	45.35	-12.29	Peak	---	---	3	192.96	31.98	43.50	-11.52	43.49	-11.51	Peak	---	---	4	310.33	30.74	46.00	-15.26	38.35	-7.61	Peak	---	---	5	431.58	32.60	46.00	-13.40	36.98	-4.38	Peak	---	---	6	494.63	33.15	46.00	-12.85	35.99	-2.84	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	91.11	30.72	43.50	-12.78	45.41	-14.69	Peak	---	---																																																																																										
2	105.66	33.06	43.50	-10.44	45.35	-12.29	Peak	---	---																																																																																										
3	192.96	31.98	43.50	-11.52	43.49	-11.51	Peak	---	---																																																																																										
4	310.33	30.74	46.00	-15.26	38.35	-7.61	Peak	---	---																																																																																										
5	431.58	32.60	46.00	-13.40	36.98	-4.38	Peak	---	---																																																																																										
6	494.63	33.15	46.00	-12.85	35.99	-2.84	Peak	---	---																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			




Modulation		5G NR n30 BW:5MHz 2307.5MHz (CH 461500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																																																	
Polarization		Vertical			Mode		5																																																																																												
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>38.73</td><td>36.13</td><td>40.00</td><td>-3.87</td><td>45.16</td><td>-9.03</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>49.40</td><td>33.97</td><td>40.00</td><td>-6.03</td><td>42.28</td><td>-8.31</td><td>QP</td><td>139</td><td>343</td></tr><tr><td>3</td><td>62.98</td><td>35.75</td><td>40.00</td><td>-4.25</td><td>45.38</td><td>-9.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>150.28</td><td>35.75</td><td>43.50</td><td>-7.75</td><td>44.43</td><td>-8.68</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>488.81</td><td>35.80</td><td>46.00</td><td>-10.20</td><td>38.81</td><td>-3.01</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>944.71</td><td>37.34</td><td>46.00</td><td>-8.66</td><td>31.99</td><td>5.35</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	38.73	36.13	40.00	-3.87	45.16	-9.03	Peak	---	---	2	49.40	33.97	40.00	-6.03	42.28	-8.31	QP	139	343	3	62.98	35.75	40.00	-4.25	45.38	-9.63	Peak	---	---	4	150.28	35.75	43.50	-7.75	44.43	-8.68	Peak	---	---	5	488.81	35.80	46.00	-10.20	38.81	-3.01	Peak	---	---	6	944.71	37.34	46.00	-8.66	31.99	5.35	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level			reading			High	Table																																																																																										
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																										
1	38.73	36.13	40.00	-3.87	45.16	-9.03	Peak	---	---																																																																																										
2	49.40	33.97	40.00	-6.03	42.28	-8.31	QP	139	343																																																																																										
3	62.98	35.75	40.00	-4.25	45.38	-9.63	Peak	---	---																																																																																										
4	150.28	35.75	43.50	-7.75	44.43	-8.68	Peak	---	---																																																																																										
5	488.81	35.80	46.00	-10.20	38.81	-3.01	Peak	---	---																																																																																										
6	944.71	37.34	46.00	-8.66	31.99	5.35	Peak	---	---																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			



Modulation	5G NR n41 BW:20MHz 2679.99MHz (CH 535998) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																														
Polarization	Horizontal			Mode			6																																																																								
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																															
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>106.63</td><td>32.31</td><td>43.50</td><td>-11.19</td><td>44.56</td><td>-12.25</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>192.96</td><td>31.34</td><td>43.50</td><td>-12.16</td><td>42.85</td><td>-11.51</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>332.64</td><td>31.41</td><td>46.00</td><td>-14.59</td><td>38.47</td><td>-7.06</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>482.02</td><td>33.73</td><td>46.00</td><td>-12.27</td><td>36.93</td><td>-3.20</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>761.38</td><td>35.85</td><td>46.00</td><td>-10.15</td><td>33.00</td><td>2.85</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>843.83</td><td>37.60</td><td>46.00</td><td>-8.40</td><td>33.71</td><td>3.89</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	106.63	32.31	43.50	-11.19	44.56	-12.25	Peak	---	---	2	192.96	31.34	43.50	-12.16	42.85	-11.51	Peak	---	---	3	332.64	31.41	46.00	-14.59	38.47	-7.06	Peak	---	---	4	482.02	33.73	46.00	-12.27	36.93	-3.20	Peak	---	---	5	761.38	35.85	46.00	-10.15	33.00	2.85	Peak	---	---	6	843.83	37.60	46.00	-8.40	33.71	3.89	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	106.63	32.31	43.50	-11.19	44.56	-12.25	Peak	---	---																																																																						
2	192.96	31.34	43.50	-12.16	42.85	-11.51	Peak	---	---																																																																						
3	332.64	31.41	46.00	-14.59	38.47	-7.06	Peak	---	---																																																																						
4	482.02	33.73	46.00	-12.27	36.93	-3.20	Peak	---	---																																																																						
5	761.38	35.85	46.00	-10.15	33.00	2.85	Peak	---	---																																																																						
6	843.83	37.60	46.00	-8.40	33.71	3.89	Peak	---	---																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																															

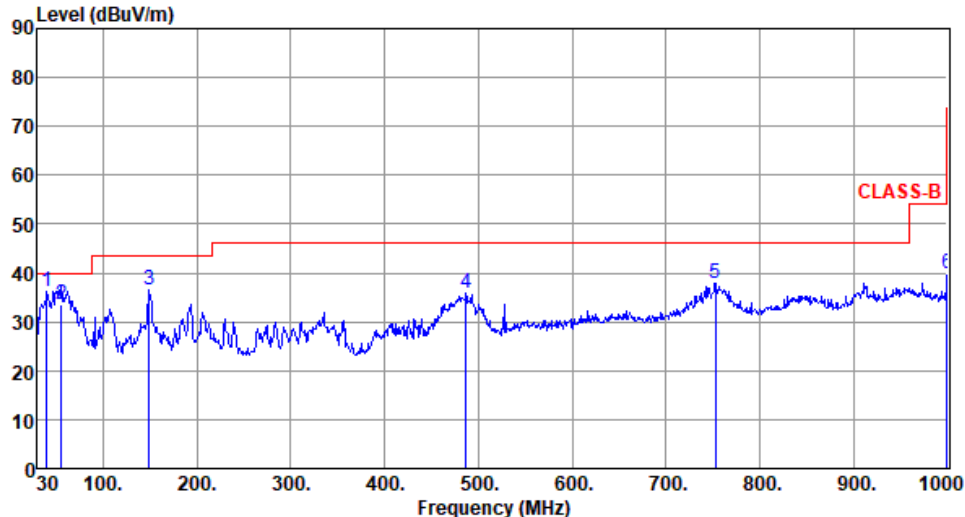


Modulation		5G NR n41 BW:20MHz 2679.99MHz (CH 535998) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																																																		
Polarization		Vertical			Mode			6																																																																																												
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																																																				
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>39.70</td><td>36.23</td><td>40.00</td><td>-3.77</td><td>45.14</td><td>-8.91</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>55.22</td><td>33.58</td><td>40.00</td><td>-6.42</td><td>42.08</td><td>-8.50</td><td>QP</td><td>140</td><td>340</td></tr><tr><td>3</td><td>149.31</td><td>36.64</td><td>43.50</td><td>-6.86</td><td>45.47</td><td>-8.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>486.87</td><td>35.85</td><td>46.00</td><td>-10.15</td><td>38.95</td><td>-3.10</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>752.65</td><td>37.92</td><td>46.00</td><td>-8.08</td><td>35.25</td><td>2.67</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>1000.00</td><td>39.94</td><td>54.00</td><td>-14.06</td><td>34.14</td><td>5.80</td><td>Peak</td><td>---</td><td>---</td></tr></table>												Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	39.70	36.23	40.00	-3.77	45.14	-8.91	Peak	---	---	2	55.22	33.58	40.00	-6.42	42.08	-8.50	QP	140	340	3	149.31	36.64	43.50	-6.86	45.47	-8.83	Peak	---	---	4	486.87	35.85	46.00	-10.15	38.95	-3.10	Peak	---	---	5	752.65	37.92	46.00	-8.08	35.25	2.67	Peak	---	---	6	1000.00	39.94	54.00	-14.06	34.14	5.80	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																											
	MHz	level			reading			High	Table																																																																																											
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																											
1	39.70	36.23	40.00	-3.77	45.14	-8.91	Peak	---	---																																																																																											
2	55.22	33.58	40.00	-6.42	42.08	-8.50	QP	140	340																																																																																											
3	149.31	36.64	43.50	-6.86	45.47	-8.83	Peak	---	---																																																																																											
4	486.87	35.85	46.00	-10.15	38.95	-3.10	Peak	---	---																																																																																											
5	752.65	37.92	46.00	-8.08	35.25	2.67	Peak	---	---																																																																																											
6	1000.00	39.94	54.00	-14.06	34.14	5.80	Peak	---	---																																																																																											
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																				



Modulation	5G NR n77 BW:10MHz 3455.01MHz (CH 630334) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																																																		
Polarization	Horizontal			Mode			7																																																																																												
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																																																			
Level (dBUV/m) Frequency (MHz) <table><tr><td></td><td>Freq.</td><td>Emission</td><td>Limit</td><td>Margin</td><td>SA</td><td>Factor</td><td>Remark</td><td>ANT</td><td>Turn</td></tr><tr><td></td><td>MHz</td><td>level</td><td></td><td></td><td>reading</td><td></td><td></td><td>High</td><td>Table</td></tr><tr><td></td><td></td><td>dBUV/m</td><td>dBUV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>104.69</td><td>33.91</td><td>43.50</td><td>-9.59</td><td>46.34</td><td>-12.43</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>150.28</td><td>30.96</td><td>43.50</td><td>-12.54</td><td>39.64</td><td>-8.68</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>191.99</td><td>31.63</td><td>43.50</td><td>-11.87</td><td>42.95</td><td>-11.32</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>335.55</td><td>31.60</td><td>46.00</td><td>-14.40</td><td>38.59</td><td>-6.99</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>483.96</td><td>32.95</td><td>46.00</td><td>-13.05</td><td>36.13</td><td>-3.18</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>954.41</td><td>37.86</td><td>46.00</td><td>-8.14</td><td>32.15</td><td>5.71</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	104.69	33.91	43.50	-9.59	46.34	-12.43	Peak	---	---	2	150.28	30.96	43.50	-12.54	39.64	-8.68	Peak	---	---	3	191.99	31.63	43.50	-11.87	42.95	-11.32	Peak	---	---	4	335.55	31.60	46.00	-14.40	38.59	-6.99	Peak	---	---	5	483.96	32.95	46.00	-13.05	36.13	-3.18	Peak	---	---	6	954.41	37.86	46.00	-8.14	32.15	5.71	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level			reading			High	Table																																																																																										
		dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																																																																										
1	104.69	33.91	43.50	-9.59	46.34	-12.43	Peak	---	---																																																																																										
2	150.28	30.96	43.50	-12.54	39.64	-8.68	Peak	---	---																																																																																										
3	191.99	31.63	43.50	-11.87	42.95	-11.32	Peak	---	---																																																																																										
4	335.55	31.60	46.00	-14.40	38.59	-6.99	Peak	---	---																																																																																										
5	483.96	32.95	46.00	-13.05	36.13	-3.18	Peak	---	---																																																																																										
6	954.41	37.86	46.00	-8.14	32.15	5.71	Peak	---	---																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																			

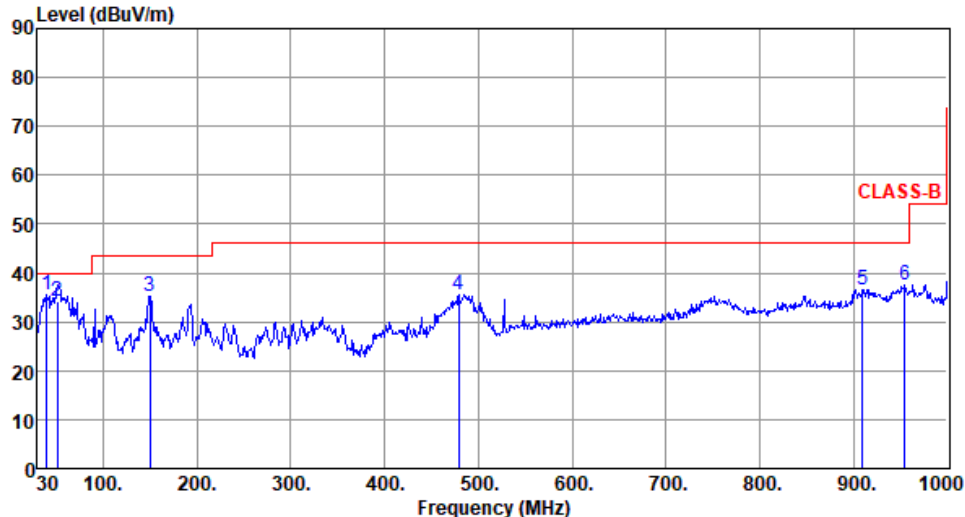

Modulation		5G NR n77 BW:10MHz 3455.01MHz (CH 630334) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																																																																
Polarization		Vertical		Mode		7																																																																																												
Test By :Akun Chung Temperature(°C):26 Humidity(%):67																																																																																																		
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>39.70</td><td>35.47</td><td>40.00</td><td>-4.53</td><td>44.38</td><td>-8.91</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>51.34</td><td>34.13</td><td>40.00</td><td>-5.87</td><td>42.31</td><td>-8.18</td><td>QP</td><td>128</td><td>339</td></tr><tr><td>3</td><td>150.28</td><td>35.27</td><td>43.50</td><td>-8.23</td><td>43.95</td><td>-8.68</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>479.11</td><td>35.63</td><td>46.00</td><td>-10.37</td><td>38.86</td><td>-3.23</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>909.79</td><td>36.56</td><td>46.00</td><td>-9.44</td><td>31.85</td><td>4.71</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>954.41</td><td>37.68</td><td>46.00</td><td>-8.32</td><td>31.97</td><td>5.71</td><td>Peak</td><td>---</td><td>---</td></tr></table>										Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	39.70	35.47	40.00	-4.53	44.38	-8.91	Peak	---	---	2	51.34	34.13	40.00	-5.87	42.31	-8.18	QP	128	339	3	150.28	35.27	43.50	-8.23	43.95	-8.68	Peak	---	---	4	479.11	35.63	46.00	-10.37	38.86	-3.23	Peak	---	---	5	909.79	36.56	46.00	-9.44	31.85	4.71	Peak	---	---	6	954.41	37.68	46.00	-8.32	31.97	5.71	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																									
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																									
		dBuV/m			dBuV			cm	deg																																																																																									
1	39.70	35.47	40.00	-4.53	44.38	-8.91	Peak	---	---																																																																																									
2	51.34	34.13	40.00	-5.87	42.31	-8.18	QP	128	339																																																																																									
3	150.28	35.27	43.50	-8.23	43.95	-8.68	Peak	---	---																																																																																									
4	479.11	35.63	46.00	-10.37	38.86	-3.23	Peak	---	---																																																																																									
5	909.79	36.56	46.00	-9.44	31.85	4.71	Peak	---	---																																																																																									
6	954.41	37.68	46.00	-8.32	31.97	5.71	Peak	---	---																																																																																									
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																		

Unwanted Emissions (Above 1GHz)

Modulation	5G NR n13 BW:5MHz 779.5MHz (CH155900) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Horizontal			Mode			1		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBUV/m)									



Modulation	5G NR n13 BW:5MHz 779.5MHz (CH155900) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																										
Polarization	Vertical			Mode			1																																																				
Test By :Akun Chung Temperature(°C):23 Humidity(%):65																																																											
Level (dBuV/m) CLASS-B CLASS-B (AVG) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>3214.30</td><td>30.06</td><td>54.00</td><td>-23.94</td><td>31.47</td><td>-1.41</td><td>Average</td><td>100</td><td>304</td></tr><tr><td>2</td><td>3214.30</td><td>42.07</td><td>74.00</td><td>-31.93</td><td>43.48</td><td>-1.41</td><td>Peak</td><td>100</td><td>304</td></tr><tr><td>3</td><td>4967.70</td><td>32.77</td><td>54.00</td><td>-21.23</td><td>31.56</td><td>1.21</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>4</td><td>4967.70</td><td>44.73</td><td>74.00</td><td>-29.27</td><td>43.52</td><td>1.21</td><td>Peak</td><td>100</td><td>288</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	3214.30	30.06	54.00	-23.94	31.47	-1.41	Average	100	304	2	3214.30	42.07	74.00	-31.93	43.48	-1.41	Peak	100	304	3	4967.70	32.77	54.00	-21.23	31.56	1.21	Average	100	288	4	4967.70	44.73	74.00	-29.27	43.52	1.21	Peak	100	288
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	3214.30	30.06	54.00	-23.94	31.47	-1.41	Average	100	304																																																		
2	3214.30	42.07	74.00	-31.93	43.48	-1.41	Peak	100	304																																																		
3	4967.70	32.77	54.00	-21.23	31.56	1.21	Average	100	288																																																		
4	4967.70	44.73	74.00	-29.27	43.52	1.21	Peak	100	288																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	5G NR n26 BW:5MHz 846.5MHz (CH 169300) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Horizontal			Mode			2		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBUV/m) <									



Modulation	5G NR n26 BW:5MHz 846.5MHz (CH 169300) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																										
Polarization	Vertical			Mode			2																																																				
Test By :Akun Chung Temperature(°C):23 Humidity(%):65																																																											
Level (dBuV/m) CLASS-B CLASS-B (AVG) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>3281.30</td><td>29.89</td><td>54.00</td><td>-24.11</td><td>31.54</td><td>-1.65</td><td>Average</td><td>100</td><td>309</td></tr><tr><td>2</td><td>3281.30</td><td>42.03</td><td>74.00</td><td>-31.97</td><td>43.68</td><td>-1.65</td><td>Peak</td><td>100</td><td>309</td></tr><tr><td>3</td><td>4900.70</td><td>32.82</td><td>54.00</td><td>-21.18</td><td>31.77</td><td>1.05</td><td>Average</td><td>100</td><td>305</td></tr><tr><td>4</td><td>4900.70</td><td>44.63</td><td>74.00</td><td>-29.37</td><td>43.58</td><td>1.05</td><td>Peak</td><td>100</td><td>305</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	3281.30	29.89	54.00	-24.11	31.54	-1.65	Average	100	309	2	3281.30	42.03	74.00	-31.97	43.68	-1.65	Peak	100	309	3	4900.70	32.82	54.00	-21.18	31.77	1.05	Average	100	305	4	4900.70	44.63	74.00	-29.37	43.58	1.05	Peak	100	305
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	3281.30	29.89	54.00	-24.11	31.54	-1.65	Average	100	309																																																		
2	3281.30	42.03	74.00	-31.97	43.68	-1.65	Peak	100	309																																																		
3	4900.70	32.82	54.00	-21.18	31.77	1.05	Average	100	305																																																		
4	4900.70	44.63	74.00	-29.37	43.58	1.05	Peak	100	305																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	5G NR n70 BW:5MHz 1707.5MHz (CH 341500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Horizontal			Mode			3		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBUV/m)									



Modulation	5G NR n70 BW:5MHz 1707.5MHz (CH 341500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Vertical			Mode			3		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBuV/m) <									



Modulation	5G NR n25 BW:5MHz 1907.5MHz (CH 381500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Horizontal			Mode			4		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBUV/m)									



Modulation	5G NR n25 BW:5MHz 1907.5MHz (CH 381500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz																																																										
Polarization	Vertical			Mode			4																																																				
Test By :Akun Chung Temperature(°C):23 Humidity(%):65																																																											
Level (dBuV/m) CLASS-B CLASS-B (AVG) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>3839.70</td><td>31.24</td><td>54.00</td><td>-22.76</td><td>31.77</td><td>-0.53</td><td>Average</td><td>100</td><td>301</td></tr><tr><td>2</td><td>3839.70</td><td>43.29</td><td>74.00</td><td>-30.71</td><td>43.82</td><td>-0.53</td><td>Peak</td><td>100</td><td>301</td></tr><tr><td>3</td><td>4342.30</td><td>31.80</td><td>54.00</td><td>-22.20</td><td>31.85</td><td>-0.05</td><td>Average</td><td>100</td><td>295</td></tr><tr><td>4</td><td>4342.30</td><td>43.67</td><td>74.00</td><td>-30.33</td><td>43.72</td><td>-0.05</td><td>Peak</td><td>100</td><td>295</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	3839.70	31.24	54.00	-22.76	31.77	-0.53	Average	100	301	2	3839.70	43.29	74.00	-30.71	43.82	-0.53	Peak	100	301	3	4342.30	31.80	54.00	-22.20	31.85	-0.05	Average	100	295	4	4342.30	43.67	74.00	-30.33	43.72	-0.05	Peak	100	295
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	3839.70	31.24	54.00	-22.76	31.77	-0.53	Average	100	301																																																		
2	3839.70	43.29	74.00	-30.71	43.82	-0.53	Peak	100	301																																																		
3	4342.30	31.80	54.00	-22.20	31.85	-0.05	Average	100	295																																																		
4	4342.30	43.67	74.00	-30.33	43.72	-0.05	Peak	100	295																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	5G NR n30 BW:5MHz 2307.5MHz (CH 461500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Horizontal			Mode			5		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBuV/m)									



Modulation	5G NR n30 BW:5MHz 2307.5MHz (CH 461500) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Vertical			Mode			5		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBuV/m)									



Modulation	5G NR n41 BW:20MHz 2679.99MHz (CH 535998) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Horizontal			Mode			6		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBuV/m)									



Modulation	5G NR n41 BW:20MHz 2679.99MHz (CH 535998) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Vertical			Mode			6		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBuV/m) <									



Modulation	5G NR n77 BW:10MHz 3455.01MHz (CH 630334) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Horizontal			Mode			7		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBuV/m)									



Modulation	5G NR n77 BW:10MHz 3455.01MHz (CH 630334) + TX 11b 2437MHz + 11a 5745MHz + 11be EHT320 6745MHz								
Polarization	Vertical			Mode			7		
Test By :Akun Chung Temperature(°C):23 Humidity(%):65									
Level (dBuV/m) </									