


FCC Test Report

FCC ID : MXF-WRTQ411BE
Equipment : Wi-Fi 7 Tri-Band Router
Model No. : WRTQ-411BE
Brand Name : Gemtek
Applicant : Gemtek Technology Co., Ltd.
Address : No. 15-1 Zhonghua Road, Hsinchu Industrial
Park, Hukou, Hsinchu, Taiwan, 30352.
Standard : 47 CFR FCC Part 15.407
Equipment Class / Type : ☒ 6ID: Indoor access point
☐ 6PP: Subordinate device
☐ 6XD: Client device
Received Date : Jan. 30, 2026
Tested Date : Mar. 16 ~ Apr. 15, 2026

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Manager

Approved by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	11
1.3	Test Setup Chart	11
1.4	The Equipment List	12
1.5	Test Standards	14
1.6	Reference Guidance	14
1.7	Deviation from Test Standard and Measurement Procedure.....	14
1.8	Measurement Uncertainty	14
2	TEST CONFIGURATION.....	15
2.1	Testing Facility	15
2.2	Test Worst Modes and Channel Details.....	16
3	TRANSMITTER TEST RESULTS	18
3.1	Emission Bandwidth	18
3.2	RF Output Power.....	19
3.3	Power Spectral Density	20
3.4	Unwanted Emissions.....	21
3.5	In-Band Emissions	24
3.6	Frequency Stability.....	26
3.7	Contention Based Protocol.....	27
3.8	AC Power Line Conducted Emissions	29
4	TEST LABORATORY INFORMATION	30
Appendix A. Emission Bandwidth		
Appendix B. RF Output Power		
Appendix C. Power Spectral Density		
Appendix D. Unwanted Emissions		
Appendix E. In-Band Emissions		
Appendix F. Frequency Stability		
Appendix G. Contention Based Protocol		
Appendix H. AC Power Line Conducted Emissions		

Release Record

Report No.	Version	Description	Issued Date
FR613001AO	Rev. 01	Initial issue	May 11, 2026

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.150MHz 53.76 (Margin -12.24dB) - QP	Pass
15.407(b)(5) 15.209	Unwanted Emission	[dBuV/m at 3m]: 7250.00MHz 53.79 (Margin -0.21dB) - AV	Pass
15.407(b)(6)	In-Band Emissions (Mask)	Meet the requirement of limit	Pass
15.407(a)(10)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)(5)	RF Output Power (e.i.r.p)	Max Power [dBm]: Non-beamforming mode 5925-6425MHz: 27.33 6425-6525MHz: 27.39 6525-6875MHz: 24.26 6875-7125MHz: 27.35 Beamforming mode 5925-6425MHz: 27.33 6425-6525MHz: 27.39 6525-6875MHz: 24.26 6875-7125MHz: 27.35	Pass
15.407(a)(5)	Power Spectral Density (e.i.r.p)	Meet the requirement of limit	Pass
15.407(d)(6)	Contention Based Protocol	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5925 ~ 7125	a	5955 ~ 7115	1 ~ 233 [59]	4	6-54 Mbps
5925 ~ 7125	ax (HE20)	5955 ~ 7115	1 ~ 233 [59]	4	MCS 0-11
5925 ~ 7125	ax (HE40)	5965 ~ 7085	3 ~ 227 [29]	4	MCS 0-11
5925 ~ 7125	ax (HE80)	5985 ~ 7025	7 ~ 215 [14]	4	MCS 0-11
5925 ~ 7125	ax (HE160)	6025 ~ 6985	15 ~ 207 [7]	4	MCS 0-11
5925 ~ 7125	be (EHT20)	5955 ~ 7115	1 ~ 233 [59]	4	MCS 0-13
5925 ~ 7125	be (EHT40)	5965 ~ 7085	3 ~ 227 [29]	4	MCS 0-13
5925 ~ 7125	be (EHT80)	5985 ~ 7025	7 ~ 215 [14]	4	MCS 0-13
5925 ~ 7125	be (EHT160)	6025 ~ 6985	15 ~ 207 [7]	4	MCS 0-13
5925 ~ 7125	be (EHT320)	6105 ~ 6905	31 ~ 191 [6]	4	MCS 0-13

Note: OFDM/OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM and 4096QAM modulation.

1.1.2 Antenna Details

Model	Type	Connector	Operating Frequencies (MHz) / Gain (dBi)			
			5925~6425	6425~6525	6525~6875	6875~7125
6G_ANT1	Dipole	UFL	2.07	2.63	2.31	2.18
6G_ANT2	Dipole	UFL	2.12	2.55	2.57	2.54
6G_ANT3	Dipole	UFL	2.16	2.6	2.27	2.59
6G_ANT4	Dipole	UFL	2.62	2.13	2.4	2.45

1.1.3 Configuration of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter	
Beamforming	☒ Support	☐ Not support
RU Configuration	☒ Full RU	☐ Partial RU
Channel Puncturing	☐ Support	☒ Not support

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: MOSO Model: MS-V4000R120-050A0-US I/P: 100-240Vac, 50/60Hz, 1.3A max. O/P: 12V=4A, 48W Power Line: 1.5m non-shielded without core
2	AC adapter	Brand: LUCENT TRANS Model: 1A133-LHHH-F I/P: 100-240Vac, 50/60Hz, 1.4A max. O/P: 12V=4A, 48W Power Line: 1.5m non-shielded without core
3	RJ45 (RAPID CONN)	1.5m non-shielded without core
4	RJ45 (TUNGLI)	1.5m non-shielded without core

1.1.5 Channel List

11a / ax HE20 / be EHT20							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
---	---	57	6235	117	6535	177	6835
1	5955	61	6255	121	6555	181	6855
5	5975	65	6275	125	6575	185	6875
9	5995	69	6295	129	6595	189	6895
13	6015	73	6315	133	6615	193	6915
17	6035	77	6335	137	6635	197	6935
21	6055	81	6355	141	6655	201	6955
25	6075	85	6375	145	6675	205	6975
29	6095	89	6395	149	6695	209	6995
33	6115	93	6415	153	6715	213	7015
37	6135	97	6435	157	6735	217	7035
41	6155	101	6455	161	6755	221	7055
45	6175	105	6475	165	6775	225	7075
49	6195	109	6495	169	6795	229	7095
53	6215	113	6515	173	6815	233	7115

ax HE40 / be EHT40							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	67	6285	131	6605	195	6925
11	6005	75	6325	139	6645	203	6965
19	6045	83	6365	147	6685	211	7005
27	6085	91	6405	155	6725	219	7045
35	6125	99	6445	163	6765	227	7085
43	6165	107	6485	171	6805	---	---
51	6205	115	6525	179	6845	---	---
59	6245	123	6565	187	6885	---	---

ax HE80 / be EHT80							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	71	6305	135	6625	199	6945
23	6065	87	6385	151	6705	215	7025
39	6145	103	6465	167	6785	---	---
55	6225	119	6545	183	6865	---	---

ax HE160 / be EHT160							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
15	6025	79	6345	143	6665	207	6985
47	6185	111	6505	175	6825	---	---

be EHT320							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	---	---
31	6105	95	6425	159	6745	---	---
63	6265	127	6585	191	6905	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	QSPR, V6.00.00234.1		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11a	99.43%	0.02
	be EHT20	89.10%	0.50
	be EHT40	90.47%	0.43
	be EHT80	90.93%	0.41
	be EHT160	91.56%	0.38
	be EHT320	47.84%	3.20

1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)	Power Index
11a	5955	6
11a	6175	6.5
11a	6415	6
11a	6435	6
11a	6475	6
11a	6515	6
11a	6535	6
11a	6715	6.5
11a	6855	6.5
11a	6875	6.5
11a	6895	6.5
11a	7015	6
11a	7095	6.5
11a	7115	6.5
be EHT20	5955	6.5
be EHT20	6175	6.5
be EHT20	6415	6.5
be EHT20	6435	6.5
be EHT20	6475	6.5
be EHT20	6515	6.5
be EHT20	6535	6.5
be EHT20	6715	6.5
be EHT20	6855	6.5
be EHT20	6875	6.5


be EHT20	6895	6.5
be EHT20	7015	6.5
be EHT20	7095	6.5
be EHT20	7115	-0.5
be EHT40	5965	8.5
be EHT40	6165	9.5
be EHT40	6405	9.5
be EHT40	6445	9.5
be EHT40	6485	9.5
be EHT40	6525	9.5
be EHT40	6565	9.5
be EHT40	6725	9.5
be EHT40	6845	9.5
be EHT40	6885	9.5
be EHT40	6925	9.5
be EHT40	7005	9.5
be EHT40	7085	9.5
be EHT80	5985	11.5
be EHT80	6145	12.5
be EHT80	6385	12.5
be EHT80	6465	12.5
be EHT80	6545	12.5
be EHT80	6625	12.5
be EHT80	6705	12.5
be EHT80	6785	12.5
be EHT80	6865	12.5
be EHT80	6945	12.5
be EHT80	7025	12.5
be EHT160	6025	15
be EHT160	6185	15.5
be EHT160	6345	15.5
be EHT160	6505	15.5
be EHT160	6665	15.5
be EHT160	6825	15.5
be EHT160	6985	15.5
be EHT320	6105	18
be EHT320	6265	18

be EHT320	6425	18
be EHT320	6585	17.5
be EHT320	6745	18
be EHT320	6905	16.5

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Laptop	DELL	Latitude 3440	DoC	---
2	Laptop	DELL	Latitude 3440	DoC	---
3	RJ45 Connector	ICC	RJ45 Connector	---	---

1.3 Test Setup Chart

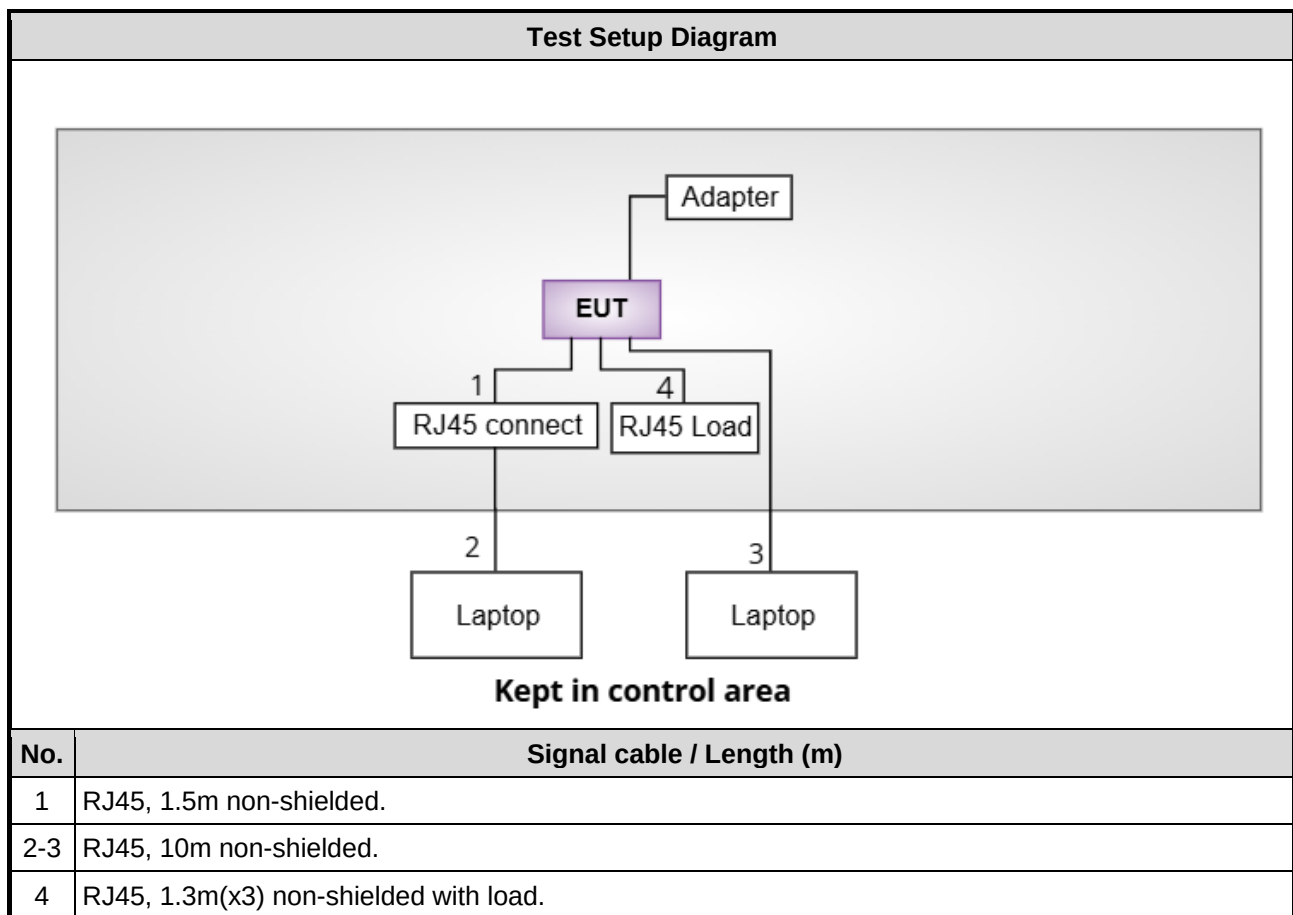

1.4 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Mar. 16 ~ Apr. 15, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101659	Apr. 17, 2025	Apr. 16, 2026
Spectrum Analyzer	R&S	FSV40	101498	Nov. 06, 2025	Nov. 05, 2026
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2025	Nov. 16, 2026
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jul. 04, 2025	Jul. 03, 2026
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 19, 2025	Dec. 18, 2026
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 28, 2025	Nov. 27, 2026
Preamplifier	EMC	EMC02325	980225	Jun. 13, 2025	Jun. 12, 2026
Preamplifier	EMC	EMC118A45SE	980898	Jun. 24, 2025	Jun. 23, 2026
Preamplifier	EMC	EMC184045SE	980903	Aug. 08, 2025	Aug. 07, 2026
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 01, 2025	Sep. 30, 2026
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 01, 2025	Sep. 30, 2026
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 01, 2025	Sep. 30, 2026
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 01, 2025	Sep. 30, 2026
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 01, 2025	Sep. 30, 2026
RF Cable	EMC	EMC104-35M-35M- 3000	210922	Oct. 01, 2025	Sep. 30, 2026
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 01, 2025	Sep. 30, 2026
Attenuator	Pasternack	PE7005-10	10-1	Oct. 01, 2025	Sep. 30, 2026
HIGHPASS FILTER 7.5-18G	STI	STI15-9722	STI-HP7.5G-A	Oct. 01, 2025	Sep. 30, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Apr. 07 ~ Apr. 14, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV3044	101516	Jun. 09, 2025	Jun. 08, 2026
Power Meter	Anritsu	ML2495A	1241002	Nov. 21, 2025	Nov. 20, 2026
Power Sensor	Anritsu	MA2411B	1207366	Nov. 21, 2025	Nov. 20, 2026
Attenuator	Pasternack	PE7005-10	10-2	Oct. 03, 2025	Oct. 02, 2026
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Jun. 26, 2025	Jun. 25, 2026
AC POWER SOURCE	APC	AFC-500W	F312060012	Jan. 08, 2026	Jan. 07, 2027
Measurement Software	Sporton	SENSE-15407_NII	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Apr. 10, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101659	Apr. 17, 2025	Apr. 16, 2026
LISN	R&S	ENV216	101579	May 07, 2025	May 06, 2026
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Jan. 13, 2026	Jan. 12, 2027
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Oct. 07, 2025	Oct. 06, 2026
50 ohm terminal	NA	50	01	Jun. 17, 2025	Jun. 16, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Contention Based Protocol				
Test Site	(TH01-WS)				
Tested Date	Apr. 13, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV3044	101516	Jun. 09, 2025	Jun. 08, 2026
AWGN Signal Generator	R&S	SMW200A	109619	Aug. 04, 2025	Aug. 03, 2026
RF CABLE	woken	woken-S05	S/N:S05-141231-105	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	woken	woken-S05	S/N:S05-141231-106	Oct. 09, 2025	Oct. 08, 2026
RF CABLE	EMC	EMC105SFF-SM-SM-2000	210816	Oct. 09, 2025	Oct. 08, 2026
Combiner(1x4)	MCLI	PS4-14	24939	Oct. 09, 2025	Oct. 08, 2026
Attenuator	woken	PE7013-10	10-1	Oct. 11, 2025	Oct. 10, 2026
Measurement Software	NA	NA	NA	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.407

ANSI C63.10-2020 + Cor.1-2023

ANSI C63.4-2014 + C63.4a-2017

1.6 Reference Guidance

FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Frequency error	$\pm 1 \times 10^{-9}$
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Unwanted Emission ≤ 1 GHz	± 3.41 dB
Unwanted Emission > 1 GHz	± 4.59 dB
Time	$\pm 0.1\%$
Temperature	± 0.4 °C

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 Test Worst Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Non-beamforming mode				
AC Power Line Conducted Emissions	be EHT320_OFDMA	6745	MCS 0	---
Unwanted Emissions ≤1GHz	be EHT320_OFDMA	6745	MCS 0	---
Unwanted Emissions >1GHz RF Output Power Emission Bandwidth Power Spectral Density In-Band Emissions	11a	5955 / 6175 / 6415 / 6435 / 6475 / 6515 / 6535 / 6715 / 6855 / 6875 / 6895 / 7015 / 7095 / 7115	MCS 0	---
	be EHT20_OFDMA	5955 / 6175 / 6415 / 6435 / 6475 / 6515 / 6535 / 6715 / 6855 / 6875 / 6895 / 7015 / 7095 / 7115	MCS 0	
	be EHT40_OFDMA	5965 / 6165 / 6405 / 6445 / 6485 / 6525 / 6565 / 6725 / 6845 / 6885 / 6925 / 7005 / 7085	MCS 0	
	be EHT80_OFDMA	5985 / 6145 / 6385 / 6465 / 6545 / 6625 / 6705 / 6785 / 6865 / 6945 / 7025	MCS 0	
	be EHT160_OFDMA	6025 / 6185 / 6345 / 6505 / 6665 / 6825 / 6985	MCS 0	
	be EHT320_OFDMA	6105 / 6265 / 6425 / 6585 / 6745 / 6905	MCS 0	
Contention Based Protocol	be EHT20_OFDMA	6195 / 6475 / 6695 / 6995	MCS 0	---
	be EHT320_OFDMA	6105 / 6425 / 6905	MCS 0	
Frequency Stability	Un-modulation	6475 / 7015	---	---
NOTE:				
- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane results were found as the worst case and were shown in this report. - Two RJ45 Cables (RAPID CONN and TUNGLI) had been covered during the pretest, and found that TUNGLI RJ45 Cable was the worst case and was selected for final test. - Two adapters (MOSO and LUCENT TRANS) had been covered during the pretest, and found that MOSO adapter was the worst case of AC Power line conducted emission test item and LUCENT TRANS adapter was the worst case of Radiated Spurious emission test item. - Beamforming mode is calculated not measured. The calculation method is conducted power of non-beamforming – (Directional gain - max gain of single antenna).				

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Beamforming mode				
RF Output Power	be EHT20_OFDMA	5955 / 6175 / 6415 / 6435 / 6475 / 6515 / 6535 / 6715 / 6855 / 6875 / 6895 / 7015 / 7095 / 7115	MCS 0	---
	be EHT40_OFDMA	5965 / 6165 / 6405 / 6445 / 6485 / 6525 / 6565 / 6725 / 6845 / 6885 / 6925 / 7005 / 7085	MCS 0	
	be EHT80_OFDMA	5985 / 6145 / 6385 / 6465 / 6545 / 6625 / 6705 / 6785 / 6865 / 6945 / 7025	MCS 0	
	be EHT160_OFDMA	6025 / 6185 / 6345 / 6505 / 6665 / 6825 / 6985	MCS 0	
	be EHT320_OFDMA	6105 / 6265 / 6425 / 6585 / 6745 / 6905	MCS 0	
NOTE:				
1. Beamforming mode is calculated not measured. The calculation method is conducted power of non-beamforming – (Directional gain - max gain of single antenna).				

3 Transmitter Test Results

3.1 Emission Bandwidth

3.1.1 Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

3.1.2 Test Procedures


26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW.
2. Set VBW $\geq$ 3 RBW.
3. Sample detection and single sweep mode shall be used.
4. Use the 99 % power bandwidth function of the instrument.

3.1.3 Test Setup



3.1.4 Test Result

Ambient Condition	24-26°C / 62-65%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix A.

3.2 RF Output Power

3.2.1 Limit

Frequency Band	Operating Mode	Maximum EIRP Limit
5925 ~ 7125 MHz	☒ Indoor access point	30 dBm
	☐ Subordinate device	30 dBm
	☐ Client devices	24 dBm

3.2.2 Test Procedures


Method PM-G (Measurement using a gated RF average power meter)

1. Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
2. $EIRP = \text{Measured conducted power} + \text{Antenna gain}$

Spectrum analyzer (For channel that extends across the 6.525 / 6.875 GHz boundary)

1. Set RBW = 1MHz, VBW = 3MHz, Sweep time = Auto, Detector = RMS.
2. Trace average at least 100 traces in power averaging mode.
3. Compute power by integrating the spectrum across the 26 dB EBW.
4. Add $10 \log(1/X, X:\text{duty cycle})$ if duty cycle is <98%.
5. $EIRP = \text{Measured conducted power} + \text{Antenna gain}$

3.2.3 Test Setup

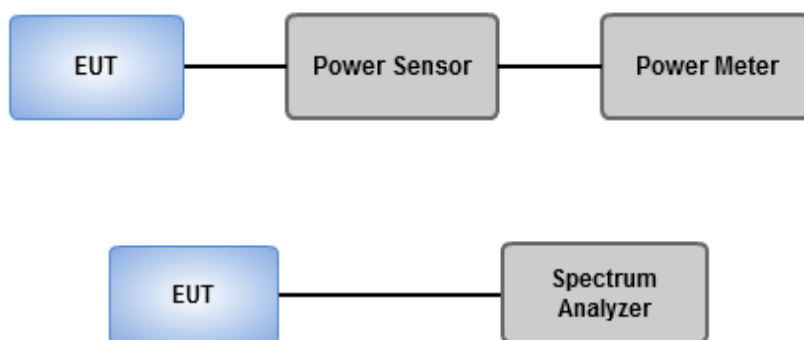

3.2.4 Test Result

Ambient Condition	24-26°C / 62-65%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix B.

3.3 Power Spectral Density

3.3.1 Limit

Frequency Band	Operating Mode	Limit
5925 ~ 7125 MHz	☒ Indoor access point	EIRP: 5 dBm / 1 MHz
	☐ Subordinate device	EIRP: 5 dBm / 1 MHz
	☐ Client devices	EIRP: -1 dBm / 1 MHz

3.3.2 Test Procedures


Duty cycle $\geq$ 98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.
4. EIRP PSD = Measured conducted power density + Antenna gain

Duty cycle < 98 %

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.
6. EIRP PSD = Measured conducted power density + Antenna gain

3.3.3 Test Setup



3.3.4 Test Result

Ambient Condition	24-26°C / 62-65%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix C.

3.4 Unwanted Emissions

3.4.1 Limit of Unwanted Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit		
Operating Band	PK Limit	AV Limit
5.925 – 7.125 GHz	e.i.r.p. -7 dBm [88.2 dBuV/m@3m]	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Radiated Emissions below 1 GHz

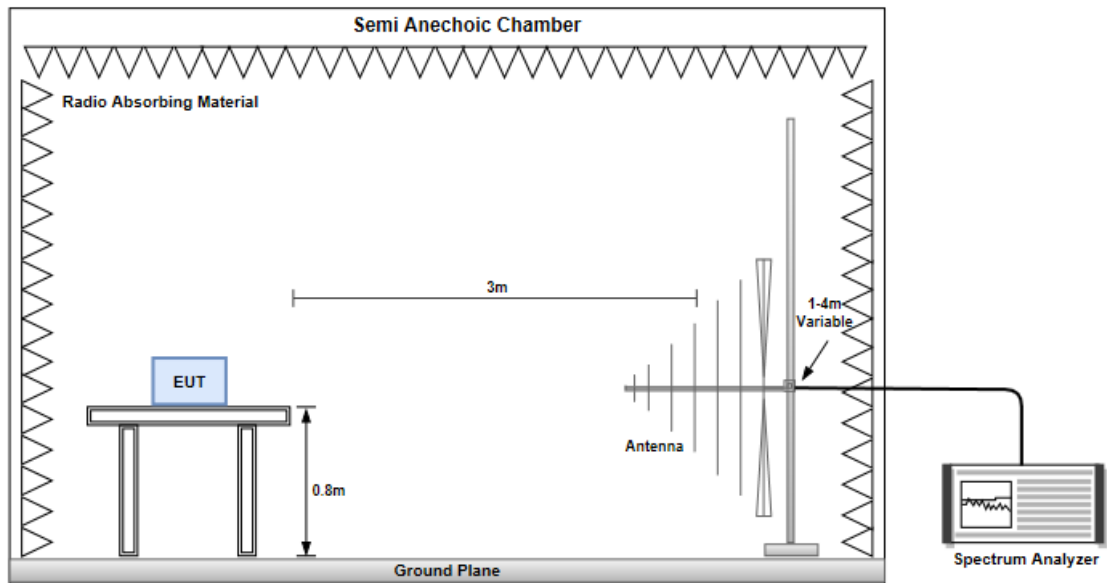

Radiated Emissions above 1 GHz

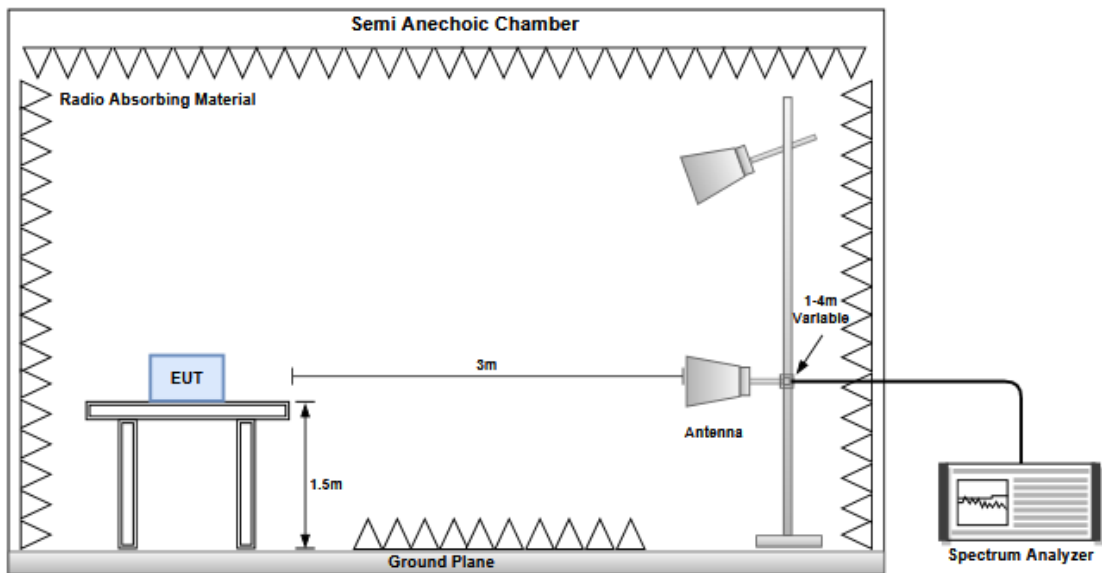


3.4.4 Test Results

Refer to Appendix D.

3.5 In-Band Emissions

3.5.1 Limit


Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

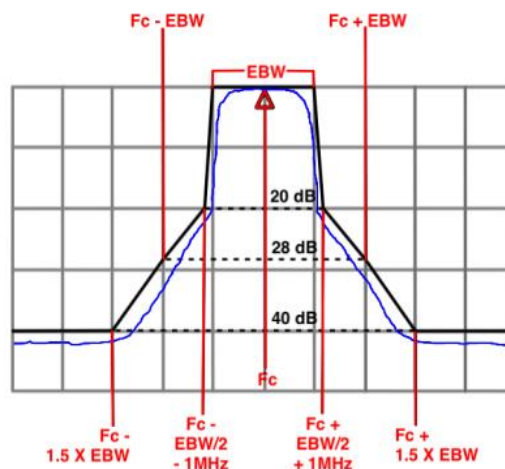

3.5.2 Test Procedures

1. Connect output of the antenna port to a spectrum analyzer
2. Set the reference level of the measuring equipment
3. Measure the 26 dB EBW
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

3.5.3 Test Setup



3.5.4 Test Results

Ambient Condition	24-26°C / 62-65%	Tested By	Roger Lu
--------------------------	------------------	------------------	----------

Refer to Appendix E.

3.6 Frequency Stability


3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 20 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under normal and extreme condition for temperature and voltage.

3.6.3 Test Setup

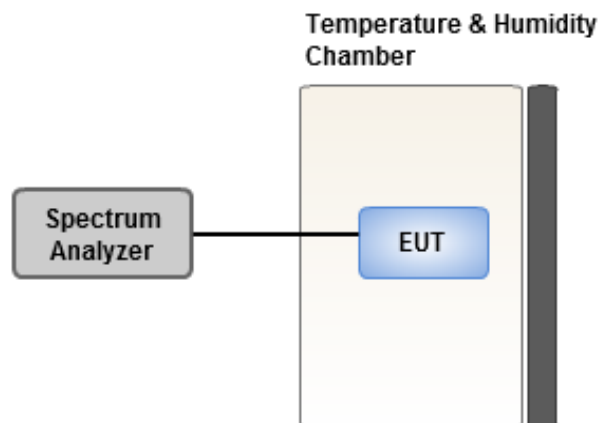

3.6.4 Test Result of Frequency Stability

Ambient Condition	24-26°C / 62-65%	Tested By	Roger Lu
-------------------	------------------	-----------	----------

Refer to Appendix F.

3.7 Contention Based Protocol


3.7.1 Limit

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty

3.7.2 Test Procedure

1. Configure the EUT to transmit with a constant duty cycle
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer, as shown in Figure. Ensure that the attenuator 1 provides enough attenuation to not overload the signal analyzer receiver.
4. Monitoring the signal analyzer, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 D02 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a splitter, to the signal analyzer and the EUT as shown in Figure.
7. Transmit the AWGN signal (RF ON) at the EUT's antenna port and verify its characteristics and signal power level on the signal analyzer.
8. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

3.7.3 Test Setup

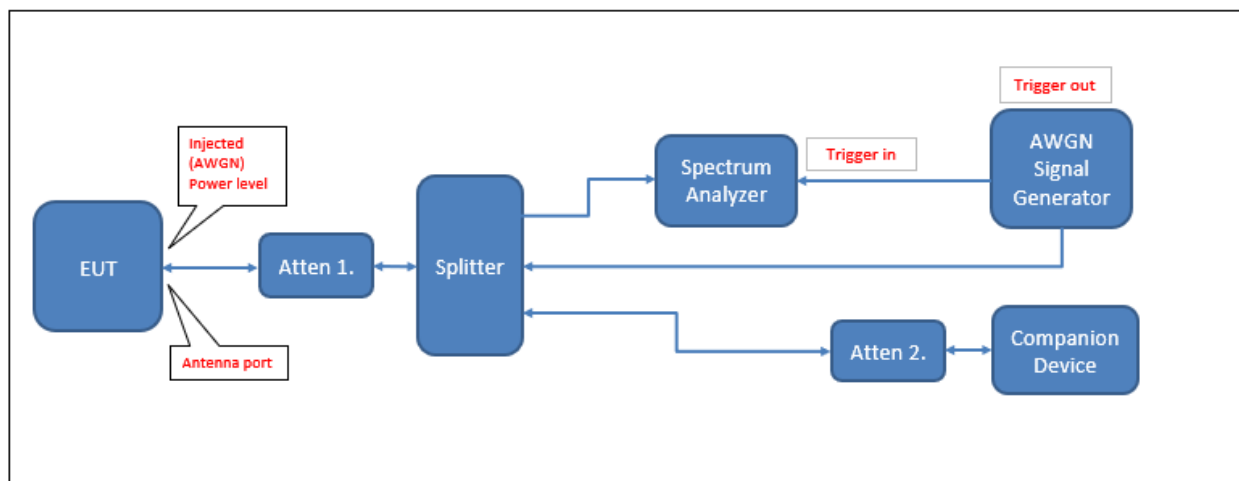

3.7.4 Test Result

Ambient Condition	22°C / 65%	Tested By	Jack Li
EUT FW version	1.1.04.101		

Refer to Appendix G.

3.8 AC Power Line Conducted Emissions

3.8.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.8.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.8.3 Test Setup

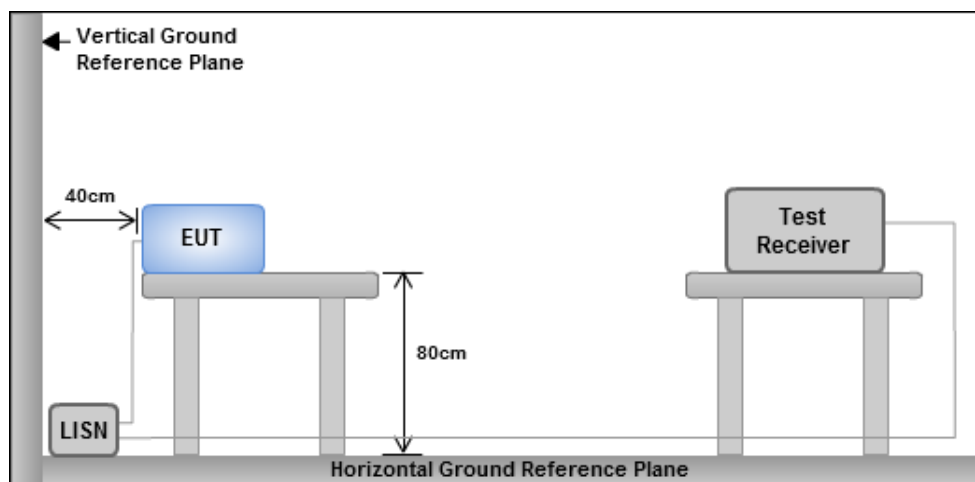

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.8.4 Test Result

Refer to Appendix H.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Zhonghe

Tel: 886-2-2222-0288

1F, No. 6, Jiankang Road, Zhonghe
District, New Taipei City 235045,
Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.034M	16.884M	16M9D1D	22.242M	16.801M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	23.892M	19.102M	19M1D1D	22.836M	19.048M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	45.144M	38.11M	38M1D1D	42.9M	37.993M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	90.816M	78.094M	78M1D1D	88.176M	77.687M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	175.296M	157.346M	157MD1D	169.488M	156.909M
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	645.216M	317.241M	317MD1D	343.2M	315.183M
6.425-6.525GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	22.902M	16.897M	16M9D1D	22.374M	16.806M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	23.628M	19.111M	19M1D1D	22.836M	19.041M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	45.144M	38.173M	38M2D1D	43.92M	38.024M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	92.664M	78.085M	78M1D1D	88.176M	77.816M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	174M	157.411M	157MD1D	171.12M	156.807M
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	691.68M	319.839M	320MD1D	386.496M	316.805M
6.525-6.875GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.1M	16.89M	16M9D1D	22.242M	16.806M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	24.09M	19.126M	19M1D1D	22.902M	19.057M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	44.748M	38.136M	38M1D1D	43.296M	38M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	91.608M	78.069M	78M1D1D	87.12M	77.758M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	174.768M	157.482M	157MD1D	170.544M	157.136M
6.875-7.125GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.232M	16.877M	16M9D1D	22.308M	16.787M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	23.79M	19.097M	19M1D1D	22.836M	19.032M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	44.88M	38.121M	38M1D1D	43.296M	38.019M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	92.16M	78.024M	78M0D1D	87.6M	77.708M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	174.72M	157.411M	157MD1D	170.016M	157.013M
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	727.584M	319.834M	320MD1D	343.2M	316.176M

Max-N dB = Maximum 26dB down bandwidth
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 26dB down bandwidth
 Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	Inf	22.308M	16.832M	23.034M	16.801M	22.572M	16.801M	22.308M	16.837M
6175MHz	Pass	Inf	22.506M	16.838M	22.704M	16.852M	22.77M	16.84M	22.242M	16.849M
6415MHz	Pass	Inf	22.506M	16.808M	22.902M	16.884M	22.968M	16.825M	22.242M	16.823M
6435MHz	Pass	Inf	22.506M	16.838M	22.836M	16.897M	22.836M	16.83M	22.506M	16.824M
6475MHz	Pass	Inf	22.506M	16.837M	22.836M	16.859M	22.902M	16.821M	22.374M	16.806M
6515MHz	Pass	Inf	22.374M	16.813M	22.836M	16.859M	22.506M	16.82M	22.506M	16.827M
6535MHz	Pass	Inf	22.44M	16.84M	22.902M	16.846M	22.506M	16.813M	22.44M	16.819M
6715MHz	Pass	Inf	23.1M	16.831M	22.902M	16.889M	22.572M	16.823M	22.572M	16.85M
6855MHz	Pass	Inf	22.242M	16.833M	22.968M	16.89M	22.836M	16.806M	22.506M	16.855M
6875MHz Straddle 6.875-7.125GHz	Pass	Inf	22.47M	16.853M	22.8M	16.858M	22.89M	16.787M	22.62M	16.877M
6895MHz	Pass	Inf	22.44M	16.841M	22.77M	16.853M	22.836M	16.806M	22.704M	16.865M
7015MHz	Pass	Inf	22.638M	16.833M	22.704M	16.873M	22.77M	16.813M	22.44M	16.87M
7095MHz	Pass	Inf	22.572M	16.847M	23.232M	16.825M	22.836M	16.809M	22.506M	16.869M
7115MHz	Pass	Inf	22.572M	16.831M	22.506M	16.835M	22.308M	16.819M	22.44M	16.851M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	Inf	22.902M	19.068M	23.232M	19.075M	23.232M	19.081M	22.836M	19.07M
6175MHz	Pass	Inf	23.298M	19.08M	23.892M	19.079M	23.1M	19.101M	23.166M	19.084M
6415MHz	Pass	Inf	23.562M	19.048M	23.562M	19.102M	23.034M	19.055M	23.1M	19.093M
6435MHz	Pass	Inf	23.43M	19.083M	23.628M	19.067M	22.902M	19.043M	23.034M	19.08M
6475MHz	Pass	Inf	23.364M	19.082M	23.43M	19.111M	23.166M	19.064M	22.836M	19.041M
6515MHz	Pass	Inf	23.364M	19.079M	23.628M	19.082M	23.034M	19.085M	22.968M	19.067M
6535MHz	Pass	Inf	23.43M	19.057M	22.902M	19.106M	23.034M	19.082M	23.364M	19.066M
6715MHz	Pass	Inf	23.562M	19.094M	23.628M	19.126M	23.43M	19.067M	23.232M	19.103M
6855MHz	Pass	Inf	23.166M	19.075M	24.09M	19.068M	23.1M	19.057M	23.166M	19.094M
6875MHz Straddle 6.875-7.125GHz	Pass	Inf	23.43M	19.074M	23.79M	19.083M	23.31M	19.032M	23.46M	19.096M
6895MHz	Pass	Inf	23.298M	19.074M	23.694M	19.089M	23.034M	19.059M	23.1M	19.092M
7015MHz	Pass	Inf	23.562M	19.074M	23.496M	19.08M	23.298M	19.06M	22.968M	19.089M
7095MHz	Pass	Inf	23.232M	19.078M	22.968M	19.097M	22.968M	19.054M	23.166M	19.055M
7115MHz	Pass	Inf	23.232M	19.091M	23.496M	19.061M	23.1M	19.067M	22.836M	19.087M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	44.22M	38.059M	43.956M	38.032M	43.56M	38.037M	42.9M	38.04M
6165MHz	Pass	Inf	45.144M	38.092M	43.956M	38.05M	44.088M	38.062M	45.012M	37.993M
6405MHz	Pass	Inf	44.352M	38.11M	44.352M	38.035M	44.088M	38.11M	43.824M	38.063M
6445MHz	Pass	Inf	45.144M	38.101M	44.22M	38.068M	44.22M	38.124M	44.088M	38.125M
6485MHz	Pass	Inf	44.22M	38.173M	43.956M	38.075M	44.22M	38.067M	44.88M	38.1M
6525MHz Straddle 6.425-6.525GHz	Pass	Inf	44.52M	38.068M	43.92M	38.048M	43.98M	38.041M	44.04M	38.024M
6565MHz	Pass	Inf	43.824M	38.114M	43.956M	38.047M	43.296M	38.076M	44.22M	38.136M
6725MHz	Pass	Inf	44.352M	38.114M	43.824M	38.04M	43.428M	38.053M	43.956M	38.097M
6845MHz	Pass	Inf	44.748M	38.077M	44.22M	38M	43.956M	38.06M	44.616M	38.002M
6885MHz Straddle 6.875-7.125GHz	Pass	Inf	44.1M	38.103M	44.52M	38.084M	44.58M	38.03M	43.92M	38.057M
6925MHz	Pass	Inf	44.352M	38.111M	43.956M	38.04M	43.56M	38.077M	43.296M	38.053M
7005MHz	Pass	Inf	43.692M	38.104M	44.88M	38.048M	43.692M	38.121M	44.088M	38.032M
7085MHz	Pass	Inf	44.748M	38.104M	44.088M	38.019M	43.692M	38.031M	43.56M	38.072M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	88.176M	77.925M	89.496M	77.847M	89.496M	77.83M	88.176M	77.687M
6145MHz	Pass	Inf	90.816M	77.921M	90.024M	77.808M	90.552M	77.926M	89.496M	77.806M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
6385MHz	Pass	Inf	90.552M	78.094M	90.024M	77.736M	90.816M	77.89M	89.232M	77.922M
6465MHz	Pass	Inf	92.664M	77.985M	91.872M	77.881M	88.968M	77.934M	88.176M	77.82M
6545MHz Straddle 6.425-6.525GHz	Pass	Inf	88.32M	78.085M	92.28M	77.816M	90.24M	78.043M	89.16M	77.827M
6625MHz	Pass	Inf	91.608M	78.069M	89.232M	77.883M	89.232M	77.968M	89.76M	77.819M
6705MHz	Pass	Inf	87.12M	78.066M	88.176M	77.997M	89.496M	78.022M	87.648M	77.905M
6785MHz	Pass	Inf	89.232M	77.954M	89.76M	77.842M	89.496M	77.793M	87.648M	77.758M
6865MHz Straddle 6.875-7.125GHz	Pass	Inf	89.88M	77.965M	88.56M	77.874M	92.16M	77.937M	87.6M	77.708M
6945MHz	Pass	Inf	89.496M	78.012M	91.872M	77.813M	88.704M	77.933M	88.704M	77.843M
7025MHz	Pass	Inf	89.496M	78.024M	88.176M	77.934M	90.024M	77.833M	89.232M	77.902M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	173.184M	157.215M	169.488M	157.019M	172.128M	156.921M	170.016M	156.909M
6185MHz	Pass	Inf	173.184M	157.346M	172.128M	157.304M	174.24M	157.014M	172.656M	157.049M
6345MHz	Pass	Inf	175.296M	157.321M	171.072M	157.194M	172.656M	157.144M	173.184M	157.23M
6505MHz Straddle 6.425-6.525GHz	Pass	Inf	172.8M	157.411M	174M	157.132M	171.6M	157.189M	171.12M	156.807M
6665MHz	Pass	Inf	174.768M	157.482M	170.544M	157.136M	172.128M	157.232M	172.128M	157.194M
6825MHz Straddle 6.875-7.125GHz	Pass	Inf	174.72M	157.295M	171.36M	157.411M	173.04M	157.08M	173.52M	157.185M
6985MHz	Pass	Inf	173.712M	157.327M	172.656M	157.095M	170.016M	157.013M	173.184M	157.184M
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	Inf	476.256M	316.276M	470.976M	316.253M	485.76M	316.273M	484.704M	315.183M
6265MHz	Pass	Inf	343.2M	316.584M	645.216M	317.241M	610.368M	317.192M	486.816M	316.037M
6425MHz Straddle 6.425-6.525GHz	Pass	Inf	497.376M	318.449M	620.928M	319.839M	541.728M	317.411M	618.816M	318.469M
6585MHz Straddle 6.425-6.525GHz	Pass	Inf	386.496M	317.237M	502.656M	316.805M	570.24M	317.642M	691.68M	319.195M
6745MHz Straddle 6.875-7.125GHz	Pass	Inf	727.584M	319.834M	598.752M	318.972M	700.128M	318.903M	711.744M	318.396M
6905MHz Straddle 6.875-7.125GHz	Pass	Inf	593.472M	317.164M	343.2M	316.176M	714.912M	317.739M	598.752M	317.657M

Port X-N dB = 26dB down bandwidth



Port X-OBW = Port X 99% occupied bandwidth



5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5955MHz

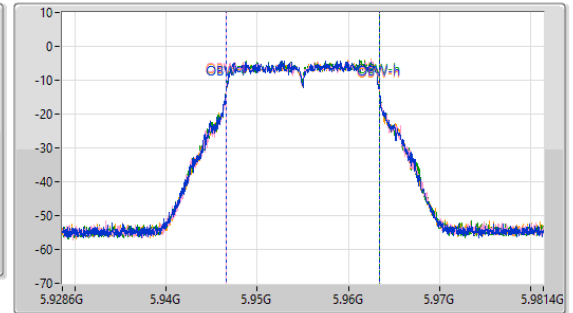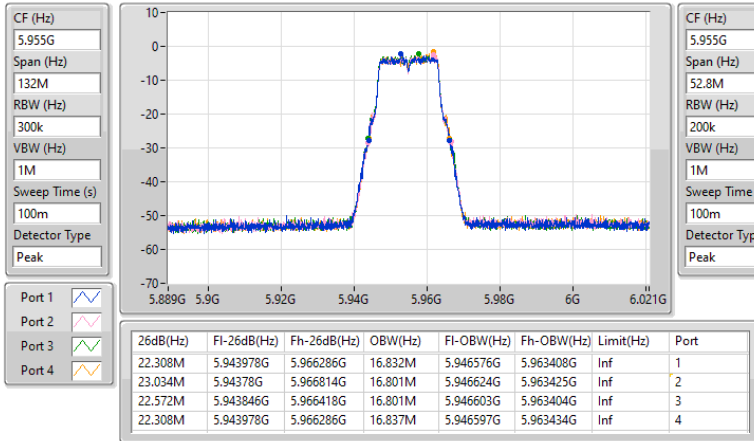

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6175MHz

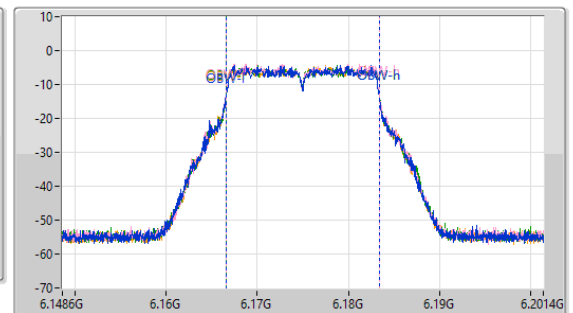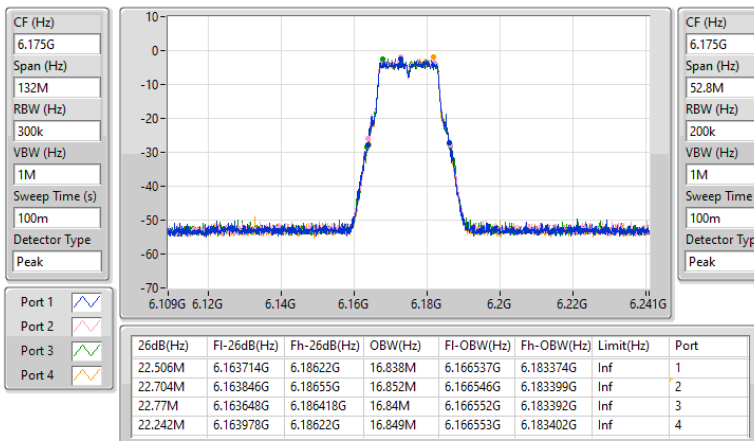




5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


6415MHz

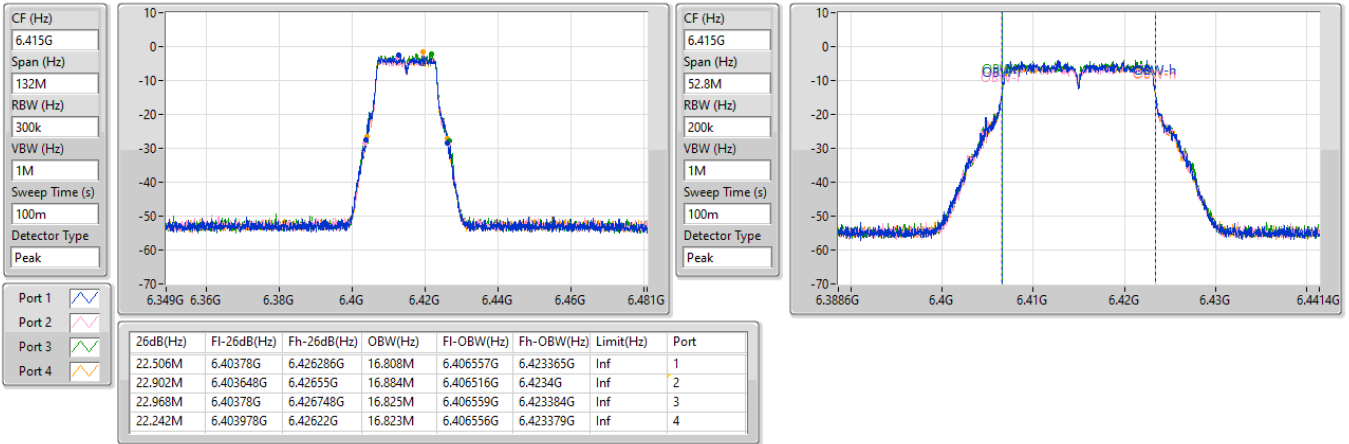

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6435MHz


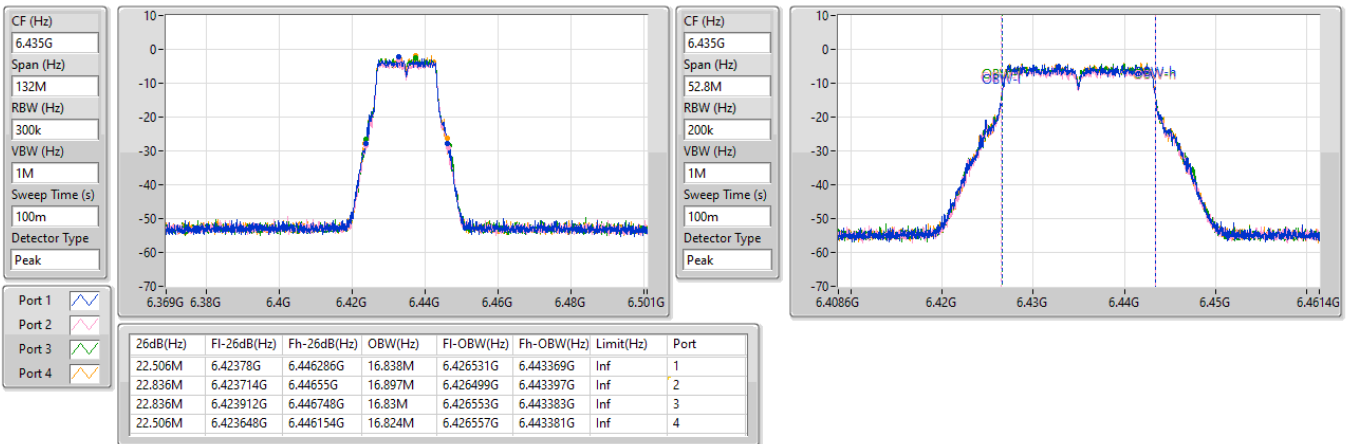




6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



6475MHz

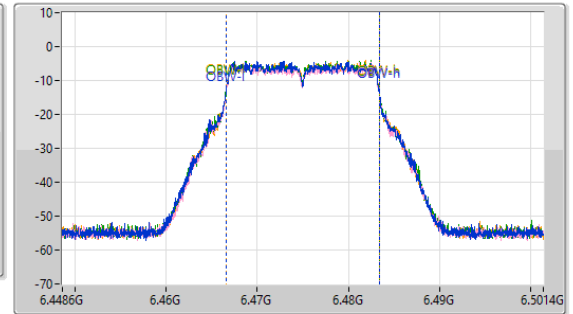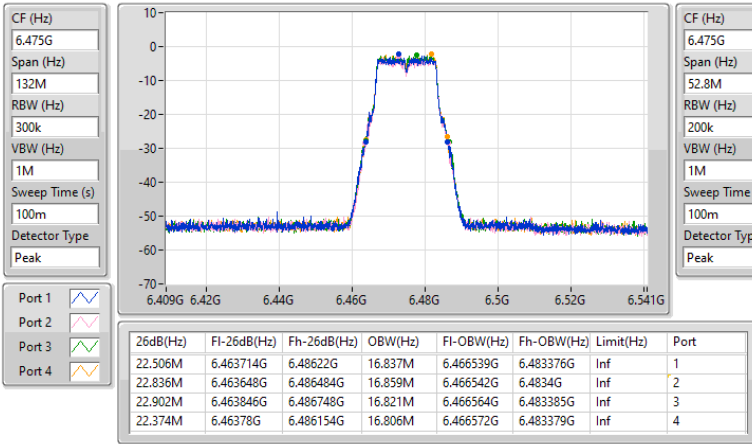

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6515MHz

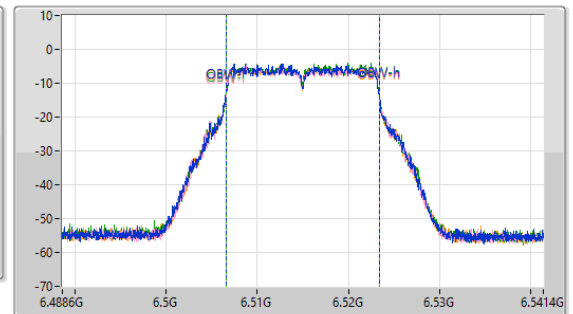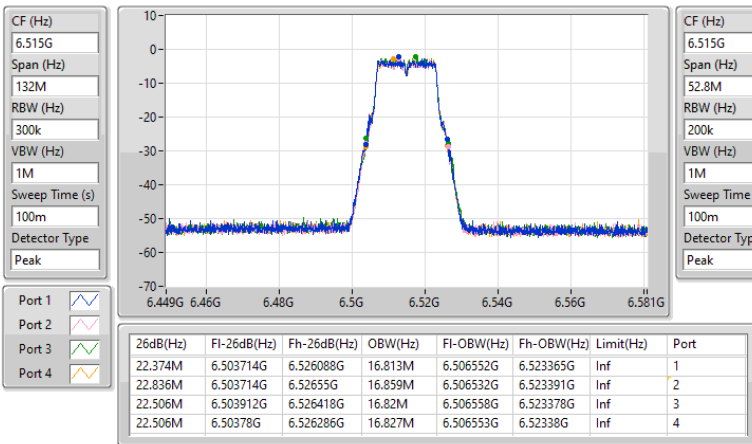




6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


6535MHz

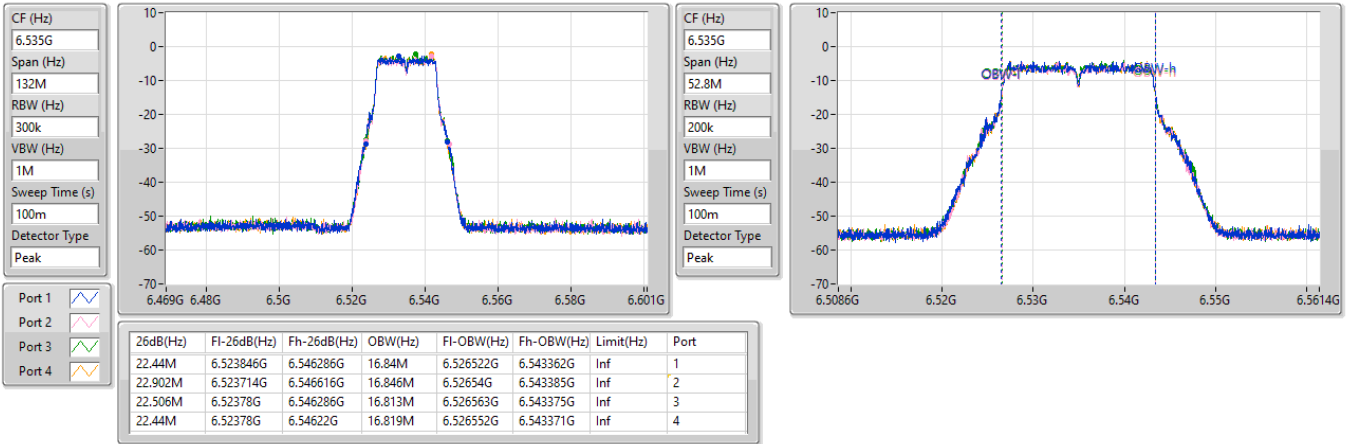

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6715MHz


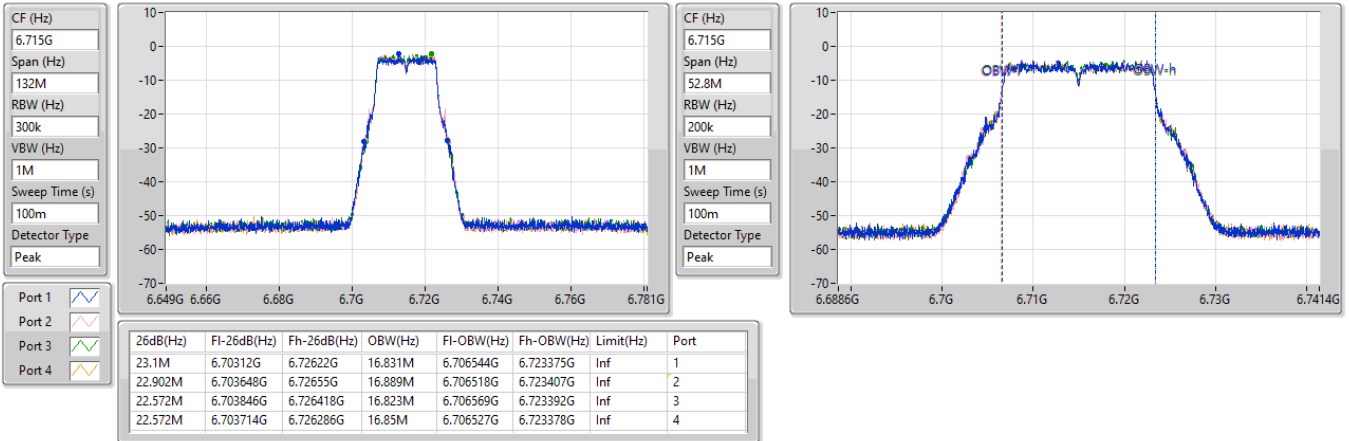




6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



6855MHz

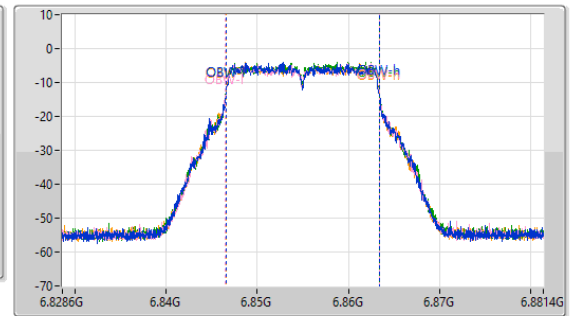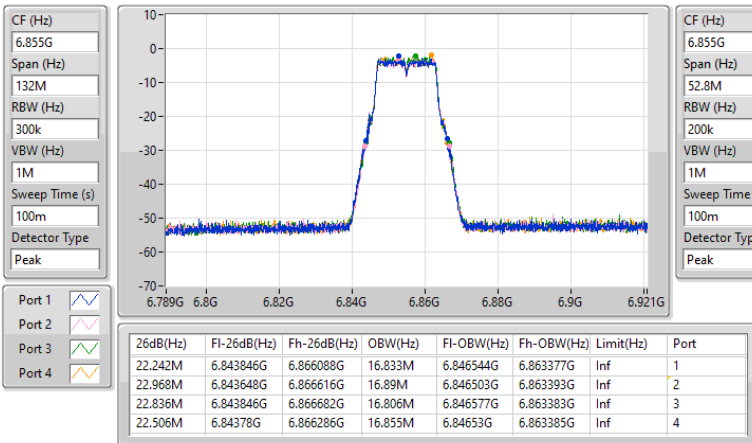

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6875MHz Straddle 6.875-7.125GHz

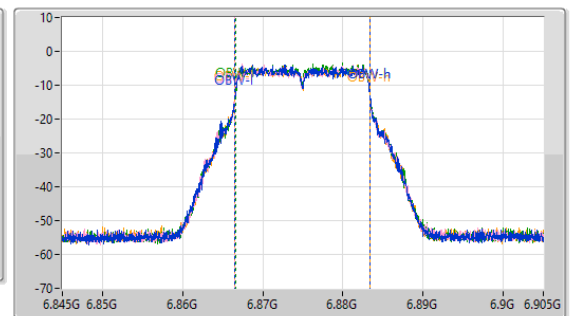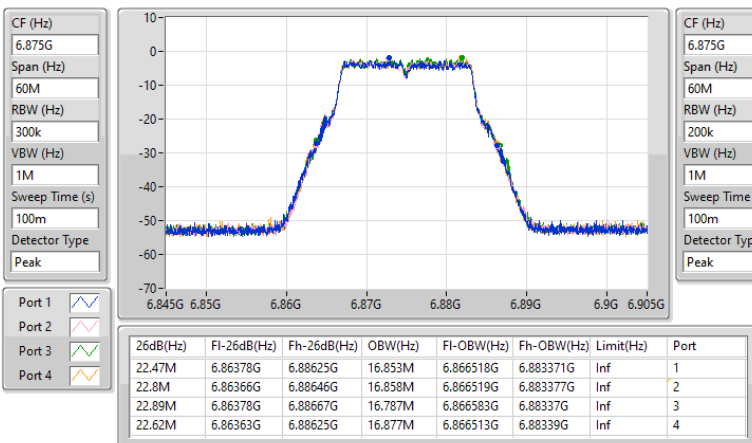




6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


6895MHz

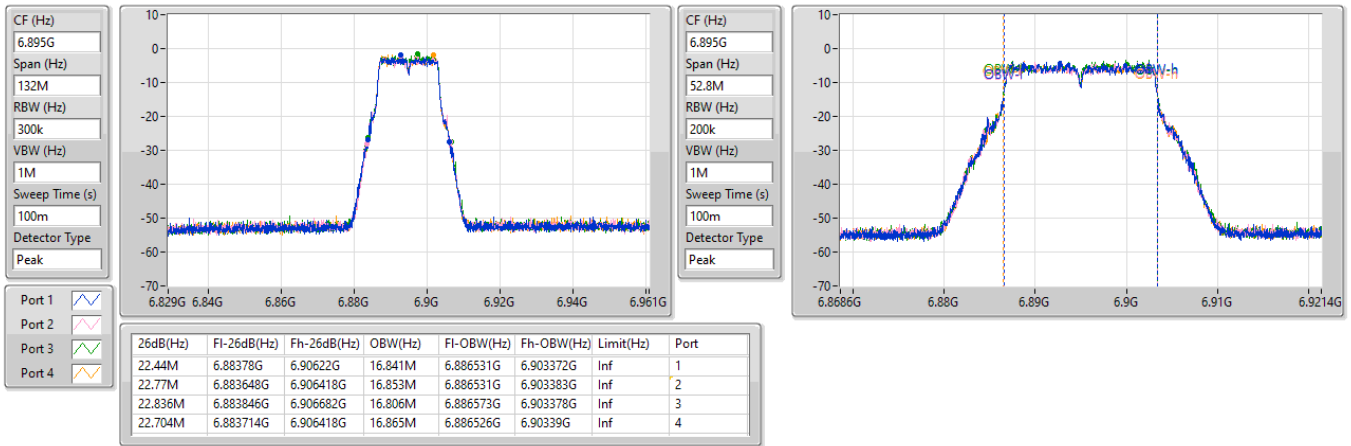

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

7015MHz

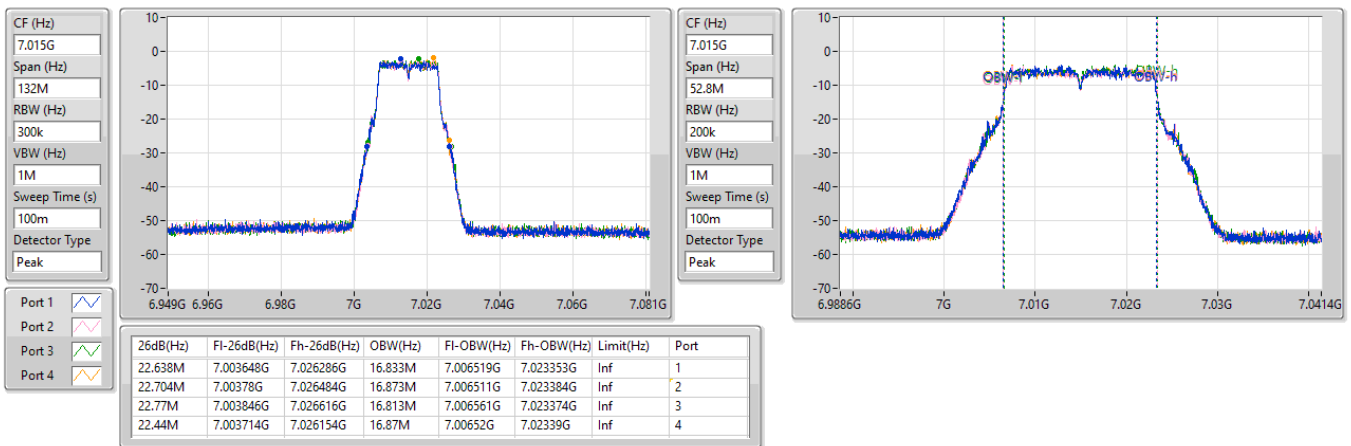




6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


7095MHz

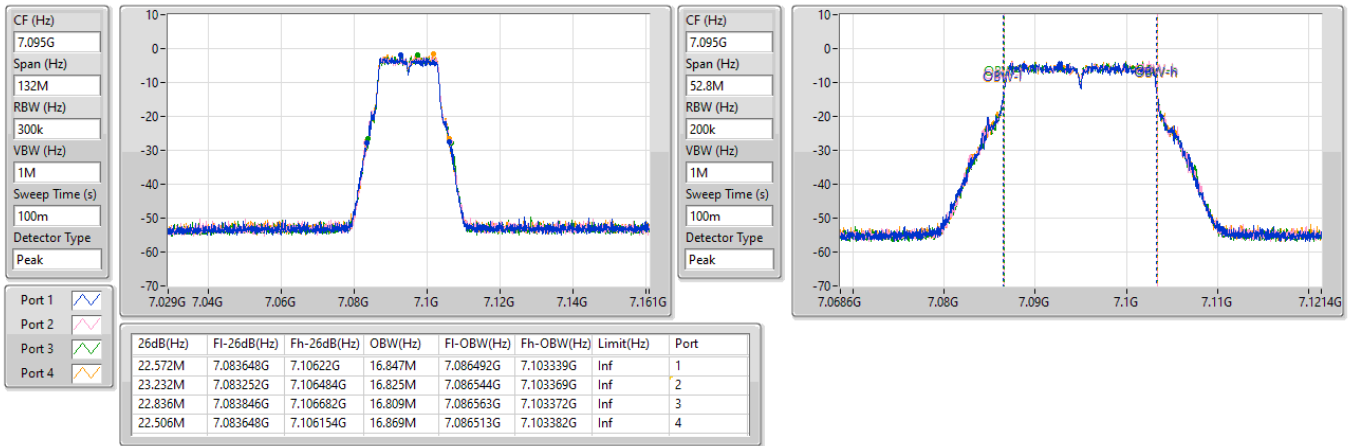

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

7115MHz

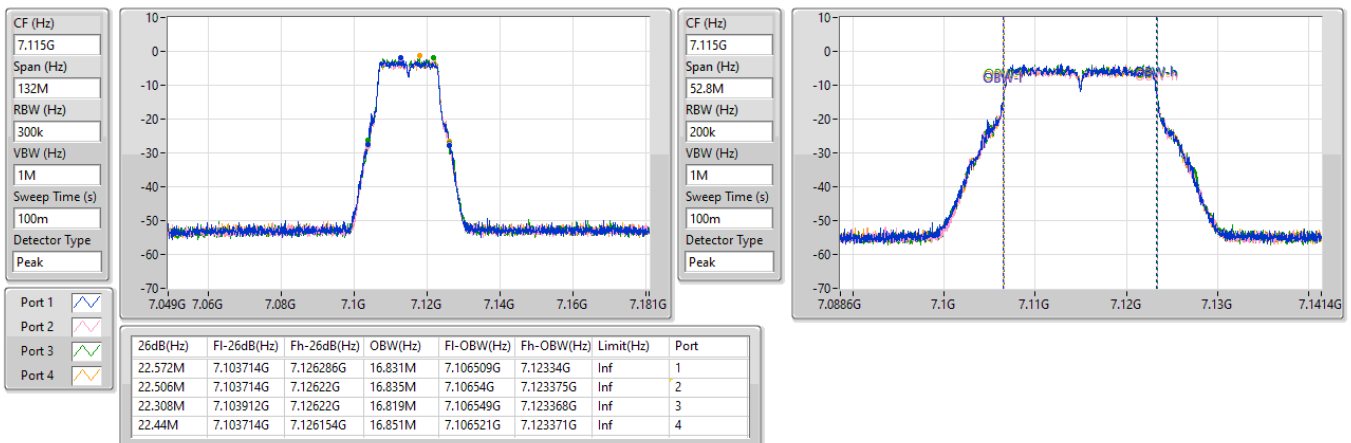




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


5955MHz

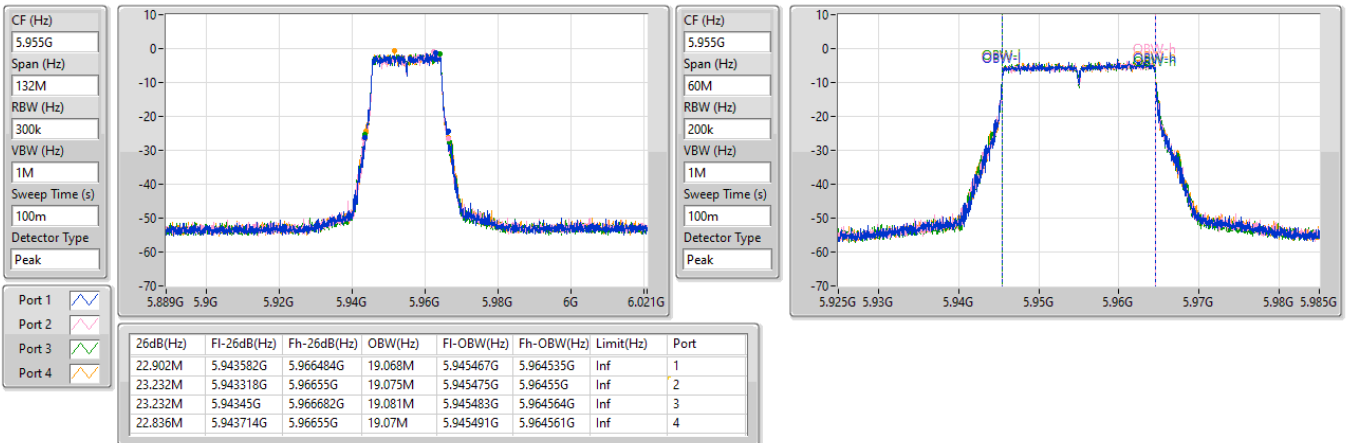

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6175MHz

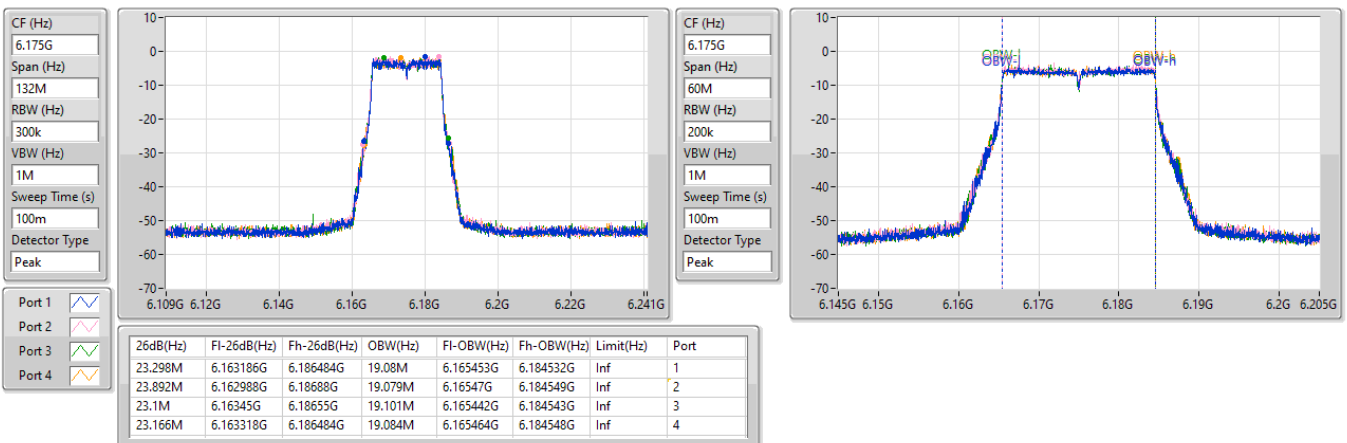




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6415MHz

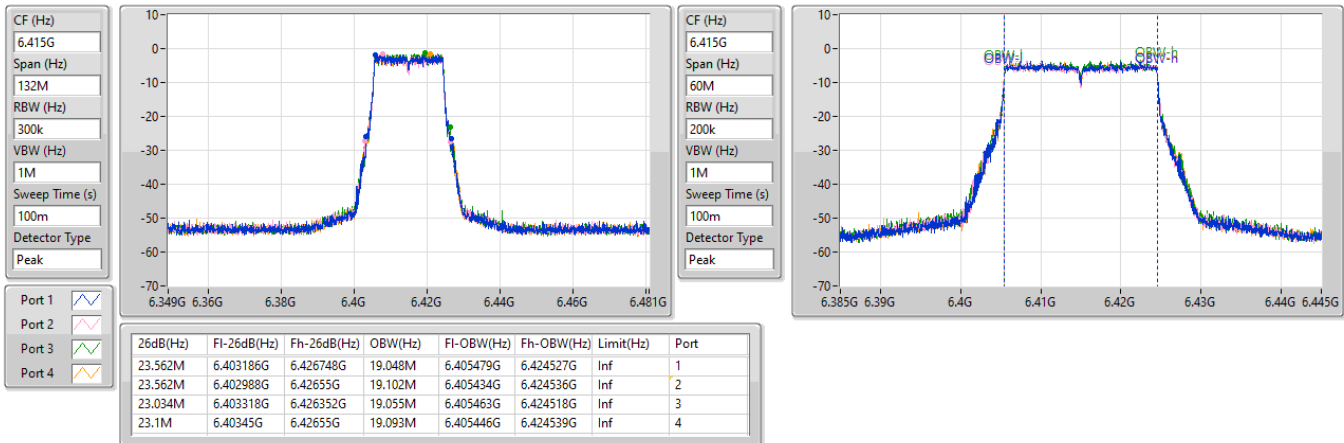

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6435MHz

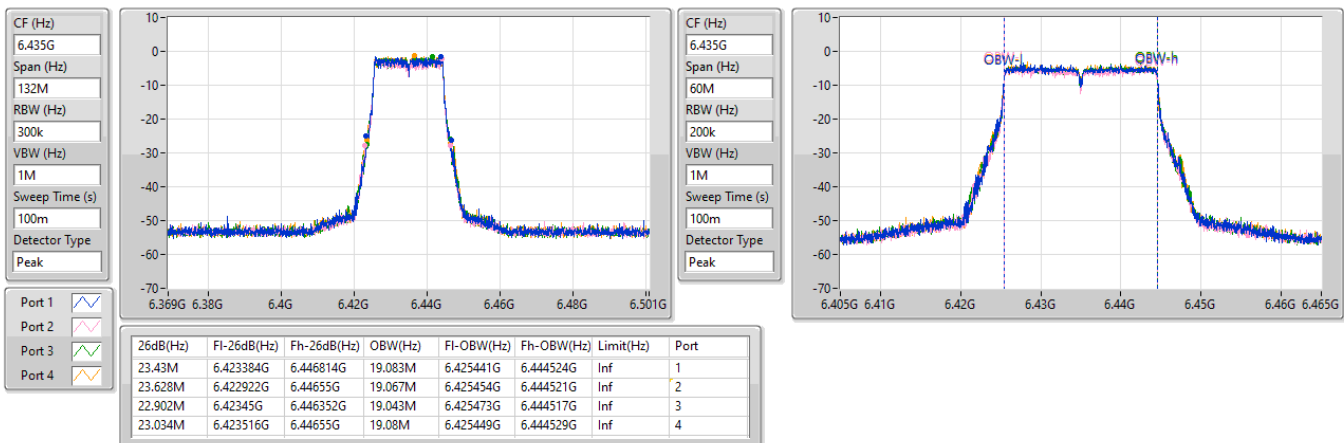




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6475MHz

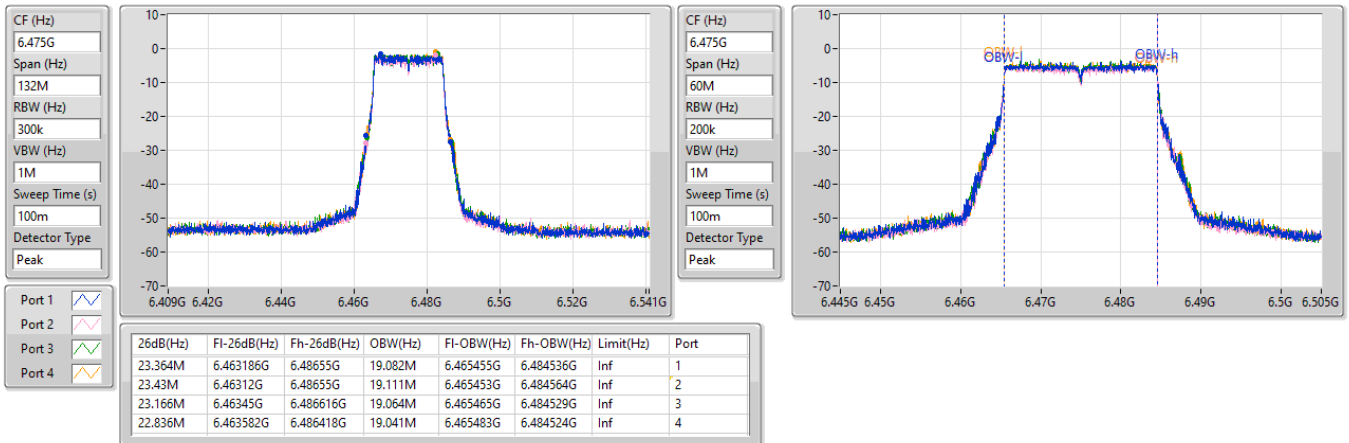

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6515MHz

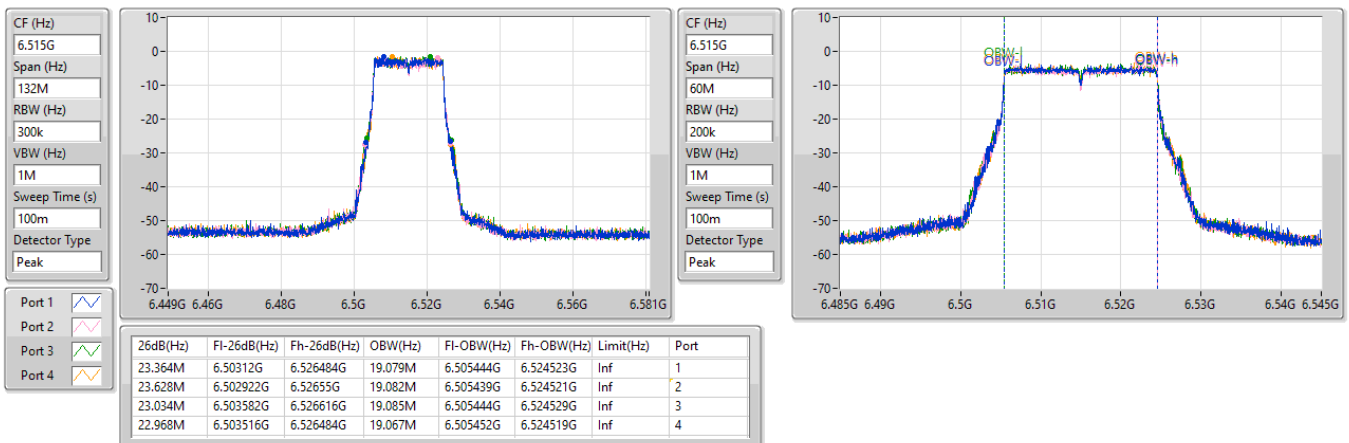




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6535MHz

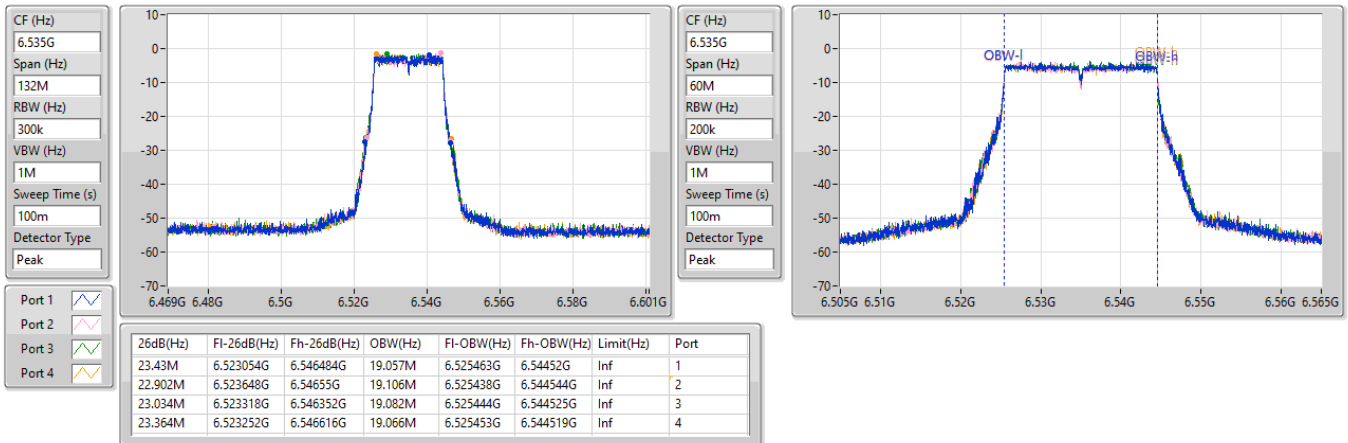

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6715MHz

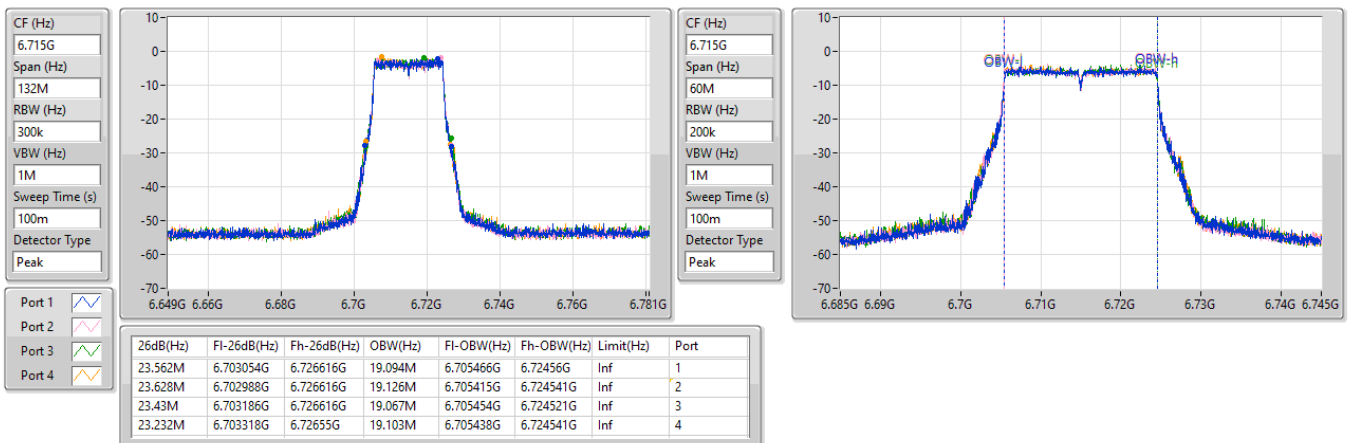




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


6855MHz

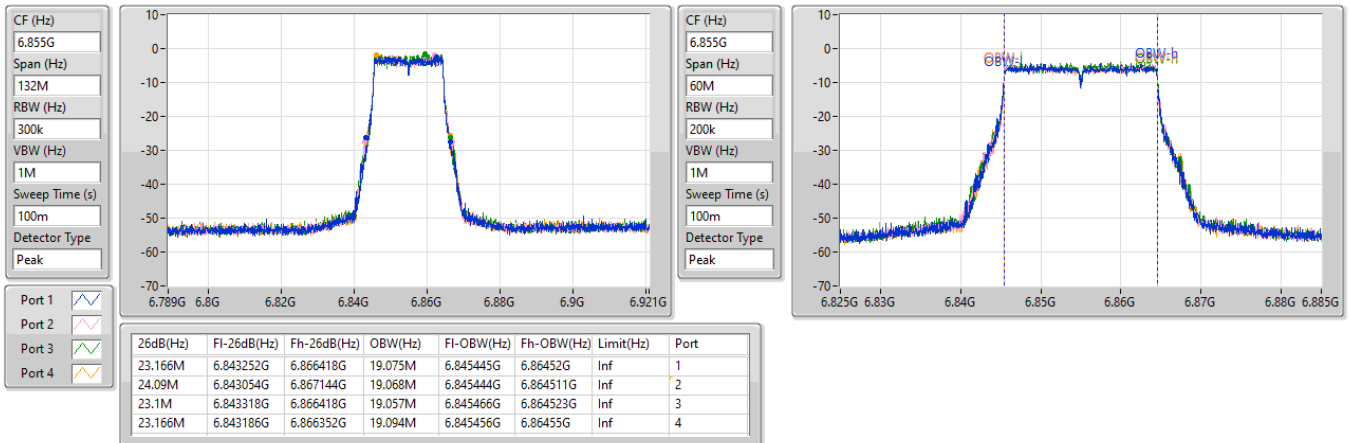

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6875MHz Straddle 6.875-7.125GHz


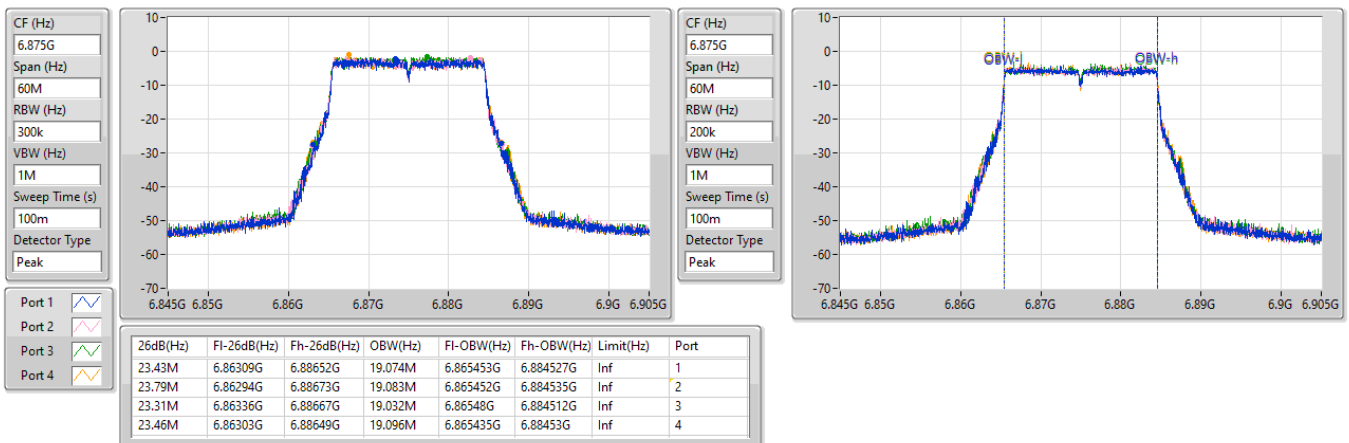




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6895MHz

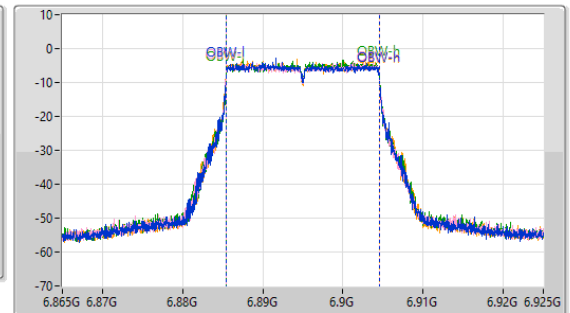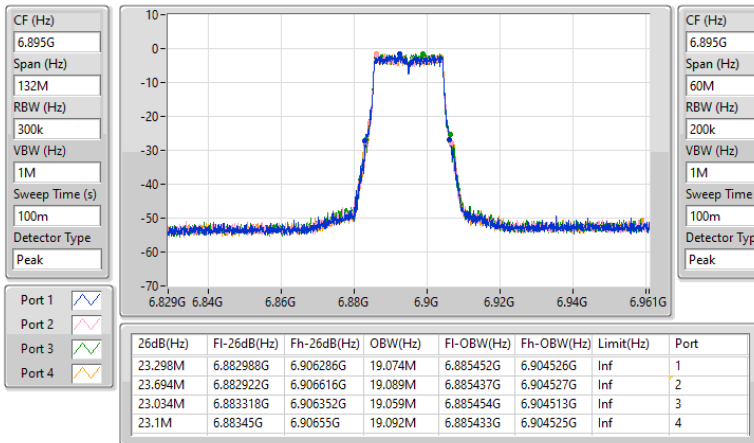

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

7015MHz

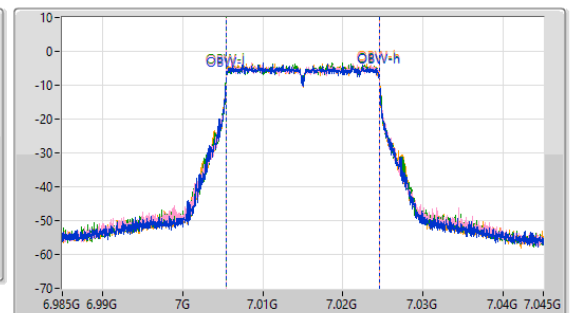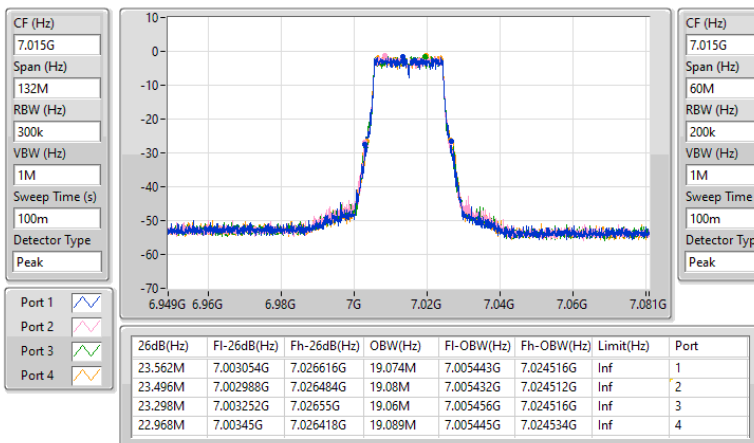




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


7095MHz

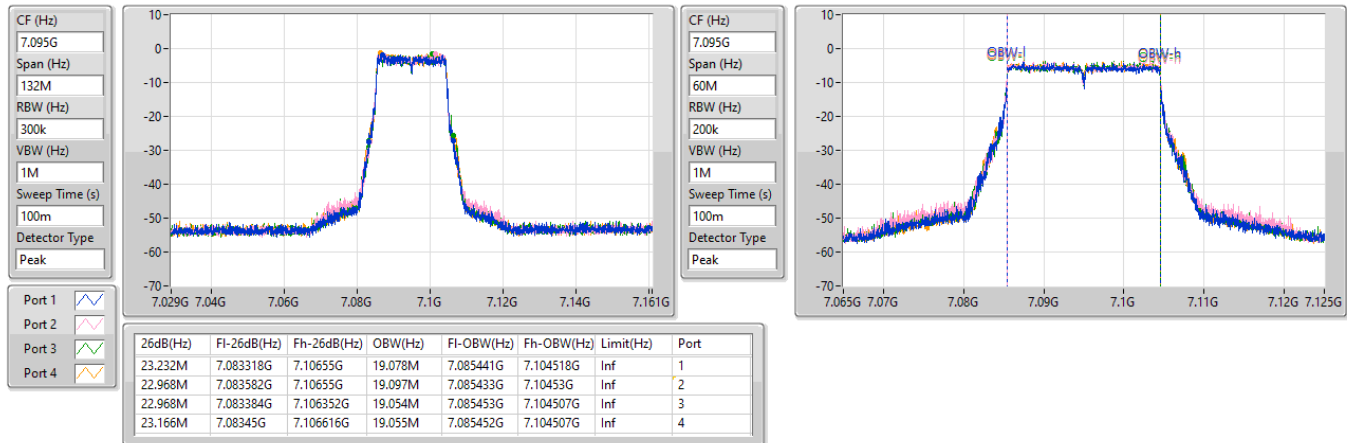

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

7115MHz

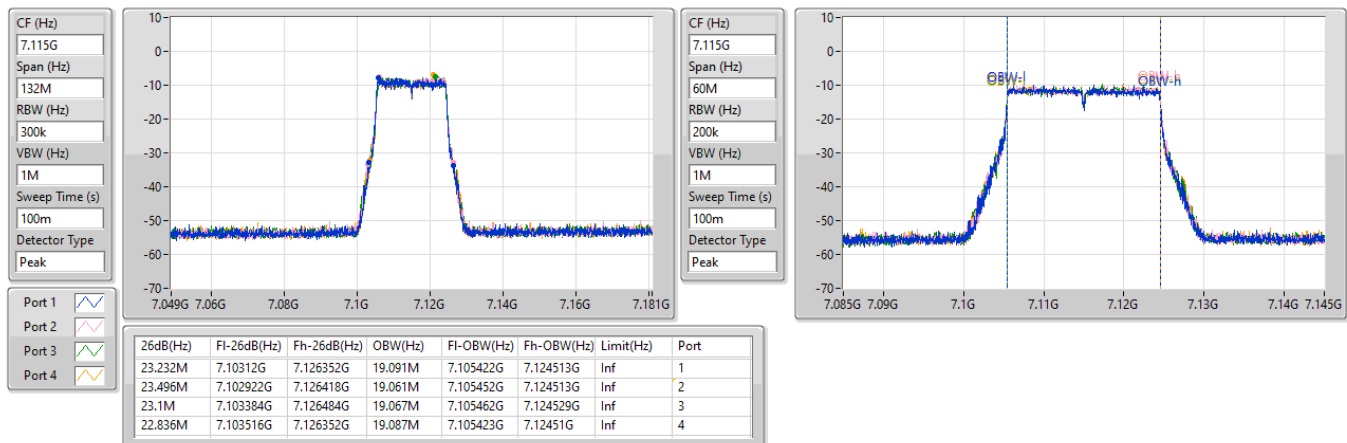




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


5965MHz

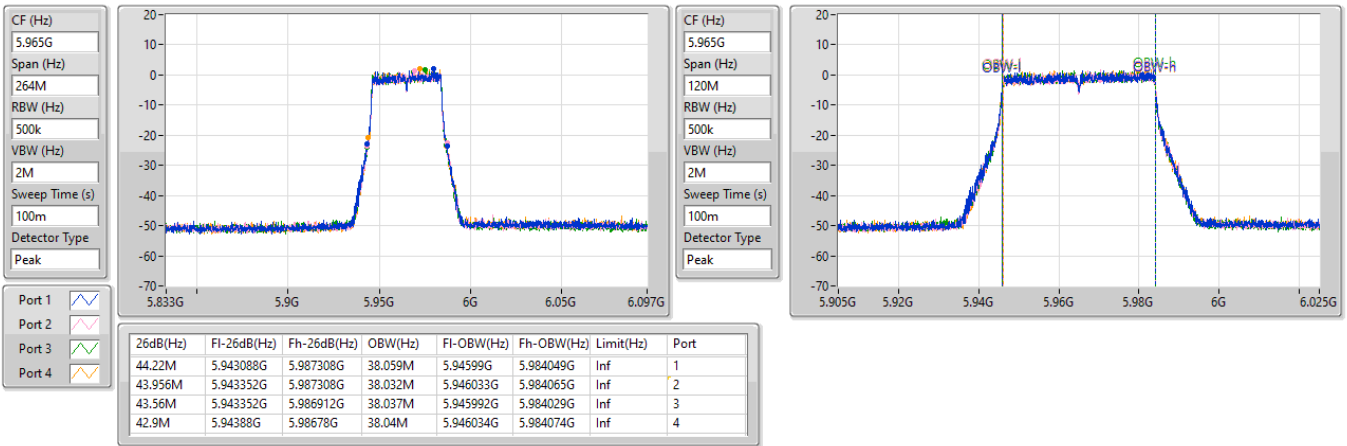

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6165MHz


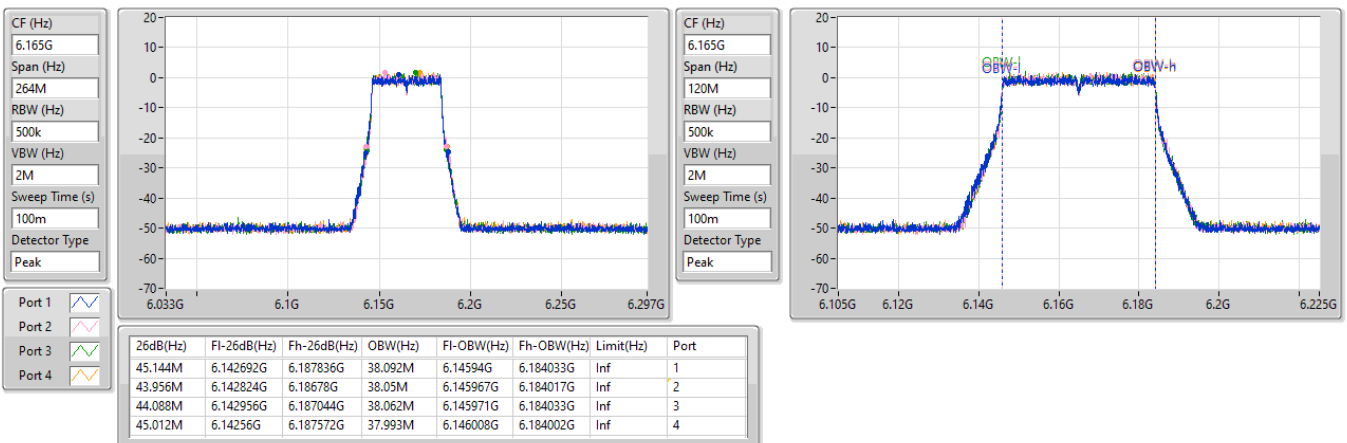




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6405MHz

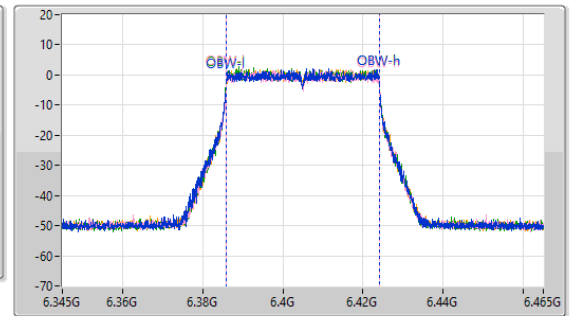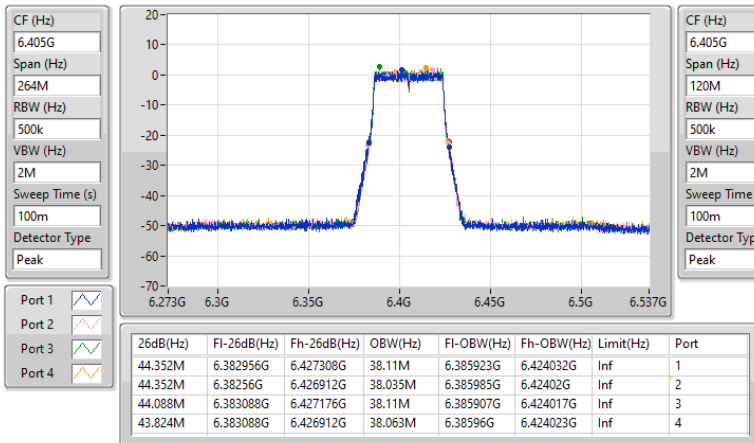

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6445MHz

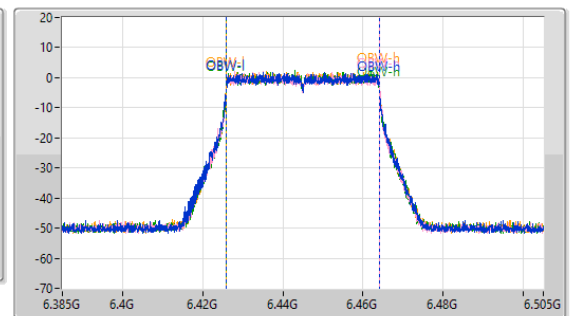
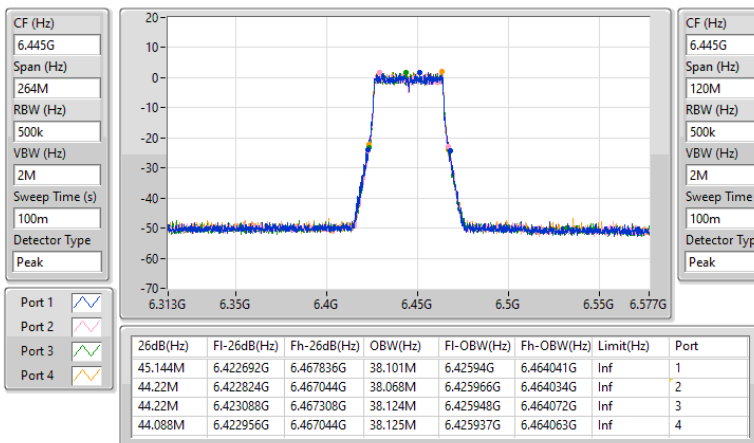




6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6485MHz

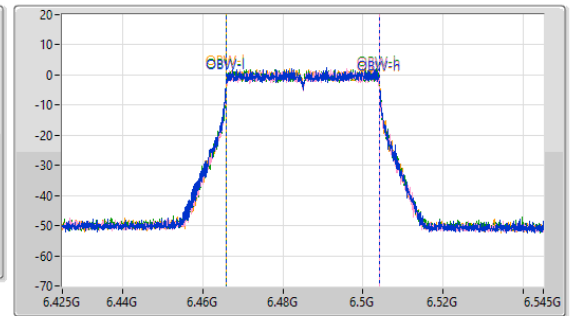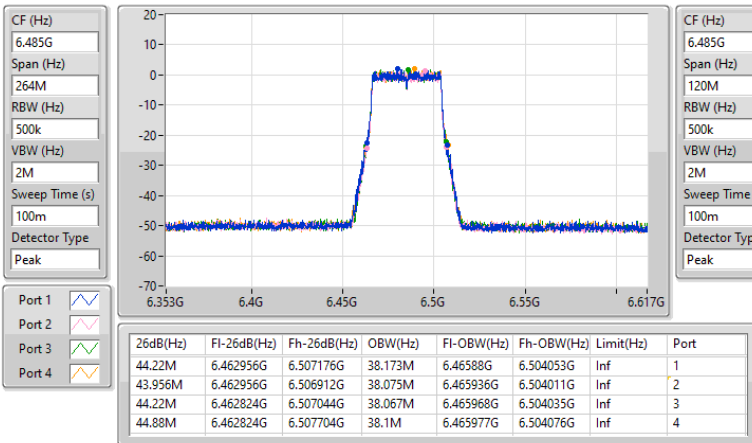

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6525MHz Straddle 6.425-6.525GHz

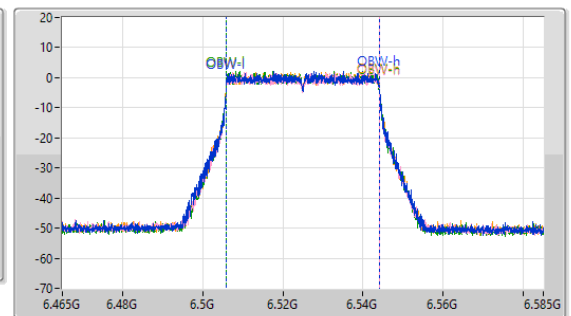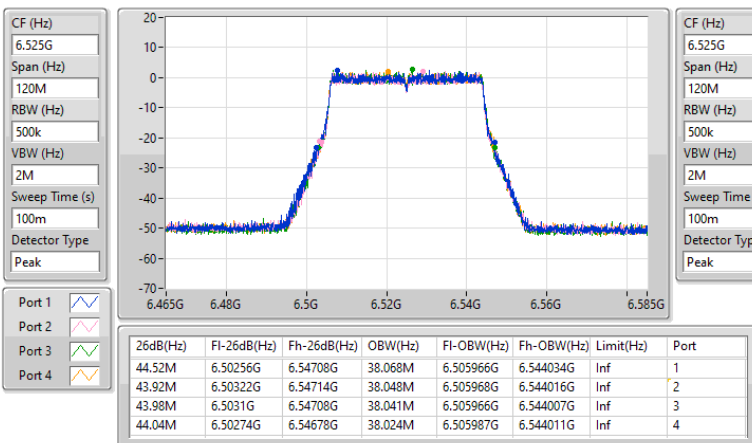




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6565MHz

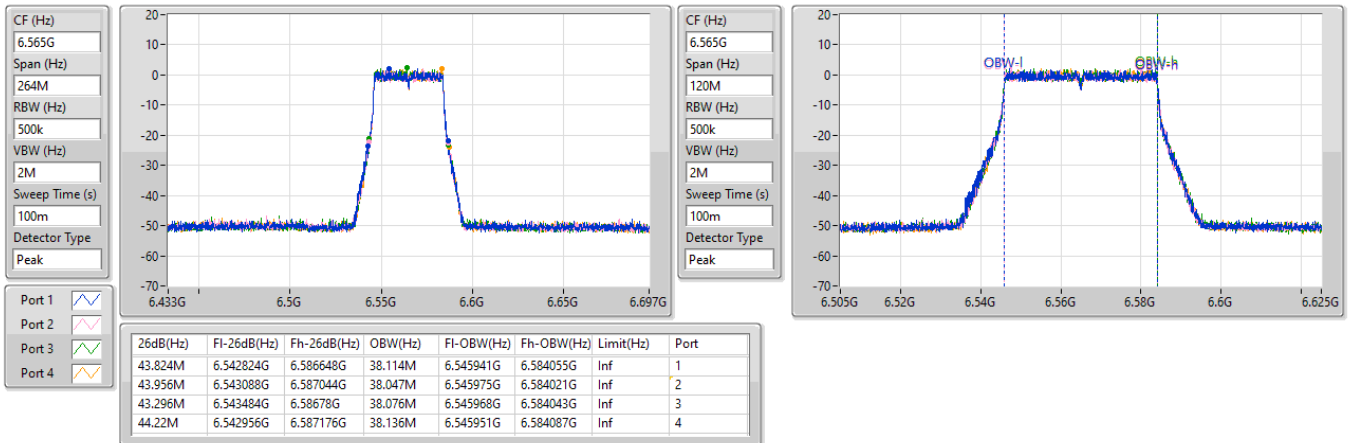

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6725MHz


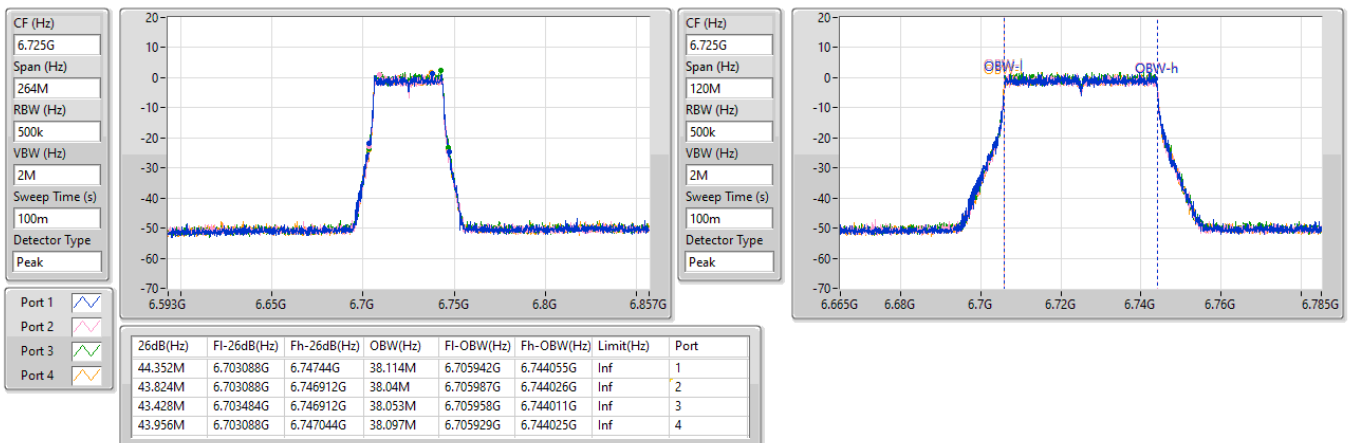




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6845MHz

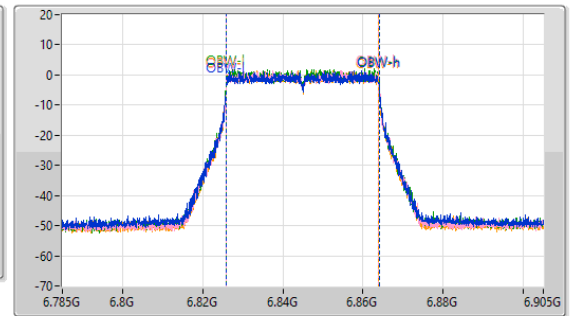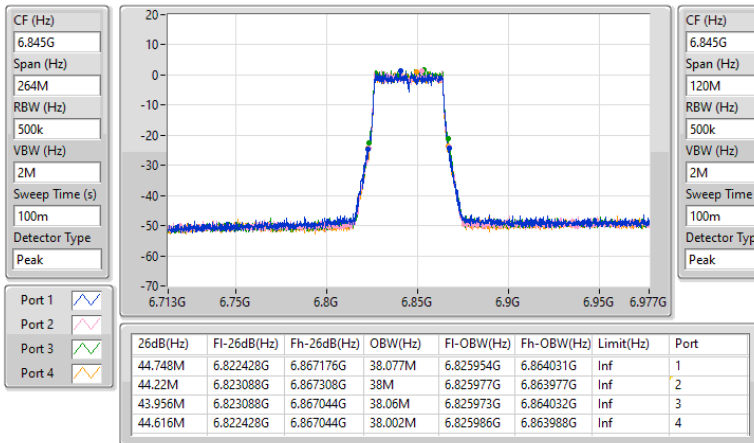

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6885MHz Straddle 6.875-7.125GHz

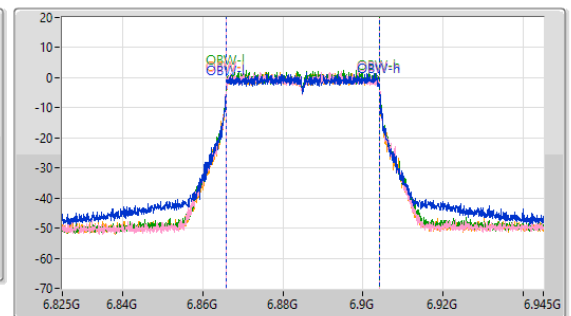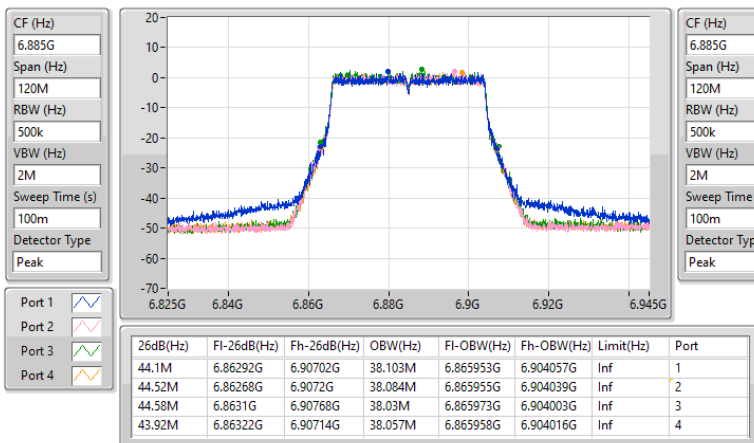




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6925MHz

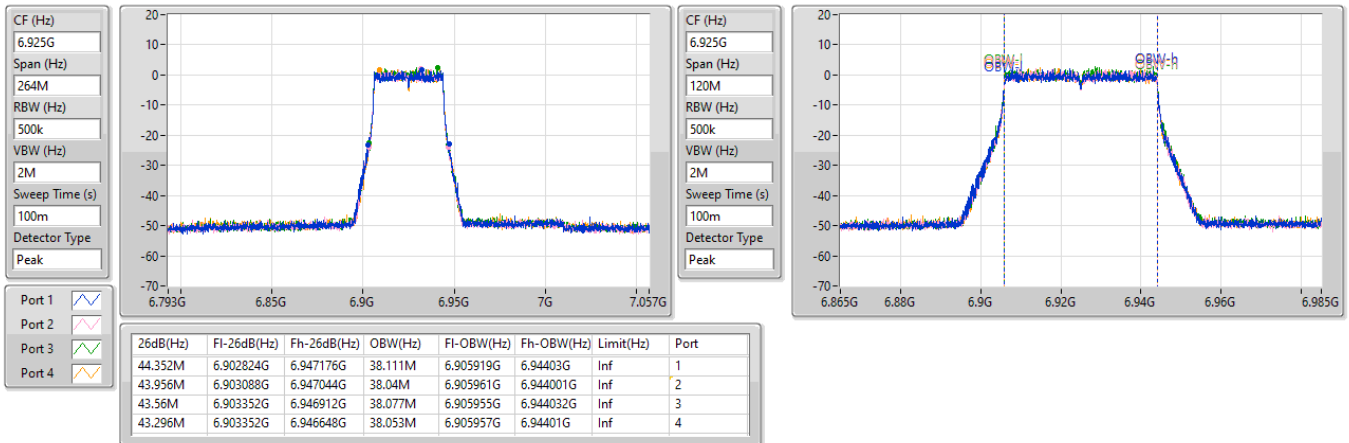

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

7005MHz

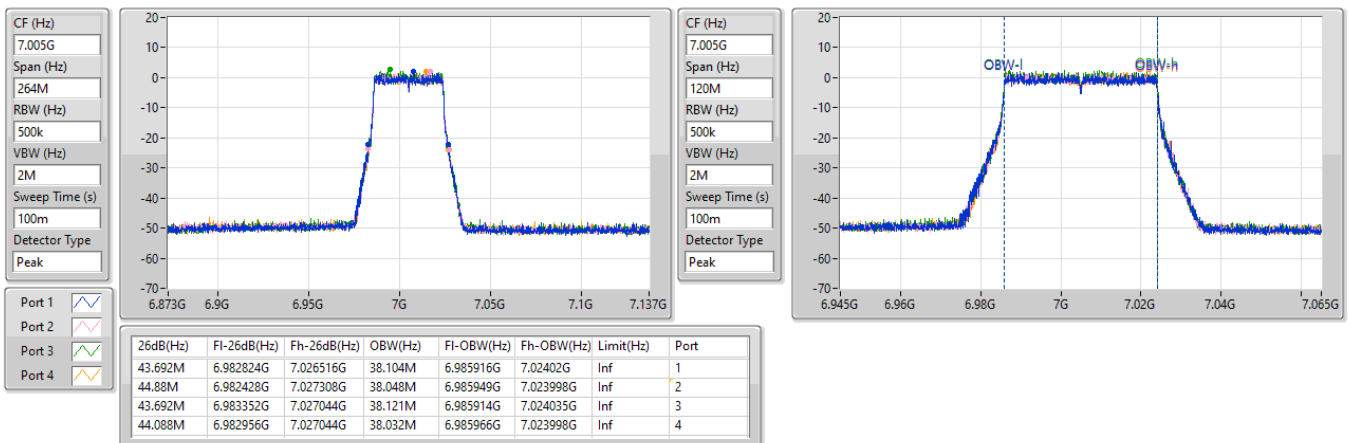




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


7085MHz

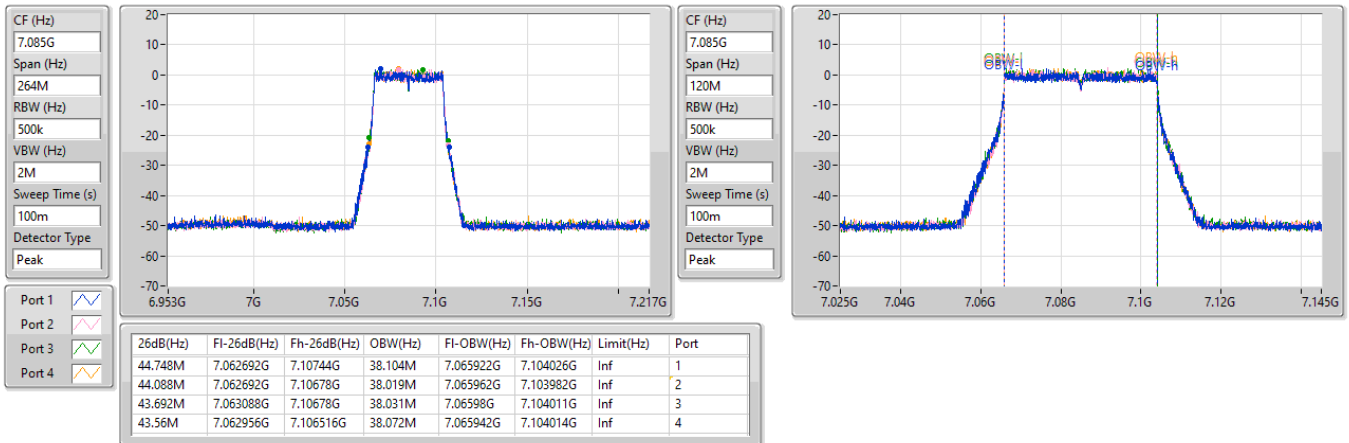

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5985MHz


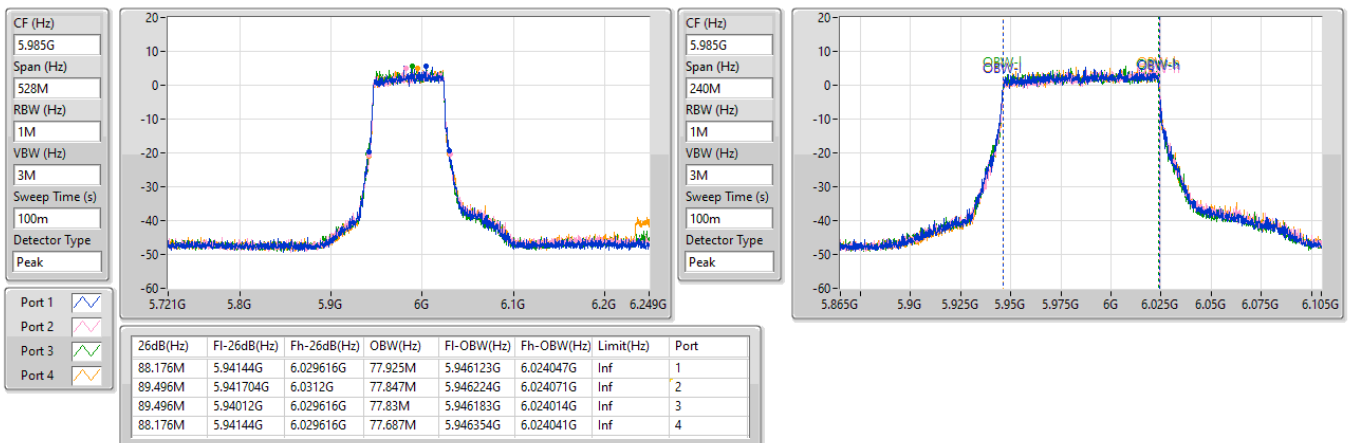




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6145MHz

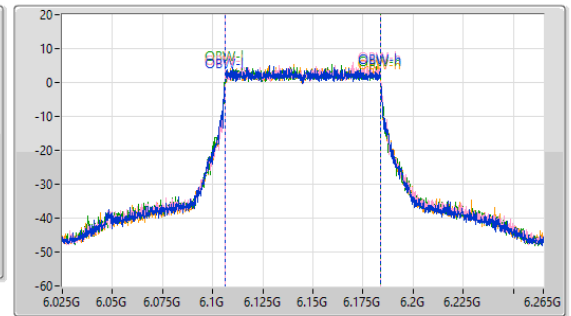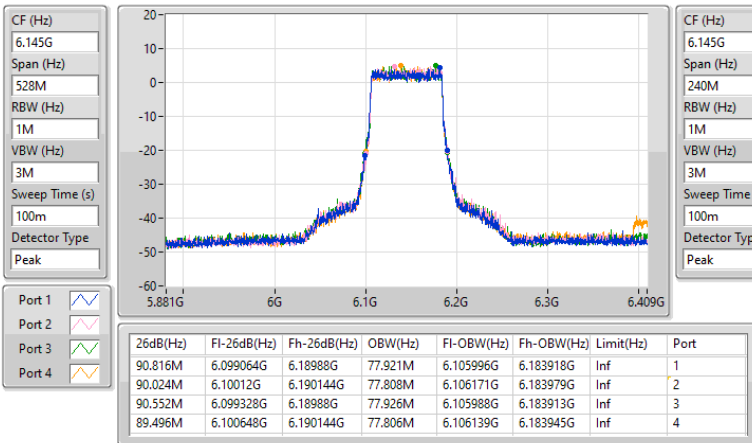

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6385MHz

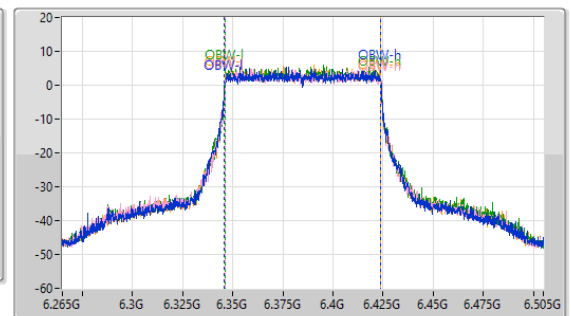
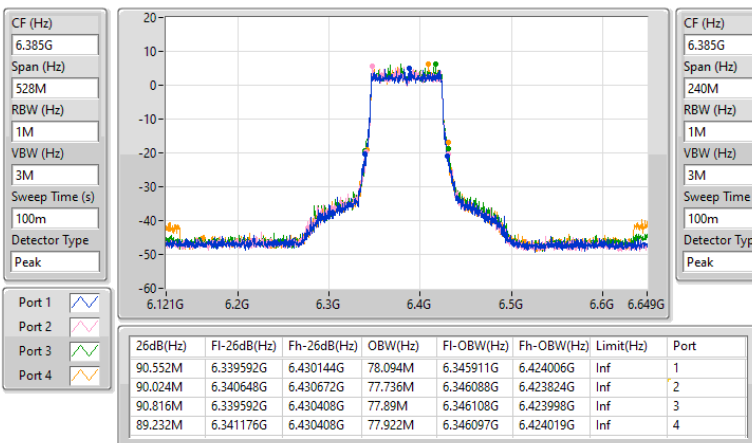




6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6465MHz

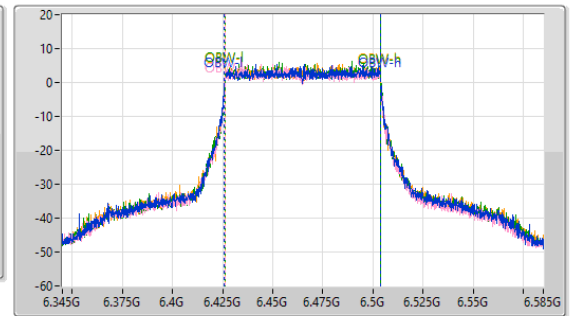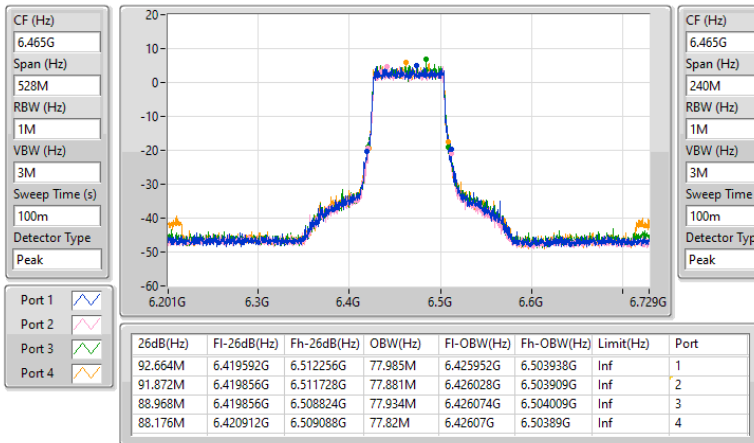

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6545MHz Straddle 6.425-6.525GHz

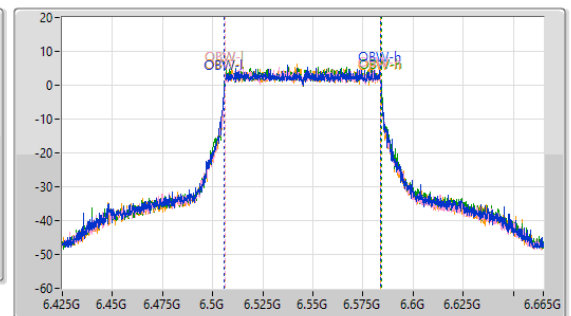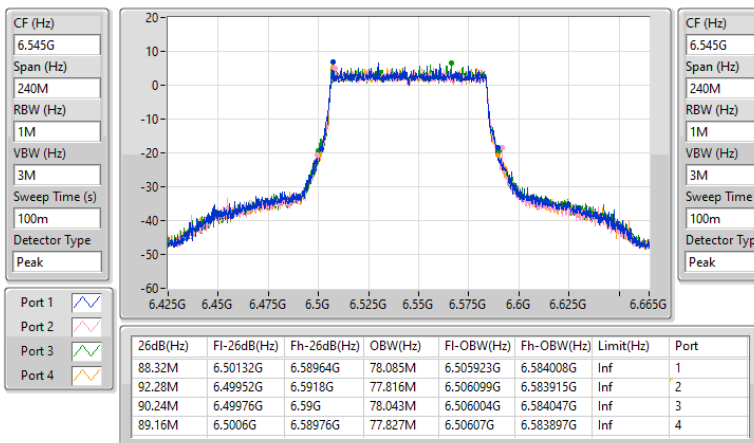




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


6625MHz

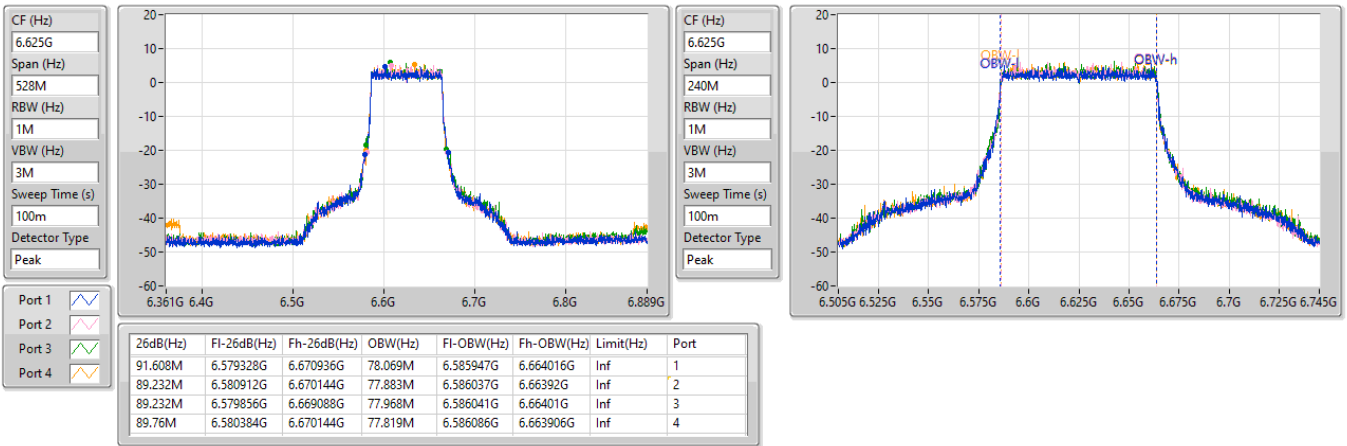

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6705MHz


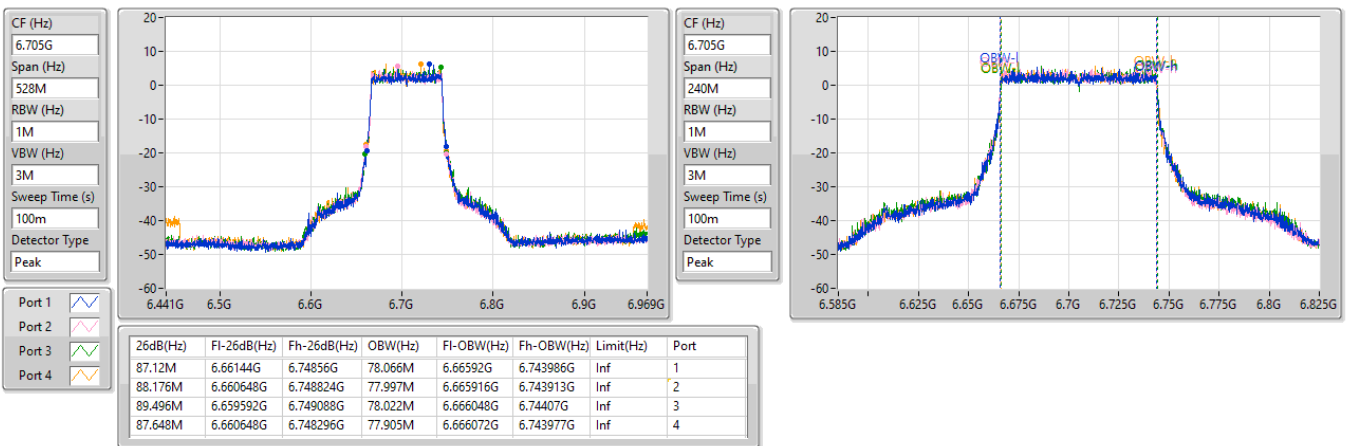




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6785MHz

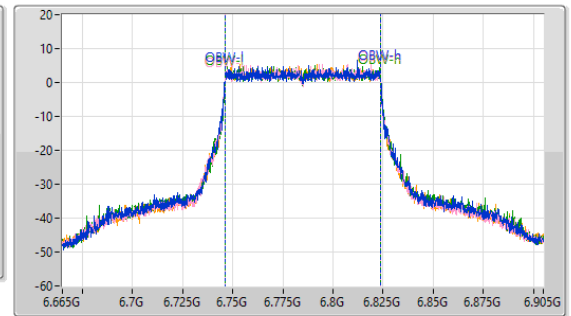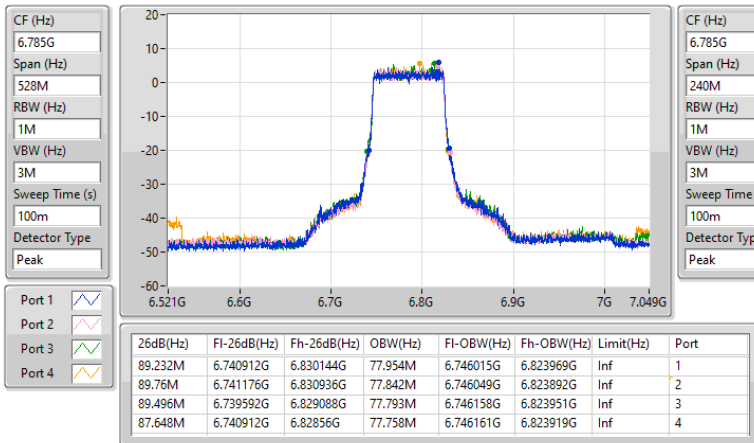

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6865MHz Straddle 6.875-7.125GHz

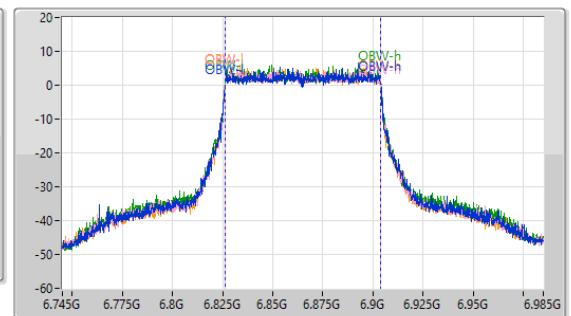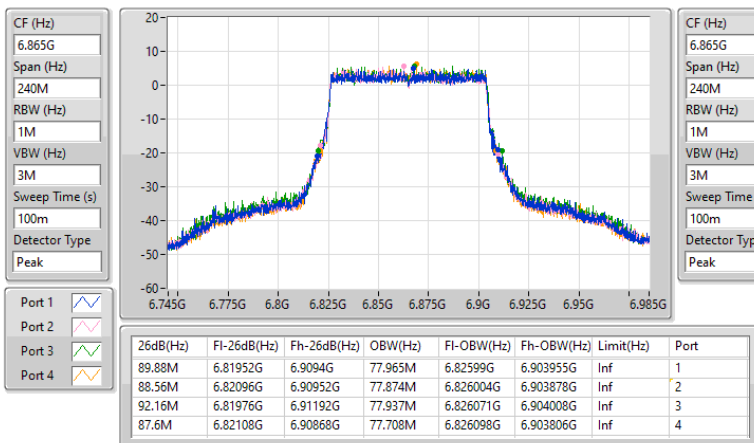




6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


6945MHz

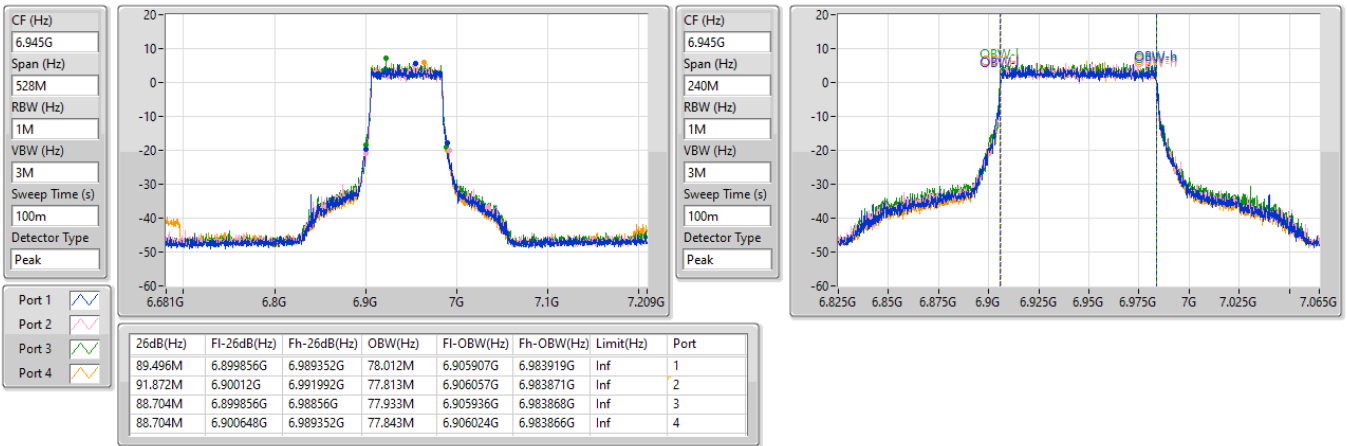

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

7025MHz

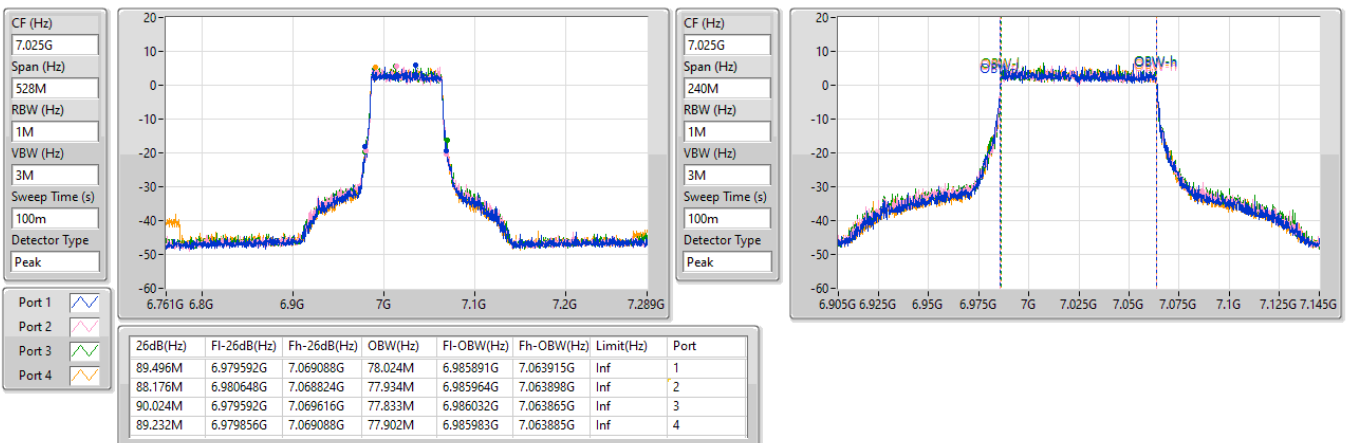




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6025MHz

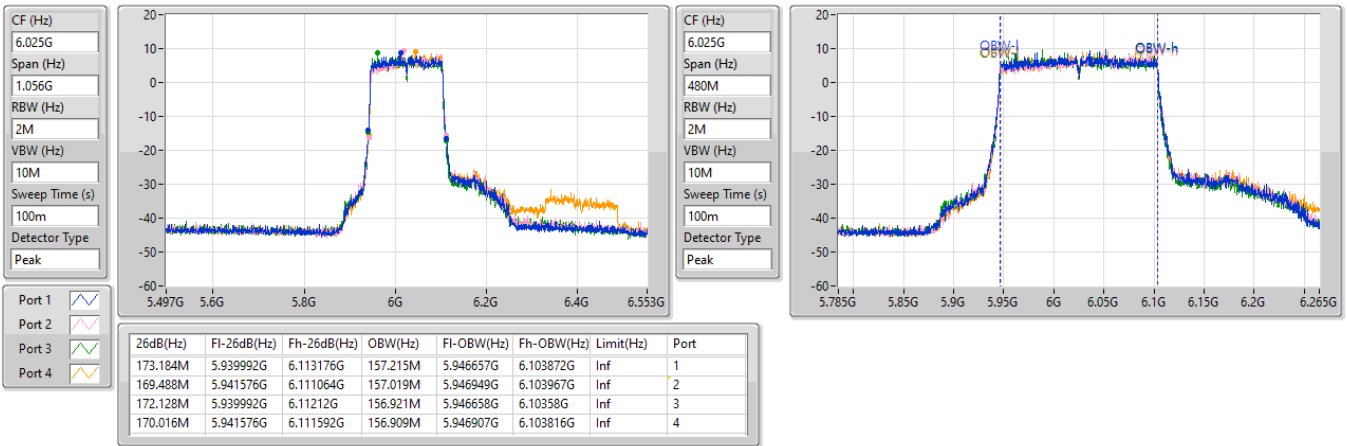

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6185MHz


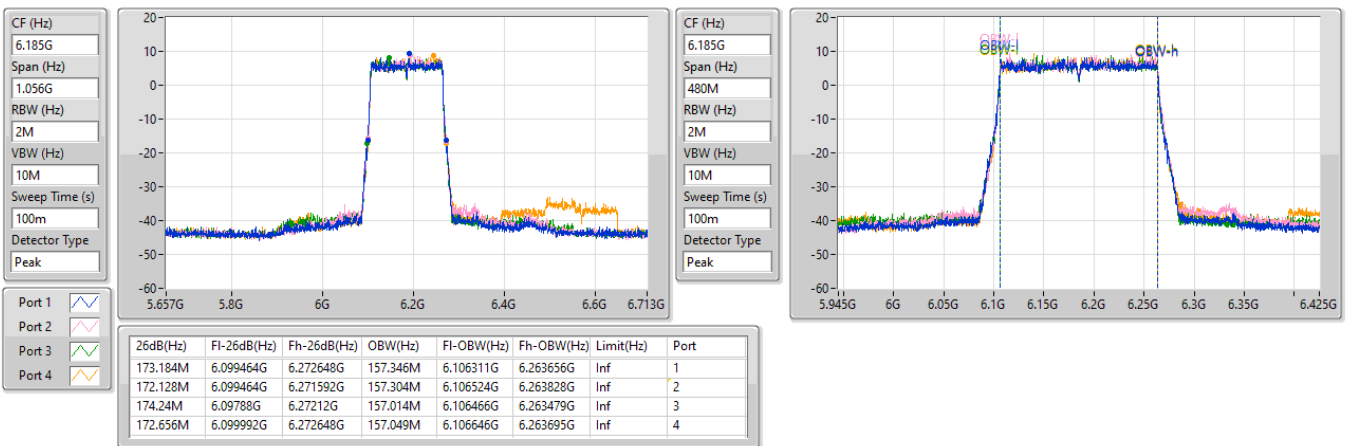




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6345MHz

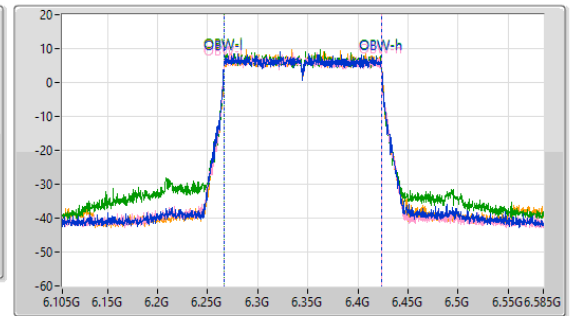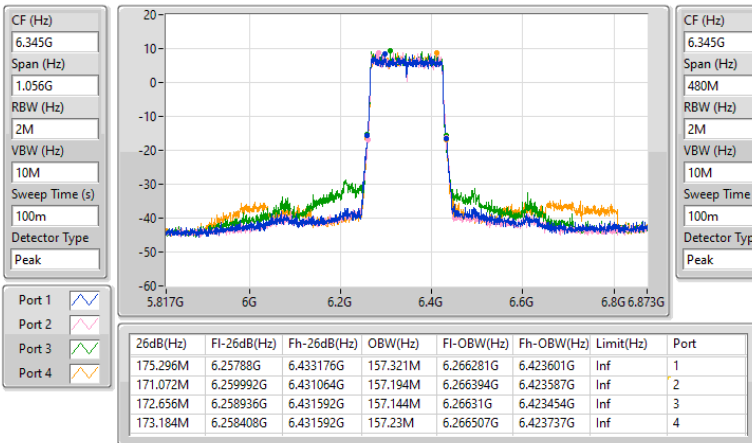

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6505MHz Straddle 6.425-6.525GHz

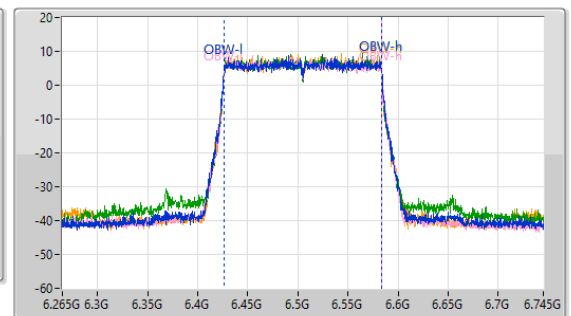
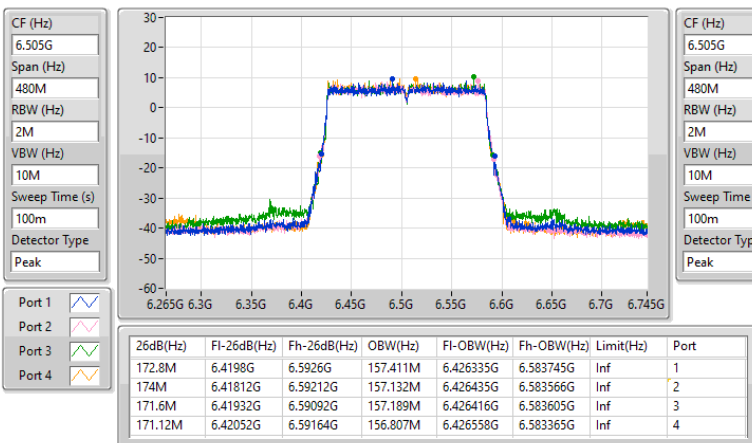




6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6665MHz

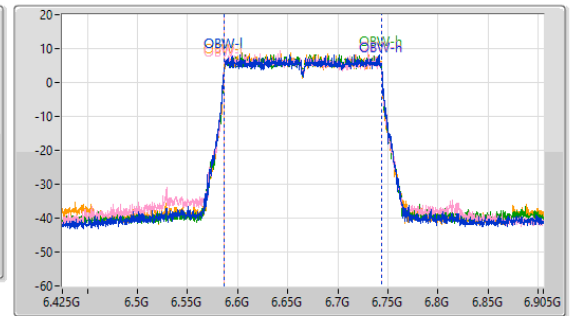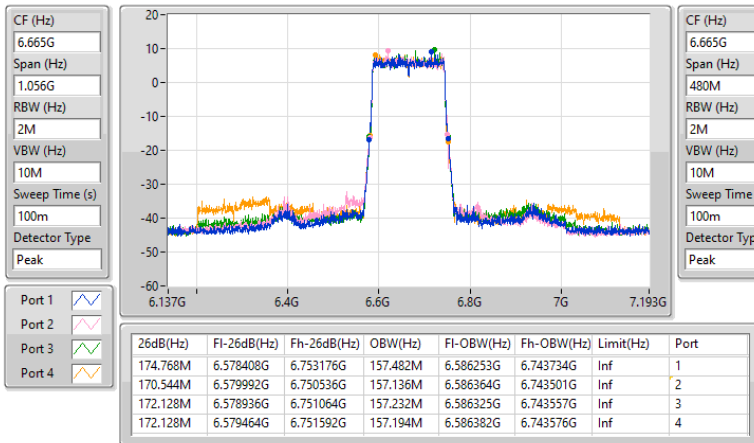

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6825MHz Straddle 6.875-7.125GHz

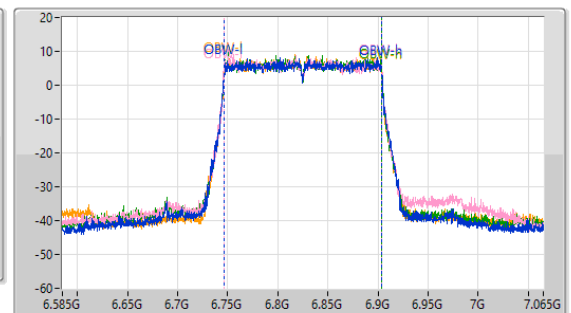
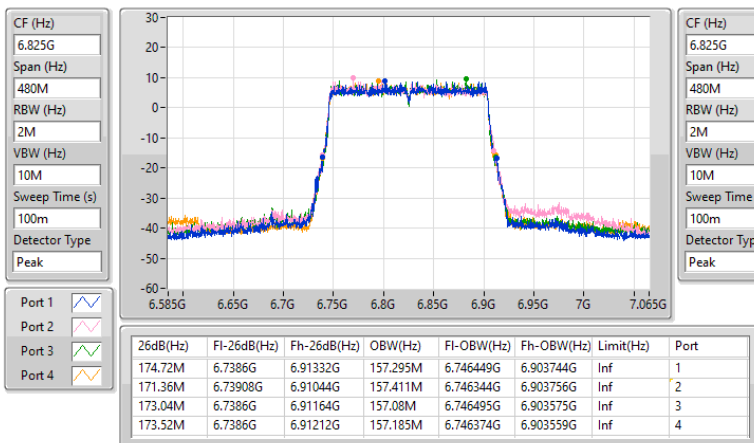




6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6985MHz

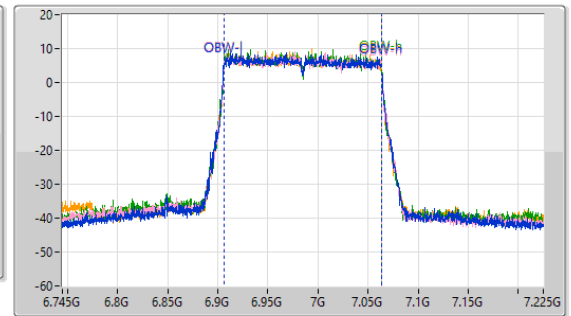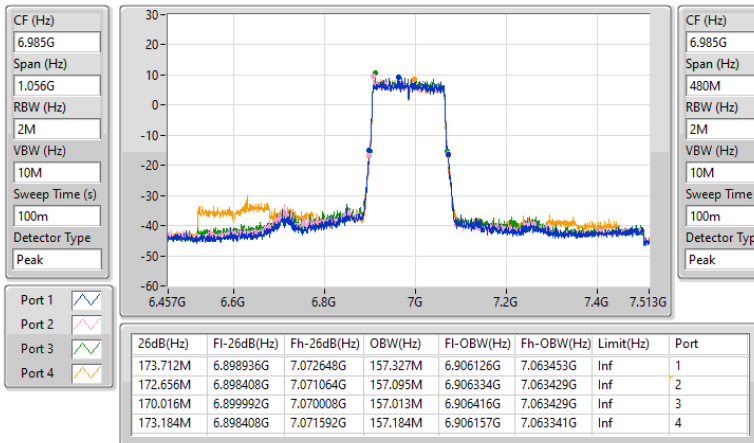

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6105MHz

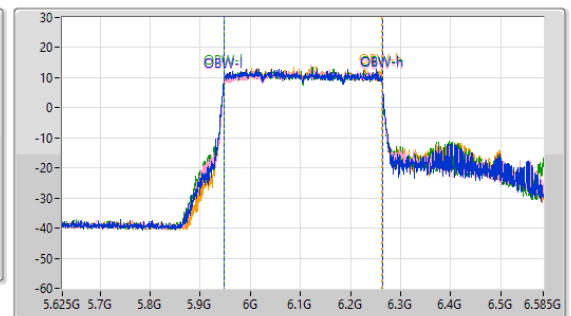
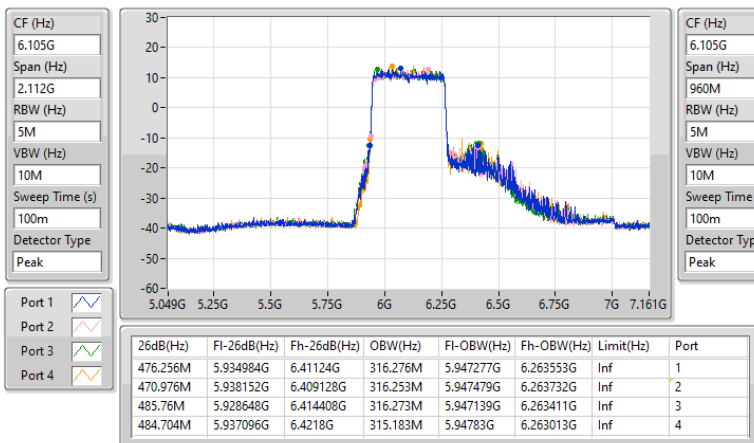




5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW



6265MHz

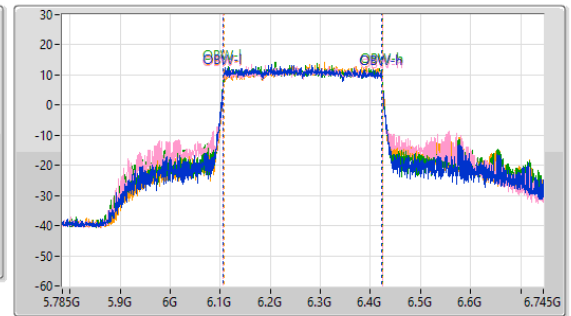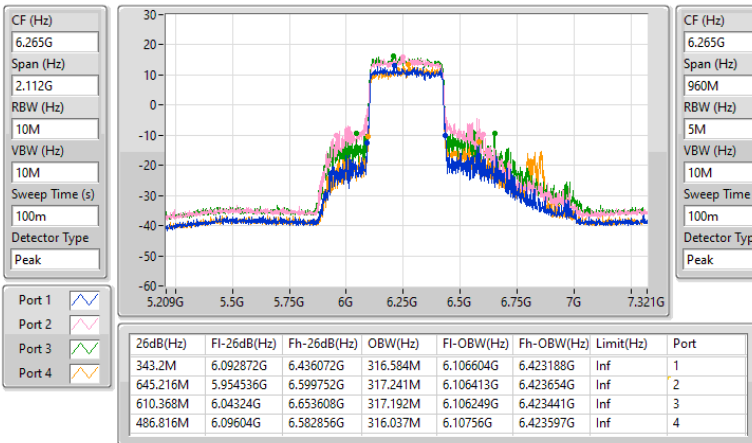

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6425MHz Straddle 6.425-6.525GHz

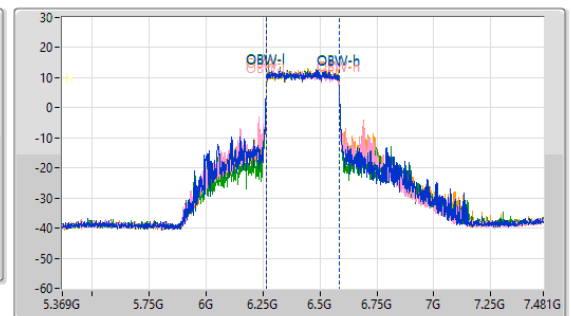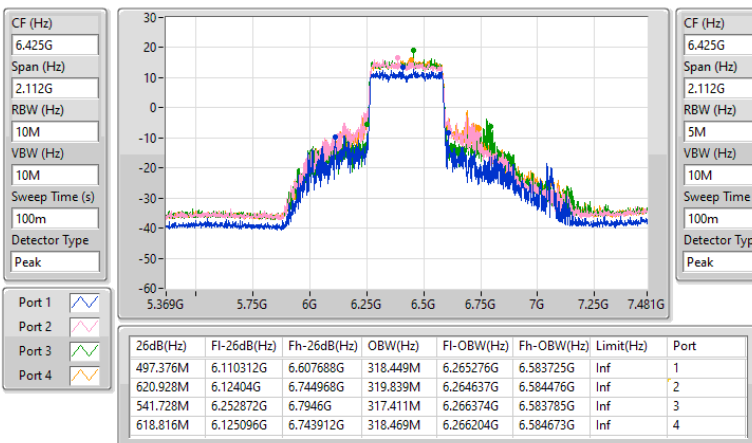




6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW


6585MHz Straddle 6.425-6.525GHz

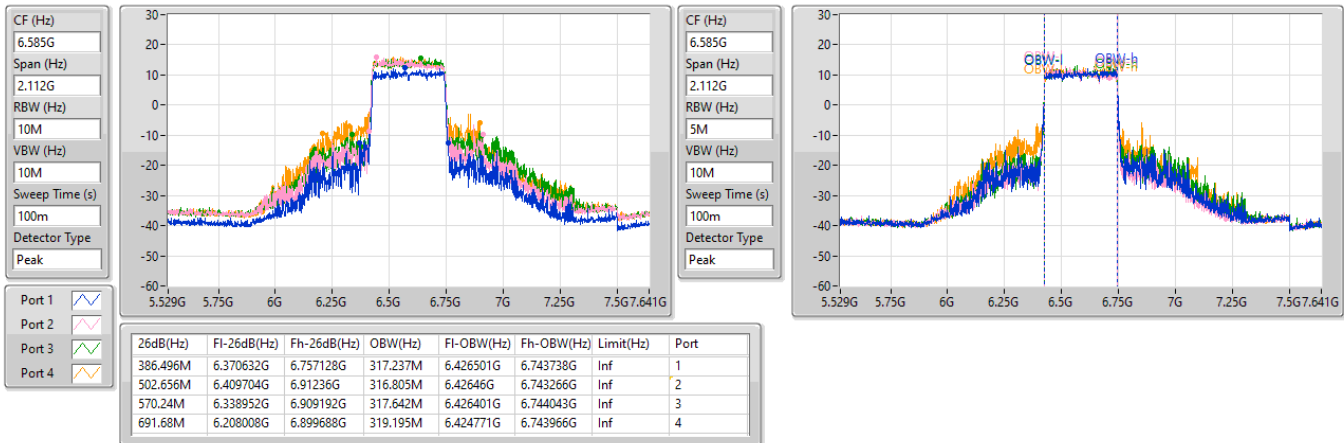

6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6745MHz Straddle 6.875-7.125GHz

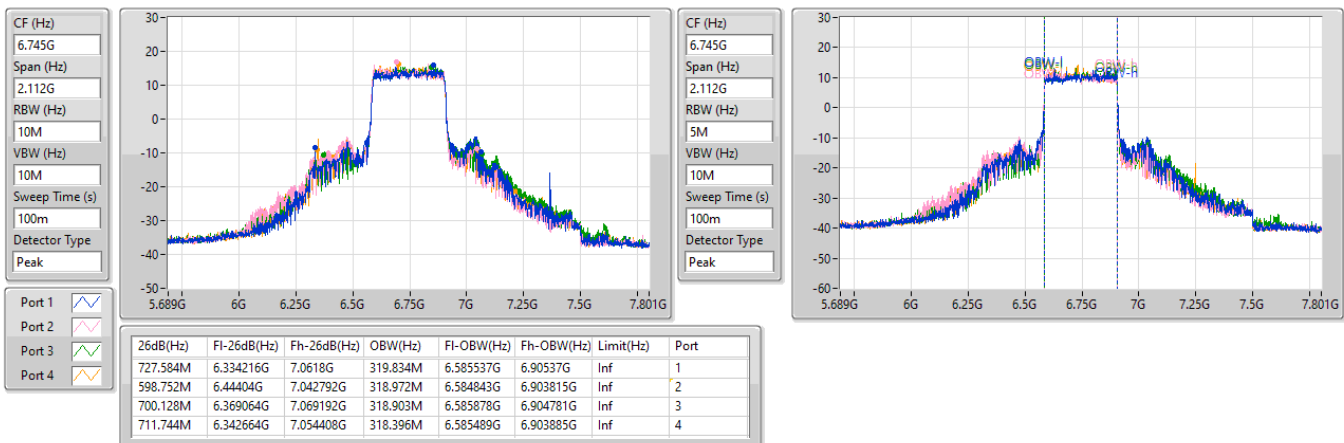




6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6905MHz Straddle 6.875-7.125GHz

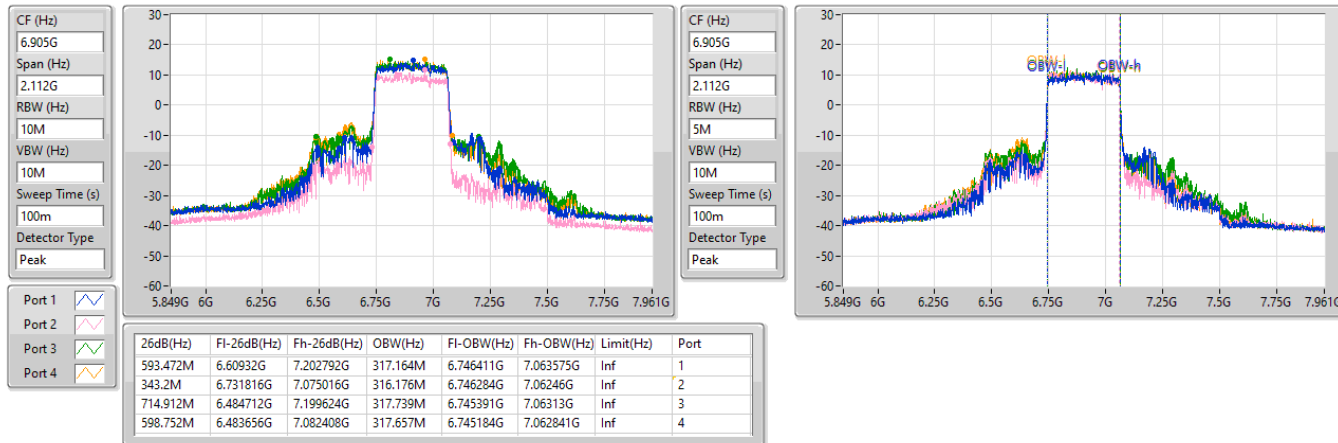

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	12.06	0.01607	14.68	0.02938
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.54	0.01795	15.16	0.03281
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.82	0.03819	18.44	0.06982
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.35	0.06839	20.97	0.12503
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.81	0.15171	24.43	0.27733
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	24.71	0.29580	27.33	0.54075
6.425-6.525GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	12.24	0.01675	14.87	0.03069
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.71	0.01866	15.34	0.03420
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.67	0.03690	18.30	0.06761
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.42	0.06950	21.05	0.12735
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.67	0.14689	24.30	0.26915
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	24.76	0.29923	27.39	0.54828
6.525-6.875GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	12.14	0.01637	14.71	0.02958
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.51	0.01782	15.08	0.03221
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.78	0.03784	18.35	0.06839
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.41	0.06934	20.98	0.12531
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.69	0.14757	24.26	0.26669
6.875-7.125GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	12.76	0.01888	15.35	0.03428
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.60	0.01820	15.19	0.03304
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.76	0.03767	18.35	0.06839
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.36	0.06855	20.95	0.12445
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.59	0.14421	24.18	0.26182
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	24.76	0.29923	27.35	0.54325

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	2.62	5.66	5.78	6.08	6.08	11.92	Inf	14.54	30.00
6175MHz	Pass	2.62	5.95	6.04	6.08	6.09	12.06	Inf	14.68	30.00
6415MHz	Pass	2.62	5.89	5.57	6.33	5.82	11.93	Inf	14.55	30.00
6435MHz	Pass	2.63	5.99	6.39	6.27	6.23	12.24	Inf	14.87	30.00
6475MHz	Pass	2.63	5.99	5.46	6.4	6.36	12.09	Inf	14.72	30.00
6515MHz	Pass	2.63	5.93	5.69	3.33	5.9	11.36	Inf	13.99	30.00
6535MHz	Pass	2.57	5.84	5.69	6.28	5.84	11.94	Inf	14.51	30.00
6715MHz	Pass	2.57	5.97	5.91	6.33	6.24	12.14	Inf	14.71	30.00
6855MHz	Pass	2.57	5.97	5.72	6.52	6.17	12.13	Inf	14.70	30.00
6875MHz Straddle 6.875-7.125GHz	Pass	2.59	6.37	6.19	6.76	6.29	12.43	Inf	15.02	30.00
6895MHz	Pass	2.59	6.5	6.28	6.84	6.39	12.53	Inf	15.12	30.00
7015MHz	Pass	2.59	6.62	6.58	6.56	6.23	12.52	Inf	15.11	30.00
7095MHz	Pass	2.59	6.6	6.78	6.84	6.73	12.76	Inf	15.35	30.00
7115MHz	Pass	2.59	6.61	6.48	6.84	6.59	12.65	Inf	15.24	30.00
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	2.62	6.33	6.45	6.64	6.45	12.49	Inf	15.11	30.00
6175MHz	Pass	2.62	6.37	6.55	6.52	5.94	12.37	Inf	14.99	30.00
6415MHz	Pass	2.62	6.55	6.34	6.95	6.19	12.54	Inf	15.16	30.00
6435MHz	Pass	2.63	6.67	6.04	6.86	6.88	12.65	Inf	15.28	30.00
6475MHz	Pass	2.63	6.72	6.13	7.03	6.84	12.71	Inf	15.34	30.00
6515MHz	Pass	2.63	6.44	6.25	6.75	6.45	12.50	Inf	15.13	30.00
6535MHz	Pass	2.57	6.37	6.2	6.68	6.17	12.38	Inf	14.95	30.00
6715MHz	Pass	2.57	6.32	6.28	6.75	6.58	12.51	Inf	15.08	30.00
6855MHz	Pass	2.57	6.27	6.09	6.86	6.31	12.41	Inf	14.98	30.00
6875MHz Straddle 6.875-7.125GHz	Pass	2.59	6.56	6.41	6.94	6.37	12.60	Inf	15.19	30.00
6895MHz	Pass	2.59	6.53	6.24	6.81	6.38	12.52	Inf	15.11	30.00
7015MHz	Pass	2.59	6.64	6.57	6.56	6.35	12.55	Inf	15.14	30.00
7095MHz	Pass	2.59	6.41	6.58	6.59	6.67	12.58	Inf	15.17	30.00
7115MHz	Pass	2.59	0.22	0.35	0.46	0.56	6.42	Inf	9.01	30.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	2.62	9.13	9.02	9.18	9.31	15.18	Inf	17.80	30.00
6165MHz	Pass	2.62	9.48	9.39	9.62	9.22	15.45	Inf	18.07	30.00
6405MHz	Pass	2.62	9.71	9.52	10.08	9.85	15.82	Inf	18.44	30.00
6445MHz	Pass	2.63	9.43	9.45	9.91	9.56	15.61	Inf	18.24	30.00
6485MHz	Pass	2.63	9.58	9.4	9.82	9.78	15.67	Inf	18.30	30.00
6525MHz Straddle 6.425-6.525GHz	Pass	2.63	9.79	9.38	9.78	9.43	15.62	Inf	18.25	30.00
6565MHz	Pass	2.57	9.74	9.62	9.83	9.84	15.78	Inf	18.35	30.00
6725MHz	Pass	2.57	9.56	9.22	10.19	9.84	15.74	Inf	18.31	30.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6845MHz	Pass	2.57	9.16	9.25	10.21	9.38	15.54	Inf	18.11	30.00
6885MHz Straddle 6.875-7.125GHz	Pass	2.59	9.56	9.57	10.15	9.64	15.76	Inf	18.35	30.00
6925MHz	Pass	2.59	9.49	9.41	9.94	9.49	15.61	Inf	18.20	30.00
7005MHz	Pass	2.59	9.72	9.62	10	9.42	15.72	Inf	18.31	30.00
7085MHz	Pass	2.59	9.5	9.52	9.71	9.76	15.64	Inf	18.23	30.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	2.62	11.89	11.71	11.9	11.87	17.86	Inf	20.48	30.00
6145MHz	Pass	2.62	12.14	12.3	12.41	12.32	18.31	Inf	20.93	30.00
6385MHz	Pass	2.62	12.24	12.14	12.66	12.27	18.35	Inf	20.97	30.00
6465MHz	Pass	2.63	12.4	11.92	12.56	12.57	18.39	Inf	21.02	30.00
6545MHz Straddle 6.425-6.525GHz	Pass	2.63	12.37	12.25	12.69	12.29	18.42	Inf	21.05	30.00
6625MHz	Pass	2.57	12.22	12.48	12.41	12.44	18.41	Inf	20.98	30.00
6705MHz	Pass	2.57	12.11	12.21	12.56	12.59	18.39	Inf	20.96	30.00
6785MHz	Pass	2.57	12.11	12.02	12.49	12.42	18.29	Inf	20.86	30.00
6865MHz Straddle 6.875-7.125GHz	Pass	2.59	12.1	12.02	12.4	12.4	18.25	Inf	20.84	30.00
6945MHz	Pass	2.59	12.27	12.29	12.66	12.14	18.36	Inf	20.95	30.00
7025MHz	Pass	2.59	12.26	12.25	12.24	12.24	18.27	Inf	20.86	30.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	2.62	15.25	15.13	15.12	15.45	21.26	Inf	23.88	30.00
6185MHz	Pass	2.62	15.45	15.56	15.61	15.64	21.59	Inf	24.21	30.00
6345MHz	Pass	2.62	15.62	15.67	16.01	15.85	21.81	Inf	24.43	30.00
6505MHz Straddle 6.425-6.525GHz	Pass	2.63	15.41	15.36	15.88	15.92	21.67	Inf	24.30	30.00
6665MHz	Pass	2.57	15.45	15.72	15.78	15.72	21.69	Inf	24.26	30.00
6825MHz Straddle 6.875-7.125GHz	Pass	2.59	15.31	15.36	15.82	15.62	21.55	Inf	24.14	30.00
6985MHz	Pass	2.59	15.45	15.42	15.82	15.57	21.59	Inf	24.18	30.00
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	2.62	18.36	18.35	18.22	18.33	24.34	Inf	26.96	30.00
6265MHz	Pass	2.62	18.61	18.6	18.71	18.82	24.71	Inf	27.33	30.00
6425MHz Straddle 6.425-6.525GHz	Pass	2.63	18.76	18.59	18.78	18.82	24.76	Inf	27.39	30.00
6585MHz Straddle 6.425-6.525GHz	Pass	2.63	18.26	18.15	18.21	18.39	24.27	Inf	26.90	30.00
6745MHz Straddle 6.875-7.125GHz	Pass	2.59	18.55	18.62	18.91	18.87	24.76	Inf	27.35	30.00
6905MHz Straddle 6.875-7.125GHz	Pass	2.59	16.83	16.78	17.31	17.08	23.03	Inf	25.62	30.00

DG = Directional Gain; Port X = Port X output power

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	9.32	0.00855	15.16	0.03281
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	12.60	0.01820	18.44	0.06982
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	15.13	0.03258	20.97	0.12503
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	18.59	0.07228	24.43	0.27733
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	21.49	0.14093	27.33	0.54075
6.425-6.525GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	9.46	0.00883	15.34	0.03420
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	12.42	0.01746	18.30	0.06761
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	15.17	0.03289	21.05	0.12735
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	18.42	0.06950	24.30	0.26915
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	21.51	0.14158	27.39	0.54828
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	9.34	0.00859	15.08	0.03221
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	12.61	0.01824	18.35	0.06839
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	15.24	0.03342	20.98	0.12531
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	18.52	0.07112	24.26	0.26669
6.875-7.125GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	9.40	0.00871	15.19	0.03304
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	12.56	0.01803	18.35	0.06839
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	15.16	0.03281	20.95	0.12445
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	18.39	0.06902	24.18	0.26182
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	21.56	0.14322	27.35	0.54325

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.84	3.11	3.23	3.42	3.23	9.27	Inf	15.11	30.00
6175MHz	Pass	5.84	3.15	3.33	3.3	2.72	9.15	Inf	14.99	30.00
6415MHz	Pass	5.84	3.33	3.12	3.73	2.97	9.32	Inf	15.16	30.00
6435MHz	Pass	5.88	3.42	2.79	3.61	3.63	9.40	Inf	15.28	30.00
6475MHz	Pass	5.88	3.47	2.88	3.78	3.59	9.46	Inf	15.34	30.00
6515MHz	Pass	5.88	3.19	3	3.5	3.2	9.25	Inf	15.13	30.00
6535MHz	Pass	5.74	3.2	3.03	3.51	3	9.21	Inf	14.95	30.00
6715MHz	Pass	5.74	3.15	3.11	3.58	3.41	9.34	Inf	15.08	30.00
6855MHz	Pass	5.74	3.1	2.92	3.69	3.14	9.24	Inf	14.98	30.00
6875MHz Straddle 6.875-7.125GHz	Pass	5.79	3.36	3.21	3.74	3.17	9.40	Inf	15.19	30.00
6895MHz	Pass	5.79	3.33	3.04	3.61	3.18	9.32	Inf	15.11	30.00
7015MHz	Pass	5.79	3.44	3.37	3.36	3.15	9.35	Inf	15.14	30.00
7095MHz	Pass	5.79	3.21	3.38	3.39	3.47	9.38	Inf	15.17	30.00
7115MHz	Pass	5.79	-2.98	-2.85	-2.74	-2.64	3.22	Inf	9.01	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	5.84	5.91	5.8	5.96	6.09	11.96	Inf	17.80	30.00
6165MHz	Pass	5.84	6.26	6.17	6.4	6	12.23	Inf	18.07	30.00
6405MHz	Pass	5.84	6.49	6.3	6.86	6.63	12.60	Inf	18.44	30.00
6445MHz	Pass	5.88	6.18	6.2	6.66	6.31	12.36	Inf	18.24	30.00
6485MHz	Pass	5.88	6.33	6.15	6.57	6.53	12.42	Inf	18.30	30.00
6525MHz Straddle 6.425-6.525GHz	Pass	5.88	6.54	6.13	6.53	6.18	12.37	Inf	18.25	30.00
6565MHz	Pass	5.74	6.57	6.45	6.66	6.67	12.61	Inf	18.35	30.00
6725MHz	Pass	5.74	6.39	6.05	7.02	6.67	12.57	Inf	18.31	30.00
6845MHz	Pass	5.74	5.99	6.08	7.04	6.21	12.37	Inf	18.11	30.00
6885MHz Straddle 6.875-7.125GHz	Pass	5.79	6.36	6.37	6.95	6.44	12.56	Inf	18.35	30.00
6925MHz	Pass	5.79	6.29	6.21	6.74	6.29	12.41	Inf	18.20	30.00
7005MHz	Pass	5.79	6.52	6.42	6.8	6.22	12.52	Inf	18.31	30.00
7085MHz	Pass	5.79	6.3	6.32	6.51	6.56	12.44	Inf	18.23	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.84	8.67	8.49	8.68	8.65	14.64	Inf	20.48	30.00
6145MHz	Pass	5.84	8.92	9.08	9.19	9.1	15.09	Inf	20.93	30.00
6385MHz	Pass	5.84	9.02	8.92	9.44	9.05	15.13	Inf	20.97	30.00
6465MHz	Pass	5.88	9.15	8.67	9.31	9.32	15.14	Inf	21.02	30.00
6545MHz Straddle 6.425-6.525GHz	Pass	5.88	9.12	9	9.44	9.04	15.17	Inf	21.05	30.00
6625MHz	Pass	5.74	9.05	9.31	9.24	9.27	15.24	Inf	20.98	30.00
6705MHz	Pass	5.74	8.94	9.04	9.39	9.42	15.22	Inf	20.96	30.00
6785MHz	Pass	5.74	8.94	8.85	9.32	9.25	15.12	Inf	20.86	30.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6865MHz Straddle 6.875-7.125GHz	Pass	5.79	8.9	8.82	9.2	9.2	15.05	Inf	20.84	30.00
6945MHz	Pass	5.79	9.07	9.09	9.46	8.94	15.16	Inf	20.95	30.00
7025MHz	Pass	5.79	9.06	9.05	9.04	9.04	15.07	Inf	20.86	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.84	12.03	11.91	11.9	12.23	18.04	Inf	23.88	30.00
6185MHz	Pass	5.84	12.23	12.34	12.39	12.42	18.37	Inf	24.21	30.00
6345MHz	Pass	5.84	12.4	12.45	12.79	12.63	18.59	Inf	24.43	30.00
6505MHz Straddle 6.425-6.525GHz	Pass	5.88	12.16	12.11	12.63	12.67	18.42	Inf	24.30	30.00
6665MHz	Pass	5.74	12.28	12.55	12.61	12.55	18.52	Inf	24.26	30.00
6825MHz Straddle 6.875-7.125GHz	Pass	5.79	12.11	12.16	12.62	12.42	18.35	Inf	24.14	30.00
6985MHz	Pass	5.79	12.25	12.22	12.62	12.37	18.39	Inf	24.18	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.84	15.14	15.13	15	15.11	21.12	Inf	26.96	30.00
6265MHz	Pass	5.84	15.39	15.38	15.49	15.6	21.49	Inf	27.33	30.00
6425MHz Straddle 6.425-6.525GHz	Pass	5.88	15.51	15.34	15.53	15.57	21.51	Inf	27.39	30.00
6585MHz Straddle 6.425-6.525GHz	Pass	5.88	15.01	14.9	14.96	15.14	21.02	Inf	26.90	30.00
6745MHz Straddle 6.875-7.125GHz	Pass	5.79	15.35	15.42	15.71	15.67	21.56	Inf	27.35	30.00
6905MHz Straddle 6.875-7.125GHz	Pass	5.79	13.63	13.58	14.11	13.88	19.83	Inf	25.62	30.00

DG = Directional Gain; Port X = Port X output power
Refers to antenna test report for DG gain.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-1.00	4.84
802.11be EHT20_Nss1,(MCS0)_4TX-OFMDA	-0.94	4.90
802.11be EHT40_Nss1,(MCS0)_4TX-OFMDA	-0.95	4.89
802.11be EHT80_Nss1,(MCS0)_4TX-OFMDA	-1.07	4.77
802.11be EHT160_Nss1,(MCS0)_4TX-OFMDA	-0.99	4.85
802.11be EHT320_Nss1,(MCS0)_4TX-OFMDA	-1.03	4.81
6.425-6.525GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-1.08	4.80
802.11be EHT20_Nss1,(MCS0)_4TX-OFMDA	-1.02	4.86
802.11be EHT40_Nss1,(MCS0)_4TX-OFMDA	-1.00	4.88
802.11be EHT80_Nss1,(MCS0)_4TX-OFMDA	-0.99	4.89
802.11be EHT160_Nss1,(MCS0)_4TX-OFMDA	-1.16	4.72
802.11be EHT320_Nss1,(MCS0)_4TX-OFMDA	-0.98	4.90
6.525-6.875GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.98	4.76
802.11be EHT20_Nss1,(MCS0)_4TX-OFMDA	-1.10	4.64
802.11be EHT40_Nss1,(MCS0)_4TX-OFMDA	-0.89	4.85
802.11be EHT80_Nss1,(MCS0)_4TX-OFMDA	-1.08	4.66
802.11be EHT160_Nss1,(MCS0)_4TX-OFMDA	-1.19	4.55
6.875-7.125GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.91	4.88
802.11be EHT20_Nss1,(MCS0)_4TX-OFMDA	-0.99	4.80
802.11be EHT40_Nss1,(MCS0)_4TX-OFMDA	-0.88	4.91
802.11be EHT80_Nss1,(MCS0)_4TX-OFMDA	-0.93	4.86
802.11be EHT160_Nss1,(MCS0)_4TX-OFMDA	-0.89	4.90
802.11be EHT320_Nss1,(MCS0)_4TX-OFMDA	-0.91	4.88

RBW = 1MHz

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX										
5955MHz	Pass	5.84	-7.25	-7.00	-6.96	-6.70	-1.00	Inf	4.84	5.00
6175MHz	Pass	5.84	-7.07	-6.70	-6.68	-6.97	-1.02	Inf	4.82	5.00
6415MHz	Pass	5.84	-7.21	-7.43	-6.75	-7.21	-1.22	Inf	4.62	5.00
6435MHz	Pass	5.88	-7.15	-7.65	-6.82	-6.83	-1.18	Inf	4.70	5.00
6475MHz	Pass	5.88	-7.16	-7.55	-6.69	-6.68	-1.08	Inf	4.80	5.00
6515MHz	Pass	5.88	-7.20	-7.33	-6.77	-7.15	-1.16	Inf	4.72	5.00
6535MHz	Pass	5.74	-7.27	-7.34	-6.88	-7.09	-1.19	Inf	4.55	5.00
6715MHz	Pass	5.74	-7.10	-7.01	-6.77	-6.77	-0.98	Inf	4.76	5.00
6855MHz	Pass	5.74	-7.07	-7.25	-6.52	-6.75	-0.99	Inf	4.75	5.00
6875MHz Straddle 6.875-7.125GHz	Pass	5.79	-7.17	-7.09	-6.80	-7.15	-1.21	Inf	4.58	5.00
6895MHz	Pass	5.79	-7.15	-7.18	-6.82	-7.11	-1.18	Inf	4.61	5.00
7015MHz	Pass	5.79	-7.09	-7.03	-7.17	-7.18	-1.19	Inf	4.60	5.00
7095MHz	Pass	5.79	-7.06	-6.78	-6.88	-6.70	-0.91	Inf	4.88	5.00
7115MHz	Pass	5.79	-7.06	-7.11	-6.89	-6.96	-1.05	Inf	4.74	5.00
802.11be EHT20_Nss1,(MCS0)_4TX-OFMDA										
5955MHz	Pass	5.84	-6.76	-6.59	-6.56	-6.60	-0.94	Inf	4.90	5.00
6175MHz	Pass	5.84	-6.97	-6.63	-6.47	-7.34	-1.12	Inf	4.72	5.00
6415MHz	Pass	5.84	-7.01	-7.10	-6.49	-7.17	-1.13	Inf	4.71	5.00
6435MHz	Pass	5.88	-6.78	-7.40	-6.51	-6.40	-1.02	Inf	4.86	5.00
6475MHz	Pass	5.88	-6.76	-7.32	-6.41	-6.49	-1.02	Inf	4.86	5.00
6515MHz	Pass	5.88	-6.97	-7.00	-6.75	-6.99	-1.12	Inf	4.76	5.00
6535MHz	Pass	5.74	-7.29	-7.35	-6.96	-7.10	-1.23	Inf	4.51	5.00
6715MHz	Pass	5.74	-7.18	-7.04	-6.65	-6.76	-1.10	Inf	4.64	5.00
6855MHz	Pass	5.74	-7.11	-7.09	-6.62	-7.00	-1.23	Inf	4.51	5.00
6875MHz Straddle 6.875-7.125GHz	Pass	5.79	-6.89	-6.97	-6.30	-6.84	-1.07	Inf	4.72	5.00
6895MHz	Pass	5.79	-7.02	-7.04	-6.59	-6.91	-1.08	Inf	4.71	5.00
7015MHz	Pass	5.79	-6.84	-6.68	-6.92	-6.94	-1.07	Inf	4.72	5.00
7095MHz	Pass	5.79	-7.06	-6.61	-6.66	-6.55	-0.99	Inf	4.80	5.00
7115MHz	Pass	5.79	-13.48	-13.34	-13.04	-12.97	-7.38	Inf	-1.59	5.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFMDA										
5965MHz	Pass	5.84	-7.04	-6.96	-7.13	-6.70	-1.10	Inf	4.74	5.00
6165MHz	Pass	5.84	-7.01	-6.89	-6.66	-7.19	-1.15	Inf	4.69	5.00
6405MHz	Pass	5.84	-6.83	-7.00	-6.23	-6.64	-0.95	Inf	4.89	5.00
6445MHz	Pass	5.88	-6.79	-7.02	-6.53	-7.02	-1.00	Inf	4.88	5.00
6485MHz	Pass	5.88	-6.96	-7.15	-6.58	-6.75	-1.07	Inf	4.81	5.00
6525MHz Straddle 6.425-6.525GHz	Pass	5.88	-6.67	-6.97	-6.65	-7.13	-1.14	Inf	4.74	5.00
6565MHz	Pass	5.74	-6.83	-7.04	-6.52	-6.75	-0.89	Inf	4.85	5.00
6725MHz	Pass	5.74	-6.85	-7.20	-6.24	-6.56	-0.94	Inf	4.80	5.00
6845MHz	Pass	5.74	-7.25	-7.15	-6.00	-6.86	-1.19	Inf	4.55	5.00
6885MHz Straddle 6.875-7.125GHz	Pass	5.79	-7.02	-6.94	-6.24	-6.86	-0.95	Inf	4.84	5.00
6925MHz	Pass	5.79	-6.90	-6.89	-6.29	-6.98	-1.03	Inf	4.76	5.00
7005MHz	Pass	5.79	-6.83	-6.76	-6.43	-7.04	-1.00	Inf	4.79	5.00
7085MHz	Pass	5.79	-6.63	-6.77	-6.68	-6.65	-0.88	Inf	4.91	5.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFMDA										
5985MHz	Pass	5.84	-7.02	-6.87	-7.21	-6.85	-1.30	Inf	4.54	5.00



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6145MHz	Pass	5.84	-6.81	-6.74	-6.62	-6.92	-1.27	Inf	4.57	5.00
6385MHz	Pass	5.84	-6.70	-6.97	-6.33	-6.82	-1.07	Inf	4.77	5.00
6465MHz	Pass	5.88	-6.72	-7.14	-6.43	-6.24	-1.12	Inf	4.76	5.00
6545MHz Straddle 6.425-6.525GHz	Pass	5.88	-6.61	-7.01	-6.29	-6.85	-0.99	Inf	4.89	5.00
6625MHz	Pass	5.74	-6.87	-6.48	-6.66	-6.64	-1.08	Inf	4.66	5.00
6705MHz	Pass	5.74	-6.97	-6.73	-6.45	-6.48	-1.16	Inf	4.58	5.00
6785MHz	Pass	5.74	-7.08	-6.78	-6.73	-6.69	-1.16	Inf	4.58	5.00
6865MHz Straddle 6.875-7.125GHz	Pass	5.79	-7.25	-7.24	-6.46	-6.61	-1.16	Inf	4.63	5.00
6945MHz	Pass	5.79	-6.80	-6.66	-6.39	-6.96	-0.93	Inf	4.86	5.00
7025MHz	Pass	5.79	-6.76	-6.48	-6.51	-6.79	-1.07	Inf	4.72	5.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFMDA										
6025MHz	Pass	5.84	-7.12	-6.99	-7.14	-6.65	-1.27	Inf	4.57	5.00
6185MHz	Pass	5.84	-7.19	-6.68	-6.96	-6.72	-1.16	Inf	4.68	5.00
6345MHz	Pass	5.84	-6.77	-6.77	-6.68	-6.78	-0.99	Inf	4.85	5.00
6505MHz Straddle 6.425-6.525GHz	Pass	5.88	-7.13	-7.40	-6.78	-6.63	-1.16	Inf	4.72	5.00
6665MHz	Pass	5.74	-7.20	-6.87	-6.70	-6.81	-1.19	Inf	4.55	5.00
6825MHz Straddle 6.875-7.125GHz	Pass	5.79	-7.15	-6.99	-6.47	-6.72	-1.13	Inf	4.66	5.00
6985MHz	Pass	5.79	-6.99	-6.78	-6.69	-6.79	-0.89	Inf	4.90	5.00
802.11be EHT320_Nss1,(MCS0)_4TX-OFMDA										
6105MHz	Pass	5.84	-6.86	-7.07	-6.91	-6.88	-1.22	Inf	4.62	5.00
6265MHz	Pass	5.84	-6.91	-6.87	-6.90	-6.45	-1.03	Inf	4.81	5.00
6425MHz Straddle 6.425-6.525GHz	Pass	5.88	-6.86	-6.69	-6.74	-6.67	-1.13	Inf	4.75	5.00
6585MHz Straddle 6.425-6.525GHz	Pass	5.88	-6.89	-6.86	-6.92	-6.59	-0.98	Inf	4.90	5.00
6745MHz Straddle 6.875-7.125GHz	Pass	5.79	-6.78	-6.81	-5.96	-6.36	-0.91	Inf	4.88	5.00
6905MHz Straddle 6.875-7.125GHz	Pass	5.79	-7.67	-7.80	-7.33	-7.54	-2.04	Inf	3.75	5.00


DG = Directional Gain; RBW = 1MHz

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Refers to antenna test report for DG gain.

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5955MHz

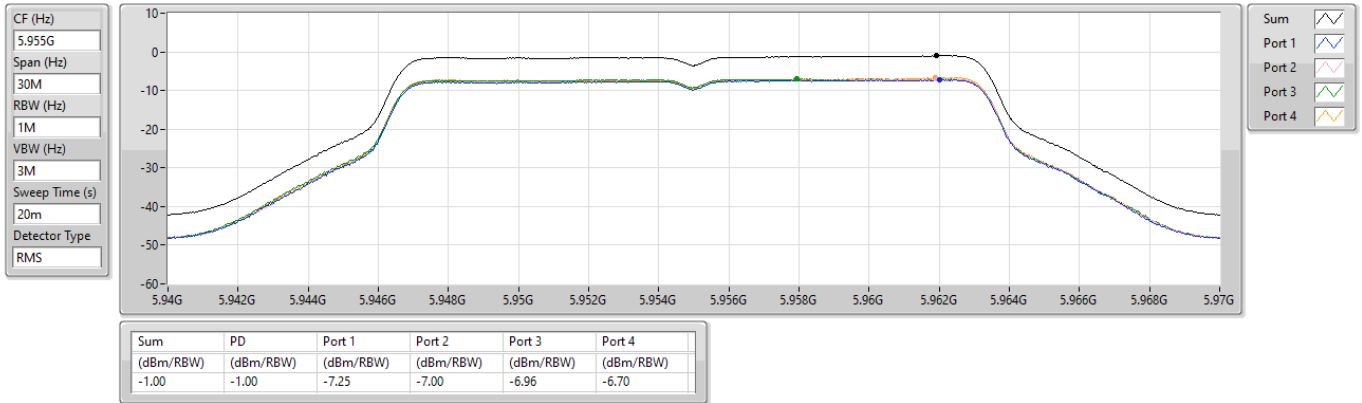

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6175MHz

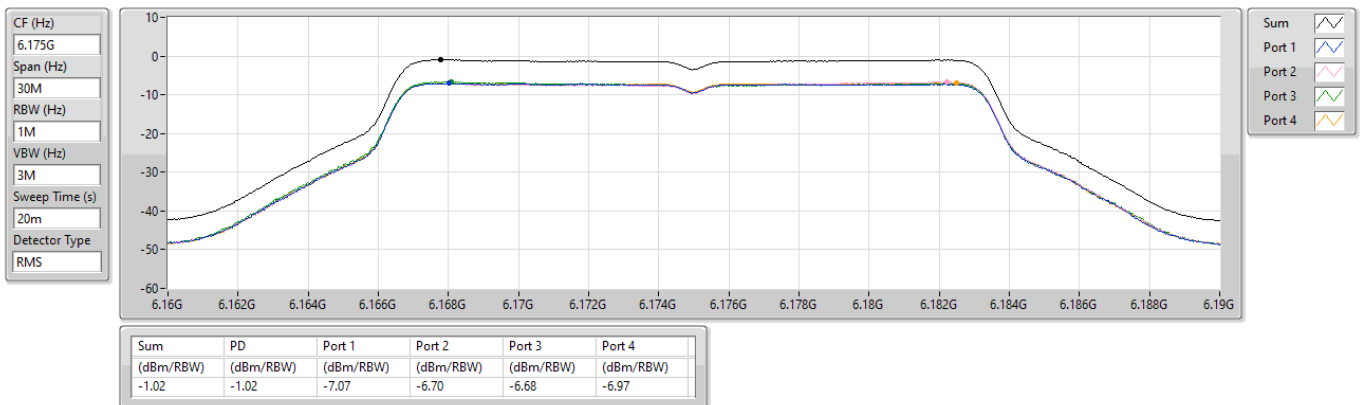

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6415MHz

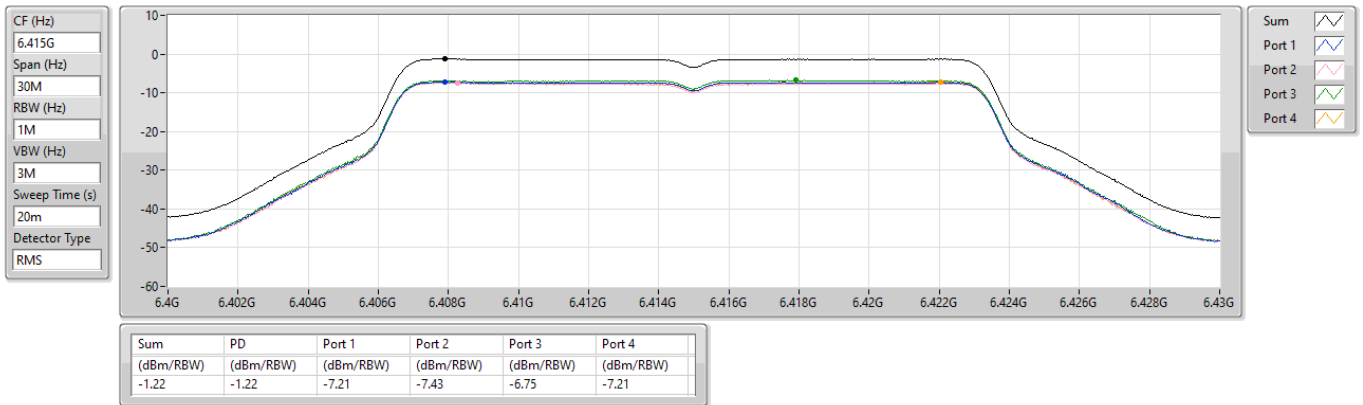

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6435MHz

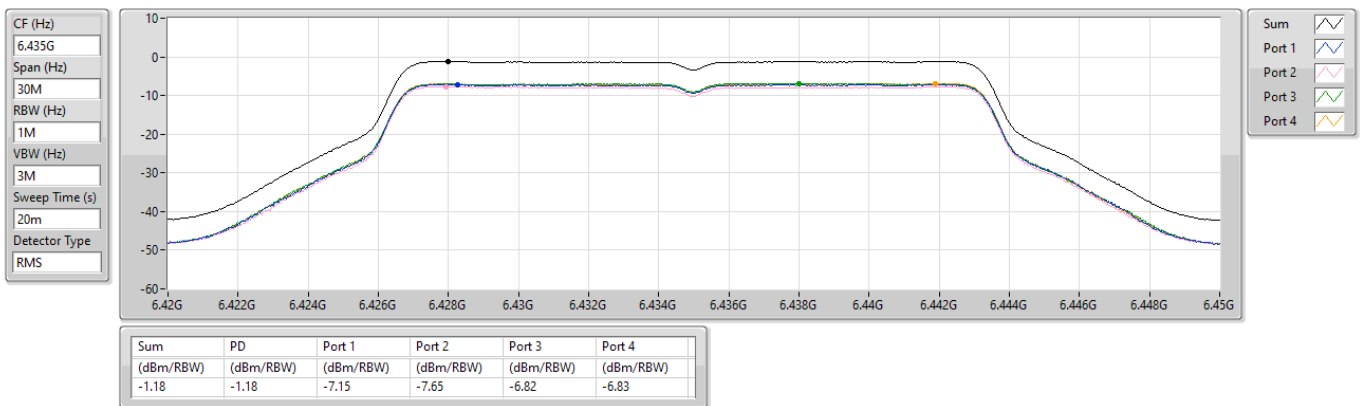




6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6475MHz

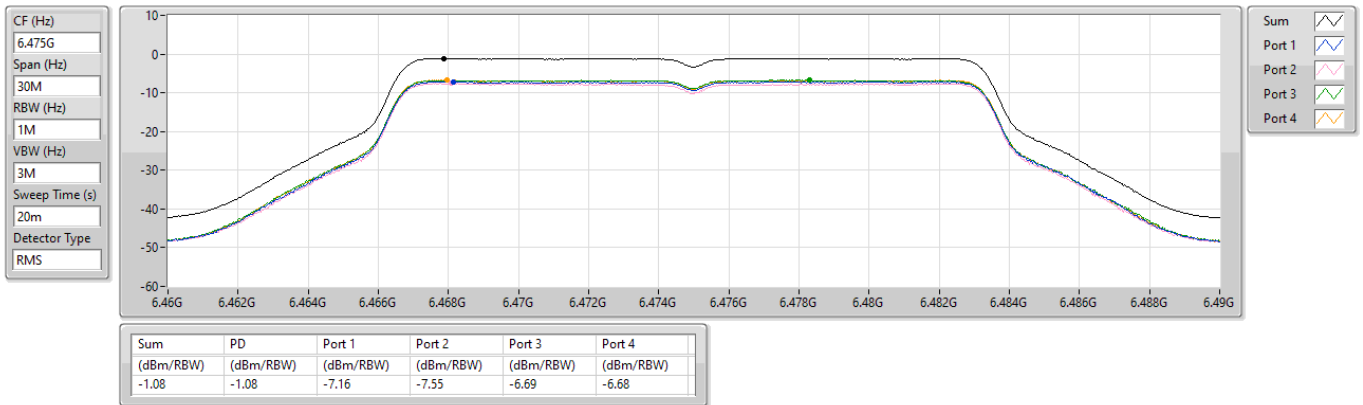

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6515MHz

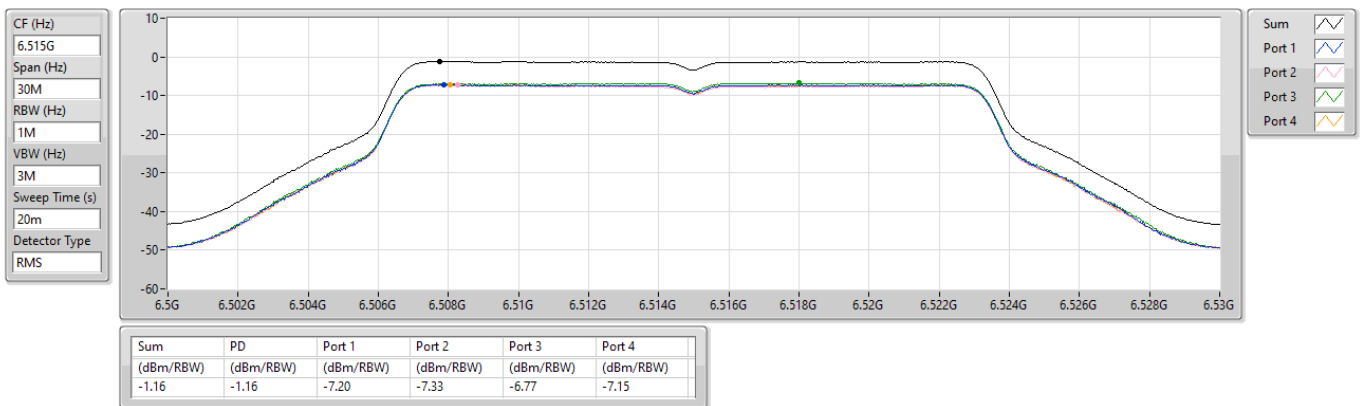




6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6535MHz

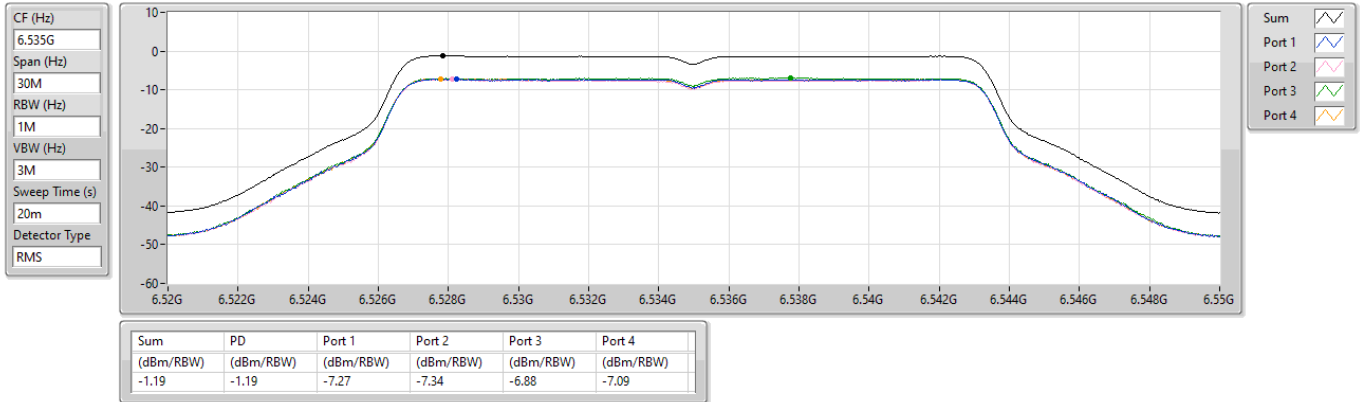

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6715MHz

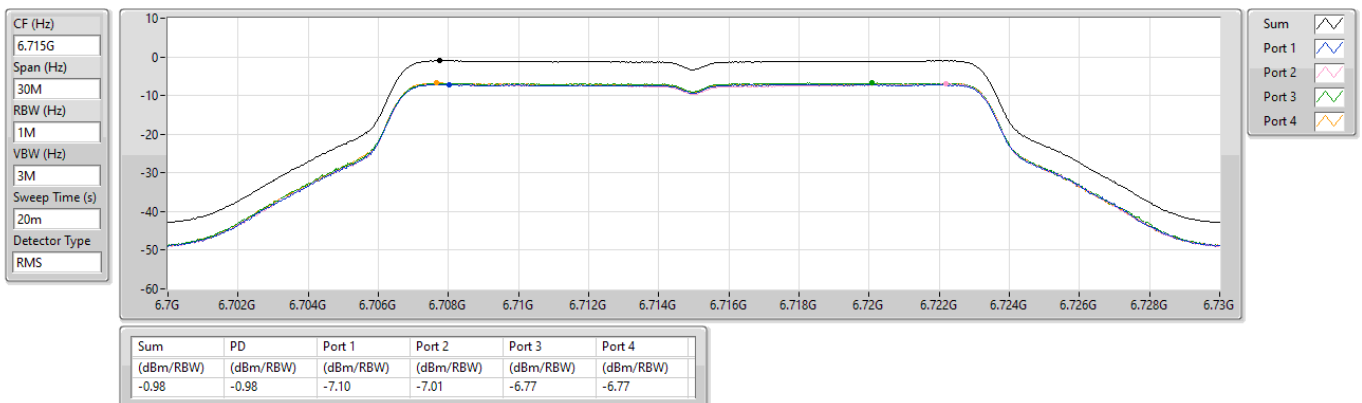

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6855MHz

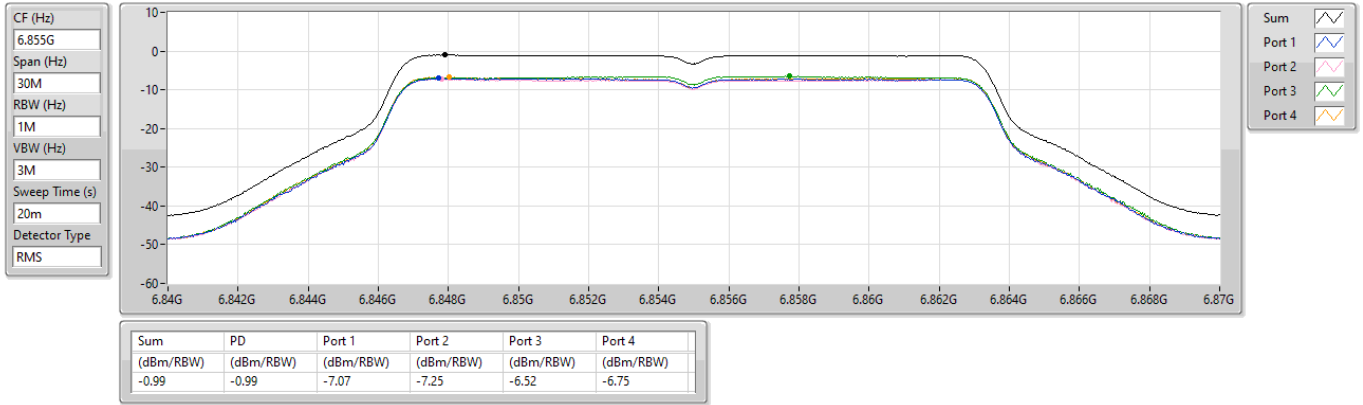

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6875MHz Straddle 6.875-7.125GHz

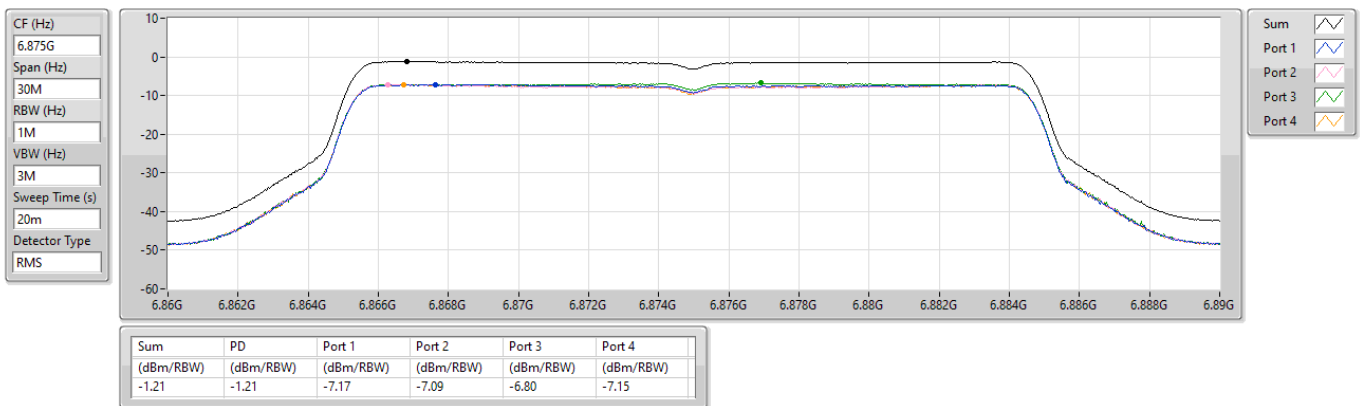

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6895MHz

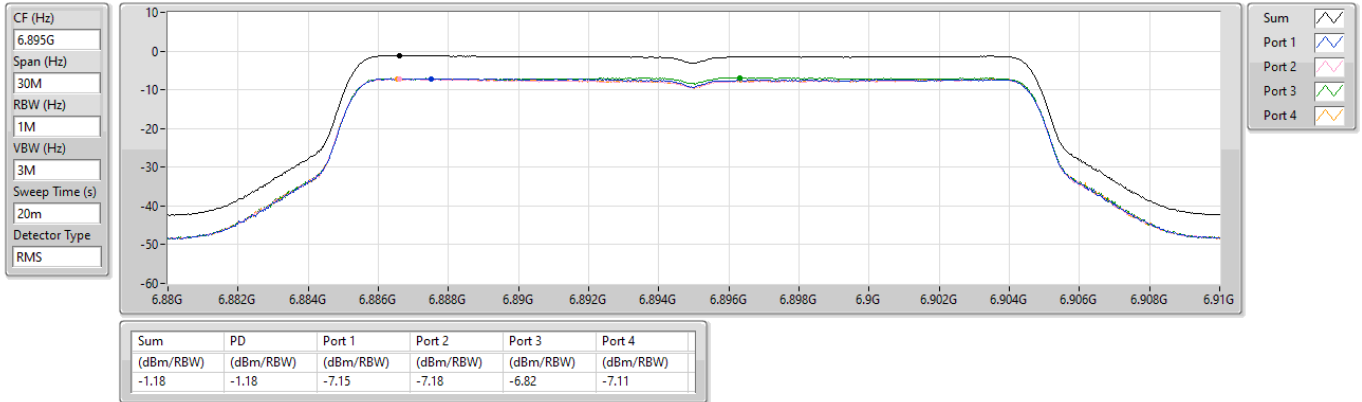

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


7015MHz

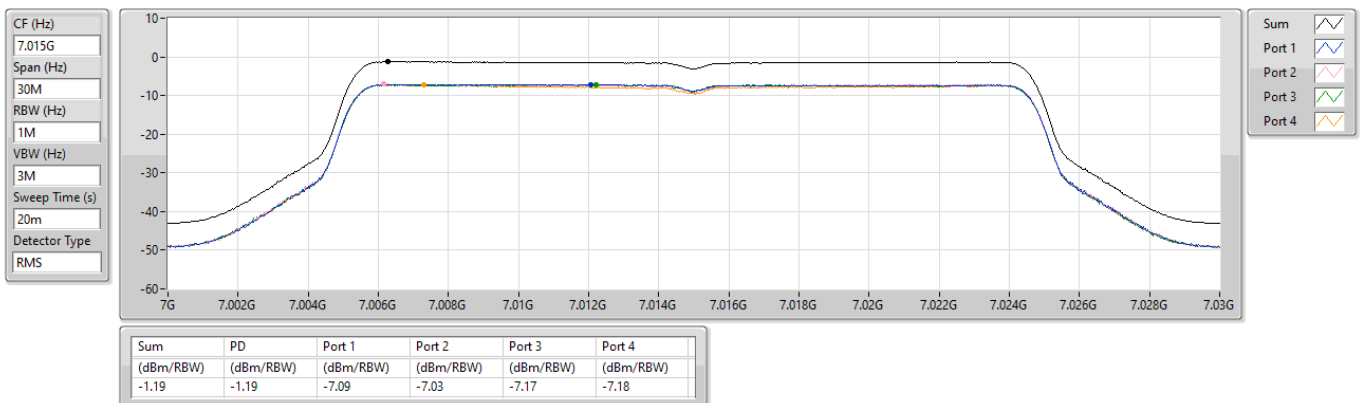

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


7095MHz

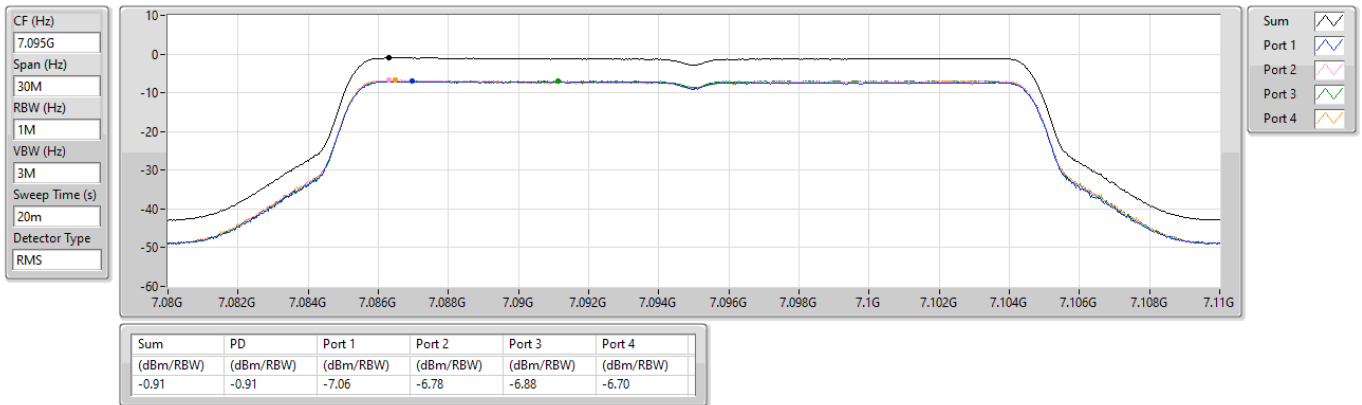

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


7115MHz

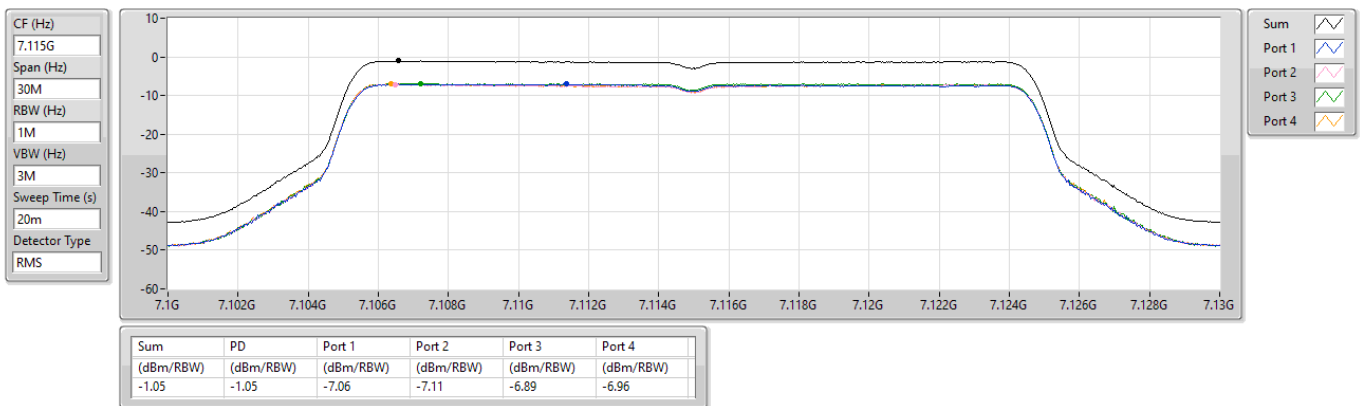

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5955MHz

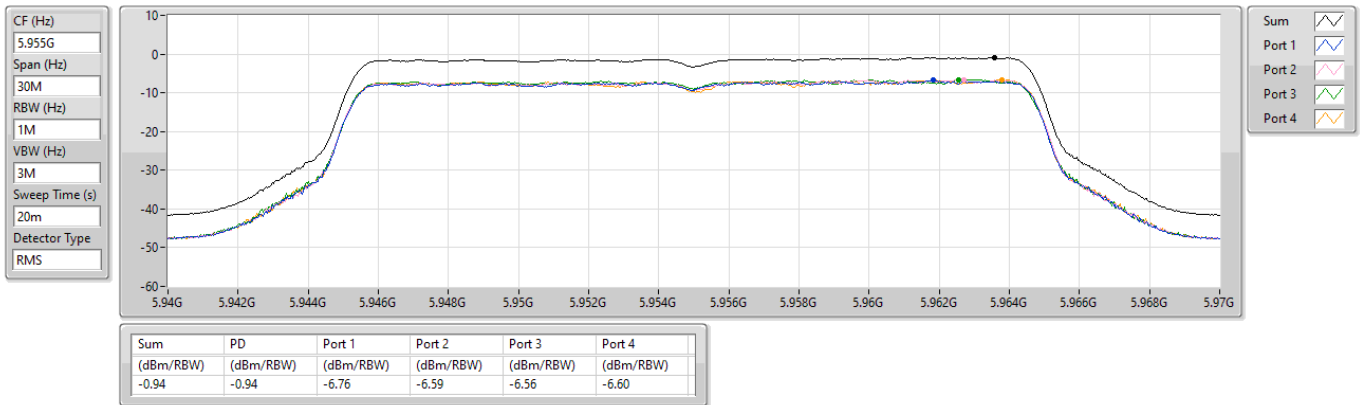

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6175MHz

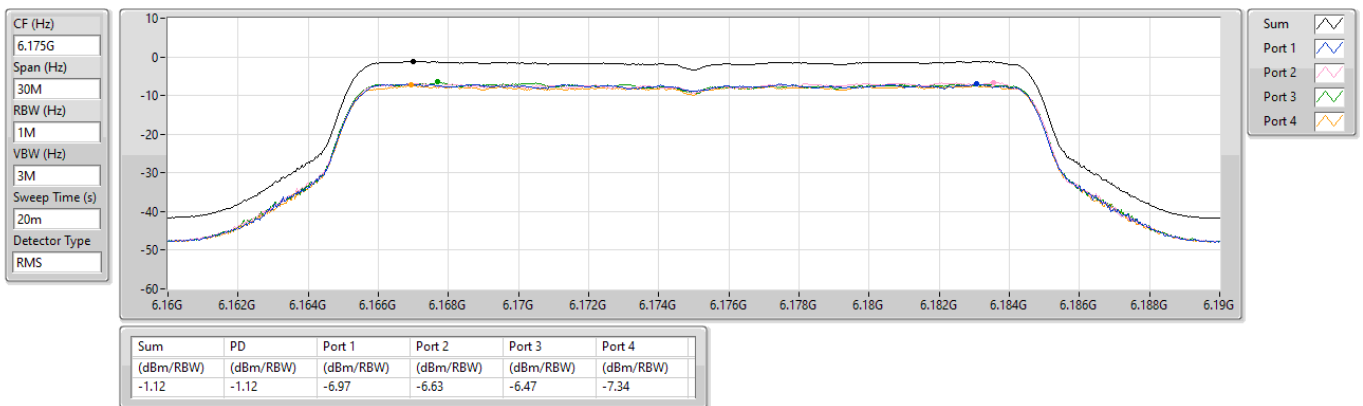




5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6415MHz

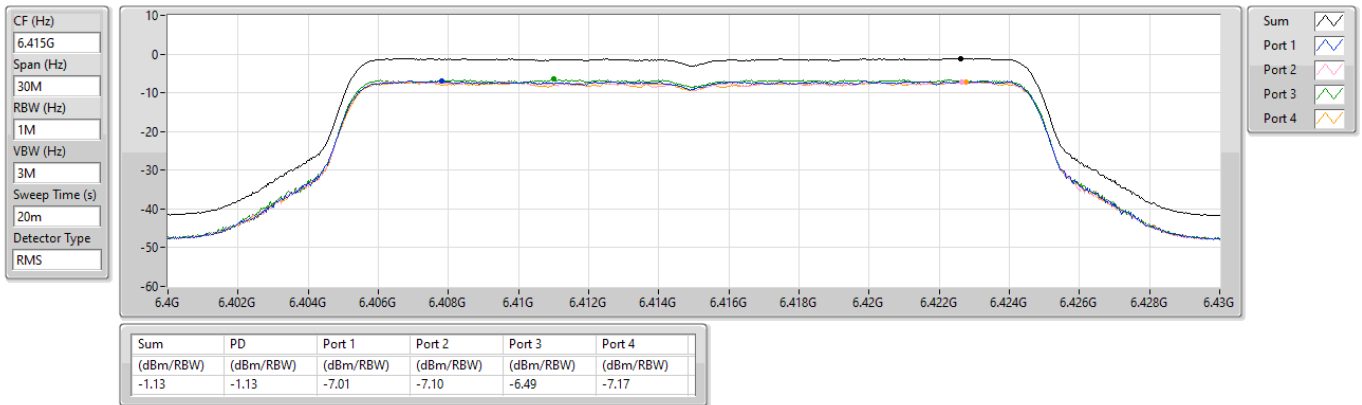

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6435MHz

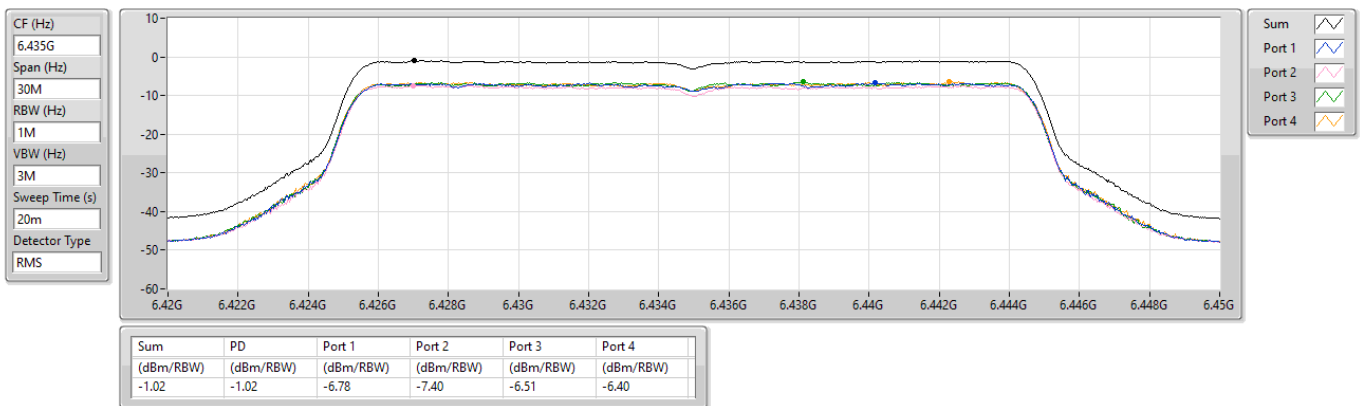




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6475MHz

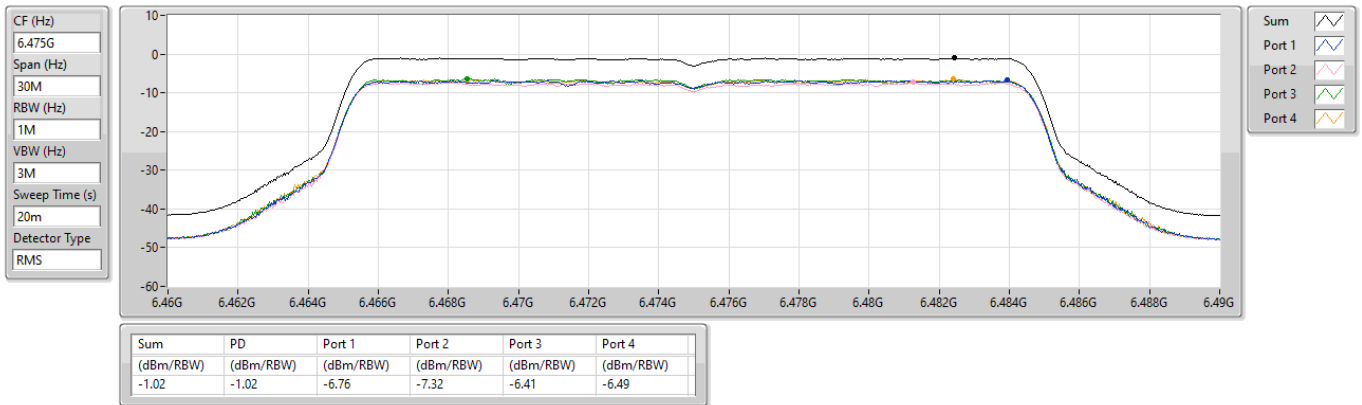

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6515MHz

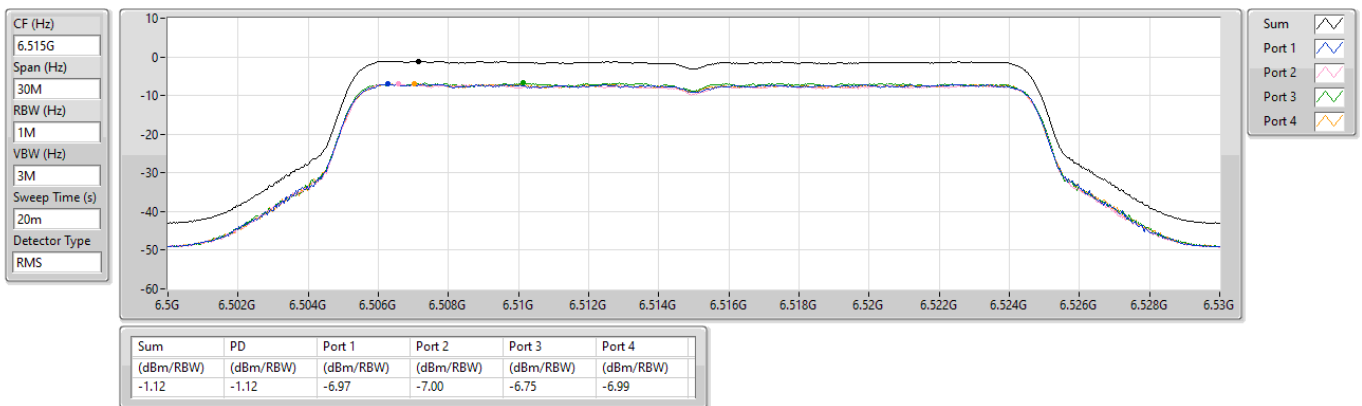




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6535MHz

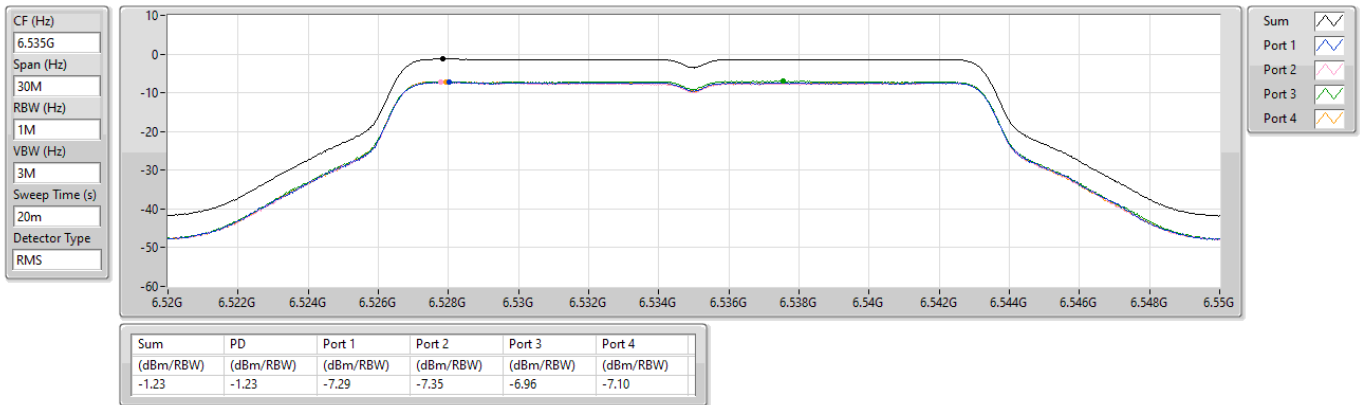

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6715MHz

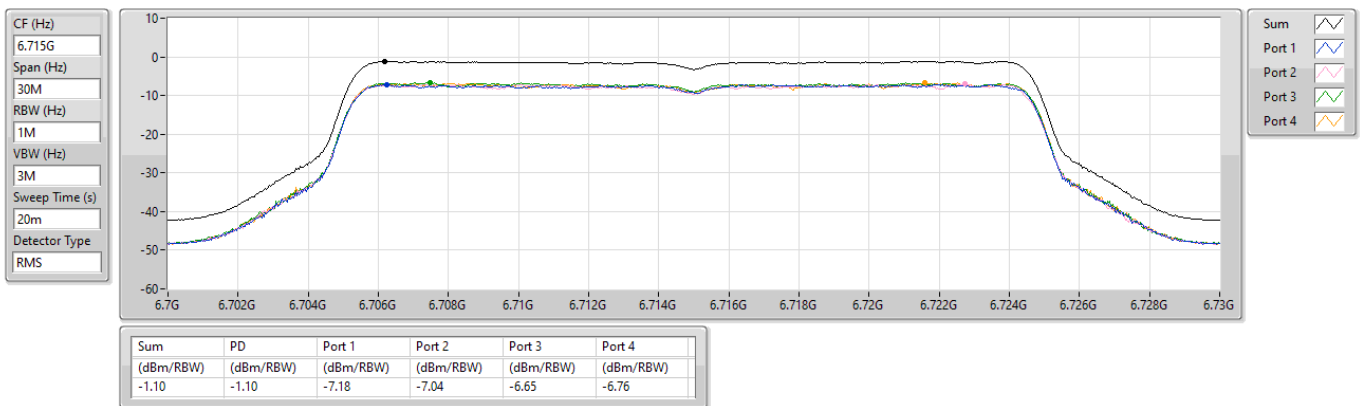

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6855MHz

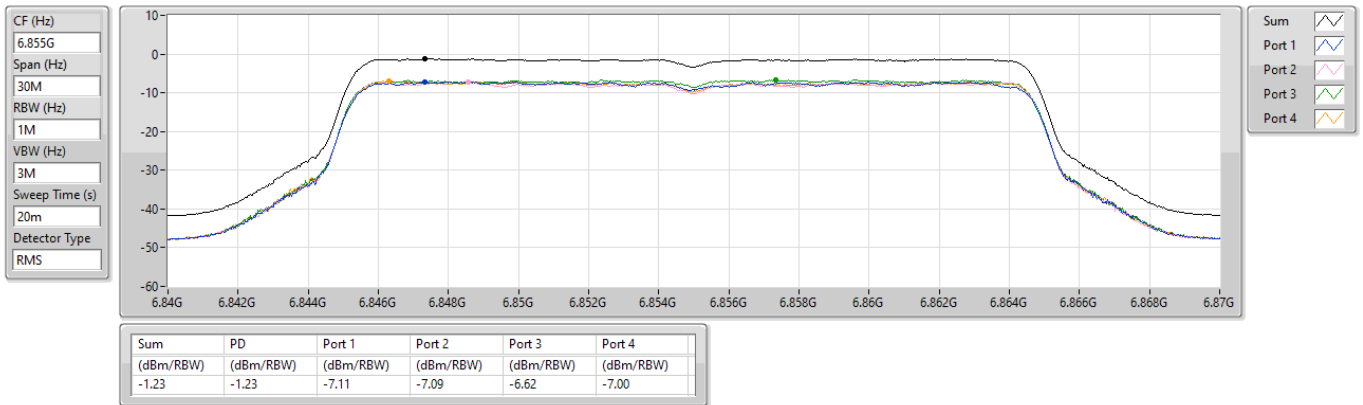

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6875MHz Straddle 6.875-7.125GHz

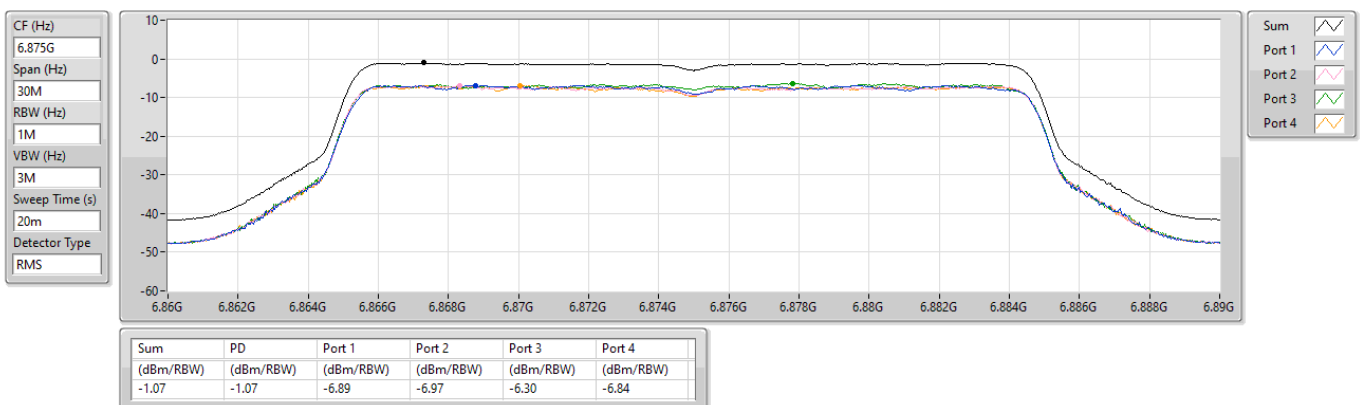




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6895MHz

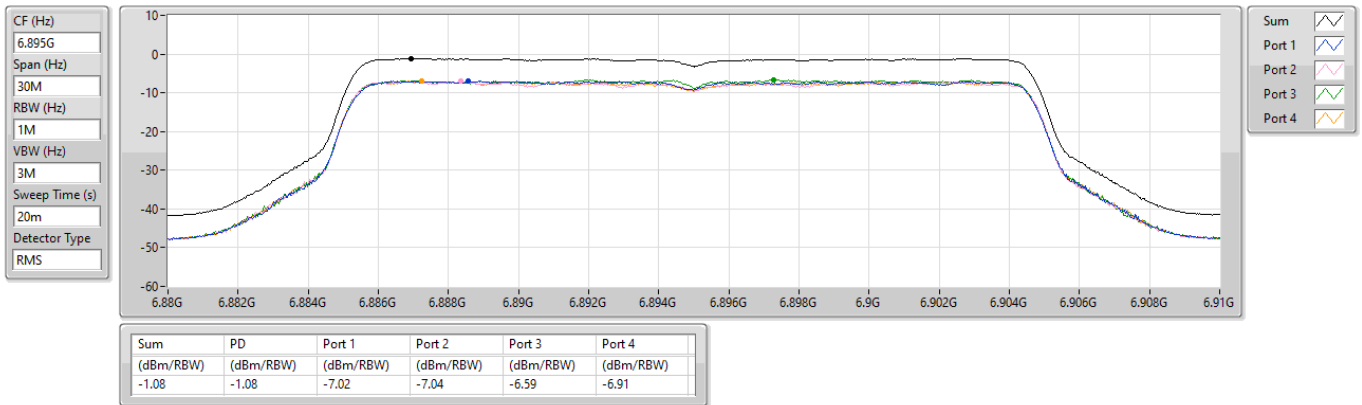

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

7015MHz

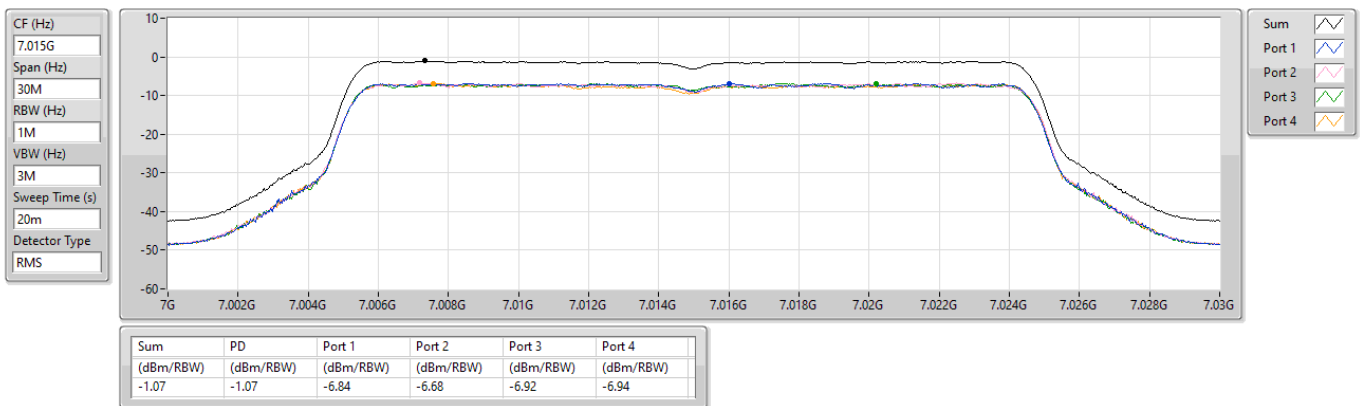




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


7095MHz

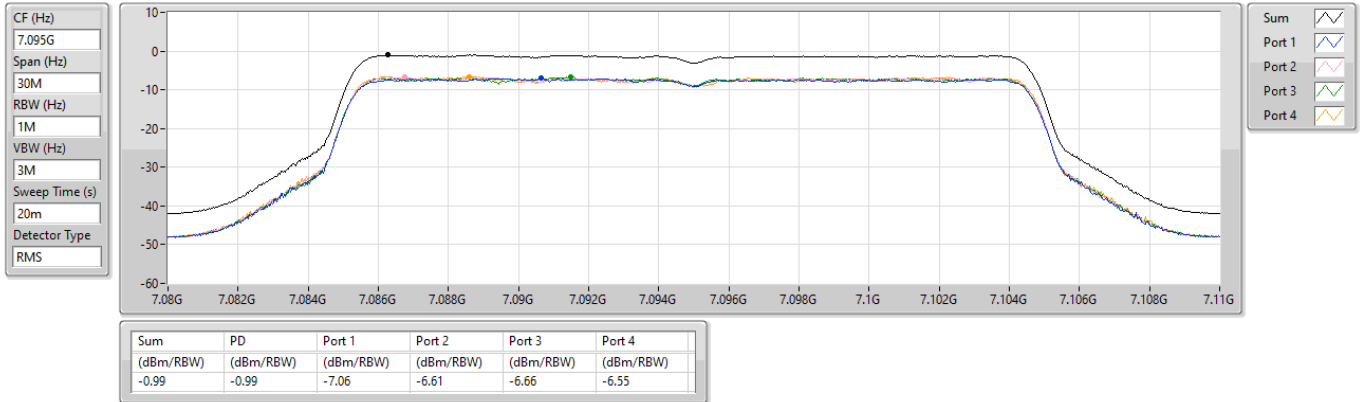

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

7115MHz

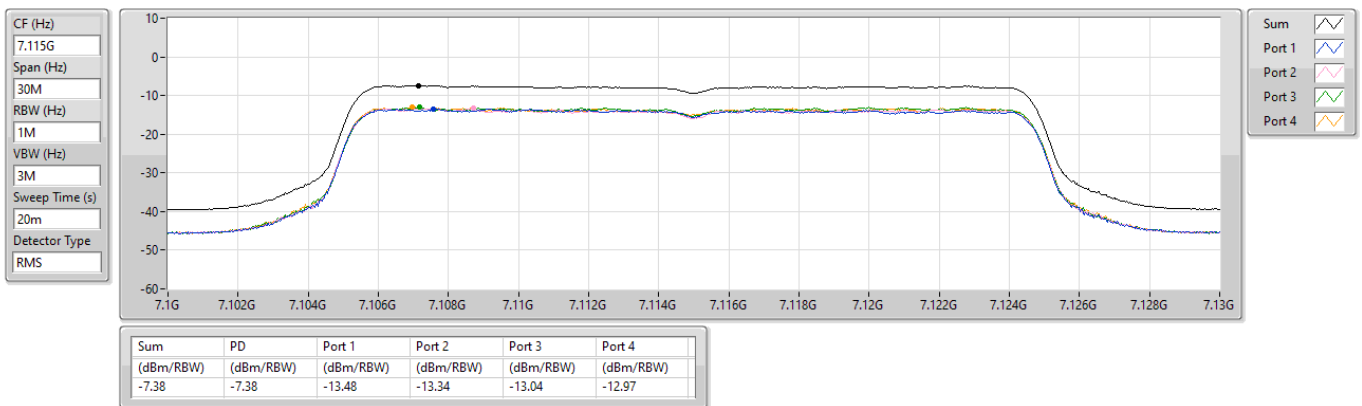




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5965MHz

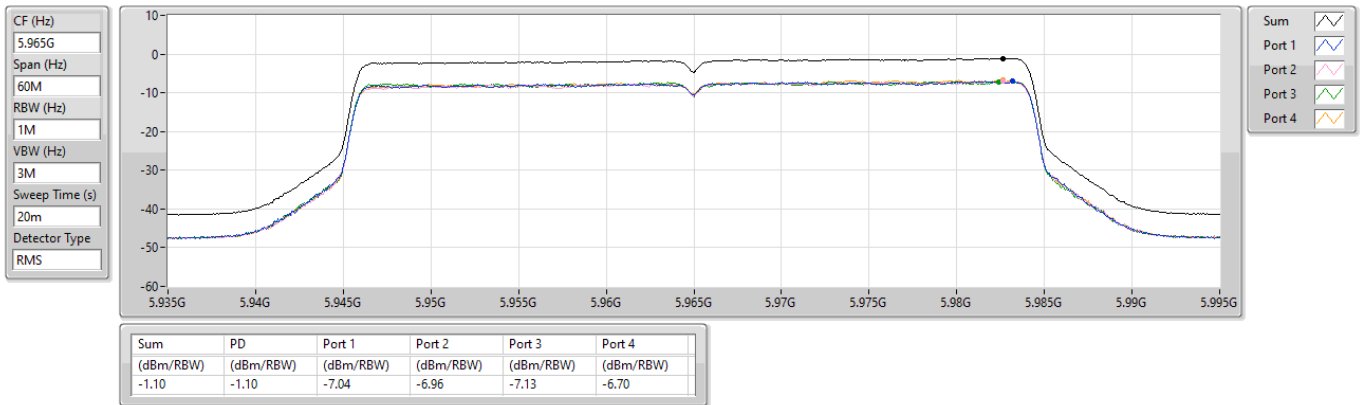

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6165MHz

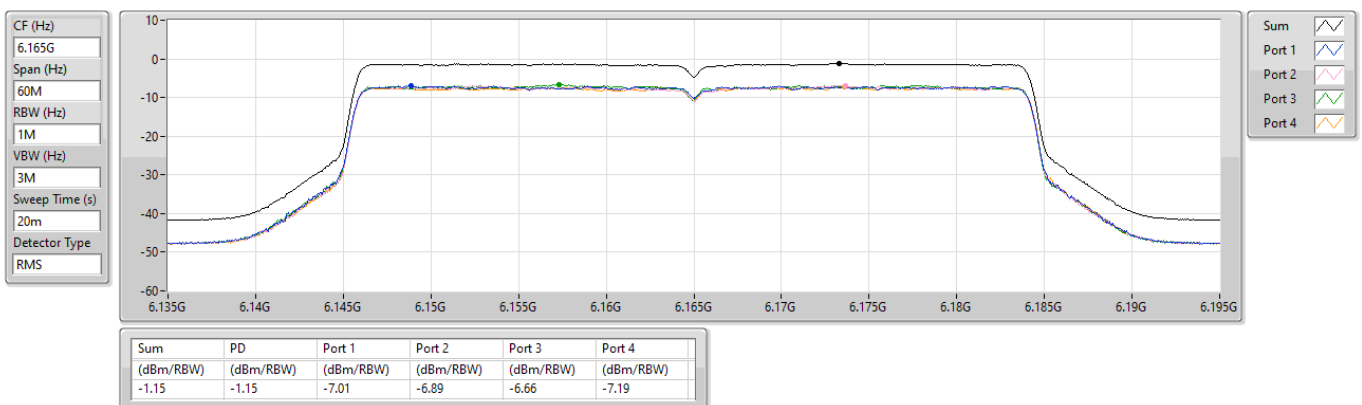




5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6405MHz

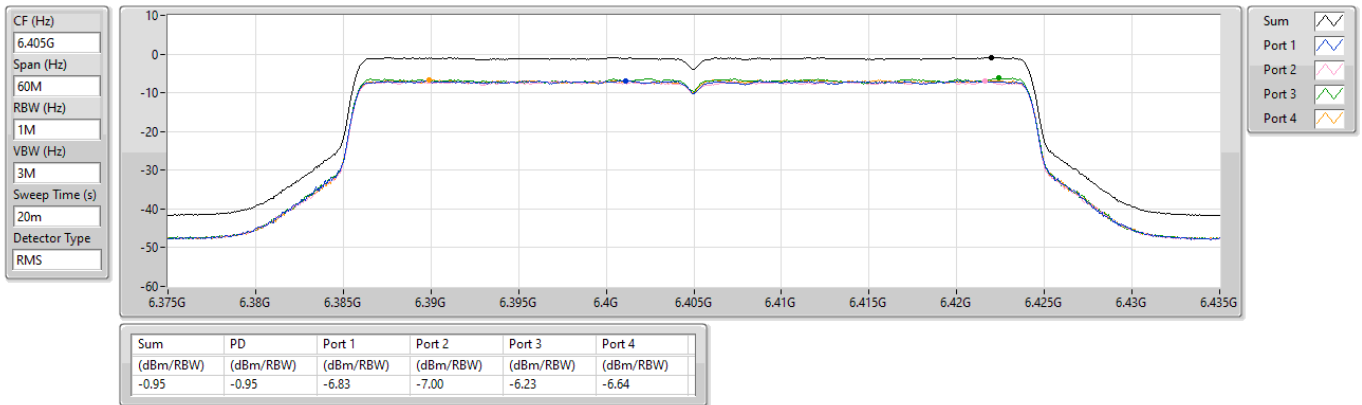

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6445MHz

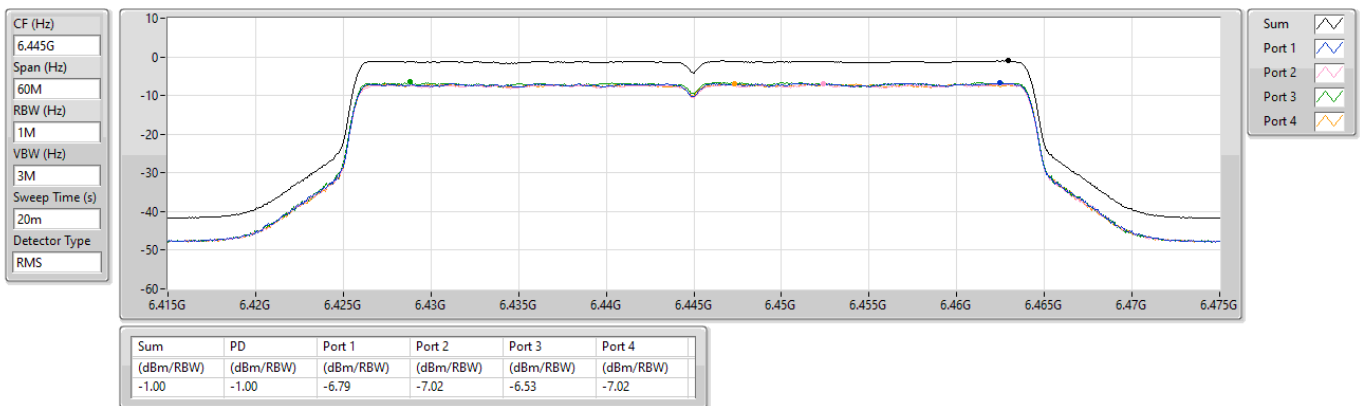




6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6485MHz

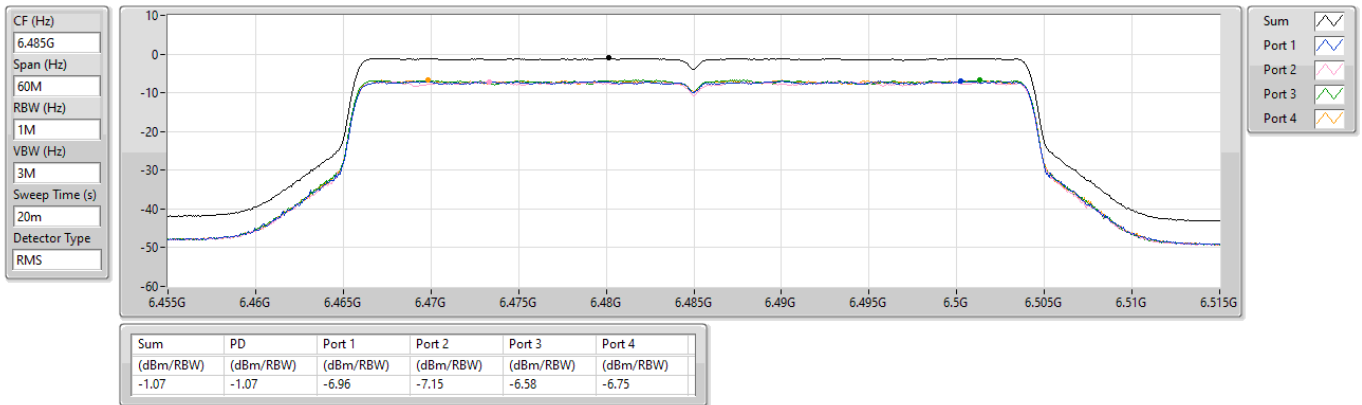

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6525MHz Straddle 6.425-6.525GHz

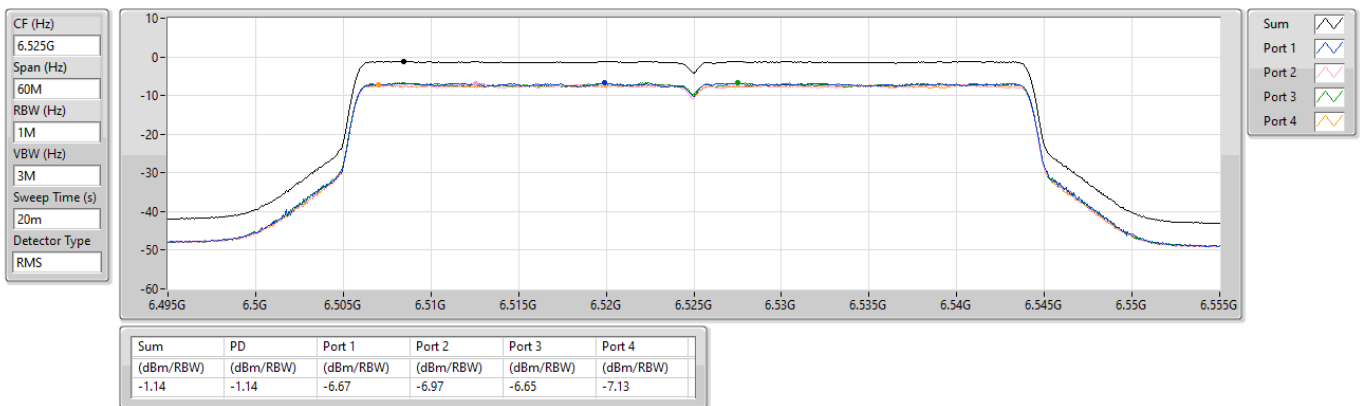




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6565MHz

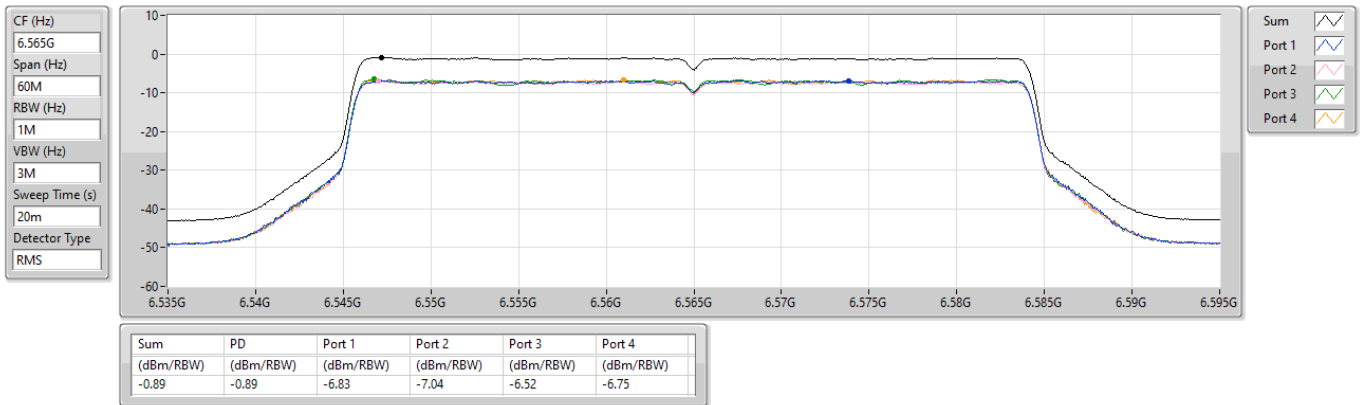

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6725MHz

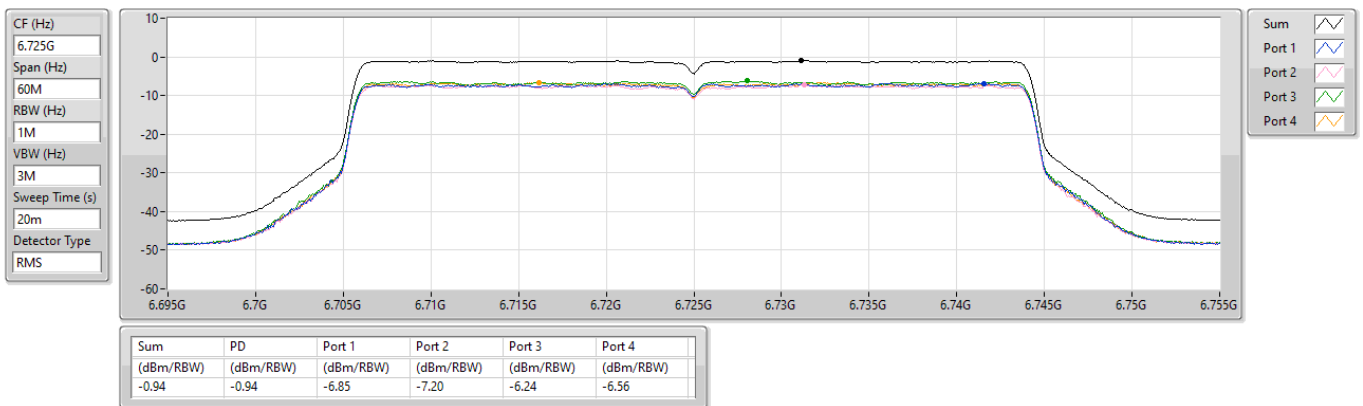




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6845MHz

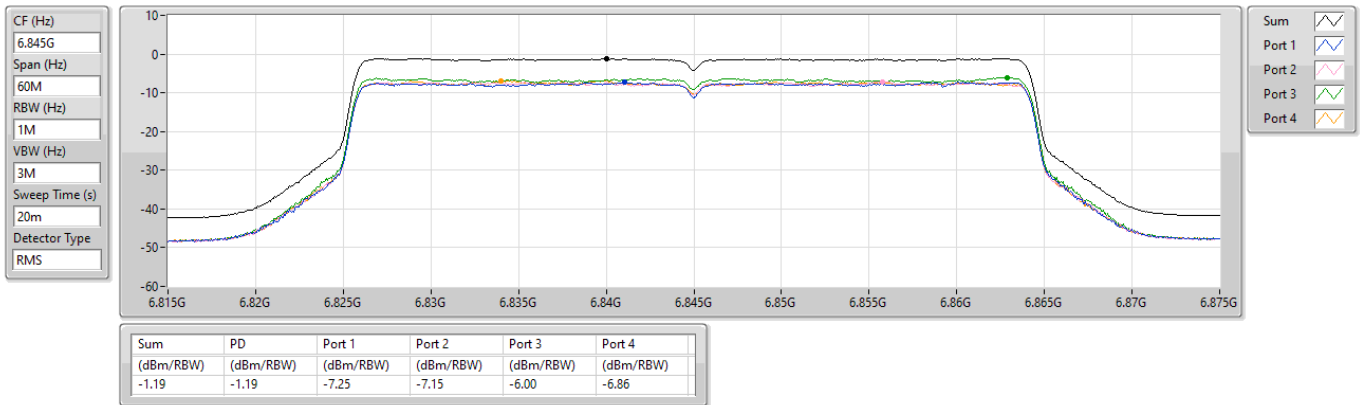

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6885MHz Straddle 6.875-7.125GHz

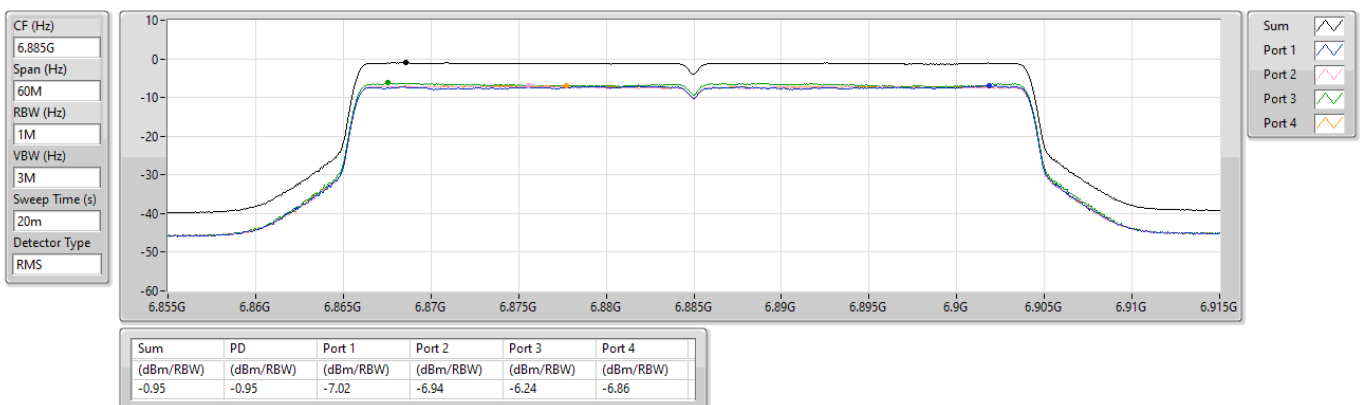




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6925MHz

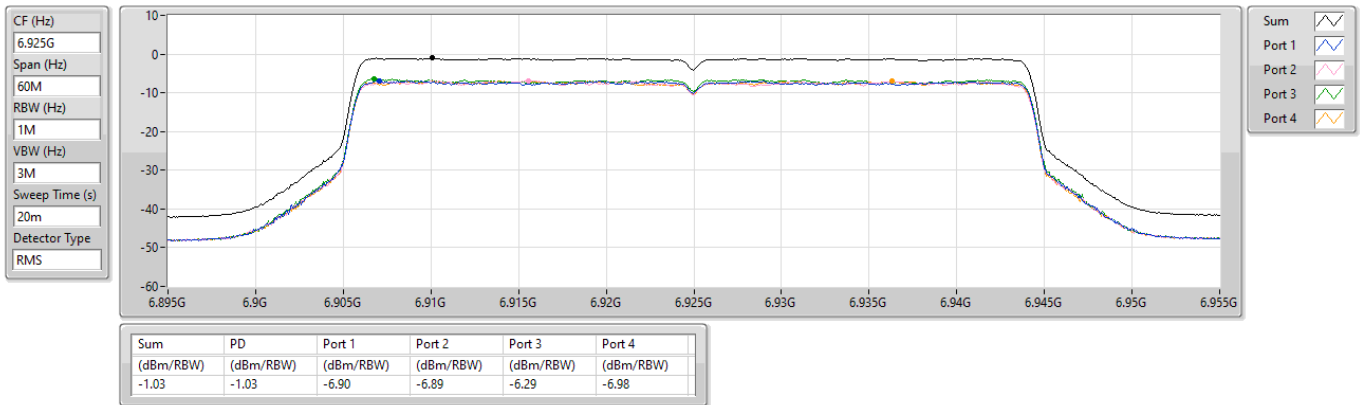

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

7005MHz

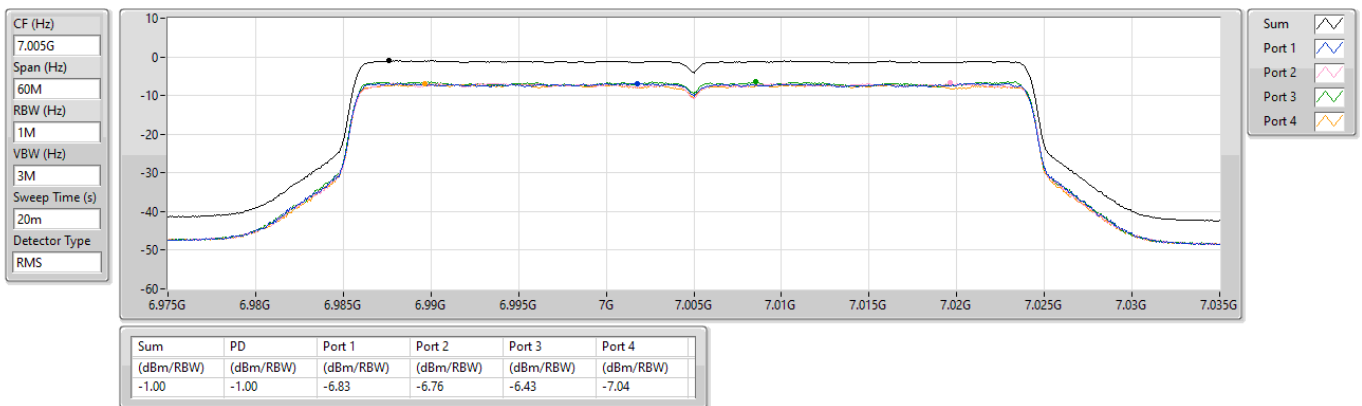




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


7085MHz

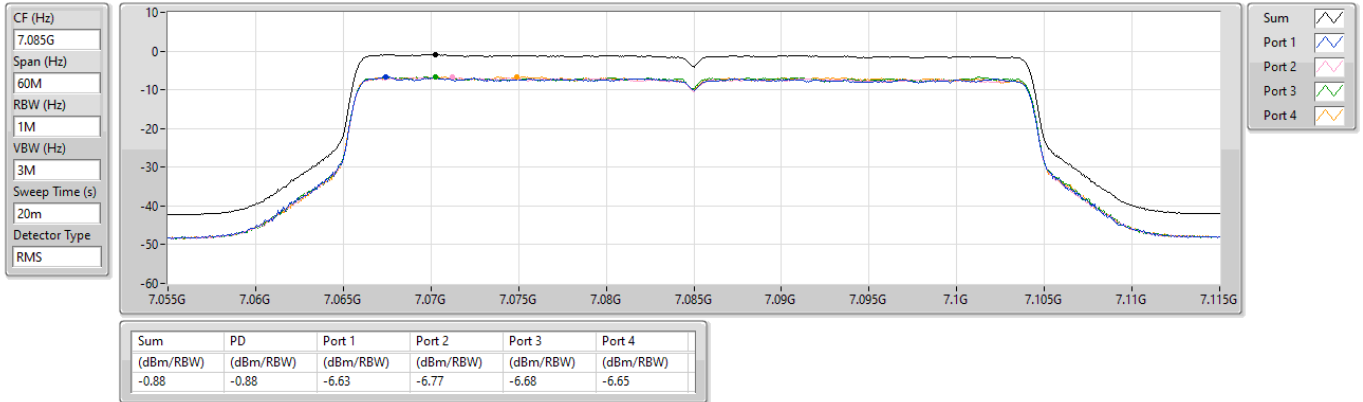

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5985MHz

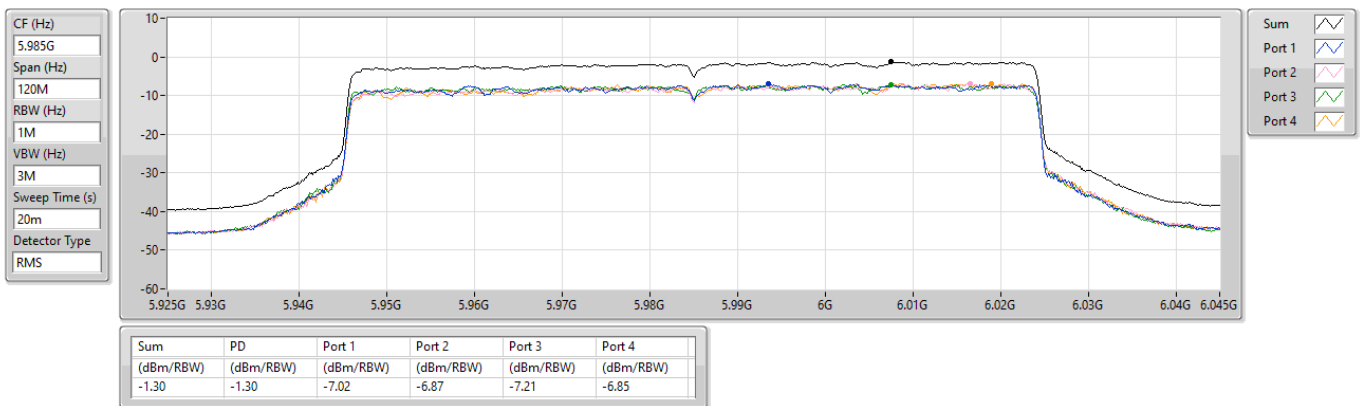




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6145MHz

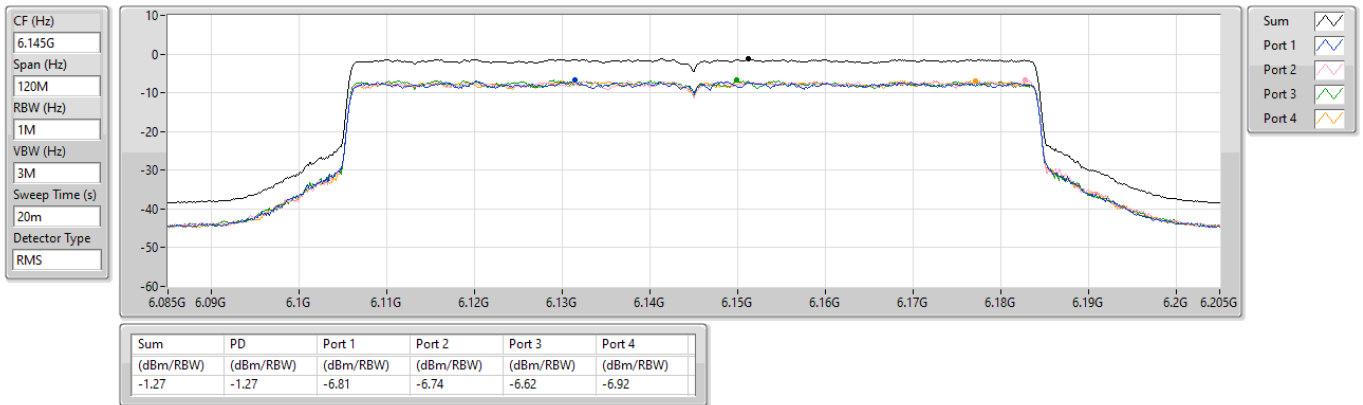

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6385MHz

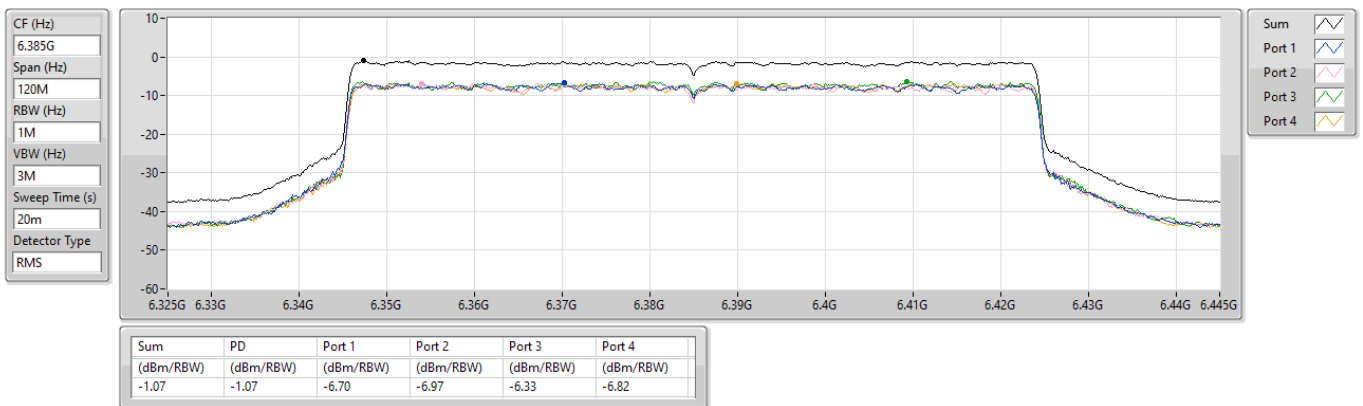




6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6465MHz

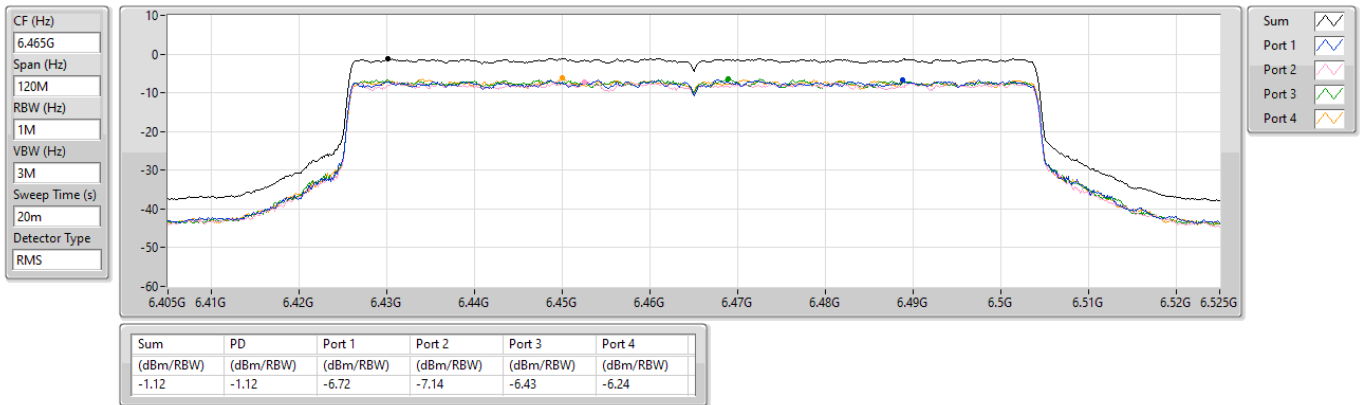

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6545MHz Straddle 6.425-6.525GHz

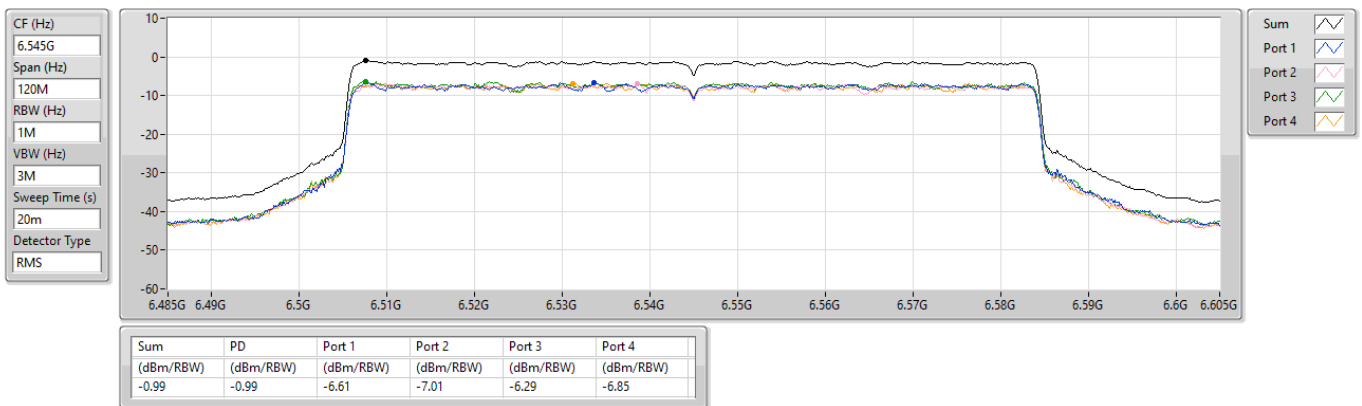




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6625MHz

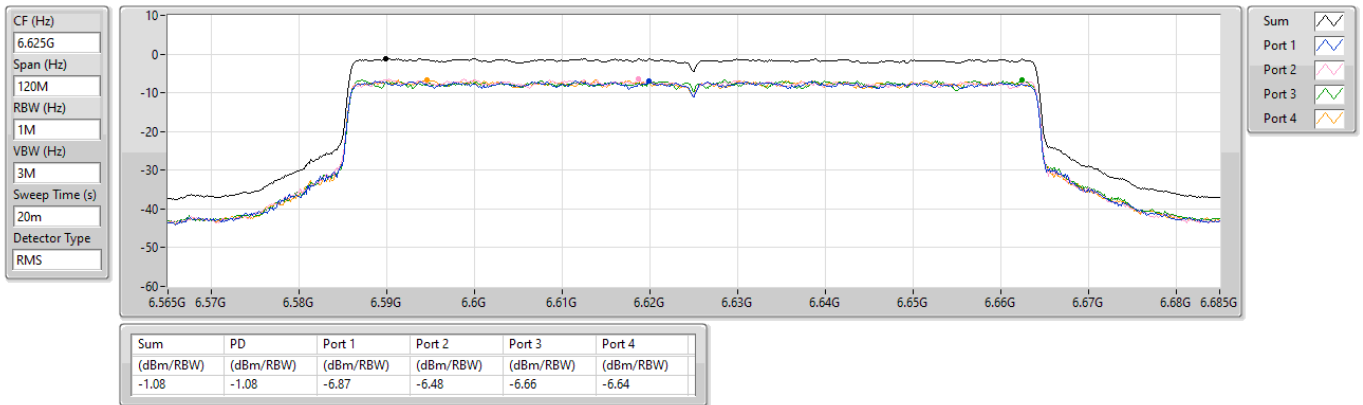

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6705MHz

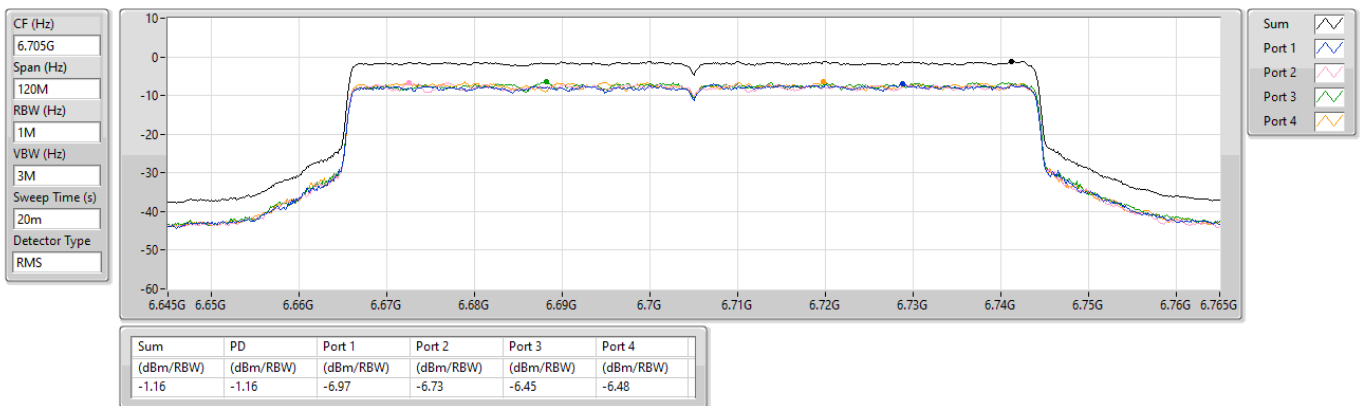




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6785MHz

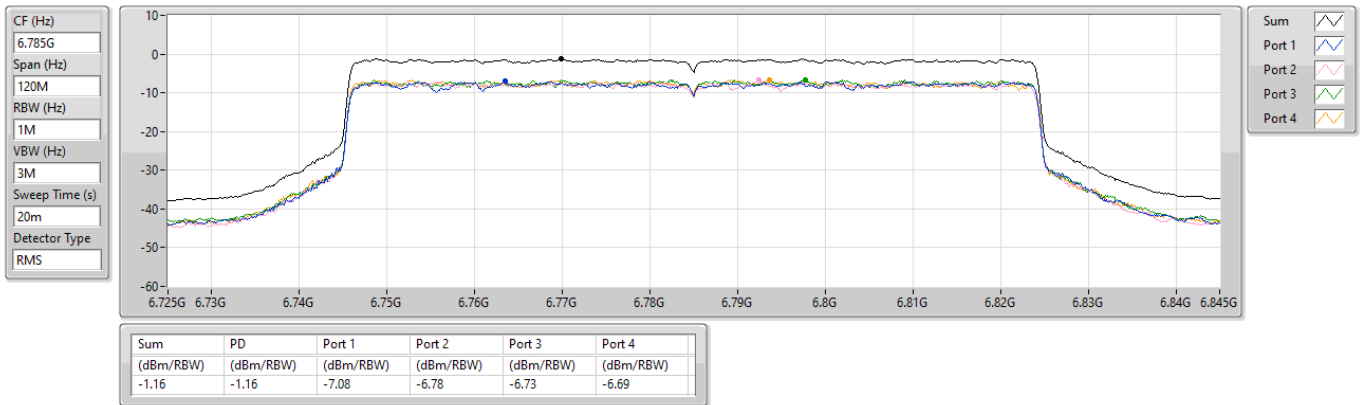

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6865MHz Straddle 6.875-7.125GHz

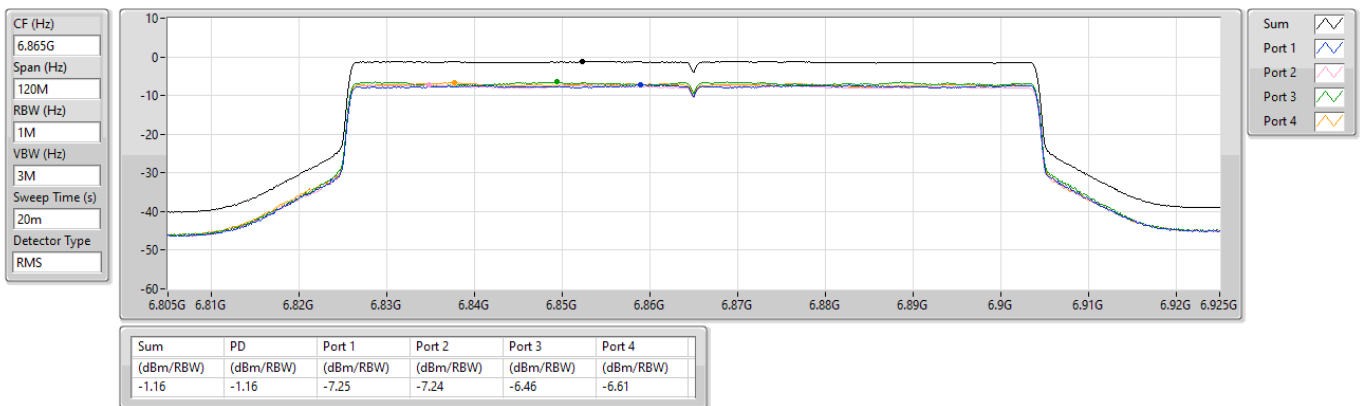




6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6945MHz

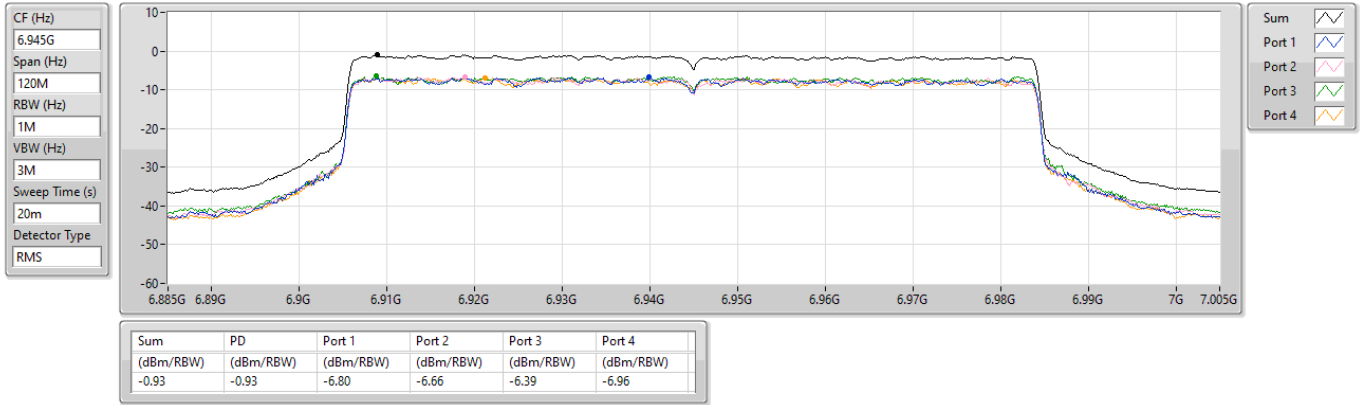

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


7025MHz

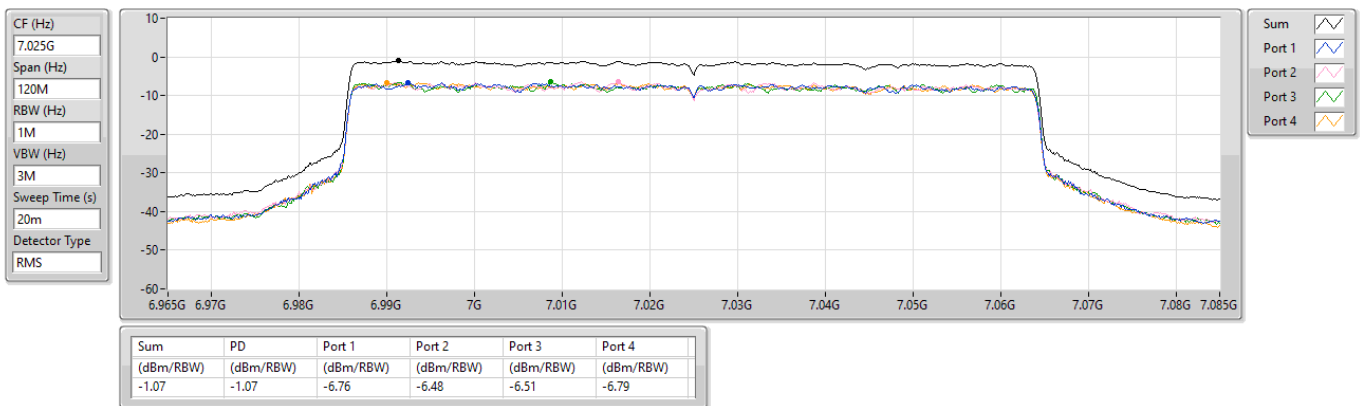

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD


6025MHz

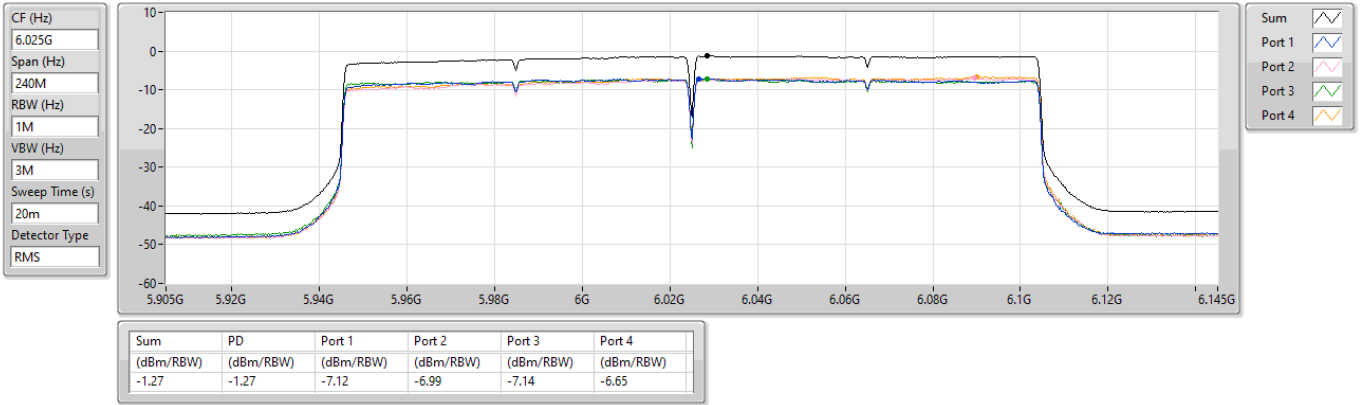

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6185MHz

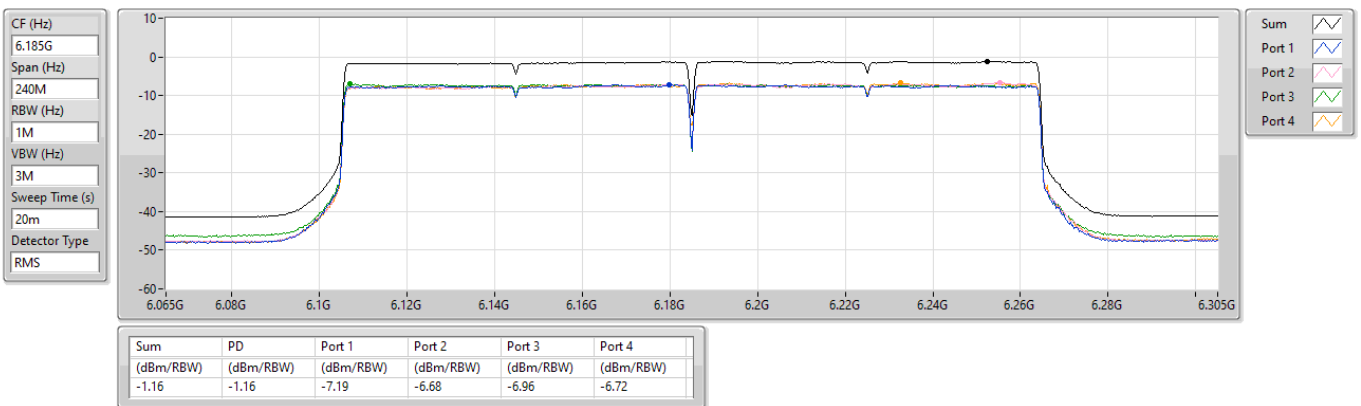

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6345MHz

CF (Hz)
6.345G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

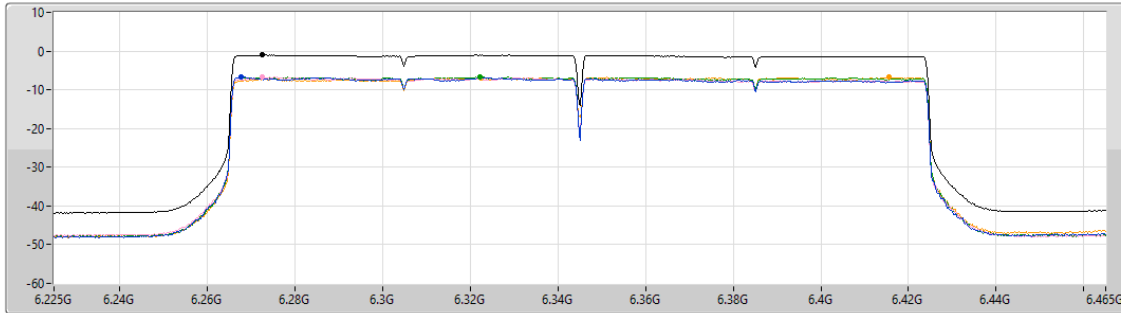

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.99	-0.99	-6.77	-6.77	-6.68	-6.78

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6505MHz Straddle 6.425-6.525GHz

CF (Hz)
6.505G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

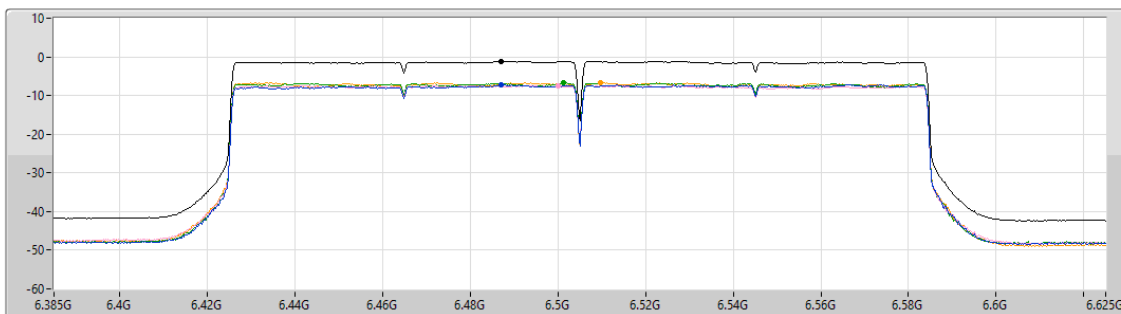

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.16	-1.16	-7.13	-7.40	-6.78	-6.63




6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6665MHz

CF (Hz)
6.665G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

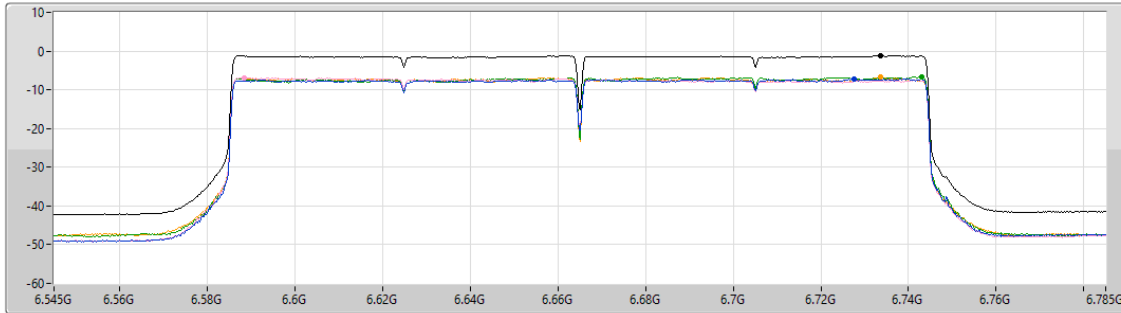


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.19	-1.19	-7.20	-6.87	-6.70	-6.81

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6825MHz Straddle 6.875-7.125GHz

CF (Hz)
6.825G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

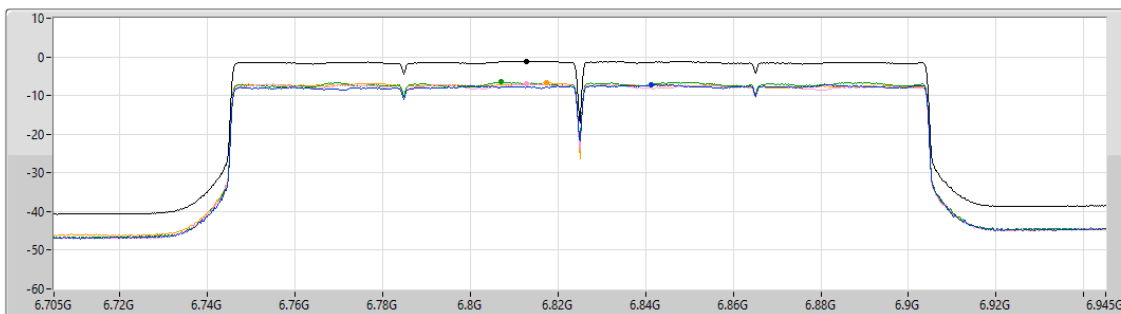

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.13	-1.13	-7.15	-6.99	-6.47	-6.72




6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6985MHz

CF (Hz)
6.985G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

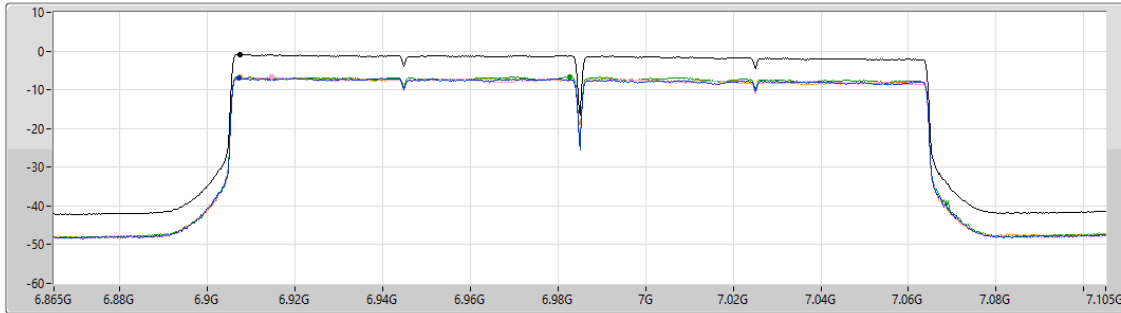


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.89	-0.89	-6.99	-6.78	-6.69	-6.79

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6105MHz

CF (Hz)
6.105G
Span (Hz)
480M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

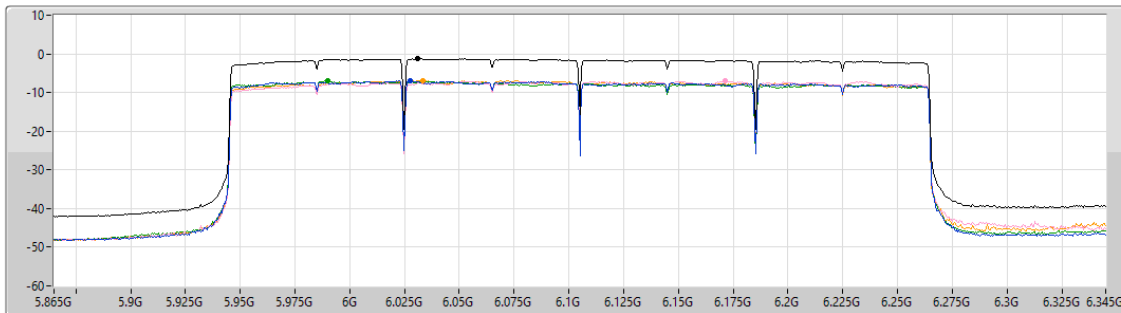


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.22	-1.22	-6.86	-7.07	-6.91	-6.88

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6265MHz

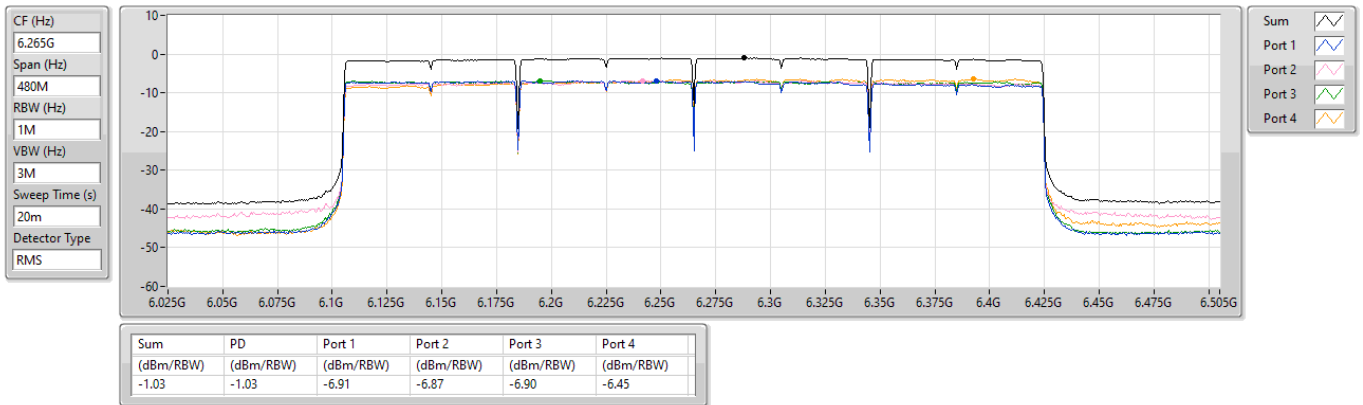

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6425MHz Straddle 6.425-6.525GHz

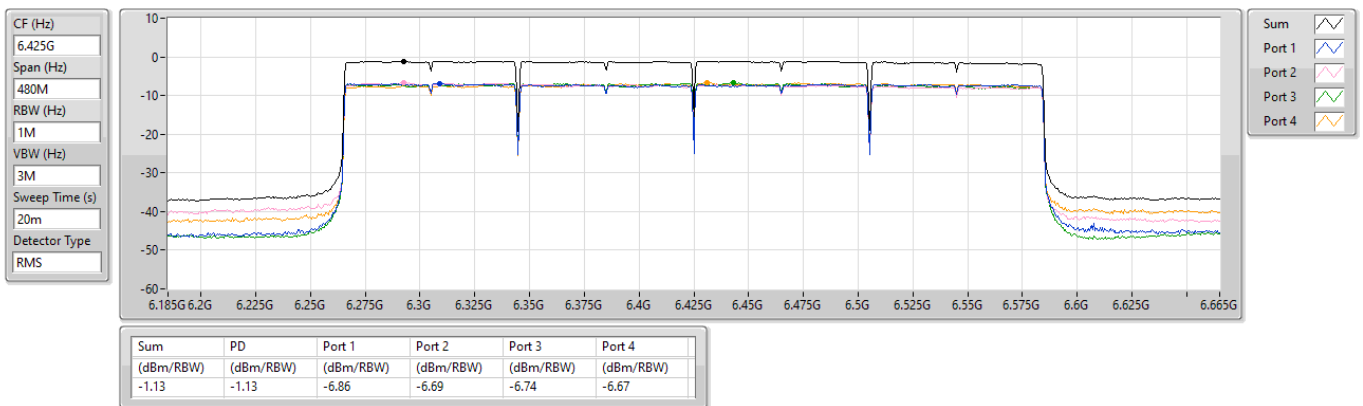




6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6585MHz Straddle 6.425-6.525GHz

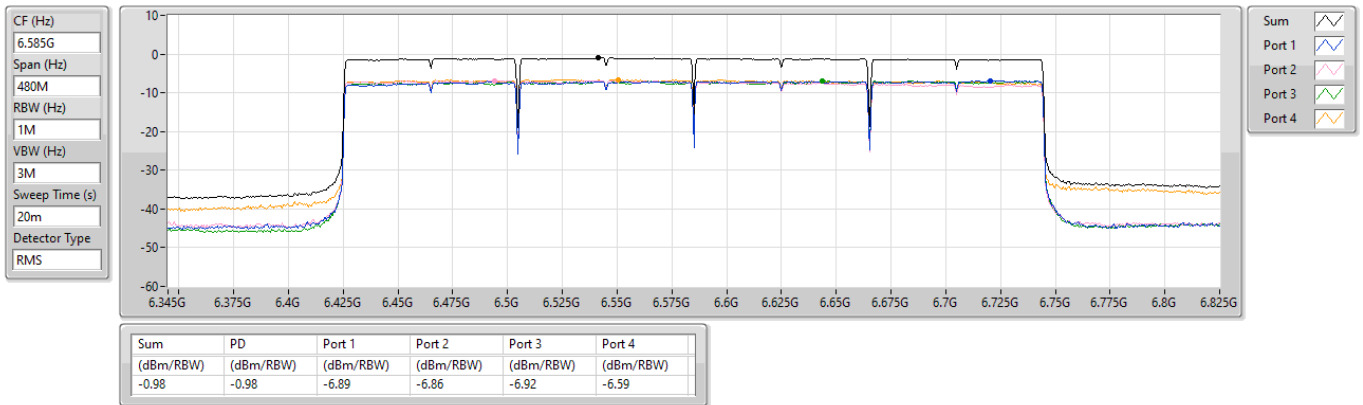

6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6745MHz Straddle 6.875-7.125GHz

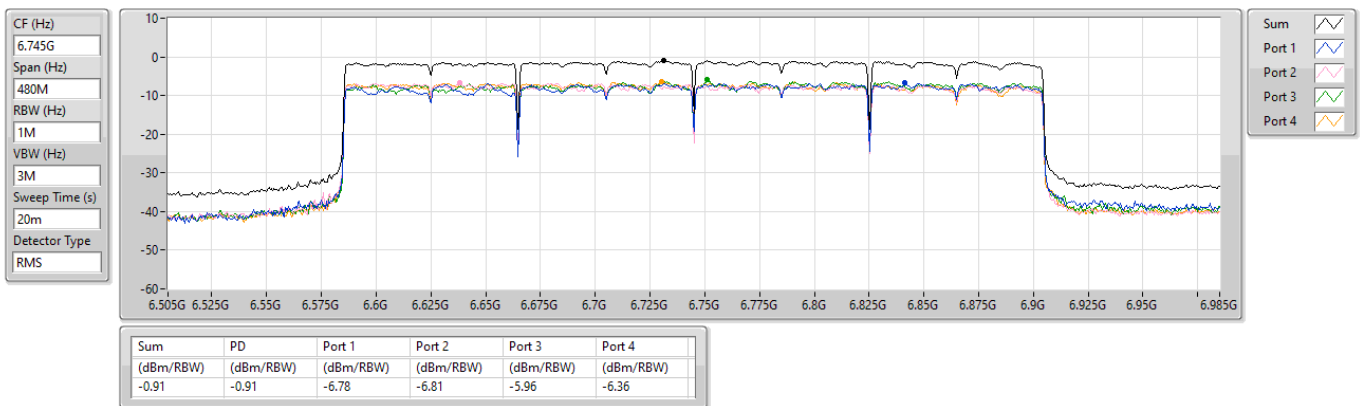




6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6905MHz Straddle 6.875-7.125GHz

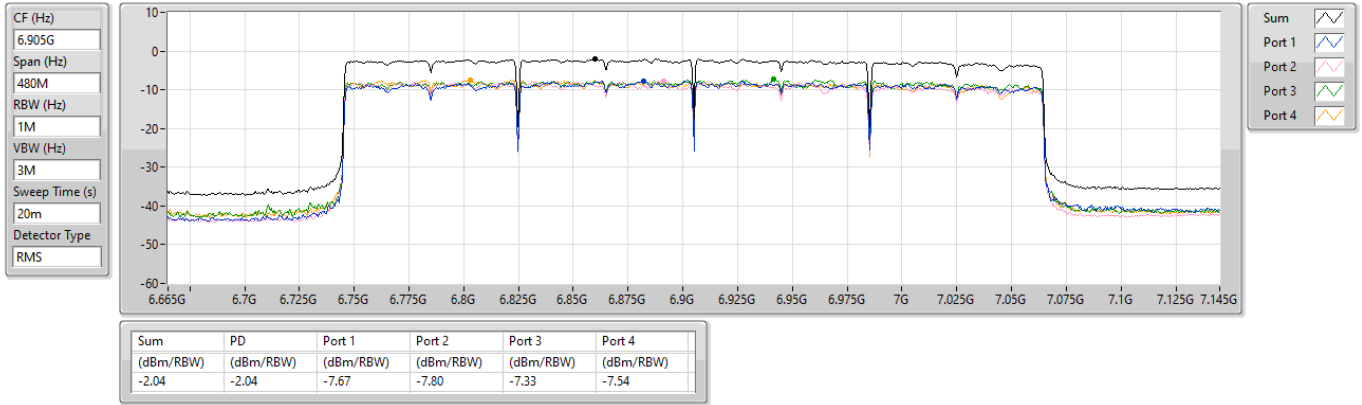



Unwanted Emissions (Below 1GHz)

Modulation	be EHT320_OFDMA		Test Freq. (MHz)		6745				
Polarization	Horizontal								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	66.86	27.61	40.00	-12.39	38.33	-10.72	Peak	---	---
2	148.34	28.39	43.50	-15.11	37.18	-8.79	Peak	---	---
3	219.15	29.10	46.00	-16.90	41.20	-12.10	Peak	---	---
4	280.26	32.88	46.00	-13.12	41.63	-8.75	Peak	---	---
5	431.58	34.82	46.00	-11.18	39.30	-4.48	Peak	---	---
6	802.12	38.81	46.00	-7.19	35.90	2.91	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6745																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>45.52</td><td>35.46</td><td>40.00</td><td>-4.54</td><td>44.25</td><td>-8.79</td><td>QP</td><td>100</td><td>66</td></tr><tr><td>2</td><td>66.86</td><td>36.14</td><td>40.00</td><td>-3.86</td><td>46.86</td><td>-10.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>146.40</td><td>33.84</td><td>43.50</td><td>-9.66</td><td>42.55</td><td>-8.71</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>211.39</td><td>31.67</td><td>43.50</td><td>-11.83</td><td>43.66</td><td>-11.99</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>297.72</td><td>32.58</td><td>46.00</td><td>-13.42</td><td>40.81</td><td>-8.23</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>453.89</td><td>38.06</td><td>46.00</td><td>-7.94</td><td>41.81</td><td>-3.75</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	45.52	35.46	40.00	-4.54	44.25	-8.79	QP	100	66	2	66.86	36.14	40.00	-3.86	46.86	-10.72	Peak	---	---	3	146.40	33.84	43.50	-9.66	42.55	-8.71	Peak	---	---	4	211.39	31.67	43.50	-11.83	43.66	-11.99	Peak	---	---	5	297.72	32.58	46.00	-13.42	40.81	-8.23	Peak	---	---	6	453.89	38.06	46.00	-7.94	41.81	-3.75	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	45.52	35.46	40.00	-4.54	44.25	-8.79	QP	100	66																																																																
2	66.86	36.14	40.00	-3.86	46.86	-10.72	Peak	---	---																																																																
3	146.40	33.84	43.50	-9.66	42.55	-8.71	Peak	---	---																																																																
4	211.39	31.67	43.50	-11.83	43.66	-11.99	Peak	---	---																																																																
5	297.72	32.58	46.00	-13.42	40.81	-8.23	Peak	---	---																																																																
6	453.89	38.06	46.00	-7.94	41.81	-3.75	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Unwanted Emissions (Above 1GHz)

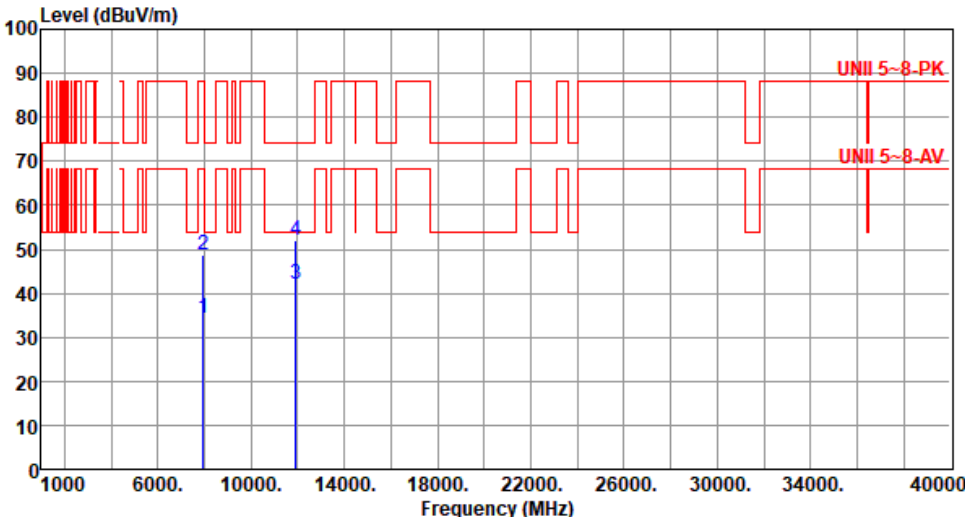Modulation	11a	Test Freq. (MHz)	5955																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7940.00</td><td>34.15</td><td>68.20</td><td>-34.05</td><td>27.29</td><td>6.86</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>2</td><td>7940.00</td><td>48.67</td><td>88.20</td><td>-39.53</td><td>41.81</td><td>6.86</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>3</td><td>11910.00</td><td>42.16</td><td>54.00</td><td>-11.84</td><td>33.75</td><td>8.41</td><td>Average</td><td>135</td><td>218</td></tr><tr><td>4</td><td>11910.00</td><td>52.06</td><td>74.00</td><td>-21.94</td><td>43.65</td><td>8.41</td><td>Peak</td><td>135</td><td>218</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7940.00	34.15	68.20	-34.05	27.29	6.86	Average	100	200	2	7940.00	48.67	88.20	-39.53	41.81	6.86	Peak	100	200	3	11910.00	42.16	54.00	-11.84	33.75	8.41	Average	135	218	4	11910.00	52.06	74.00	-21.94	43.65	8.41	Peak	135	218
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7940.00	34.15	68.20	-34.05	27.29	6.86	Average	100	200																																												
2	7940.00	48.67	88.20	-39.53	41.81	6.86	Peak	100	200																																												
3	11910.00	42.16	54.00	-11.84	33.75	8.41	Average	135	218																																												
4	11910.00	52.06	74.00	-21.94	43.65	8.41	Peak	135	218																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					




Modulation	11a	Test Freq. (MHz)	5955																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7940.00</td><td>34.10</td><td>68.20</td><td>-34.10</td><td>27.24</td><td>6.86</td><td>Average</td><td>100</td><td>310</td></tr><tr><td>2</td><td>7940.00</td><td>48.30</td><td>88.20</td><td>-39.90</td><td>41.44</td><td>6.86</td><td>Peak</td><td>100</td><td>310</td></tr><tr><td>3</td><td>11910.00</td><td>39.25</td><td>54.00</td><td>-14.75</td><td>30.84</td><td>8.41</td><td>Average</td><td>160</td><td>259</td></tr><tr><td>4</td><td>11910.00</td><td>51.08</td><td>74.00</td><td>-22.92</td><td>42.67</td><td>8.41</td><td>Peak</td><td>160</td><td>259</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7940.00	34.10	68.20	-34.10	27.24	6.86	Average	100	310	2	7940.00	48.30	88.20	-39.90	41.44	6.86	Peak	100	310	3	11910.00	39.25	54.00	-14.75	30.84	8.41	Average	160	259	4	11910.00	51.08	74.00	-22.92	42.67	8.41	Peak	160	259
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7940.00	34.10	68.20	-34.10	27.24	6.86	Average	100	310																																												
2	7940.00	48.30	88.20	-39.90	41.44	6.86	Peak	100	310																																												
3	11910.00	39.25	54.00	-14.75	30.84	8.41	Average	160	259																																												
4	11910.00	51.08	74.00	-22.92	42.67	8.41	Peak	160	259																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	6175																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8233.33</td><td>35.62</td><td>54.00</td><td>-18.38</td><td>28.79</td><td>6.83</td><td>Average</td><td>100</td><td>239</td></tr><tr><td>2</td><td>8233.33</td><td>49.45</td><td>74.00</td><td>-24.55</td><td>42.62</td><td>6.83</td><td>Peak</td><td>100</td><td>239</td></tr><tr><td>3</td><td>12350.00</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>33.81</td><td>8.50</td><td>Average</td><td>128</td><td>234</td></tr><tr><td>4</td><td>12350.00</td><td>50.88</td><td>74.00</td><td>-23.12</td><td>42.38</td><td>8.50</td><td>Peak</td><td>128</td><td>234</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8233.33	35.62	54.00	-18.38	28.79	6.83	Average	100	239	2	8233.33	49.45	74.00	-24.55	42.62	6.83	Peak	100	239	3	12350.00	42.31	54.00	-11.69	33.81	8.50	Average	128	234	4	12350.00	50.88	74.00	-23.12	42.38	8.50	Peak	128	234
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8233.33	35.62	54.00	-18.38	28.79	6.83	Average	100	239																																												
2	8233.33	49.45	74.00	-24.55	42.62	6.83	Peak	100	239																																												
3	12350.00	42.31	54.00	-11.69	33.81	8.50	Average	128	234																																												
4	12350.00	50.88	74.00	-23.12	42.38	8.50	Peak	128	234																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

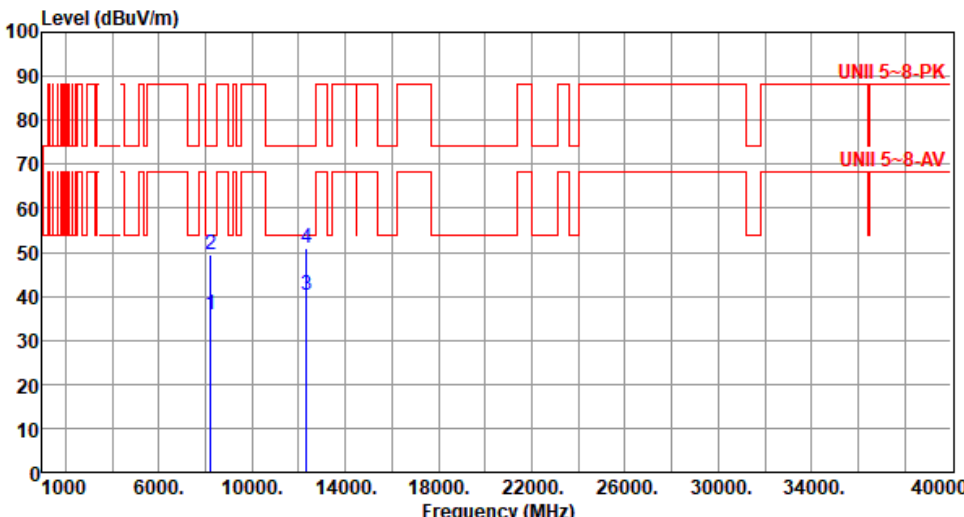

Modulation	11a	Test Freq. (MHz)	6175																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8233.33</td><td>35.72</td><td>54.00</td><td>-18.28</td><td>28.89</td><td>6.83</td><td>Average</td><td>100</td><td>305</td></tr><tr><td>2</td><td>8233.33</td><td>49.39</td><td>74.00</td><td>-24.61</td><td>42.56</td><td>6.83</td><td>Peak</td><td>100</td><td>305</td></tr><tr><td>3</td><td>12350.00</td><td>40.24</td><td>54.00</td><td>-13.76</td><td>31.74</td><td>8.50</td><td>Average</td><td>171</td><td>268</td></tr><tr><td>4</td><td>12350.00</td><td>50.83</td><td>74.00</td><td>-23.17</td><td>42.33</td><td>8.50</td><td>Peak</td><td>171</td><td>268</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8233.33	35.72	54.00	-18.28	28.89	6.83	Average	100	305	2	8233.33	49.39	74.00	-24.61	42.56	6.83	Peak	100	305	3	12350.00	40.24	54.00	-13.76	31.74	8.50	Average	171	268	4	12350.00	50.83	74.00	-23.17	42.33	8.50	Peak	171	268
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8233.33	35.72	54.00	-18.28	28.89	6.83	Average	100	305																																												
2	8233.33	49.39	74.00	-24.61	42.56	6.83	Peak	100	305																																												
3	12350.00	40.24	54.00	-13.76	31.74	8.50	Average	171	268																																												
4	12350.00	50.83	74.00	-23.17	42.33	8.50	Peak	171	268																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	11a	Test Freq. (MHz)	6415																																																												
Polarization	Horizontal																																																														
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																															
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8553.33</td><td>34.51</td><td>68.20</td><td>-33.69</td><td>27.34</td><td>7.17</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2</td><td>8553.33</td><td>48.49</td><td>88.20</td><td>-39.71</td><td>41.32</td><td>7.17</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>3</td><td>12830.00</td><td>42.02</td><td>68.20</td><td>-26.18</td><td>33.26</td><td>8.76</td><td>Average</td><td>142</td><td>260</td></tr><tr><td>4</td><td>12830.00</td><td>51.08</td><td>88.20</td><td>-37.12</td><td>42.32</td><td>8.76</td><td>Peak</td><td>142</td><td>260</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	8553.33	34.51	68.20	-33.69	27.34	7.17	Average	100	211	2	8553.33	48.49	88.20	-39.71	41.32	7.17	Peak	100	211	3	12830.00	42.02	68.20	-26.18	33.26	8.76	Average	142	260	4	12830.00	51.08	88.20	-37.12	42.32	8.76	Peak	142	260
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																						
1	8553.33	34.51	68.20	-33.69	27.34	7.17	Average	100	211																																																						
2	8553.33	48.49	88.20	-39.71	41.32	7.17	Peak	100	211																																																						
3	12830.00	42.02	68.20	-26.18	33.26	8.76	Average	142	260																																																						
4	12830.00	51.08	88.20	-37.12	42.32	8.76	Peak	142	260																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Modulation	11a	Test Freq. (MHz)	6415																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8553.33</td><td>34.44</td><td>68.20</td><td>-33.76</td><td>27.27</td><td>7.17</td><td>Average</td><td>100</td><td>330</td></tr><tr><td>2</td><td>8553.33</td><td>48.33</td><td>88.20</td><td>-39.87</td><td>41.16</td><td>7.17</td><td>Peak</td><td>100</td><td>330</td></tr><tr><td>3</td><td>12830.00</td><td>39.43</td><td>68.20</td><td>-28.77</td><td>30.67</td><td>8.76</td><td>Average</td><td>140</td><td>271</td></tr><tr><td>4</td><td>12830.00</td><td>51.10</td><td>88.20</td><td>-37.10</td><td>42.34</td><td>8.76</td><td>Peak</td><td>140</td><td>271</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8553.33	34.44	68.20	-33.76	27.27	7.17	Average	100	330	2	8553.33	48.33	88.20	-39.87	41.16	7.17	Peak	100	330	3	12830.00	39.43	68.20	-28.77	30.67	8.76	Average	140	271	4	12830.00	51.10	88.20	-37.10	42.34	8.76	Peak	140	271
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8553.33	34.44	68.20	-33.76	27.27	7.17	Average	100	330																																												
2	8553.33	48.33	88.20	-39.87	41.16	7.17	Peak	100	330																																												
3	12830.00	39.43	68.20	-28.77	30.67	8.76	Average	140	271																																												
4	12830.00	51.10	88.20	-37.10	42.34	8.76	Peak	140	271																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	6435																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8580.00</td><td>34.48</td><td>68.20</td><td>-33.72</td><td>27.22</td><td>7.26</td><td>Average</td><td>100</td><td>303</td></tr><tr><td>2</td><td>8580.00</td><td>48.13</td><td>88.20</td><td>-40.07</td><td>40.87</td><td>7.26</td><td>Peak</td><td>100</td><td>303</td></tr><tr><td>3</td><td>12870.00</td><td>42.62</td><td>68.20</td><td>-25.58</td><td>33.84</td><td>8.78</td><td>Average</td><td>248</td><td>316</td></tr><tr><td>4</td><td>12870.00</td><td>51.88</td><td>88.20</td><td>-36.32</td><td>43.10</td><td>8.78</td><td>Peak</td><td>248</td><td>316</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8580.00	34.48	68.20	-33.72	27.22	7.26	Average	100	303	2	8580.00	48.13	88.20	-40.07	40.87	7.26	Peak	100	303	3	12870.00	42.62	68.20	-25.58	33.84	8.78	Average	248	316	4	12870.00	51.88	88.20	-36.32	43.10	8.78	Peak	248	316
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8580.00	34.48	68.20	-33.72	27.22	7.26	Average	100	303																																												
2	8580.00	48.13	88.20	-40.07	40.87	7.26	Peak	100	303																																												
3	12870.00	42.62	68.20	-25.58	33.84	8.78	Average	248	316																																												
4	12870.00	51.88	88.20	-36.32	43.10	8.78	Peak	248	316																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	6435																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8580.00</td><td>34.60</td><td>68.20</td><td>-33.60</td><td>27.34</td><td>7.26</td><td>Average</td><td>100</td><td>261</td></tr><tr><td>2</td><td>8580.00</td><td>48.68</td><td>88.20</td><td>-39.52</td><td>41.42</td><td>7.26</td><td>Peak</td><td>100</td><td>261</td></tr><tr><td>3</td><td>12870.00</td><td>39.86</td><td>68.20</td><td>-28.34</td><td>31.08</td><td>8.78</td><td>Average</td><td>141</td><td>299</td></tr><tr><td>4</td><td>12870.00</td><td>51.39</td><td>88.20</td><td>-36.81</td><td>42.61</td><td>8.78</td><td>Peak</td><td>142</td><td>299</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8580.00	34.60	68.20	-33.60	27.34	7.26	Average	100	261	2	8580.00	48.68	88.20	-39.52	41.42	7.26	Peak	100	261	3	12870.00	39.86	68.20	-28.34	31.08	8.78	Average	141	299	4	12870.00	51.39	88.20	-36.81	42.61	8.78	Peak	142	299
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8580.00	34.60	68.20	-33.60	27.34	7.26	Average	100	261																																												
2	8580.00	48.68	88.20	-39.52	41.42	7.26	Peak	100	261																																												
3	12870.00	39.86	68.20	-28.34	31.08	8.78	Average	141	299																																												
4	12870.00	51.39	88.20	-36.81	42.61	8.78	Peak	142	299																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	6475																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8633.33</td><td>34.70</td><td>68.20</td><td>-33.50</td><td>27.34</td><td>7.36</td><td>Average</td><td>100</td><td>290</td></tr><tr><td>2</td><td>8633.33</td><td>48.11</td><td>88.20</td><td>-40.09</td><td>40.75</td><td>7.36</td><td>Peak</td><td>100</td><td>290</td></tr><tr><td>3</td><td>12950.00</td><td>42.50</td><td>68.20</td><td>-25.70</td><td>33.81</td><td>8.69</td><td>Average</td><td>241</td><td>283</td></tr><tr><td>4</td><td>12950.00</td><td>51.65</td><td>88.20</td><td>-36.55</td><td>42.96</td><td>8.69</td><td>Peak</td><td>241</td><td>283</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8633.33	34.70	68.20	-33.50	27.34	7.36	Average	100	290	2	8633.33	48.11	88.20	-40.09	40.75	7.36	Peak	100	290	3	12950.00	42.50	68.20	-25.70	33.81	8.69	Average	241	283	4	12950.00	51.65	88.20	-36.55	42.96	8.69	Peak	241	283
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8633.33	34.70	68.20	-33.50	27.34	7.36	Average	100	290																																												
2	8633.33	48.11	88.20	-40.09	40.75	7.36	Peak	100	290																																												
3	12950.00	42.50	68.20	-25.70	33.81	8.69	Average	241	283																																												
4	12950.00	51.65	88.20	-36.55	42.96	8.69	Peak	241	283																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	11a	Test Freq. (MHz)	6475																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8633.33</td><td>34.73</td><td>68.20</td><td>-33.47</td><td>27.37</td><td>7.36</td><td>Average</td><td>100</td><td>238</td></tr><tr><td>2</td><td>8633.33</td><td>48.88</td><td>88.20</td><td>-39.32</td><td>41.52</td><td>7.36</td><td>Peak</td><td>100</td><td>238</td></tr><tr><td>3</td><td>12950.00</td><td>39.80</td><td>68.20</td><td>-28.40</td><td>31.11</td><td>8.69</td><td>Average</td><td>131</td><td>288</td></tr><tr><td>4</td><td>12950.00</td><td>51.61</td><td>88.20</td><td>-36.59</td><td>42.92</td><td>8.69</td><td>Peak</td><td>131</td><td>288</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8633.33	34.73	68.20	-33.47	27.37	7.36	Average	100	238	2	8633.33	48.88	88.20	-39.32	41.52	7.36	Peak	100	238	3	12950.00	39.80	68.20	-28.40	31.11	8.69	Average	131	288	4	12950.00	51.61	88.20	-36.59	42.92	8.69	Peak	131	288
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8633.33	34.73	68.20	-33.47	27.37	7.36	Average	100	238																																												
2	8633.33	48.88	88.20	-39.32	41.52	7.36	Peak	100	238																																												
3	12950.00	39.80	68.20	-28.40	31.11	8.69	Average	131	288																																												
4	12950.00	51.61	88.20	-36.59	42.92	8.69	Peak	131	288																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	6515
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	6515																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8686.66</td><td>34.71</td><td>68.20</td><td>-33.49</td><td>27.31</td><td>7.40</td><td>Average</td><td>100</td><td>239</td></tr><tr><td>2</td><td>8686.66</td><td>48.85</td><td>88.20</td><td>-39.35</td><td>41.45</td><td>7.40</td><td>Peak</td><td>100</td><td>239</td></tr><tr><td>3</td><td>13030.00</td><td>39.65</td><td>68.20</td><td>-28.55</td><td>30.88</td><td>8.77</td><td>Average</td><td>155</td><td>280</td></tr><tr><td>4</td><td>13030.00</td><td>51.06</td><td>88.20</td><td>-37.14</td><td>42.29</td><td>8.77</td><td>Peak</td><td>155</td><td>280</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8686.66	34.71	68.20	-33.49	27.31	7.40	Average	100	239	2	8686.66	48.85	88.20	-39.35	41.45	7.40	Peak	100	239	3	13030.00	39.65	68.20	-28.55	30.88	8.77	Average	155	280	4	13030.00	51.06	88.20	-37.14	42.29	8.77	Peak	155	280
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8686.66	34.71	68.20	-33.49	27.31	7.40	Average	100	239																																												
2	8686.66	48.85	88.20	-39.35	41.45	7.40	Peak	100	239																																												
3	13030.00	39.65	68.20	-28.55	30.88	8.77	Average	155	280																																												
4	13030.00	51.06	88.20	-37.14	42.29	8.77	Peak	155	280																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	6535																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8713.33</td><td>34.89</td><td>68.20</td><td>-33.31</td><td>27.44</td><td>7.45</td><td>Average</td><td>100</td><td>281</td></tr><tr><td>2</td><td>8713.33</td><td>48.11</td><td>88.20</td><td>-40.09</td><td>40.66</td><td>7.45</td><td>Peak</td><td>100</td><td>281</td></tr><tr><td>3</td><td>13070.00</td><td>42.49</td><td>68.20</td><td>-25.71</td><td>33.90</td><td>8.59</td><td>Average</td><td>220</td><td>312</td></tr><tr><td>4</td><td>13070.00</td><td>52.27</td><td>88.20</td><td>-35.93</td><td>43.68</td><td>8.59</td><td>Peak</td><td>220</td><td>312</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8713.33	34.89	68.20	-33.31	27.44	7.45	Average	100	281	2	8713.33	48.11	88.20	-40.09	40.66	7.45	Peak	100	281	3	13070.00	42.49	68.20	-25.71	33.90	8.59	Average	220	312	4	13070.00	52.27	88.20	-35.93	43.68	8.59	Peak	220	312
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8713.33	34.89	68.20	-33.31	27.44	7.45	Average	100	281																																												
2	8713.33	48.11	88.20	-40.09	40.66	7.45	Peak	100	281																																												
3	13070.00	42.49	68.20	-25.71	33.90	8.59	Average	220	312																																												
4	13070.00	52.27	88.20	-35.93	43.68	8.59	Peak	220	312																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	11a	Test Freq. (MHz)	6535																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8713.33</td><td>34.77</td><td>68.20</td><td>-33.43</td><td>27.32</td><td>7.45</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>8713.33</td><td>48.94</td><td>88.20</td><td>-39.26</td><td>41.49</td><td>7.45</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>13070.00</td><td>39.48</td><td>68.20</td><td>-28.72</td><td>30.89</td><td>8.59</td><td>Average</td><td>142</td><td>277</td></tr><tr><td>4</td><td>13070.00</td><td>51.41</td><td>88.20</td><td>-36.79</td><td>42.82</td><td>8.59</td><td>Peak</td><td>142</td><td>277</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8713.33	34.77	68.20	-33.43	27.32	7.45	Average	100	251	2	8713.33	48.94	88.20	-39.26	41.49	7.45	Peak	100	251	3	13070.00	39.48	68.20	-28.72	30.89	8.59	Average	142	277	4	13070.00	51.41	88.20	-36.79	42.82	8.59	Peak	142	277
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8713.33	34.77	68.20	-33.43	27.32	7.45	Average	100	251																																												
2	8713.33	48.94	88.20	-39.26	41.49	7.45	Peak	100	251																																												
3	13070.00	39.48	68.20	-28.72	30.89	8.59	Average	142	277																																												
4	13070.00	51.41	88.20	-36.79	42.82	8.59	Peak	142	277																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	11a	Test Freq. (MHz)	6715																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8953.33</td><td>35.21</td><td>68.20</td><td>-32.99</td><td>27.79</td><td>7.42</td><td>Average</td><td>100</td><td>294</td></tr><tr><td>2</td><td>8953.33</td><td>48.54</td><td>88.20</td><td>-39.66</td><td>41.12</td><td>7.42</td><td>Peak</td><td>100</td><td>294</td></tr><tr><td>3</td><td>13430.00</td><td>42.78</td><td>68.20</td><td>-25.42</td><td>34.28</td><td>8.50</td><td>Average</td><td>242</td><td>308</td></tr><tr><td>4</td><td>13430.00</td><td>52.24</td><td>88.20</td><td>-35.96</td><td>43.74</td><td>8.50</td><td>Peak</td><td>242</td><td>308</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8953.33	35.21	68.20	-32.99	27.79	7.42	Average	100	294	2	8953.33	48.54	88.20	-39.66	41.12	7.42	Peak	100	294	3	13430.00	42.78	68.20	-25.42	34.28	8.50	Average	242	308	4	13430.00	52.24	88.20	-35.96	43.74	8.50	Peak	242	308
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8953.33	35.21	68.20	-32.99	27.79	7.42	Average	100	294																																												
2	8953.33	48.54	88.20	-39.66	41.12	7.42	Peak	100	294																																												
3	13430.00	42.78	68.20	-25.42	34.28	8.50	Average	242	308																																												
4	13430.00	52.24	88.20	-35.96	43.74	8.50	Peak	242	308																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

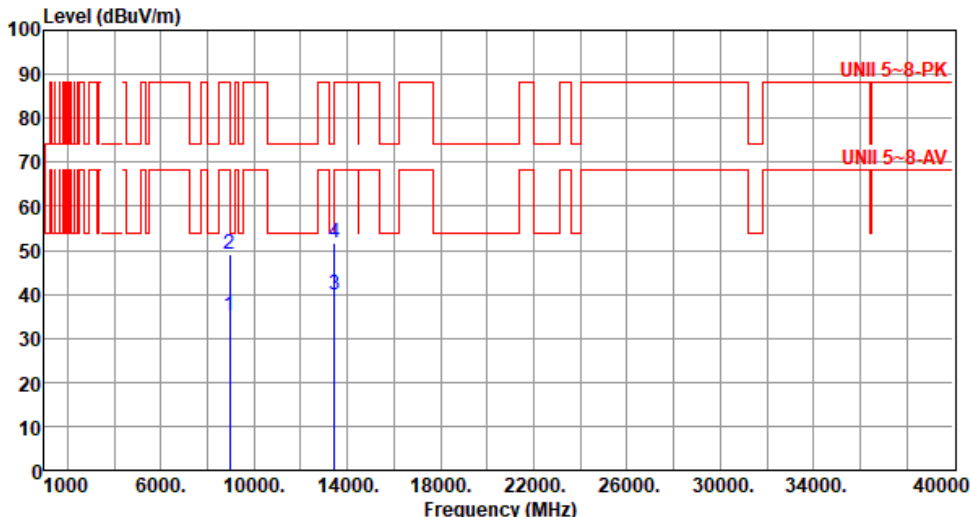

Modulation	11a	Test Freq. (MHz)	6715																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8953.33</td><td>35.04</td><td>68.20</td><td>-33.16</td><td>27.62</td><td>7.42</td><td>Average</td><td>100</td><td>260</td></tr><tr><td>2</td><td>8953.33</td><td>48.97</td><td>88.20</td><td>-39.23</td><td>41.55</td><td>7.42</td><td>Peak</td><td>100</td><td>260</td></tr><tr><td>3</td><td>13430.00</td><td>39.83</td><td>68.20</td><td>-28.37</td><td>31.33</td><td>8.50</td><td>Average</td><td>149</td><td>272</td></tr><tr><td>4</td><td>13430.00</td><td>51.49</td><td>88.20</td><td>-36.71</td><td>42.99</td><td>8.50</td><td>Peak</td><td>149</td><td>272</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8953.33	35.04	68.20	-33.16	27.62	7.42	Average	100	260	2	8953.33	48.97	88.20	-39.23	41.55	7.42	Peak	100	260	3	13430.00	39.83	68.20	-28.37	31.33	8.50	Average	149	272	4	13430.00	51.49	88.20	-36.71	42.99	8.50	Peak	149	272
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8953.33	35.04	68.20	-33.16	27.62	7.42	Average	100	260																																												
2	8953.33	48.97	88.20	-39.23	41.55	7.42	Peak	100	260																																												
3	13430.00	39.83	68.20	-28.37	31.33	8.50	Average	149	272																																												
4	13430.00	51.49	88.20	-36.71	42.99	8.50	Peak	149	272																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

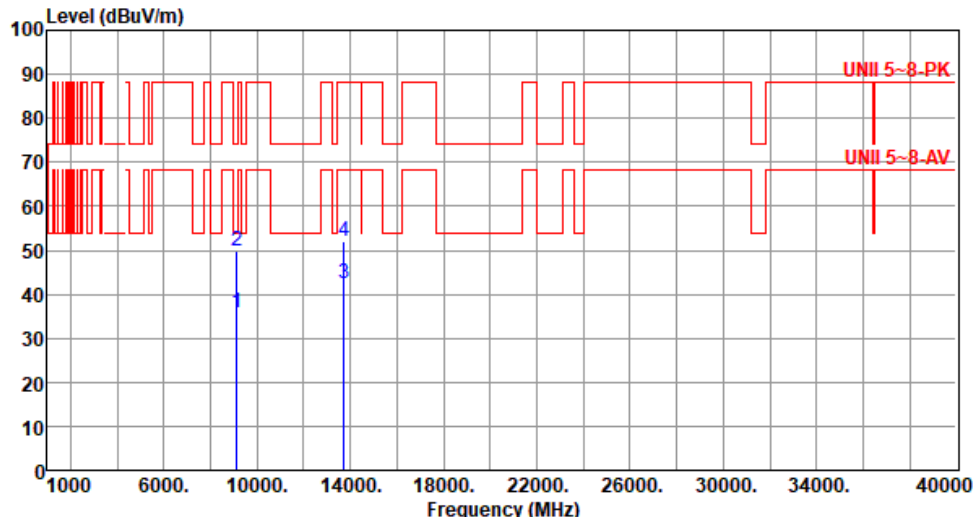


Modulation	11a	Test Freq. (MHz)	6855																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9140.00</td><td>35.81</td><td>54.00</td><td>-18.19</td><td>27.88</td><td>7.93</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>9140.00</td><td>49.88</td><td>74.00</td><td>-24.12</td><td>41.95</td><td>7.93</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>13710.00</td><td>42.50</td><td>68.20</td><td>-25.70</td><td>33.98</td><td>8.52</td><td>Average</td><td>239</td><td>295</td></tr><tr><td>4</td><td>13710.00</td><td>52.07</td><td>88.20</td><td>-36.13</td><td>43.55</td><td>8.52</td><td>Peak</td><td>239</td><td>295</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9140.00	35.81	54.00	-18.19	27.88	7.93	Average	100	278	2	9140.00	49.88	74.00	-24.12	41.95	7.93	Peak	100	278	3	13710.00	42.50	68.20	-25.70	33.98	8.52	Average	239	295	4	13710.00	52.07	88.20	-36.13	43.55	8.52	Peak	239	295
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9140.00	35.81	54.00	-18.19	27.88	7.93	Average	100	278																																												
2	9140.00	49.88	74.00	-24.12	41.95	7.93	Peak	100	278																																												
3	13710.00	42.50	68.20	-25.70	33.98	8.52	Average	239	295																																												
4	13710.00	52.07	88.20	-36.13	43.55	8.52	Peak	239	295																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	11a	Test Freq. (MHz)	6855																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9140.00</td><td>35.59</td><td>54.00</td><td>-18.41</td><td>27.66</td><td>7.93</td><td>Average</td><td>100</td><td>226</td></tr><tr><td>2</td><td>9140.00</td><td>49.42</td><td>74.00</td><td>-24.58</td><td>41.49</td><td>7.93</td><td>Peak</td><td>100</td><td>226</td></tr><tr><td>3</td><td>13710.00</td><td>39.60</td><td>68.20</td><td>-28.60</td><td>31.08</td><td>8.52</td><td>Average</td><td>144</td><td>253</td></tr><tr><td>4</td><td>13710.00</td><td>51.49</td><td>88.20</td><td>-36.71</td><td>42.97</td><td>8.52</td><td>Peak</td><td>144</td><td>289</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9140.00	35.59	54.00	-18.41	27.66	7.93	Average	100	226	2	9140.00	49.42	74.00	-24.58	41.49	7.93	Peak	100	226	3	13710.00	39.60	68.20	-28.60	31.08	8.52	Average	144	253	4	13710.00	51.49	88.20	-36.71	42.97	8.52	Peak	144	289
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9140.00	35.59	54.00	-18.41	27.66	7.93	Average	100	226																																												
2	9140.00	49.42	74.00	-24.58	41.49	7.93	Peak	100	226																																												
3	13710.00	39.60	68.20	-28.60	31.08	8.52	Average	144	253																																												
4	13710.00	51.49	88.20	-36.71	42.97	8.52	Peak	144	289																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

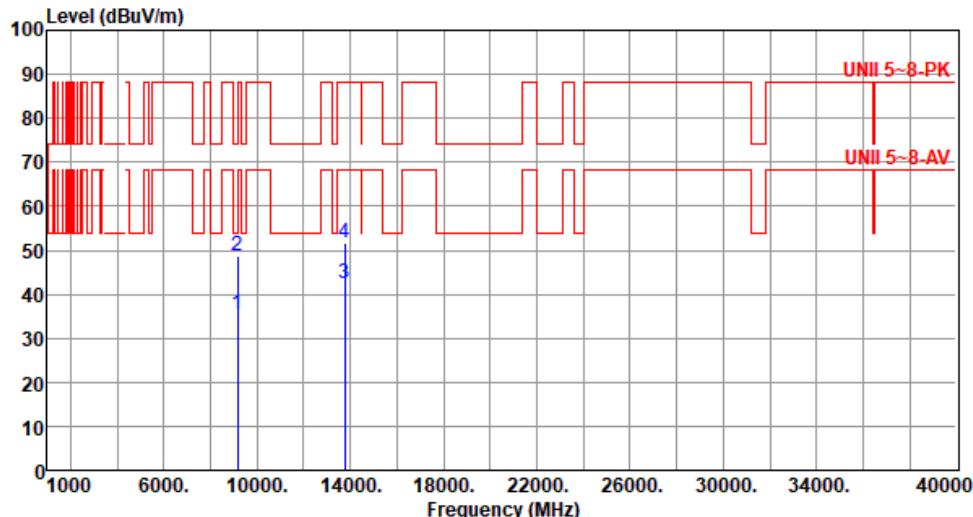

Modulation	11a	Test Freq. (MHz)	6875																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9166.66</td><td>35.54</td><td>54.00</td><td>-18.46</td><td>27.55</td><td>7.99</td><td>Average</td><td>100</td><td>294</td></tr><tr><td>2</td><td>9166.66</td><td>48.83</td><td>74.00</td><td>-25.17</td><td>40.84</td><td>7.99</td><td>Peak</td><td>100</td><td>294</td></tr><tr><td>3</td><td>13750.00</td><td>42.59</td><td>68.20</td><td>-25.61</td><td>34.09</td><td>8.50</td><td>Average</td><td>233</td><td>298</td></tr><tr><td>4</td><td>13750.00</td><td>51.65</td><td>88.20</td><td>-36.55</td><td>43.15</td><td>8.50</td><td>Peak</td><td>233</td><td>298</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9166.66	35.54	54.00	-18.46	27.55	7.99	Average	100	294	2	9166.66	48.83	74.00	-25.17	40.84	7.99	Peak	100	294	3	13750.00	42.59	68.20	-25.61	34.09	8.50	Average	233	298	4	13750.00	51.65	88.20	-36.55	43.15	8.50	Peak	233	298
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9166.66	35.54	54.00	-18.46	27.55	7.99	Average	100	294																																												
2	9166.66	48.83	74.00	-25.17	40.84	7.99	Peak	100	294																																												
3	13750.00	42.59	68.20	-25.61	34.09	8.50	Average	233	298																																												
4	13750.00	51.65	88.20	-36.55	43.15	8.50	Peak	233	298																																												



Modulation	11a	Test Freq. (MHz)	6875																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9166.66</td><td>35.65</td><td>54.00</td><td>-18.35</td><td>27.66</td><td>7.99</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2</td><td>9166.66</td><td>49.39</td><td>74.00</td><td>-24.61</td><td>41.40</td><td>7.99</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>3</td><td>13750.00</td><td>39.61</td><td>68.20</td><td>-28.59</td><td>31.11</td><td>8.50</td><td>Average</td><td>133</td><td>242</td></tr><tr><td>4</td><td>13750.00</td><td>51.28</td><td>88.20</td><td>-36.92</td><td>42.78</td><td>8.50</td><td>Peak</td><td>133</td><td>242</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9166.66	35.65	54.00	-18.35	27.66	7.99	Average	100	211	2	9166.66	49.39	74.00	-24.61	41.40	7.99	Peak	100	211	3	13750.00	39.61	68.20	-28.59	31.11	8.50	Average	133	242	4	13750.00	51.28	88.20	-36.92	42.78	8.50	Peak	133	242
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9166.66	35.65	54.00	-18.35	27.66	7.99	Average	100	211																																												
2	9166.66	49.39	74.00	-24.61	41.40	7.99	Peak	100	211																																												
3	13750.00	39.61	68.20	-28.59	31.11	8.50	Average	133	242																																												
4	13750.00	51.28	88.20	-36.92	42.78	8.50	Peak	133	242																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	6895																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9193.33</td><td>35.59</td><td>54.00</td><td>-18.41</td><td>27.54</td><td>8.05</td><td>Average</td><td>100</td><td>270</td></tr><tr><td>2</td><td>9193.33</td><td>48.65</td><td>74.00</td><td>-25.35</td><td>40.60</td><td>8.05</td><td>Peak</td><td>100</td><td>270</td></tr><tr><td>3</td><td>13790.00</td><td>42.73</td><td>68.20</td><td>-25.47</td><td>34.09</td><td>8.64</td><td>Average</td><td>233</td><td>287</td></tr><tr><td>4</td><td>13790.00</td><td>52.41</td><td>88.20</td><td>-35.79</td><td>43.77</td><td>8.64</td><td>Peak</td><td>233</td><td>287</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9193.33	35.59	54.00	-18.41	27.54	8.05	Average	100	270	2	9193.33	48.65	74.00	-25.35	40.60	8.05	Peak	100	270	3	13790.00	42.73	68.20	-25.47	34.09	8.64	Average	233	287	4	13790.00	52.41	88.20	-35.79	43.77	8.64	Peak	233	287
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9193.33	35.59	54.00	-18.41	27.54	8.05	Average	100	270																																												
2	9193.33	48.65	74.00	-25.35	40.60	8.05	Peak	100	270																																												
3	13790.00	42.73	68.20	-25.47	34.09	8.64	Average	233	287																																												
4	13790.00	52.41	88.20	-35.79	43.77	8.64	Peak	233	287																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	6895																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9193.33</td><td>35.70</td><td>54.00</td><td>-18.30</td><td>27.65</td><td>8.05</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>2</td><td>9193.33</td><td>49.44</td><td>74.00</td><td>-24.56</td><td>41.39</td><td>8.05</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>3</td><td>13790.00</td><td>39.76</td><td>68.20</td><td>-28.44</td><td>31.12</td><td>8.64</td><td>Average</td><td>128</td><td>254</td></tr><tr><td>4</td><td>13790.00</td><td>51.50</td><td>88.20</td><td>-36.70</td><td>42.86</td><td>8.64</td><td>Peak</td><td>128</td><td>254</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9193.33	35.70	54.00	-18.30	27.65	8.05	Average	100	188	2	9193.33	49.44	74.00	-24.56	41.39	8.05	Peak	100	188	3	13790.00	39.76	68.20	-28.44	31.12	8.64	Average	128	254	4	13790.00	51.50	88.20	-36.70	42.86	8.64	Peak	128	254
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9193.33	35.70	54.00	-18.30	27.65	8.05	Average	100	188																																												
2	9193.33	49.44	74.00	-24.56	41.39	8.05	Peak	100	188																																												
3	13790.00	39.76	68.20	-28.44	31.12	8.64	Average	128	254																																												
4	13790.00	51.50	88.20	-36.70	42.86	8.64	Peak	128	254																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	7015																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9353.33</td><td>36.05</td><td>54.00</td><td>-17.95</td><td>27.50</td><td>8.55</td><td>Average</td><td>100</td><td>237</td></tr><tr><td>2</td><td>9353.33</td><td>49.23</td><td>74.00</td><td>-24.77</td><td>40.68</td><td>8.55</td><td>Peak</td><td>100</td><td>237</td></tr><tr><td>3</td><td>14030.00</td><td>43.05</td><td>68.20</td><td>-25.15</td><td>33.88</td><td>9.17</td><td>Average</td><td>220</td><td>291</td></tr><tr><td>4</td><td>14030.00</td><td>52.44</td><td>88.20</td><td>-35.76</td><td>43.27</td><td>9.17</td><td>Peak</td><td>220</td><td>291</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9353.33	36.05	54.00	-17.95	27.50	8.55	Average	100	237	2	9353.33	49.23	74.00	-24.77	40.68	8.55	Peak	100	237	3	14030.00	43.05	68.20	-25.15	33.88	9.17	Average	220	291	4	14030.00	52.44	88.20	-35.76	43.27	9.17	Peak	220	291
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9353.33	36.05	54.00	-17.95	27.50	8.55	Average	100	237																																												
2	9353.33	49.23	74.00	-24.77	40.68	8.55	Peak	100	237																																												
3	14030.00	43.05	68.20	-25.15	33.88	9.17	Average	220	291																																												
4	14030.00	52.44	88.20	-35.76	43.27	9.17	Peak	220	291																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	7015																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9353.33</td><td>35.69</td><td>54.00</td><td>-18.31</td><td>27.14</td><td>8.55</td><td>Average</td><td>100</td><td>229</td></tr><tr><td>2</td><td>9353.33</td><td>49.75</td><td>74.00</td><td>-24.25</td><td>41.20</td><td>8.55</td><td>Peak</td><td>100</td><td>229</td></tr><tr><td>3</td><td>14030.00</td><td>40.28</td><td>68.20</td><td>-27.92</td><td>31.11</td><td>9.17</td><td>Average</td><td>143</td><td>250</td></tr><tr><td>4</td><td>14030.00</td><td>52.05</td><td>88.20</td><td>-36.15</td><td>42.88</td><td>9.17</td><td>Peak</td><td>143</td><td>250</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9353.33	35.69	54.00	-18.31	27.14	8.55	Average	100	229	2	9353.33	49.75	74.00	-24.25	41.20	8.55	Peak	100	229	3	14030.00	40.28	68.20	-27.92	31.11	9.17	Average	143	250	4	14030.00	52.05	88.20	-36.15	42.88	9.17	Peak	143	250
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9353.33	35.69	54.00	-18.31	27.14	8.55	Average	100	229																																												
2	9353.33	49.75	74.00	-24.25	41.20	8.55	Peak	100	229																																												
3	14030.00	40.28	68.20	-27.92	31.11	9.17	Average	143	250																																												
4	14030.00	52.05	88.20	-36.15	42.88	9.17	Peak	143	250																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	7095																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9460.00</td><td>36.30</td><td>54.00</td><td>-17.70</td><td>27.61</td><td>8.69</td><td>Average</td><td>100</td><td>270</td></tr><tr><td>2</td><td>9460.00</td><td>49.59</td><td>74.00</td><td>-24.41</td><td>40.90</td><td>8.69</td><td>Peak</td><td>100</td><td>270</td></tr><tr><td>3</td><td>14190.00</td><td>43.20</td><td>68.20</td><td>-25.00</td><td>33.89</td><td>9.31</td><td>Average</td><td>240</td><td>286</td></tr><tr><td>4</td><td>14190.00</td><td>52.60</td><td>88.20</td><td>-35.60</td><td>43.29</td><td>9.31</td><td>Peak</td><td>240</td><td>286</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9460.00	36.30	54.00	-17.70	27.61	8.69	Average	100	270	2	9460.00	49.59	74.00	-24.41	40.90	8.69	Peak	100	270	3	14190.00	43.20	68.20	-25.00	33.89	9.31	Average	240	286	4	14190.00	52.60	88.20	-35.60	43.29	9.31	Peak	240	286
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9460.00	36.30	54.00	-17.70	27.61	8.69	Average	100	270																																												
2	9460.00	49.59	74.00	-24.41	40.90	8.69	Peak	100	270																																												
3	14190.00	43.20	68.20	-25.00	33.89	9.31	Average	240	286																																												
4	14190.00	52.60	88.20	-35.60	43.29	9.31	Peak	240	286																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	11a	Test Freq. (MHz)	7095																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9460.00</td><td>36.35</td><td>54.00</td><td>-17.65</td><td>27.66</td><td>8.69</td><td>Average</td><td>100</td><td>150</td></tr><tr><td>2</td><td>9460.00</td><td>50.26</td><td>74.00</td><td>-23.74</td><td>41.57</td><td>8.69</td><td>Peak</td><td>100</td><td>150</td></tr><tr><td>3</td><td>14190.00</td><td>40.41</td><td>68.20</td><td>-27.79</td><td>31.10</td><td>9.31</td><td>Average</td><td>144</td><td>235</td></tr><tr><td>4</td><td>14190.00</td><td>52.00</td><td>88.20</td><td>-36.20</td><td>42.69</td><td>9.31</td><td>Peak</td><td>144</td><td>235</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9460.00	36.35	54.00	-17.65	27.66	8.69	Average	100	150	2	9460.00	50.26	74.00	-23.74	41.57	8.69	Peak	100	150	3	14190.00	40.41	68.20	-27.79	31.10	9.31	Average	144	235	4	14190.00	52.00	88.20	-36.20	42.69	9.31	Peak	144	235
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9460.00	36.35	54.00	-17.65	27.66	8.69	Average	100	150																																												
2	9460.00	50.26	74.00	-23.74	41.57	8.69	Peak	100	150																																												
3	14190.00	40.41	68.20	-27.79	31.10	9.31	Average	144	235																																												
4	14190.00	52.00	88.20	-36.20	42.69	9.31	Peak	144	235																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	7115																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9486.66</td><td>36.32</td><td>54.00</td><td>-17.68</td><td>27.74</td><td>8.58</td><td>Average</td><td>100</td><td>266</td></tr><tr><td>2</td><td>9486.66</td><td>49.62</td><td>74.00</td><td>-24.38</td><td>41.04</td><td>8.58</td><td>Peak</td><td>100</td><td>266</td></tr><tr><td>3</td><td>14230.00</td><td>43.57</td><td>68.20</td><td>-24.63</td><td>34.17</td><td>9.40</td><td>Average</td><td>249</td><td>305</td></tr><tr><td>4</td><td>14230.00</td><td>53.04</td><td>88.20</td><td>-35.16</td><td>43.64</td><td>9.40</td><td>Peak</td><td>249</td><td>305</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9486.66	36.32	54.00	-17.68	27.74	8.58	Average	100	266	2	9486.66	49.62	74.00	-24.38	41.04	8.58	Peak	100	266	3	14230.00	43.57	68.20	-24.63	34.17	9.40	Average	249	305	4	14230.00	53.04	88.20	-35.16	43.64	9.40	Peak	249	305
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9486.66	36.32	54.00	-17.68	27.74	8.58	Average	100	266																																												
2	9486.66	49.62	74.00	-24.38	41.04	8.58	Peak	100	266																																												
3	14230.00	43.57	68.20	-24.63	34.17	9.40	Average	249	305																																												
4	14230.00	53.04	88.20	-35.16	43.64	9.40	Peak	249	305																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	11a	Test Freq. (MHz)	7115																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9486.66</td><td>36.29</td><td>54.00</td><td>-17.71</td><td>27.71</td><td>8.58</td><td>Average</td><td>100</td><td>167</td></tr><tr><td>2</td><td>9486.66</td><td>50.33</td><td>74.00</td><td>-23.67</td><td>41.75</td><td>8.58</td><td>Peak</td><td>100</td><td>167</td></tr><tr><td>3</td><td>14230.00</td><td>40.63</td><td>68.20</td><td>-27.57</td><td>31.23</td><td>9.40</td><td>Average</td><td>132</td><td>267</td></tr><tr><td>4</td><td>14230.00</td><td>52.50</td><td>88.20</td><td>-35.70</td><td>43.10</td><td>9.40</td><td>Peak</td><td>132</td><td>267</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9486.66	36.29	54.00	-17.71	27.71	8.58	Average	100	167	2	9486.66	50.33	74.00	-23.67	41.75	8.58	Peak	100	167	3	14230.00	40.63	68.20	-27.57	31.23	9.40	Average	132	267	4	14230.00	52.50	88.20	-35.70	43.10	9.40	Peak	132	267
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9486.66	36.29	54.00	-17.71	27.71	8.58	Average	100	167																																												
2	9486.66	50.33	74.00	-23.67	41.75	8.58	Peak	100	167																																												
3	14230.00	40.63	68.20	-27.57	31.23	9.40	Average	132	267																																												
4	14230.00	52.50	88.20	-35.70	43.10	9.40	Peak	132	267																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5955																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7940.00</td><td>36.87</td><td>68.20</td><td>-31.33</td><td>30.01</td><td>6.86</td><td>Average</td><td>100</td><td>216</td></tr><tr><td>2</td><td>7940.00</td><td>50.33</td><td>88.20</td><td>-37.87</td><td>43.47</td><td>6.86</td><td>Peak</td><td>100</td><td>216</td></tr><tr><td>3</td><td>11910.00</td><td>40.10</td><td>54.00</td><td>-13.90</td><td>31.69</td><td>8.41</td><td>Average</td><td>128</td><td>227</td></tr><tr><td>4</td><td>11910.00</td><td>50.76</td><td>74.00</td><td>-23.24</td><td>42.35</td><td>8.41</td><td>Peak</td><td>128</td><td>227</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7940.00	36.87	68.20	-31.33	30.01	6.86	Average	100	216	2	7940.00	50.33	88.20	-37.87	43.47	6.86	Peak	100	216	3	11910.00	40.10	54.00	-13.90	31.69	8.41	Average	128	227	4	11910.00	50.76	74.00	-23.24	42.35	8.41	Peak	128	227
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7940.00	36.87	68.20	-31.33	30.01	6.86	Average	100	216																																												
2	7940.00	50.33	88.20	-37.87	43.47	6.86	Peak	100	216																																												
3	11910.00	40.10	54.00	-13.90	31.69	8.41	Average	128	227																																												
4	11910.00	50.76	74.00	-23.24	42.35	8.41	Peak	128	227																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5955																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7940.00</td><td>36.68</td><td>68.20</td><td>-31.52</td><td>29.82</td><td>6.86</td><td>Average</td><td>100</td><td>308</td></tr><tr><td>2</td><td>7940.00</td><td>50.18</td><td>88.20</td><td>-38.02</td><td>43.32</td><td>6.86</td><td>Peak</td><td>100</td><td>308</td></tr><tr><td>3</td><td>11910.00</td><td>36.86</td><td>54.00</td><td>-17.14</td><td>28.45</td><td>8.41</td><td>Average</td><td>170</td><td>243</td></tr><tr><td>4</td><td>11910.00</td><td>49.47</td><td>74.00</td><td>-24.53</td><td>41.06</td><td>8.41</td><td>Peak</td><td>170</td><td>243</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7940.00	36.68	68.20	-31.52	29.82	6.86	Average	100	308	2	7940.00	50.18	88.20	-38.02	43.32	6.86	Peak	100	308	3	11910.00	36.86	54.00	-17.14	28.45	8.41	Average	170	243	4	11910.00	49.47	74.00	-24.53	41.06	8.41	Peak	170	243
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7940.00	36.68	68.20	-31.52	29.82	6.86	Average	100	308																																												
2	7940.00	50.18	88.20	-38.02	43.32	6.86	Peak	100	308																																												
3	11910.00	36.86	54.00	-17.14	28.45	8.41	Average	170	243																																												
4	11910.00	49.47	74.00	-24.53	41.06	8.41	Peak	170	243																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6175																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8233.33</td><td>37.64</td><td>54.00</td><td>-16.36</td><td>30.81</td><td>6.83</td><td>Average</td><td>100</td><td>235</td></tr><tr><td>2</td><td>8233.33</td><td>50.39</td><td>74.00</td><td>-23.61</td><td>43.56</td><td>6.83</td><td>Peak</td><td>100</td><td>235</td></tr><tr><td>3</td><td>12350.00</td><td>40.24</td><td>54.00</td><td>-13.76</td><td>31.74</td><td>8.50</td><td>Average</td><td>131</td><td>244</td></tr><tr><td>4</td><td>12350.00</td><td>50.92</td><td>74.00</td><td>-23.08</td><td>42.42</td><td>8.50</td><td>Peak</td><td>131</td><td>244</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8233.33	37.64	54.00	-16.36	30.81	6.83	Average	100	235	2	8233.33	50.39	74.00	-23.61	43.56	6.83	Peak	100	235	3	12350.00	40.24	54.00	-13.76	31.74	8.50	Average	131	244	4	12350.00	50.92	74.00	-23.08	42.42	8.50	Peak	131	244
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8233.33	37.64	54.00	-16.36	30.81	6.83	Average	100	235																																												
2	8233.33	50.39	74.00	-23.61	43.56	6.83	Peak	100	235																																												
3	12350.00	40.24	54.00	-13.76	31.74	8.50	Average	131	244																																												
4	12350.00	50.92	74.00	-23.08	42.42	8.50	Peak	131	244																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6175																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8233.33</td><td>36.76</td><td>54.00</td><td>-17.24</td><td>29.93</td><td>6.83</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>2</td><td>8233.33</td><td>50.29</td><td>74.00</td><td>-23.71</td><td>43.46</td><td>6.83</td><td>Peak</td><td>100</td><td>311</td></tr><tr><td>3</td><td>12350.00</td><td>37.13</td><td>54.00</td><td>-16.87</td><td>28.63</td><td>8.50</td><td>Average</td><td>164</td><td>259</td></tr><tr><td>4</td><td>12350.00</td><td>49.74</td><td>74.00</td><td>-24.26</td><td>41.24</td><td>8.50</td><td>Peak</td><td>164</td><td>259</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8233.33	36.76	54.00	-17.24	29.93	6.83	Average	100	311	2	8233.33	50.29	74.00	-23.71	43.46	6.83	Peak	100	311	3	12350.00	37.13	54.00	-16.87	28.63	8.50	Average	164	259	4	12350.00	49.74	74.00	-24.26	41.24	8.50	Peak	164	259
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8233.33	36.76	54.00	-17.24	29.93	6.83	Average	100	311																																												
2	8233.33	50.29	74.00	-23.71	43.46	6.83	Peak	100	311																																												
3	12350.00	37.13	54.00	-16.87	28.63	8.50	Average	164	259																																												
4	12350.00	49.74	74.00	-24.26	41.24	8.50	Peak	164	259																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					




Unwanted Emissions

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6415																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8553.33</td><td>37.84</td><td>68.20</td><td>-30.36</td><td>30.67</td><td>7.17</td><td>Average</td><td>100</td><td>207</td></tr><tr><td>2</td><td>8553.33</td><td>50.68</td><td>88.20</td><td>-37.52</td><td>43.51</td><td>7.17</td><td>Peak</td><td>100</td><td>207</td></tr><tr><td>3</td><td>12830.00</td><td>40.35</td><td>68.20</td><td>-27.85</td><td>31.59</td><td>8.76</td><td>Average</td><td>133</td><td>243</td></tr><tr><td>4</td><td>12830.00</td><td>51.23</td><td>88.20</td><td>-36.97</td><td>42.47</td><td>8.76</td><td>Peak</td><td>133</td><td>243</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8553.33	37.84	68.20	-30.36	30.67	7.17	Average	100	207	2	8553.33	50.68	88.20	-37.52	43.51	7.17	Peak	100	207	3	12830.00	40.35	68.20	-27.85	31.59	8.76	Average	133	243	4	12830.00	51.23	88.20	-36.97	42.47	8.76	Peak	133	243
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8553.33	37.84	68.20	-30.36	30.67	7.17	Average	100	207																																												
2	8553.33	50.68	88.20	-37.52	43.51	7.17	Peak	100	207																																												
3	12830.00	40.35	68.20	-27.85	31.59	8.76	Average	133	243																																												
4	12830.00	51.23	88.20	-36.97	42.47	8.76	Peak	133	243																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					

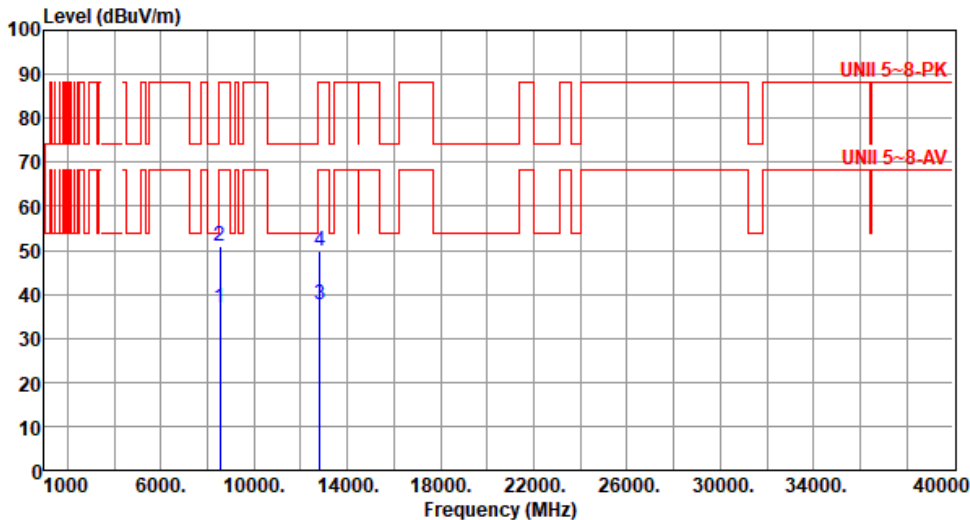


Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6415																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8553.33</td><td>36.91</td><td>68.20</td><td>-31.29</td><td>29.74</td><td>7.17</td><td>Average</td><td>100</td><td>312</td></tr><tr><td>2</td><td>8553.33</td><td>50.79</td><td>88.20</td><td>-37.41</td><td>43.62</td><td>7.17</td><td>Peak</td><td>100</td><td>312</td></tr><tr><td>3</td><td>12830.00</td><td>37.48</td><td>68.20</td><td>-30.72</td><td>28.72</td><td>8.76</td><td>Average</td><td>167</td><td>254</td></tr><tr><td>4</td><td>12830.00</td><td>49.98</td><td>88.20</td><td>-38.22</td><td>41.22</td><td>8.76</td><td>Peak</td><td>167</td><td>254</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8553.33	36.91	68.20	-31.29	29.74	7.17	Average	100	312	2	8553.33	50.79	88.20	-37.41	43.62	7.17	Peak	100	312	3	12830.00	37.48	68.20	-30.72	28.72	8.76	Average	167	254	4	12830.00	49.98	88.20	-38.22	41.22	8.76	Peak	167	254
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8553.33	36.91	68.20	-31.29	29.74	7.17	Average	100	312																																												
2	8553.33	50.79	88.20	-37.41	43.62	7.17	Peak	100	312																																												
3	12830.00	37.48	68.20	-30.72	28.72	8.76	Average	167	254																																												
4	12830.00	49.98	88.20	-38.22	41.22	8.76	Peak	167	254																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6435																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8580.00</td><td>35.00</td><td>68.20</td><td>-33.20</td><td>27.74</td><td>7.26</td><td>Average</td><td>100</td><td>291</td></tr><tr><td>2</td><td>8580.00</td><td>47.61</td><td>88.20</td><td>-40.59</td><td>40.35</td><td>7.26</td><td>Peak</td><td>100</td><td>291</td></tr><tr><td>3</td><td>12870.00</td><td>43.58</td><td>68.20</td><td>-24.62</td><td>34.80</td><td>8.78</td><td>Average</td><td>230</td><td>303</td></tr><tr><td>4</td><td>12870.00</td><td>53.31</td><td>88.20</td><td>-34.89</td><td>44.53</td><td>8.78</td><td>Peak</td><td>230</td><td>303</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8580.00	35.00	68.20	-33.20	27.74	7.26	Average	100	291	2	8580.00	47.61	88.20	-40.59	40.35	7.26	Peak	100	291	3	12870.00	43.58	68.20	-24.62	34.80	8.78	Average	230	303	4	12870.00	53.31	88.20	-34.89	44.53	8.78	Peak	230	303
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8580.00	35.00	68.20	-33.20	27.74	7.26	Average	100	291																																												
2	8580.00	47.61	88.20	-40.59	40.35	7.26	Peak	100	291																																												
3	12870.00	43.58	68.20	-24.62	34.80	8.78	Average	230	303																																												
4	12870.00	53.31	88.20	-34.89	44.53	8.78	Peak	230	303																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

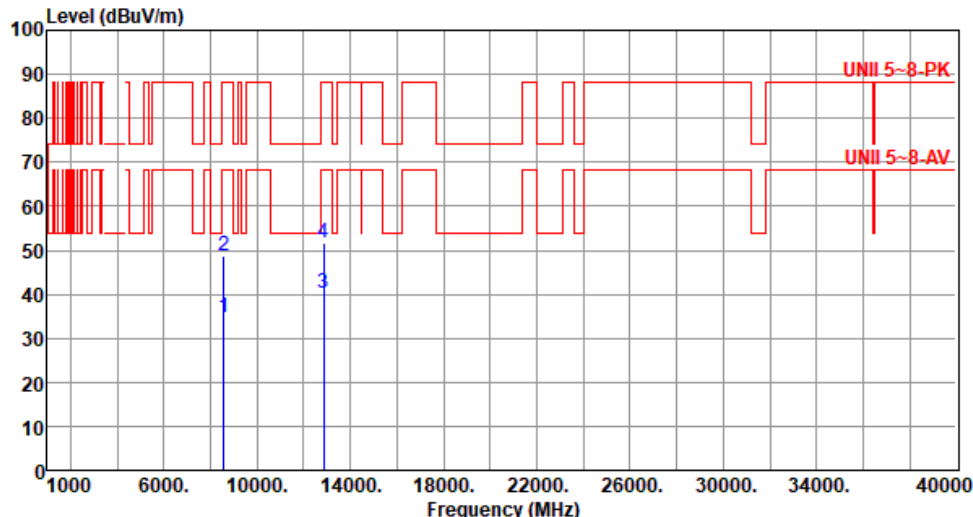

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6435																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8580.00</td><td>34.64</td><td>68.20</td><td>-33.56</td><td>27.38</td><td>7.26</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>8580.00</td><td>48.88</td><td>88.20</td><td>-39.32</td><td>41.62</td><td>7.26</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>12870.00</td><td>40.20</td><td>68.20</td><td>-28.00</td><td>31.42</td><td>8.78</td><td>Average</td><td>151</td><td>284</td></tr><tr><td>4</td><td>12870.00</td><td>51.77</td><td>88.20</td><td>-36.43</td><td>42.99</td><td>8.78</td><td>Peak</td><td>151</td><td>284</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8580.00	34.64	68.20	-33.56	27.38	7.26	Average	100	253	2	8580.00	48.88	88.20	-39.32	41.62	7.26	Peak	100	253	3	12870.00	40.20	68.20	-28.00	31.42	8.78	Average	151	284	4	12870.00	51.77	88.20	-36.43	42.99	8.78	Peak	151	284
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8580.00	34.64	68.20	-33.56	27.38	7.26	Average	100	253																																												
2	8580.00	48.88	88.20	-39.32	41.62	7.26	Peak	100	253																																												
3	12870.00	40.20	68.20	-28.00	31.42	8.78	Average	151	284																																												
4	12870.00	51.77	88.20	-36.43	42.99	8.78	Peak	151	284																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6475																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8633.33</td><td>35.23</td><td>68.20</td><td>-32.97</td><td>27.87</td><td>7.36</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>2</td><td>8633.33</td><td>47.75</td><td>88.20</td><td>-40.45</td><td>40.39</td><td>7.36</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>3</td><td>12950.00</td><td>43.40</td><td>68.20</td><td>-24.80</td><td>34.71</td><td>8.69</td><td>Average</td><td>233</td><td>291</td></tr><tr><td>4</td><td>12950.00</td><td>53.17</td><td>88.20</td><td>-35.03</td><td>44.48</td><td>8.69</td><td>Peak</td><td>233</td><td>291</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8633.33	35.23	68.20	-32.97	27.87	7.36	Average	100	286	2	8633.33	47.75	88.20	-40.45	40.39	7.36	Peak	100	286	3	12950.00	43.40	68.20	-24.80	34.71	8.69	Average	233	291	4	12950.00	53.17	88.20	-35.03	44.48	8.69	Peak	233	291
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8633.33	35.23	68.20	-32.97	27.87	7.36	Average	100	286																																												
2	8633.33	47.75	88.20	-40.45	40.39	7.36	Peak	100	286																																												
3	12950.00	43.40	68.20	-24.80	34.71	8.69	Average	233	291																																												
4	12950.00	53.17	88.20	-35.03	44.48	8.69	Peak	233	291																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					





Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6475																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8633.33</td><td>34.97</td><td>68.20</td><td>-33.23</td><td>27.61</td><td>7.36</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>8633.33</td><td>49.12</td><td>88.20</td><td>-39.08</td><td>41.76</td><td>7.36</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>12950.00</td><td>40.20</td><td>68.20</td><td>-28.00</td><td>31.51</td><td>8.69</td><td>Average</td><td>148</td><td>294</td></tr><tr><td>4</td><td>12950.00</td><td>51.52</td><td>88.20</td><td>-36.68</td><td>42.83</td><td>8.69</td><td>Peak</td><td>148</td><td>294</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8633.33	34.97	68.20	-33.23	27.61	7.36	Average	100	245	2	8633.33	49.12	88.20	-39.08	41.76	7.36	Peak	100	245	3	12950.00	40.20	68.20	-28.00	31.51	8.69	Average	148	294	4	12950.00	51.52	88.20	-36.68	42.83	8.69	Peak	148	294
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8633.33	34.97	68.20	-33.23	27.61	7.36	Average	100	245																																												
2	8633.33	49.12	88.20	-39.08	41.76	7.36	Peak	100	245																																												
3	12950.00	40.20	68.20	-28.00	31.51	8.69	Average	148	294																																												
4	12950.00	51.52	88.20	-36.68	42.83	8.69	Peak	148	294																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6515																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8686.66</td><td>35.02</td><td>68.20</td><td>-33.18</td><td>27.62</td><td>7.40</td><td>Average</td><td>100</td><td>283</td></tr><tr><td>2</td><td>8686.66</td><td>47.84</td><td>88.20</td><td>-40.36</td><td>40.44</td><td>7.40</td><td>Peak</td><td>100</td><td>283</td></tr><tr><td>3</td><td>13030.00</td><td>43.55</td><td>68.20</td><td>-24.65</td><td>34.78</td><td>8.77</td><td>Average</td><td>225</td><td>310</td></tr><tr><td>4</td><td>13030.00</td><td>53.10</td><td>88.20</td><td>-35.10</td><td>44.33</td><td>8.77</td><td>Peak</td><td>225</td><td>310</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8686.66	35.02	68.20	-33.18	27.62	7.40	Average	100	283	2	8686.66	47.84	88.20	-40.36	40.44	7.40	Peak	100	283	3	13030.00	43.55	68.20	-24.65	34.78	8.77	Average	225	310	4	13030.00	53.10	88.20	-35.10	44.33	8.77	Peak	225	310
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8686.66	35.02	68.20	-33.18	27.62	7.40	Average	100	283																																												
2	8686.66	47.84	88.20	-40.36	40.44	7.40	Peak	100	283																																												
3	13030.00	43.55	68.20	-24.65	34.78	8.77	Average	225	310																																												
4	13030.00	53.10	88.20	-35.10	44.33	8.77	Peak	225	310																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					

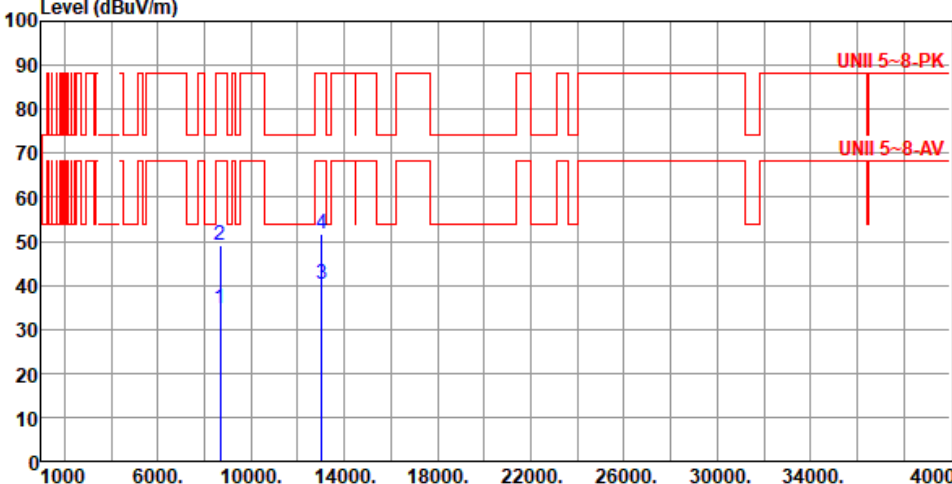

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6515																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8686.66</td><td>34.68</td><td>68.20</td><td>-33.52</td><td>27.28</td><td>7.40</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>8686.66</td><td>48.95</td><td>88.20</td><td>-39.25</td><td>41.55</td><td>7.40</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>13030.00</td><td>40.33</td><td>68.20</td><td>-27.87</td><td>31.56</td><td>8.77</td><td>Average</td><td>147</td><td>274</td></tr><tr><td>4</td><td>13030.00</td><td>51.59</td><td>88.20</td><td>-36.61</td><td>42.82</td><td>8.77</td><td>Peak</td><td>147</td><td>274</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8686.66	34.68	68.20	-33.52	27.28	7.40	Average	100	244	2	8686.66	48.95	88.20	-39.25	41.55	7.40	Peak	100	244	3	13030.00	40.33	68.20	-27.87	31.56	8.77	Average	147	274	4	13030.00	51.59	88.20	-36.61	42.82	8.77	Peak	147	274
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8686.66	34.68	68.20	-33.52	27.28	7.40	Average	100	244																																												
2	8686.66	48.95	88.20	-39.25	41.55	7.40	Peak	100	244																																												
3	13030.00	40.33	68.20	-27.87	31.56	8.77	Average	147	274																																												
4	13030.00	51.59	88.20	-36.61	42.82	8.77	Peak	147	274																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

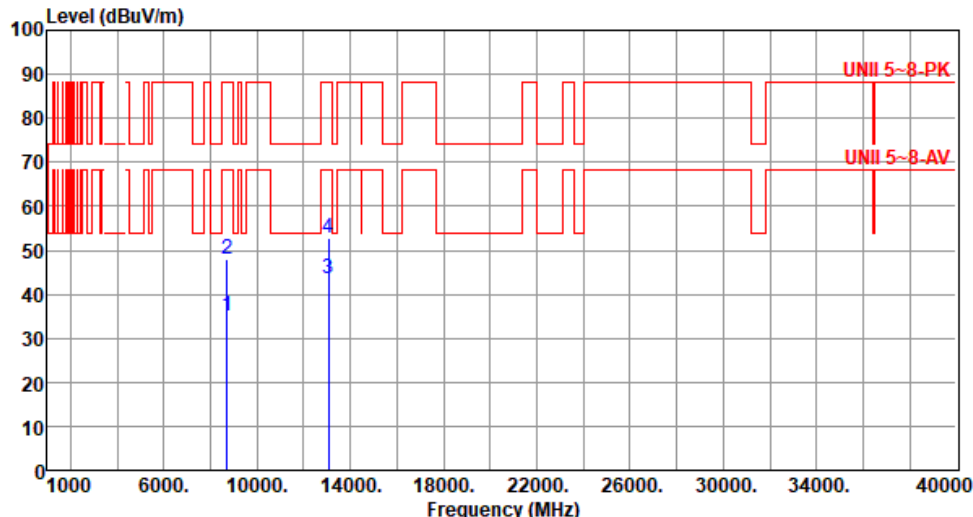Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6535																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8713.33</td><td>35.02</td><td>68.20</td><td>-33.18</td><td>27.57</td><td>7.45</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>8713.33</td><td>48.02</td><td>88.20</td><td>-40.18</td><td>40.57</td><td>7.45</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>13070.00</td><td>43.40</td><td>68.20</td><td>-24.80</td><td>34.81</td><td>8.59</td><td>Average</td><td>216</td><td>322</td></tr><tr><td>4</td><td>13070.00</td><td>52.90</td><td>88.20</td><td>-35.30</td><td>44.31</td><td>8.59</td><td>Peak</td><td>216</td><td>322</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8713.33	35.02	68.20	-33.18	27.57	7.45	Average	100	279	2	8713.33	48.02	88.20	-40.18	40.57	7.45	Peak	100	279	3	13070.00	43.40	68.20	-24.80	34.81	8.59	Average	216	322	4	13070.00	52.90	88.20	-35.30	44.31	8.59	Peak	216	322
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8713.33	35.02	68.20	-33.18	27.57	7.45	Average	100	279																																												
2	8713.33	48.02	88.20	-40.18	40.57	7.45	Peak	100	279																																												
3	13070.00	43.40	68.20	-24.80	34.81	8.59	Average	216	322																																												
4	13070.00	52.90	88.20	-35.30	44.31	8.59	Peak	216	322																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6535																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8713.33</td><td>34.89</td><td>68.20</td><td>-33.31</td><td>27.44</td><td>7.45</td><td>Average</td><td>100</td><td>256</td></tr><tr><td>2</td><td>8713.33</td><td>49.00</td><td>88.20</td><td>-39.20</td><td>41.55</td><td>7.45</td><td>Peak</td><td>100</td><td>256</td></tr><tr><td>3</td><td>13070.00</td><td>40.27</td><td>68.20</td><td>-27.93</td><td>31.68</td><td>8.59</td><td>Average</td><td>150</td><td>264</td></tr><tr><td>4</td><td>13070.00</td><td>51.34</td><td>88.20</td><td>-36.86</td><td>42.75</td><td>8.59</td><td>Peak</td><td>150</td><td>264</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8713.33	34.89	68.20	-33.31	27.44	7.45	Average	100	256	2	8713.33	49.00	88.20	-39.20	41.55	7.45	Peak	100	256	3	13070.00	40.27	68.20	-27.93	31.68	8.59	Average	150	264	4	13070.00	51.34	88.20	-36.86	42.75	8.59	Peak	150	264
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8713.33	34.89	68.20	-33.31	27.44	7.45	Average	100	256																																												
2	8713.33	49.00	88.20	-39.20	41.55	7.45	Peak	100	256																																												
3	13070.00	40.27	68.20	-27.93	31.68	8.59	Average	150	264																																												
4	13070.00	51.34	88.20	-36.86	42.75	8.59	Peak	150	264																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6715																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8953.33</td><td>35.19</td><td>68.20</td><td>-33.01</td><td>27.77</td><td>7.42</td><td>Average</td><td>100</td><td>291</td></tr><tr><td>2</td><td>8953.33</td><td>48.04</td><td>88.20</td><td>-40.16</td><td>40.62</td><td>7.42</td><td>Peak</td><td>100</td><td>291</td></tr><tr><td>3</td><td>13430.00</td><td>43.19</td><td>68.20</td><td>-25.01</td><td>34.69</td><td>8.50</td><td>Average</td><td>231</td><td>300</td></tr><tr><td>4</td><td>13430.00</td><td>53.02</td><td>88.20</td><td>-35.18</td><td>44.52</td><td>8.50</td><td>Peak</td><td>231</td><td>300</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8953.33	35.19	68.20	-33.01	27.77	7.42	Average	100	291	2	8953.33	48.04	88.20	-40.16	40.62	7.42	Peak	100	291	3	13430.00	43.19	68.20	-25.01	34.69	8.50	Average	231	300	4	13430.00	53.02	88.20	-35.18	44.52	8.50	Peak	231	300
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8953.33	35.19	68.20	-33.01	27.77	7.42	Average	100	291																																												
2	8953.33	48.04	88.20	-40.16	40.62	7.42	Peak	100	291																																												
3	13430.00	43.19	68.20	-25.01	34.69	8.50	Average	231	300																																												
4	13430.00	53.02	88.20	-35.18	44.52	8.50	Peak	231	300																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

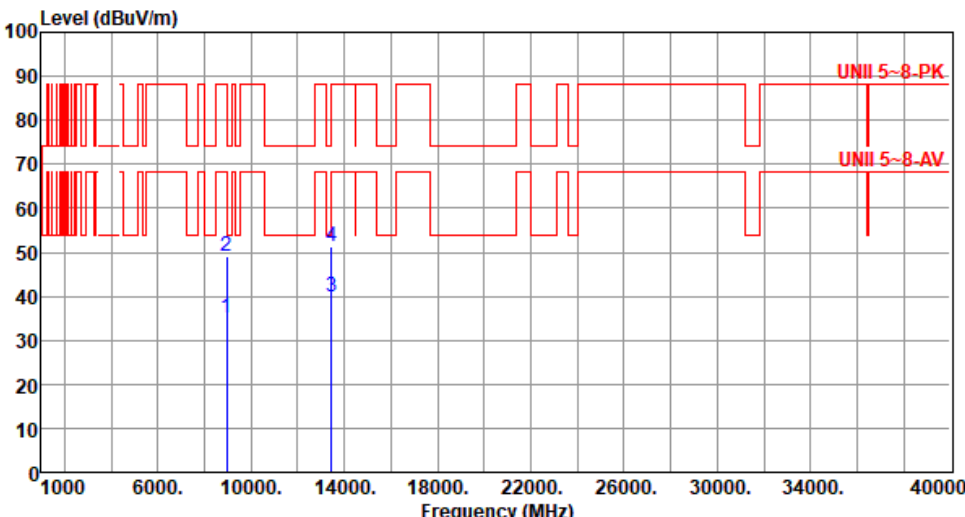

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6715																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8953.33</td><td>34.96</td><td>68.20</td><td>-33.24</td><td>27.54</td><td>7.42</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>8953.33</td><td>49.01</td><td>88.20</td><td>-39.19</td><td>41.59</td><td>7.42</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>13430.00</td><td>39.92</td><td>68.20</td><td>-28.28</td><td>31.42</td><td>8.50</td><td>Average</td><td>153</td><td>268</td></tr><tr><td>4</td><td>13430.00</td><td>51.35</td><td>88.20</td><td>-36.85</td><td>42.85</td><td>8.50</td><td>Peak</td><td>153</td><td>268</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8953.33	34.96	68.20	-33.24	27.54	7.42	Average	100	253	2	8953.33	49.01	88.20	-39.19	41.59	7.42	Peak	100	253	3	13430.00	39.92	68.20	-28.28	31.42	8.50	Average	153	268	4	13430.00	51.35	88.20	-36.85	42.85	8.50	Peak	153	268
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8953.33	34.96	68.20	-33.24	27.54	7.42	Average	100	253																																												
2	8953.33	49.01	88.20	-39.19	41.59	7.42	Peak	100	253																																												
3	13430.00	39.92	68.20	-28.28	31.42	8.50	Average	153	268																																												
4	13430.00	51.35	88.20	-36.85	42.85	8.50	Peak	153	268																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6855																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9140.00</td><td>35.75</td><td>54.00</td><td>-18.25</td><td>27.82</td><td>7.93</td><td>Average</td><td>100</td><td>301</td></tr><tr><td>2</td><td>9140.00</td><td>48.41</td><td>74.00</td><td>-25.59</td><td>40.48</td><td>7.93</td><td>Peak</td><td>100</td><td>301</td></tr><tr><td>3</td><td>13710.00</td><td>43.30</td><td>68.20</td><td>-24.90</td><td>34.78</td><td>8.52</td><td>Average</td><td>226</td><td>284</td></tr><tr><td>4</td><td>13710.00</td><td>53.00</td><td>88.20</td><td>-35.20</td><td>44.48</td><td>8.52</td><td>Peak</td><td>226</td><td>284</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9140.00	35.75	54.00	-18.25	27.82	7.93	Average	100	301	2	9140.00	48.41	74.00	-25.59	40.48	7.93	Peak	100	301	3	13710.00	43.30	68.20	-24.90	34.78	8.52	Average	226	284	4	13710.00	53.00	88.20	-35.20	44.48	8.52	Peak	226	284
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9140.00	35.75	54.00	-18.25	27.82	7.93	Average	100	301																																												
2	9140.00	48.41	74.00	-25.59	40.48	7.93	Peak	100	301																																												
3	13710.00	43.30	68.20	-24.90	34.78	8.52	Average	226	284																																												
4	13710.00	53.00	88.20	-35.20	44.48	8.52	Peak	226	284																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6855
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			



Unwanted Emissions

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6875
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6875																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9166.66</td><td>35.22</td><td>54.00</td><td>-18.78</td><td>27.23</td><td>7.99</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>2</td><td>9166.66</td><td>49.51</td><td>74.00</td><td>-24.49</td><td>41.52</td><td>7.99</td><td>Peak</td><td>100</td><td>241</td></tr><tr><td>3</td><td>13750.00</td><td>40.05</td><td>68.20</td><td>-28.15</td><td>31.55</td><td>8.50</td><td>Average</td><td>143</td><td>251</td></tr><tr><td>4</td><td>13750.00</td><td>51.31</td><td>88.20</td><td>-36.89</td><td>42.81</td><td>8.50</td><td>Peak</td><td>143</td><td>251</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9166.66	35.22	54.00	-18.78	27.23	7.99	Average	100	241	2	9166.66	49.51	74.00	-24.49	41.52	7.99	Peak	100	241	3	13750.00	40.05	68.20	-28.15	31.55	8.50	Average	143	251	4	13750.00	51.31	88.20	-36.89	42.81	8.50	Peak	143	251
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9166.66	35.22	54.00	-18.78	27.23	7.99	Average	100	241																																												
2	9166.66	49.51	74.00	-24.49	41.52	7.99	Peak	100	241																																												
3	13750.00	40.05	68.20	-28.15	31.55	8.50	Average	143	251																																												
4	13750.00	51.31	88.20	-36.89	42.81	8.50	Peak	143	251																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6895																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9193.33</td><td>35.70</td><td>54.00</td><td>-18.30</td><td>27.65</td><td>8.05</td><td>Average</td><td>100</td><td>283</td></tr><tr><td>2</td><td>9193.33</td><td>47.56</td><td>74.00</td><td>-26.44</td><td>39.51</td><td>8.05</td><td>Peak</td><td>100</td><td>283</td></tr><tr><td>3</td><td>13790.00</td><td>43.39</td><td>68.20</td><td>-24.81</td><td>34.75</td><td>8.64</td><td>Average</td><td>229</td><td>296</td></tr><tr><td>4</td><td>13790.00</td><td>53.06</td><td>88.20</td><td>-35.14</td><td>44.42</td><td>8.64</td><td>Peak</td><td>229</td><td>296</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9193.33	35.70	54.00	-18.30	27.65	8.05	Average	100	283	2	9193.33	47.56	74.00	-26.44	39.51	8.05	Peak	100	283	3	13790.00	43.39	68.20	-24.81	34.75	8.64	Average	229	296	4	13790.00	53.06	88.20	-35.14	44.42	8.64	Peak	229	296
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9193.33	35.70	54.00	-18.30	27.65	8.05	Average	100	283																																												
2	9193.33	47.56	74.00	-26.44	39.51	8.05	Peak	100	283																																												
3	13790.00	43.39	68.20	-24.81	34.75	8.64	Average	229	296																																												
4	13790.00	53.06	88.20	-35.14	44.42	8.64	Peak	229	296																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	6895																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9193.33</td><td>35.46</td><td>54.00</td><td>-18.54</td><td>27.41</td><td>8.05</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>2</td><td>9193.33</td><td>49.59</td><td>74.00</td><td>-24.41</td><td>41.54</td><td>8.05</td><td>Peak</td><td>100</td><td>240</td></tr><tr><td>3</td><td>13790.00</td><td>40.02</td><td>68.20</td><td>-28.18</td><td>31.38</td><td>8.64</td><td>Average</td><td>147</td><td>272</td></tr><tr><td>4</td><td>13790.00</td><td>51.46</td><td>88.20</td><td>-36.74</td><td>42.82</td><td>8.64</td><td>Peak</td><td>147</td><td>272</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9193.33	35.46	54.00	-18.54	27.41	8.05	Average	100	240	2	9193.33	49.59	74.00	-24.41	41.54	8.05	Peak	100	240	3	13790.00	40.02	68.20	-28.18	31.38	8.64	Average	147	272	4	13790.00	51.46	88.20	-36.74	42.82	8.64	Peak	147	272
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9193.33	35.46	54.00	-18.54	27.41	8.05	Average	100	240																																												
2	9193.33	49.59	74.00	-24.41	41.54	8.05	Peak	100	240																																												
3	13790.00	40.02	68.20	-28.18	31.38	8.64	Average	147	272																																												
4	13790.00	51.46	88.20	-36.74	42.82	8.64	Peak	147	272																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	7015
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dB reading dB/m High Table dBuV/m dBuV cm deg 1 9353.33 36.29 54.00 -17.71 27.74 8.55 Average 100 292 2 9353.33 48.93 74.00 -25.07 40.38 8.55 Peak 100 292 3 14030.00 43.80 68.20 -24.40 34.63 9.17 Average 235 302 4 14030.00 53.71 88.20 -34.49 44.54 9.17 Peak 235 302			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	7015																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9353.33</td><td>36.05</td><td>54.00</td><td>-17.95</td><td>27.50</td><td>8.55</td><td>Average</td><td>100</td><td>238</td></tr><tr><td>2</td><td>9353.33</td><td>50.18</td><td>74.00</td><td>-23.82</td><td>41.63</td><td>8.55</td><td>Peak</td><td>100</td><td>238</td></tr><tr><td>3</td><td>14030.00</td><td>40.61</td><td>68.20</td><td>-27.59</td><td>31.44</td><td>9.17</td><td>Average</td><td>152</td><td>283</td></tr><tr><td>4</td><td>14030.00</td><td>52.11</td><td>88.20</td><td>-36.09</td><td>42.94</td><td>9.17</td><td>Peak</td><td>152</td><td>283</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9353.33	36.05	54.00	-17.95	27.50	8.55	Average	100	238	2	9353.33	50.18	74.00	-23.82	41.63	8.55	Peak	100	238	3	14030.00	40.61	68.20	-27.59	31.44	9.17	Average	152	283	4	14030.00	52.11	88.20	-36.09	42.94	9.17	Peak	152	283
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9353.33	36.05	54.00	-17.95	27.50	8.55	Average	100	238																																												
2	9353.33	50.18	74.00	-23.82	41.63	8.55	Peak	100	238																																												
3	14030.00	40.61	68.20	-27.59	31.44	9.17	Average	152	283																																												
4	14030.00	52.11	88.20	-36.09	42.94	9.17	Peak	152	283																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	7095
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			




Modulation	be EHT20_OFDMA	Test Freq. (MHz)	7095																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9460.00</td><td>35.80</td><td>54.00</td><td>-18.20</td><td>27.11</td><td>8.69</td><td>Average</td><td>100</td><td>238</td></tr><tr><td>2</td><td>9460.00</td><td>50.17</td><td>74.00</td><td>-23.83</td><td>41.48</td><td>8.69</td><td>Peak</td><td>100</td><td>238</td></tr><tr><td>3</td><td>14190.00</td><td>40.78</td><td>68.20</td><td>-27.42</td><td>31.47</td><td>9.31</td><td>Average</td><td>132</td><td>264</td></tr><tr><td>4</td><td>14190.00</td><td>52.05</td><td>88.20</td><td>-36.15</td><td>42.74</td><td>9.31</td><td>Peak</td><td>132</td><td>264</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9460.00	35.80	54.00	-18.20	27.11	8.69	Average	100	238	2	9460.00	50.17	74.00	-23.83	41.48	8.69	Peak	100	238	3	14190.00	40.78	68.20	-27.42	31.47	9.31	Average	132	264	4	14190.00	52.05	88.20	-36.15	42.74	9.31	Peak	132	264
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9460.00	35.80	54.00	-18.20	27.11	8.69	Average	100	238																																												
2	9460.00	50.17	74.00	-23.83	41.48	8.69	Peak	100	238																																												
3	14190.00	40.78	68.20	-27.42	31.47	9.31	Average	132	264																																												
4	14190.00	52.05	88.20	-36.15	42.74	9.31	Peak	132	264																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	7115																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9486.66</td><td>35.70</td><td>54.00</td><td>-18.30</td><td>27.12</td><td>8.58</td><td>Average</td><td>100</td><td>236</td></tr><tr><td>2</td><td>9486.66</td><td>49.50</td><td>74.00</td><td>-24.50</td><td>40.92</td><td>8.58</td><td>Peak</td><td>100</td><td>236</td></tr><tr><td>3</td><td>14230.00</td><td>40.25</td><td>68.20</td><td>-27.95</td><td>30.85</td><td>9.40</td><td>Average</td><td>100</td><td>81</td></tr><tr><td>4</td><td>14230.00</td><td>51.93</td><td>88.20</td><td>-36.27</td><td>42.53</td><td>9.40</td><td>Peak</td><td>100</td><td>81</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9486.66	35.70	54.00	-18.30	27.12	8.58	Average	100	236	2	9486.66	49.50	74.00	-24.50	40.92	8.58	Peak	100	236	3	14230.00	40.25	68.20	-27.95	30.85	9.40	Average	100	81	4	14230.00	51.93	88.20	-36.27	42.53	9.40	Peak	100	81
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9486.66	35.70	54.00	-18.30	27.12	8.58	Average	100	236																																												
2	9486.66	49.50	74.00	-24.50	40.92	8.58	Peak	100	236																																												
3	14230.00	40.25	68.20	-27.95	30.85	9.40	Average	100	81																																												
4	14230.00	51.93	88.20	-36.27	42.53	9.40	Peak	100	81																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					

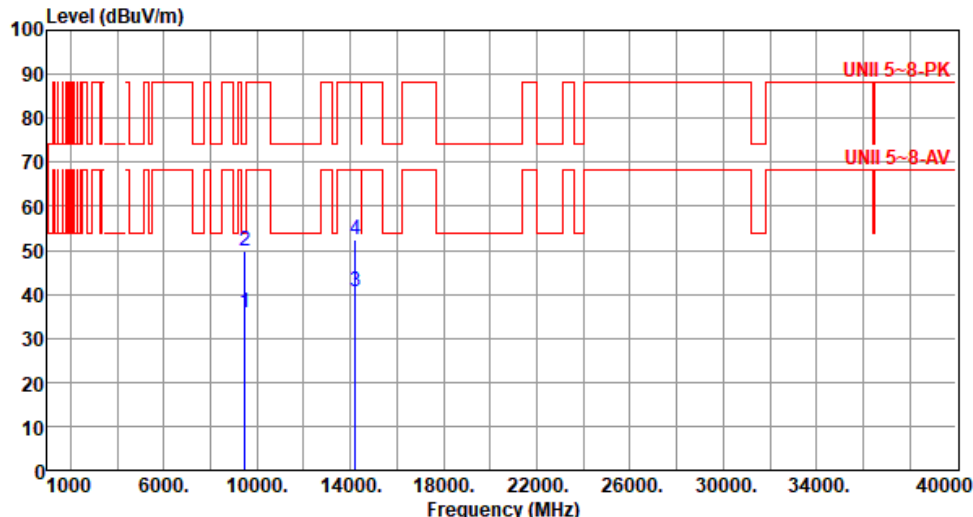


Modulation	be EHT20_OFDMA	Test Freq. (MHz)	7115																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9486.66</td><td>35.69</td><td>54.00</td><td>-18.31</td><td>27.11</td><td>8.58</td><td>Average</td><td>100</td><td>183</td></tr><tr><td>2</td><td>9486.66</td><td>49.67</td><td>74.00</td><td>-24.33</td><td>41.09</td><td>8.58</td><td>Peak</td><td>100</td><td>183</td></tr><tr><td>3</td><td>14230.00</td><td>40.58</td><td>68.20</td><td>-27.62</td><td>31.18</td><td>9.40</td><td>Average</td><td>100</td><td>289</td></tr><tr><td>4</td><td>14230.00</td><td>52.46</td><td>88.20</td><td>-35.74</td><td>43.06</td><td>9.40</td><td>Peak</td><td>100</td><td>289</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9486.66	35.69	54.00	-18.31	27.11	8.58	Average	100	183	2	9486.66	49.67	74.00	-24.33	41.09	8.58	Peak	100	183	3	14230.00	40.58	68.20	-27.62	31.18	9.40	Average	100	289	4	14230.00	52.46	88.20	-35.74	43.06	9.40	Peak	100	289
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9486.66	35.69	54.00	-18.31	27.11	8.58	Average	100	183																																												
2	9486.66	49.67	74.00	-24.33	41.09	8.58	Peak	100	183																																												
3	14230.00	40.58	68.20	-27.62	31.18	9.40	Average	100	289																																												
4	14230.00	52.46	88.20	-35.74	43.06	9.40	Peak	100	289																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5965																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7953.33</td><td>38.23</td><td>68.20</td><td>-29.97</td><td>31.32</td><td>6.91</td><td>Average</td><td>100</td><td>131</td></tr><tr><td>2</td><td>7953.33</td><td>47.42</td><td>88.20</td><td>-40.78</td><td>40.51</td><td>6.91</td><td>Peak</td><td>100</td><td>131</td></tr><tr><td>3</td><td>11930.00</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>30.92</td><td>8.41</td><td>Average</td><td>173</td><td>292</td></tr><tr><td>4</td><td>11930.00</td><td>49.86</td><td>74.00</td><td>-24.14</td><td>41.45</td><td>8.41</td><td>Peak</td><td>173</td><td>292</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7953.33	38.23	68.20	-29.97	31.32	6.91	Average	100	131	2	7953.33	47.42	88.20	-40.78	40.51	6.91	Peak	100	131	3	11930.00	39.33	54.00	-14.67	30.92	8.41	Average	173	292	4	11930.00	49.86	74.00	-24.14	41.45	8.41	Peak	173	292
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7953.33	38.23	68.20	-29.97	31.32	6.91	Average	100	131																																												
2	7953.33	47.42	88.20	-40.78	40.51	6.91	Peak	100	131																																												
3	11930.00	39.33	54.00	-14.67	30.92	8.41	Average	173	292																																												
4	11930.00	49.86	74.00	-24.14	41.45	8.41	Peak	173	292																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

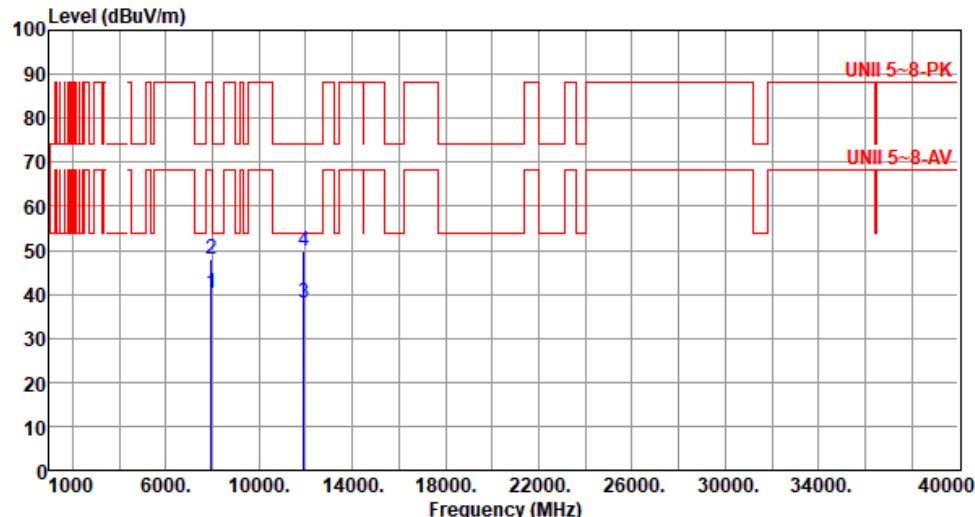


Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5965																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7953.33</td><td>40.05</td><td>68.20</td><td>-28.15</td><td>33.14</td><td>6.91</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>2</td><td>7953.33</td><td>47.82</td><td>88.20</td><td>-40.38</td><td>40.91</td><td>6.91</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>3</td><td>11930.00</td><td>37.96</td><td>54.00</td><td>-16.04</td><td>29.55</td><td>8.41</td><td>Average</td><td>335</td><td>248</td></tr><tr><td>4</td><td>11930.00</td><td>49.92</td><td>74.00</td><td>-24.08</td><td>41.51</td><td>8.41</td><td>Peak</td><td>335</td><td>248</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7953.33	40.05	68.20	-28.15	33.14	6.91	Average	100	30	2	7953.33	47.82	88.20	-40.38	40.91	6.91	Peak	100	30	3	11930.00	37.96	54.00	-16.04	29.55	8.41	Average	335	248	4	11930.00	49.92	74.00	-24.08	41.51	8.41	Peak	335	248
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7953.33	40.05	68.20	-28.15	33.14	6.91	Average	100	30																																												
2	7953.33	47.82	88.20	-40.38	40.91	6.91	Peak	100	30																																												
3	11930.00	37.96	54.00	-16.04	29.55	8.41	Average	335	248																																												
4	11930.00	49.92	74.00	-24.08	41.51	8.41	Peak	335	248																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Unwanted Emissions


Appendix D

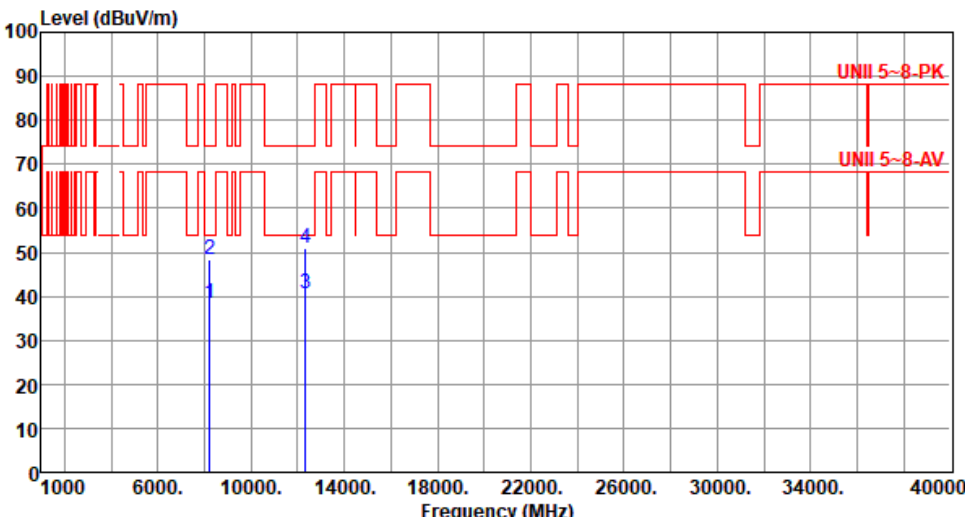Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6165																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8220.00</td><td>38.31</td><td>54.00</td><td>-15.69</td><td>31.45</td><td>6.86</td><td>Average</td><td>100</td><td>144</td></tr><tr><td>2</td><td>8220.00</td><td>48.48</td><td>74.00</td><td>-25.52</td><td>41.62</td><td>6.86</td><td>Peak</td><td>100</td><td>144</td></tr><tr><td>3</td><td>12330.00</td><td>40.47</td><td>54.00</td><td>-13.53</td><td>31.89</td><td>8.58</td><td>Average</td><td>181</td><td>274</td></tr><tr><td>4</td><td>12330.00</td><td>50.97</td><td>74.00</td><td>-23.03</td><td>42.39</td><td>8.58</td><td>Peak</td><td>181</td><td>274</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8220.00	38.31	54.00	-15.69	31.45	6.86	Average	100	144	2	8220.00	48.48	74.00	-25.52	41.62	6.86	Peak	100	144	3	12330.00	40.47	54.00	-13.53	31.89	8.58	Average	181	274	4	12330.00	50.97	74.00	-23.03	42.39	8.58	Peak	181	274
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8220.00	38.31	54.00	-15.69	31.45	6.86	Average	100	144																																												
2	8220.00	48.48	74.00	-25.52	41.62	6.86	Peak	100	144																																												
3	12330.00	40.47	54.00	-13.53	31.89	8.58	Average	181	274																																												
4	12330.00	50.97	74.00	-23.03	42.39	8.58	Peak	181	274																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6165																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8220.00</td><td>41.15</td><td>54.00</td><td>-12.85</td><td>34.29</td><td>6.86</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>2</td><td>8220.00</td><td>48.85</td><td>74.00</td><td>-25.15</td><td>41.99</td><td>6.86</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>3</td><td>12330.00</td><td>39.27</td><td>54.00</td><td>-14.73</td><td>30.69</td><td>8.58</td><td>Average</td><td>345</td><td>252</td></tr><tr><td>4</td><td>12330.00</td><td>51.07</td><td>74.00</td><td>-22.93</td><td>42.49</td><td>8.58</td><td>Peak</td><td>345</td><td>252</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8220.00	41.15	54.00	-12.85	34.29	6.86	Average	100	45	2	8220.00	48.85	74.00	-25.15	41.99	6.86	Peak	100	45	3	12330.00	39.27	54.00	-14.73	30.69	8.58	Average	345	252	4	12330.00	51.07	74.00	-22.93	42.49	8.58	Peak	345	252
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8220.00	41.15	54.00	-12.85	34.29	6.86	Average	100	45																																												
2	8220.00	48.85	74.00	-25.15	41.99	6.86	Peak	100	45																																												
3	12330.00	39.27	54.00	-14.73	30.69	8.58	Average	345	252																																												
4	12330.00	51.07	74.00	-22.93	42.49	8.58	Peak	345	252																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

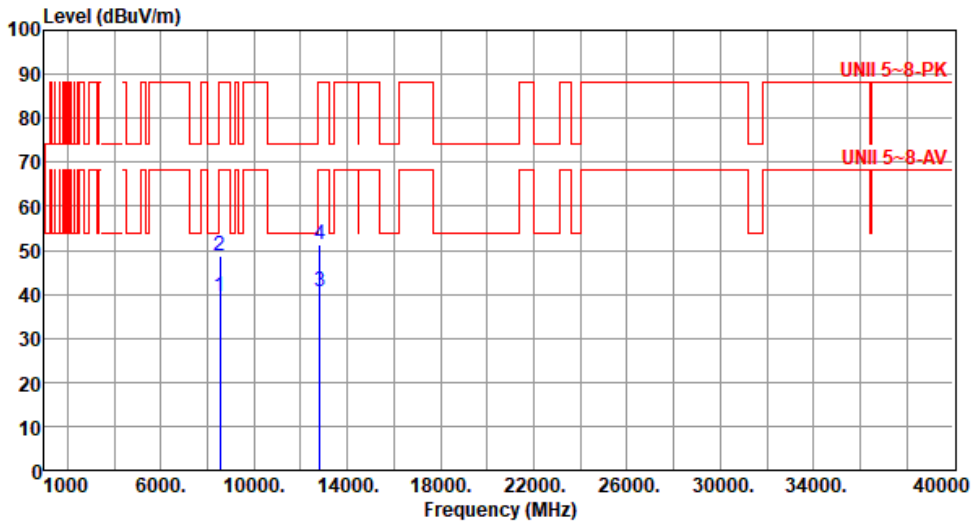

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6405																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8540.00</td><td>39.31</td><td>68.20</td><td>-28.89</td><td>32.21</td><td>7.10</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>2</td><td>8540.00</td><td>48.56</td><td>88.20</td><td>-39.64</td><td>41.46</td><td>7.10</td><td>Peak</td><td>100</td><td>156</td></tr><tr><td>3</td><td>12810.00</td><td>40.54</td><td>68.20</td><td>-27.66</td><td>31.86</td><td>8.68</td><td>Average</td><td>177</td><td>308</td></tr><tr><td>4</td><td>12810.00</td><td>51.12</td><td>88.20</td><td>-37.08</td><td>42.44</td><td>8.68</td><td>Peak</td><td>177</td><td>308</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8540.00	39.31	68.20	-28.89	32.21	7.10	Average	100	156	2	8540.00	48.56	88.20	-39.64	41.46	7.10	Peak	100	156	3	12810.00	40.54	68.20	-27.66	31.86	8.68	Average	177	308	4	12810.00	51.12	88.20	-37.08	42.44	8.68	Peak	177	308
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8540.00	39.31	68.20	-28.89	32.21	7.10	Average	100	156																																												
2	8540.00	48.56	88.20	-39.64	41.46	7.10	Peak	100	156																																												
3	12810.00	40.54	68.20	-27.66	31.86	8.68	Average	177	308																																												
4	12810.00	51.12	88.20	-37.08	42.44	8.68	Peak	177	308																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

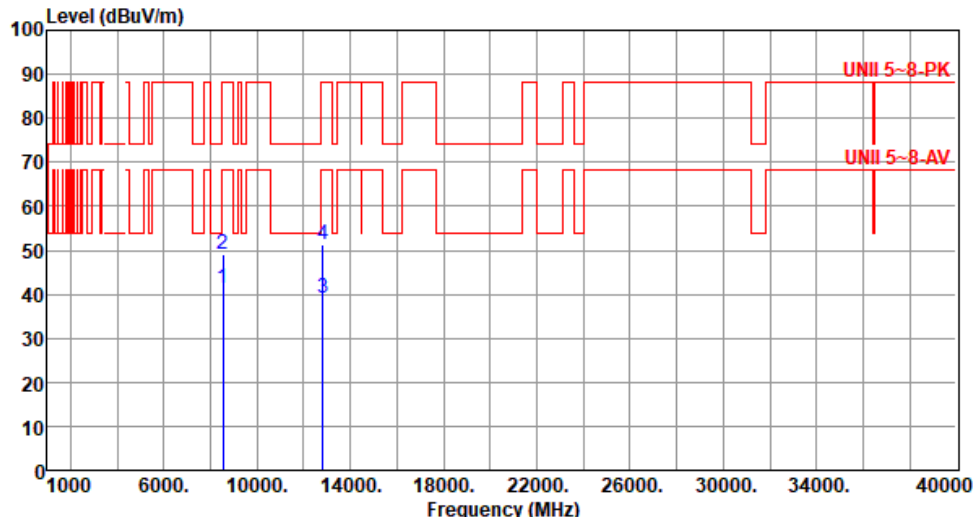

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6405																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8540.00</td><td>41.46</td><td>68.20</td><td>-26.74</td><td>34.36</td><td>7.10</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>2</td><td>8540.00</td><td>48.93</td><td>88.20</td><td>-39.27</td><td>41.83</td><td>7.10</td><td>Peak</td><td>100</td><td>62</td></tr><tr><td>3</td><td>12810.00</td><td>38.96</td><td>68.20</td><td>-29.24</td><td>30.28</td><td>8.68</td><td>Average</td><td>343</td><td>236</td></tr><tr><td>4</td><td>12810.00</td><td>51.21</td><td>88.20</td><td>-36.99</td><td>42.53</td><td>8.68</td><td>Peak</td><td>343</td><td>236</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8540.00	41.46	68.20	-26.74	34.36	7.10	Average	100	62	2	8540.00	48.93	88.20	-39.27	41.83	7.10	Peak	100	62	3	12810.00	38.96	68.20	-29.24	30.28	8.68	Average	343	236	4	12810.00	51.21	88.20	-36.99	42.53	8.68	Peak	343	236
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8540.00	41.46	68.20	-26.74	34.36	7.10	Average	100	62																																												
2	8540.00	48.93	88.20	-39.27	41.83	7.10	Peak	100	62																																												
3	12810.00	38.96	68.20	-29.24	30.28	8.68	Average	343	236																																												
4	12810.00	51.21	88.20	-36.99	42.53	8.68	Peak	343	236																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6445
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6445																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8593.33</td><td>35.07</td><td>68.20</td><td>-33.13</td><td>27.77</td><td>7.30</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>2</td><td>8593.33</td><td>48.73</td><td>88.20</td><td>-39.47</td><td>41.43</td><td>7.30</td><td>Peak</td><td>100</td><td>234</td></tr><tr><td>3</td><td>12890.00</td><td>40.43</td><td>68.20</td><td>-27.77</td><td>31.70</td><td>8.73</td><td>Average</td><td>132</td><td>284</td></tr><tr><td>4</td><td>12890.00</td><td>52.06</td><td>88.20</td><td>-36.14</td><td>43.33</td><td>8.73</td><td>Peak</td><td>132</td><td>284</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8593.33	35.07	68.20	-33.13	27.77	7.30	Average	100	234	2	8593.33	48.73	88.20	-39.47	41.43	7.30	Peak	100	234	3	12890.00	40.43	68.20	-27.77	31.70	8.73	Average	132	284	4	12890.00	52.06	88.20	-36.14	43.33	8.73	Peak	132	284
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8593.33	35.07	68.20	-33.13	27.77	7.30	Average	100	234																																												
2	8593.33	48.73	88.20	-39.47	41.43	7.30	Peak	100	234																																												
3	12890.00	40.43	68.20	-27.77	31.70	8.73	Average	132	284																																												
4	12890.00	52.06	88.20	-36.14	43.33	8.73	Peak	132	284																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6485																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8646.66</td><td>34.75</td><td>68.20</td><td>-33.45</td><td>27.39</td><td>7.36</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>2</td><td>8646.66</td><td>48.79</td><td>88.20</td><td>-39.41</td><td>41.43</td><td>7.36</td><td>Peak</td><td>100</td><td>234</td></tr><tr><td>3</td><td>12970.00</td><td>43.64</td><td>68.20</td><td>-24.56</td><td>34.88</td><td>8.76</td><td>Average</td><td>290</td><td>206</td></tr><tr><td>4</td><td>12970.00</td><td>52.53</td><td>88.20</td><td>-35.67</td><td>43.77</td><td>8.76</td><td>Peak</td><td>290</td><td>206</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8646.66	34.75	68.20	-33.45	27.39	7.36	Average	100	234	2	8646.66	48.79	88.20	-39.41	41.43	7.36	Peak	100	234	3	12970.00	43.64	68.20	-24.56	34.88	8.76	Average	290	206	4	12970.00	52.53	88.20	-35.67	43.77	8.76	Peak	290	206
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8646.66	34.75	68.20	-33.45	27.39	7.36	Average	100	234																																												
2	8646.66	48.79	88.20	-39.41	41.43	7.36	Peak	100	234																																												
3	12970.00	43.64	68.20	-24.56	34.88	8.76	Average	290	206																																												
4	12970.00	52.53	88.20	-35.67	43.77	8.76	Peak	290	206																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6485																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8646.66</td><td>35.11</td><td>68.20</td><td>-33.09</td><td>27.75</td><td>7.36</td><td>Average</td><td>100</td><td>236</td></tr><tr><td>2</td><td>8646.66</td><td>48.97</td><td>88.20</td><td>-39.23</td><td>41.61</td><td>7.36</td><td>Peak</td><td>100</td><td>236</td></tr><tr><td>3</td><td>12970.00</td><td>40.33</td><td>68.20</td><td>-27.87</td><td>31.57</td><td>8.76</td><td>Average</td><td>111</td><td>238</td></tr><tr><td>4</td><td>12970.00</td><td>52.22</td><td>88.20</td><td>-35.98</td><td>43.46</td><td>8.76</td><td>Peak</td><td>111</td><td>238</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8646.66	35.11	68.20	-33.09	27.75	7.36	Average	100	236	2	8646.66	48.97	88.20	-39.23	41.61	7.36	Peak	100	236	3	12970.00	40.33	68.20	-27.87	31.57	8.76	Average	111	238	4	12970.00	52.22	88.20	-35.98	43.46	8.76	Peak	111	238
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8646.66	35.11	68.20	-33.09	27.75	7.36	Average	100	236																																												
2	8646.66	48.97	88.20	-39.23	41.61	7.36	Peak	100	236																																												
3	12970.00	40.33	68.20	-27.87	31.57	8.76	Average	111	238																																												
4	12970.00	52.22	88.20	-35.98	43.46	8.76	Peak	111	238																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6525																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8700.00</td><td>34.85</td><td>68.20</td><td>-33.35</td><td>27.44</td><td>7.41</td><td>Average</td><td>100</td><td>195</td></tr><tr><td>2</td><td>8700.00</td><td>48.89</td><td>88.20</td><td>-39.31</td><td>41.48</td><td>7.41</td><td>Peak</td><td>100</td><td>195</td></tr><tr><td>3</td><td>13050.00</td><td>43.26</td><td>68.20</td><td>-24.94</td><td>34.57</td><td>8.69</td><td>Average</td><td>301</td><td>224</td></tr><tr><td>4</td><td>13050.00</td><td>52.15</td><td>88.20</td><td>-36.05</td><td>43.46</td><td>8.69</td><td>Peak</td><td>301</td><td>224</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8700.00	34.85	68.20	-33.35	27.44	7.41	Average	100	195	2	8700.00	48.89	88.20	-39.31	41.48	7.41	Peak	100	195	3	13050.00	43.26	68.20	-24.94	34.57	8.69	Average	301	224	4	13050.00	52.15	88.20	-36.05	43.46	8.69	Peak	301	224
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8700.00	34.85	68.20	-33.35	27.44	7.41	Average	100	195																																												
2	8700.00	48.89	88.20	-39.31	41.48	7.41	Peak	100	195																																												
3	13050.00	43.26	68.20	-24.94	34.57	8.69	Average	301	224																																												
4	13050.00	52.15	88.20	-36.05	43.46	8.69	Peak	301	224																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6525																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8700.00</td><td>35.07</td><td>68.20</td><td>-33.13</td><td>27.66</td><td>7.41</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>2</td><td>8700.00</td><td>49.09</td><td>88.20</td><td>-39.11</td><td>41.68</td><td>7.41</td><td>Peak</td><td>100</td><td>240</td></tr><tr><td>3</td><td>13050.00</td><td>40.41</td><td>68.20</td><td>-27.79</td><td>31.72</td><td>8.69</td><td>Average</td><td>136</td><td>284</td></tr><tr><td>4</td><td>13050.00</td><td>52.30</td><td>88.20</td><td>-35.90</td><td>43.61</td><td>8.69</td><td>Peak</td><td>136</td><td>284</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8700.00	35.07	68.20	-33.13	27.66	7.41	Average	100	240	2	8700.00	49.09	88.20	-39.11	41.68	7.41	Peak	100	240	3	13050.00	40.41	68.20	-27.79	31.72	8.69	Average	136	284	4	13050.00	52.30	88.20	-35.90	43.61	8.69	Peak	136	284
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8700.00	35.07	68.20	-33.13	27.66	7.41	Average	100	240																																												
2	8700.00	49.09	88.20	-39.11	41.68	7.41	Peak	100	240																																												
3	13050.00	40.41	68.20	-27.79	31.72	8.69	Average	136	284																																												
4	13050.00	52.30	88.20	-35.90	43.61	8.69	Peak	136	284																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6565																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8753.33</td><td>35.14</td><td>68.20</td><td>-33.06</td><td>27.58</td><td>7.56</td><td>Average</td><td>100</td><td>230</td></tr><tr><td>2</td><td>8753.33</td><td>49.01</td><td>88.20</td><td>-39.19</td><td>41.45</td><td>7.56</td><td>Peak</td><td>100</td><td>230</td></tr><tr><td>3</td><td>13130.00</td><td>43.13</td><td>68.20</td><td>-25.07</td><td>34.63</td><td>8.50</td><td>Average</td><td>322</td><td>245</td></tr><tr><td>4</td><td>13130.00</td><td>52.02</td><td>88.20</td><td>-36.18</td><td>43.52</td><td>8.50</td><td>Peak</td><td>322</td><td>245</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8753.33	35.14	68.20	-33.06	27.58	7.56	Average	100	230	2	8753.33	49.01	88.20	-39.19	41.45	7.56	Peak	100	230	3	13130.00	43.13	68.20	-25.07	34.63	8.50	Average	322	245	4	13130.00	52.02	88.20	-36.18	43.52	8.50	Peak	322	245
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8753.33	35.14	68.20	-33.06	27.58	7.56	Average	100	230																																												
2	8753.33	49.01	88.20	-39.19	41.45	7.56	Peak	100	230																																												
3	13130.00	43.13	68.20	-25.07	34.63	8.50	Average	322	245																																												
4	13130.00	52.02	88.20	-36.18	43.52	8.50	Peak	322	245																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6565																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8753.33</td><td>35.13</td><td>68.20</td><td>-33.07</td><td>27.57</td><td>7.56</td><td>Average</td><td>100</td><td>231</td></tr><tr><td>2</td><td>8753.33</td><td>48.84</td><td>88.20</td><td>-39.36</td><td>41.28</td><td>7.56</td><td>Peak</td><td>100</td><td>231</td></tr><tr><td>3</td><td>13130.00</td><td>40.05</td><td>68.20</td><td>-28.15</td><td>31.55</td><td>8.50</td><td>Average</td><td>133</td><td>264</td></tr><tr><td>4</td><td>13130.00</td><td>51.94</td><td>88.20</td><td>-36.26</td><td>43.44</td><td>8.50</td><td>Peak</td><td>133</td><td>264</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8753.33	35.13	68.20	-33.07	27.57	7.56	Average	100	231	2	8753.33	48.84	88.20	-39.36	41.28	7.56	Peak	100	231	3	13130.00	40.05	68.20	-28.15	31.55	8.50	Average	133	264	4	13130.00	51.94	88.20	-36.26	43.44	8.50	Peak	133	264
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8753.33	35.13	68.20	-33.07	27.57	7.56	Average	100	231																																												
2	8753.33	48.84	88.20	-39.36	41.28	7.56	Peak	100	231																																												
3	13130.00	40.05	68.20	-28.15	31.55	8.50	Average	133	264																																												
4	13130.00	51.94	88.20	-36.26	43.44	8.50	Peak	133	264																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6725																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8966.66</td><td>34.94</td><td>68.20</td><td>-33.26</td><td>27.50</td><td>7.44</td><td>Average</td><td>100</td><td>209</td></tr><tr><td>2</td><td>8966.66</td><td>48.85</td><td>88.20</td><td>-39.35</td><td>41.41</td><td>7.44</td><td>Peak</td><td>100</td><td>209</td></tr><tr><td>3</td><td>13450.00</td><td>43.19</td><td>68.20</td><td>-25.01</td><td>34.67</td><td>8.52</td><td>Average</td><td>274</td><td>220</td></tr><tr><td>4</td><td>13450.00</td><td>52.09</td><td>88.20</td><td>-36.11</td><td>43.57</td><td>8.52</td><td>Peak</td><td>274</td><td>220</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8966.66	34.94	68.20	-33.26	27.50	7.44	Average	100	209	2	8966.66	48.85	88.20	-39.35	41.41	7.44	Peak	100	209	3	13450.00	43.19	68.20	-25.01	34.67	8.52	Average	274	220	4	13450.00	52.09	88.20	-36.11	43.57	8.52	Peak	274	220
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8966.66	34.94	68.20	-33.26	27.50	7.44	Average	100	209																																												
2	8966.66	48.85	88.20	-39.35	41.41	7.44	Peak	100	209																																												
3	13450.00	43.19	68.20	-25.01	34.67	8.52	Average	274	220																																												
4	13450.00	52.09	88.20	-36.11	43.57	8.52	Peak	274	220																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6725																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8966.66</td><td>35.18</td><td>68.20</td><td>-33.02</td><td>27.74</td><td>7.44</td><td>Average</td><td>100</td><td>252</td></tr><tr><td>2</td><td>8966.66</td><td>49.07</td><td>88.20</td><td>-39.13</td><td>41.63</td><td>7.44</td><td>Peak</td><td>100</td><td>252</td></tr><tr><td>3</td><td>13450.00</td><td>40.39</td><td>68.20</td><td>-27.81</td><td>31.87</td><td>8.52</td><td>Average</td><td>110</td><td>235</td></tr><tr><td>4</td><td>13450.00</td><td>52.01</td><td>88.20</td><td>-36.19</td><td>43.49</td><td>8.52</td><td>Peak</td><td>110</td><td>235</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8966.66	35.18	68.20	-33.02	27.74	7.44	Average	100	252	2	8966.66	49.07	88.20	-39.13	41.63	7.44	Peak	100	252	3	13450.00	40.39	68.20	-27.81	31.87	8.52	Average	110	235	4	13450.00	52.01	88.20	-36.19	43.49	8.52	Peak	110	235
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8966.66	35.18	68.20	-33.02	27.74	7.44	Average	100	252																																												
2	8966.66	49.07	88.20	-39.13	41.63	7.44	Peak	100	252																																												
3	13450.00	40.39	68.20	-27.81	31.87	8.52	Average	110	235																																												
4	13450.00	52.01	88.20	-36.19	43.49	8.52	Peak	110	235																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6845																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9126.66</td><td>35.30</td><td>54.00</td><td>-18.70</td><td>27.42</td><td>7.88</td><td>Average</td><td>100</td><td>210</td></tr><tr><td>2</td><td>9126.66</td><td>49.09</td><td>74.00</td><td>-24.91</td><td>41.21</td><td>7.88</td><td>Peak</td><td>100</td><td>210</td></tr><tr><td>3</td><td>13690.00</td><td>43.23</td><td>68.20</td><td>-24.97</td><td>34.72</td><td>8.51</td><td>Average</td><td>300</td><td>241</td></tr><tr><td>4</td><td>13690.00</td><td>52.13</td><td>88.20</td><td>-36.07</td><td>43.62</td><td>8.51</td><td>Peak</td><td>300</td><td>241</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9126.66	35.30	54.00	-18.70	27.42	7.88	Average	100	210	2	9126.66	49.09	74.00	-24.91	41.21	7.88	Peak	100	210	3	13690.00	43.23	68.20	-24.97	34.72	8.51	Average	300	241	4	13690.00	52.13	88.20	-36.07	43.62	8.51	Peak	300	241
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9126.66	35.30	54.00	-18.70	27.42	7.88	Average	100	210																																												
2	9126.66	49.09	74.00	-24.91	41.21	7.88	Peak	100	210																																												
3	13690.00	43.23	68.20	-24.97	34.72	8.51	Average	300	241																																												
4	13690.00	52.13	88.20	-36.07	43.62	8.51	Peak	300	241																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6845																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9126.66</td><td>35.50</td><td>54.00</td><td>-18.50</td><td>27.62</td><td>7.88</td><td>Average</td><td>100</td><td>231</td></tr><tr><td>2</td><td>9126.66</td><td>49.52</td><td>74.00</td><td>-24.48</td><td>41.64</td><td>7.88</td><td>Peak</td><td>100</td><td>231</td></tr><tr><td>3</td><td>13690.00</td><td>40.25</td><td>68.20</td><td>-27.95</td><td>31.74</td><td>8.51</td><td>Average</td><td>120</td><td>247</td></tr><tr><td>4</td><td>13690.00</td><td>51.84</td><td>88.20</td><td>-36.36</td><td>43.33</td><td>8.51</td><td>Peak</td><td>120</td><td>247</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9126.66	35.50	54.00	-18.50	27.62	7.88	Average	100	231	2	9126.66	49.52	74.00	-24.48	41.64	7.88	Peak	100	231	3	13690.00	40.25	68.20	-27.95	31.74	8.51	Average	120	247	4	13690.00	51.84	88.20	-36.36	43.33	8.51	Peak	120	247
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9126.66	35.50	54.00	-18.50	27.62	7.88	Average	100	231																																												
2	9126.66	49.52	74.00	-24.48	41.64	7.88	Peak	100	231																																												
3	13690.00	40.25	68.20	-27.95	31.74	8.51	Average	120	247																																												
4	13690.00	51.84	88.20	-36.36	43.33	8.51	Peak	120	247																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6885																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9180.00</td><td>35.31</td><td>54.00</td><td>-18.69</td><td>27.29</td><td>8.02</td><td>Average</td><td>100</td><td>225</td></tr><tr><td>2</td><td>9180.00</td><td>49.69</td><td>74.00</td><td>-24.31</td><td>41.67</td><td>8.02</td><td>Peak</td><td>100</td><td>225</td></tr><tr><td>3</td><td>13770.00</td><td>43.32</td><td>68.20</td><td>-24.88</td><td>34.75</td><td>8.57</td><td>Average</td><td>308</td><td>242</td></tr><tr><td>4</td><td>13770.00</td><td>52.25</td><td>88.20</td><td>-35.95</td><td>43.68</td><td>8.57</td><td>Peak</td><td>308</td><td>242</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9180.00	35.31	54.00	-18.69	27.29	8.02	Average	100	225	2	9180.00	49.69	74.00	-24.31	41.67	8.02	Peak	100	225	3	13770.00	43.32	68.20	-24.88	34.75	8.57	Average	308	242	4	13770.00	52.25	88.20	-35.95	43.68	8.57	Peak	308	242
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9180.00	35.31	54.00	-18.69	27.29	8.02	Average	100	225																																												
2	9180.00	49.69	74.00	-24.31	41.67	8.02	Peak	100	225																																												
3	13770.00	43.32	68.20	-24.88	34.75	8.57	Average	308	242																																												
4	13770.00	52.25	88.20	-35.95	43.68	8.57	Peak	308	242																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6885																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9180.00</td><td>35.71</td><td>54.00</td><td>-18.29</td><td>27.69</td><td>8.02</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>9180.00</td><td>49.56</td><td>74.00</td><td>-24.44</td><td>41.54</td><td>8.02</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>13770.00</td><td>40.23</td><td>68.20</td><td>-27.97</td><td>31.66</td><td>8.57</td><td>Average</td><td>123</td><td>273</td></tr><tr><td>4</td><td>13770.00</td><td>51.92</td><td>88.20</td><td>-36.28</td><td>43.35</td><td>8.57</td><td>Peak</td><td>123</td><td>273</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9180.00	35.71	54.00	-18.29	27.69	8.02	Average	100	244	2	9180.00	49.56	74.00	-24.44	41.54	8.02	Peak	100	244	3	13770.00	40.23	68.20	-27.97	31.66	8.57	Average	123	273	4	13770.00	51.92	88.20	-36.28	43.35	8.57	Peak	123	273
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9180.00	35.71	54.00	-18.29	27.69	8.02	Average	100	244																																												
2	9180.00	49.56	74.00	-24.44	41.54	8.02	Peak	100	244																																												
3	13770.00	40.23	68.20	-27.97	31.66	8.57	Average	123	273																																												
4	13770.00	51.92	88.20	-36.28	43.35	8.57	Peak	123	273																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6925																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9233.33</td><td>35.76</td><td>68.20</td><td>-32.44</td><td>27.44</td><td>8.32</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2</td><td>9233.33</td><td>49.55</td><td>88.20</td><td>-38.65</td><td>41.23</td><td>8.32</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>3</td><td>13850.00</td><td>43.16</td><td>68.20</td><td>-25.04</td><td>34.52</td><td>8.64</td><td>Average</td><td>313</td><td>236</td></tr><tr><td>4</td><td>13850.00</td><td>52.12</td><td>88.20</td><td>-36.08</td><td>43.48</td><td>8.64</td><td>Peak</td><td>313</td><td>236</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9233.33	35.76	68.20	-32.44	27.44	8.32	Average	100	211	2	9233.33	49.55	88.20	-38.65	41.23	8.32	Peak	100	211	3	13850.00	43.16	68.20	-25.04	34.52	8.64	Average	313	236	4	13850.00	52.12	88.20	-36.08	43.48	8.64	Peak	313	236
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9233.33	35.76	68.20	-32.44	27.44	8.32	Average	100	211																																												
2	9233.33	49.55	88.20	-38.65	41.23	8.32	Peak	100	211																																												
3	13850.00	43.16	68.20	-25.04	34.52	8.64	Average	313	236																																												
4	13850.00	52.12	88.20	-36.08	43.48	8.64	Peak	313	236																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	6925																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9233.33</td><td>36.00</td><td>68.20</td><td>-32.20</td><td>27.68</td><td>8.32</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>2</td><td>9233.33</td><td>49.67</td><td>88.20</td><td>-38.53</td><td>41.35</td><td>8.32</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>3</td><td>13850.00</td><td>40.26</td><td>68.20</td><td>-27.94</td><td>31.62</td><td>8.64</td><td>Average</td><td>122</td><td>273</td></tr><tr><td>4</td><td>13850.00</td><td>51.80</td><td>88.20</td><td>-36.40</td><td>43.16</td><td>8.64</td><td>Peak</td><td>122</td><td>273</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9233.33	36.00	68.20	-32.20	27.68	8.32	Average	100	242	2	9233.33	49.67	88.20	-38.53	41.35	8.32	Peak	100	242	3	13850.00	40.26	68.20	-27.94	31.62	8.64	Average	122	273	4	13850.00	51.80	88.20	-36.40	43.16	8.64	Peak	122	273
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9233.33	36.00	68.20	-32.20	27.68	8.32	Average	100	242																																												
2	9233.33	49.67	88.20	-38.53	41.35	8.32	Peak	100	242																																												
3	13850.00	40.26	68.20	-27.94	31.62	8.64	Average	122	273																																												
4	13850.00	51.80	88.20	-36.40	43.16	8.64	Peak	122	273																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	7005																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9340.00</td><td>35.99</td><td>54.00</td><td>-18.01</td><td>27.42</td><td>8.57</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>2</td><td>9340.00</td><td>49.95</td><td>74.00</td><td>-24.05</td><td>41.38</td><td>8.57</td><td>Peak</td><td>100</td><td>214</td></tr><tr><td>3</td><td>14010.00</td><td>43.82</td><td>68.20</td><td>-24.38</td><td>34.72</td><td>9.10</td><td>Average</td><td>281</td><td>216</td></tr><tr><td>4</td><td>14010.00</td><td>52.72</td><td>88.20</td><td>-35.48</td><td>43.62</td><td>9.10</td><td>Peak</td><td>281</td><td>216</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9340.00	35.99	54.00	-18.01	27.42	8.57	Average	100	214	2	9340.00	49.95	74.00	-24.05	41.38	8.57	Peak	100	214	3	14010.00	43.82	68.20	-24.38	34.72	9.10	Average	281	216	4	14010.00	52.72	88.20	-35.48	43.62	9.10	Peak	281	216
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9340.00	35.99	54.00	-18.01	27.42	8.57	Average	100	214																																												
2	9340.00	49.95	74.00	-24.05	41.38	8.57	Peak	100	214																																												
3	14010.00	43.82	68.20	-24.38	34.72	9.10	Average	281	216																																												
4	14010.00	52.72	88.20	-35.48	43.62	9.10	Peak	281	216																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	7005																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9340.00</td><td>36.45</td><td>54.00</td><td>-17.55</td><td>27.88</td><td>8.57</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>9340.00</td><td>50.09</td><td>74.00</td><td>-23.91</td><td>41.52</td><td>8.57</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>14010.00</td><td>40.72</td><td>68.20</td><td>-27.48</td><td>31.62</td><td>9.10</td><td>Average</td><td>108</td><td>243</td></tr><tr><td>4</td><td>14010.00</td><td>52.49</td><td>88.20</td><td>-35.71</td><td>43.39</td><td>9.10</td><td>Peak</td><td>108</td><td>243</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9340.00	36.45	54.00	-17.55	27.88	8.57	Average	100	244	2	9340.00	50.09	74.00	-23.91	41.52	8.57	Peak	100	244	3	14010.00	40.72	68.20	-27.48	31.62	9.10	Average	108	243	4	14010.00	52.49	88.20	-35.71	43.39	9.10	Peak	108	243
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9340.00	36.45	54.00	-17.55	27.88	8.57	Average	100	244																																												
2	9340.00	50.09	74.00	-23.91	41.52	8.57	Peak	100	244																																												
3	14010.00	40.72	68.20	-27.48	31.62	9.10	Average	108	243																																												
4	14010.00	52.49	88.20	-35.71	43.39	9.10	Peak	108	243																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	7085																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9446.66</td><td>36.12</td><td>54.00</td><td>-17.88</td><td>27.40</td><td>8.72</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>2</td><td>9446.66</td><td>49.76</td><td>74.00</td><td>-24.24</td><td>41.04</td><td>8.72</td><td>Peak</td><td>100</td><td>206</td></tr><tr><td>3</td><td>14170.00</td><td>43.99</td><td>68.20</td><td>-24.21</td><td>34.63</td><td>9.36</td><td>Average</td><td>292</td><td>228</td></tr><tr><td>4</td><td>14170.00</td><td>52.90</td><td>88.20</td><td>-35.30</td><td>43.54</td><td>9.36</td><td>Peak</td><td>292</td><td>228</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9446.66	36.12	54.00	-17.88	27.40	8.72	Average	100	206	2	9446.66	49.76	74.00	-24.24	41.04	8.72	Peak	100	206	3	14170.00	43.99	68.20	-24.21	34.63	9.36	Average	292	228	4	14170.00	52.90	88.20	-35.30	43.54	9.36	Peak	292	228
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9446.66	36.12	54.00	-17.88	27.40	8.72	Average	100	206																																												
2	9446.66	49.76	74.00	-24.24	41.04	8.72	Peak	100	206																																												
3	14170.00	43.99	68.20	-24.21	34.63	9.36	Average	292	228																																												
4	14170.00	52.90	88.20	-35.30	43.54	9.36	Peak	292	228																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	7085																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9446.66</td><td>36.48</td><td>54.00</td><td>-17.52</td><td>27.76</td><td>8.72</td><td>Average</td><td>100</td><td>238</td></tr><tr><td>2</td><td>9446.66</td><td>49.73</td><td>74.00</td><td>-24.27</td><td>41.01</td><td>8.72</td><td>Peak</td><td>100</td><td>238</td></tr><tr><td>3</td><td>14170.00</td><td>40.90</td><td>68.20</td><td>-27.30</td><td>31.54</td><td>9.36</td><td>Average</td><td>119</td><td>265</td></tr><tr><td>4</td><td>14170.00</td><td>52.38</td><td>88.20</td><td>-35.82</td><td>43.02</td><td>9.36</td><td>Peak</td><td>119</td><td>265</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9446.66	36.48	54.00	-17.52	27.76	8.72	Average	100	238	2	9446.66	49.73	74.00	-24.27	41.01	8.72	Peak	100	238	3	14170.00	40.90	68.20	-27.30	31.54	9.36	Average	119	265	4	14170.00	52.38	88.20	-35.82	43.02	9.36	Peak	119	265
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9446.66	36.48	54.00	-17.52	27.76	8.72	Average	100	238																																												
2	9446.66	49.73	74.00	-24.27	41.01	8.72	Peak	100	238																																												
3	14170.00	40.90	68.20	-27.30	31.54	9.36	Average	119	265																																												
4	14170.00	52.38	88.20	-35.82	43.02	9.36	Peak	119	265																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5985																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7980.00</td><td>39.30</td><td>68.20</td><td>-28.90</td><td>32.24</td><td>7.06</td><td>Average</td><td>100</td><td>352</td></tr><tr><td>2</td><td>7980.00</td><td>47.94</td><td>88.20</td><td>-40.26</td><td>40.88</td><td>7.06</td><td>Peak</td><td>100</td><td>352</td></tr><tr><td>3</td><td>11970.00</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>32.46</td><td>8.48</td><td>Average</td><td>118</td><td>228</td></tr><tr><td>4</td><td>11970.00</td><td>50.26</td><td>74.00</td><td>-23.74</td><td>41.78</td><td>8.48</td><td>Peak</td><td>118</td><td>228</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7980.00	39.30	68.20	-28.90	32.24	7.06	Average	100	352	2	7980.00	47.94	88.20	-40.26	40.88	7.06	Peak	100	352	3	11970.00	40.94	54.00	-13.06	32.46	8.48	Average	118	228	4	11970.00	50.26	74.00	-23.74	41.78	8.48	Peak	118	228
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7980.00	39.30	68.20	-28.90	32.24	7.06	Average	100	352																																												
2	7980.00	47.94	88.20	-40.26	40.88	7.06	Peak	100	352																																												
3	11970.00	40.94	54.00	-13.06	32.46	8.48	Average	118	228																																												
4	11970.00	50.26	74.00	-23.74	41.78	8.48	Peak	118	228																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5985																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7980.00</td><td>41.04</td><td>68.20</td><td>-27.16</td><td>33.98</td><td>7.06</td><td>Average</td><td>100</td><td>342</td></tr><tr><td>2</td><td>7980.00</td><td>48.50</td><td>88.20</td><td>-39.70</td><td>41.44</td><td>7.06</td><td>Peak</td><td>100</td><td>342</td></tr><tr><td>3</td><td>11970.00</td><td>40.23</td><td>54.00</td><td>-13.77</td><td>31.75</td><td>8.48</td><td>Average</td><td>326</td><td>249</td></tr><tr><td>4</td><td>11970.00</td><td>50.14</td><td>74.00</td><td>-23.86</td><td>41.66</td><td>8.48</td><td>Peak</td><td>326</td><td>249</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7980.00	41.04	68.20	-27.16	33.98	7.06	Average	100	342	2	7980.00	48.50	88.20	-39.70	41.44	7.06	Peak	100	342	3	11970.00	40.23	54.00	-13.77	31.75	8.48	Average	326	249	4	11970.00	50.14	74.00	-23.86	41.66	8.48	Peak	326	249
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	7980.00	41.04	68.20	-27.16	33.98	7.06	Average	100	342																																												
2	7980.00	48.50	88.20	-39.70	41.44	7.06	Peak	100	342																																												
3	11970.00	40.23	54.00	-13.77	31.75	8.48	Average	326	249																																												
4	11970.00	50.14	74.00	-23.86	41.66	8.48	Peak	326	249																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6145																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8193.33</td><td>39.65</td><td>54.00</td><td>-14.35</td><td>32.73</td><td>6.92</td><td>Average</td><td>100</td><td>342</td></tr><tr><td>2</td><td>8193.33</td><td>48.15</td><td>74.00</td><td>-25.85</td><td>41.23</td><td>6.92</td><td>Peak</td><td>100</td><td>342</td></tr><tr><td>3</td><td>12290.00</td><td>41.61</td><td>54.00</td><td>-12.39</td><td>32.90</td><td>8.71</td><td>Average</td><td>122</td><td>230</td></tr><tr><td>4</td><td>12290.00</td><td>50.85</td><td>74.00</td><td>-23.15</td><td>42.14</td><td>8.71</td><td>Peak</td><td>122</td><td>230</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8193.33	39.65	54.00	-14.35	32.73	6.92	Average	100	342	2	8193.33	48.15	74.00	-25.85	41.23	6.92	Peak	100	342	3	12290.00	41.61	54.00	-12.39	32.90	8.71	Average	122	230	4	12290.00	50.85	74.00	-23.15	42.14	8.71	Peak	122	230
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8193.33	39.65	54.00	-14.35	32.73	6.92	Average	100	342																																												
2	8193.33	48.15	74.00	-25.85	41.23	6.92	Peak	100	342																																												
3	12290.00	41.61	54.00	-12.39	32.90	8.71	Average	122	230																																												
4	12290.00	50.85	74.00	-23.15	42.14	8.71	Peak	122	230																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6145																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8193.33</td><td>41.20</td><td>54.00</td><td>-12.80</td><td>34.28</td><td>6.92</td><td>Average</td><td>100</td><td>326</td></tr><tr><td>2</td><td>8193.33</td><td>49.44</td><td>74.00</td><td>-24.56</td><td>42.52</td><td>6.92</td><td>Peak</td><td>100</td><td>326</td></tr><tr><td>3</td><td>12290.00</td><td>41.00</td><td>54.00</td><td>-13.00</td><td>32.29</td><td>8.71</td><td>Average</td><td>312</td><td>254</td></tr><tr><td>4</td><td>12290.00</td><td>51.47</td><td>74.00</td><td>-22.53</td><td>42.76</td><td>8.71</td><td>Peak</td><td>312</td><td>254</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8193.33	41.20	54.00	-12.80	34.28	6.92	Average	100	326	2	8193.33	49.44	74.00	-24.56	42.52	6.92	Peak	100	326	3	12290.00	41.00	54.00	-13.00	32.29	8.71	Average	312	254	4	12290.00	51.47	74.00	-22.53	42.76	8.71	Peak	312	254
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8193.33	41.20	54.00	-12.80	34.28	6.92	Average	100	326																																												
2	8193.33	49.44	74.00	-24.56	42.52	6.92	Peak	100	326																																												
3	12290.00	41.00	54.00	-13.00	32.29	8.71	Average	312	254																																												
4	12290.00	51.47	74.00	-22.53	42.76	8.71	Peak	312	254																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6385																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8513.33</td><td>40.30</td><td>68.20</td><td>-27.90</td><td>33.34</td><td>6.96</td><td>Average</td><td>100</td><td>344</td></tr><tr><td>2</td><td>8513.33</td><td>49.31</td><td>88.20</td><td>-38.89</td><td>42.35</td><td>6.96</td><td>Peak</td><td>100</td><td>344</td></tr><tr><td>3</td><td>12770.00</td><td>41.12</td><td>68.20</td><td>-27.08</td><td>32.58</td><td>8.54</td><td>Average</td><td>132</td><td>242</td></tr><tr><td>4</td><td>12770.00</td><td>50.89</td><td>88.20</td><td>-37.31</td><td>42.35</td><td>8.54</td><td>Peak</td><td>132</td><td>242</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8513.33	40.30	68.20	-27.90	33.34	6.96	Average	100	344	2	8513.33	49.31	88.20	-38.89	42.35	6.96	Peak	100	344	3	12770.00	41.12	68.20	-27.08	32.58	8.54	Average	132	242	4	12770.00	50.89	88.20	-37.31	42.35	8.54	Peak	132	242
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8513.33	40.30	68.20	-27.90	33.34	6.96	Average	100	344																																												
2	8513.33	49.31	88.20	-38.89	42.35	6.96	Peak	100	344																																												
3	12770.00	41.12	68.20	-27.08	32.58	8.54	Average	132	242																																												
4	12770.00	50.89	88.20	-37.31	42.35	8.54	Peak	132	242																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6385																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8513.33</td><td>41.22</td><td>68.20</td><td>-26.98</td><td>34.26</td><td>6.96</td><td>Average</td><td>100</td><td>353</td></tr><tr><td>2</td><td>8513.33</td><td>48.65</td><td>88.20</td><td>-39.55</td><td>41.69</td><td>6.96</td><td>Peak</td><td>100</td><td>343</td></tr><tr><td>3</td><td>12770.00</td><td>41.22</td><td>68.20</td><td>-26.98</td><td>32.68</td><td>8.54</td><td>Average</td><td>330</td><td>255</td></tr><tr><td>4</td><td>12770.00</td><td>50.90</td><td>88.20</td><td>-37.30</td><td>42.36</td><td>8.54</td><td>Peak</td><td>330</td><td>255</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8513.33	41.22	68.20	-26.98	34.26	6.96	Average	100	353	2	8513.33	48.65	88.20	-39.55	41.69	6.96	Peak	100	343	3	12770.00	41.22	68.20	-26.98	32.68	8.54	Average	330	255	4	12770.00	50.90	88.20	-37.30	42.36	8.54	Peak	330	255
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8513.33	41.22	68.20	-26.98	34.26	6.96	Average	100	353																																												
2	8513.33	48.65	88.20	-39.55	41.69	6.96	Peak	100	343																																												
3	12770.00	41.22	68.20	-26.98	32.68	8.54	Average	330	255																																												
4	12770.00	50.90	88.20	-37.30	42.36	8.54	Peak	330	255																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6465																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8620.00</td><td>36.09</td><td>68.20</td><td>-32.11</td><td>28.75</td><td>7.34</td><td>Average</td><td>100</td><td>352</td></tr><tr><td>2</td><td>8620.00</td><td>49.08</td><td>88.20</td><td>-39.12</td><td>41.74</td><td>7.34</td><td>Peak</td><td>100</td><td>352</td></tr><tr><td>3</td><td>12930.00</td><td>45.28</td><td>68.20</td><td>-22.92</td><td>36.59</td><td>8.69</td><td>Average</td><td>300</td><td>343</td></tr><tr><td>4</td><td>12930.00</td><td>53.44</td><td>88.20</td><td>-34.76</td><td>44.75</td><td>8.69</td><td>Peak</td><td>300</td><td>343</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8620.00	36.09	68.20	-32.11	28.75	7.34	Average	100	352	2	8620.00	49.08	88.20	-39.12	41.74	7.34	Peak	100	352	3	12930.00	45.28	68.20	-22.92	36.59	8.69	Average	300	343	4	12930.00	53.44	88.20	-34.76	44.75	8.69	Peak	300	343
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8620.00	36.09	68.20	-32.11	28.75	7.34	Average	100	352																																												
2	8620.00	49.08	88.20	-39.12	41.74	7.34	Peak	100	352																																												
3	12930.00	45.28	68.20	-22.92	36.59	8.69	Average	300	343																																												
4	12930.00	53.44	88.20	-34.76	44.75	8.69	Peak	300	343																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6465																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8620.00</td><td>35.17</td><td>68.20</td><td>-33.03</td><td>27.83</td><td>7.34</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>2</td><td>8620.00</td><td>48.67</td><td>88.20</td><td>-39.53</td><td>41.33</td><td>7.34</td><td>Peak</td><td>100</td><td>157</td></tr><tr><td>3</td><td>12930.00</td><td>42.18</td><td>68.20</td><td>-26.02</td><td>33.49</td><td>8.69</td><td>Average</td><td>144</td><td>280</td></tr><tr><td>4</td><td>12930.00</td><td>52.96</td><td>88.20</td><td>-35.24</td><td>44.27</td><td>8.69</td><td>Peak</td><td>144</td><td>280</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8620.00	35.17	68.20	-33.03	27.83	7.34	Average	100	157	2	8620.00	48.67	88.20	-39.53	41.33	7.34	Peak	100	157	3	12930.00	42.18	68.20	-26.02	33.49	8.69	Average	144	280	4	12930.00	52.96	88.20	-35.24	44.27	8.69	Peak	144	280
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8620.00	35.17	68.20	-33.03	27.83	7.34	Average	100	157																																												
2	8620.00	48.67	88.20	-39.53	41.33	7.34	Peak	100	157																																												
3	12930.00	42.18	68.20	-26.02	33.49	8.69	Average	144	280																																												
4	12930.00	52.96	88.20	-35.24	44.27	8.69	Peak	144	280																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6545
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn level dBuV/m dBuV/m dB reading dB/m MHz dBuV/m dB dB dBV dB/m 1 8726.66 36.28 68.20 -31.92 28.79 7.49 Average 100 357 2 8726.66 49.06 88.20 -39.14 41.57 7.49 Peak 100 357 3 13090.00 45.28 68.20 -22.92 36.80 8.48 Average 325 346 4 13090.00 52.75 88.20 -35.45 44.27 8.48 Peak 325 346			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6545																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8726.66</td><td>35.18</td><td>68.20</td><td>-33.02</td><td>27.69</td><td>7.49</td><td>Average</td><td>100</td><td>153</td></tr><tr><td>2</td><td>8726.66</td><td>48.99</td><td>88.20</td><td>-39.21</td><td>41.50</td><td>7.49</td><td>Peak</td><td>100</td><td>153</td></tr><tr><td>3</td><td>13090.00</td><td>41.99</td><td>68.20</td><td>-26.21</td><td>33.51</td><td>8.48</td><td>Average</td><td>129</td><td>245</td></tr><tr><td>4</td><td>13090.00</td><td>53.02</td><td>88.20</td><td>-35.18</td><td>44.54</td><td>8.48</td><td>Peak</td><td>129</td><td>245</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8726.66	35.18	68.20	-33.02	27.69	7.49	Average	100	153	2	8726.66	48.99	88.20	-39.21	41.50	7.49	Peak	100	153	3	13090.00	41.99	68.20	-26.21	33.51	8.48	Average	129	245	4	13090.00	53.02	88.20	-35.18	44.54	8.48	Peak	129	245
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8726.66	35.18	68.20	-33.02	27.69	7.49	Average	100	153																																												
2	8726.66	48.99	88.20	-39.21	41.50	7.49	Peak	100	153																																												
3	13090.00	41.99	68.20	-26.21	33.51	8.48	Average	129	245																																												
4	13090.00	53.02	88.20	-35.18	44.54	8.48	Peak	129	245																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6625																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) 100 90 80 70 60 50 40 30 20 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8833.33</td><td>36.27</td><td>68.20</td><td>-31.93</td><td>28.62</td><td>7.65</td><td>Average</td><td>100</td><td>346</td></tr><tr><td>2</td><td>8833.33</td><td>49.26</td><td>88.20</td><td>-38.94</td><td>41.61</td><td>7.65</td><td>Peak</td><td>100</td><td>346</td></tr><tr><td>3</td><td>13250.00</td><td>44.92</td><td>54.00</td><td>-9.08</td><td>36.61</td><td>8.31</td><td>Average</td><td>308</td><td>335</td></tr><tr><td>4</td><td>13250.00</td><td>52.62</td><td>74.00</td><td>-21.38</td><td>44.31</td><td>8.31</td><td>Peak</td><td>308</td><td>335</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8833.33	36.27	68.20	-31.93	28.62	7.65	Average	100	346	2	8833.33	49.26	88.20	-38.94	41.61	7.65	Peak	100	346	3	13250.00	44.92	54.00	-9.08	36.61	8.31	Average	308	335	4	13250.00	52.62	74.00	-21.38	44.31	8.31	Peak	308	335
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8833.33	36.27	68.20	-31.93	28.62	7.65	Average	100	346																																												
2	8833.33	49.26	88.20	-38.94	41.61	7.65	Peak	100	346																																												
3	13250.00	44.92	54.00	-9.08	36.61	8.31	Average	308	335																																												
4	13250.00	52.62	74.00	-21.38	44.31	8.31	Peak	308	335																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6625																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8833.33</td><td>35.37</td><td>68.20</td><td>-32.83</td><td>27.72</td><td>7.65</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>2</td><td>8833.33</td><td>48.91</td><td>88.20</td><td>-39.29</td><td>41.26</td><td>7.65</td><td>Peak</td><td>100</td><td>134</td></tr><tr><td>3</td><td>13250.00</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>33.33</td><td>8.31</td><td>Average</td><td>130</td><td>278</td></tr><tr><td>4</td><td>13250.00</td><td>52.83</td><td>74.00</td><td>-21.17</td><td>44.52</td><td>8.31</td><td>Peak</td><td>130</td><td>278</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8833.33	35.37	68.20	-32.83	27.72	7.65	Average	100	134	2	8833.33	48.91	88.20	-39.29	41.26	7.65	Peak	100	134	3	13250.00	41.64	54.00	-12.36	33.33	8.31	Average	130	278	4	13250.00	52.83	74.00	-21.17	44.52	8.31	Peak	130	278
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8833.33	35.37	68.20	-32.83	27.72	7.65	Average	100	134																																												
2	8833.33	48.91	88.20	-39.29	41.26	7.65	Peak	100	134																																												
3	13250.00	41.64	54.00	-12.36	33.33	8.31	Average	130	278																																												
4	13250.00	52.83	74.00	-21.17	44.52	8.31	Peak	130	278																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6705																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8940.00</td><td>36.36</td><td>68.20</td><td>-31.84</td><td>28.92</td><td>7.44</td><td>Average</td><td>100</td><td>353</td></tr><tr><td>2</td><td>8940.00</td><td>48.78</td><td>88.20</td><td>-39.42</td><td>41.34</td><td>7.44</td><td>Peak</td><td>100</td><td>353</td></tr><tr><td>3</td><td>13410.00</td><td>45.23</td><td>68.20</td><td>-22.97</td><td>36.74</td><td>8.49</td><td>Average</td><td>310</td><td>330</td></tr><tr><td>4</td><td>13410.00</td><td>52.63</td><td>88.20</td><td>-35.57</td><td>44.14</td><td>8.49</td><td>Peak</td><td>310</td><td>330</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8940.00	36.36	68.20	-31.84	28.92	7.44	Average	100	353	2	8940.00	48.78	88.20	-39.42	41.34	7.44	Peak	100	353	3	13410.00	45.23	68.20	-22.97	36.74	8.49	Average	310	330	4	13410.00	52.63	88.20	-35.57	44.14	8.49	Peak	310	330
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8940.00	36.36	68.20	-31.84	28.92	7.44	Average	100	353																																												
2	8940.00	48.78	88.20	-39.42	41.34	7.44	Peak	100	353																																												
3	13410.00	45.23	68.20	-22.97	36.74	8.49	Average	310	330																																												
4	13410.00	52.63	88.20	-35.57	44.14	8.49	Peak	310	330																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6705																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8940.00</td><td>35.22</td><td>68.20</td><td>-32.98</td><td>27.78</td><td>7.44</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>2</td><td>8940.00</td><td>48.76</td><td>88.20</td><td>-39.44</td><td>41.32</td><td>7.44</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>3</td><td>13410.00</td><td>41.80</td><td>68.20</td><td>-26.40</td><td>33.31</td><td>8.49</td><td>Average</td><td>124</td><td>269</td></tr><tr><td>4</td><td>13410.00</td><td>53.15</td><td>88.20</td><td>-35.05</td><td>44.66</td><td>8.49</td><td>Peak</td><td>124</td><td>269</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8940.00	35.22	68.20	-32.98	27.78	7.44	Average	100	162	2	8940.00	48.76	88.20	-39.44	41.32	7.44	Peak	100	162	3	13410.00	41.80	68.20	-26.40	33.31	8.49	Average	124	269	4	13410.00	53.15	88.20	-35.05	44.66	8.49	Peak	124	269
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8940.00	35.22	68.20	-32.98	27.78	7.44	Average	100	162																																												
2	8940.00	48.76	88.20	-39.44	41.32	7.44	Peak	100	162																																												
3	13410.00	41.80	68.20	-26.40	33.31	8.49	Average	124	269																																												
4	13410.00	53.15	88.20	-35.05	44.66	8.49	Peak	124	269																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions


Appendix D

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6785																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9046.66</td><td>36.30</td><td>54.00</td><td>-17.70</td><td>28.82</td><td>7.48</td><td>Average</td><td>100</td><td>355</td></tr><tr><td>2</td><td>9046.66</td><td>48.84</td><td>74.00</td><td>-25.16</td><td>41.36</td><td>7.48</td><td>Peak</td><td>100</td><td>355</td></tr><tr><td>3</td><td>13570.00</td><td>45.24</td><td>68.20</td><td>-22.96</td><td>36.48</td><td>8.76</td><td>Average</td><td>303</td><td>336</td></tr><tr><td>4</td><td>13570.00</td><td>52.55</td><td>88.20</td><td>-35.65</td><td>43.79</td><td>8.76</td><td>Peak</td><td>303</td><td>336</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9046.66	36.30	54.00	-17.70	28.82	7.48	Average	100	355	2	9046.66	48.84	74.00	-25.16	41.36	7.48	Peak	100	355	3	13570.00	45.24	68.20	-22.96	36.48	8.76	Average	303	336	4	13570.00	52.55	88.20	-35.65	43.79	8.76	Peak	303	336
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9046.66	36.30	54.00	-17.70	28.82	7.48	Average	100	355																																												
2	9046.66	48.84	74.00	-25.16	41.36	7.48	Peak	100	355																																												
3	13570.00	45.24	68.20	-22.96	36.48	8.76	Average	303	336																																												
4	13570.00	52.55	88.20	-35.65	43.79	8.76	Peak	303	336																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6785																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9046.66</td><td>35.41</td><td>54.00</td><td>-18.59</td><td>27.93</td><td>7.48</td><td>Average</td><td>100</td><td>165</td></tr><tr><td>2</td><td>9046.66</td><td>47.80</td><td>74.00</td><td>-26.20</td><td>40.32</td><td>7.48</td><td>Peak</td><td>100</td><td>165</td></tr><tr><td>3</td><td>13570.00</td><td>41.85</td><td>68.20</td><td>-26.35</td><td>33.09</td><td>8.76</td><td>Average</td><td>142</td><td>275</td></tr><tr><td>4</td><td>13570.00</td><td>52.52</td><td>88.20</td><td>-35.68</td><td>43.76</td><td>8.76</td><td>Peak</td><td>142</td><td>275</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9046.66	35.41	54.00	-18.59	27.93	7.48	Average	100	165	2	9046.66	47.80	74.00	-26.20	40.32	7.48	Peak	100	165	3	13570.00	41.85	68.20	-26.35	33.09	8.76	Average	142	275	4	13570.00	52.52	88.20	-35.68	43.76	8.76	Peak	142	275
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9046.66	35.41	54.00	-18.59	27.93	7.48	Average	100	165																																												
2	9046.66	47.80	74.00	-26.20	40.32	7.48	Peak	100	165																																												
3	13570.00	41.85	68.20	-26.35	33.09	8.76	Average	142	275																																												
4	13570.00	52.52	88.20	-35.68	43.76	8.76	Peak	142	275																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

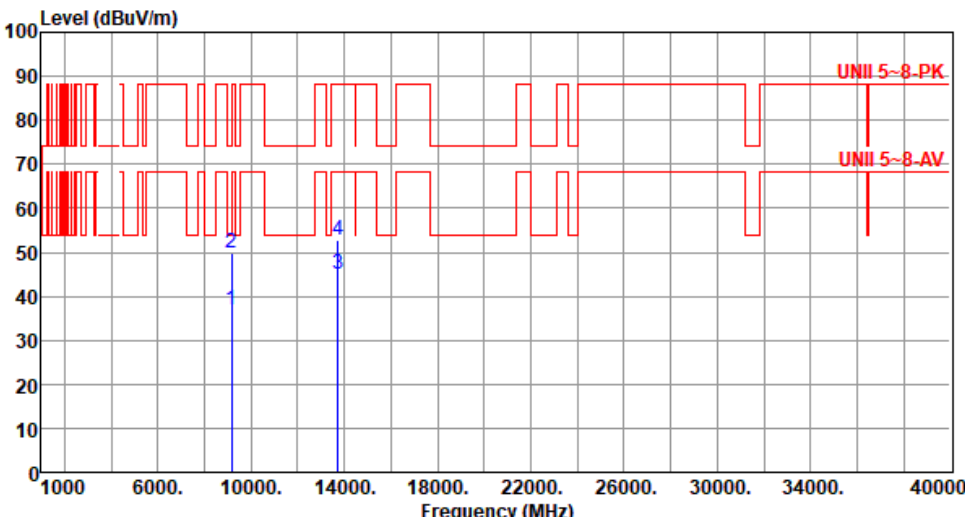

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6865																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9153.33</td><td>36.73</td><td>54.00</td><td>-17.27</td><td>28.76</td><td>7.97</td><td>Average</td><td>100</td><td>3</td></tr><tr><td>2</td><td>9153.33</td><td>49.74</td><td>74.00</td><td>-24.26</td><td>41.77</td><td>7.97</td><td>Peak</td><td>100</td><td>3</td></tr><tr><td>3</td><td>13730.00</td><td>45.09</td><td>68.20</td><td>-23.11</td><td>36.58</td><td>8.51</td><td>Average</td><td>314</td><td>326</td></tr><tr><td>4</td><td>13730.00</td><td>52.73</td><td>88.20</td><td>-35.47</td><td>44.22</td><td>8.51</td><td>Peak</td><td>314</td><td>326</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9153.33	36.73	54.00	-17.27	28.76	7.97	Average	100	3	2	9153.33	49.74	74.00	-24.26	41.77	7.97	Peak	100	3	3	13730.00	45.09	68.20	-23.11	36.58	8.51	Average	314	326	4	13730.00	52.73	88.20	-35.47	44.22	8.51	Peak	314	326
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9153.33	36.73	54.00	-17.27	28.76	7.97	Average	100	3																																												
2	9153.33	49.74	74.00	-24.26	41.77	7.97	Peak	100	3																																												
3	13730.00	45.09	68.20	-23.11	36.58	8.51	Average	314	326																																												
4	13730.00	52.73	88.20	-35.47	44.22	8.51	Peak	314	326																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6865																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9153.33</td><td>35.84</td><td>54.00</td><td>-18.16</td><td>27.87</td><td>7.97</td><td>Average</td><td>100</td><td>142</td></tr><tr><td>2</td><td>9153.33</td><td>49.08</td><td>74.00</td><td>-24.92</td><td>41.11</td><td>7.97</td><td>Peak</td><td>100</td><td>142</td></tr><tr><td>3</td><td>13730.00</td><td>41.64</td><td>68.20</td><td>-26.56</td><td>33.13</td><td>8.51</td><td>Average</td><td>125</td><td>281</td></tr><tr><td>4</td><td>13730.00</td><td>52.93</td><td>88.20</td><td>-35.27</td><td>44.42</td><td>8.51</td><td>Peak</td><td>125</td><td>281</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9153.33	35.84	54.00	-18.16	27.87	7.97	Average	100	142	2	9153.33	49.08	74.00	-24.92	41.11	7.97	Peak	100	142	3	13730.00	41.64	68.20	-26.56	33.13	8.51	Average	125	281	4	13730.00	52.93	88.20	-35.27	44.42	8.51	Peak	125	281
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9153.33	35.84	54.00	-18.16	27.87	7.97	Average	100	142																																												
2	9153.33	49.08	74.00	-24.92	41.11	7.97	Peak	100	142																																												
3	13730.00	41.64	68.20	-26.56	33.13	8.51	Average	125	281																																												
4	13730.00	52.93	88.20	-35.27	44.42	8.51	Peak	125	281																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6945																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9260.00</td><td>37.37</td><td>68.20</td><td>-30.83</td><td>28.88</td><td>8.49</td><td>Average</td><td>100</td><td>359</td></tr><tr><td>2</td><td>9260.00</td><td>49.72</td><td>88.20</td><td>-38.48</td><td>41.23</td><td>8.49</td><td>Peak</td><td>100</td><td>359</td></tr><tr><td>3</td><td>13890.00</td><td>45.40</td><td>68.20</td><td>-22.80</td><td>36.62</td><td>8.78</td><td>Average</td><td>306</td><td>322</td></tr><tr><td>4</td><td>13890.00</td><td>52.80</td><td>88.20</td><td>-35.40</td><td>44.02</td><td>8.78</td><td>Peak</td><td>306</td><td>322</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9260.00	37.37	68.20	-30.83	28.88	8.49	Average	100	359	2	9260.00	49.72	88.20	-38.48	41.23	8.49	Peak	100	359	3	13890.00	45.40	68.20	-22.80	36.62	8.78	Average	306	322	4	13890.00	52.80	88.20	-35.40	44.02	8.78	Peak	306	322
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9260.00	37.37	68.20	-30.83	28.88	8.49	Average	100	359																																												
2	9260.00	49.72	88.20	-38.48	41.23	8.49	Peak	100	359																																												
3	13890.00	45.40	68.20	-22.80	36.62	8.78	Average	306	322																																												
4	13890.00	52.80	88.20	-35.40	44.02	8.78	Peak	306	322																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					




Modulation	be EHT80_OFDMA	Test Freq. (MHz)	6945																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9260.00</td><td>36.42</td><td>68.20</td><td>-31.78</td><td>27.93</td><td>8.49</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>2</td><td>9260.00</td><td>48.97</td><td>88.20</td><td>-39.23</td><td>40.48</td><td>8.49</td><td>Peak</td><td>100</td><td>156</td></tr><tr><td>3</td><td>13890.00</td><td>42.04</td><td>68.20</td><td>-26.16</td><td>33.26</td><td>8.78</td><td>Average</td><td>116</td><td>273</td></tr><tr><td>4</td><td>13890.00</td><td>53.13</td><td>88.20</td><td>-35.07</td><td>44.35</td><td>8.78</td><td>Peak</td><td>116</td><td>273</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9260.00	36.42	68.20	-31.78	27.93	8.49	Average	100	156	2	9260.00	48.97	88.20	-39.23	40.48	8.49	Peak	100	156	3	13890.00	42.04	68.20	-26.16	33.26	8.78	Average	116	273	4	13890.00	53.13	88.20	-35.07	44.35	8.78	Peak	116	273
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9260.00	36.42	68.20	-31.78	27.93	8.49	Average	100	156																																												
2	9260.00	48.97	88.20	-39.23	40.48	8.49	Peak	100	156																																												
3	13890.00	42.04	68.20	-26.16	33.26	8.78	Average	116	273																																												
4	13890.00	53.13	88.20	-35.07	44.35	8.78	Peak	116	273																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	7025																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9366.66</td><td>37.50</td><td>54.00</td><td>-16.50</td><td>28.93</td><td>8.57</td><td>Average</td><td>100</td><td>1</td></tr><tr><td>2</td><td>9366.66</td><td>49.56</td><td>74.00</td><td>-24.44</td><td>40.99</td><td>8.57</td><td>Peak</td><td>100</td><td>1</td></tr><tr><td>3</td><td>14050.00</td><td>45.80</td><td>68.20</td><td>-22.40</td><td>36.55</td><td>9.25</td><td>Average</td><td>311</td><td>319</td></tr><tr><td>4</td><td>14050.00</td><td>53.12</td><td>88.20</td><td>-35.08</td><td>43.87</td><td>9.25</td><td>Peak</td><td>311</td><td>319</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9366.66	37.50	54.00	-16.50	28.93	8.57	Average	100	1	2	9366.66	49.56	74.00	-24.44	40.99	8.57	Peak	100	1	3	14050.00	45.80	68.20	-22.40	36.55	9.25	Average	311	319	4	14050.00	53.12	88.20	-35.08	43.87	9.25	Peak	311	319
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9366.66	37.50	54.00	-16.50	28.93	8.57	Average	100	1																																												
2	9366.66	49.56	74.00	-24.44	40.99	8.57	Peak	100	1																																												
3	14050.00	45.80	68.20	-22.40	36.55	9.25	Average	311	319																																												
4	14050.00	53.12	88.20	-35.08	43.87	9.25	Peak	311	319																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

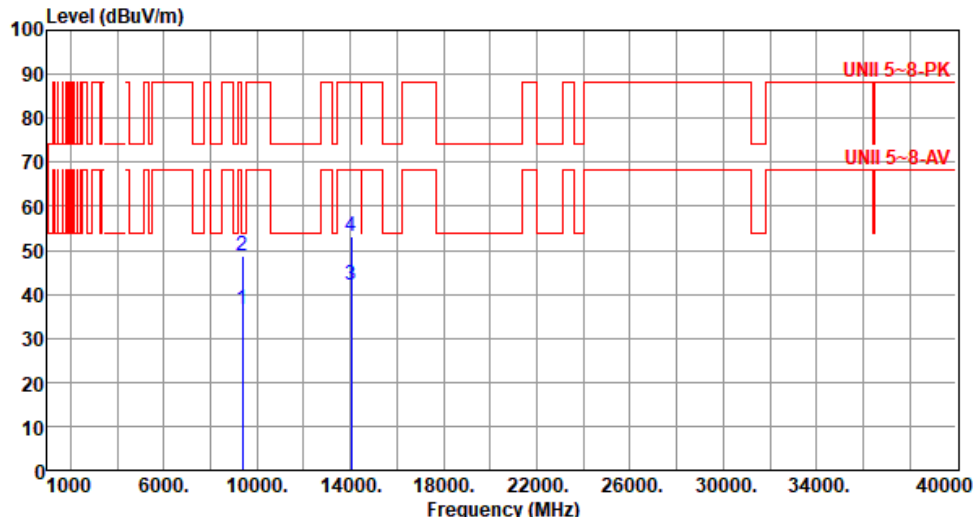

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	7025																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9366.66</td><td>36.40</td><td>54.00</td><td>-17.60</td><td>27.83</td><td>8.57</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>2</td><td>9366.66</td><td>48.79</td><td>74.00</td><td>-25.21</td><td>40.22</td><td>8.57</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>3</td><td>14050.00</td><td>42.22</td><td>68.20</td><td>-25.98</td><td>32.97</td><td>9.25</td><td>Average</td><td>128</td><td>261</td></tr><tr><td>4</td><td>14050.00</td><td>52.99</td><td>88.20</td><td>-35.21</td><td>43.74</td><td>9.25</td><td>Peak</td><td>128</td><td>261</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9366.66	36.40	54.00	-17.60	27.83	8.57	Average	100	147	2	9366.66	48.79	74.00	-25.21	40.22	8.57	Peak	100	147	3	14050.00	42.22	68.20	-25.98	32.97	9.25	Average	128	261	4	14050.00	52.99	88.20	-35.21	43.74	9.25	Peak	128	261
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9366.66	36.40	54.00	-17.60	27.83	8.57	Average	100	147																																												
2	9366.66	48.79	74.00	-25.21	40.22	8.57	Peak	100	147																																												
3	14050.00	42.22	68.20	-25.98	32.97	9.25	Average	128	261																																												
4	14050.00	52.99	88.20	-35.21	43.74	9.25	Peak	128	261																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6025
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) UNII 5~8-PK UNII 5~8-AV Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dB reading dB/m High Table dBuV/m dBuV deg 1 8033.33 36.34 54.00 -17.66 29.19 7.15 Average 100 353 2 8033.33 48.19 74.00 -25.81 41.04 7.15 Peak 100 353 3 12050.00 42.15 54.00 -11.85 33.46 8.69 Average 112 281 4 12050.00 51.62 74.00 -22.38 42.93 8.69 Peak 112 281			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Unwanted Emissions

Appendix D

Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6025																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8033.33</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>35.34</td><td>7.15</td><td>Average</td><td>100</td><td>346</td></tr><tr><td>2</td><td>8033.33</td><td>48.72</td><td>74.00</td><td>-25.28</td><td>41.57</td><td>7.15</td><td>Peak</td><td>100</td><td>346</td></tr><tr><td>3</td><td>12050.00</td><td>39.19</td><td>54.00</td><td>-14.81</td><td>30.50</td><td>8.69</td><td>Average</td><td>229</td><td>75</td></tr><tr><td>4</td><td>12050.00</td><td>49.90</td><td>74.00</td><td>-24.10</td><td>41.21</td><td>8.69</td><td>Peak</td><td>229</td><td>75</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8033.33	42.49	54.00	-11.51	35.34	7.15	Average	100	346	2	8033.33	48.72	74.00	-25.28	41.57	7.15	Peak	100	346	3	12050.00	39.19	54.00	-14.81	30.50	8.69	Average	229	75	4	12050.00	49.90	74.00	-24.10	41.21	8.69	Peak	229	75
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8033.33	42.49	54.00	-11.51	35.34	7.15	Average	100	346																																												
2	8033.33	48.72	74.00	-25.28	41.57	7.15	Peak	100	346																																												
3	12050.00	39.19	54.00	-14.81	30.50	8.69	Average	229	75																																												
4	12050.00	49.90	74.00	-24.10	41.21	8.69	Peak	229	75																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6185																																																												
Polarization	Horizontal																																																														
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																															
Level (dBUV/m) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8246.66</td><td>36.02</td><td>54.00</td><td>-17.98</td><td>29.21</td><td>6.81</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>2</td><td>8246.66</td><td>48.13</td><td>74.00</td><td>-25.87</td><td>41.32</td><td>6.81</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>3</td><td>12370.00</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>33.86</td><td>8.45</td><td>Average</td><td>121</td><td>293</td></tr><tr><td>4</td><td>12370.00</td><td>51.79</td><td>74.00</td><td>-22.21</td><td>43.34</td><td>8.45</td><td>Peak</td><td>121</td><td>293</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	8246.66	36.02	54.00	-17.98	29.21	6.81	Average	100	334	2	8246.66	48.13	74.00	-25.87	41.32	6.81	Peak	100	334	3	12370.00	42.31	54.00	-11.69	33.86	8.45	Average	121	293	4	12370.00	51.79	74.00	-22.21	43.34	8.45	Peak	121	293
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																						
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																																						
1	8246.66	36.02	54.00	-17.98	29.21	6.81	Average	100	334																																																						
2	8246.66	48.13	74.00	-25.87	41.32	6.81	Peak	100	334																																																						
3	12370.00	42.31	54.00	-11.69	33.86	8.45	Average	121	293																																																						
4	12370.00	51.79	74.00	-22.21	43.34	8.45	Peak	121	293																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															




Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6185																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8246.66</td><td>42.23</td><td>54.00</td><td>-11.77</td><td>35.42</td><td>6.81</td><td>Average</td><td>100</td><td>325</td></tr><tr><td>2</td><td>8246.66</td><td>48.82</td><td>74.00</td><td>-25.18</td><td>42.01</td><td>6.81</td><td>Peak</td><td>100</td><td>325</td></tr><tr><td>3</td><td>12370.00</td><td>39.58</td><td>54.00</td><td>-14.42</td><td>31.13</td><td>8.45</td><td>Average</td><td>233</td><td>82</td></tr><tr><td>4</td><td>12370.00</td><td>49.81</td><td>74.00</td><td>-24.19</td><td>41.36</td><td>8.45</td><td>Peak</td><td>233</td><td>82</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8246.66	42.23	54.00	-11.77	35.42	6.81	Average	100	325	2	8246.66	48.82	74.00	-25.18	42.01	6.81	Peak	100	325	3	12370.00	39.58	54.00	-14.42	31.13	8.45	Average	233	82	4	12370.00	49.81	74.00	-24.19	41.36	8.45	Peak	233	82
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8246.66	42.23	54.00	-11.77	35.42	6.81	Average	100	325																																												
2	8246.66	48.82	74.00	-25.18	42.01	6.81	Peak	100	325																																												
3	12370.00	39.58	54.00	-14.42	31.13	8.45	Average	233	82																																												
4	12370.00	49.81	74.00	-24.19	41.36	8.45	Peak	233	82																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6345																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8460.00</td><td>36.02</td><td>54.00</td><td>-17.98</td><td>29.36</td><td>6.66</td><td>Average</td><td>100</td><td>321</td></tr><tr><td>2</td><td>8460.00</td><td>48.06</td><td>74.00</td><td>-25.94</td><td>41.40</td><td>6.66</td><td>Peak</td><td>100</td><td>321</td></tr><tr><td>3</td><td>12690.00</td><td>42.12</td><td>54.00</td><td>-11.88</td><td>33.63</td><td>8.49</td><td>Average</td><td>108</td><td>294</td></tr><tr><td>4</td><td>12690.00</td><td>51.75</td><td>74.00</td><td>-22.25</td><td>43.26</td><td>8.49</td><td>Peak</td><td>108</td><td>294</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8460.00	36.02	54.00	-17.98	29.36	6.66	Average	100	321	2	8460.00	48.06	74.00	-25.94	41.40	6.66	Peak	100	321	3	12690.00	42.12	54.00	-11.88	33.63	8.49	Average	108	294	4	12690.00	51.75	74.00	-22.25	43.26	8.49	Peak	108	294
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8460.00	36.02	54.00	-17.98	29.36	6.66	Average	100	321																																												
2	8460.00	48.06	74.00	-25.94	41.40	6.66	Peak	100	321																																												
3	12690.00	42.12	54.00	-11.88	33.63	8.49	Average	108	294																																												
4	12690.00	51.75	74.00	-22.25	43.26	8.49	Peak	108	294																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

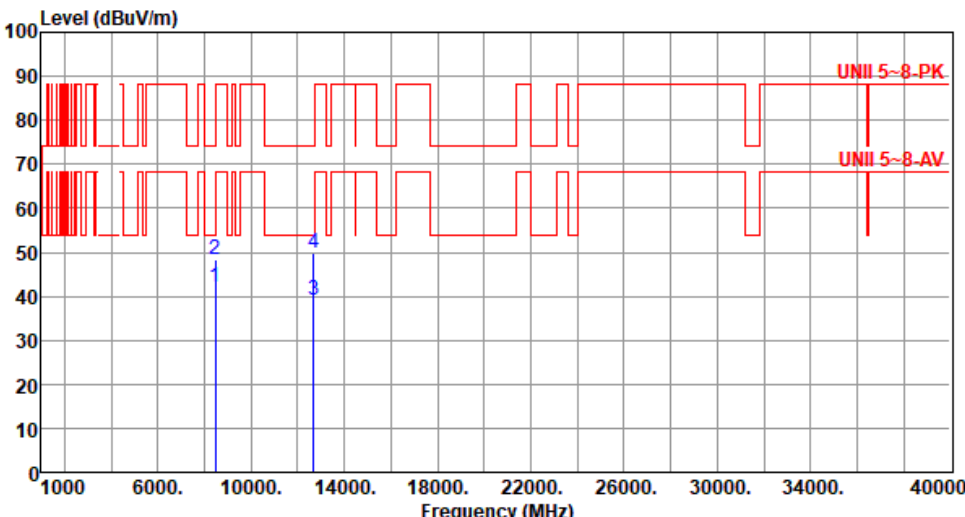

Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6345																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8460.00</td><td>42.08</td><td>54.00</td><td>-11.92</td><td>35.42</td><td>6.66</td><td>Average</td><td>100</td><td>355</td></tr><tr><td>2</td><td>8460.00</td><td>48.38</td><td>74.00</td><td>-25.62</td><td>41.72</td><td>6.66</td><td>Peak</td><td>100</td><td>355</td></tr><tr><td>3</td><td>12690.00</td><td>39.13</td><td>54.00</td><td>-14.87</td><td>30.64</td><td>8.49</td><td>Average</td><td>218</td><td>66</td></tr><tr><td>4</td><td>12690.00</td><td>49.97</td><td>74.00</td><td>-24.03</td><td>41.48</td><td>8.49</td><td>Peak</td><td>218</td><td>66</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8460.00	42.08	54.00	-11.92	35.42	6.66	Average	100	355	2	8460.00	48.38	74.00	-25.62	41.72	6.66	Peak	100	355	3	12690.00	39.13	54.00	-14.87	30.64	8.49	Average	218	66	4	12690.00	49.97	74.00	-24.03	41.48	8.49	Peak	218	66
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8460.00	42.08	54.00	-11.92	35.42	6.66	Average	100	355																																												
2	8460.00	48.38	74.00	-25.62	41.72	6.66	Peak	100	355																																												
3	12690.00	39.13	54.00	-14.87	30.64	8.49	Average	218	66																																												
4	12690.00	49.97	74.00	-24.03	41.48	8.49	Peak	218	66																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6505
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBUV/m) </			



Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6505																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8673.33</td><td>35.04</td><td>68.20</td><td>-33.16</td><td>27.65</td><td>7.39</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>2</td><td>8673.33</td><td>50.07</td><td>88.20</td><td>-38.13</td><td>42.68</td><td>7.39</td><td>Peak</td><td>100</td><td>288</td></tr><tr><td>3</td><td>13010.00</td><td>42.40</td><td>68.20</td><td>-25.80</td><td>33.56</td><td>8.84</td><td>Average</td><td>192</td><td>263</td></tr><tr><td>4</td><td>13010.00</td><td>52.36</td><td>88.20</td><td>-35.84</td><td>43.52</td><td>8.84</td><td>Peak</td><td>192</td><td>263</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8673.33	35.04	68.20	-33.16	27.65	7.39	Average	100	288	2	8673.33	50.07	88.20	-38.13	42.68	7.39	Peak	100	288	3	13010.00	42.40	68.20	-25.80	33.56	8.84	Average	192	263	4	13010.00	52.36	88.20	-35.84	43.52	8.84	Peak	192	263
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8673.33	35.04	68.20	-33.16	27.65	7.39	Average	100	288																																												
2	8673.33	50.07	88.20	-38.13	42.68	7.39	Peak	100	288																																												
3	13010.00	42.40	68.20	-25.80	33.56	8.84	Average	192	263																																												
4	13010.00	52.36	88.20	-35.84	43.52	8.84	Peak	192	263																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6665																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8886.66</td><td>36.52</td><td>68.20</td><td>-31.68</td><td>28.94</td><td>7.58</td><td>Average</td><td>100</td><td>268</td></tr><tr><td>2</td><td>8886.66</td><td>49.09</td><td>88.20</td><td>-39.11</td><td>41.51</td><td>7.58</td><td>Peak</td><td>100</td><td>268</td></tr><tr><td>3</td><td>13330.00</td><td>46.22</td><td>54.00</td><td>-7.78</td><td>37.85</td><td>8.37</td><td>Average</td><td>296</td><td>343</td></tr><tr><td>4</td><td>13330.00</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>44.36</td><td>8.37</td><td>Peak</td><td>296</td><td>343</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8886.66	36.52	68.20	-31.68	28.94	7.58	Average	100	268	2	8886.66	49.09	88.20	-39.11	41.51	7.58	Peak	100	268	3	13330.00	46.22	54.00	-7.78	37.85	8.37	Average	296	343	4	13330.00	52.73	74.00	-21.27	44.36	8.37	Peak	296	343
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8886.66	36.52	68.20	-31.68	28.94	7.58	Average	100	268																																												
2	8886.66	49.09	88.20	-39.11	41.51	7.58	Peak	100	268																																												
3	13330.00	46.22	54.00	-7.78	37.85	8.37	Average	296	343																																												
4	13330.00	52.73	74.00	-21.27	44.36	8.37	Peak	296	343																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6665																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8886.66</td><td>35.89</td><td>68.20</td><td>-32.31</td><td>28.31</td><td>7.58</td><td>Average</td><td>100</td><td>276</td></tr><tr><td>2</td><td>8886.66</td><td>50.31</td><td>88.20</td><td>-37.89</td><td>42.73</td><td>7.58</td><td>Peak</td><td>100</td><td>276</td></tr><tr><td>3</td><td>13330.00</td><td>42.03</td><td>54.00</td><td>-11.97</td><td>33.66</td><td>8.37</td><td>Average</td><td>202</td><td>258</td></tr><tr><td>4</td><td>13330.00</td><td>52.19</td><td>74.00</td><td>-21.81</td><td>43.82</td><td>8.37</td><td>Peak</td><td>202</td><td>258</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8886.66	35.89	68.20	-32.31	28.31	7.58	Average	100	276	2	8886.66	50.31	88.20	-37.89	42.73	7.58	Peak	100	276	3	13330.00	42.03	54.00	-11.97	33.66	8.37	Average	202	258	4	13330.00	52.19	74.00	-21.81	43.82	8.37	Peak	202	258
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8886.66	35.89	68.20	-32.31	28.31	7.58	Average	100	276																																												
2	8886.66	50.31	88.20	-37.89	42.73	7.58	Peak	100	276																																												
3	13330.00	42.03	54.00	-11.97	33.66	8.37	Average	202	258																																												
4	13330.00	52.19	74.00	-21.81	43.82	8.37	Peak	202	258																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6825
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6825																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9100.00</td><td>35.51</td><td>54.00</td><td>-18.49</td><td>27.73</td><td>7.78</td><td>Average</td><td>100</td><td>294</td></tr><tr><td>2</td><td>9100.00</td><td>50.53</td><td>74.00</td><td>-23.47</td><td>42.75</td><td>7.78</td><td>Peak</td><td>100</td><td>294</td></tr><tr><td>3</td><td>13650.00</td><td>42.18</td><td>68.20</td><td>-26.02</td><td>33.72</td><td>8.46</td><td>Average</td><td>186</td><td>257</td></tr><tr><td>4</td><td>13650.00</td><td>51.26</td><td>88.20</td><td>-36.94</td><td>42.80</td><td>8.46</td><td>Peak</td><td>186</td><td>257</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9100.00	35.51	54.00	-18.49	27.73	7.78	Average	100	294	2	9100.00	50.53	74.00	-23.47	42.75	7.78	Peak	100	294	3	13650.00	42.18	68.20	-26.02	33.72	8.46	Average	186	257	4	13650.00	51.26	88.20	-36.94	42.80	8.46	Peak	186	257
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	9100.00	35.51	54.00	-18.49	27.73	7.78	Average	100	294																																												
2	9100.00	50.53	74.00	-23.47	42.75	7.78	Peak	100	294																																												
3	13650.00	42.18	68.20	-26.02	33.72	8.46	Average	186	257																																												
4	13650.00	51.26	88.20	-36.94	42.80	8.46	Peak	186	257																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6985																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m) UNII 5~8-PK UNII 5~8-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>49.38</td><td>54.00</td><td>-4.62</td><td>42.65</td><td>6.73</td><td>Average</td><td>185</td><td>349</td></tr><tr><td>2</td><td>7250.00</td><td>61.14</td><td>74.00</td><td>-12.86</td><td>54.41</td><td>6.73</td><td>Peak</td><td>185</td><td>349</td></tr><tr><td>3</td><td>9313.33</td><td>37.34</td><td>54.00</td><td>-16.66</td><td>28.73</td><td>8.61</td><td>Average</td><td>100</td><td>291</td></tr><tr><td>4</td><td>9313.33</td><td>49.99</td><td>74.00</td><td>-24.01</td><td>41.38</td><td>8.61</td><td>Peak</td><td>100</td><td>291</td></tr><tr><td>5</td><td>13970.00</td><td>46.84</td><td>68.20</td><td>-21.36</td><td>37.95</td><td>8.89</td><td>Average</td><td>311</td><td>322</td></tr><tr><td>6</td><td>13970.00</td><td>53.23</td><td>88.20</td><td>-34.97</td><td>44.34</td><td>8.89</td><td>Peak</td><td>311</td><td>322</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	49.38	54.00	-4.62	42.65	6.73	Average	185	349	2	7250.00	61.14	74.00	-12.86	54.41	6.73	Peak	185	349	3	9313.33	37.34	54.00	-16.66	28.73	8.61	Average	100	291	4	9313.33	49.99	74.00	-24.01	41.38	8.61	Peak	100	291	5	13970.00	46.84	68.20	-21.36	37.95	8.89	Average	311	322	6	13970.00	53.23	88.20	-34.97	44.34	8.89	Peak	311	322
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7250.00	49.38	54.00	-4.62	42.65	6.73	Average	185	349																																																																
2	7250.00	61.14	74.00	-12.86	54.41	6.73	Peak	185	349																																																																
3	9313.33	37.34	54.00	-16.66	28.73	8.61	Average	100	291																																																																
4	9313.33	49.99	74.00	-24.01	41.38	8.61	Peak	100	291																																																																
5	13970.00	46.84	68.20	-21.36	37.95	8.89	Average	311	322																																																																
6	13970.00	53.23	88.20	-34.97	44.34	8.89	Peak	311	322																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT160_OFDMA	Test Freq. (MHz)	6985																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>50.24</td><td>54.00</td><td>-3.76</td><td>43.51</td><td>6.73</td><td>Average</td><td>311</td><td>58</td></tr><tr><td>2</td><td>7250.00</td><td>62.37</td><td>74.00</td><td>-11.63</td><td>55.64</td><td>6.73</td><td>Peak</td><td>311</td><td>58</td></tr><tr><td>3</td><td>9313.33</td><td>36.19</td><td>54.00</td><td>-17.81</td><td>27.58</td><td>8.61</td><td>Average</td><td>100</td><td>283</td></tr><tr><td>4</td><td>9313.33</td><td>50.12</td><td>74.00</td><td>-23.88</td><td>41.51</td><td>8.61</td><td>Peak</td><td>100</td><td>283</td></tr><tr><td>5</td><td>13970.00</td><td>42.50</td><td>68.20</td><td>-25.70</td><td>33.61</td><td>8.89</td><td>Average</td><td>184</td><td>288</td></tr><tr><td>6</td><td>13970.00</td><td>52.27</td><td>88.20</td><td>-35.93</td><td>43.38</td><td>8.89</td><td>Peak</td><td>184</td><td>288</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	50.24	54.00	-3.76	43.51	6.73	Average	311	58	2	7250.00	62.37	74.00	-11.63	55.64	6.73	Peak	311	58	3	9313.33	36.19	54.00	-17.81	27.58	8.61	Average	100	283	4	9313.33	50.12	74.00	-23.88	41.51	8.61	Peak	100	283	5	13970.00	42.50	68.20	-25.70	33.61	8.89	Average	184	288	6	13970.00	52.27	88.20	-35.93	43.38	8.89	Peak	184	288
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7250.00	50.24	54.00	-3.76	43.51	6.73	Average	311	58																																																																
2	7250.00	62.37	74.00	-11.63	55.64	6.73	Peak	311	58																																																																
3	9313.33	36.19	54.00	-17.81	27.58	8.61	Average	100	283																																																																
4	9313.33	50.12	74.00	-23.88	41.51	8.61	Peak	100	283																																																																
5	13970.00	42.50	68.20	-25.70	33.61	8.89	Average	184	288																																																																
6	13970.00	52.27	88.20	-35.93	43.38	8.89	Peak	184	288																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6105																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8140.00</td><td>37.67</td><td>54.00</td><td>-16.33</td><td>30.61</td><td>7.06</td><td>Average</td><td>100</td><td>274</td></tr><tr><td>2</td><td>8140.00</td><td>47.31</td><td>74.00</td><td>-26.69</td><td>40.25</td><td>7.06</td><td>Peak</td><td>100</td><td>274</td></tr><tr><td>3</td><td>12210.00</td><td>43.61</td><td>54.00</td><td>-10.39</td><td>34.78</td><td>8.83</td><td>Average</td><td>225</td><td>26</td></tr><tr><td>4</td><td>12210.00</td><td>61.38</td><td>74.00</td><td>-12.62</td><td>52.55</td><td>8.83</td><td>Peak</td><td>225</td><td>26</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8140.00	37.67	54.00	-16.33	30.61	7.06	Average	100	274	2	8140.00	47.31	74.00	-26.69	40.25	7.06	Peak	100	274	3	12210.00	43.61	54.00	-10.39	34.78	8.83	Average	225	26	4	12210.00	61.38	74.00	-12.62	52.55	8.83	Peak	225	26
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8140.00	37.67	54.00	-16.33	30.61	7.06	Average	100	274																																												
2	8140.00	47.31	74.00	-26.69	40.25	7.06	Peak	100	274																																												
3	12210.00	43.61	54.00	-10.39	34.78	8.83	Average	225	26																																												
4	12210.00	61.38	74.00	-12.62	52.55	8.83	Peak	225	26																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6105																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8140.00</td><td>37.61</td><td>54.00</td><td>-16.39</td><td>30.55</td><td>7.06</td><td>Average</td><td>124</td><td>19</td></tr><tr><td>2</td><td>8140.00</td><td>47.67</td><td>74.00</td><td>-26.33</td><td>40.61</td><td>7.06</td><td>Peak</td><td>124</td><td>19</td></tr><tr><td>3</td><td>12210.00</td><td>41.07</td><td>54.00</td><td>-12.93</td><td>32.24</td><td>8.83</td><td>Average</td><td>308</td><td>251</td></tr><tr><td>4</td><td>12210.00</td><td>51.17</td><td>74.00</td><td>-22.83</td><td>42.34</td><td>8.83</td><td>Peak</td><td>308</td><td>251</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8140.00	37.61	54.00	-16.39	30.55	7.06	Average	124	19	2	8140.00	47.67	74.00	-26.33	40.61	7.06	Peak	124	19	3	12210.00	41.07	54.00	-12.93	32.24	8.83	Average	308	251	4	12210.00	51.17	74.00	-22.83	42.34	8.83	Peak	308	251
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8140.00	37.61	54.00	-16.39	30.55	7.06	Average	124	19																																												
2	8140.00	47.67	74.00	-26.33	40.61	7.06	Peak	124	19																																												
3	12210.00	41.07	54.00	-12.93	32.24	8.83	Average	308	251																																												
4	12210.00	51.17	74.00	-22.83	42.34	8.83	Peak	308	251																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions


Appendix D

Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6265																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8353.33</td><td>34.75</td><td>54.00</td><td>-19.25</td><td>28.13</td><td>6.62</td><td>Average</td><td>100</td><td>273</td></tr><tr><td>2</td><td>8353.33</td><td>47.94</td><td>74.00</td><td>-26.06</td><td>41.32</td><td>6.62</td><td>Peak</td><td>100</td><td>273</td></tr><tr><td>3</td><td>12530.00</td><td>46.56</td><td>54.00</td><td>-7.44</td><td>38.33</td><td>8.23</td><td>Average</td><td>323</td><td>226</td></tr><tr><td>4</td><td>12530.00</td><td>52.06</td><td>74.00</td><td>-21.94</td><td>43.83</td><td>8.23</td><td>Peak</td><td>323</td><td>226</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8353.33	34.75	54.00	-19.25	28.13	6.62	Average	100	273	2	8353.33	47.94	74.00	-26.06	41.32	6.62	Peak	100	273	3	12530.00	46.56	54.00	-7.44	38.33	8.23	Average	323	226	4	12530.00	52.06	74.00	-21.94	43.83	8.23	Peak	323	226
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8353.33	34.75	54.00	-19.25	28.13	6.62	Average	100	273																																												
2	8353.33	47.94	74.00	-26.06	41.32	6.62	Peak	100	273																																												
3	12530.00	46.56	54.00	-7.44	38.33	8.23	Average	323	226																																												
4	12530.00	52.06	74.00	-21.94	43.83	8.23	Peak	323	226																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6265																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8353.33</td><td>34.95</td><td>54.00</td><td>-19.05</td><td>28.33</td><td>6.62</td><td>Average</td><td>100</td><td>219</td></tr><tr><td>2</td><td>8353.33</td><td>48.23</td><td>74.00</td><td>-25.77</td><td>41.61</td><td>6.62</td><td>Peak</td><td>100</td><td>219</td></tr><tr><td>3</td><td>12530.00</td><td>41.37</td><td>54.00</td><td>-12.63</td><td>33.14</td><td>8.23</td><td>Average</td><td>307</td><td>264</td></tr><tr><td>4</td><td>12530.00</td><td>51.23</td><td>74.00</td><td>-22.77</td><td>43.00</td><td>8.23</td><td>Peak</td><td>307</td><td>264</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8353.33	34.95	54.00	-19.05	28.33	6.62	Average	100	219	2	8353.33	48.23	74.00	-25.77	41.61	6.62	Peak	100	219	3	12530.00	41.37	54.00	-12.63	33.14	8.23	Average	307	264	4	12530.00	51.23	74.00	-22.77	43.00	8.23	Peak	307	264
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8353.33	34.95	54.00	-19.05	28.33	6.62	Average	100	219																																												
2	8353.33	48.23	74.00	-25.77	41.61	6.62	Peak	100	219																																												
3	12530.00	41.37	54.00	-12.63	33.14	8.23	Average	307	264																																												
4	12530.00	51.23	74.00	-22.77	43.00	8.23	Peak	307	264																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

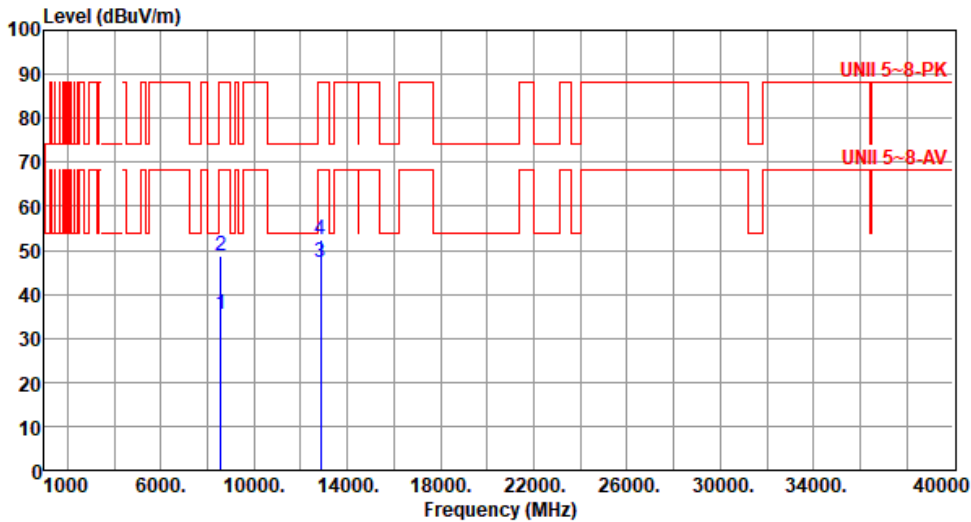

Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6425																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8566.66</td><td>35.53</td><td>68.20</td><td>-32.67</td><td>28.32</td><td>7.21</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>2</td><td>8566.66</td><td>48.67</td><td>88.20</td><td>-39.53</td><td>41.46</td><td>7.21</td><td>Peak</td><td>100</td><td>288</td></tr><tr><td>3</td><td>12850.00</td><td>47.11</td><td>68.20</td><td>-21.09</td><td>38.28</td><td>8.83</td><td>Average</td><td>331</td><td>216</td></tr><tr><td>4</td><td>12850.00</td><td>52.58</td><td>88.20</td><td>-35.62</td><td>43.75</td><td>8.83</td><td>Peak</td><td>331</td><td>216</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8566.66	35.53	68.20	-32.67	28.32	7.21	Average	100	288	2	8566.66	48.67	88.20	-39.53	41.46	7.21	Peak	100	288	3	12850.00	47.11	68.20	-21.09	38.28	8.83	Average	331	216	4	12850.00	52.58	88.20	-35.62	43.75	8.83	Peak	331	216
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8566.66	35.53	68.20	-32.67	28.32	7.21	Average	100	288																																												
2	8566.66	48.67	88.20	-39.53	41.46	7.21	Peak	100	288																																												
3	12850.00	47.11	68.20	-21.09	38.28	8.83	Average	331	216																																												
4	12850.00	52.58	88.20	-35.62	43.75	8.83	Peak	331	216																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

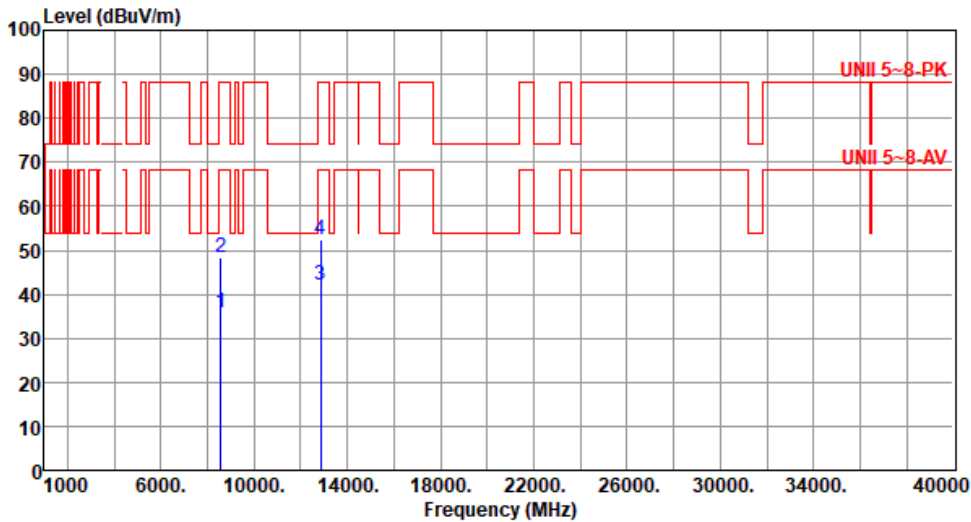

Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6425																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8566.66</td><td>35.74</td><td>68.20</td><td>-32.46</td><td>28.53</td><td>7.21</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>2</td><td>8566.66</td><td>48.46</td><td>88.20</td><td>-39.74</td><td>41.25</td><td>7.21</td><td>Peak</td><td>100</td><td>206</td></tr><tr><td>3</td><td>12850.00</td><td>42.11</td><td>68.20</td><td>-26.09</td><td>33.28</td><td>8.83</td><td>Average</td><td>316</td><td>250</td></tr><tr><td>4</td><td>12850.00</td><td>52.51</td><td>88.20</td><td>-35.69</td><td>43.68</td><td>8.83</td><td>Peak</td><td>316</td><td>250</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8566.66	35.74	68.20	-32.46	28.53	7.21	Average	100	206	2	8566.66	48.46	88.20	-39.74	41.25	7.21	Peak	100	206	3	12850.00	42.11	68.20	-26.09	33.28	8.83	Average	316	250	4	12850.00	52.51	88.20	-35.69	43.68	8.83	Peak	316	250
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8566.66	35.74	68.20	-32.46	28.53	7.21	Average	100	206																																												
2	8566.66	48.46	88.20	-39.74	41.25	7.21	Peak	100	206																																												
3	12850.00	42.11	68.20	-26.09	33.28	8.83	Average	316	250																																												
4	12850.00	52.51	88.20	-35.69	43.68	8.83	Peak	316	250																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6585																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8780.00</td><td>35.98</td><td>68.20</td><td>-32.22</td><td>28.40</td><td>7.58</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>8780.00</td><td>48.76</td><td>88.20</td><td>-39.44</td><td>41.18</td><td>7.58</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>13170.00</td><td>46.66</td><td>68.20</td><td>-21.54</td><td>38.18</td><td>8.48</td><td>Average</td><td>238</td><td>286</td></tr><tr><td>4</td><td>13170.00</td><td>52.91</td><td>88.20</td><td>-35.29</td><td>44.43</td><td>8.48</td><td>Peak</td><td>238</td><td>286</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8780.00	35.98	68.20	-32.22	28.40	7.58	Average	100	253	2	8780.00	48.76	88.20	-39.44	41.18	7.58	Peak	100	253	3	13170.00	46.66	68.20	-21.54	38.18	8.48	Average	238	286	4	13170.00	52.91	88.20	-35.29	44.43	8.48	Peak	238	286
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8780.00	35.98	68.20	-32.22	28.40	7.58	Average	100	253																																												
2	8780.00	48.76	88.20	-39.44	41.18	7.58	Peak	100	253																																												
3	13170.00	46.66	68.20	-21.54	38.18	8.48	Average	238	286																																												
4	13170.00	52.91	88.20	-35.29	44.43	8.48	Peak	238	286																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6585																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8780.00</td><td>35.86</td><td>68.20</td><td>-32.34</td><td>28.28</td><td>7.58</td><td>Average</td><td>100</td><td>199</td></tr><tr><td>2</td><td>8780.00</td><td>49.00</td><td>88.20</td><td>-39.20</td><td>41.42</td><td>7.58</td><td>Peak</td><td>100</td><td>199</td></tr><tr><td>3</td><td>13170.00</td><td>40.52</td><td>68.20</td><td>-27.68</td><td>32.04</td><td>8.48</td><td>Average</td><td>183</td><td>84</td></tr><tr><td>4</td><td>13170.00</td><td>54.43</td><td>88.20</td><td>-33.77</td><td>45.95</td><td>8.48</td><td>Peak</td><td>183</td><td>84</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8780.00	35.86	68.20	-32.34	28.28	7.58	Average	100	199	2	8780.00	49.00	88.20	-39.20	41.42	7.58	Peak	100	199	3	13170.00	40.52	68.20	-27.68	32.04	8.48	Average	183	84	4	13170.00	54.43	88.20	-33.77	45.95	8.48	Peak	183	84
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	8780.00	35.86	68.20	-32.34	28.28	7.58	Average	100	199																																												
2	8780.00	49.00	88.20	-39.20	41.42	7.58	Peak	100	199																																												
3	13170.00	40.52	68.20	-27.68	32.04	8.48	Average	183	84																																												
4	13170.00	54.43	88.20	-33.77	45.95	8.48	Peak	183	84																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

Appendix D

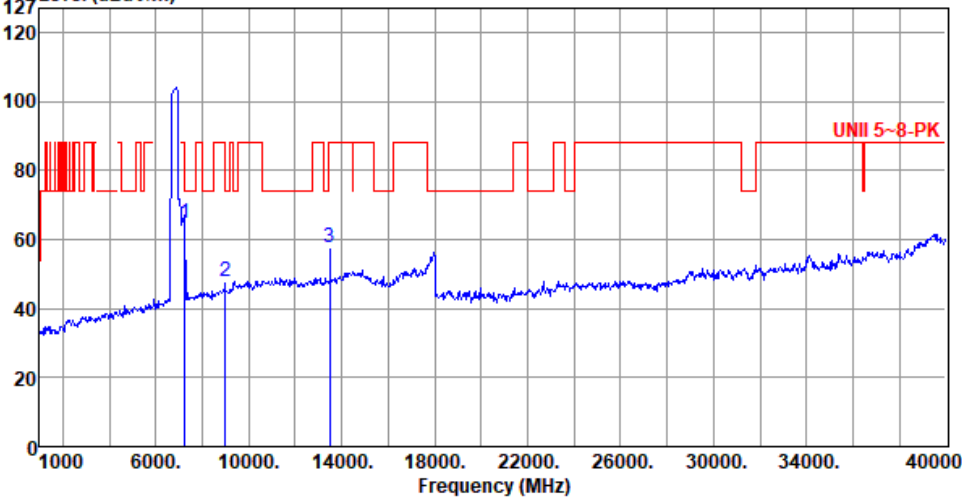Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6745																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>64.45</td><td>74.00</td><td>-9.55</td><td>57.72</td><td>6.73</td><td>Peak</td><td>125</td><td>326</td></tr><tr><td>2</td><td>8993.33</td><td>47.57</td><td>88.20</td><td>-40.63</td><td>40.08</td><td>7.49</td><td>Peak</td><td>100</td><td>221</td></tr><tr><td>3</td><td>13490.00</td><td>57.66</td><td>88.20</td><td>-30.54</td><td>49.21</td><td>8.45</td><td>Peak</td><td>219</td><td>311</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	64.45	74.00	-9.55	57.72	6.73	Peak	125	326	2	8993.33	47.57	88.20	-40.63	40.08	7.49	Peak	100	221	3	13490.00	57.66	88.20	-30.54	49.21	8.45	Peak	219	311
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	7250.00	64.45	74.00	-9.55	57.72	6.73	Peak	125	326																																		
2	8993.33	47.57	88.20	-40.63	40.08	7.49	Peak	100	221																																		
3	13490.00	57.66	88.20	-30.54	49.21	8.45	Peak	219	311																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Unwanted Emissions


Appendix D

Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6745																																								
Polarization	Horizontal-Average																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) UNII 5-8-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>51.53</td><td>54.00</td><td>-2.47</td><td>44.80</td><td>6.73</td><td>Average</td><td>125</td><td>326</td></tr><tr><td>2</td><td>8993.33</td><td>36.15</td><td>68.20</td><td>-32.05</td><td>28.66</td><td>7.49</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>3</td><td>13490.00</td><td>48.55</td><td>68.20</td><td>-19.65</td><td>40.10</td><td>8.45</td><td>Average</td><td>219</td><td>311</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	51.53	54.00	-2.47	44.80	6.73	Average	125	326	2	8993.33	36.15	68.20	-32.05	28.66	7.49	Average	100	221	3	13490.00	48.55	68.20	-19.65	40.10	8.45	Average	219	311
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	7250.00	51.53	54.00	-2.47	44.80	6.73	Average	125	326																																		
2	8993.33	36.15	68.20	-32.05	28.66	7.49	Average	100	221																																		
3	13490.00	48.55	68.20	-19.65	40.10	8.45	Average	219	311																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

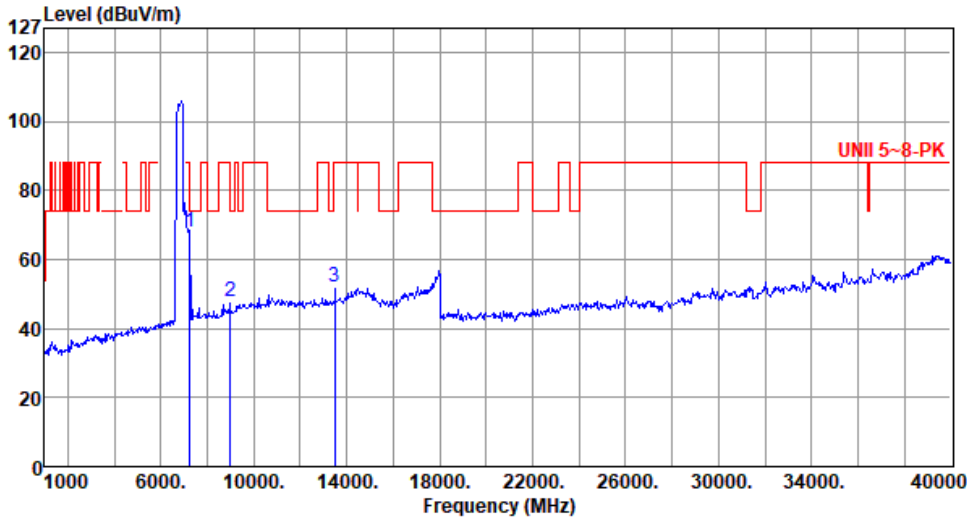Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6745																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>68.03</td><td>74.00</td><td>-5.97</td><td>61.30</td><td>6.73</td><td>Peak</td><td>133</td><td>181</td></tr><tr><td>2</td><td>8993.33</td><td>48.01</td><td>88.20</td><td>-40.19</td><td>40.52</td><td>7.49</td><td>Peak</td><td>100</td><td>62</td></tr><tr><td>3</td><td>13490.00</td><td>51.89</td><td>88.20</td><td>-36.31</td><td>43.44</td><td>8.45</td><td>Peak</td><td>240</td><td>235</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	68.03	74.00	-5.97	61.30	6.73	Peak	133	181	2	8993.33	48.01	88.20	-40.19	40.52	7.49	Peak	100	62	3	13490.00	51.89	88.20	-36.31	43.44	8.45	Peak	240	235
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	7250.00	68.03	74.00	-5.97	61.30	6.73	Peak	133	181																																		
2	8993.33	48.01	88.20	-40.19	40.52	7.49	Peak	100	62																																		
3	13490.00	51.89	88.20	-36.31	43.44	8.45	Peak	240	235																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6745																																																
Polarization	Vertical-Average																																																		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																			
Level (dBuV/m) <table><thead><tr><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>7250.00</td><td>53.79</td><td>54.00</td><td>-0.21</td><td>47.06</td><td>6.73</td><td>Average</td><td>133</td><td>181</td></tr><tr><td>2</td><td>8993.33</td><td>36.24</td><td>68.20</td><td>-31.96</td><td>28.75</td><td>7.49</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>3</td><td>13490.00</td><td>42.53</td><td>68.20</td><td>-25.67</td><td>34.08</td><td>8.45</td><td>Average</td><td>240</td><td>235</td></tr></tbody></table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	7250.00	53.79	54.00	-0.21	47.06	6.73	Average	133	181	2	8993.33	36.24	68.20	-31.96	28.75	7.49	Average	100	62	3	13490.00	42.53	68.20	-25.67	34.08	8.45	Average	240	235
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																											
1	7250.00	53.79	54.00	-0.21	47.06	6.73	Average	133	181																																										
2	8993.33	36.24	68.20	-31.96	28.75	7.49	Average	100	62																																										
3	13490.00	42.53	68.20	-25.67	34.08	8.45	Average	240	235																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																			



Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6905																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>51.33</td><td>54.00</td><td>-2.67</td><td>44.60</td><td>6.73</td><td>Average</td><td>120</td><td>328</td></tr><tr><td>2</td><td>7250.00</td><td>63.39</td><td>74.00</td><td>-10.61</td><td>56.66</td><td>6.73</td><td>Peak</td><td>120</td><td>328</td></tr><tr><td>3</td><td>9206.66</td><td>36.45</td><td>68.20</td><td>-31.75</td><td>28.35</td><td>8.10</td><td>Average</td><td>100</td><td>231</td></tr><tr><td>4</td><td>9206.66</td><td>48.45</td><td>88.20</td><td>-39.75</td><td>40.35</td><td>8.10</td><td>Peak</td><td>100</td><td>231</td></tr><tr><td>5</td><td>13810.00</td><td>47.97</td><td>68.20</td><td>-20.23</td><td>39.30</td><td>8.67</td><td>Average</td><td>173</td><td>304</td></tr><tr><td>6</td><td>13810.00</td><td>55.45</td><td>88.20</td><td>-32.75</td><td>46.78</td><td>8.67</td><td>Peak</td><td>173</td><td>304</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	51.33	54.00	-2.67	44.60	6.73	Average	120	328	2	7250.00	63.39	74.00	-10.61	56.66	6.73	Peak	120	328	3	9206.66	36.45	68.20	-31.75	28.35	8.10	Average	100	231	4	9206.66	48.45	88.20	-39.75	40.35	8.10	Peak	100	231	5	13810.00	47.97	68.20	-20.23	39.30	8.67	Average	173	304	6	13810.00	55.45	88.20	-32.75	46.78	8.67	Peak	173	304
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7250.00	51.33	54.00	-2.67	44.60	6.73	Average	120	328																																																																
2	7250.00	63.39	74.00	-10.61	56.66	6.73	Peak	120	328																																																																
3	9206.66	36.45	68.20	-31.75	28.35	8.10	Average	100	231																																																																
4	9206.66	48.45	88.20	-39.75	40.35	8.10	Peak	100	231																																																																
5	13810.00	47.97	68.20	-20.23	39.30	8.67	Average	173	304																																																																
6	13810.00	55.45	88.20	-32.75	46.78	8.67	Peak	173	304																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Unwanted Emissions


Appendix D

Modulation	be EHT320_OFDMA	Test Freq. (MHz)	6905																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7250.00</td><td>53.54</td><td>54.00</td><td>-0.46</td><td>46.81</td><td>6.73</td><td>Average</td><td>168</td><td>184</td></tr><tr><td>2</td><td>7250.00</td><td>68.64</td><td>74.00</td><td>-5.36</td><td>61.91</td><td>6.73</td><td>Peak</td><td>168</td><td>184</td></tr><tr><td>3</td><td>9206.66</td><td>36.00</td><td>68.20</td><td>-32.20</td><td>27.90</td><td>8.10</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>4</td><td>9206.66</td><td>49.01</td><td>88.20</td><td>-39.19</td><td>40.91</td><td>8.10</td><td>Peak</td><td>100</td><td>172</td></tr><tr><td>5</td><td>13810.00</td><td>43.55</td><td>68.20</td><td>-24.65</td><td>34.88</td><td>8.67</td><td>Average</td><td>177</td><td>288</td></tr><tr><td>6</td><td>13810.00</td><td>52.25</td><td>88.20</td><td>-35.95</td><td>43.58</td><td>8.67</td><td>Peak</td><td>177</td><td>288</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7250.00	53.54	54.00	-0.46	46.81	6.73	Average	168	184	2	7250.00	68.64	74.00	-5.36	61.91	6.73	Peak	168	184	3	9206.66	36.00	68.20	-32.20	27.90	8.10	Average	100	172	4	9206.66	49.01	88.20	-39.19	40.91	8.10	Peak	100	172	5	13810.00	43.55	68.20	-24.65	34.88	8.67	Average	177	288	6	13810.00	52.25	88.20	-35.95	43.58	8.67	Peak	177	288
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7250.00	53.54	54.00	-0.46	46.81	6.73	Average	168	184																																																																
2	7250.00	68.64	74.00	-5.36	61.91	6.73	Peak	168	184																																																																
3	9206.66	36.00	68.20	-32.20	27.90	8.10	Average	100	172																																																																
4	9206.66	49.01	88.20	-39.19	40.91	8.10	Peak	100	172																																																																
5	13810.00	43.55	68.20	-24.65	34.88	8.67	Average	177	288																																																																
6	13810.00	52.25	88.20	-35.95	43.58	8.67	Peak	177	288																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Band Edge measurement

Appendix D

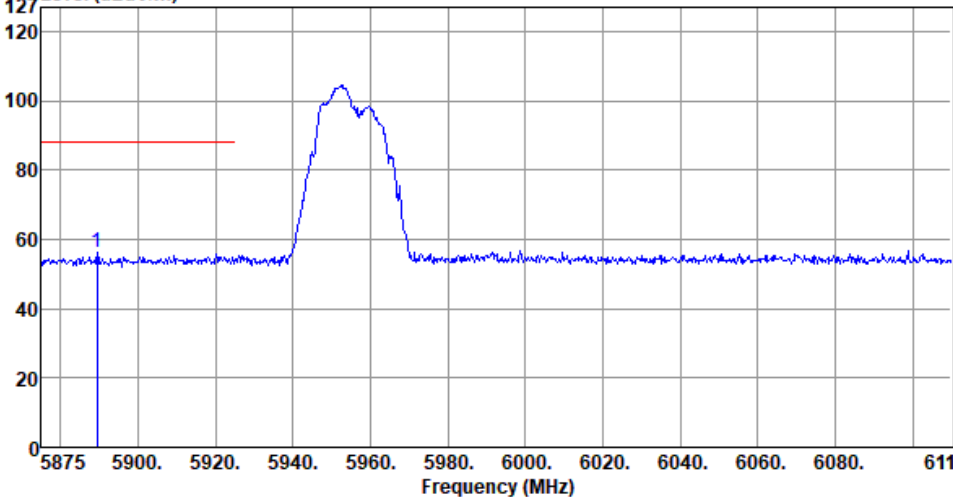Modulation	11a	Test Freq. (MHz)	5955																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m)  Frequency (MHz)																																											
<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5889.34</td><td>56.13</td><td>88.20</td><td>-32.07</td><td>53.34</td><td>2.79</td><td>Peak</td><td>217</td><td>323</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5889.34	56.13	88.20	-32.07	53.34	2.79	Peak	217	323
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
		dBuV/m			dBuV			cm	deg																																		
1	5889.34	56.13	88.20	-32.07	53.34	2.79	Peak	217	323																																		



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5955																			
Polarization	Horizontal-Average																					
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																						
Level (dBuV/m) <table><thead><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>5916.83</td><td>43.56</td><td>68.20</td><td>-24.64</td><td>40.74</td><td>2.82</td><td>Average</td><td>217</td><td>323</td></tr></tbody></table>				Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	5916.83	43.56	68.20	-24.64	40.74	2.82	Average	217	323	
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
5916.83	43.56	68.20	-24.64	40.74	2.82	Average	217	323														
<table><thead><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5916.83</td><td>43.56</td><td>68.20</td><td>-24.64</td><td>40.74</td><td>2.82</td><td>Average</td><td>217</td><td>323</td></tr></tbody></table>				Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5916.83	43.56	68.20	-24.64	40.74	2.82	Average	217	323
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5916.83	43.56	68.20	-24.64	40.74	2.82	Average	217	323													



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5955																				
Polarization	Vertical-Peak																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5917.30</td><td>55.43</td><td>88.20</td><td>-32.77</td><td>52.61</td><td>2.82</td><td>Peak</td><td>306</td><td>49</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5917.30	55.43	88.20	-32.77	52.61	2.82	Peak	306	49
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5917.30	55.43	88.20	-32.77	52.61	2.82	Peak	306	49														



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5955																				
Polarization	Vertical-Average																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																							
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5918.71</td><td>43.60</td><td>68.20</td><td>-24.60</td><td>40.78</td><td>2.82</td><td>Average</td><td>306</td><td>49</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5918.71	43.60	68.20	-24.60	40.78	2.82	Average	306	49
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5918.71	43.60	68.20	-24.60	40.78	2.82	Average	306	49														



Band Edge measurement

Appendix D

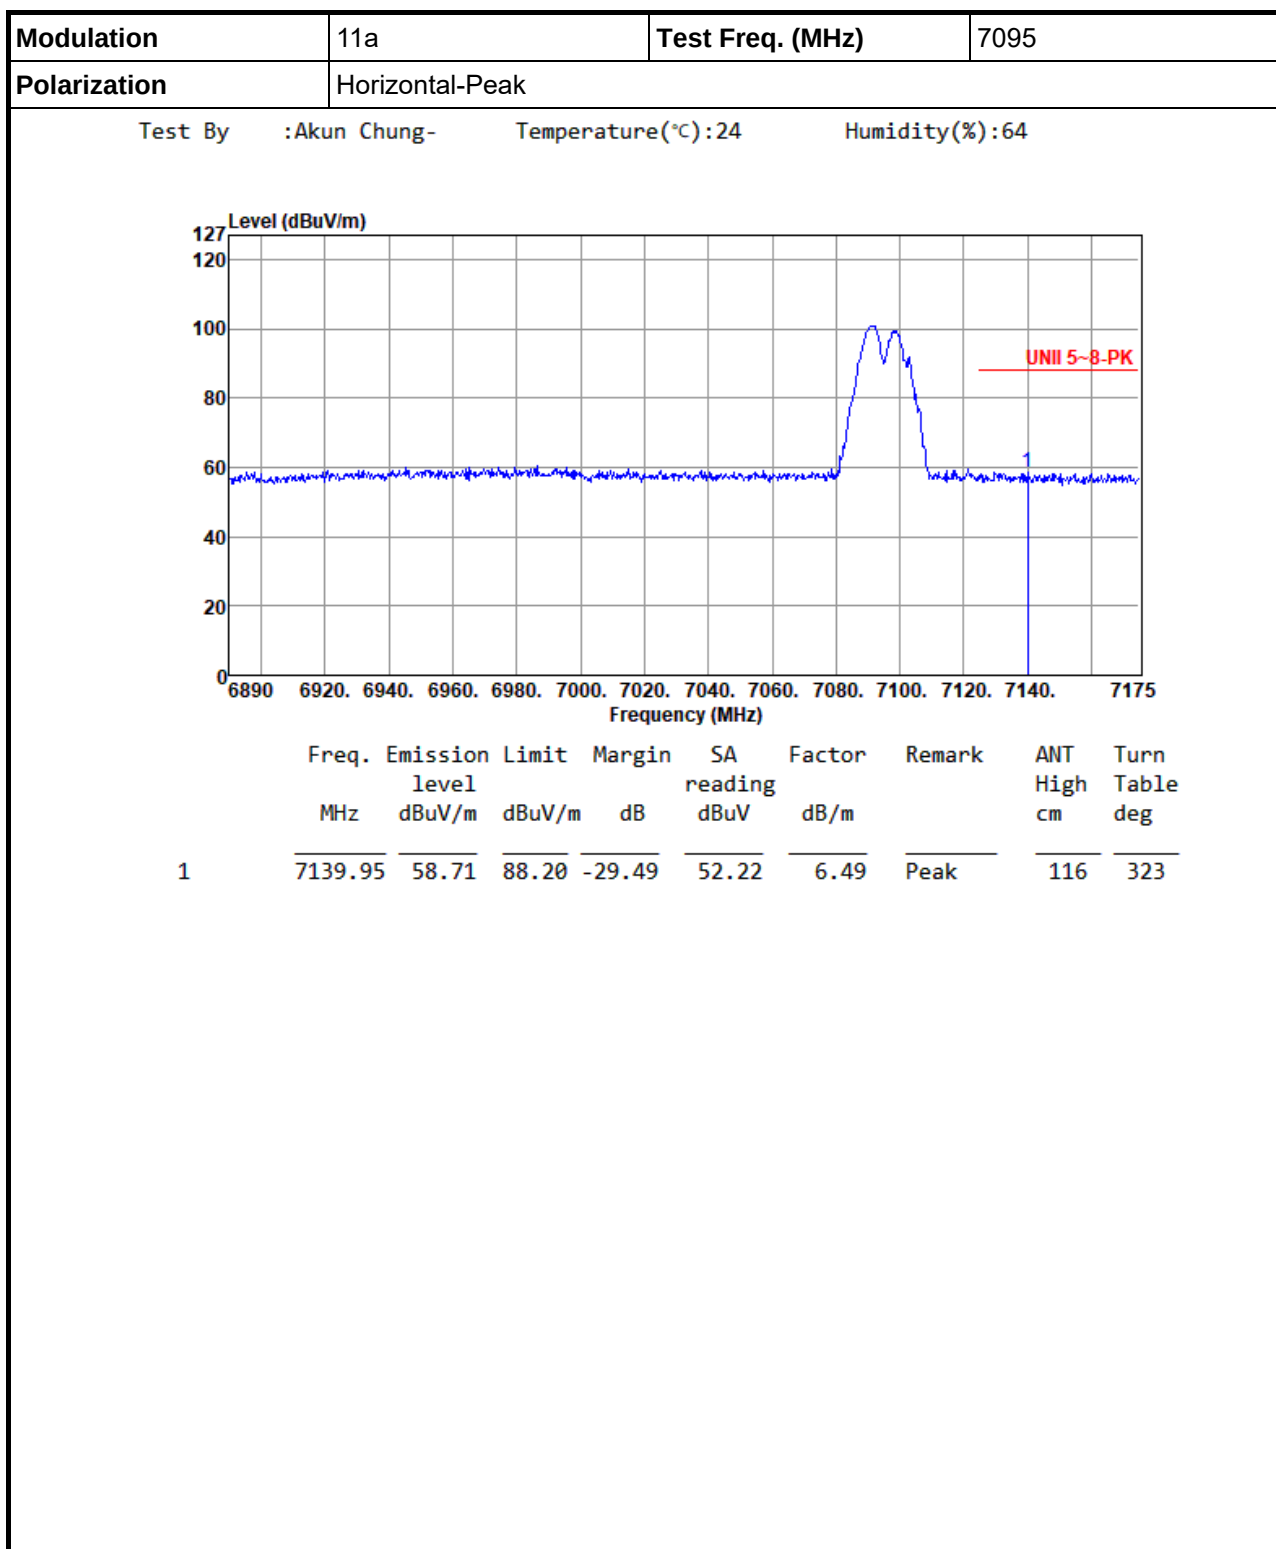



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	7095
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	7095
Polarization	Vertical-Peak		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Band Edge measurement

Appendix D

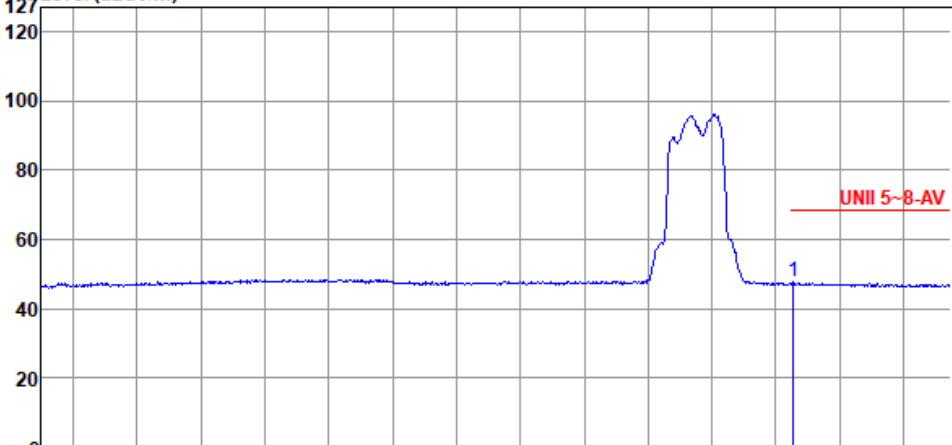Modulation	11a	Test Freq. (MHz)	7095																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.41</td><td>47.68</td><td>68.20</td><td>-20.52</td><td>41.22</td><td>6.46</td><td>Average</td><td>136</td><td>285</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	7125.41	47.68	68.20	-20.52	41.22	6.46	Average	136	285
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	7125.41	47.68	68.20	-20.52	41.22	6.46	Average	136	285																								



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	7115																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) UNII 5~8-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.00</td><td>85.13</td><td>88.20</td><td>-3.07</td><td>78.66</td><td>6.47</td><td>Peak</td><td>133</td><td>247</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	7125.00	85.13	88.20	-3.07	78.66	6.47	Peak	133	247
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	7125.00	85.13	88.20	-3.07	78.66	6.47	Peak	133	247																								



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	7115
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	7115																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) UNII 5~8-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.00</td><td>87.71</td><td>88.20</td><td>-0.49</td><td>81.24</td><td>6.47</td><td>Peak</td><td>166</td><td>229</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	7125.00	87.71	88.20	-0.49	81.24	6.47	Peak	166	229
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	7125.00	87.71	88.20	-0.49	81.24	6.47	Peak	166	229																								