



The University of Michigan
Radiation Laboratory
3228 EECS Building
Ann Arbor, MI 48109-2122
Tel: (734) 764-0500

Measured Radio Frequency Emissions
From

L-Com WLAN Transceiver
FCC ID: MYF-LCUSBX

Report No. 417124-553
March 28, 2010

Copyright © 2010

For:
L-Com, Inc.
45 Beechwood Drive
North Andover Massachusetts

Contact:
Kenneth Burgner
kburgner@l-com.com
Tel: 978 682 6936
Fax: 978 689 9484
PO: Verbal

Measurements made by: Joseph D. Brunett

Tests supervised by:
Report approved by:

Valdis V. Liepa
Research Scientist

Test Report written by: Joseph D. Brunett

Summary

Tests for compliance with FCC Regulations, CFR 47, Part 15 and with Industry Canada RSS-210/Gen, were performed on a L-Com, FCC ID: MYF-LCUSBX. This device under test (DUT) is subject to the rules and regulations as a transceiver.

In testing completed on March 14, 2010, the DUT tested met the allowed specifications for radiated emissions by 0.5 dB. Radiated digital emissions meet the Class B regulatory limit by more than 3.3 dB, and AC power line conducted emissions meet the Class B regulatory limit by 0.1 dB.

Table of Contents

1	INTRODUCTION.....	1
2	TEST PROCEDURE AND EQUIPMENT USED.....	1
3	DEVICE UNDER TEST.....	2
3.1	DESCRIPTION AND BLOCK DIAGRAM	2
3.2	VARIANTS & SAMPLES.....	3
3.3	MODES OF OPERATION.....	3
3.4	EMI RELEVANT MODIFICATIONS.....	3
3.5	EXEMPTIONS	3
4	EMISSION LIMITS	4
4.1	RADIATED EMISSION LIMITS	4
4.2	POWER LINE CONDUCTED EMISSIONS LIMITS.....	4
5	MEASUREMENT PROCEDURES	5
5.1	SEMI-ANECHOIC CHAMBER RADIATED EMISSIONS.....	5
5.2	OUTDOOR RADIATED EMISSIONS	5
5.3	RADIATED FIELD COMPUTATIONS	5
5.4	INDOOR POWER LINE CONDUCTED EMISSIONS	5
5.5	SUPPLY VOLTAGE VARIATION	6
6	TEST RESULTS	6
6.1	RADIATED EMISSIONS.....	6
6.1.1	Peak-to-Average Ratio (15.35(b))	6
6.1.2	Emission Bandwidth (15.247(a)(2)).....	6
6.1.3	Radiated Spurious Emissions.....	7
6.2	CONDUCTED EMISSIONS.....	7
6.2.1	Output Power (15.247(b)).....	7
6.2.2	AGC Amplifier Performance	7
6.2.3	Computed Health Hazard EM Radiation Level	8
6.2.4	Peak Output Power Reduction (15.247(b)(4)(i))	8
6.2.5	RF Antenna Conducted Spurious Emissions (15.247(c)).....	8
6.2.6	Power Spectral Density and Line Spacing (15.247(d))	8
6.2.7	AC Power Line Conducted Emissions (15.207).....	8

1 Introduction

This L-Com transceiver was tested for compliance with FCC Regulations, Part 15, adopted under Docket 87-389, April 18, 1989 as subsequently amended, and with Industry Canada RSS-210/Gen, Issue 7, June 2007. Tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C 63.4-2003 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". FCC OET guidelines for Measurement of Digital Transmission Systems Operating under Section 15.247 were also followed. The Site description and attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland (FCC Reg. No: 91050) and with Industry Canada, Ottawa, ON (File Ref. No: IC 2057A-1).

2 Test Procedure and Equipment Used

The pertinent test equipment commonly used in our facility for measurements is listed in Table 2.1 below. The middle column identifies the specific equipment used in these tests. The quality system employed at the University of Michigan Radiation Laboratory Willow Run Test Range has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to national standards.

Table 2.1 Test Equipment.

Test Instrument	Used	Manufacturer/Model	Q Number
Spectrum Analyzer (9kHz-26GHz)	X	Hewlett-Packard 8593E, SN: 3412A01131	HP8593E1
Spectrum Analyzer (9kHz-6.5GHz)	X	Hewlett-Packard 8595E, SN: 3543A01546	JDB8595E
Power Meter		Hewlett-Packard, 432A	HP432A1
Harmonic Mixer (26-40 GHz)		Hewlett-Packard 11970A, SN: 3003A08327	HP11970A1
Harmonic Mixer (40-60 GHz)		Hewlett-Packard 11970U, SN: 2332A00500	HP11970U1
Harmonic Mixer (75-110 GHz)		Hewlett-Packard 11970W, SN: 2521A00179	HP11970W1
Harmonic Mixer (140-220 GHz)		Pacific Millimeter Prod., GMA, SN: 26	PMPGMA1
S-Band Std. Gain Horn	X	S/A, Model SGH-2.6	SBAND1
C-Band Std. Gain Horn	X	University of Michigan, NRL design	CBAND1
XN-Band Std. Gain Horn	X	University of Michigan, NRL design	XNBAND1
X-Band Std. Gain Horn		S/A, Model 12-8.2	XBAND1
X-band horn (8.2- 12.4 GHz)		Narda 640	XBAND2
X-band horn (8.2- 12.4 GHz)	X	Scientific Atlanta, 12-8.2, SN: 730	XBAND3
K-band horn (18-26.5 GHz)	X	FXR, Inc., K638KF	KBAND1
Ka-band horn (26.5-40 GHz)		FXR, Inc., U638A	KABAND1
U-band horn (40-60 GHz)		Custom Microwave, HO19	UBAND1
W-band horn(75-110 GHz)		Custom Microwave, HO10	WBAND1
G-band horn (140-220 GHz)		Custom Microwave, HO5R	GBAND1
Bicone Antenna (30-250 MHz)	X	University of Michigan, RLBC-1	LBBIC1
Bicone Antenna (200-1000 MHz)	X	University of Michigan, RLBC-2	HBBIC1
Dipole Antenna Set (30-1000 MHz)	X	University of Michigan, RLDP-1,-2,-3	UMDIP1
Dipole Antenna Set (30-1000 MHz)		EMCO 3121C, SN: 992 (Ref. Antennas)	EMDIP1
Active Rod Antenna (30 Hz-50 MHz)		EMCO 3301B, SN: 3223	EMROD1
Active Loop Antenna (30 Hz-50 MHz)		EMCO 6502, SN:2855	EMLOOP1
Ridge-horn Antenna (300-5000 MHz)	X	University of Michigan	UMRH1
Amplifier (5-1000 MHz)	X	Avantek, A11-1, A25-1S	AVAMP1
Amplifier (5-4500 MHz)	X	Avantek	AVAMP2
Amplifier (4.5-13 GHz)	X	Avantek, AFT-12665	AVAMP3
Amplifier (6-16 GHz)	X	Trek	TRAMP1
Amplifier (16-26 GHz)	X	Avantek	AVAMP4
LISN Box		University of Michigan	UMLISN1
Signal Generator		Hewlett-Packard 8657B	HPSG1

3 Device Under Test

3.1 Description and Block Diagram

The DUT is a spread spectrum transceiver operating in the 2400 - 2483.5 MHz band. The system tested consists of a laptop computer, USB radio, coaxial cable, amplifier and one antenna. The DUT is designed and manufactured by L-Com, Inc.

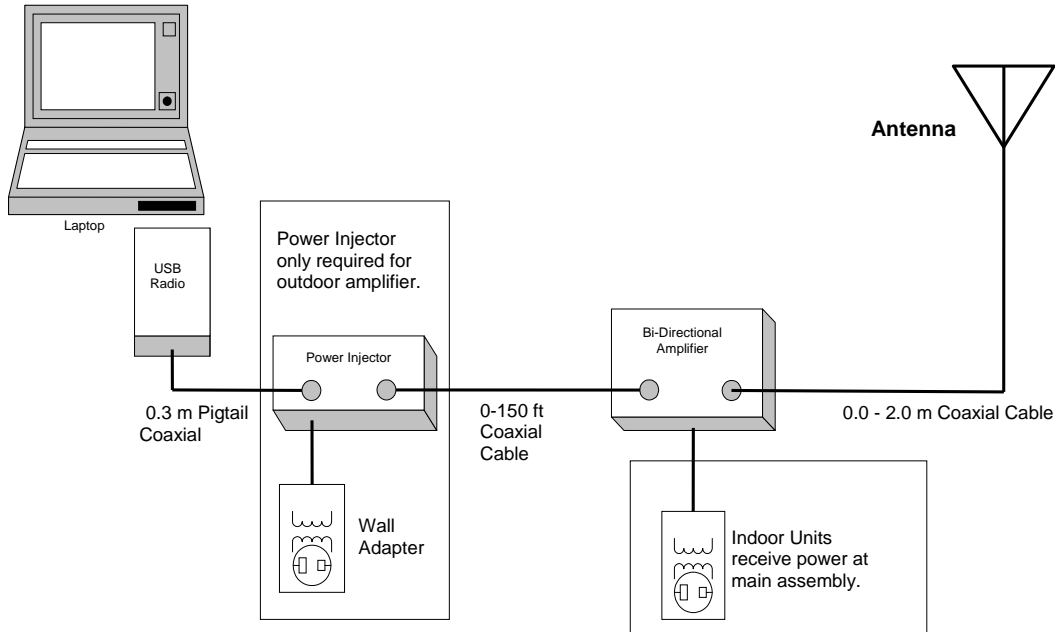


Figure 3.1 Block Diagram

Device	[Make], Model	[S/N],P/N	EMC Consideration
Equipment Under Test			
Indoor Amplifier	[L-Com, Inc.], HA2401RTGX-1000	[A]	fully tested
Outdoor Amplifier	[L-Com, Inc.], HA2401RTGX-1000	[B]	partially tested
USB Radio	[L-Com, Inc.],	[001]	Class B compliant
Bias-T	[L-Com, Inc.], XA-BT2406-20RTJ	[001]	
Amplifier DC Supply	[L-Com, Inc.], GFP241DA-1220	[0003792]	12 VDC
Antenna	[L-Com, Inc.], HG2402RD-RSF	-	2.0 dBi Gain per manufacturer's datasheet
Peripheral / Test Setup Equipment			
Laptop Computer	[Gateway], SOLO 5300	3500729	Class B compliant
Variable Attenuator	[Hewlett Packard], 8494B	1516A06819	0-11 dB

Cable(s)	[Make], Model	Length	EMC Consideration
Radio to Amp Cable	[L-Com]	50 ft	3dB/50ft loss @ 2.437 GHz
Radio to Bias-T Cable	[L-Com], Comscope WBC-100	2 ft	0.2 dB loss @2.437 GHz

3.2 Variants & Samples

There are three primary configurations for this system. (1) An outdoor amplifier (model number HA2401RTGX-1000) with DC injector power feed and antenna. (2) An indoor amplifier (model number HA2401RTGXI-1000) with DC power fed directly into a jack on the amplifier and antenna. (3) Finally, the radio connected to the same antenna without additional cabling or amplifier, i.e. the system with the amplifier “depopulated”. The radio has been designed to operate with up to 12 channels from 2412 to 2462 MHz; HOWEVER, WHEN SOLD WITH THE AMPLIFIER, ONLY CHANNEL 6 (2437 MHz) IS ACTIVATED. THE AMPLIFIERS USED IN THIS FILING ARE ONLY TO BE SOLD AS A COMPLETE SYSTEM AS SHOWN WITHIN THIS APPLICATION (USB radio + DC Injector (if outdoor) + Amplifier(if employed) + Antenna). Samples, as outlined above were provided.

3.3 Modes of Operation

As an 802.11 b/g mode device, the following modes of operation are employed.

802.11b Rate (Mbps)	packet length (ms)	802.11g Rate (Mbps)	packet length (ms)	802.11g Rate (Mbps)	packet length (ms)
1	12.4	6	2.07	24	0.535
2	6.3	9	1.39	36	0.366
5.5	2.42	12	1	48	0.28
11	1.31	18	0.7	54	0.25

However, no duty factor is employed for demonstrating compliance of this equipment, as the EUT is programmed to transmit continuous.

3.4 EMI Relevant Modifications

No modifications were made to the DUT by this laboratory during testing.

3.5 Exemptions

None.

4 Emission Limits

4.1 Radiated Emission Limits

Since the DUT is a spread spectrum device, wherein the radiated emissions are subject to emissions limits in the restricted bands The applicable frequencies, through ten harmonics, are given below in Table 4.1. Emission limits from digital circuitry are specified in Table 4.2.

Table 4.1. Tx. Radiated Emission Limits (FCC: 15.247/15.209; IC: RSS-210e A2.9).

Frequency (MHz)	Fundamental Ave. Elim (3m)		Spurious* Ave. Elim (3m)	
	($\mu\text{V/m}$)	dB ($\mu\text{V/m}$)	($\mu\text{V/m}$)	dB ($\mu\text{V/m}$)
2400-2483.5	---		---	
2310-2390 2483.5-2500 4500-5250	Restricted Bands		500	54.0
7250-7750 14470-14500 17700-21400 22010-23120 23600-24000	Restricted Bands		500	54.0

- 1) Emissions radiated outside of the specified frequency bands shall meet the general radiated emission limits in Section 15.209 (Class B).
- 2) Peak field strength of any emission above 1GHz shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. (FCC 15.35)

Table 4.2. Spurious Emission Limits (FCC: 15.33, .35, .109/209; IC: RSS-210 2.7, T2)

Freq. (MHz)	Elim (3m) $\mu\text{V/m}$	Elim dB($\mu\text{V/m}$)
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
960-2000	500	54.0

Note: Average readings apply above 1000 MHz (1 MHz BW), Quasi-Peak readings apply to 1000 MHz (120 kHz RBW), PRF of intentional emissions > 20 Hz for QPK to apply.

4.2 Power Line Conducted Emissions Limits

Table 4.3 Emission Limits (FCC:15.107 (CISPR); IC: RSS-Gen, 7.2.2 T2).

Frequency (MHz)	Class A (dB μV)		Class B (dB μV)	
	Quasi-peak	Average	Quasi-peak	Average
.150 - 0.50	79	66	66 - 56*	56 - 46*
0.50 - 5	73	60	56	46
5 - 30	73	60	60	50

Notes:

1. The lower limit shall apply at the transition frequency
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15-0.50 MHz:
 - *Class B Quasi-peak: $\text{dB}\mu\text{V} = 50.25 - 19.12 \cdot \log(f)$
 - *Class B Average: $\text{dB}\mu\text{V} = 40.25 - 19.12 \cdot \log(f)$
3. 9 kHz RBW

5 Measurement Procedures

5.1 Semi-Anechoic Chamber Radiated Emissions

To become familiar with the radiated emission behavior of the DUT, the device is first studied and measured in our shielded semi-anechoic chamber. In the chamber there is a set-up similar to that of an outdoor 3-meter site, with a turntable, an antenna mast, and a ground plane. Instrumentation includes spectrum analyzers and other equipment as needed.

The DUT is laid on the test table as shown in the included block diagram and/or photographs. A shielded loop antenna is employed when studying emissions from 9 kHz to 30 MHz. Above 30 MHz and below 250 MHz a biconical antenna is employed. Above 250 MHz a ridge or a standard gain horn antennas are used. The spectrum analyzer resolution and video bandwidths are set so as to measure the DUT emission without decreasing the emission bandwidth (EBW) of the device. Emissions are studied for all orientations (3-axes) of the DUT and all test antenna polarizations. In the chamber, spectrum and modulation characteristics of intentional carriers are recorded. Receiver spurious emissions are measured with an appropriate carrier signal applied. Associated test data is presented in subsequent sections.

5.2 Outdoor Radiated Emissions

After measurements are performed indoors, emissions on our outdoor 3-meter Open Area Test Site (OATS) are made, when applicable. If the DUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.4 are employed. Alternatively, an on-table layout more representative of actual use may be employed if the resulting emissions appear to be worst-case in such a configuration. Any intentionally radiating elements are placed on the test table flat, on their side, and on their end (3-axes) and worst case emissions are recorded. For each configuration the DUT is rotated 360 degrees about its azimuth and the receive antenna is raised and lowered between 1 and 4 meters to maximize radiated emissions from the device. Receiver spurious emissions are measured with an appropriate carrier signal applied. For devices with intentional emissions below 30 MHz, our shielded loop antenna at a 1 meter receive height is used. Low frequency field extrapolation to the regulatory limit distance is employed as needed. Emissions between 30 MHz and 1 GHz are measured using tuned dipoles and/or biconical antennas. Care is taken to ensure that the RBW and VBW used meet the regulatory requirements, and that the EBW of the DUT is not reduced. The Photographs included in this report show the Test Setup.

5.3 Radiated Field Computations

To convert the dBm values measured on the spectrum analyzer to dB(μ V/m), we use expression

$$E3(\text{dB}\mu\text{V/m}) = 107 + \text{PR} + \text{KA} - \text{KG} + \text{KE} - \text{CF}$$

where

- PR = power recorded on spectrum analyzer, dBm, measured at 3 m
- KA = antenna factor, dB/m
- KG = pre-amplifier gain, including cable loss, dB
- KE = duty correction factor, dB
- CF = distance conversion (employed only if limits are specified at alternate distance), dB

When presenting the data at each frequency, the highest measured emission under all of the possible DUT orientations (3-axes) is given.

5.4 Indoor Power Line Conducted Emissions

When applicable, power line conducted emissions are measured in our semi-anechoic chamber. If the DUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in

ANSI C63.4 are employed. Alternatively, an on-table layout more representative of actual use may be employed if the resulting emissions appear to be worst-case in such a configuration.

The conducted emissions measured with the spectrum analyzer and recorded (in dBμV) from 0-2 MHz and 2-30 MHz for both the ungrounded (Hi) and grounded (Lo) conductors. The spectrum analyzer is set to peak-hold mode in order to record the highest peak throughout the course of functional operation. Only when the emission exceeds or is near the limit are quasi-peak and average detection used.

5.5 Supply Voltage Variation

Measurements of the variation in the fundamental radiated emission were performed with the supply voltage varied by no less than 85% and 115% of the nominal rated value. For battery operated equipment, tests were performed using a new battery, and worst case emissions are re-checked employing a new battery.

6 Test Results

Two test configurations were fully tested for emissions compliance, the USB radio + antenna, and the USB radio + indoor amplifier + antenna. It is demonstrated in this test report that the tested configurations accurately depict the worst case emissions from the EUT. These systems are manufactured with RP-TNC connectors and may be installed by End-Users. Also please note, THROUGHOUT TESTING, ATTENUATION (SIMULATING INCREASED CABLE LENGTH) BETWEEN THE RADIO AND AMPLIFIER WAS VARIED BETWEEN 0 AND 10 DB, AND THE WORST CASE EMISSIONS WERE RECORDED. This was done to verify worst case conditions with the AGC amplifier employed.

6.1 Radiated Emissions

6.1.1 Peak-to-Average Ratio (15.35(b))

For the measurements presented here (for emissions in restricted bands), the DUT was programmed to transmit continuous, and such was verified with spectrum analyzer set to zero-span mode. See Figure 6.1. Average measurements were made using 1 MHz RBW and 100 Hz VBW. Peak spurious measurements are made using 1 MHz RBW and 3 MHz VBW.

6.1.2 Emission Bandwidth (15.247(a)(2))

For this test, the DUT was put in a test mode for continuous data transmission, and the amplifier was attached, including 0-10 dB of attenuation, to the radio. The EUT was placed in front of the standard gain horn in the worst possible orientation. The analyzer was set for RBW=100 kHz, VBW=300 kHz, SPAN=30 MHz. The 6-dB bandwidth, the 26 dB E BW, and the IC 99% power bandwidth were measured for lowest, middle, and highest channels available. See figure 6.2.

Configuration	Data Rate (Mbps)	Channel	6 dB BW (MHz)	26 dB BW (MHz)	IC 99% Pwr BW (MHz)
AGC Amplifier (HA2401RTGX(I)-1000)	11 (802.11 b)	6	9.63	19.25	14.63
	54 (802.11 g)	6	16.65	33.38	17.10
Radio Alone	11 (802.11 b)	1	10.05	18.53	14.63
		6	10.13	18.30	14.70
		11	10.05	18.45	14.55
	54 (802.11 g)	1	16.73	19.80	16.80
		6	16.73	19.65	16.88
		11	16.73	19.80	16.80

6.1.3 Radiated Spurious Emissions

However, digital emissions were not tested for the USB radio + antenna stand alone configuration as the manufacturer has DoC documentation showing compliance, which is included with this filing. Digital emissions were verified when the amplifiers are employed, where outdoor amplifier configuration was verified only for spurious emissions, as the addition of the bias-T and change in cable configuration could result in a change in such. (Otherwise, the HA2401RTGX-1000 amplifier is identical to the HA2401RTGXI-1000 amplifier.)

6.2 Conducted Emissions


6.2.1 Output Power (15.247(b))

DUT output power is computed from antenna port conducted emissions. Since the emission bandwidth of the DUT is greater than the maximum RBW of the spectrum analyzer employed, power output Option 2, Method 1 of the FCC’s DTS measurement procedures is used in determining output power. The SA is sample detected, with a SPAN = 40 MHz, RBW = 1 MHz, VBW = 3 MHz and data is power averaged over 100 traces. Output power is computed via the SA’s internal integration routine across the 26 dB EBW. See Figure 6.3.

Configuration	Data Rate (Mbps)	Channel	Output Power (dBm)
AGC Amplifier (HA2401RTGX(I)-1000)	11 (802.11 b)	6	29.4
	54 (802.11 g)	6	28.6
Radio Alone	11 (802.11 b)	1	14.3
		6	14.1
	54 (802.11 g)	11	14.2
		1	10.9
	54 (802.11 g)	6	10.1
		11	10.2

6.2.2 AGC Amplifier Performance

AGC amplifier compliance must be demonstrated over a range of input power levels. Output power measurements (as above) were taken as the attenuation between the radio and amplifier was varied. Results of this testing are below. THE AGC AMPLIFIERS SHOULD NOT BE OPERATED WITH GREATER THAN 10 DB (150 FT) OF COAXIAL CABLE BETWEEN THE RADIO AND AMPLIFIER. For attenuation greater than 10 dB, the amplifier begins to shutdown in 802.11 g mode, rendering the system non-functional.

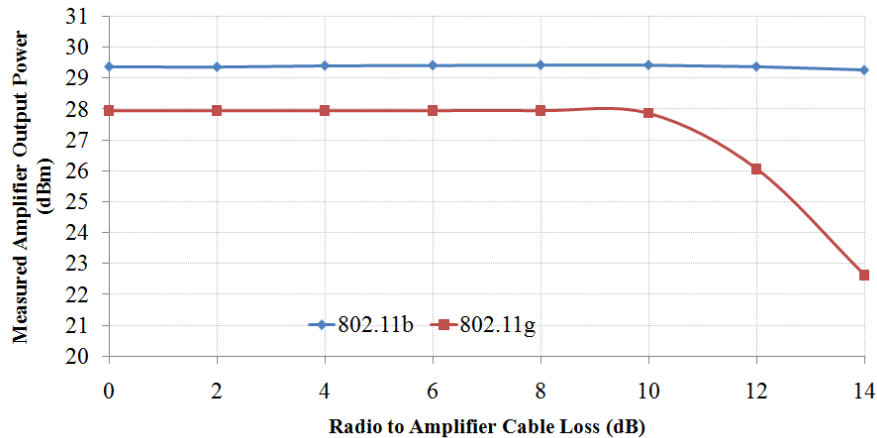

6.2.3 Computed Health Hazard EM Radiation Level

The following table summarizes the power density at a distance of 20 cm from the device as calculated from FCC OET Bulletin 65.

Table 6.3 Potential Health Hazard Radiation Level

Ant.	Ant.Gain (dBi)	Po (mW)	EIRP (mW)	S (mW/cm ²)
PCB	2	871	1380	0.274

The following equations were used in calculating the operating distance (R).

$$EIRP(mW) = Po(mW) \cdot 10^{\frac{Gain(dB)}{10}} \quad \text{and} \quad S(mW/cm^2) = \frac{EIRP(mW)}{4 \cdot \pi \cdot R(cm)^2}, \quad R = 20 \text{ cm}$$

6.2.4 Peak Output Power Reduction (15.247(b)(4)(i))

No configuration of this system results in an EIRP value of 36 dBm or greater. Thus, peak output power reduction is unnecessary.

6.2.5 RF Antenna Conducted Spurious Emissions (15.247(c))

For this test, the DUT was put in a test mode for continuous data transmission, and the amplifier was attached, including 0-10 dB of attenuation, to the radio. The spectrum analyzer was connected where the antenna attaches to the system. The analyzer was set for RBW = 100 kHz, VBW = 300 kHz, the frequency was swept from 0 to 25 GHz. In all cases, emissions are more than 30 dB below the carrier level. Also included in are plots demonstrating band-edge compliance.

6.2.6 Power Spectral Density and Line Spacing (15.247(d))

For this test, the DUT was put in a test mode for continuous data transmission, and the amplifier was attached, including 0-10 dB of attenuation, to the radio. The spectrum analyzer was connected where the antenna attaches to the system. The spectrum was first scanned for the maximum spectrum peaks and then at these peaks the sweep was repeated with RBW=3 kHz, VBW=300 kHz, SPAN=300 kHz, and RBW=1 kHz, VBW=300 kHz, SPAN=100 kHz. See Figure 6.5. The readings obtained are:

Configuration	Data Rate (Mbps)	Channel	PSD (dBm/3kHz)	Line Spacing (kHz)
AGC Amplifier (HA2401RTGX(I)-1000)	11 (802.11 b)	6	5.2	5.5
	54 (802.11 g)	6	2.6	4.3
Radio Alone	11 (802.11 b)	1	-9.9	5.5
		6	-10.1	5.5
	11	-9.9	5.5	
	54 (802.11 g)	1	-16.2	4.0
		6	-16.4	4.0
		11	-16.4	4.0

6.2.7 AC Power Line Conducted Emissions (15.207)

The RF amplifier is powered from a switching power supply. Conducted emissions were measured using a LISN in the standard set-up. Photographs of the set-up are included here. Prior certification of the USB radio demonstrates that the FCC Class B line conducted emissions limits are met by the USB card and an associated computer, and such was verified with the test PC. The manufacturer of the system is not responsible for the sale or distribution of the computer/access point used with the USB card. Also note that the amplifiers used in these configurations contain no internal oscillators or low frequency sources, making it unlikely that these added components could corrupt the AC conducted emissions demonstrated in the USB card filing. The original USB radio's Document of Conformity test report has been included in this filing for reference.

Table 6.1(a) Highest Emissions Measured

Radiated Emissions										
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr. (avg)** dBm	Ka dB/m	Kg dB	E3 dBμV/m	E3lim (avg)** dBμV/m	Pass dB	Comments
1	Configuration:									
2	Power Supply Used		DC Inj.	Input Attenuation		Amp Pwr Rating		Output Filter		Antenna
3	GFP241DA-1220		No	0-10 dB		1000 mW		None		HG2402RD-RSF
4										
5	802.11b mode (11 Mbps)									
6	2437.0									Middle channel
7	2390.0	Horn S	H/V	-78.6	21.4	- 1.2	51.0	54.0	3.0	Mid
8	2483.5	Horn S	H/V	-77.1	21.5	- 1.2	52.6	54.0	1.4	Mid
9	4874.0	Horn C	H/V	-44.5	25.5	37.0	51.0	54.0	3.0	Mid
10	7311.0	Horn XN	H/V	-43.2	25.5	36.0	53.3	54.0	0.7	Mid
11	12185.0	Horn X	H/V	-52.9	25.5	34.0	45.6	54.0	8.4	Mid
12	19496.0	Horn K	H/V	-68.5	32.3	32.0	38.8	54.0	15.2	Mid, noise
13	* Ave: measured with 1 MHz RBW and 10 Hz VBW									
14	** Peak was measured to be 7.55 dB above average in a 1 MHz RBW									
15										
16										
17	802.11g mode (54 Mbps)									
18	2437.0									Middle channel
19	2390.0	Horn S	H/V	-77.8	21.4	- 1.2	51.8	54.0	2.2	Mid
20	2483.5	Horn S	H/V	-76.2	21.5	- 1.2	53.5	54.0	0.5	Mid
21	4874.0	Horn C	H/V	-43.3	25.5	37.0	52.2	54.0	1.8	Mid
22	7311.0	Horn XN	H/V	-50.6	25.5	36.0	45.9	54.0	8.1	Mid
23	12185.0	Horn X	H/V	-59.0	25.5	34.0	39.5	54.0	14.5	Mid
24	19496.0	Horn K	H/V	-68.5	32.3	32.0	38.8	54.0	15.2	Mid, noise
25										
26	* Ave: measured with 1 MHz RBW and 10 Hz VBW									
27	** Peak was measured to be 11.58 dB above average in a 1 MHz RBW									
28										
29										
30										
31										
32										
33										
34										
35										
36										
37										
38										
39										
40										
41										
42										

Table 6.1(b) Highest Emissions Measured - IEEE 802.11b mode

Radiated Emissions										Radio Alone; FCC/IC
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr. (avg)** dBm	Ka dB/m	Kg dB	E3 dBμV/m	E3lim (avg)** dBμV/m	Pass dB	Comments
1	2412.0									Low channel
2	2437.0									Mid channel
3	2462.0									High channel
4										
5	2390.0	Horn S	H/V	-78.0	21.4	- 1.2	51.6	54.0	2.4	Low
6	2390.0	Horn S	H/V	-78.0	21.4	- 1.2	51.6	54.0	2.4	Mid
7	2390.0	Horn S	H/V	-78.0	21.4	- 1.2	51.6	54.0	2.4	High
8	2483.5	Horn S	H/V	-77.8	21.5	- 1.2	51.9	54.0	2.1	Low
9	2483.5	Horn S	H/V	-77.8	21.5	- 1.2	51.9	54.0	2.1	Mid
10	2483.5	Horn S	H/V	-77.8	21.5	- 1.2	51.9	54.0	2.1	High
11	4824.0	Horn C	H/V	-61.2	25.5	37.0	34.3	54.0	19.7	Low
12	4874.0	Horn C	H/V	-54.8	25.5	37.0	40.7	54.0	13.3	Mid
13	4924.0	Horn C	H/V	-56.6	25.5	37.0	38.9	54.0	15.1	High
14	7236.0	Horn XN	H/V	-53.8	25.5	36.0	42.7	N/A	-	Low
15	7311.0	Horn XN	H/V	-53.5	25.5	36.0	43.0	54.0	11.0	Mid
16	7386.0	Horn XN	H/V	-54.4	25.5	36.0	42.1	54.0	11.9	High
17	9648.0	Horn X	H/V		25.5	34.0	-	N/A	-	Low
18	9748.0	Horn X	H/V		25.5	34.0	-	N/A	-	Mid
19	9848.0	Horn X	H/V		25.5	34.0	-	N/A	-	High
20	12060.0	Horn X	H/V	-68.5	25.5	34.0	30.0	54.0	24.0	Low, noise
21	12185.0	Horn X	H/V	-68.5	25.5	34.0	30.0	54.0	24.0	Mid, noise
22	12310.0	Horn X	H/V	-68.7	25.5	34.0	29.8	54.0	24.2	High, noise
23	14472.0	Horn Ku	H/V	-69.5	25.5	17.3	45.7	54.0	8.3	Low
24	14622.0	Horn Ku	H/V		25.5	17.3	-	N/A	-	Mid
25	14772.0	Horn Ku	H/V		25.5	17.3	-	N/A	-	High
26	16884.0	Horn Ku	H/V		32.3	34.0	-	N/A	-	Low
27	17059.0	Horn Ku	H/V		32.3	34.0	-	N/A	-	Mid
28	17234.0	Horn Ku	H/V		32.3	34.0	-	N/A	-	High
29	19296.0	Horn K	H/V	-69.3	32.3	32.0	38.0	54.0	16.0	Low, noise
30	19496.0	Horn K	H/V	-69.3	32.3	32.0	38.0	54.0	16.0	Mid, noise
31	19696.0	Horn K	H/V	-69.2	32.3	32.0	38.1	54.0	15.9	High, noise
32	21708.0	Horn K	H/V		32.3	32.0	-	N/A	-	Low
33	21933.0	Horn K	H/V		32.3	32.0	-	N/A	-	Mid
34	22158.0	Horn K	H/V	-66.7	32.3	32.0	40.6	54.0	13.4	High
35	24120.0	Horn Ka	H/V		32.3	32.0	-	N/A	-	Low
36	24370.0	Horn Ka	H/V		32.3	32.0	-	N/A	-	Mid
37	24620.0	Horn Ka	H/V		32.3	32.0	-	N/A	-	High
38										
39	Configuration:									
40	Power Supply Used		DC Inj.	Input Attenuation		Amp / Pwr		Output Filter		Antenna
41	None		No	0 dB		None		None		HG2402RD-RSF
42	* Ave: measured with 1 MHz RBW and 100 Hz VBW, ** Peak was measured to be 7.55 dB above average in a 1 MHz RBW									

Table 6.1(c) Highest Emissions Measured - IEEE 802.11g mode

Radiated Emissions										Radio Alone; FCC/IC
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr. (avg)** dBm	Ka dB/m	Kg dB	E3 dBμV/m	E3lim (avg)** dBμV/m	Pass dB	Comments
1	2412.0									Low channel
2	2437.0									Mid channel
3	2462.0									High channel
4										
5	2390.0	Horn S	H/V	-77.2	21.4	- 1.2	52.4	54.0	1.6	Low
6	2390.0	Horn S	H/V	-77.2	21.4	- 1.2	52.4	54.0	1.6	Mid
7	2390.0	Horn S	H/V	-77.2	21.4	- 1.2	52.4	54.0	1.6	High
8	2483.5	Horn S	H/V	-76.5	21.5	- 1.2	53.2	54.0	0.8	Low
9	2483.5	Horn S	H/V	-76.5	21.5	- 1.2	53.2	54.0	0.8	Mid
10	2483.5	Horn S	H/V	-76.5	21.5	- 1.2	53.2	54.0	0.8	High
11	4824.0	Horn C	H/V	-58.7	25.5	37.0	36.8	54.0	17.2	Low
12	4874.0	Horn C	H/V	-58.0	25.5	37.0	37.5	54.0	16.5	Mid
13	4924.0	Horn C	H/V	-59.6	25.5	37.0	35.9	54.0	18.1	High
14	7236.0	Horn XN	H/V	-58.9	25.5	36.0	37.6	N/A	-	Low
15	7311.0	Horn XN	H/V	-59.2	25.5	36.0	37.3	54.0	16.7	Mid
16	7386.0	Horn XN	H/V	-60.2	25.5	36.0	36.3	54.0	17.7	High
17	9648.0	Horn X	H/V		25.5	34.0	-	N/A	-	Low
18	9748.0	Horn X	H/V		25.5	34.0	-	N/A	-	Mid
19	9848.0	Horn X	H/V		25.5	34.0	-	N/A	-	High
20	12060.0	Horn X	H/V	-68.5	25.5	34.0	30.0	54.0	24.0	Low, noise
21	12185.0	Horn X	H/V	-68.5	25.5	34.0	30.0	54.0	24.0	Mid, noise
22	12310.0	Horn X	H/V	-68.7	25.5	34.0	29.8	54.0	24.2	High, noise
23	14472.0	Horn Ku	H/V	-69.5	25.5	17.3	45.7	54.0	8.3	Low
24	14622.0	Horn Ku	H/V		25.5	17.3	-	N/A	-	Mid
25	14772.0	Horn Ku	H/V		25.5	17.3	-	N/A	-	High
26	16884.0	Horn Ku	H/V		32.3	34.0	-	N/A	-	Low
27	17059.0	Horn Ku	H/V		32.3	34.0	-	N/A	-	Mid
28	17234.0	Horn Ku	H/V		32.3	34.0	-	N/A	-	High
29	19296.0	Horn K	H/V	-69.3	32.3	32.0	38.0	54.0	16.0	Low, noise
30	19496.0	Horn K	H/V	-69.3	32.3	32.0	38.0	54.0	16.0	Mid, noise
31	19696.0	Horn K	H/V	-69.2	32.3	32.0	38.1	54.0	15.9	High, noise
32	21708.0	Horn K	H/V		32.3	32.0	-	N/A	-	Low
33	21933.0	Horn K	H/V		32.3	32.0	-	N/A	-	Mid
34	22158.0	Horn K	H/V	-66.7	32.3	32.0	40.6	54.0	13.4	High
35	24120.0	Horn Ka	H/V		32.3	32.0	-	N/A	-	Low
36	24370.0	Horn Ka	H/V		32.3	32.0	-	N/A	-	Mid
37	24620.0	Horn Ka	H/V		32.3	32.0	-	N/A	-	High
38										
39	Configuration:									
40	Power Supply Used		DC Inj.	Input Attenuation		Amp / Pwr		Output Filter		Antenna
41	None		No	0 dB		None		None		HG2402RD-RSF
42	* Ave: measured with 1 MHz RBW and 100 Hz VBW, ** Peak was measured to be 11.58 dB above average in a 1 MHz RBW									

University of Michigan Radiation Laboratory
FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

Table 6.2 Highest Digital Radiated Emissions Measured

L-COM, HAKIT;FCC/IC/CISPR B												
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB	E3 dB μ V/m	FCC E3lim dB μ V/m	IC/CE E3lim dB μ V/m	Margin dB	Comments
1	30.0	Bic	H	-78.1	Pk	13.3	25.5	16.6	40.0	40.5	23.4	
2	30.0	Bic	V	-70.8	Pk	13.3	25.5	23.9	40.0	40.5	16.1	
3	36.0	Bic	H	-73.9	Pk	11.7	25.4	19.3	40.0	40.5	20.7	
4	36.0	Bic	V	-68.8	Pk	11.7	25.4	24.4	40.0	40.5	15.6	
5	51.7	Bic	H	-78.5	Pk	8.9	25.2	12.2	40.0	40.5	27.8	
6	66.3	Bic	H	-77.2	Pk	7.7	25.0	12.5	40.0	40.5	27.5	
7	66.3	Bic	V	-63.8	Pk	7.7	25.0	25.9	40.0	40.5	14.1	
8	72.0	Bic	H	-71.8	Pk	7.6	24.9	17.8	40.0	40.5	22.2	
9	72.0	Bic	V	-66.6	Pk	7.6	24.9	23.0	40.0	40.5	17.0	
10	85.1	Bic	H	-70.6	Pk	7.7	24.7	19.4	40.0	40.5	20.6	
11	109.2	Bic	V	-69.3	Pk	9.1	24.4	22.4	43.5	40.5	18.1	
12	120.1	Bic	H	-67.5	Pk	10.0	24.3	25.2	43.5	40.5	15.3	
13	129.9	Bic	V	-66.4	Pk	10.8	24.1	27.3	43.5	40.5	13.2	
14	167.9	Bic	H	-66.0	Pk	13.6	23.6	31.0	43.5	40.5	9.5	
15	182.7	Bic	H	-74.1	Pk	14.3	23.4	23.7	43.5	40.5	16.8	
16	182.7	Bic	V	-76.7	Pk	14.3	23.4	21.1	43.5	40.5	19.4	
17	276.0	SBic	H	-63.1	Pk	16.8	22.3	38.5	46.0	47.5	7.5	
18	280.0	SBic	V	-70.8	Pk	17.0	22.2	31.0	46.0	47.5	15.0	
19	288.1	SBic	H	-68.6	Pk	17.4	22.1	33.6	46.0	47.5	12.4	
20	300.0	SBic	H	-62.1	Pk	17.9	22.0	40.8	46.0	47.5	5.2	
21	305.6	SBic	H	-69.0	Pk	18.1	21.9	34.2	46.0	47.5	11.8	
22	313.7	SBic	H	-72.1	Pk	18.4	21.8	31.5	46.0	47.5	14.5	
23	319.9	SBic	H	-65.7	Pk	18.7	21.8	38.2	46.0	47.5	7.8	
24	319.9	SBic	V	-70.3	Pk	18.7	21.8	33.6	46.0	47.5	12.4	
25	336.0	SBic	H	-61.9	Pk	19.2	21.6	42.7	46.0	47.5	3.3	
26	683.0	SBic	H	-73.4	Pk	25.7	18.3	41.0	46.0	47.5	5.0	
27	1240.0	R-Horn	H/V	-47.1	Pk	20.5	28.0	52.5	54.0	54.0	1.5	
28	1160.0	R-Horn	H/V	-50.0	Pk	20.3	28.0	49.3	54.0	54.0	4.7	
29	1700.0	R-Horn	H/V	-50.4	Pk	21.8	28.0	50.4	54.0	54.0	3.6	
30	1490.0	R-Horn	H/V	-52.6	Pk	21.3	28.0	47.7	54.0	54.0	6.3	
31	1180.0	R-Horn	H/V	-52.9	Pk	20.3	28.0	46.4	54.0	54.0	7.6	
32	1040.0	R-Horn	H/V	-58.1	Pk	19.8	28.0	40.7	54.0	54.0	13.3	
33	1563.0	R-Horn	H/V	-59.8	Pk	21.5	28.0	40.7	54.0	54.0	13.3	
34	1080.0	R-Horn	H/V	-59.8	Pk	20.0	28.0	39.2	54.0	54.0	14.8	
35	1020.0	R-Horn	H/V	-59.9	Pk	19.7	28.0	38.8	54.0	54.0	15.2	
36	1363.0	R-Horn	H/V	-60.2	Pk	20.9	28.0	39.7	54.0	54.0	14.3	
37	3924.0	R-Horn	H/V	-68.4	Pk	28.2	23.3	43.5	54.0	54.0	10.5	
38	3680.0	R-Horn	H/V	-68.8	Pk	27.5	23.8	41.9	54.0	54.0	12.1	
39	3600.0	R-Horn	H/V	-69.5	Pk	27.2	24.0	40.8	54.0	54.0	13.2	
40	3776.0	R-Horn	H/V	-69.8	Pk	27.8	23.6	41.4	54.0	54.0	12.6	
41												
42												
43												

Meas. 03/25/2010; U of Mich.

Table 6.3 Highest AC Power Line Conducted Emissions Measured

L-COM, GFP241DA-1220; FCC/IC/CISPR B													
#	Freq. MHz	Line Pair Side	Peak Det., dBμV			QP Det., dBμV			Pass dB	Ave. Det., dBμV		Pass dB	Comments
			Vtest	Vlim*	dB*	Vtest	Vlim	Vtest		Vlim			
1	0.28	Lo	58.2	50.7	- 7.5	56.5	60.7	4.3	45.8	50.7	4.9		
2	0.49	Lo	48.0	46.1	- 1.9	46.9	56.1	9.2	42.2	46.1	3.9		
3	0.49	Lo	52.0	46.1	- 5.9	48.4	56.1	7.7	42.1	46.1	4.0		
4	0.50	Lo	56.5	46.0	-10.5	45.1	56.1	11.0	41.0	46.0	5.0		
5	0.54	Lo	50.7	46.0	- 4.7	46.3	56.0	9.7	35.4	46.0	10.6		
6	0.69	Lo	58.2	46.0	-12.2	56.0	56.0	0.0	45.9	46.0	0.1		
7	0.72	Lo	52.0	46.0	- 6.0	42.7	56.0	13.3	39.8	46.0	6.2		
8	0.72	Lo	48.0	46.0	- 2.0	39.8	56.0	16.2	38.6	46.0	7.4		
9	0.88	Lo	53.3	46.0	- 7.3	43.7	56.0	12.3	39.0	46.0	7.0		
10	0.96	Lo	53.2	46.0	- 7.2	50.2	56.0	5.8	41.3	46.0	4.7		
11	1.08	Lo	57.3	46.0	-11.3	54.3	56.0	1.7	45.3	46.0	0.7		
12	1.27	Lo	56.3	46.0	-10.3	54.3	56.0	1.7	42.8	46.0	3.2		
13	1.41	Lo	55.1	46.0	- 9.1	44.3	56.0	11.7	38.7	46.0	7.3		
14	1.44	Lo	55.9	46.0	- 9.9	48.3	56.0	7.7	37.7	46.0	8.3		
15	1.49	Lo	56.2	46.0	-10.2	53.7	56.0	2.3	42.9	46.0	3.1		
16	1.51	Lo	56.4	46.0	-10.4	53.2	56.0	2.8	43.2	46.0	2.8		
17	1.66	Lo	57.0	46.0	-11.0	54.1	56.0	1.9	43.5	46.0	2.5		
18	1.91	Lo	54.8	46.0	- 8.8	51.8	56.0	4.2	39.6	46.0	6.4		
19	1.91	Lo	54.6	46.0	- 8.6	51.5	56.0	4.5	40.5	46.0	5.5		
20	3.50	Lo	32.6	46.0	13.4		56.0			46.0			
21	18.20	Lo	38.1	50.0	11.9		60.0			50.0			
22													
23	0.49	Hi	47.8	46.1	- 1.7	47.0	56.1	9.1	42.3	46.1	3.8		
24	0.58	Hi	48.9	46.0	- 2.9	46.3	56.0	9.7	45.3	46.0	0.7		
25	0.72	Hi	47.0	46.0	- 1.0	46.3	56.0	9.7	45.3	46.0	0.7		
26	0.73	Hi	40.2	46.0	5.8	44.4	56.0	11.6	36.2	46.0	9.8		
27	0.79	Hi	45.6	46.0	0.4	43.7	56.0	12.3	39.3	46.0	6.7		
28	0.88	Hi	55.1	46.0	- 9.1	52.4	56.0	3.6	44.9	46.0	1.1		
29	1.00	Hi	53.1	46.0	- 7.1	50.7	56.0	5.3	40.2	46.0	5.8		
30	1.03	Hi	50.0	46.0	- 4.0	48.3	56.0	7.7	39.5	46.0	6.5		
31	1.13	Hi	56.9	46.0	-10.9	55.2	56.0	0.8	45.3	46.0	0.7		
32	1.18	Hi	57.6	46.0	-11.6	55.6	56.0	0.4	45.9	46.0	0.1		
33	1.32	Hi	57.2	46.0	-11.2	54.4	56.0	1.6	44.7	46.0	1.3		
34	1.45	Hi	53.5	46.0	- 7.5	46.6	56.0	9.4	39.6	46.0	6.4		
35	1.58	Hi	56.4	46.0	-10.4	53.9	56.0	2.1	42.4	46.0	3.6		
36	1.75	Hi	57.8	46.0	-11.8	54.8	56.0	1.2	44.1	46.0	1.9		
37	1.76	Hi	58.0	46.0	-12.0	55.2	56.0	0.8	44.4	46.0	1.6		
38	1.82	Hi	57.0	46.0	-11.0	54.2	56.0	1.8	44.5	46.0	1.5		
39	1.87	Hi	54.1	46.0	- 8.1	48.4	56.0	7.6	40.4	46.0	5.6		
40	2.00	Hi	55.1	46.0	- 9.1	48.9	56.0	7.1	35.7	46.0	10.3		
41	3.60	Hi	31.7	46.0	14.3		56.0			46.0			
42	19.00	Hi	27.6	50.0	22.4		60.0			50.0			
40													

*Average limit

Meas. 03/02/2010; U of Mich.

Since $V_{peak} \geq V_{qp} \geq V_{ave}$ and if $V_{testpeak} < V_{velim}$, then V_{qplim} and V_{avelim} are met.

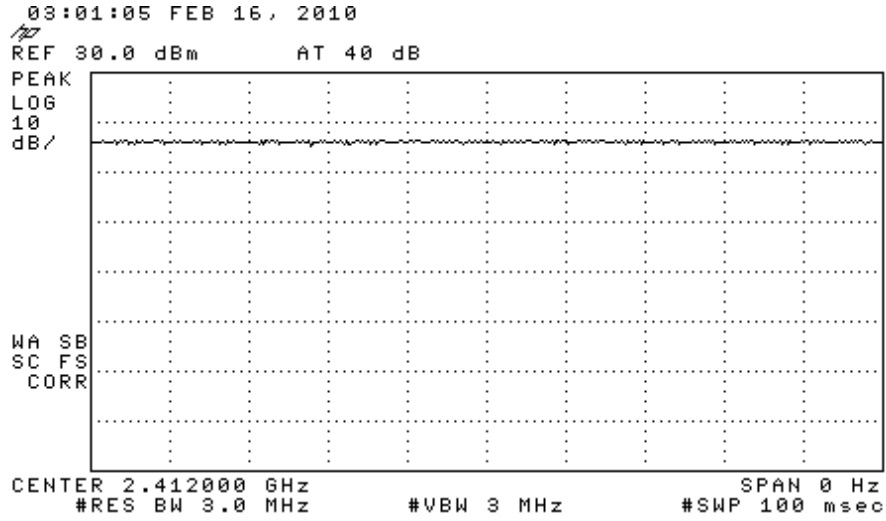


Figure 6.1(a) Worst Case 802.11 b mode continuous Tx verification.

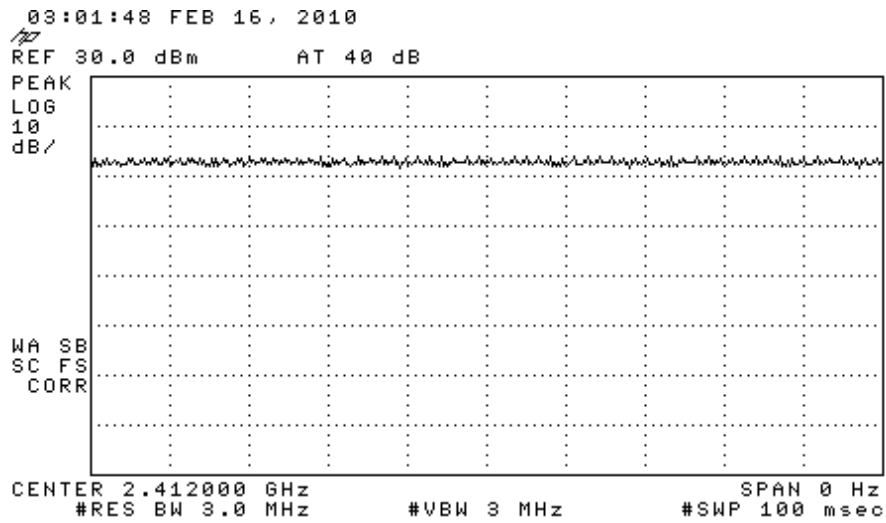


Figure 6.1(b) Worst Case 802.11 g mode continuous Tx verification.

University of Michigan Radiation Laboratory
FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

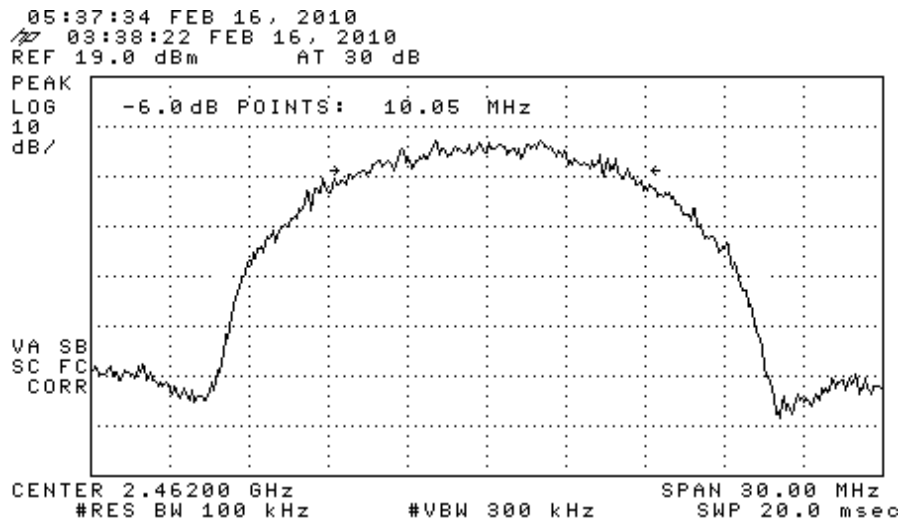
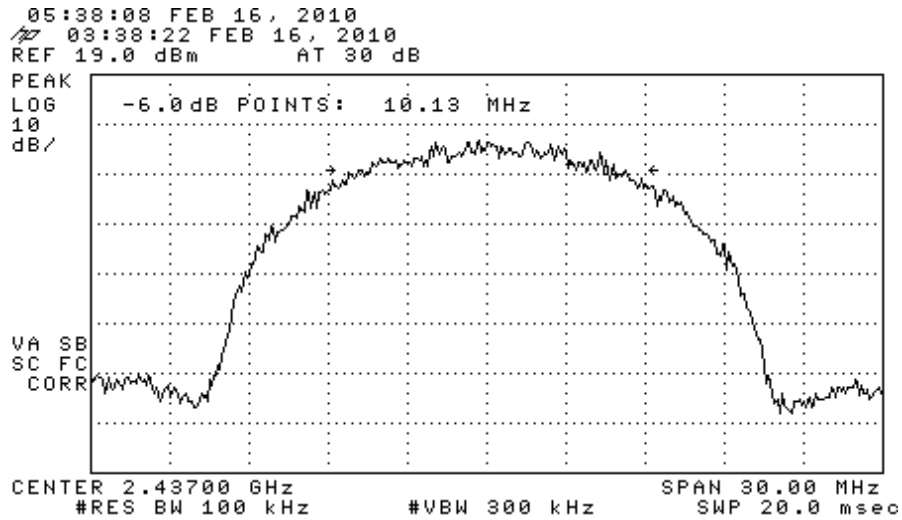
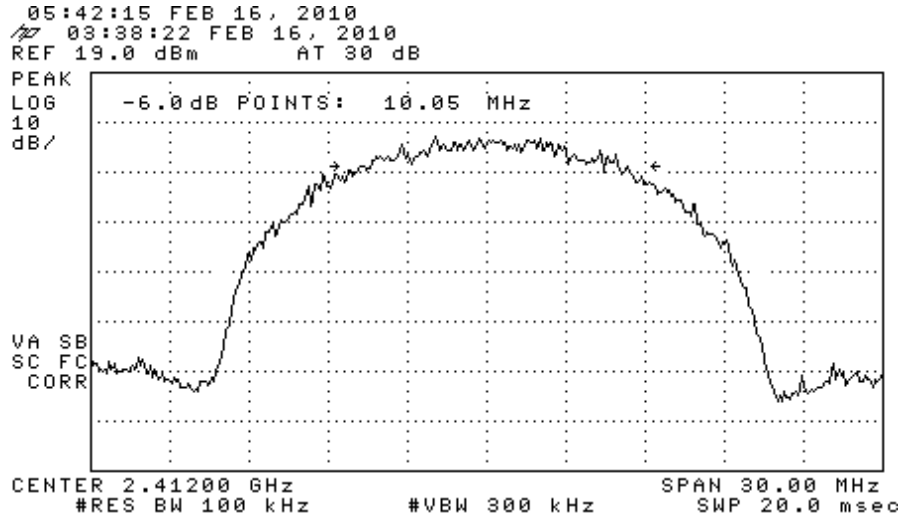


Figure 6.2(a) Radio Alone 802.11 b 6 dB Emission Bandwidth.
(top) Low Channel, (middle) Middle Channel, (bottom) High Channel

University of Michigan Radiation Laboratory
FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

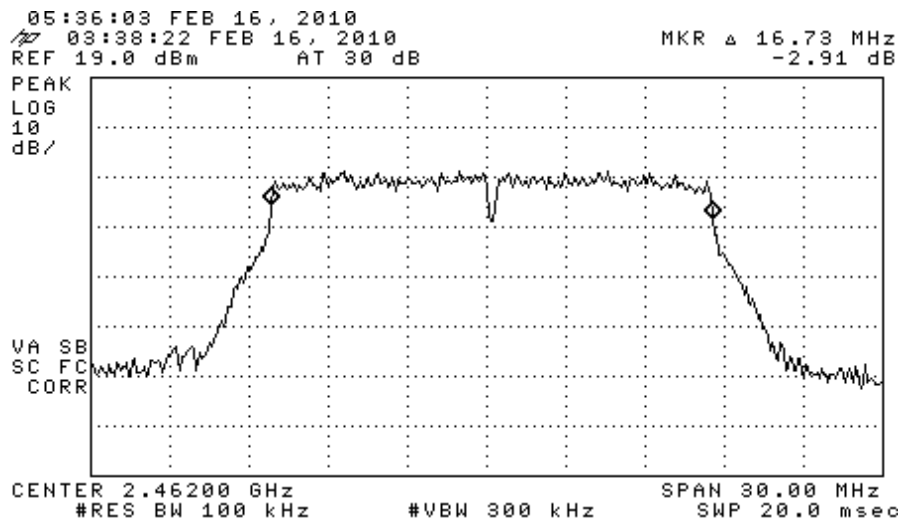
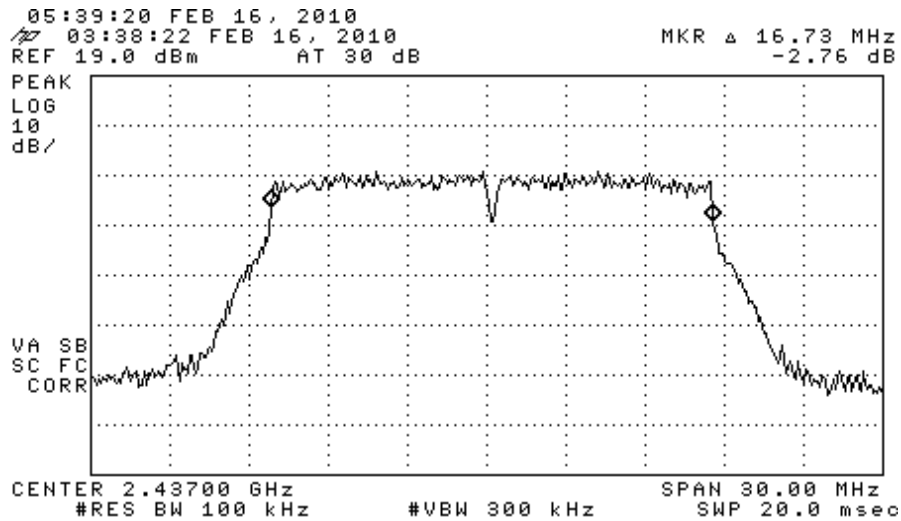
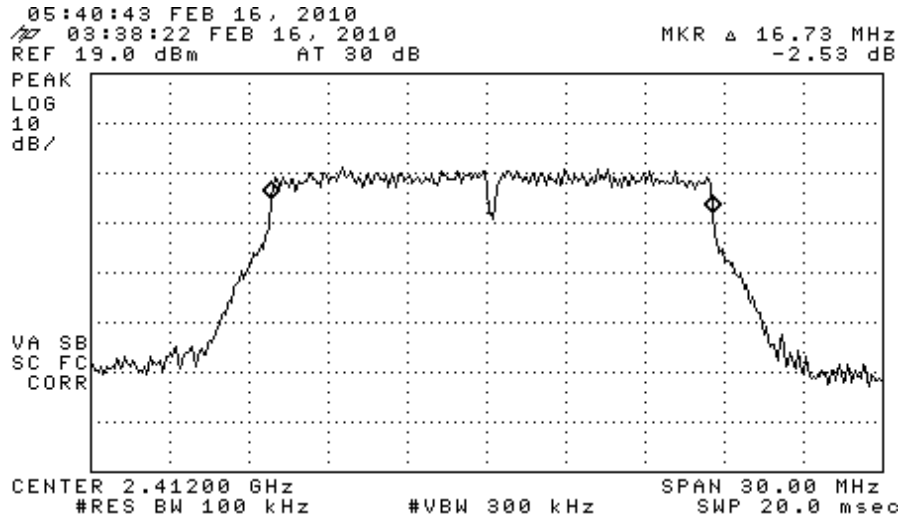


Figure 6.2(b) Radio Alone 802.11 g 6 dB Emission Bandwidth.
(top) Low Channel, (middle) Middle Channel, (bottom) High Channel

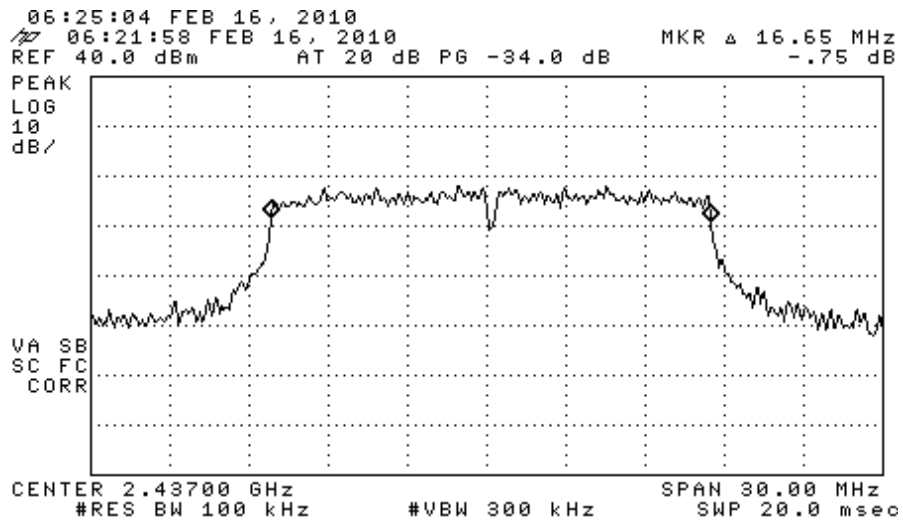
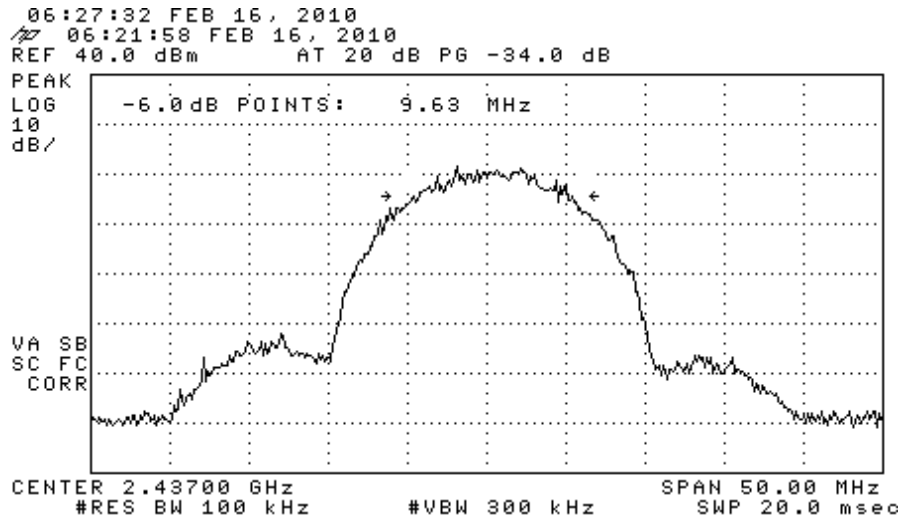


Figure 6.2(c) Radio + Amplifier 6 dB Emission Bandwidth (Middle Channel).
(top) 802.11b mode, (bottom) 802.11g mode

University of Michigan Radiation Laboratory
 FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

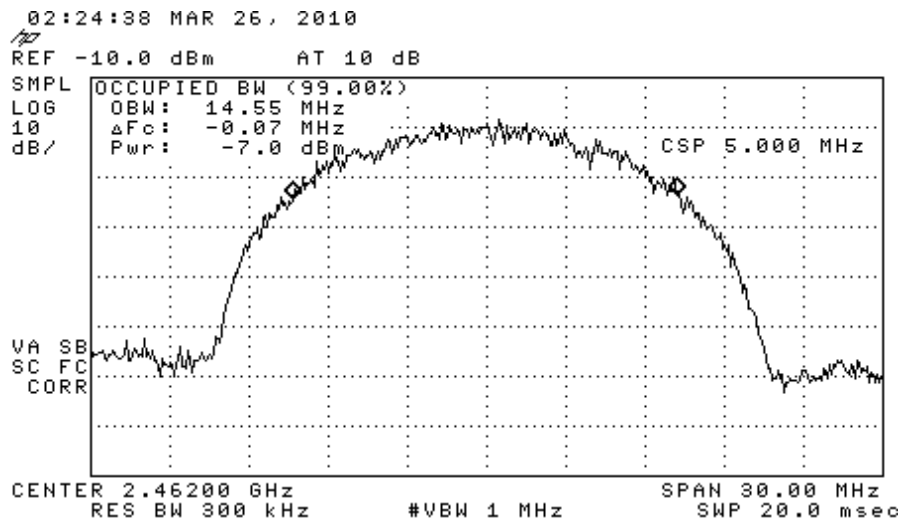
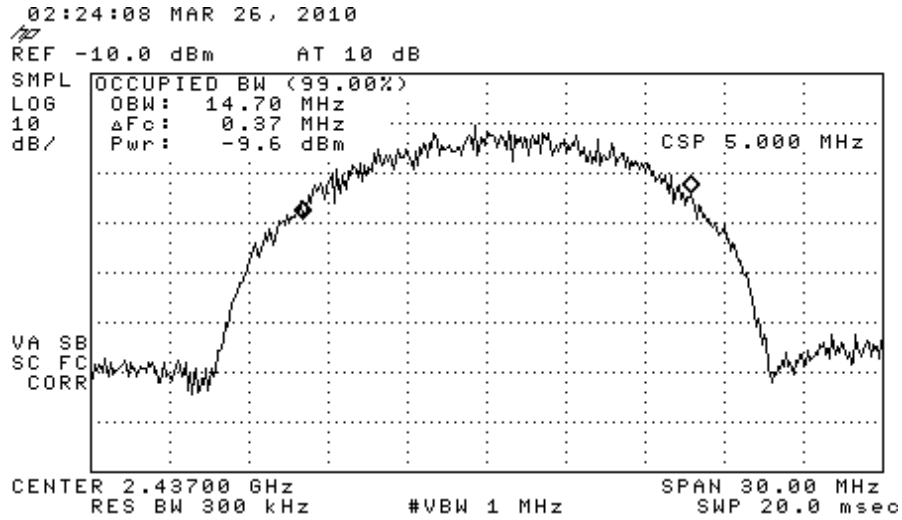
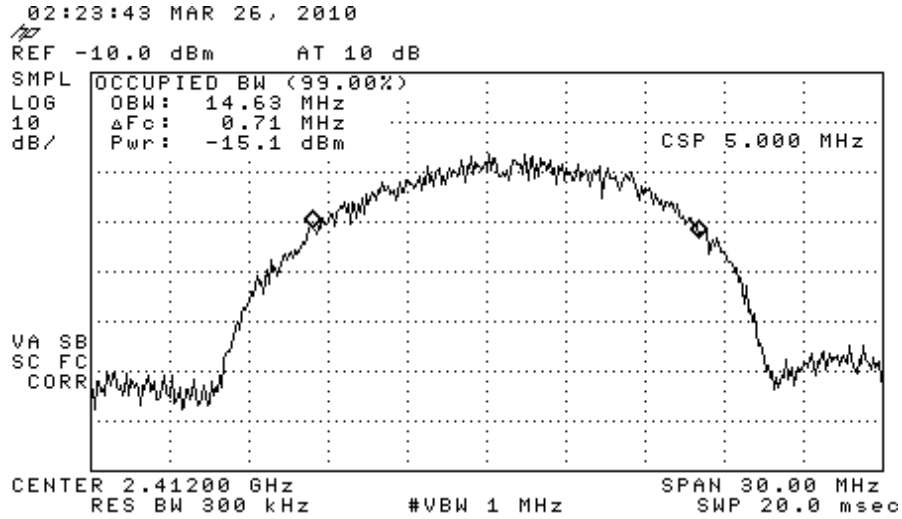


Figure 6.2(d) Radio Alone 802.11 b 99% Power Bandwidth.
 (top) Low Channel, (middle) Middle Channel, (bottom) High Channel

University of Michigan Radiation Laboratory
FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

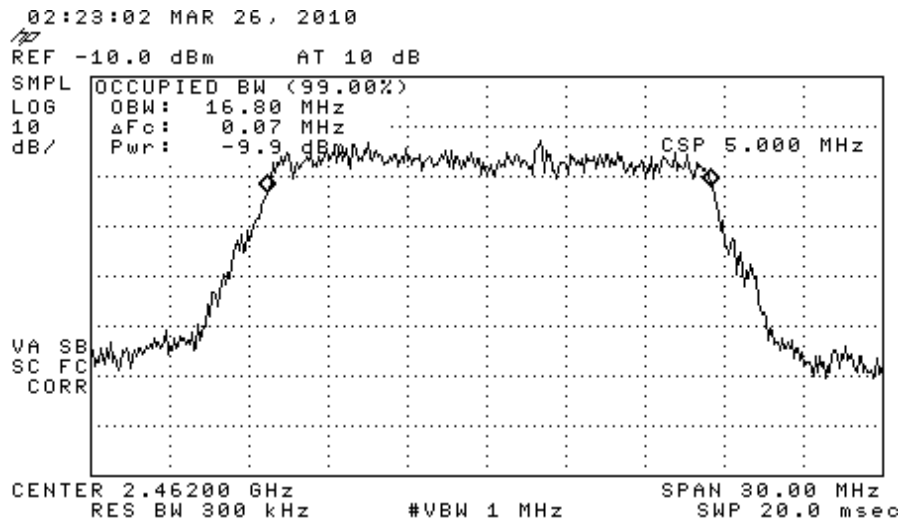
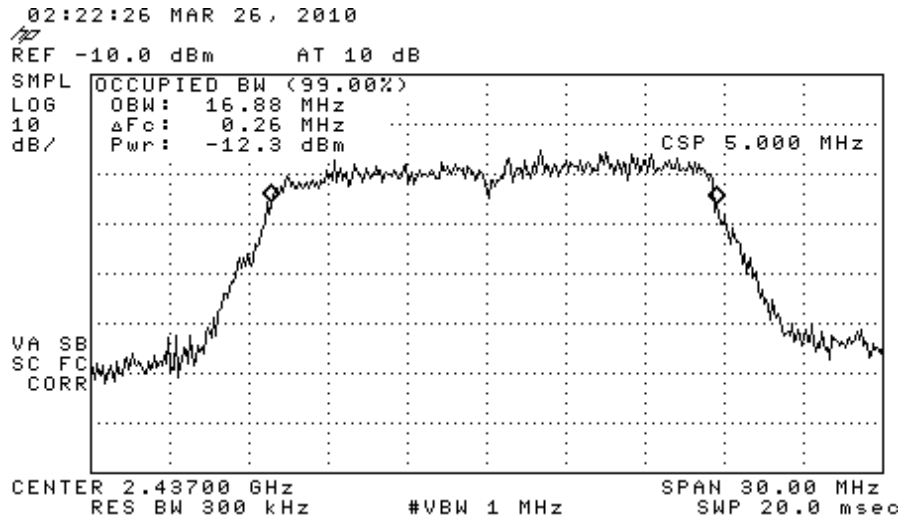
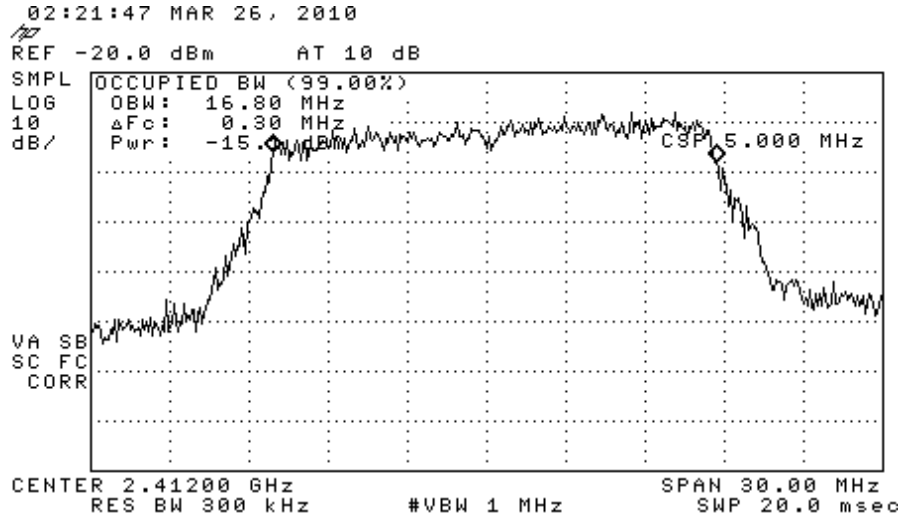


Figure 6.2(e) Radio Alone 802.11 g 99% Power Bandwidth.
(top) Low Channel, (middle) Middle Channel, (bottom) High Channel

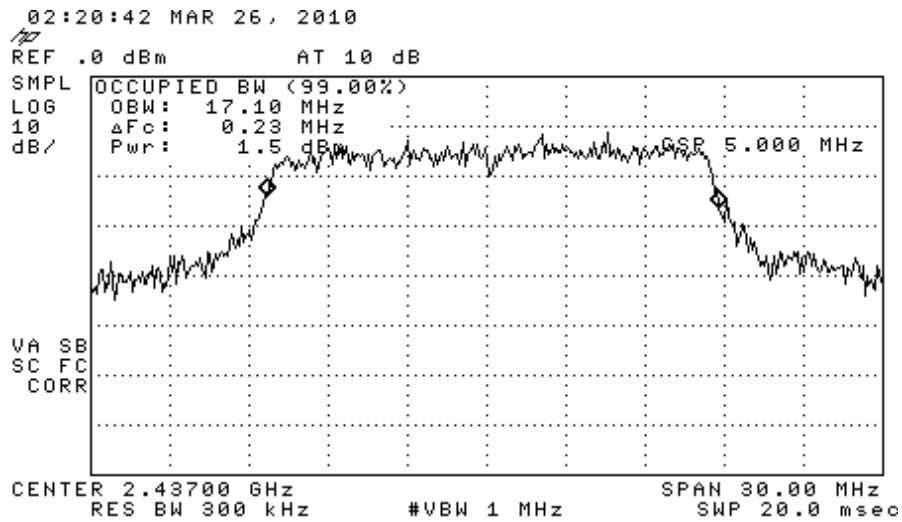
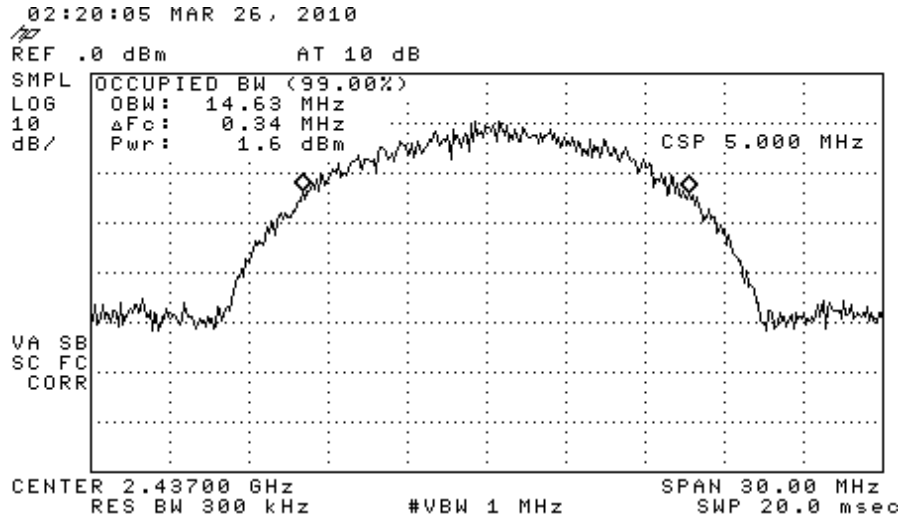


Figure 6.2(f) Radio + Amplifier 99% Power Bandwidth (Middle Channel).
(top) 802.11b mode, (bottom) 802.11g mode

University of Michigan Radiation Laboratory
 FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

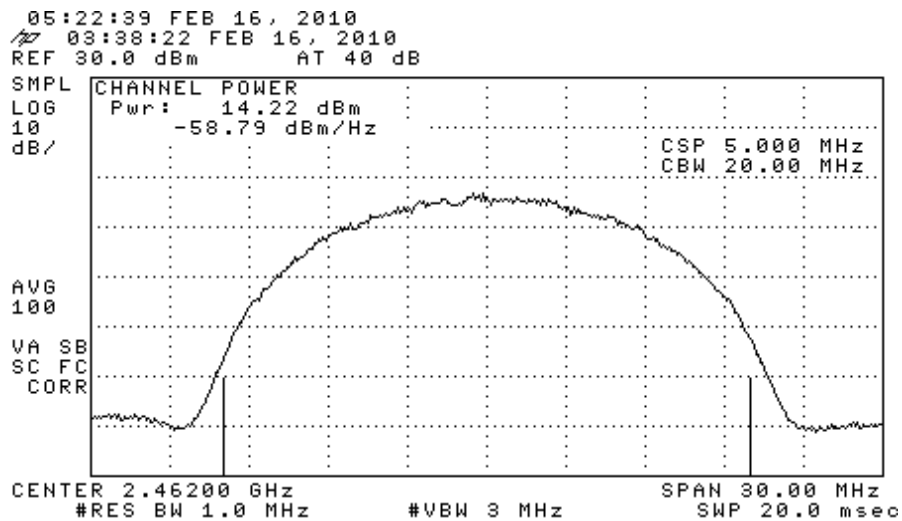
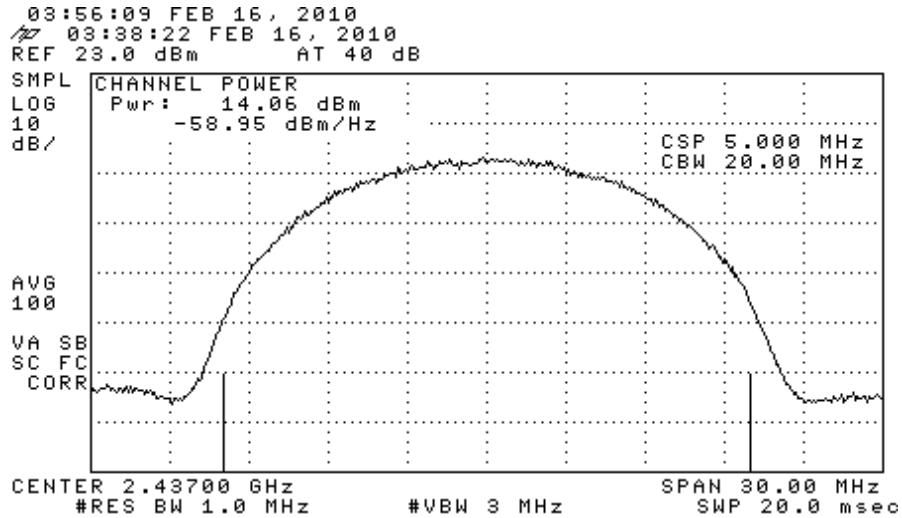
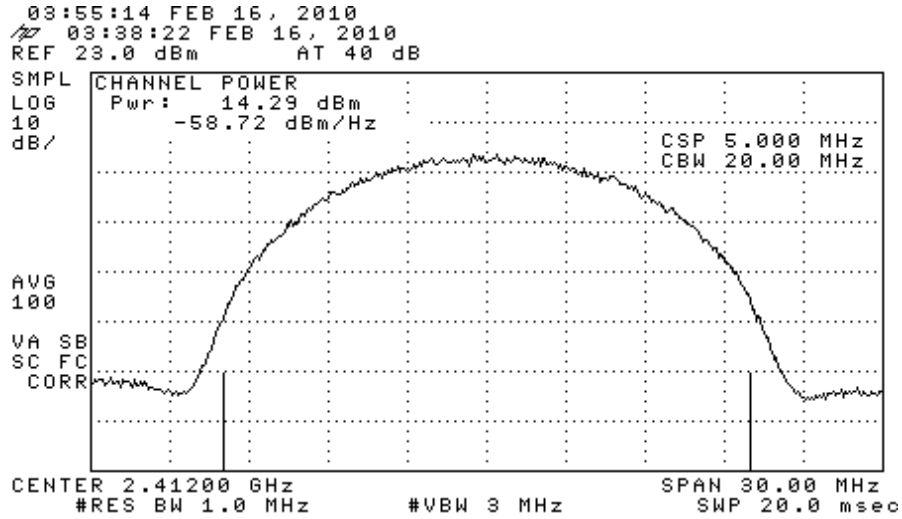


Figure 6.3(a) Radio Alone Output Power (802.11 b mode).
 (top) Low Channel, (middle) Middle Channel, (bottom) High Channel

University of Michigan Radiation Laboratory
FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

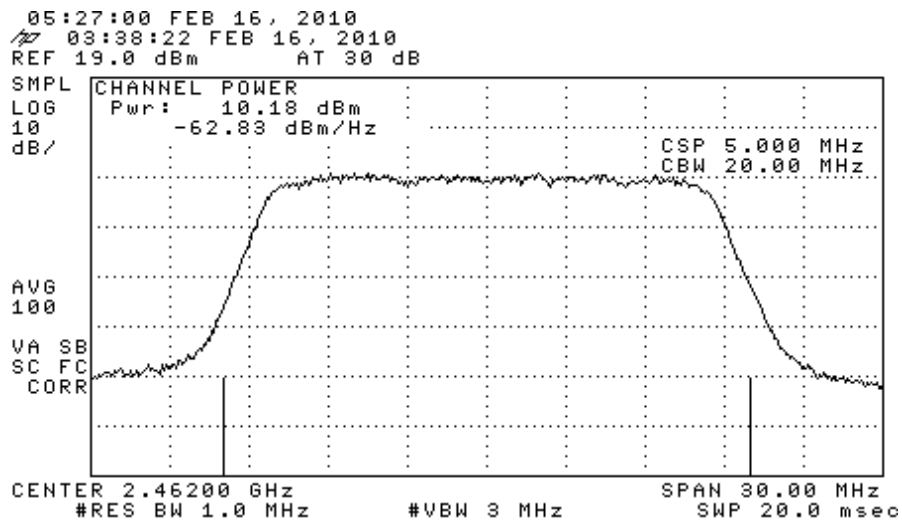
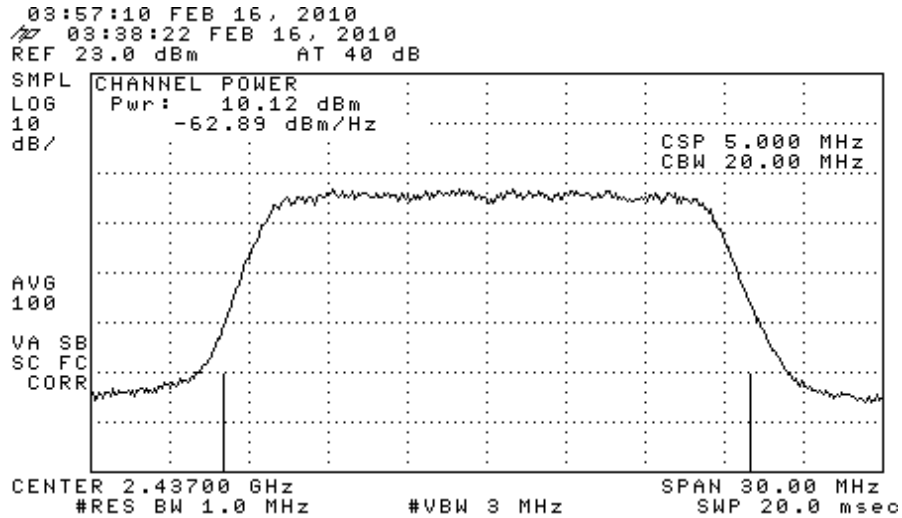
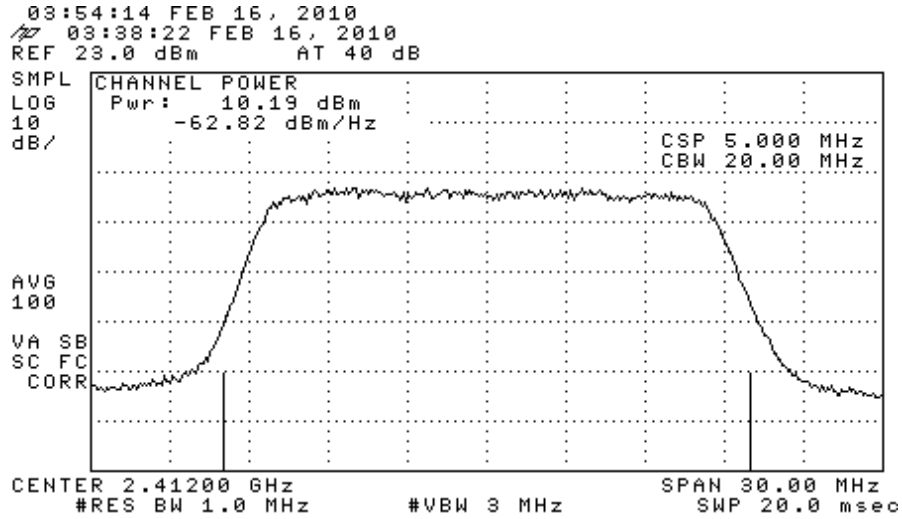


Figure 6.3(b) Radio Alone Output Power (802.11 g mode).
(top) Low Channel, (middle) Middle Channel, (bottom) High Channel







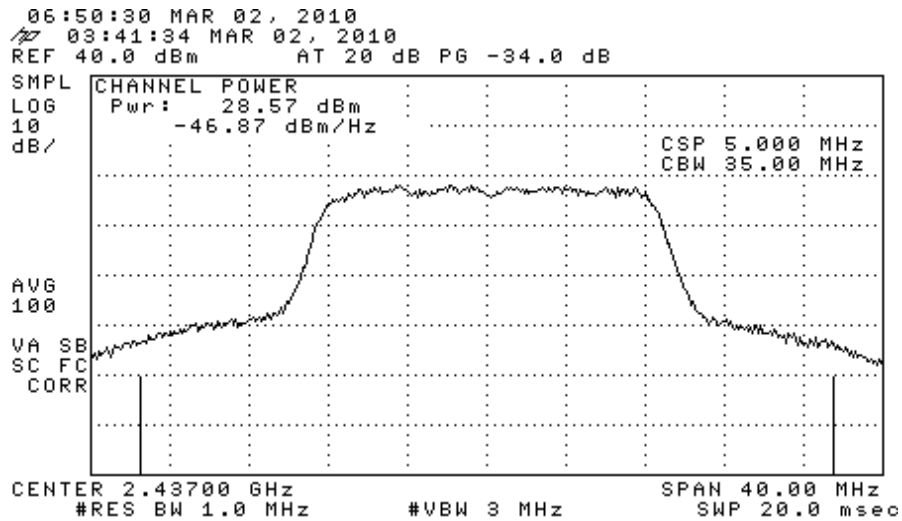


Figure 6.3(c) Radio + Amplifier Output Power (Middle Channel).
(top) 802.11b mode, (bottom) 802.11g mode.

University of Michigan Radiation Laboratory
 FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

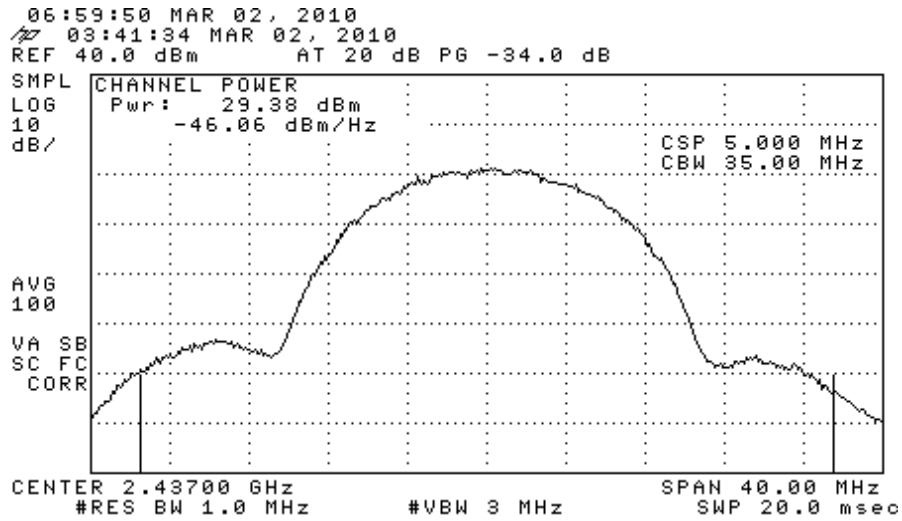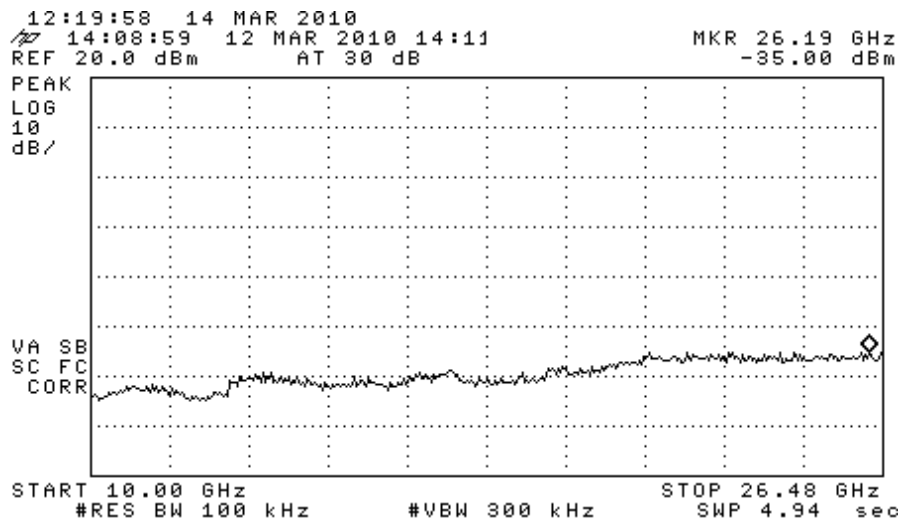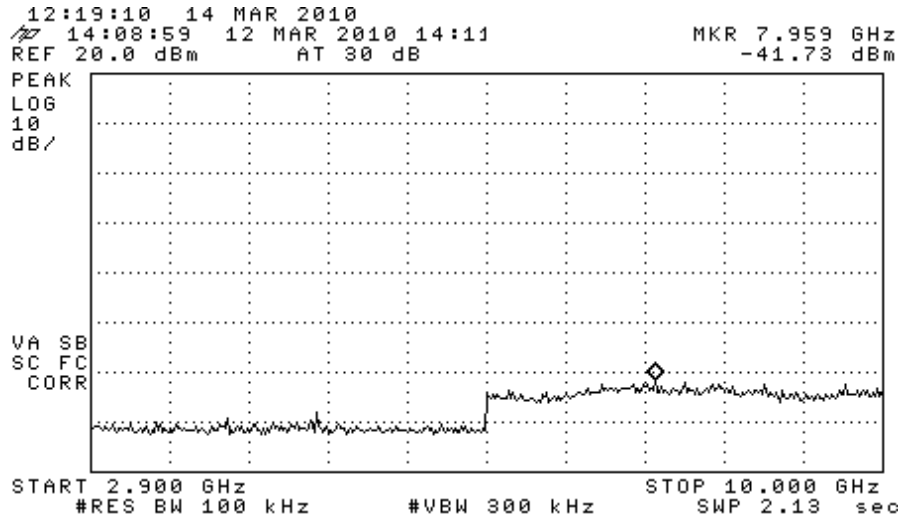
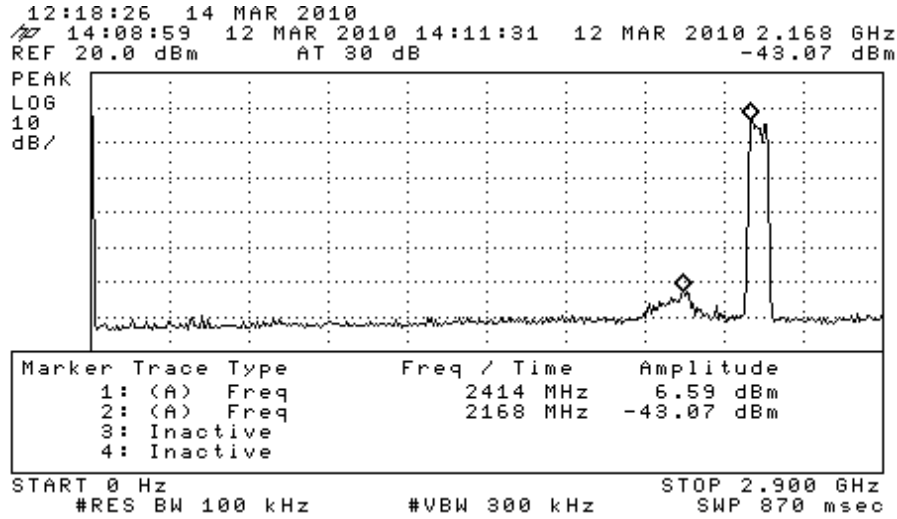
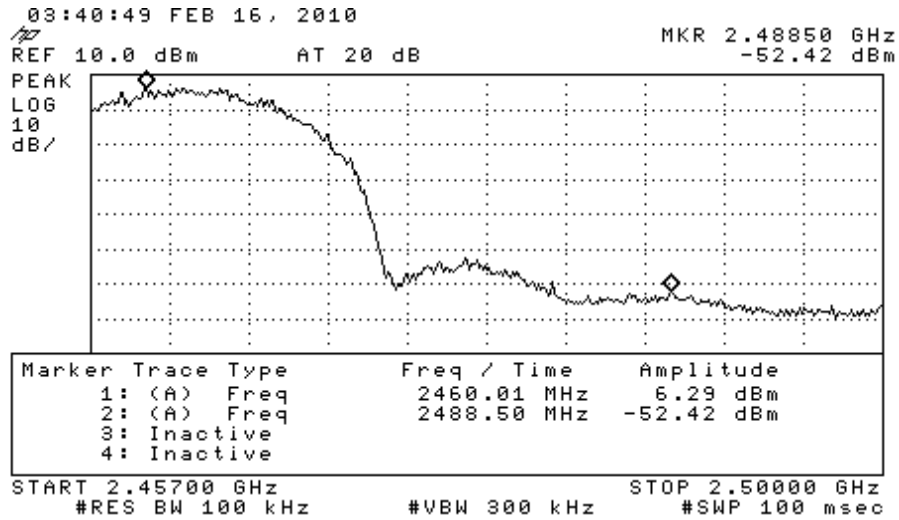


**Figure 6.4(a) Radio Alone Conducted Spurious Emissions (802.11 b mode).
 (low, mid, and high channels)**


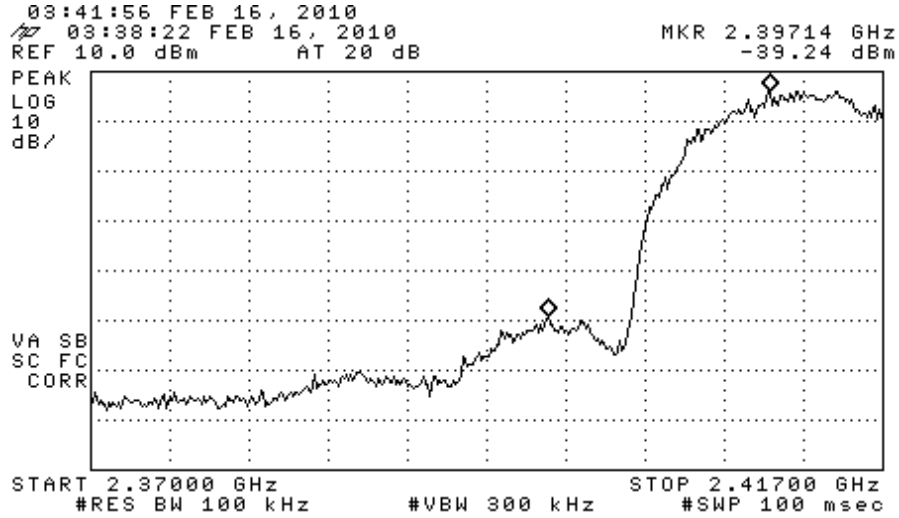


**Figure 6.4(b) Radio Alone Conducted Band-Edge Spurious Emissions (802.11 b mode)
 (low, mid, and high channels)**

University of Michigan Radiation Laboratory
 FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

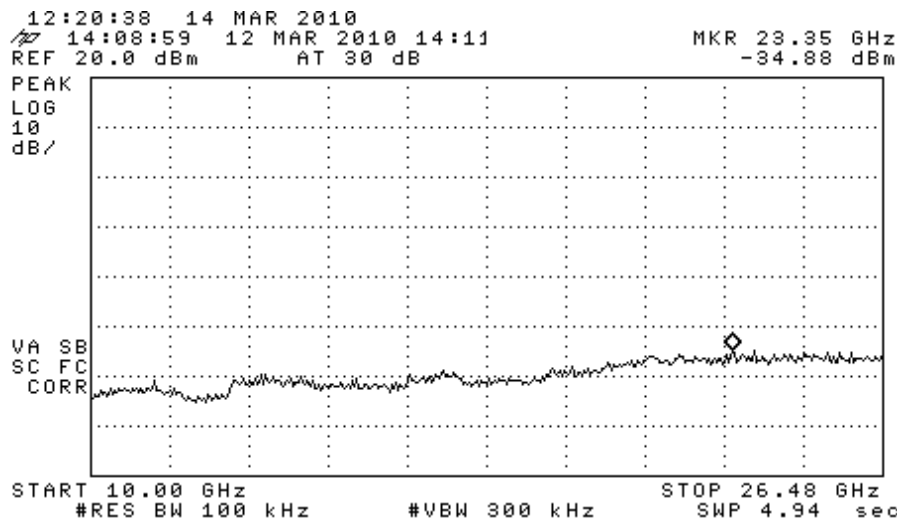
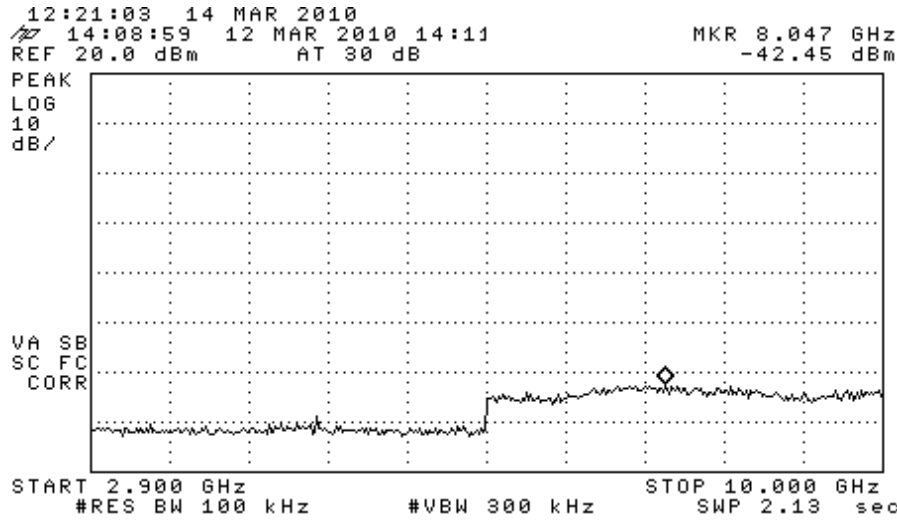
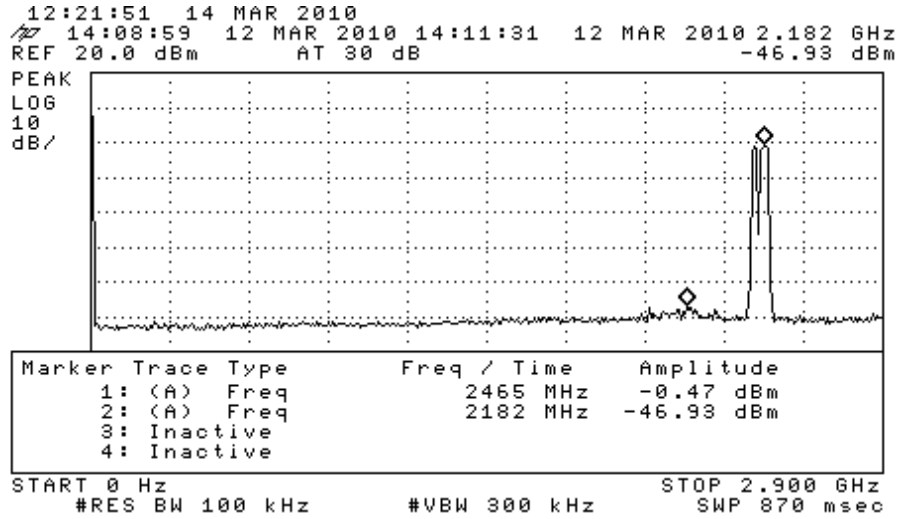


**Figure 6.4(c) Radio Alone Conducted Spurious Emissions (802.11 g mode).
 (low, mid, and high channels)**

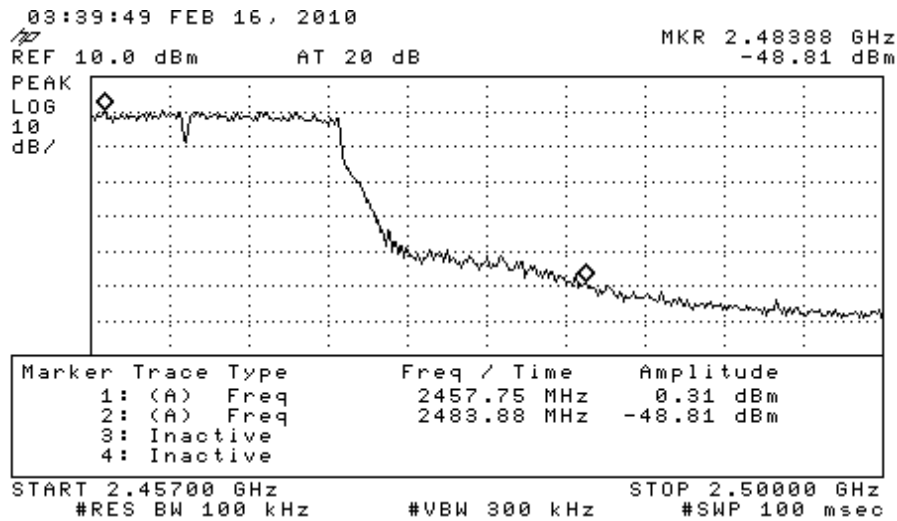
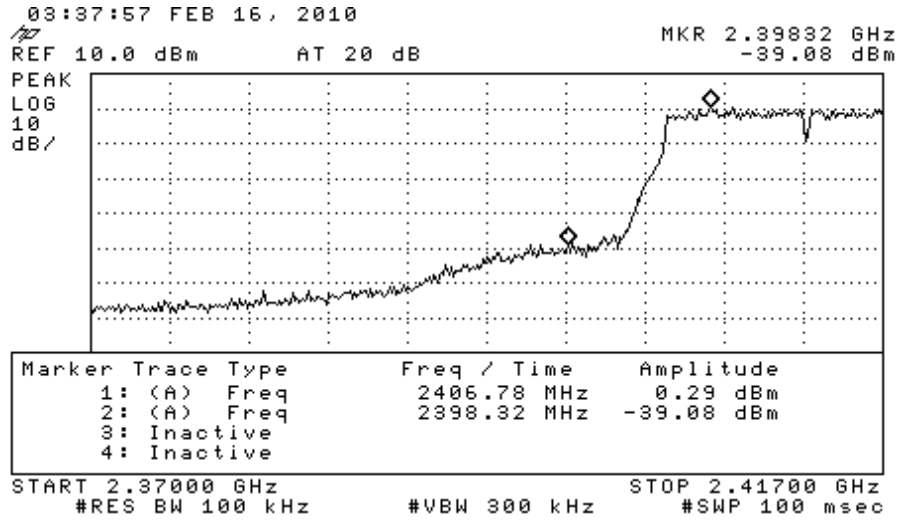


**Figure 6.4(d) Radio Alone Conducted Band-Edge Spurious Emissions (802.11 g mode)
 (low, mid, and high channels)**

University of Michigan Radiation Laboratory
 FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

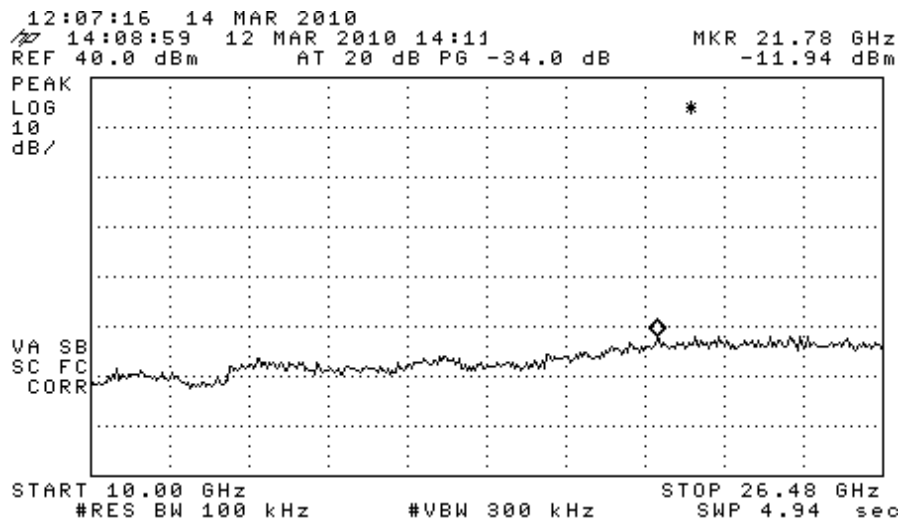
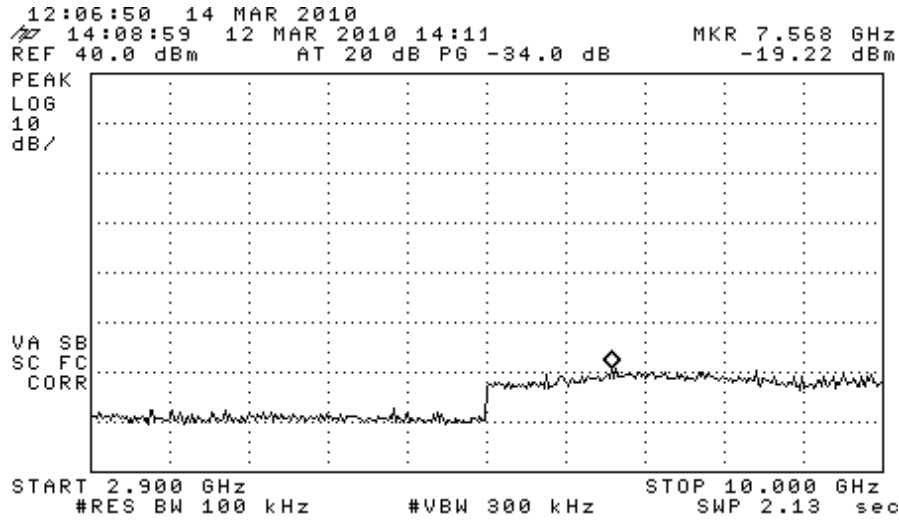
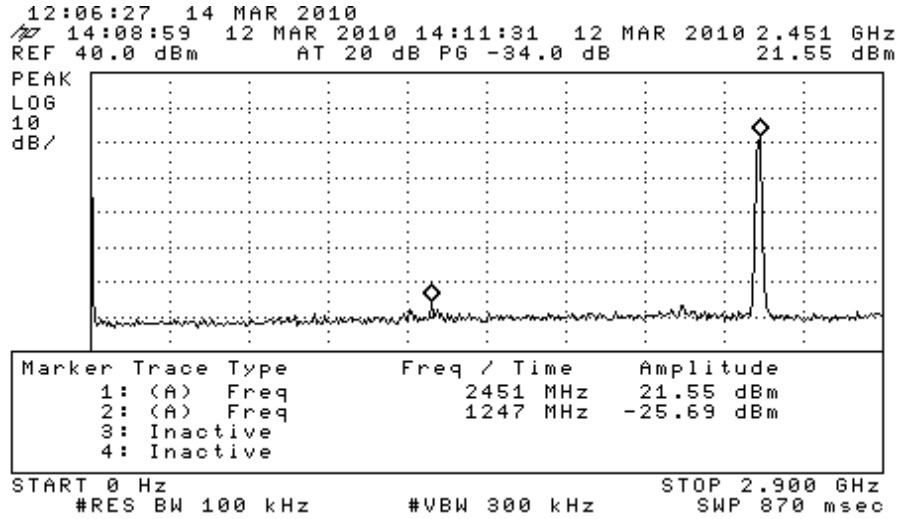


**Figure 6.4(e) Radio+Amplifier Conducted Spurious Emissions (Middle Channel).
 (both 802.11b mode)**

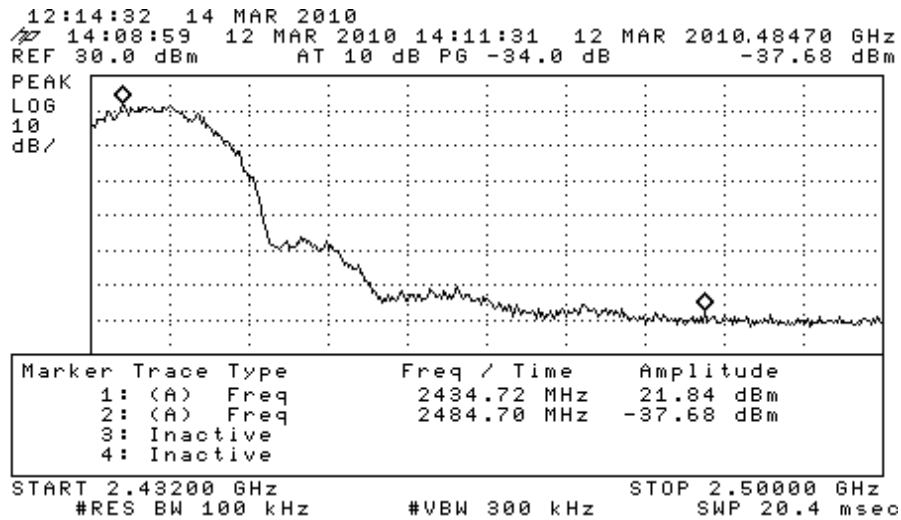
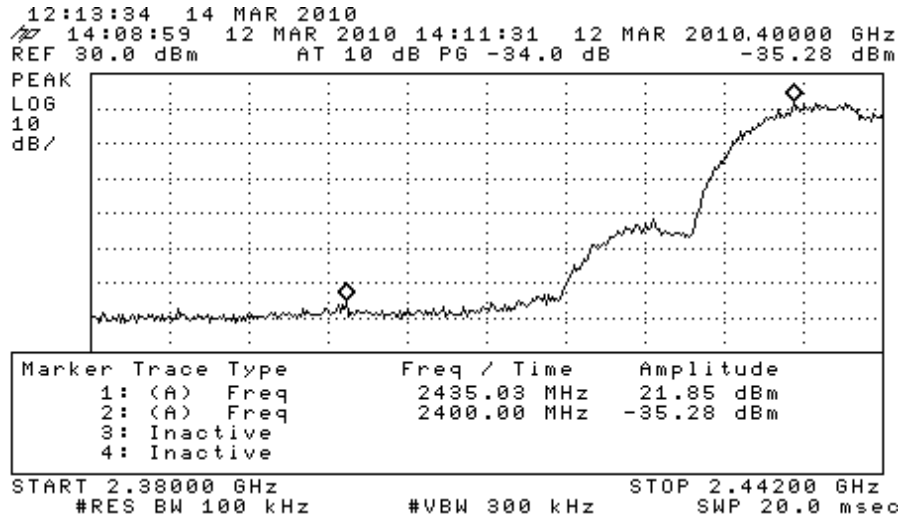


**Figure 6.4(f) Radio+Amplifier Conducted Band-Edge Spurious Emissions (Middle Channel).
 (802.11b mode)**

University of Michigan Radiation Laboratory
 FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

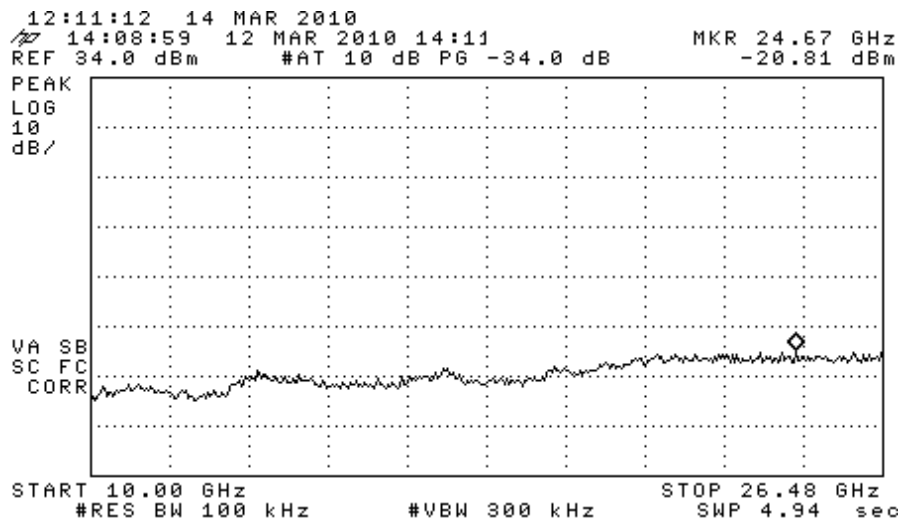
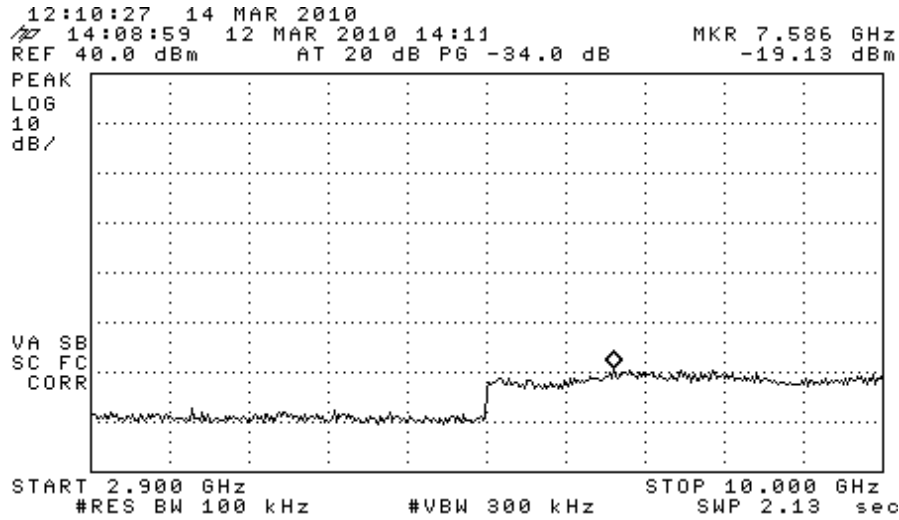
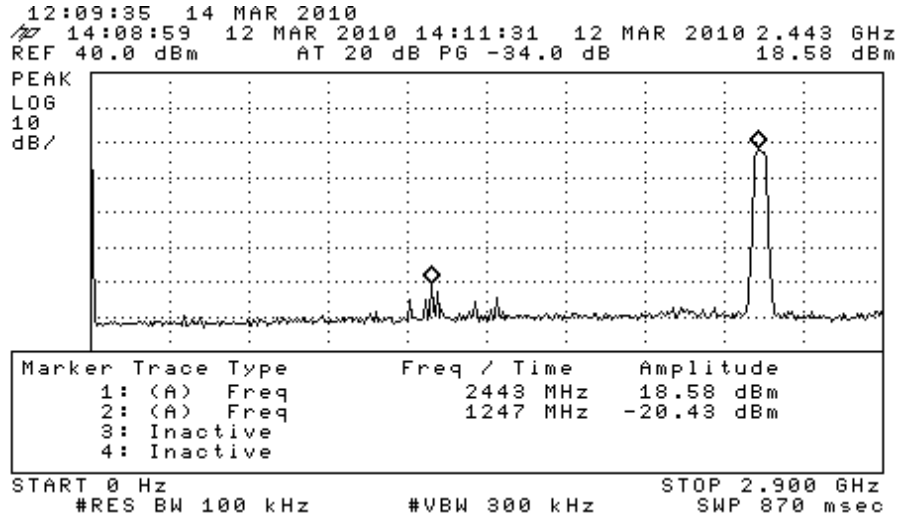


**Figure 6.4(g) Radio+Amplifier Conducted Spurious Emissions (Middle Channel).
 (both 802.11b mode)**

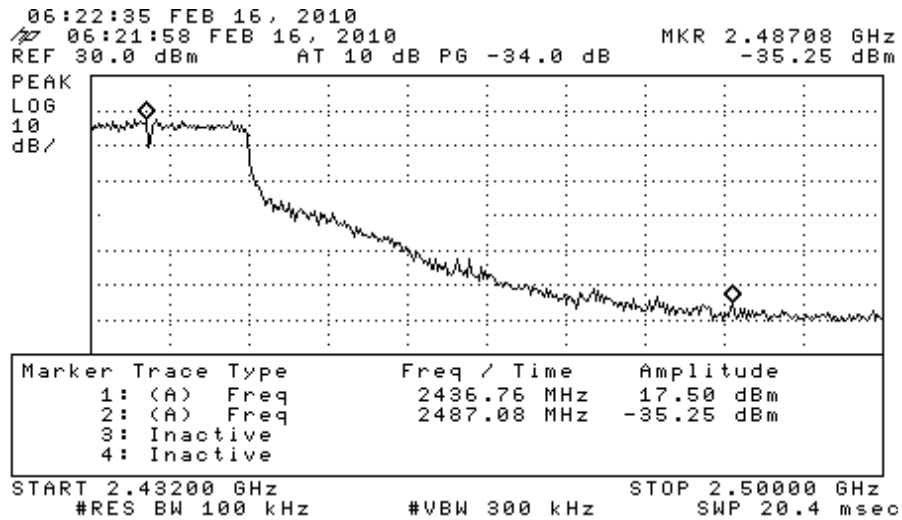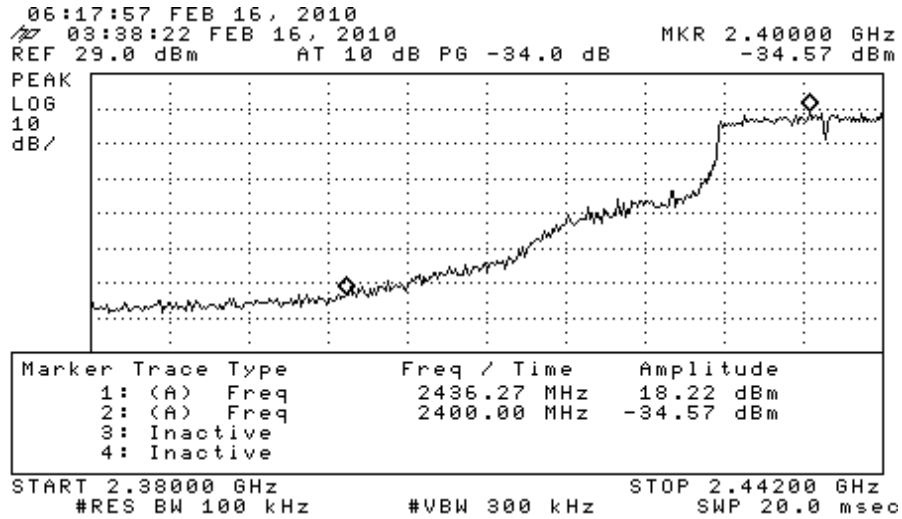




**Figure 6.4(h) Radio+Amplifier Conducted Band-Edge Spurious Emissions (Middle Channel).
 (802.11g mode)**

University of Michigan Radiation Laboratory
 FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

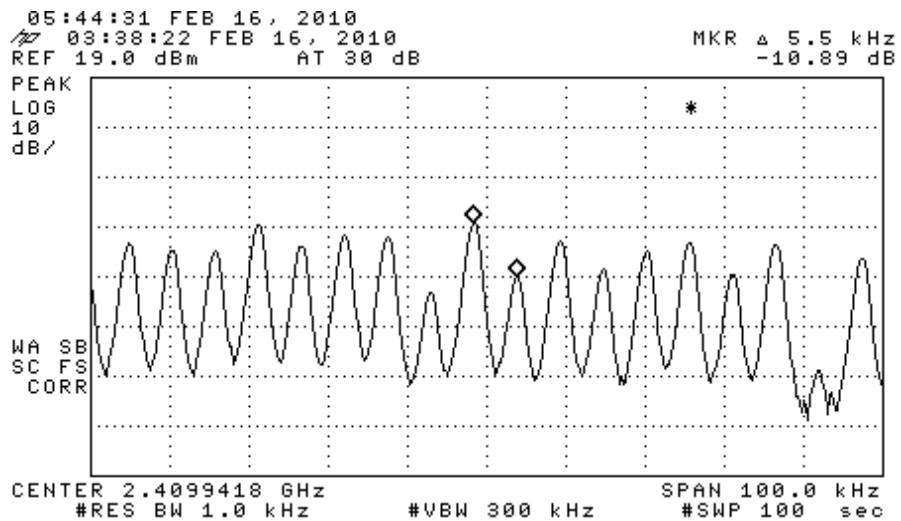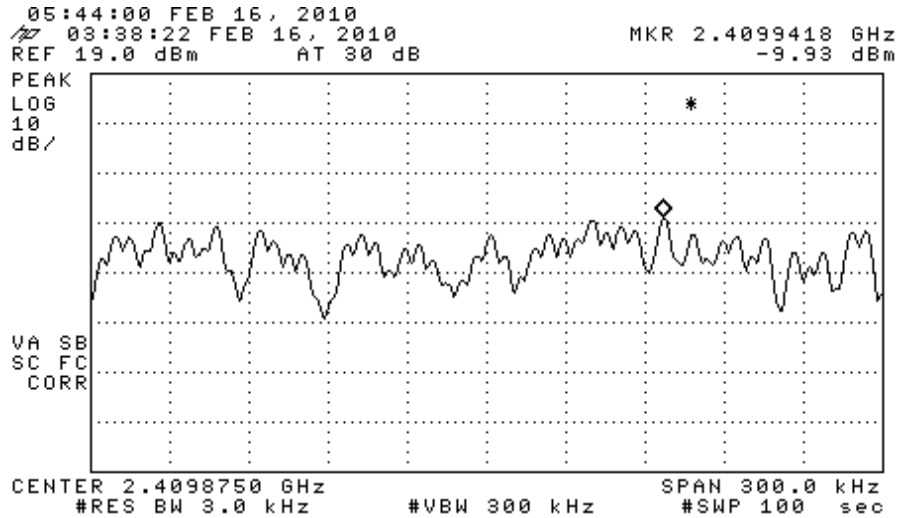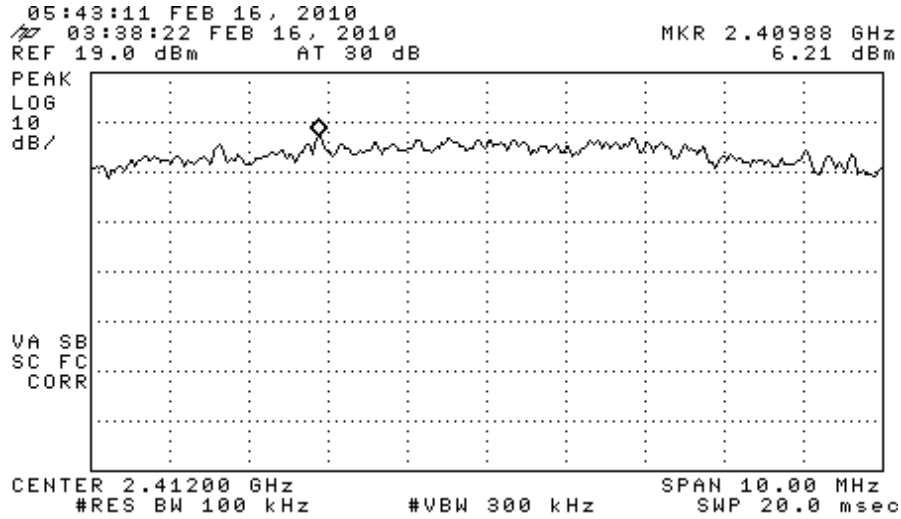

**Figure 6.5(a) Radio Alone Power Spectral Density (802.11 b mode).
 (only low channel plots shown)**

University of Michigan Radiation Laboratory
 FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

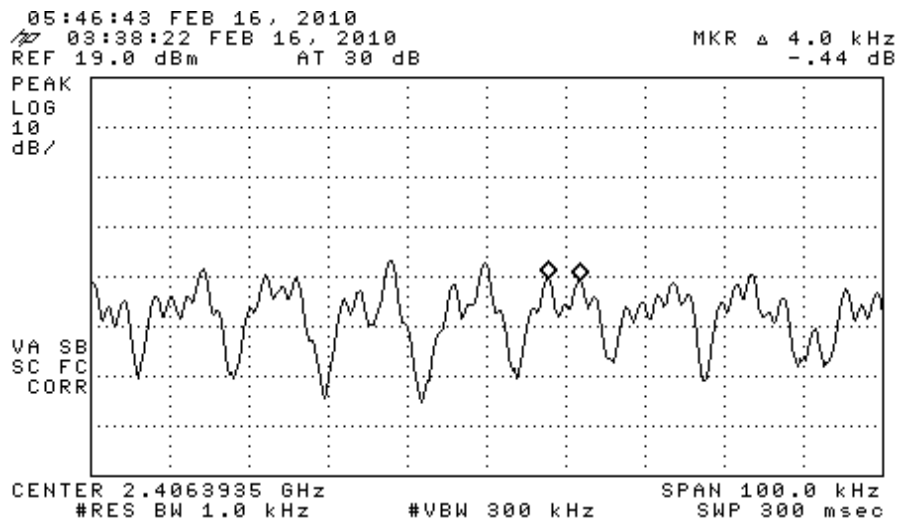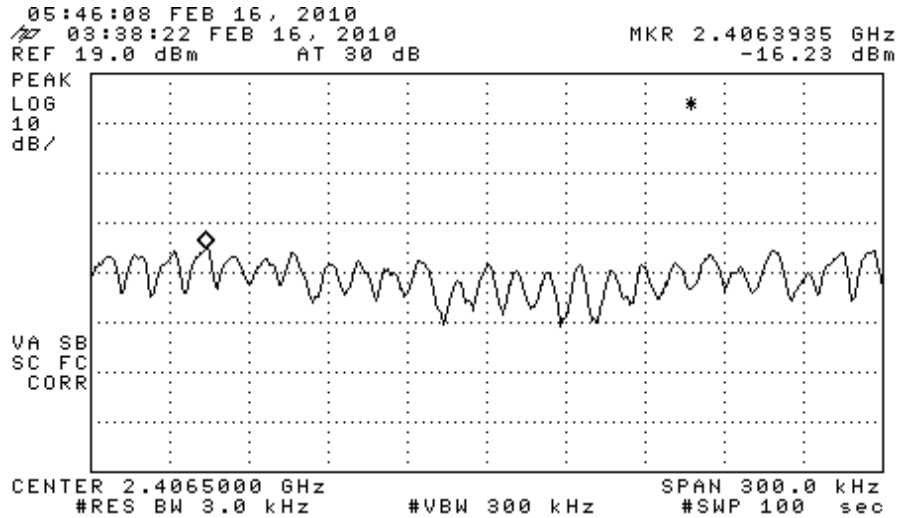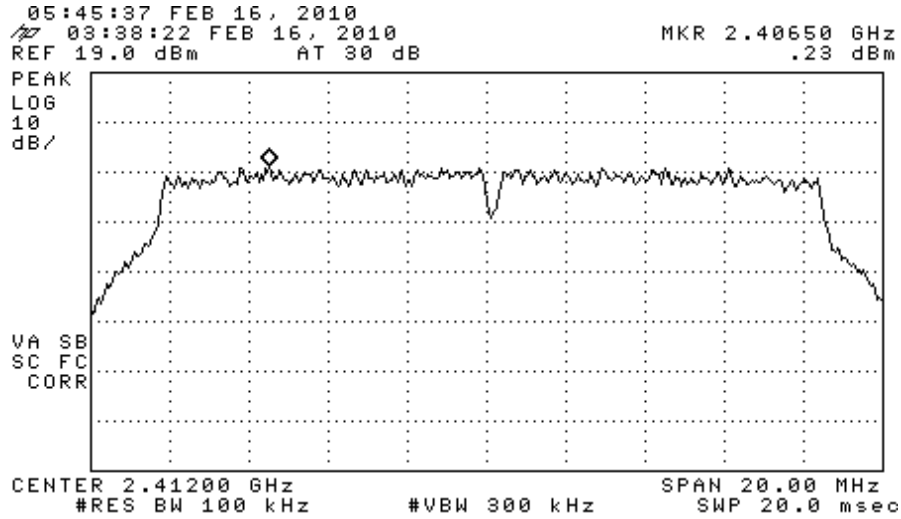

**Figure 6.5(b) Radio Alone Power Spectral Density (802.11 g mode).
 (only low channel plots shown)**

University of Michigan Radiation Laboratory
FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553






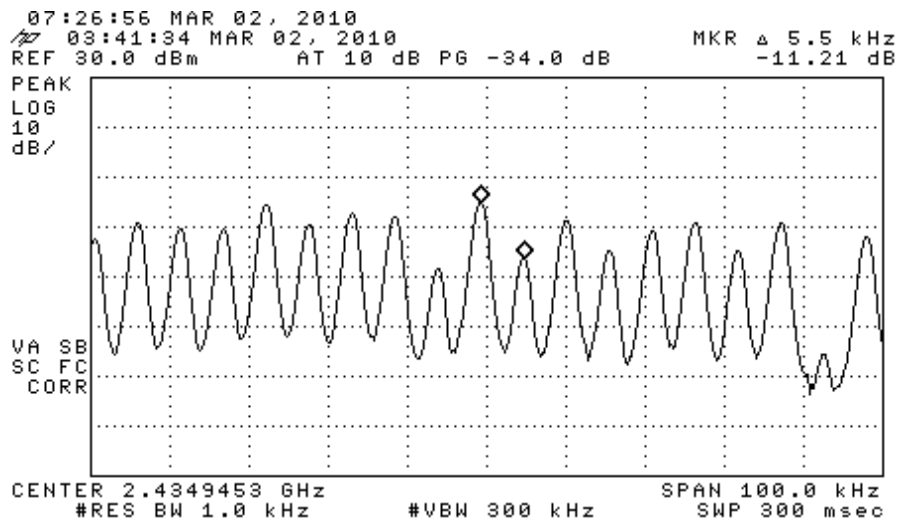


Figure 6.5(c) Radio + Amplifier Power Spectral Density (802.11 b mode).
(middle channel)

University of Michigan Radiation Laboratory
 FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-553

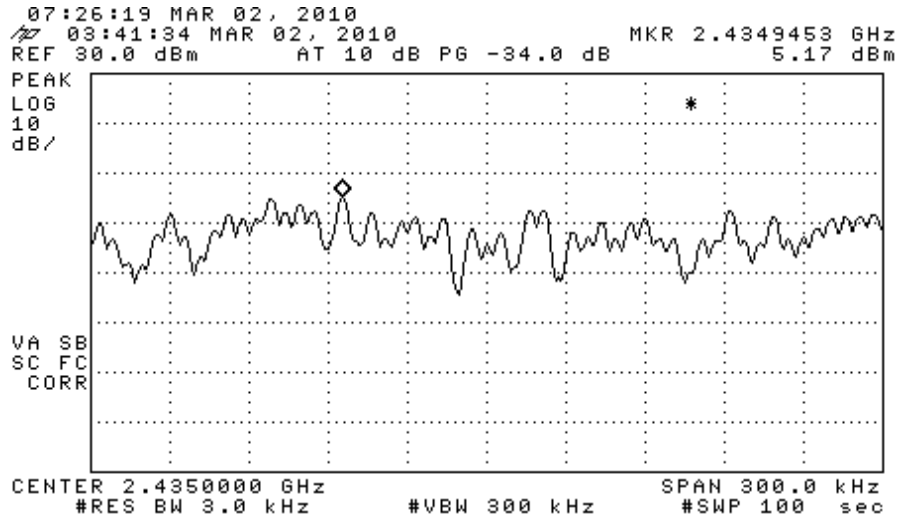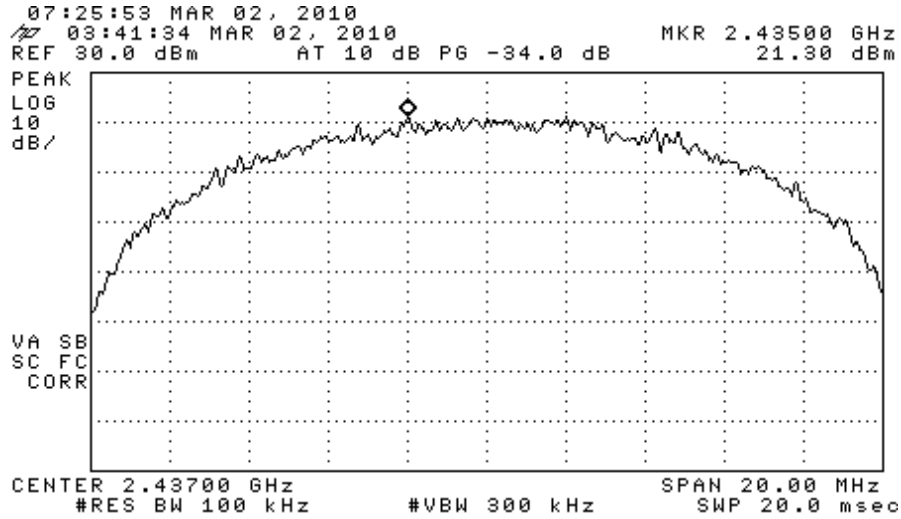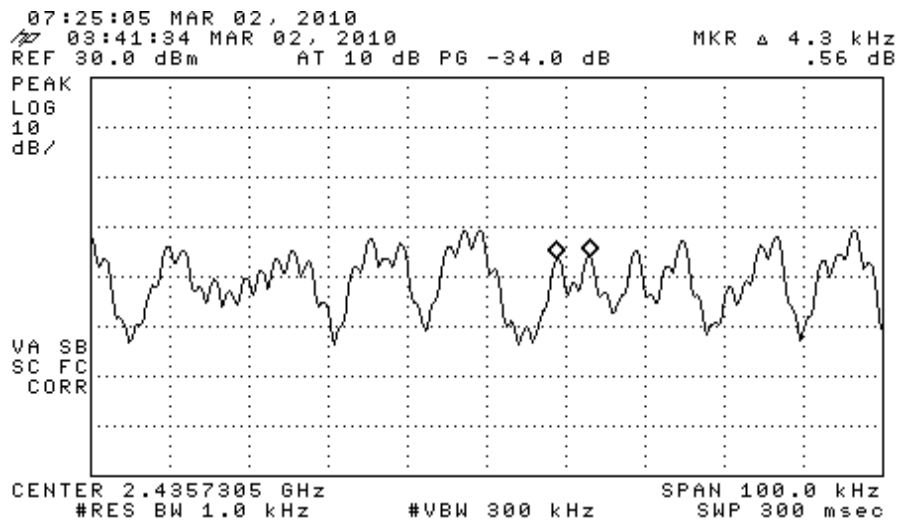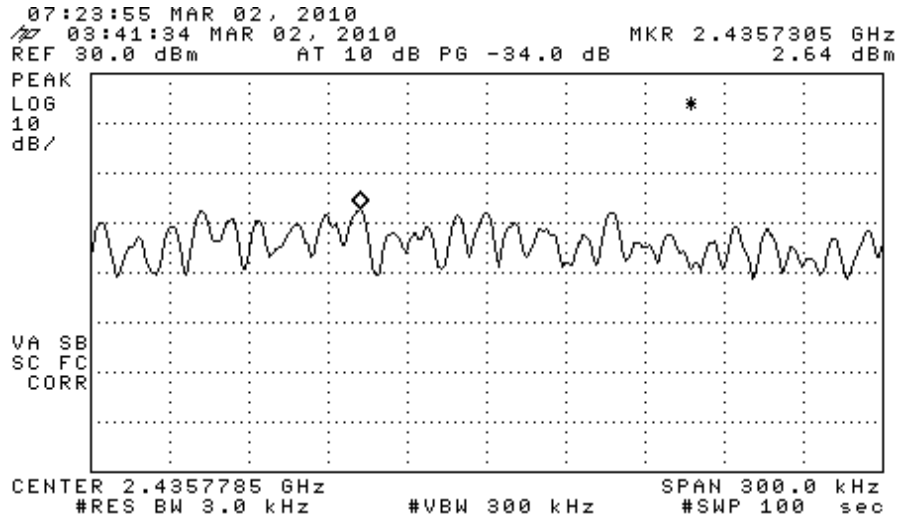

**Figure 6.5(d) Radio + Amplifier Power Spectral Density (802.11 g mode).
 (middle channel)**

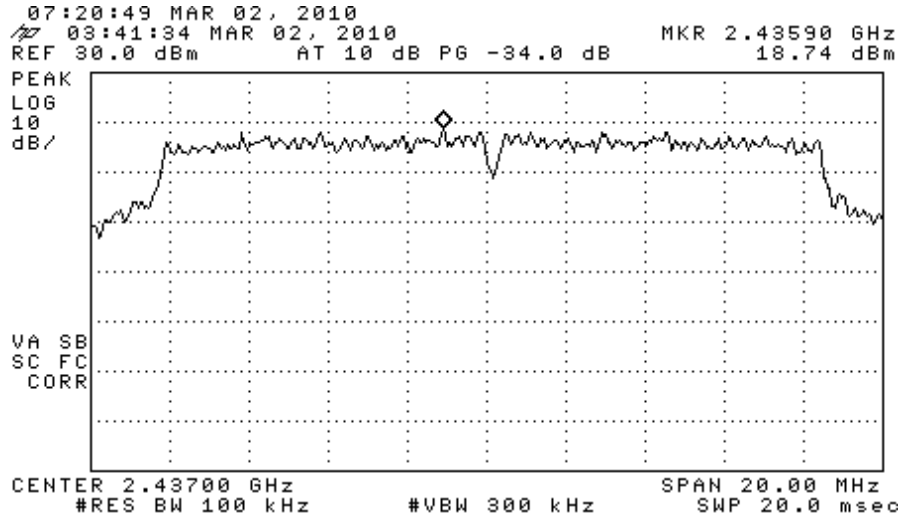

Photograph 6.1: Radiated Test Setup



Photograph 6.2: Conducted Test Setup