

TABLE OF CONTENTS LIST

APPLICANT: PREMIER COMMUNICATIONS

FCC ID: N2EPR160B

TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE 2.....TECHNICAL DESCRIPTION CONTD. & RF POWER OUTPUT
PAGE 3.....MODULATION CHARACTERISTICS & OCCUPIED BANDWIDTH
PAGE 4.....OCCUPIED BANDWIDTH
PAGE 5.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 6-7....FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 7.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 8.....FREQUENCY STABILITY
PAGE 9-10...TRANSIENT FREQUENCY STABILITY
PAGE 11.....LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT 1.....POWER OF ATTORNEY LETTER
EXHIBIT 2.....FCC ID LABEL SAMPLE
EXHIBIT 3.....SKETCH OF FCC ID LABEL LOCATION
EXHIBIT 4.....LETTER REGARDING FREQUENCY CHANGES
EXHIBIT 5A.....EXTERNAL FRONT VIEW PHOTOGRAPH
EXHIBIT 5B.....EXTERNAL REAR VIEW PHOTOGRAPH
EXHIBIT 5C-5D....INTERNAL COMPONENT SIDE PHOTOGRAPHS
EXHIBIT 5E-5F....INTERNAL SOLDER SIDE PHOTOGRAPHS
EXHIBIT 6.....BLOCK DIAGRAM
EXHIBIT 7.....MAIN SCHEMATIC
EXHIBIT 8.....SCHEMATIC - CPU
EXHIBIT 9A.....PARTS LIST -RF BOARD
EXHIBIT 9B.....PARTS LIST - VCO
EXHIBIT 10.....USER'S MANUAL
EXHIBIT 11A-11D...CIRCUIT DESCRIPTION
EXHIBIT 12.....TUNING PROCEDURE
EXHIBIT 13A.....OCCUPIED BANDWIDTH PLOT - CW
EXHIBIT 13B.....OCCUPIED BANDWIDTH PLOT
EXHIBIT 14A-14B...TRANSIENT FREQUENCY RESPONSE
EXHIBIT 15.....AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT 16A.....MODULATION LIMITING - 300 Hz
EXHIBIT 16B.....MODULATION LIMITING - 1000 Hz
EXHIBIT 16C.....MODULATION LIMITING - 3000 Hz

APPLICANT: PREMIER COMMUNICATIONS

FCC ID: N2EPR160B

DATE: 10 March 2000

REPORT #: T:\CUS\P\PREMIER\PRE5A0\PRE5A0.RPT

PAGE: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

2.1033 (C) (1) (2) PREMIER COMMUNICATIONS will sell the FCCID:
N2EPR160B

VHF transciever in quantity, for use under FCC
RULES PART 22, 90, 95,

2.1033 (C) TECHNICAL DESCRIPTION

(3) The user manual is included as Exhibit 10.

(4) ALLOWED AUTHORIZED BANDWIDTH = 11.25KHz.
90.209(b)(5)

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 1.5 \text{ K (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(1.5K)(1) = 6.0K + 3.0K = 9.0 \text{ K}$$

Type of Emission: 9K0F3E

ALLOWED AUTHORIZED BANDWIDTH = 20.0KHz.
90.209(b)(5)

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 1.5 \text{ K}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(1.5)(1) = 9.0$$

2.1033(C)(5) Frequency Range: 136-174 MHz

(6) Power Range and Controls: This UUT has three (3) power
ranges, 0.5, 2.5, 5.0 watts

(7) 2.1033(c)(b) Maximum Output Power Rating: 5.0Watts
into a 50 ohm resistive load.

(8) DC Voltages and Current into Final Amplifier:

POWER INPUT	FINAL AMPLIFIER ONLY
POWER OUT	5.4

Vce Volts	12.5v
-----------	-------

Ice Amps(hi)	1.5
---------------	-----

Ice Amps(med)	1.2
---------------	-----

Pin Watts	10.2	Ice Amps (lo)	0.60
-----------	------	---------------	------

APPLICANT: PREMIER COMMUNICATIONS

FCC ID: N2EPR160B

DATE: 10 March 2000

REPORT #: T:\CUS\P\PREMIER\PRE5A0\PRE5A0.RPT

PAGE #: 1


- 2.1033(c)(9) The tune-up procedure is included as Exhibit # 12.
- 2.1033(c)(10) A schematic is included as Exhibit # 7-8.
- 2.1033(c)(11) Photograph or drawing of the label showing the FCC ID is shown in Exhibit # 2 and the location of the label is shown in Exhibit # 3.
- 2.1033(c)(12) Photographs completely documenting the radio are shown in Exhibit # 5.
- 2.1033(c)(13) N/A This is for devices that use digital modulation.
- 2.1033(c)(14) The data required by 2.1046 through 2.1057 follows;
- 2.1046(a) RF power output. The test procedure used was TIA/EIA-603 S2.2.1. RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 7.2V, and the transmitter properly adjusted the RF output measures:

INPUT POWER: (12.5V)(1.5A) = 18.75Watts
 OUTPUT POWER: 5.4 Watts Efficiency: 29%

INPUT POWER(MED): (12.5V)(1.2) = 15.0 Watts
 OUTPUT POWER(L0): 2.6 Watts Efficiency: 17%

INPUT POWER(L0): (12.5V)(0.6) = 7.50 Watts
 OUTPUT POWER(L0): 0.6 Watts Efficiency: 8%

- 2.1046(a) RF power output. The test procedure used was TIA/EIA-603 S2.2.1.

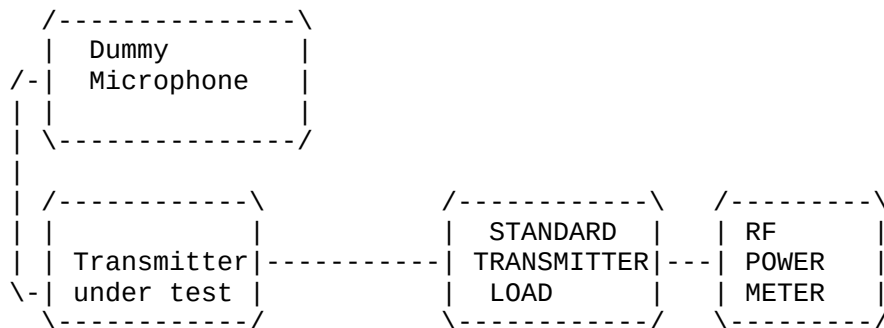


2.1047(a) Modulation characteristics:

AUDIO FREQUENCY RESPONSE The audio frequency response was measured in accordance with TIA/EIA Specification TIA/EIA-603 S2.2.6.2.1. The audio frequency response curve is shown in Exhibit # &audfrres&.

2.1049 AUDIO LOW PASS FILTER Transmitters utilizing analog emissions and meets the requirements of paragraph 90.210(b)&(c) therefore no low-pass filter response in included.

2.1049 AUDIO INPUT VERSUS MODULATION The audio frequency input versus deviation was measured in accordance with TIA/EIA Specification 603 S2.2.6.2.1. with the following exceptions; starting with 1000Hz the input was increased well beyond the deviation changing. This measurement was repeated for the band limits and any frequency deemed appropriate. See Exhibit # 16A-16C.

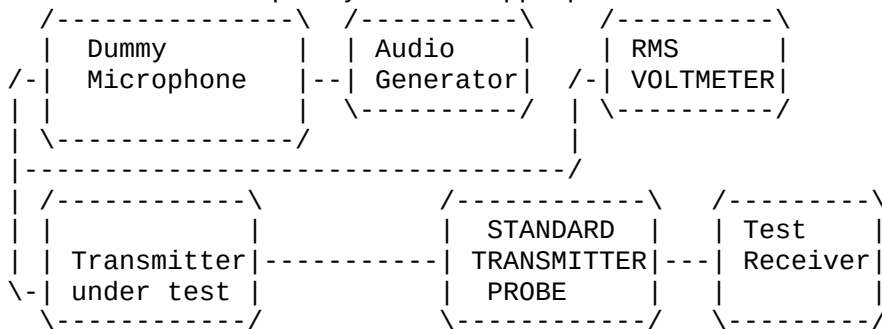

1.The test receiver audio bandwidth was <50Hz to >20,000Hz.

2.1049 Occupied bandwidth:

90.210 (b)

- (1) On any frequency removed from the assigned frequency by more than 50% of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100%, but not more than 250% of the authorized bandwidth: At least 35dB.
- (3) On any frequency removed from the assigned frequency by more than 250% of the authorized bandwidth: At least $43 + 10 \log(P)$ dB.

APPLICANT: PREMIER COMMUNICATIONS

FCC ID: N2EPR160B

DATE: 10 March 2000

REPORT #: T:\CUS\P\PREMIER\PRE5A0\PRE5A0.RPT

PAGE #: 3

90.210 (d) 2

Requirement For 12.5KHz channel bandwidth equipment, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows;

(1) On any frequency from the center of the authorized bandwidth f0: Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdd kHz) of more than 5.625kHz but no more than 12.5kHz: At least $7.27(f_d - 2.88\text{kHz})\text{dB}$

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdd kHz) of more than 12.5kHz: At least $50 + 10 \log(P)$ dB or 70dB, whichever is the lesser attenuation.


See Exhibit # 13A-13B.

2.1049 Occupied bandwidth: Using TIA/EIA 2.2.11 sideband Spectrum TIA/EIA-603 S2.2.11 was used to measure the occupied bandwidth. Plots were made of the highest frequency and at 2500Hz. Data in the plots show that all sidebands beyond the authorized bandwidth are less than 0.5% of the unmodulated carrier. The plots show the transmitter modulation with;

For 12.5KHz spacing no modulation, 2500Hz, 3000Hz Tones
For 25.0KHz Channel spacing no modulation, 2500Hz, 3000Hz

At each of the tone input was adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots follow.

Test procedure diagram

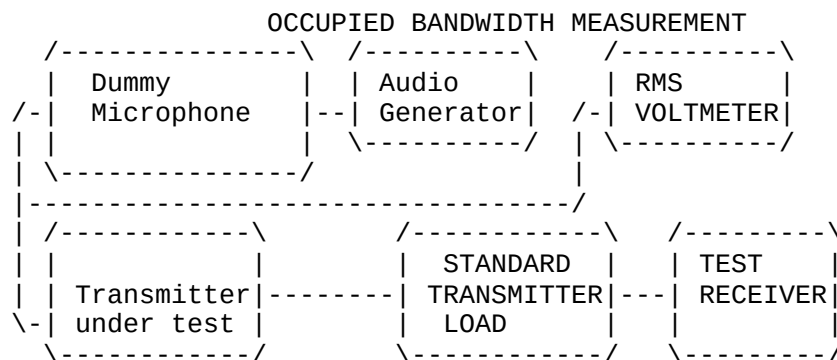

APPLICANT: PREMIER COMMUNICATIONS

FCC ID: N2EPR160B


DATE: 10 March 2000

REPORT #: T:\CUS\P\PREMIER\PRE5A0\PRE5A0.RPT

PAGE #: 4

2.1051

Spurious emissions at antenna terminals(conducted):
The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIA/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental.

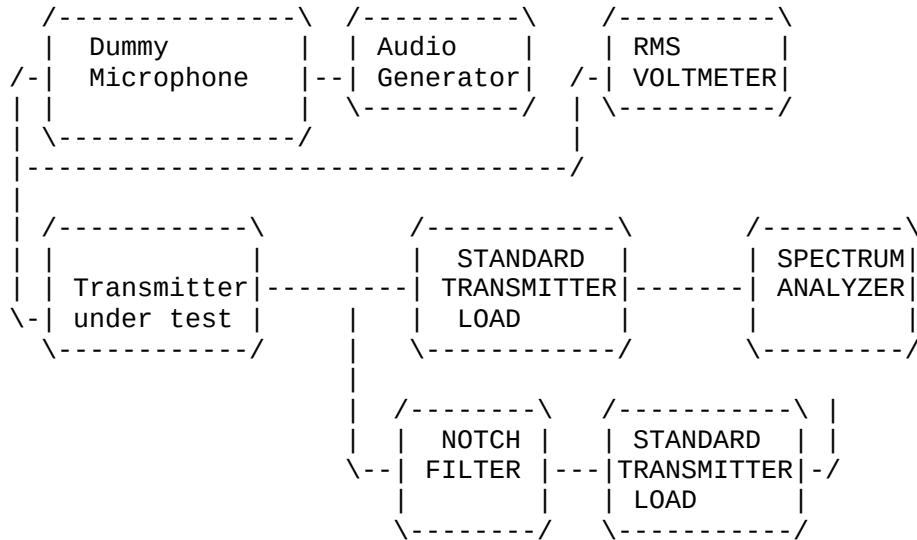

Method of Measuring Conducted Spurious Emissions

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be 50 +10log(Po) dB below the mean power output of the transmitter.

HIGH POWER $50 + 10\log(5.0) = 56.99\text{dB}$ OR 70dB Whichever is the lessor
MED POWER $50 + 10\log(2.5) = 53.98\text{dB}$ OR 70dB Whichever is the lessor
LOW POWER $50 + 10\log(0.5) = 46.99\text{dB}$ OR 70dB Whichever is the lessor

EMISSION FREQUENCY MHz	dB BELOW CARRIER		
155.00	00.00	00.00	00.0
310.00	81.40	82.40	90.80
465.00	72.40	74.80	82.20
620.00	98.30	102.00	97.70
775.00	87.70	87.90	106.00
930.00	80.40	80.30	99.20
1085.00	86.00	84.50	95.80
1240.00	86.90	100.70	99.00
1395.00	82.70	87.00	97.40
1550.00	80.00	84.80	99.00

DATE: 10 March 2000

REPORT #: T:\CUS\P\PREMIER\PRE5A0\PRE5A0.RPT

PAGE #: 5

2.1053 (b) Field strength of spurious emissions:

The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to 4.7 GHz. This test was conducted per ANSI C63.4-1992 with the exception of briefly connecting the transmitter to a half wave dipole for the purpose of establishing a reference.

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS:

HIGH POWER $50 + 10\log(5.0) = 56.99\text{dB}$ OR 70dB Whichever is the lessor
 MED POWER $50 + 10\log(2.5) = 53.98\text{dB}$ OR 70dB Whichever is the lessor
 LOW POWER $50 + 10\log(0.5) = 46.99\text{dB}$ OR 70dB Whichever is the lessor

TEST DATA: HIGH POWER

EMISSION FREQUENCY MHz	ATT. LEVEL dB	MARGIN dB
136.00	0.0	
272.00	59.81	2.81
408.00	61.84	4.84
544.00	58.87	1.87
680.00	64.46	7.46
816.00	72.45	15.45
952.00	64.00	7.00
1088.00	60.43	3.43
1224.00	65.28	8.28
1360.00	59.94	2.94

TEST DATA: MED POWER

EMISSION FREQUENCY MHz	ATT. LEVEL dB	MARGIN dB
136.00	0.00	
272.00	57.01	3.01
408.00	59.14	5.14
544.00	55.07	1.07
680.00	61.56	7.56
816.00	61.56	7.56
952.00	62.84	8.84
1088.00	61.38	7.38
1224.00	61.92	7.92
1360.00	63.48	9.48

FCC ID: N2EPR160B

DATE: 10 March 2000

REPORT #: T:\CUS\P\PREMIER\PRE5A0\PRE5A0.RPT

PAGE #: 6

NAME OF TEST: RADIATED SPURIOUS EMISSIONS CONTD.


TEST DATA: LOW POWER

EMISSION FREQUENCY MHz	ATT. LEVEL dB	MARGIN dB
136.00	0.00	
272.00	63.31	16.31
408.00	66.84	19.84
544.00	68.67	21.67
680.00	69.66	22.66
816.00	72.39	25.39
952.00	60.54	13.54
1088.00	60.77	13.77
1224.00	75.42	28.42
1360.00	63.28	16.28

METHOD OF MEASUREMENT: The procedure used was TIA/EIA 603, THE measurements were made at the test site located at TIMCO ENGINEERING INC. 849 NW State Road 45 Newberry, Florida 32669.

Method of Measuring Radiated Spurious Emissions

Hewlett Packard
Spectrum
Analyzer
HP8566A

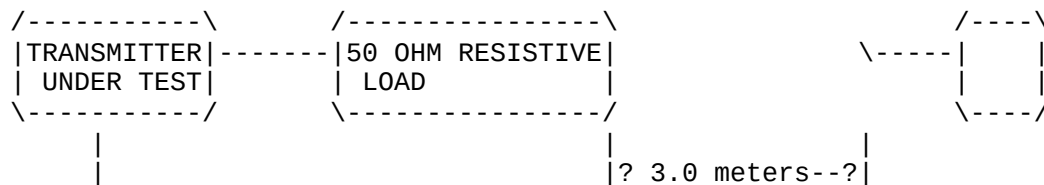

Equipment placed 4' above ground on a rotatable platform.

APPLICANT: PREMIER COMMUNICATIONS

FCC ID: N2EPR160B

DATE: 10 March 2000

REPORT #: T:\CUS\P\PREMIER\PRE5A0\PRE5A0.RPT

PAGE #: 7

2.1055 Frequency stability:
90.213

Temperature and voltage tests were performed to verify that the frequency remains within the .0005%, 5.0 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus & minus 15% of the supply voltage of 13.6VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 136.012500 MHz

TEMPERATURE_C	FREQUENCY_MHz	PPM
REFERENCE_____	136.012 500	0.00
-30_____	136.011 910	-4.32
-20_____	136.012 070	-3.16
-10_____	136.012 626	+0.93
0_____	136.012 890	+2.87
+10_____	136.012 910	+3.01
+20_____	136.012 762	+1.93
+30_____	136.012 554	+0.40
+40_____	136.012 358	-1.04
+50_____	136.012 232	-1.97

The battery end point Voltage 11.90VDC

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -4.32 to +3.01ppm. The maximum frequency variation over battery endpoint voltage range was +1.27 ppm.

APPLICANT: PREMIER COMMUNICATIONS

FCC ID: N2EPR160B

DATE: 10 March 2000

REPORT #: T:\CUS\P\PREMIER\PRE5A0\PRE5A0.RPT

PAGE #: 8

2.1055 Frequency stability:

90.214 Transient Frequency Behavior

REQUIREMENTS: In the 150-174MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 12.5kHz Channels:

Time Interval	Maximum Frequency	Portable Radios 150-174Mhz
t1	+12.5kHz	5.0ms
t2	+ 6.25kHz	20.0ms
t3	+12.5kHz	5.0ms

REQUIREMENTS: In the 150-174MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 25kHz Channels:

Time Interval	Maximum Frequency	Portable Radios 150-174Mhz
t1	+25kHz	5.0ms
t2	+12.5kHz	20.0ms
t3	+25.0kHz	5.0ms

TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40dB below the test recievers maximum input level, then the transmitter was turned off.
2. With the Transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

FCC ID: N2EPR160B


DATE: 10 March 2000

REPORT #: T:\CUS\P\PREMIER\PRE5A0\PRE5A0.RPT

PAGE #: 9

2.995(a)(b)(d) Frequency stability:

90.214 Transient Frequency Behavior
(Continued)

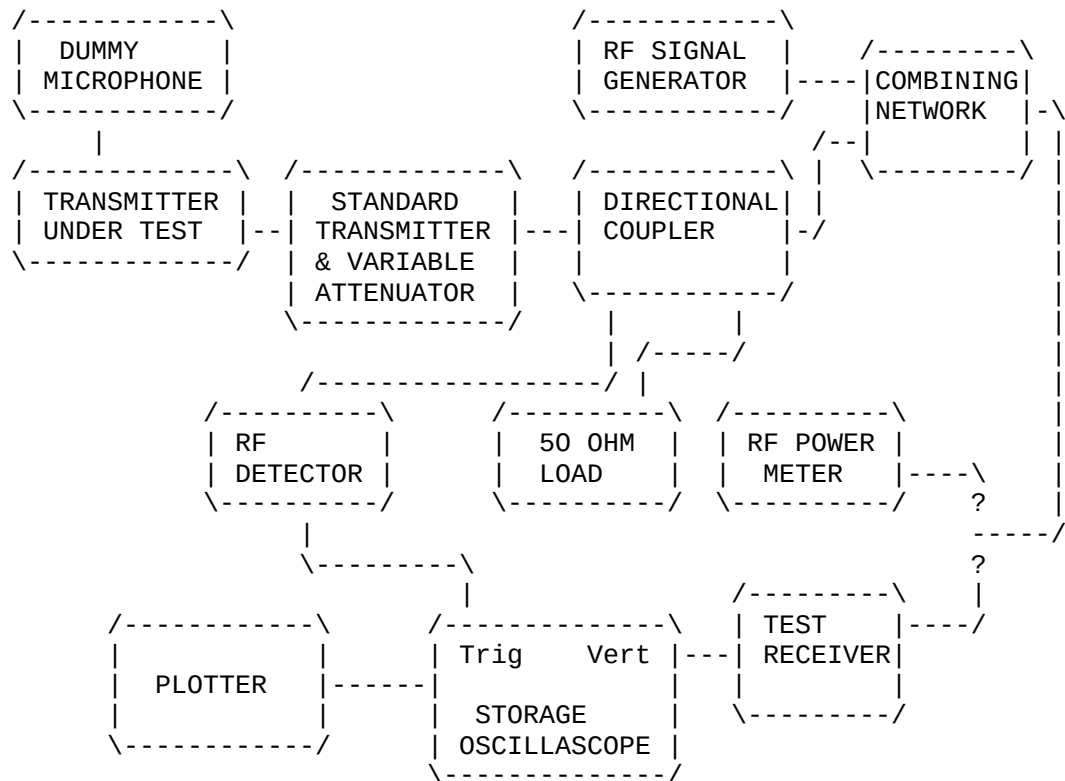

APPLICANT: PREMIER COMMUNICATIONS

FCC ID: N2EPR160B

DATE: 10 March 2000

REPORT #: T:\CUS\P\PREMIER\PRE5A0\PRE5A0.RPT

PAGE #: 10

TEST EQUIPMENT LIST

1. ☒ Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 10/17/99
2. ☒ Signal Generator: HP 8640B, S/N 2308A21464 Cal. 9/23/99
3. ☐ Signal Generator: HP 8614A, S/N 2015A07428 Cal. 5/29/99
4. ☐ Passive Loop Antenna: EMC0 Model 6512, 9KHz to 30MHz, S/N
9706-1211 Cal. 6/23/97
5. ☒ Biconnical Antenna: Eaton Model 94455-1, S/N 1057
6. ☒ Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
7. ☐ Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Cal. 11/24/99
8. ☒ Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319 Cal. 4/27/99
9. ☐ Horn 40-60GHz: ATM Part #19-443-6R
10. ☐ Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604 Cal. 2/9/00
11. ☐ Line Impedance Stabilization Network: Electro-Metrics Model
EM-7820, S/N 2682 Cal. 12/1/99
12. ☒ Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
13. ☒ AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 9/21/99
14. ☐ Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
15. ☐ Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 9/21/99
16. ☐ Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 9/23/99
17. ☒ Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 10/6/99

APPLICANT: PREMIER COMMUNICATIONS

FCC ID: N2EPR160B

DATE: 10 March 2000

REPORT #: T:\CUS\P\PREMIER\PRE5A0\PRE5A0.RPT

PAGE #: 11