

*FCC PART 15, SUBPART B, C, and E
TEST REPORT**for***SC4240 MIMO RADIO****MODEL: SC4240E-520-BB**

Prepared for

SILVUS TECHNOLOGIES
10990 WILSHIRE BLVD., SUITE #1500
LOS ANGELES, CALIFORNIA 90024Prepared by: *Kyle Fujimoto***KYLE FUJIMOTO**Approved by: *James Ross***JAMES ROSS****COMPATIBLE ELECTRONICS INC.**
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: NOVEMBER 6, 2018

	REPORT BODY	APPENDICES					TOTAL
		<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>	
PAGES	19	2	2	2	14	35	74

This report shall not be reproduced, except in full,
without the written approval of Compatible Electronics.



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration – Emissions	9
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 Emissions Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
7. CHARACTERISTICS OF THE TRANSMITTER	12
7.1 Channel Description and Frequencies	12
7.2 Antenna Gain	12
8. TEST PROCEDURES	13
8.1 RF Emissions	13
8.1.1 Conducted Emissions Test	13
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	14
8.1.3 RF Emissions Test Results	15
8.2 EBW Bandwidth	16
8.3 Maximum Conducted Output Power	16
8.4 Emissions in Non-Restricted Bands	17
8.5 RF Band Edges	17
8.6 Spectral Density Test	18
8.7 Variation of the Input Power	18
9. CONCLUSIONS	19

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos • Test Setup Diagrams • Radiated and Conducted Emissions Photos • Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Layout of the Semi-Anechoic Test Chamber
2	Conducted Emissions Test Setup

LIST OF TABLES

TABLE	TITLE
1	Conducted Emissions Test Results
2	Radiated Emissions Test Results

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the federal government.

Device Tested: SC4240 MIMO Radio
Model: SC4240E-520-BB
S/N: N/A

Product Description: The EUT is a stand-alone IP based, 2 antenna MIMO (multiple input multiple output), Coded OFDM radio that provides improved LOS (line-of-sight) range, greater connectivity in NLOS (non-line-of-sight) environments and high data throughput rates.

Modifications: The EUT was not modified during the testing.

Customer: Silvus Technologies.
10990 Wilshire Boulevard, Suite 1500
Los Angeles, California 90024

Test Dates: September 24 and 25, 2018

Test Specifications covered by accreditation:

Emissions requirements

CFR Title 47, Part 15, Subpart B; Subpart C, sections 15.205, 15.209; and Subpart E, section 15.407

Test Procedure: ANSI C63.4 and ANSI C63.10



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz – 30 MHz	This test was not performed because the EUT operates on battery only and cannot be plugged into the AC public mains.
2	Spurious Radiated RF Emissions, 30 MHz – 1000 MHz	The EUT complies with the Class B limits of CFR Title 47, Part 15 Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, section 15.205 and 15.209
3	Spurious Radiated RF Emissions, 9 kHz – 30 MHz and 1000 MHz – 40000 MHz	The EUT complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and CFR Title 47, Part 15, Subpart C, section 15.407 (b)(1)
4	Fundamental and Emissions produced by the intentional radiator in non-restricted bands, 9 kHz – 40 GHz	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.407 (b)(1)
5	Emissions produced by the intentional radiator in restricted bands, 9 kHz – 40 GHz	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209, and section 15.407 (b)(1)
6	EBW Bandwidth	This test was performed to determine setting for other tests, but does not have any compliance limits.
7	Maximum Conducted Output Power	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.407 (a)(1)(i)
8	Maximum Power Spectral Density from the Intentional Radiator to the Antenna	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.407 (a)(1)(i)

1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the SC4240 MIMO Radio, Model: SC4240E-520-BB. The emissions measurements were performed according to the measurement procedure described in ANSI C63.10 and ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B; Subpart C, sections 15.205, 15.209; and Subpart E, section 15.407.

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Silvus Technologies

Kathleen Smidt Cook Vice President of Operations

Compatible Electronics Inc.

Kyle Fujimoto Test Engineer
James Ross Test Engineer

2.4 Date Test Sample was Received

The test sample was received on September 24, 2018.

2.5 Disposition of the Test Sample

The test sample has not been returned to Silvus Technologies as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
N/A	Not Applicable
EBW	Emission Bandwidth

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emissions Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules - Radio frequency devices (including digital devices) – Intentional Radiators
FCC Title 47, Part 15 Subpart E	FCC Rules – Radio frequency devices (including digital devices) – Unlicensed National Information Infrastructure Devices
ANSI C63.4 2014	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10 2013	American National Standard for Testing Unlicensed Wireless Devices
FCC Title 47, Part 15 Subpart B	FCC Rules - Radio frequency devices (including digital devices) – Unintentional Radiators
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
KDB 789033 D02 v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration – Emissions

The SC4240 MIMO Radio Model: SC4240E-520-BB (EUT) was connected to a junction box, push to talk, and laptop via its PRI, PTT, and AUX ports, respectively. The junction box was also connected to a cable creation dongle. The cable creation dongle was also connected to the laptop. The laptop was also connected to a mouse and AC Adapter via its USB and power ports, respectively. The EUT was continuously pinging the laptop on a continuous basis.

The EUT was also continuously transmitting at 5220 MHz and 5240 MHz during the testing.

The firmware used for the EUT is stored on the company's servers.

Fresh batteries were used during the testing.

It was determined that the emissions were at their highest level when the EUT was operating in the above configuration. The final emissions data was taken in this mode of operation. All initial investigations were performed with the measurement receiver in manual mode scanning the frequency range continuously. Photographs of the test setup are in Appendix D of this report.

4.1.1 Cable Construction and Termination

- Cable 1** This is a 1-meter unshielded cable connecting the Push to Talk to the EUT. The cable has a 7-pin LEMO connector at the EUT end and is hard wired into the Push to Talk.
- Cable 2** This is a 2-meter unshielded cable connecting the AC Adapter to the laptop. The cable has a 1-pin connector at the laptop end and is hard wired into the AC Adapter.
- Cable 3** This is a 2-meter braid shielded cable connecting the laptop to the mouse. The cable has a USB type 'A' connector at the laptop end and is hard wired into the mouse.
- Cable 4** This is a 10-centimeter unshielded cable connecting the laptop to the cable creation dongle. The cable has a USB type 'A' connector at the laptop end and is hard wired into the cable creation dongle.
- Cable 5** This is a 1.25-meter foil shielded cable connecting the cable creation dongle to the junction box. The cable has an RJ-45 connector at the cable creation dongle end and is hard wired into the junction box. The cable was bundled to a length of 1-meter. The shield of the cable was grounded to the chassis via the connector.
- Cable 6** This is a 1.25-meter foil shielded cable connecting the EUT to the junction box. The cable has 10-pin LEMO connector at the EUT end and is hard wired into the junction box. The shield of the cable was grounded to the chassis via the connector.

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
SC4240 MIMO RADIO	SILVUS TECHNOLOGIES	SC4240E-520-BB	N/A	N2S-SC42-520
MOUSE	LOGITECH	M-U0026	N/A	N/A
AC ADAPTER FOR LAPTOP	ASUS	W15-065N1A	N/A	N/A
LAPTOP	ASUS	UX303U	G5N0CJ00L18619C	N/A
PUSH TO TALK	IMPACT	S2226	N/A	N/A
JUNCTION BOX	N/A	N/A	N/A	N/A
FIRMWARE FOR EUT*	SILVUS TECHNOLOGIES	3.12.6.8	N/A	N/A

*Used to program the EUT to transmit at 5220 MHz and 5240 MHz on a continuous basis.

5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANU-FACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DATE	CAL. CYCLE
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A
EMI Receiver, 20 Hz – 26.5 GHz	Keysight Technologies	N9038A	MY51210150	July 26, 2018	1 Year
EMI Receiver	Rohde & Schwarz	ESIB40	100172	March 5, 2018	1 Year
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A
Loop Antenna	Com-Power	AL-130R	121090	February 9, 2017	2 Year
Horn Antenna	Com-Power	AH840	91003	N/A	N/A
CombiLog Antenna	Com-Power	AC-220	61060	July 27, 2017	2 Year
Horn Antenna	Com-Power	AH-118	071175	February 22, 2018	2 Year
Horn Antenna	Com-Power	AH-826	71957	N/A	N/A
Preamplifier	Com-Power	PAM-118A	551024	May 10, 2018	1 Year
Preamplifier	Com-Power	PA-840	711013	May 10, 2018	1 Year
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A
Power Sensor	ETS-Lindgren	7002-006	0015018	October 1, 2015	3 Year
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and 7.1 of this report for emissions test location.

6.2 EUT Mounting, Bonding and Grounding

For frequencies 1 GHz and below: The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

For frequencies above 1 GHz: The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Description and Frequencies

The EUT operates on two channels. The low channel is 5220 MHz and the high channel is 5240 MHz.

7.2 Antenna Gain

The EUT utilizes two collinear omni antennas with each antenna having a 6.0 dBi gain.

8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. A transient limiter was used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The final qualification data is located in Appendix E.

The six highest reading are listed in Table 1.0.

Test Results:

This test was not performed because the EUT is battery powered only and cannot be plugged into the AC public mains.

8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI Receiver was used as the measuring meter. Below 1 GHz, a built-in, internal preamplifier was used to increase the sensitivity of the instrument. At frequencies above 1 GHz, external preamplifiers were used. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which takes into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. A quasi-peak reading was taken only for those readings, which are marked accordingly on the data sheets.

The frequencies above 1 GHz were averaged by using the RMS detector function on the EMI Receiver.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	Combilog Antenna
1 GHz to 40 GHz	1 MHz	Horn Antenna

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.

The six highest reading are listed in Table 2.0.

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Section 15.209; and Subpart E section 15.407 (b)(1) for radiated emissions. Please see Appendix E for the data sheets.

8.1.3 RF Emissions Test ResultsTable 1.0 RADIATED EMISSION RESULTS
SC4240 MIMO Radio, Model: SC4240E-520-BB

Frequency MHz	Corrected Reading* dBuV/m	Specification Limit dBuV/m	Delta (Cor. Reading – Spec. Limit) dB
600.00 (H) (At High Channel)	44.74 (QP)	46.00	-1.26
360.00 (H) (At Low Channel)	43.43 (QP)	46.00	-2.57
360.00 (H) (At High Channel)	43.19 (QP)	46.00	-2.81
600.00 (H) (At Low Channel)	41.26 (QP)	46.00	-4.74
600.00 (V) (At High Channel)	40.75 (QP)	46.00	-5.25
440.00 (V) (At Low Channel)	40.67 (QP)	46.00	-5.33

QP Quasi-Peak Reading
H Horizontal PolarizationAvg Average Reading
V Vertical Polarization

8.2 EBW Bandwidth

The EBW Bandwidth was measured using the EMI Receiver. The bandwidth was measured using a direct connection from the EUT. The following steps were performed for measuring the EBW Bandwidth.

1. Set RBW = approximately 1% of the emission bandwidth
2. Set the VBW > RBW
3. Detector = Peak
4. Trace Mode = Max Hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Test Results:

This test was performed to determine setting for other tests, but does not have any compliance limits.

8.3 Maximum Conducted Output Power

The Conducted Average Output Power was measured using the Power Meter. A duty cycle of 100% was used. The average output power was measured using the average power measurement procedure described in section E3 of KDB 789033 v02r01. The Maximum Conducted Output Power was then taken.

The power at each port was summed per section (E)(1) of KDB 662911 D01 v02r01.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart E section 15.407 (a)(1)(i).

8.4 Emissions in Non-Restricted Bands

The emissions in the non-restricted frequency bands measurements were performed using the procedure described in section 8.1.2 of this test report. The final qualification data sheets are located in Appendix E.

The spec limit in dBuV/m was determined by the following formula:

$$E [\text{dBuV/m}] = \text{EIRP} [\text{dBm}] + 95.2$$

Where:

E [dBuV/m] is the spec limit in dBuV/m

EIRP [dBm] is the EIRP spec limit per FCC Title 47, Part 15, Subpart E, section 15.407 (b)(1).

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart E section 15.407 (b)(1).

8.5 RF Band Edges

The RF band edges were taken at 5150 MHz when the EUT was on the low channel and 5350 MHz when the EUT was on the high channel using the EMI Receiver. The duty cycle of the fundamental was 100%. A preamplifier was used to boost the signal level, with the plots being taken at a 3 meter test distance. The radiated emissions test procedure as describe in section 8.1.2 of this test report was used to maximize the emission.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart E section 15.407 (b)(1). The RF power at the restricted bands closest to the band edges at 5150 MHz and 5350 MHz also meet the limits of section 15.209. Please see the data sheets located in Appendix E.

8.6 Spectral Density Test

The spectrum density output was measured using the EMI Receiver. The spectral density output was measured using a direct connection from the RF out on the EUT into the input of the EMI Receiver. The following steps were performed for measuring the spectral density.

1. Set span to encompass the entire emission bandwidth (EBW)
2. Set RBW = 1 MHz
3. Set VBW $\geq$ 3 MHz
4. Ensure that the number of measurement points in the sweep $\geq$ 2 x span/RBW
5. Sweep time = auto couple
6. Detector = power averaging (rms)
7. Manually set sweep time $\geq$ 10 x (number of points in sweep) x (symbol period of the transmitted signal), but not less than the automatic default sweep time.
8. Perform a single sweep

The spectral density at each port was summed per Section (E)(2)(c) of KDB 662911 D01 v02r01.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart E section 15.407 (a)(1)(i).

8.7 Variation of the Input Power


The variation of the input power test was performed using the EMI Receiver. The EUT input power was varied between 85% and 115% of the nominal rated supply voltage. The carrier frequency was monitored for any change in amplitude.

Test Results:

This test was not performed because the EUT operates on battery power only and cannot be connected to the AC public mains.

9. CONCLUSIONS

The SC4240 MIMO Radio, Model: SC4240E-520-BB, as tested, meets all of the specification limits defined in FCC Title 47, Part 15, Subpart B, and Subpart C, sections 15.205 and 15.209; and Subpart E section 15.407.

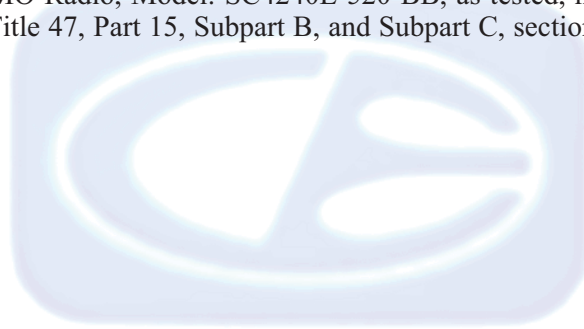

APPENDIX A

LABORATORY ACCREDITATIONS AND RECOGNITIONS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS



NVLAP LAB CODE 200528-0

For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit

<http://celectronics.com/quality/scope/>

Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."



APPENDIX B

MODIFICATIONS TO THE EUT

MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B, Subpart C, and Subpart E specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

The EUT was not modified during the testing.



APPENDIX C

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

SC4240 MIMO Radio
Model: SC4240E-520-BB
S/N: N/A

There are no additional models covered under this report.



APPENDIX D

DIAGRAMS AND CHARTS

FIGURE 1: LAYOUT OF THE SEMI-ANECHOIC TEST CHAMBER


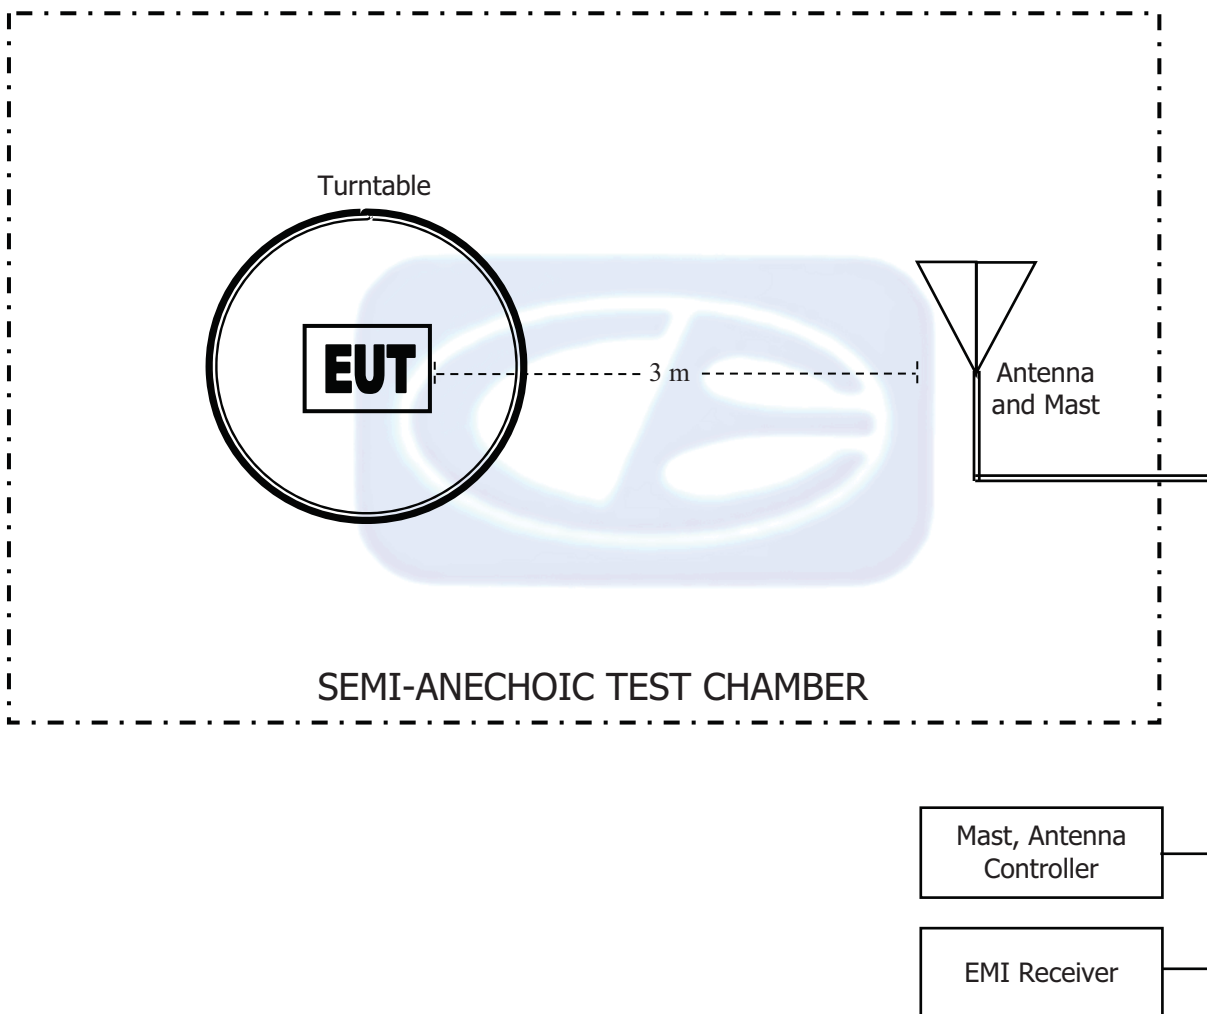


FIGURE 2: CONDUCTED EMISSIONS TEST SETUP

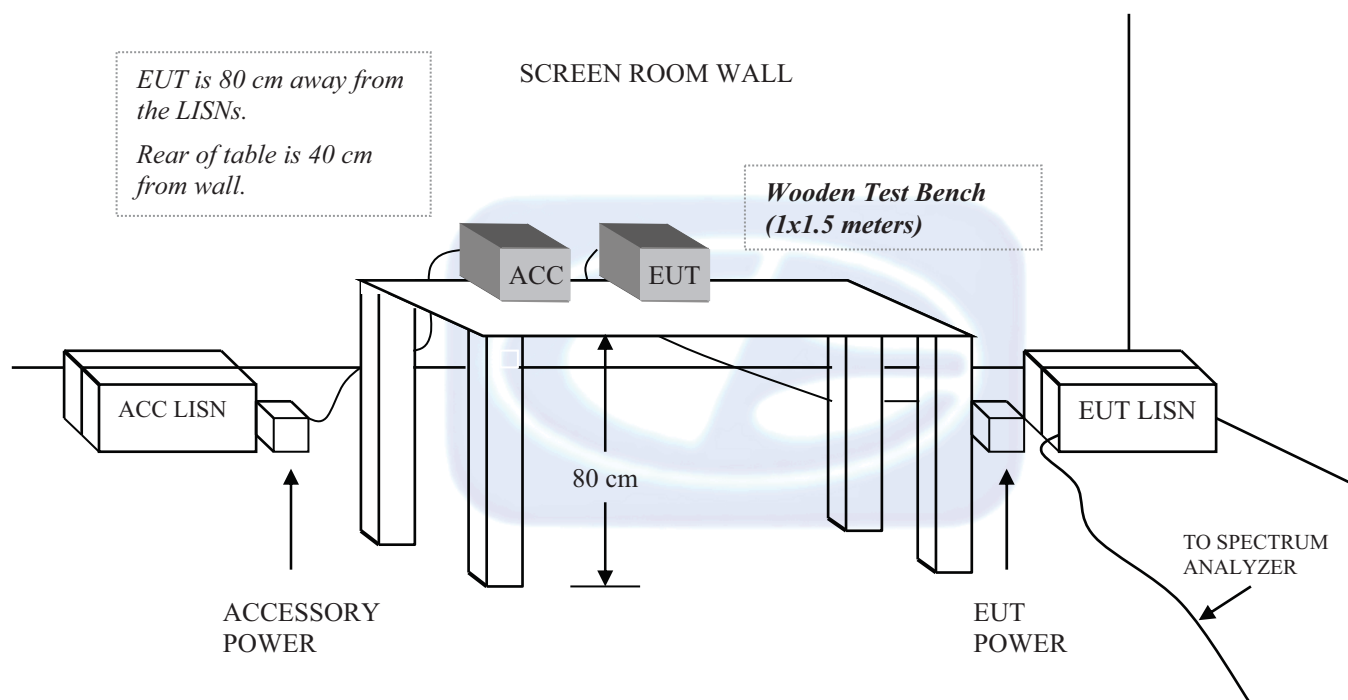

COM-POWER AL-130R**LOOP ANTENNA**

S/N: 121090

CALIBRATION DATE: FEBRUARY 9, 2017

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-36.17	15.33
0.01	-35.86	15.64
0.02	-37.30	14.20
0.03	-36.58	14.92
0.04	-36.99	14.51
0.05	-37.66	13.84
0.06	-37.53	13.97
0.07	-37.64	13.86
0.08	-37.52	13.98
0.09	-37.62	13.88
0.1	-37.59	13.91
0.2	-37.79	13.71
0.3	-37.80	13.70
0.4	-37.70	13.80
0.5	-37.79	13.71
0.6	-37.79	13.71
0.7	-37.69	13.81
0.8	-37.49	14.01
0.9	-37.39	14.11
1	-37.39	14.11
2	-37.09	14.41
3	-37.09	14.41
4	-37.19	14.31
5	-36.98	14.52
6	-37.17	14.33
7	-37.05	14.45
8	-36.85	14.65
9	-36.84	14.66
10	-36.75	14.75
15	-37.16	14.34
20	-36.44	15.06
25	-37.88	13.62
30	-39.14	12.36

COM-POWER AC-220**COMBILOG ANTENNA****S/N: 61060****CALIBRATION DATE: JULY 27, 2017**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	23.80	200	14.10
35	24.00	250	15.30
40	24.70	300	17.70
45	22.90	350	17.70
50	22.10	400	19.00
60	17.60	450	21.30
70	12.70	500	21.00
80	11.20	550	22.30
90	13.10	600	23.40
100	14.40	650	22.90
120	15.30	700	24.60
125	15.00	750	24.50
140	12.80	800	25.40
150	16.50	850	26.40
160	12.90	900	27.20
175	14.30	950	27.80
180	14.50	1000	26.80

COM POWER AH-118**HORN ANTENNA****S/N: 071175****CALIBRATION DATE: FEBRUARY 22, 2018**

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	23.71	10.0	40.08
1.5	25.46	10.5	40.75
2.0	29.26	11.0	41.78
2.5	27.95	11.5	41.02
3.0	29.03	12.0	40.32
3.5	29.70	12.5	40.96
4.0	30.71	13.0	40.29
4.5	31.62	13.5	39.48
5.0	33.23	14.0	39.89
5.5	35.07	14.5	42.75
6.0	34.43	15.0	40.98
6.5	34.98	15.5	38.54
7.0	36.75	16.0	39.40
7.5	37.10	16.5	39.40
8.0	37.66	17.0	41.74
8.5	39.29	17.5	42.58
9.0	37.75	18.0	44.68
9.5	38.23		

COM-POWER PAM-118A**PREAMPLIFIER**

S/N: 551024

CALIBRATION DATE: MAY 10, 2018

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	40.99	6.0	39.01
1.1	39.77	6.5	39.00
1.2	39.02	7.0	39.69
1.3	39.44	7.5	38.96
1.4	39.64	8.0	38.57
1.5	40.23	8.5	39.17
1.6	40.17	9.0	38.82
1.7	40.23	9.5	39.30
1.8	39.48	10.0	38.90
1.9	39.85	11.0	38.86
2.0	39.99	12.0	39.87
2.5	40.38	13.0	39.55
3.0	40.64	14.0	38.92
3.5	40.68	15.0	39.33
4.0	40.87	16.0	39.60
4.5	40.04	17.0	40.28
5.0	39.54	18.0	39.58
5.5	39.58		

COM-POWER AH-826**HORN ANTENNA**

S/N: 71957

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
18.0	33.5	22.5	35.5
18.5	33.5	23.0	35.9
19.0	34.0	23.5	35.7
19.5	34.0	24.0	35.6
20.0	34.3	24.5	36.0
20.5	34.9	25.0	36.2
21.0	34.7	25.5	36.1
21.5	35.0	26.0	36.2
22.0	35.0	26.5	35.7

COM-POWER PA-840**MICROWAVE PREAMPLIFIER**


S/N: 711013

CALIBRATION DATE: MAY 10, 2018

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
18.0	26.90	31.0	24.56
19.0	24.65	31.5	25.84
20.0	25.74	32.0	26.93
21.0	24.78	32.5	27.76
22.0	24.83	33.0	25.76
23.0	24.81	33.5	26.76
24.0	25.52	34.0	26.51
25.0	24.90	34.5	27.49
26.0	25.92	35.0	27.64
26.5	26.53	35.5	27.45
27.0	26.41	36.0	25.08
27.5	24.78	36.5	25.61
28.0	25.13	37.0	24.69
28.5	29.29	37.5	24.10
29.0	28.44	38.0	24.83
29.5	27.51	38.5	24.41
30.0	27.12	39.0	24.44
30.5	26.42	39.5	22.96
		40.0	22.29

COM-POWER AH840**HORN ANTENNA****S/N: 91003**

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
26.5	41.0	31.0	40.9
27.0	40.3	31.5	41.8
27.5	41.6	32.0	40.0
28.0	41.9	32.5	40.8
28.5	41.8	33.0	40.6
29.0	41.2	33.5	40.6
29.5	40.8	34.0	40.6
30.0	41.0	34.5	40.8
30.5	41.5	40.0	41.0

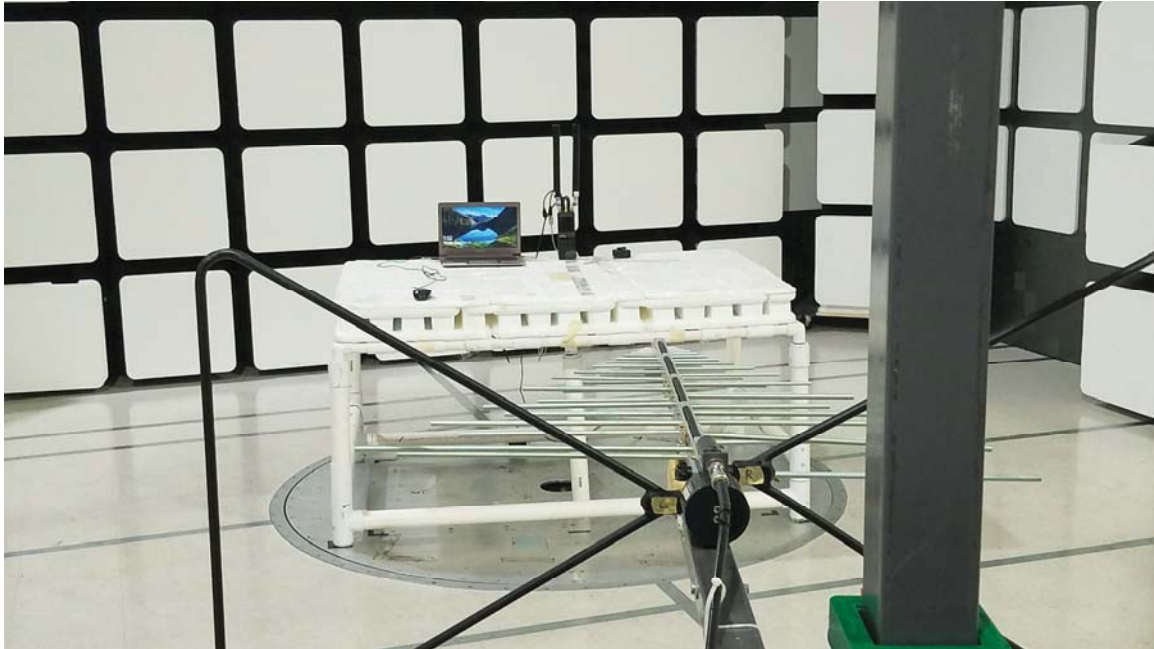

FRONT VIEW

SILVUS TECHNOLOGIES
SC4240 MIMO RADIO
MODEL: SC4240E-520-BB
FCC SUBPART B, C AND E – RADIATED EMISSIONS – BELOW 1 GHz


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



REAR VIEW

SILVUS TECHNOLOGIES
SC4240 MIMO RADIO
MODEL: SC4240E-520-BB
FCC SUBPART B, C AND E – RADIATED EMISSIONS – BELOW 1 GHz


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

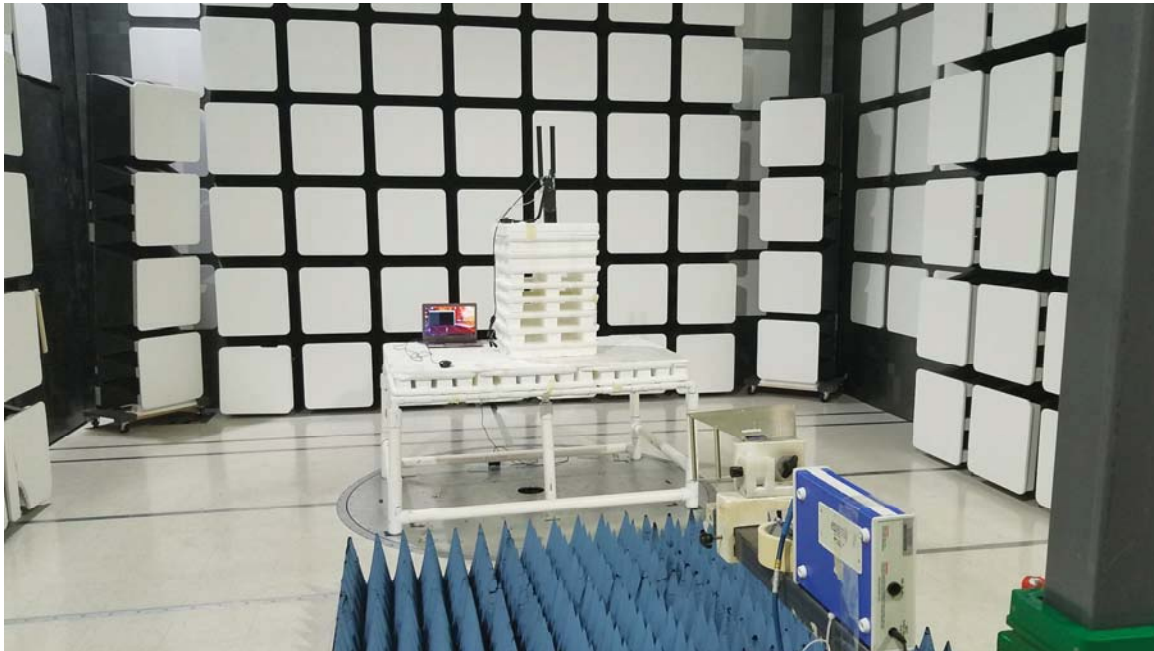

FRONT VIEW

SILVUS TECHNOLOGIES
SC4240 MIMO RADIO
MODEL: SC4240E-520-BB
FCC SUBPART B, C AND E – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

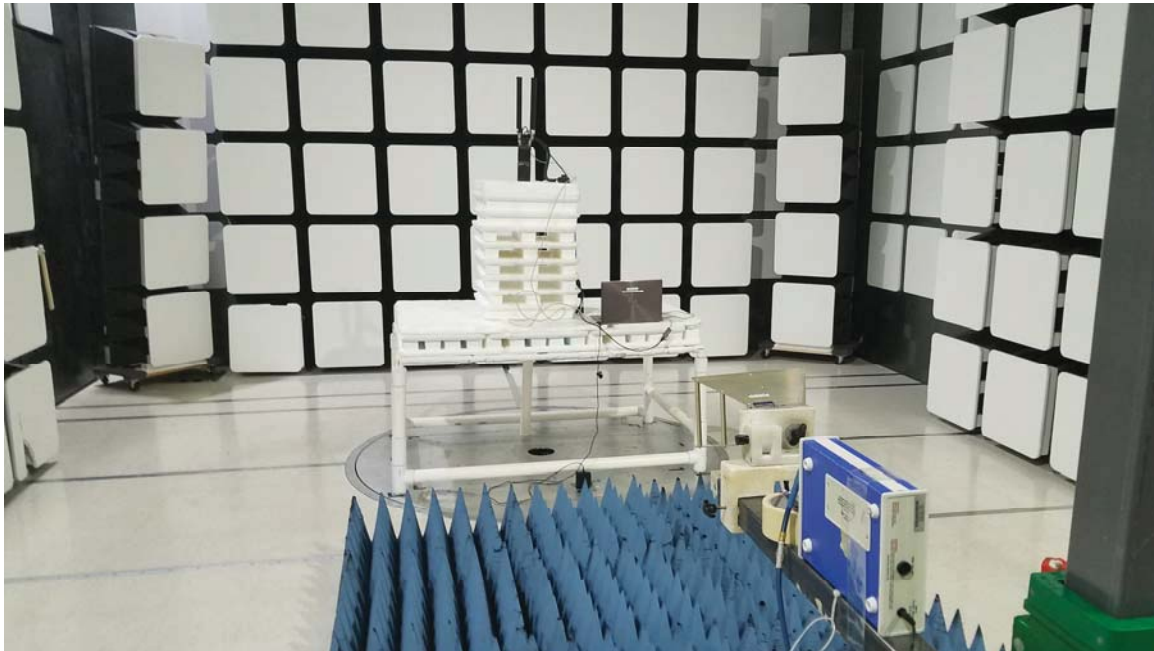

REAR VIEW

SILVUS TECHNOLOGIES
SC4240 MIMO RADIO
MODEL: SC4240E-520-BB
FCC SUBPART B, C AND E – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**


APPENDIX E

DATA SHEETS

***RADIATED EMISSIONS
DATA SHEETS***

Title: Pre-Scan, 30-1000 MHz, FCC Class B
File: Agilent - Pre-Scan - 5220 MHz - FCC Class B - 30 MHz to 1000 MHz - 09-24-2018.set
Operator: Kyle Fujimoto
EUT Type: SC4240 MIMO Radio
EUT Condition: The EUT is continuously transmitting at 5220 MHz on both antenna ports
Customer: Silvus Technologies, Inc.
Model: SC4240E-520-BB
S/N: N/A

9/24/2018 10:41:30 AM
Sequence: Preliminary Scan

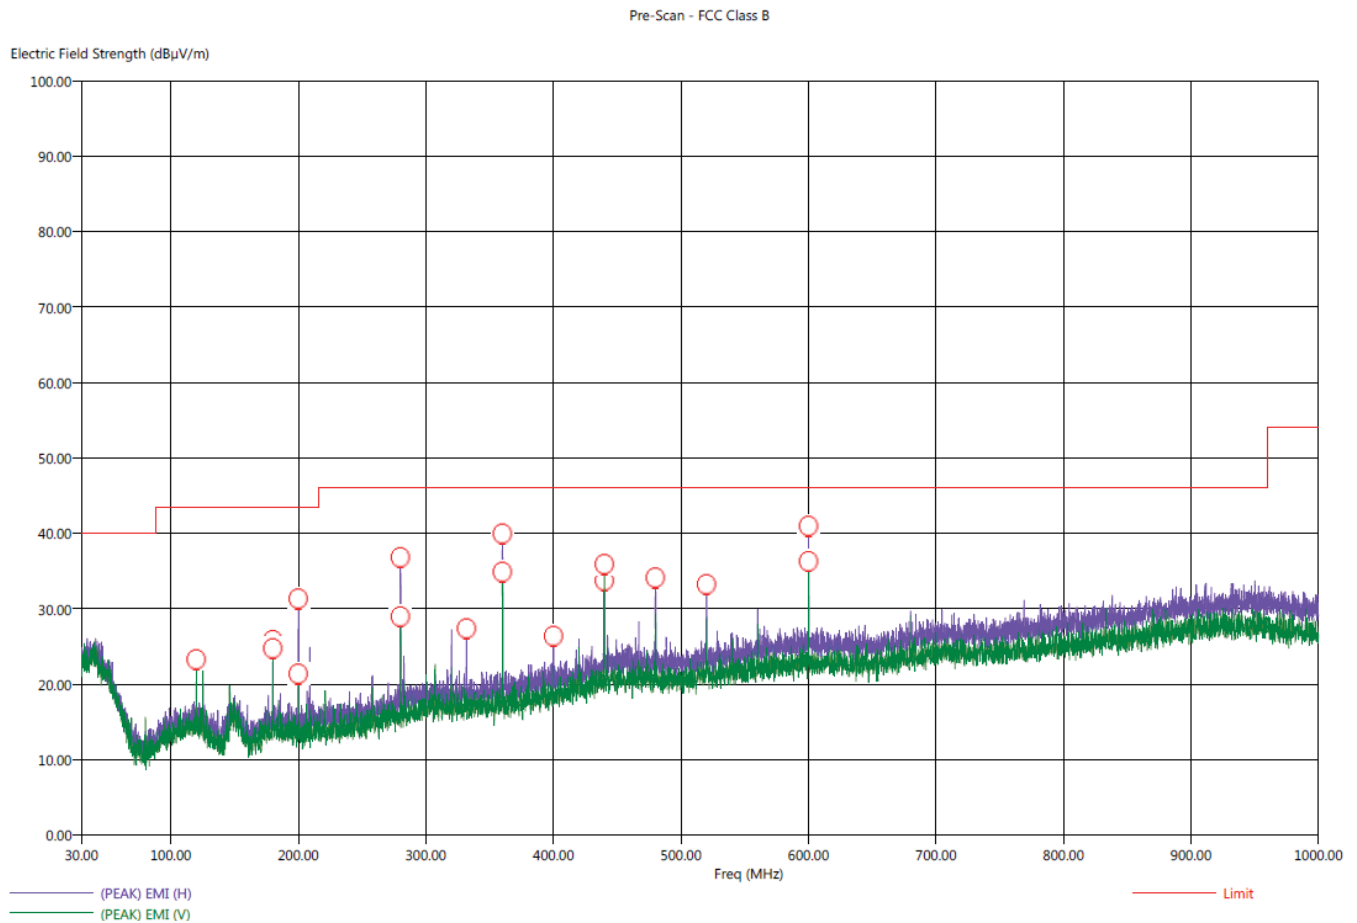

Title: Radiated Final - FCC Class B
File: Agilent - Final Scan - 5220 MHz - FCC Class B - 30 MHz to 1000 MHz - 09-24-2018.set
Operator: Kyle Fujimoto
EUT Type: SC4240 MIMO Radio
EUT Condition: The EUT is continuously transmitting at 5220 MHz on both antenna ports
Customer: Silvus Technologies, Inc.
Model: SC4240E-520-BB
S/N: N/A

9/24/2018 10:53:16 AM
Sequence: Final Measurements


FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dBμV/m)	(QP) EMI (dBμV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBμV/m)	Transducer (dB)	Cable (dB)	Ttbl Agl (deg)	Twr Ht (cm)
120.00	V	32.41	26.86	-11.09	-16.64	43.50	15.30	1.18	155.25	318.79
180.00	H	33.74	29.19	-9.76	-14.31	43.50	14.50	1.34	340.25	238.79
180.00	V	35.11	28.72	-8.39	-14.78	43.50	14.50	1.34	237.00	334.37
200.00	H	37.76	34.70	-5.74	-8.80	43.50	14.10	1.50	38.25	111.50
200.00	V	33.99	28.52	-9.51	-14.98	43.50	14.10	1.50	100.00	334.85
280.00	H	40.53	37.70	-5.47	-8.30	46.00	16.79	1.70	292.25	111.44
280.00	V	40.70	37.73	-5.30	-8.27	46.00	16.79	1.70	339.50	127.20
331.80	H	38.96	33.41	-7.04	-12.59	46.00	17.70	1.83	136.75	366.67
360.00	H	45.59	43.43	-0.41	-2.57	46.00	17.97	1.94	124.25	111.44
360.00	V	41.79	35.29	-4.21	-10.71	46.00	17.97	1.94	22.75	255.02
400.00	H	39.49	34.56	-6.51	-11.44	46.00	19.00	2.10	120.25	254.91
440.00	H	43.23	39.18	-2.77	-6.82	46.00	20.86	2.18	304.25	254.97
440.00	V	44.17	40.67	-1.83	-5.33	46.00	20.86	2.18	275.00	191.02
479.90	H	41.89	36.68	-4.11	-9.32	46.00	21.12	2.20	307.25	222.97
520.00	H	42.73	37.02	-3.27	-8.98	46.00	21.54	2.24	300.25	366.61
600.00	H	45.55	41.26	-0.45	-4.74	46.00	23.40	2.50	302.25	318.91
600.00	V	44.45	39.43	-1.55	-6.57	46.00	23.40	2.50	191.75	239.08



Title: Pre-Scan, 30-1000 MHz, FCC Class B
File: Agilent - Pre-Scan - 5240 MHz - FCC Class B - 30 MHz to 1000 MHz - 09-24-2018.set
Operator: Kyle Fujimoto
EUT Type: SC4240 MIMO Radio
EUT Condition: The EUT is continuously transmitting at 5240 MHz on both antenna ports
Customer: Silvus Technologies, Inc.
Model: SC4240E-520-BB
S/N: N/A

9/24/2018 11:37:58 AM
Sequence: Preliminary Scan

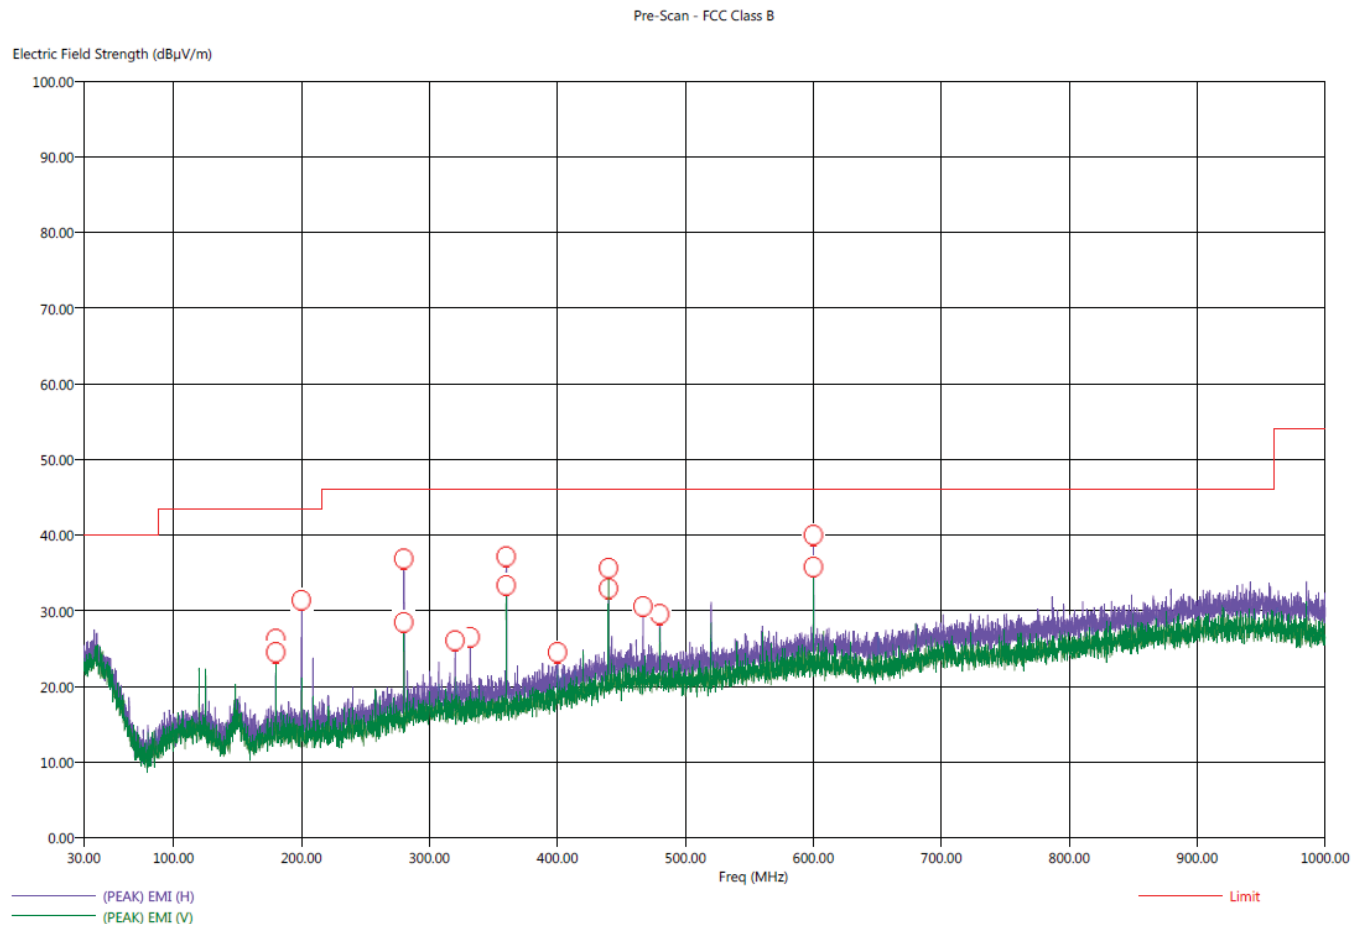


Title: Radiated Final - FCC Class B
File: Agilent - Final Scan - 5240 MHz - FCC Class B - 30 MHz to 1000 MHz - 09-24-2018.set
Operator: Kyle Fujimoto
EUT Type: SC4240 MIMO Radio
EUT Condition: The EUT is continuously transmitting at 5240 MHz on both antenna ports
Customer: Silvus Technologies, Inc.
Model: SC4240E-520-BB
S/N: N/A


9/24/2018 11:52:38 AM
Sequence: Final Measurements

FCC Class B


Freq (MHz)	Pol	(PEAK) EMI (dBµV/m)	(QP) EMI (dBµV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBµV/m)	Transducer (dB)	Cable (dB)	Ttbl Agl (deg)	Twr Ht (cm)
180.00	H	35.74	31.28	-7.76	-12.22	43.50	14.50	1.34	163.00	206.91
180.00	V	35.31	29.98	-8.19	-13.52	43.50	14.50	1.34	132.00	223.08
200.00	H	37.82	35.17	-5.68	-8.33	43.50	14.10	1.50	357.75	159.02
280.00	H	39.58	35.18	-6.42	-10.82	46.00	16.79	1.70	303.75	334.79
280.00	V	36.33	32.55	-9.67	-13.45	46.00	16.79	1.70	279.25	191.02
320.00	H	38.51	33.76	-7.49	-12.24	46.00	17.70	1.78	300.25	206.97
331.80	H	39.13	33.40	-6.87	-12.60	46.00	17.70	1.83	302.50	350.55
360.00	H	45.83	43.19	-0.17	-2.81	46.00	17.97	1.94	129.25	111.44
360.00	V	42.40	35.47	-3.60	-10.53	46.00	17.97	1.94	2.25	270.67
400.00	H	41.48	35.22	-4.52	-10.78	46.00	19.00	2.10	80.75	207.14
440.00	H	43.76	39.36	-2.24	-6.64	46.00	20.86	2.18	149.25	222.85
440.00	V	45.18	38.26	-0.82	-7.74	46.00	20.86	2.18	289.50	191.26
466.90	H	42.35	36.97	-3.65	-9.03	46.00	21.20	2.20	193.00	319.02
480.00	H	42.79	37.63	-3.21	-8.37	46.00	21.12	2.20	103.75	223.20
600.00	H	48.28	44.74	2.28	-1.26	46.00	23.40	2.50	306.25	111.38
600.00	V	45.82	40.75	-0.18	-5.25	46.00	23.40	2.50	145.75	143.20



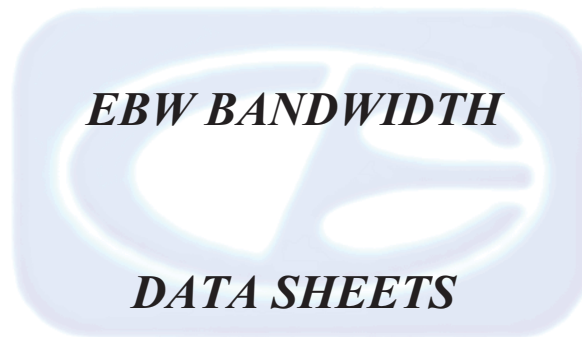


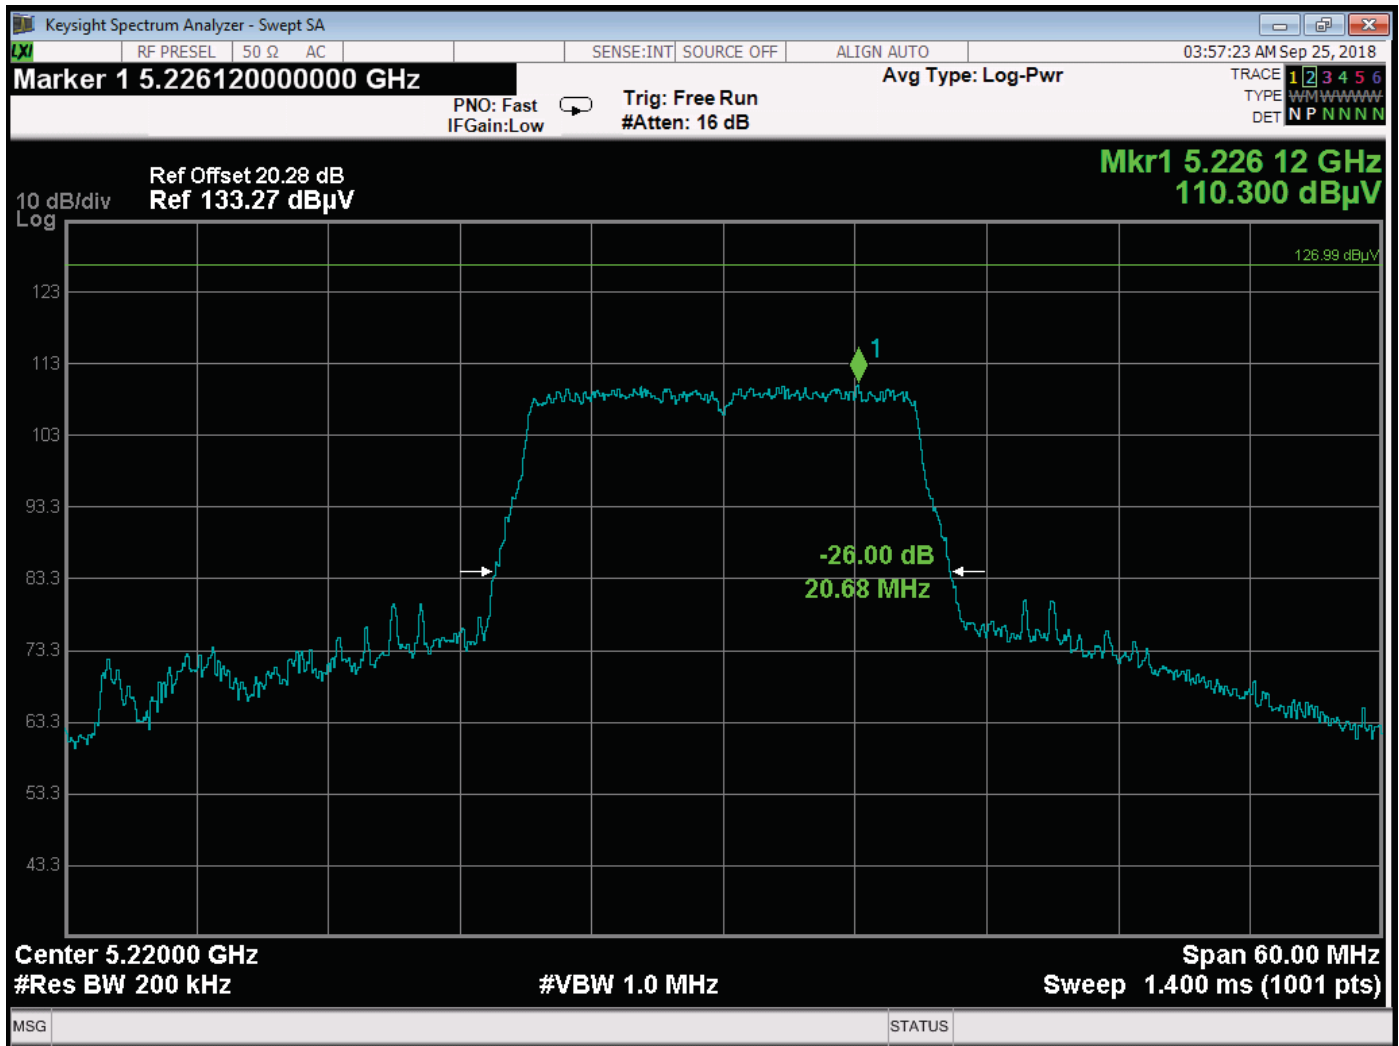


EBW Bandwidth – 5220 MHz – Port #1

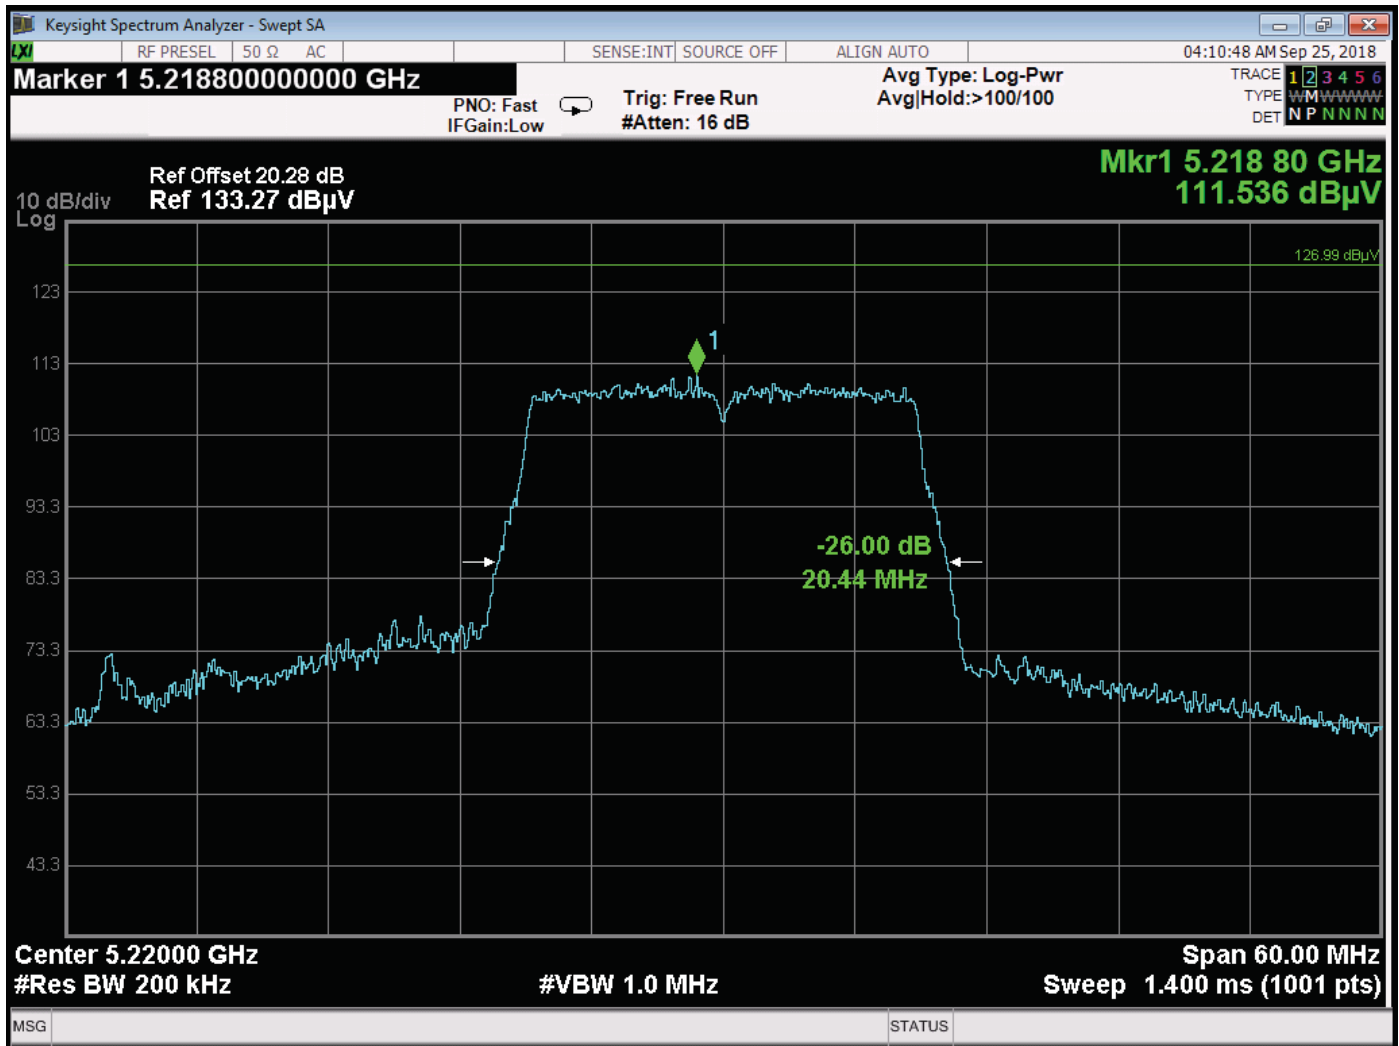

EBW Bandwidth – 5220 MHz – Port #2

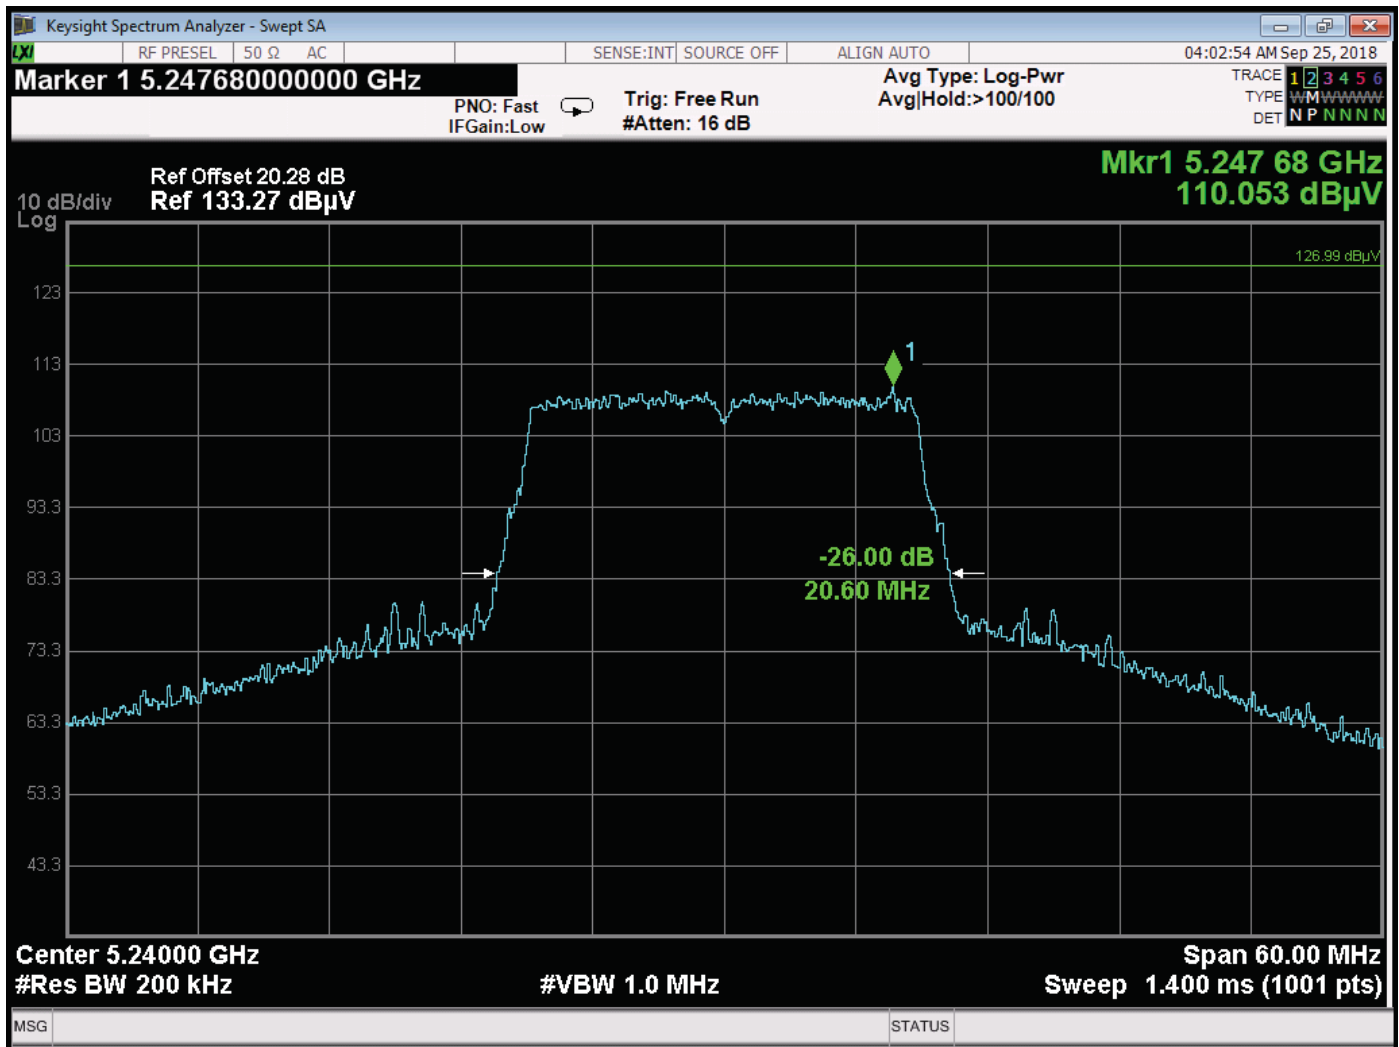


EBW Bandwidth – 5240 MHz – Port #1

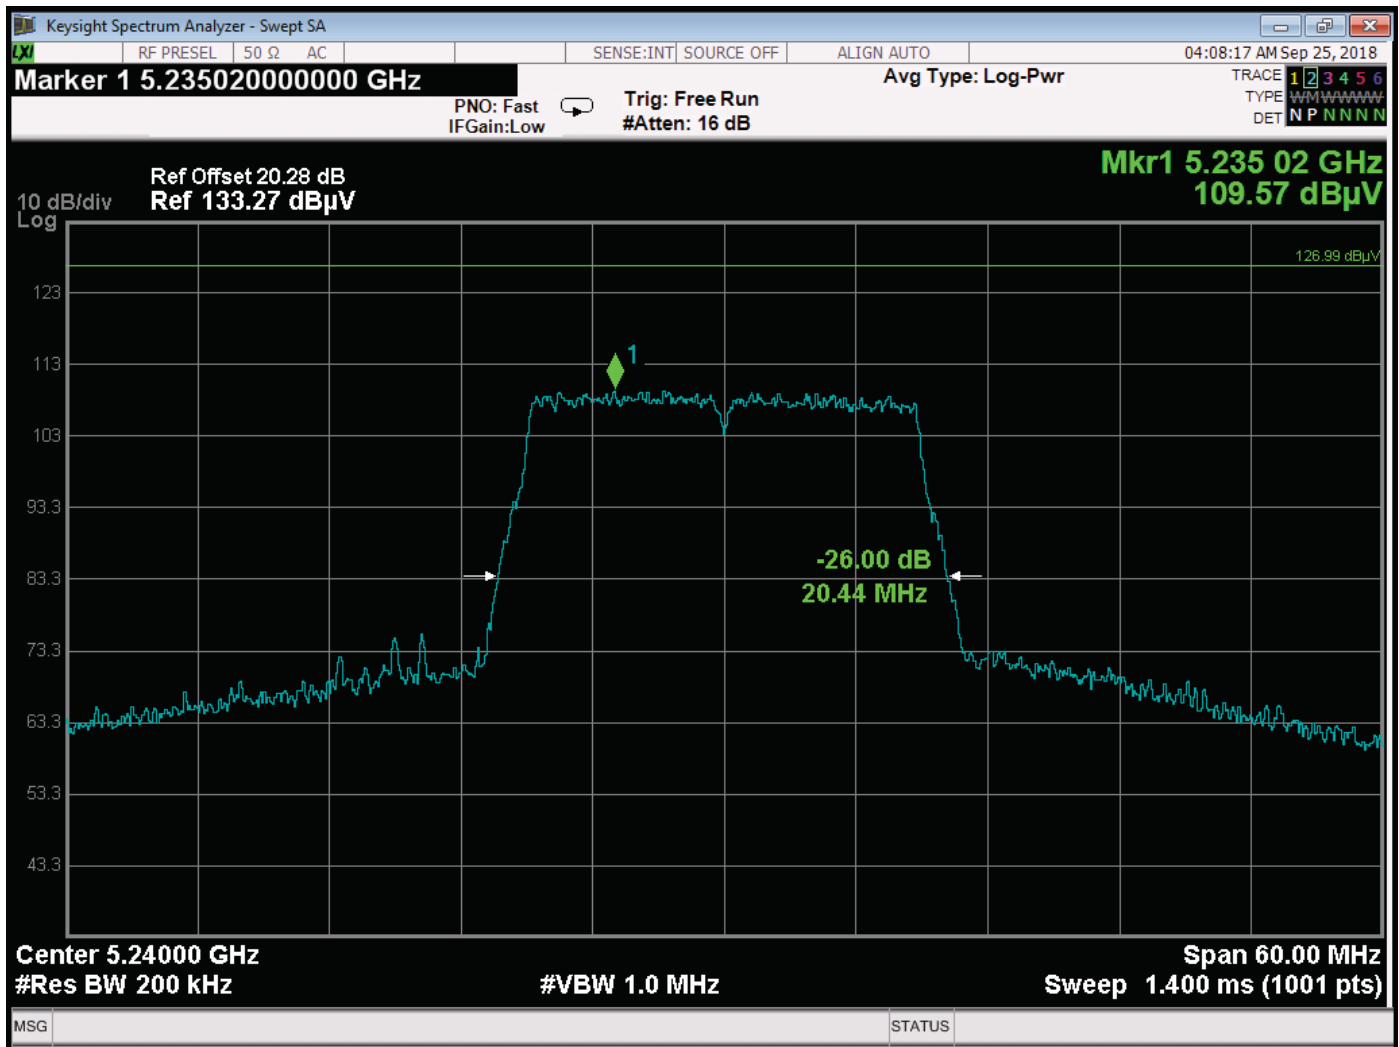


EBW Bandwidth – 5240 MHz – Port #2

SPECTRAL DENSITY OUTPUT


DATA SHEETS

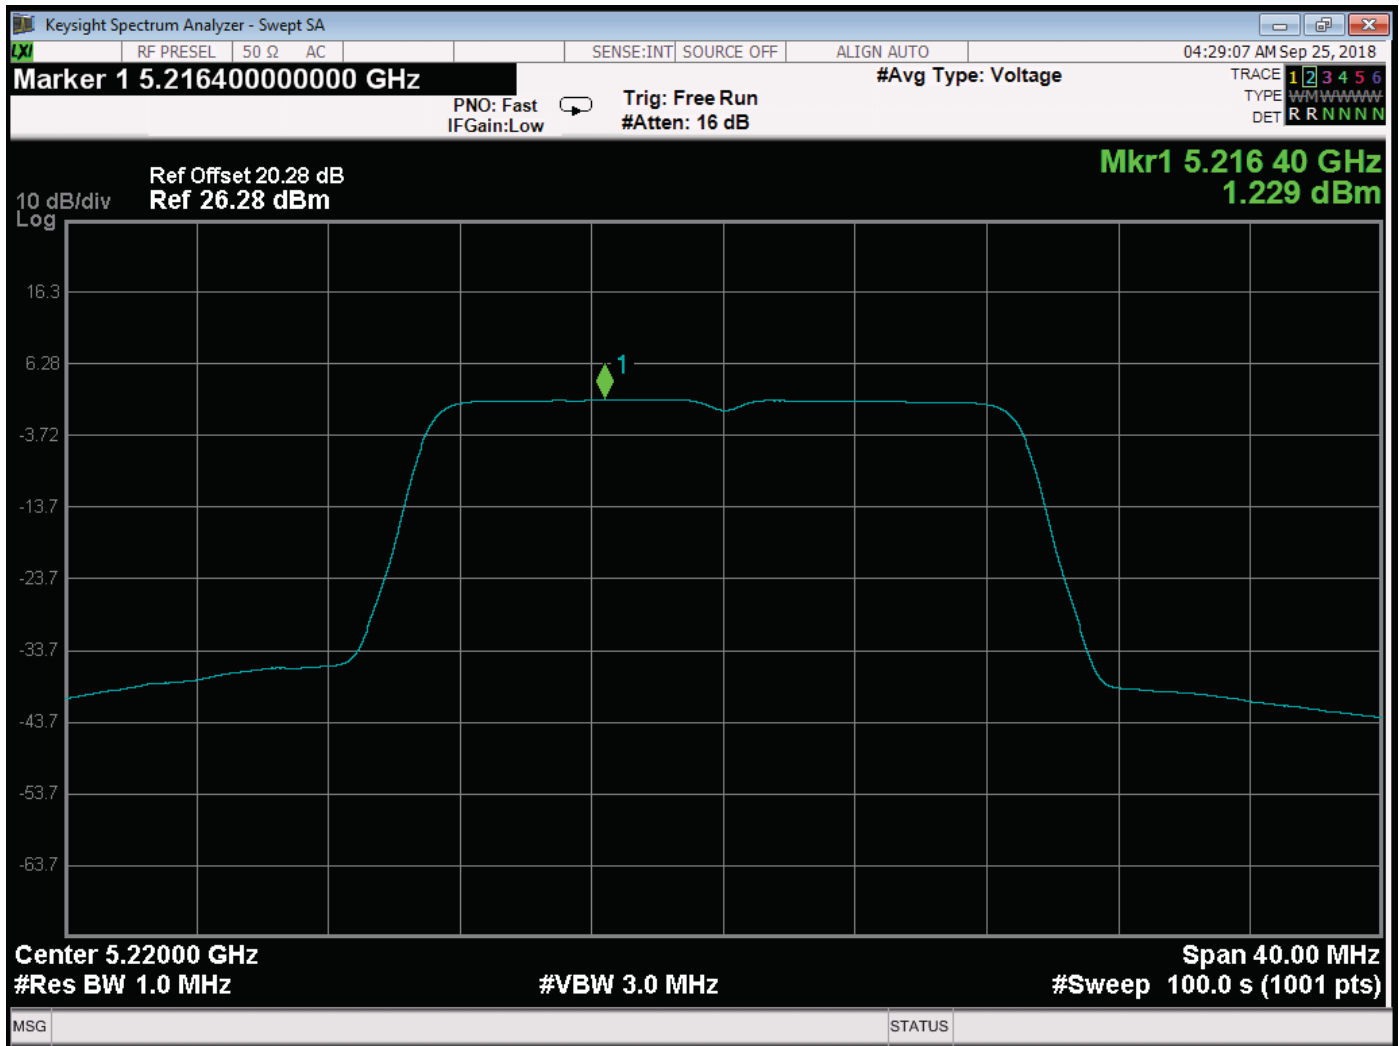


Spectral Density – 5220 MHz – Port #1

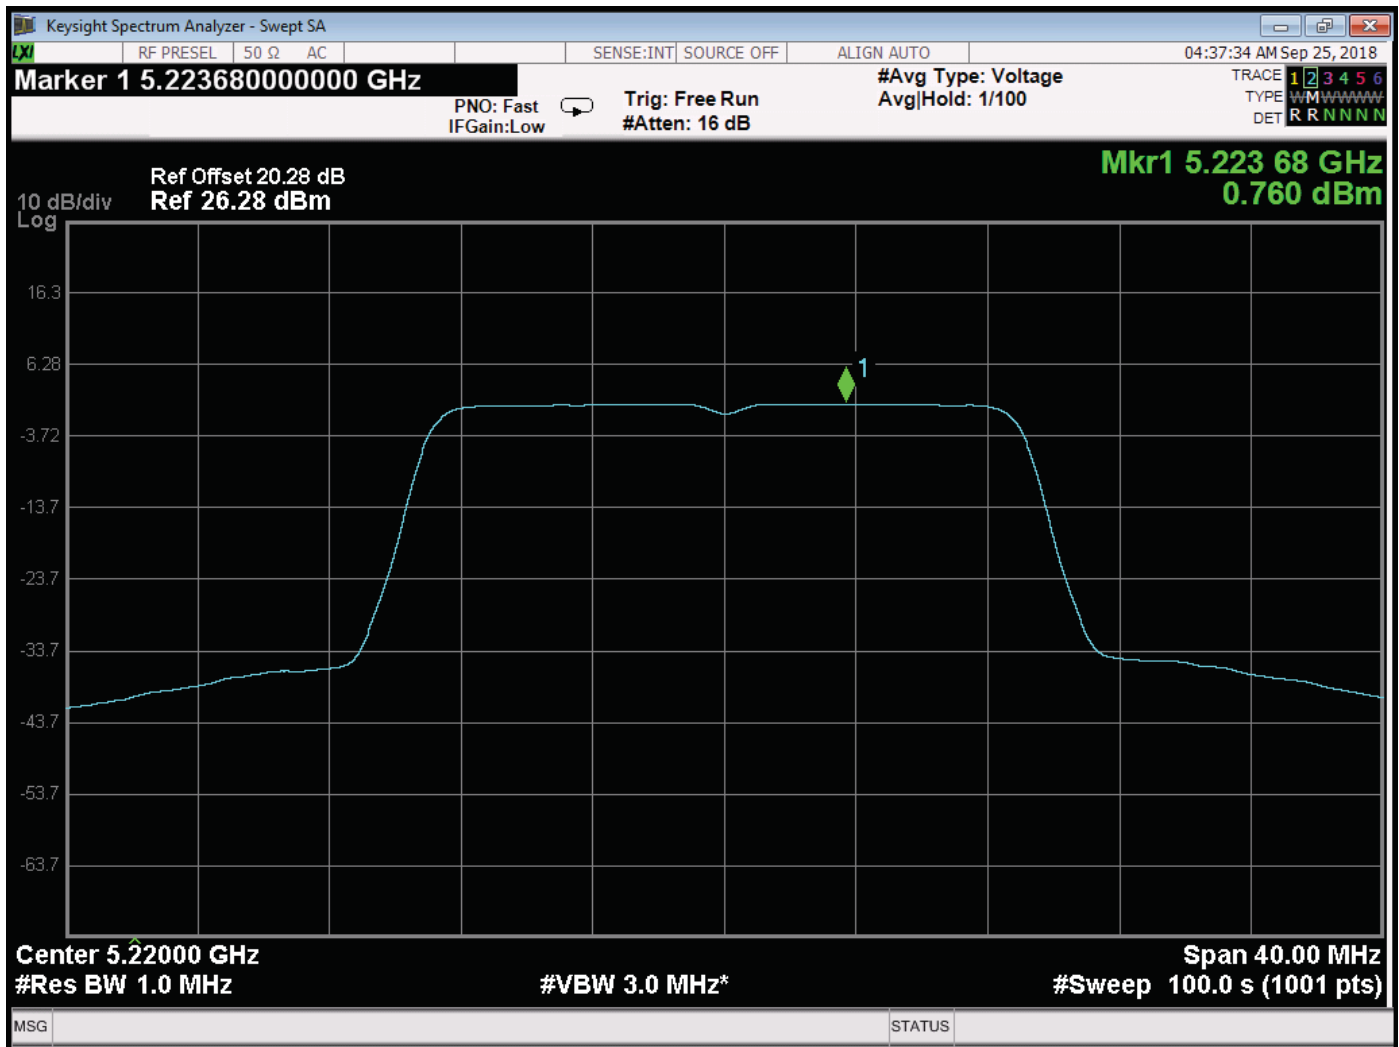

Spectral Density – 5220 MHz – Port #2

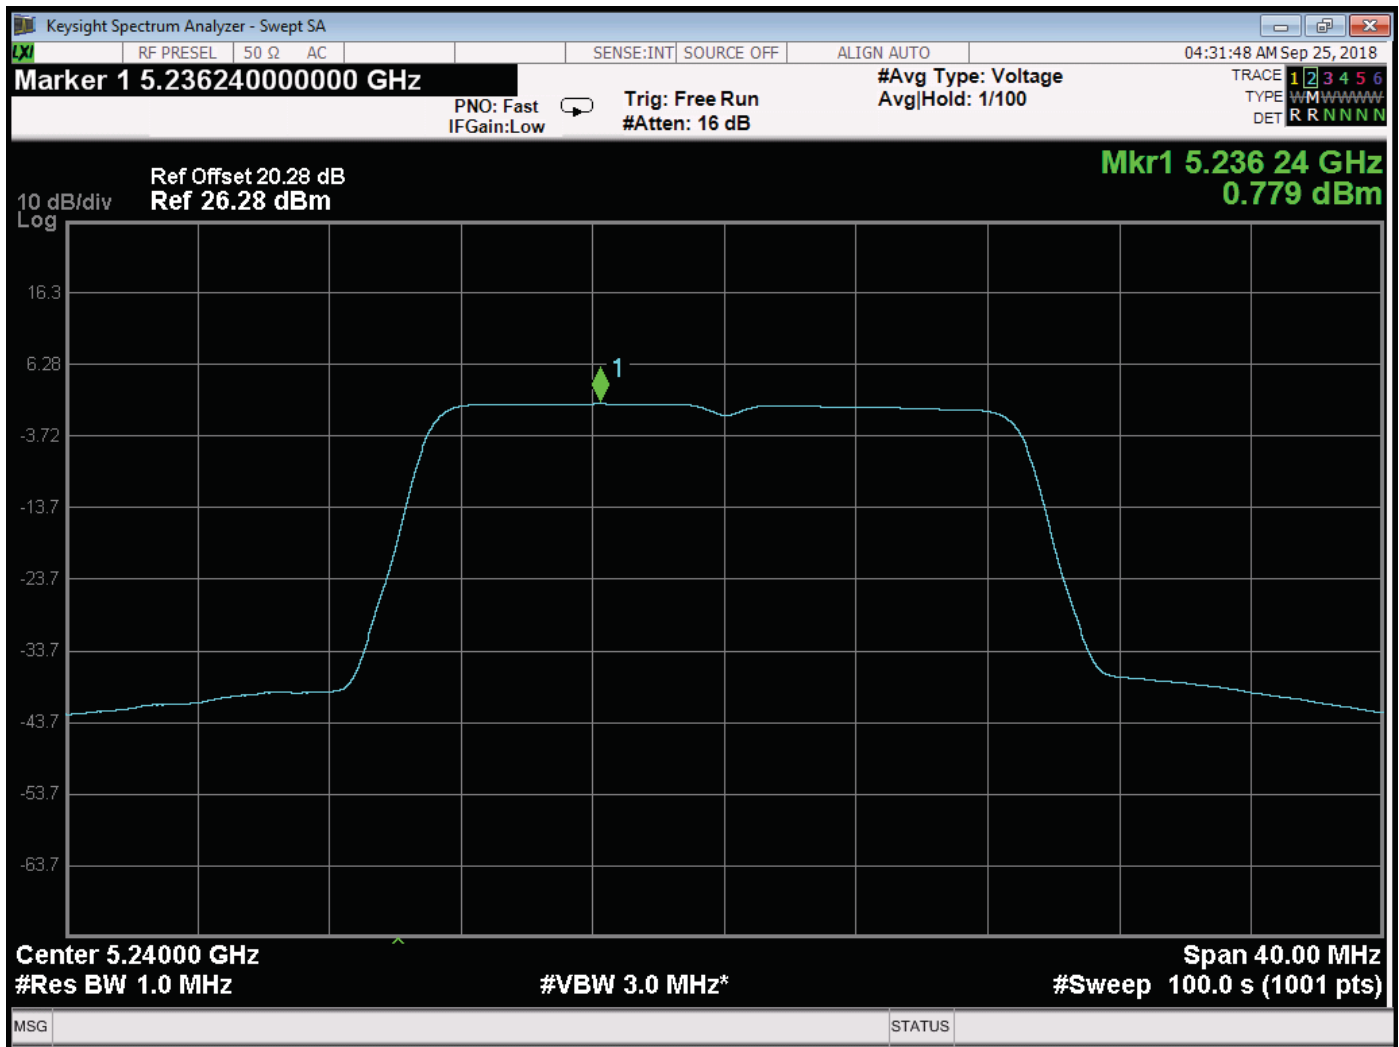

Spectral Density – 5240 MHz – Port #1

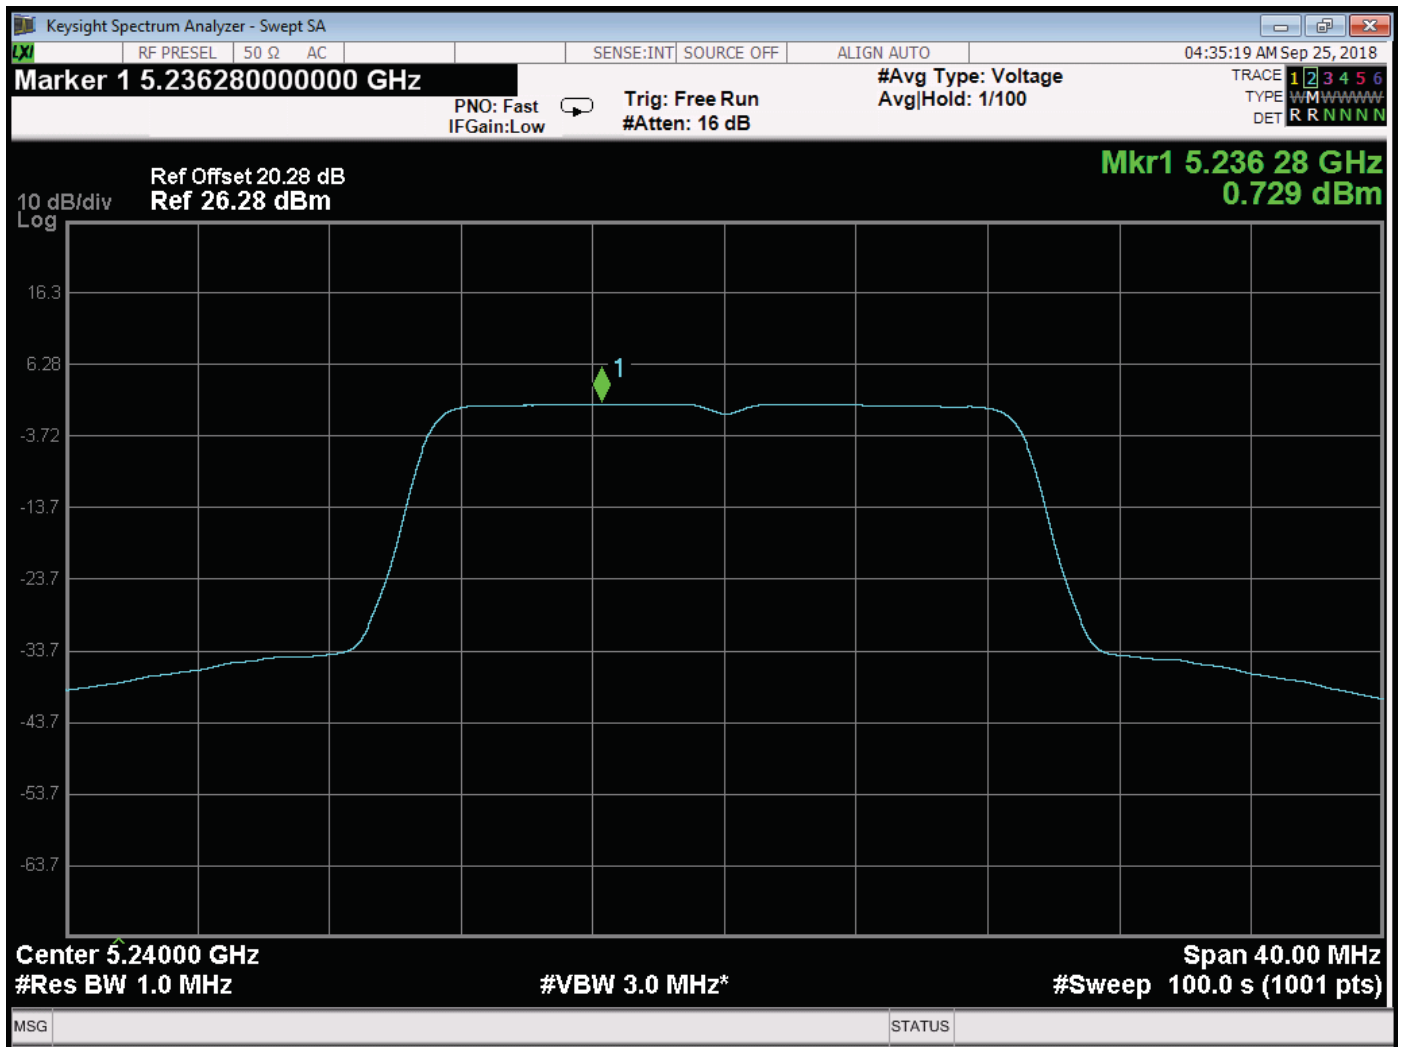

Spectral Density – 5240 MHz – Port #2

PEAK POWER SPECTRAL DENSITY

SC4240 MIMO Radio
Model: SC4240E-520-BB

Limit = 13.99 dBm

5220 MHz
Port 1 Gain Setting = 46
Port 2 Gain Setting = 47

ANTENNA PORT	DIRECT PPSD (dBm)	10 Log (N)	CORRECTED PPSD (dBm)	Limit (dBm)	Margin (dB)
1	1.229	3.01	4.239	13.99	-9.751
2	0.760	3.01	3.770	13.99	-10.22

PEAK POWER SPECTRAL DENSITY

SC4240 MIMO Radio
Model: SC4240E-520-BB

Limit = 13.99 dBm

5240 MHz
Port 1 Gain Setting = 46
Port 2 Gain Setting = 47

ANTENNA PORT	DIRECT PPSD (dBm)	10 Log (N)	CORRECTED PPSD (dBm)	Limit (dBm)	Margin (dB)
1	0.779	3.01	3.789	13.99	-10.201
2	0.729	3.01	3.739	13.99	-10.251

MAXIMUM CONDUCTED OUTPUT POWER

DATA SHEETS

MAXIMUM CONDUCTED OUTPUT POWER

SC4240 MIMO Radio
Model: SC4240E-520-BB

Limit = 26.99 dBm

5220 MHz
Port 1 Gain Setting = 46
Port 2 Gain Setting = 47

ANTENNA PORT	PEAK POWER (dBm)	AVERAGE POWER (dBm)	PEAK POWER (mW)	AVERAGE POWER (mW)
1	23.39	23.14	218.27	206.06
2	23.42	23.18	219.79	207.97
Total Power:	26.42	26.17	438.06	414.03

MAXIMUM EIRP ELEVATION ANGLE

SC4240 MIMO Radio
Model: SC4240E-520-BB

Limit = 20.97 dBm

5220 MHz
Port 1 Gain Setting = 46
Port 2 Gain Setting = 47

ANTENNA PORT	PEAK POWER (dBm)	AVERAGE POWER (dBm)	PEAK POWER (mW)	AVERAGE POWER (mW)
1	23.39	23.14	218.27	206.06
2	23.42	23.18	219.79	207.97
Total Power:	26.42	26.17	438.06	414.03

TOTAL PEAK POWER (dBm)	GAIN (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
26.42	-6.99*	19.43	20.97	-1.54

*Worst Case Directional Gain that is 30 degrees above the Horizon – Model: CO520-6-LS, S/N: 004

Note: The worst case gain is -10 dBi at 35 degrees above the Horizon. There are a total of two antennas.

MAXIMUM CONDUCTED OUTPUT POWER

SC4240 MIMO Radio
Model: SC4240E-520-BB

Limit = 26.99 dBm

5240 MHz
Port 1 Gain Setting = 46
Port 2 Gain Setting = 47

ANTENNA PORT	PEAK POWER (dBm)	AVERAGE POWER (dBm)	PEAK POWER (mW)	AVERAGE POWER (mW)
1	24.19	23.97	262.42	249.46
2	24.18	23.97	261.82	249.46
Total Power:	27.20	26.98	524.24	498.92

MAXIMUM EIRP ELEVATION ANGLE

SC4240 MIMO Radio
Model: SC4240E-520-BB

Limit = 20.97 dBm


5240 MHz
Port 1 Gain Setting = 46
Port 2 Gain Setting = 47

ANTENNA PORT	PEAK POWER (dBm)	AVERAGE POWER (dBm)	PEAK POWER (mW)	AVERAGE POWER (mW)
1	24.19	23.97	262.42	249.46
2	24.18	23.97	261.82	249.46
Total Power:	27.20	26.98	524.24	498.92

TOTAL PEAK POWER (dBm)	GAIN (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
27.20	-6.99*	20.21	20.97	-0.76


*Worst Case Directional Gain that is 30 degrees above the Horizon – Model: CO520-6-LS, S/N: 004

Note: The worst case gain is -10 dBi at 35 degrees above the Horizon. There are a total of two antennas.

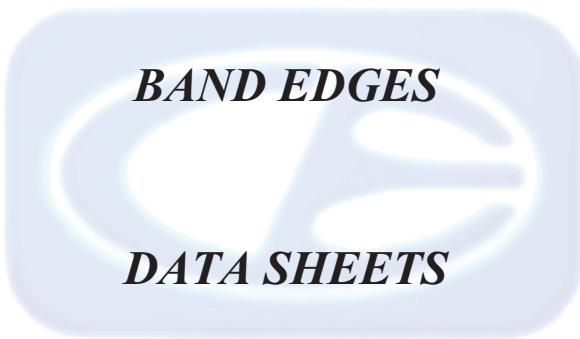


BAND EDGES


DATA SHEETS

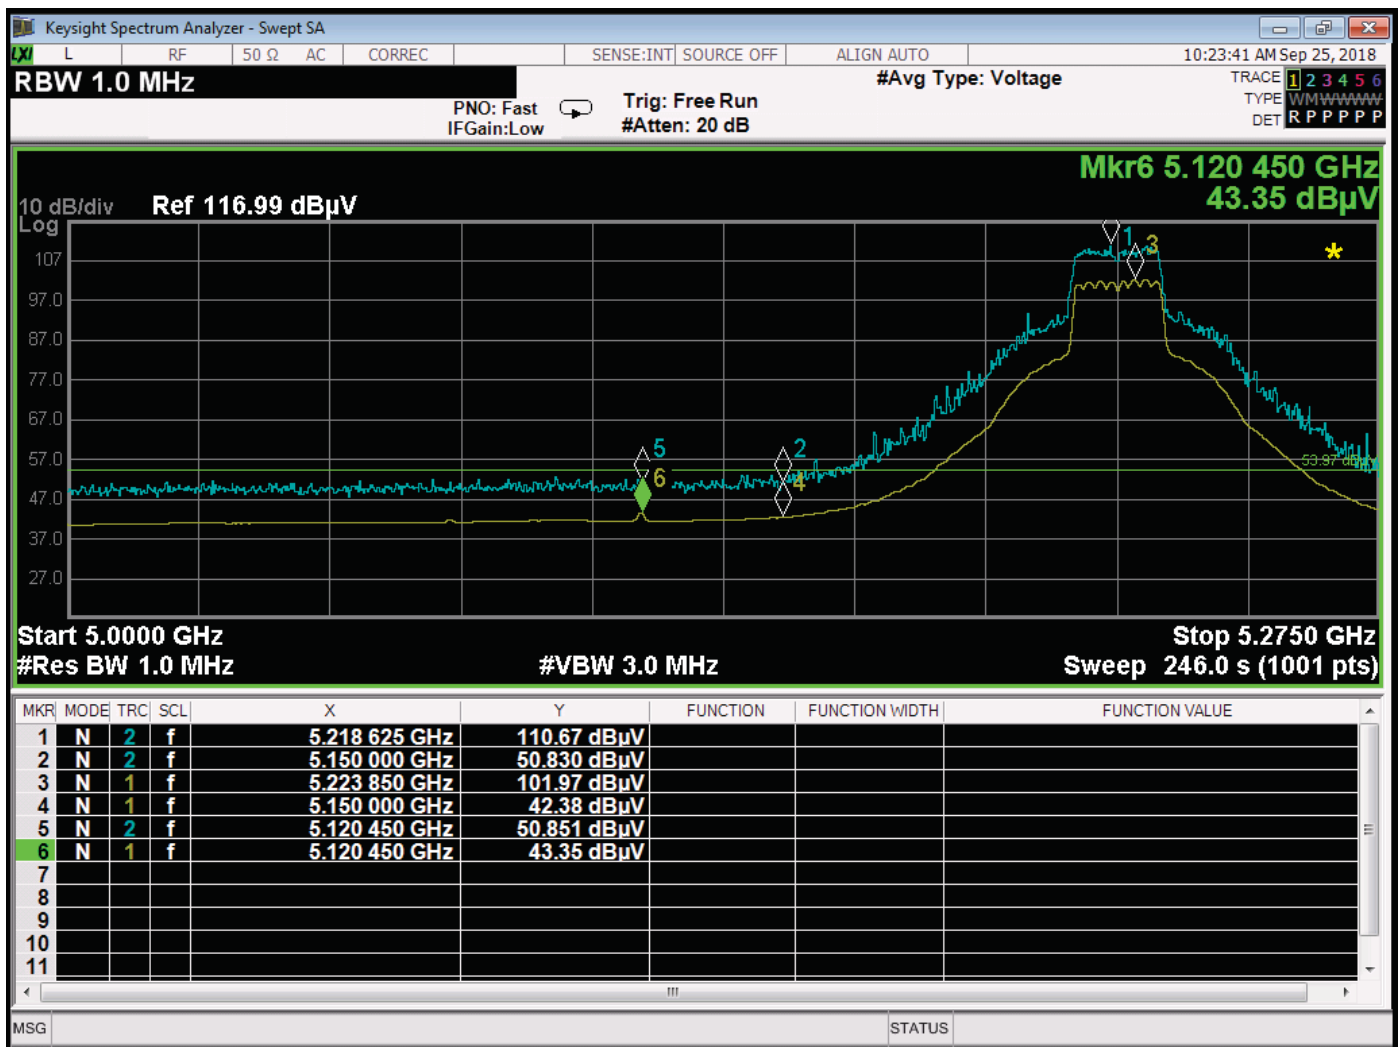


Band Edge – Low Channel – Vertical Polarization

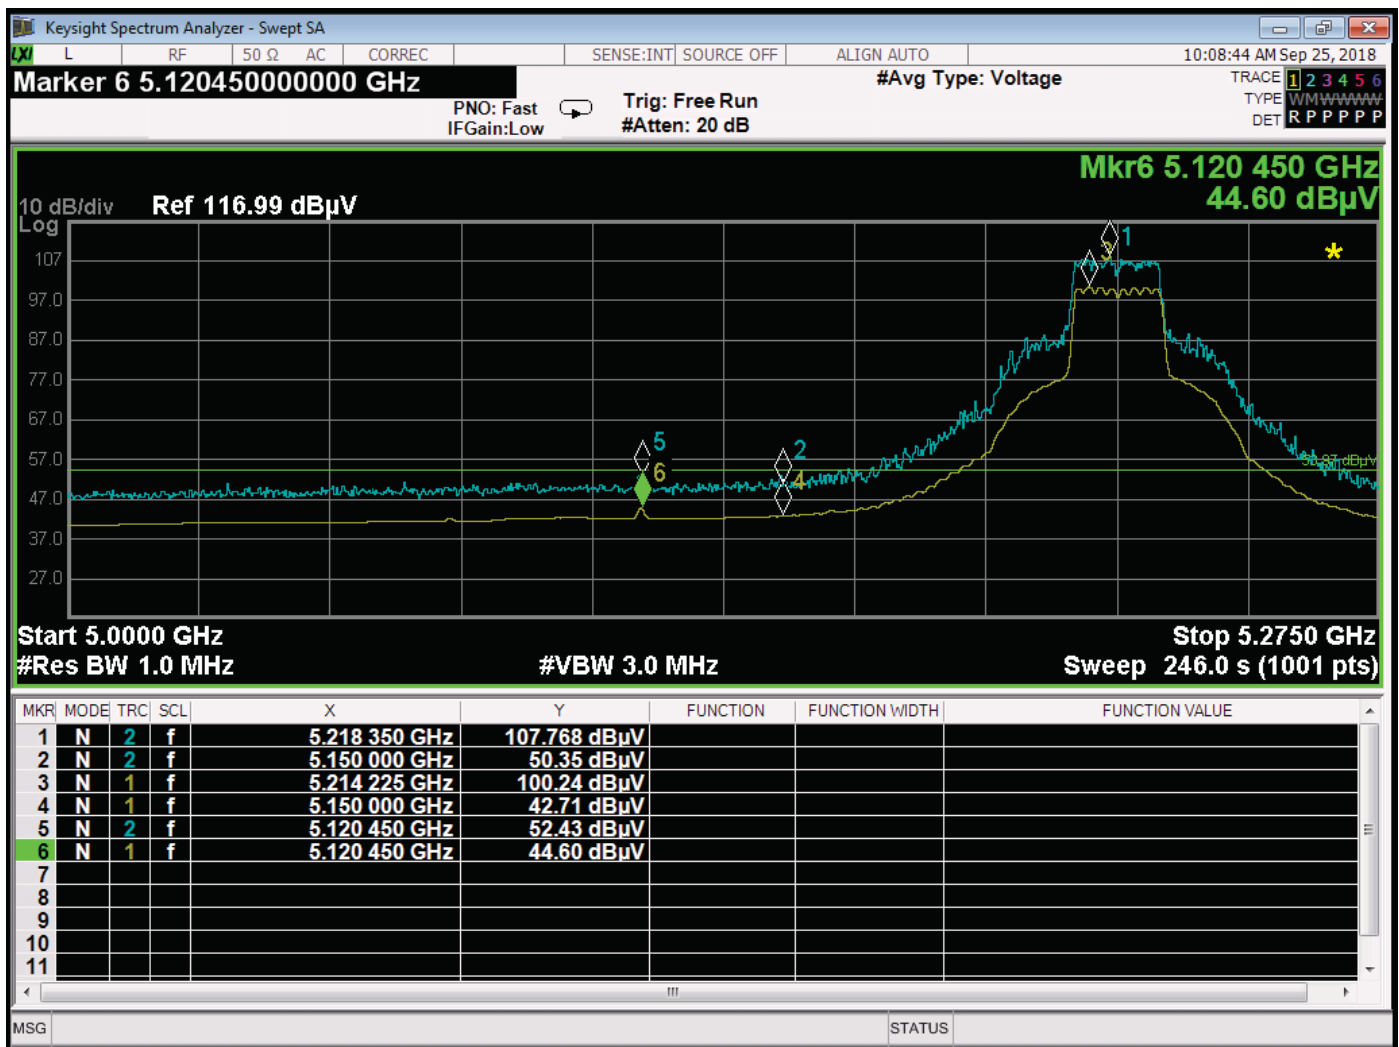

Band Edge – Low Channel – Horizontal Polarization

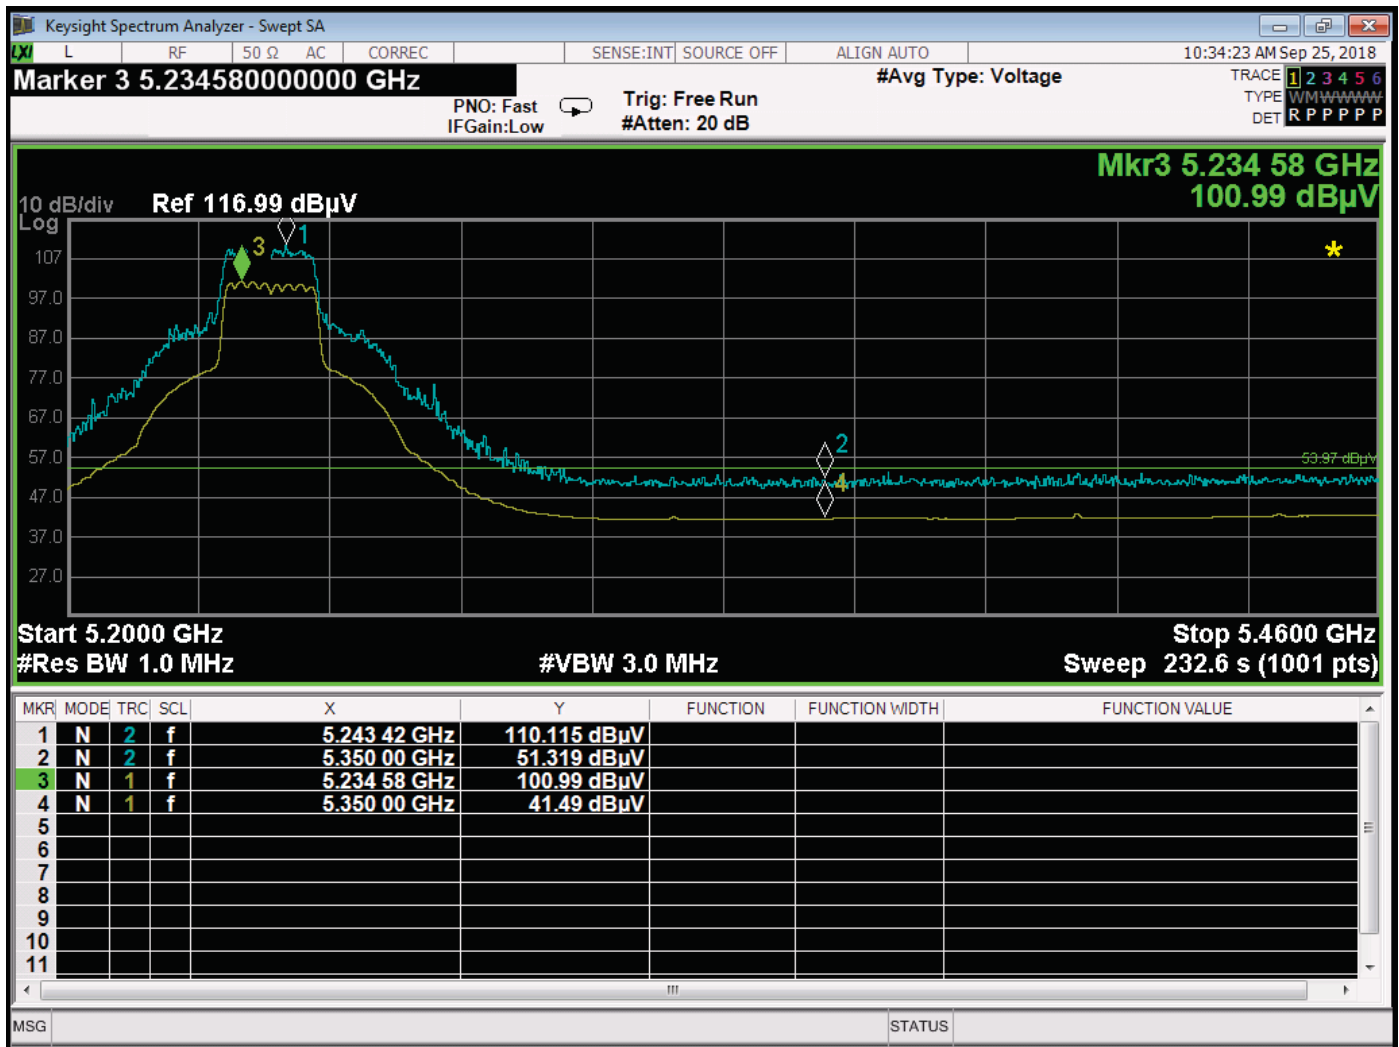

Band Edge – High Channel – Vertical Polarization

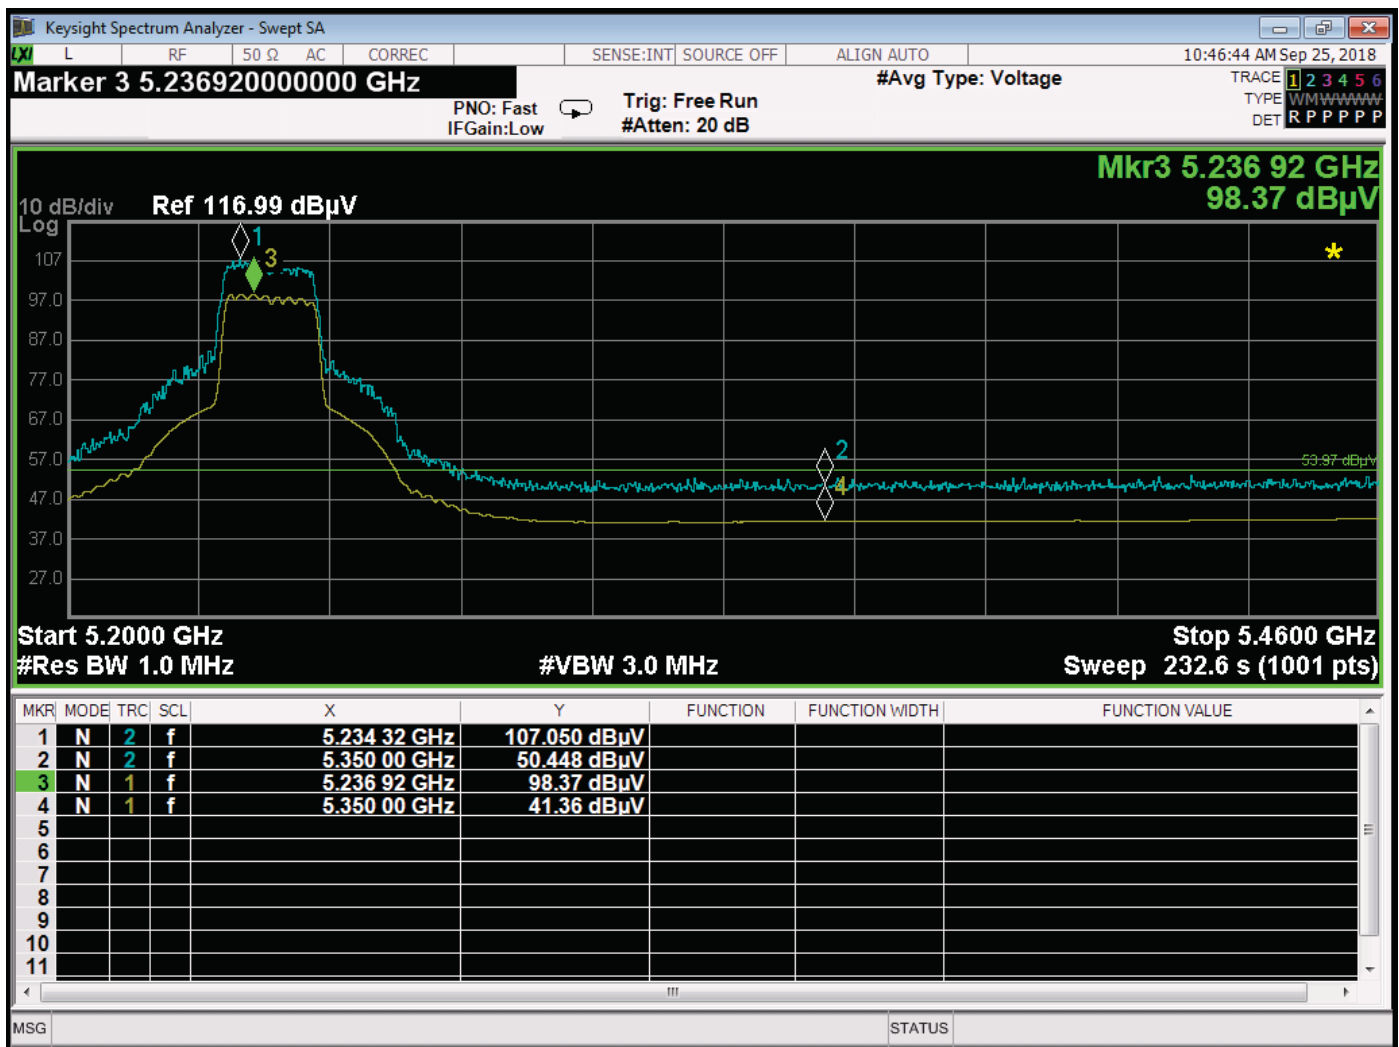

Band Edge – High Channel – Horizontal Polarization