

FCC Part 15C

Measurement and Test Report

For

Netatmo

93, rue Nationale - 92100 Boulogne Billancourt - FRANCE

FCC ID: N3A-NWS03IN

FCC Rule(s):	<u>FCC Part 15.249</u>
Product Description:	<u>Netatmo Weather Station</u>
Tested Model:	<u>NWS03IN</u>
Report No.:	<u>STR16068147I-3</u>
Tested Date:	<u>2016-06-13 to 2016-07-05</u>
Issued Date:	<u>2016-07-06</u>
Tested By:	<u>Seven Song / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u>
Prepared By:	

Seven Song

Silin Chen

Jandyso

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
2. SUMMARY OF TEST RESULTS.....	7
3. ANTENNA REQUIREMENTS.....	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. RADIATED EMISSIONS.....	9
4.1 STANDARD APPLICABLE.....	9
4.2 TEST PROCEDURE.....	9
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.4 ENVIRONMENTAL CONDITIONS.....	11
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	11
5. OUT OF BAND EMISSIONS.....	17
5.1 STANDARD APPLICABLE.....	17
5.2 TEST PROCEDURE.....	17
5.3 ENVIRONMENTAL CONDITIONS.....	17
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	17
6. EMISSION BANDWIDTH.....	20
6.1 STANDARD APPLICABLE.....	20
6.2 TEST PROCEDURE.....	20
6.3 ENVIRONMENTAL CONDITIONS.....	20
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	20
7. CONDUCTED EMISSIONS.....	22
7.1 TEST PROCEDURE.....	22
7.2 BASIC TEST SETUP BLOCK DIAGRAM.....	22
7.3 ENVIRONMENTAL CONDITIONS.....	22
7.4 TEST RECEIVER SETUP.....	23
7.5 SUMMARY OF TEST RESULTS/PLOTS.....	23
7.6 CONDUCTED EMISSIONS TEST DATA.....	23

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Netatmo
Address of applicant: 93, rue Nationale - 92100 Boulogne Billancourt - FRANCE

Manufacturer: Netatmo
Address of manufacturer: 93, rue Nationale - 92100 Boulogne Billancourt - FRANCE

General Description of EUT

Product Name:	Netatmo Weather Station
Trade Name:	Netatmo
Model No.:	NWS03IN
Adding Model(s):	/
Rated Voltage:	DC 5V Adapter
Power Adapter Model:	NWS03IN I/P: AC 100-240V, 50/60Hz; O/P: DC 5V

Note: The test data is gathered from a production sample, provided by the manufacturer.

Technical Characteristics of EUT

Frequency Range:	916.000MHz, 916.800MHz
Max. Field Strength:	92.74dBuV/m
Modulation:	GFSK
Quantity of Channels:	2
Type of Antenna:	Integral
Antenna Gain:	1dBi
Lowest Internal Frequency:	32.768kHz
Device Category:	Fixed Device

1.2 Test Standards

The following report is prepared on behalf of the Netatmo in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting(Operating)	916.000MHz
TM2	Transmitting(Pairing)	916.800MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.5	Shielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	ETS	3116B	00088203	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215 (c)	Emission Bandwidth	Compliant

3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an integral antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

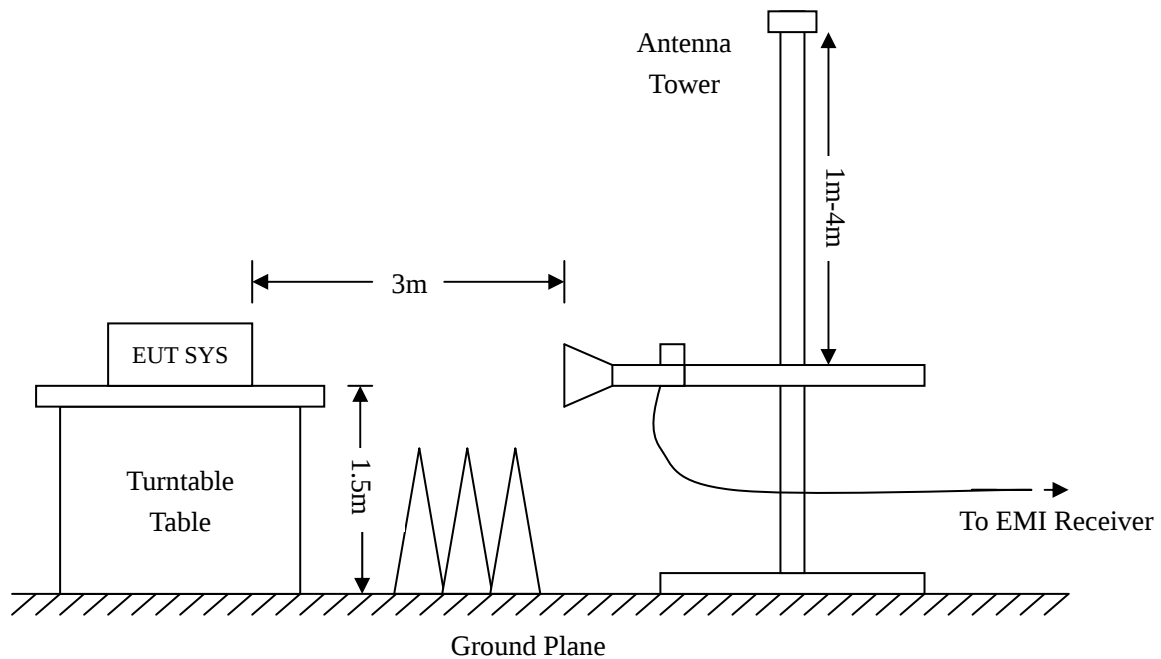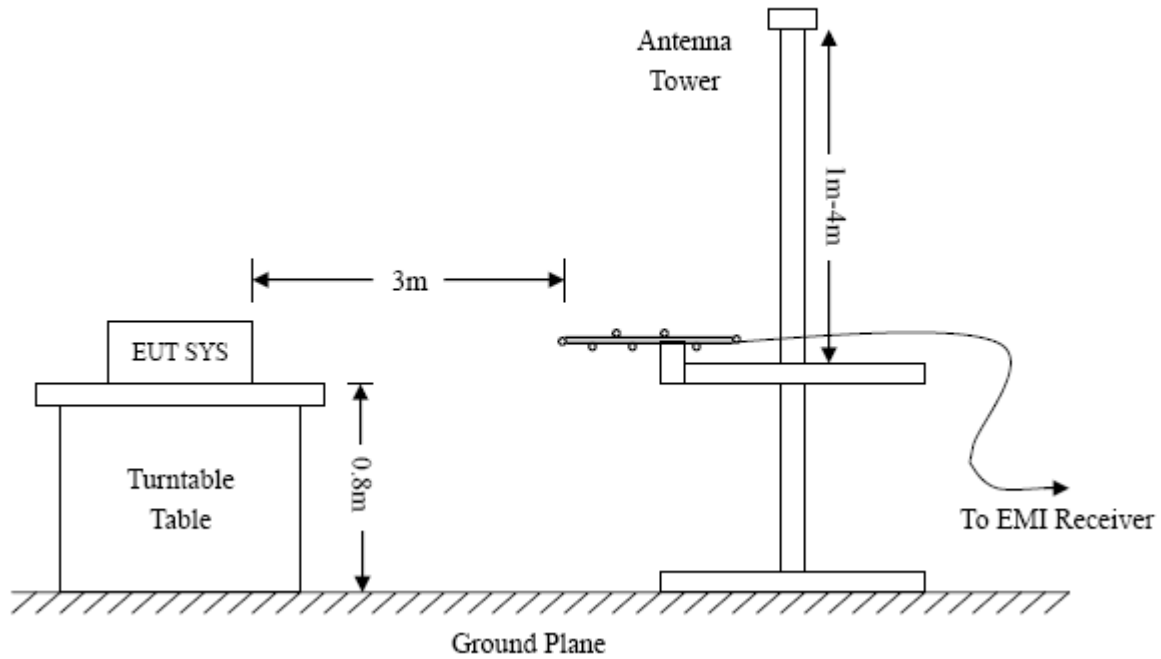

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

4.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst margin of:


-1.26 dB at 916.0047 MHz in the Horizontal polarization, 916.000MHz, 9 kHz to 10 GHz, 3Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: Netatmo Weather Station
Tested Model: NWS03IN
Operating Condition: Transmitting (916.000MHz)
Comment: AC120V /60Hz, Adapter DC 5V

Test Specification: Horizontal

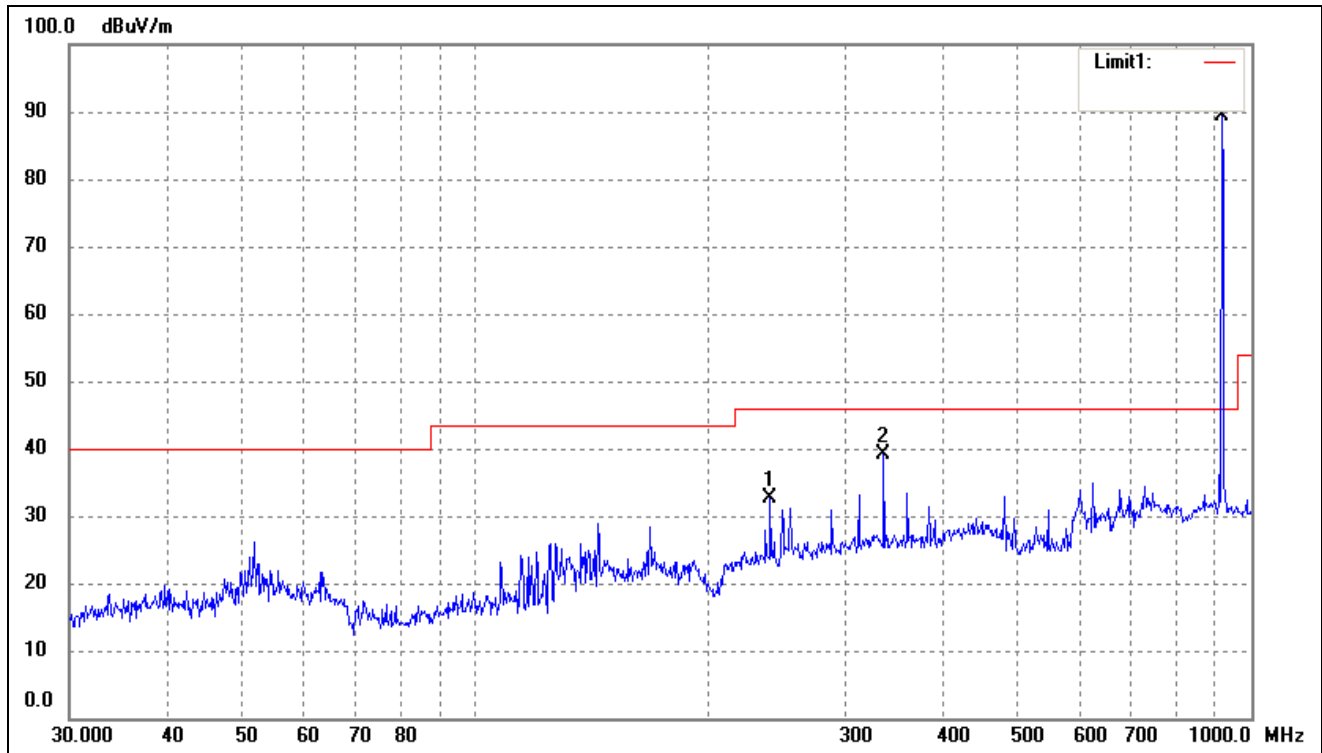

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	239.9874	24.47	8.27	32.74	46.00	-13.26	224	100	peak
2	336.0350	28.51	10.65	39.16	46.00	-6.84	278	100	peak
3	916.0047	75.79	13.53	89.32	94.00	-4.68	133	100	QP(Fun)

Test Specification: Vertical

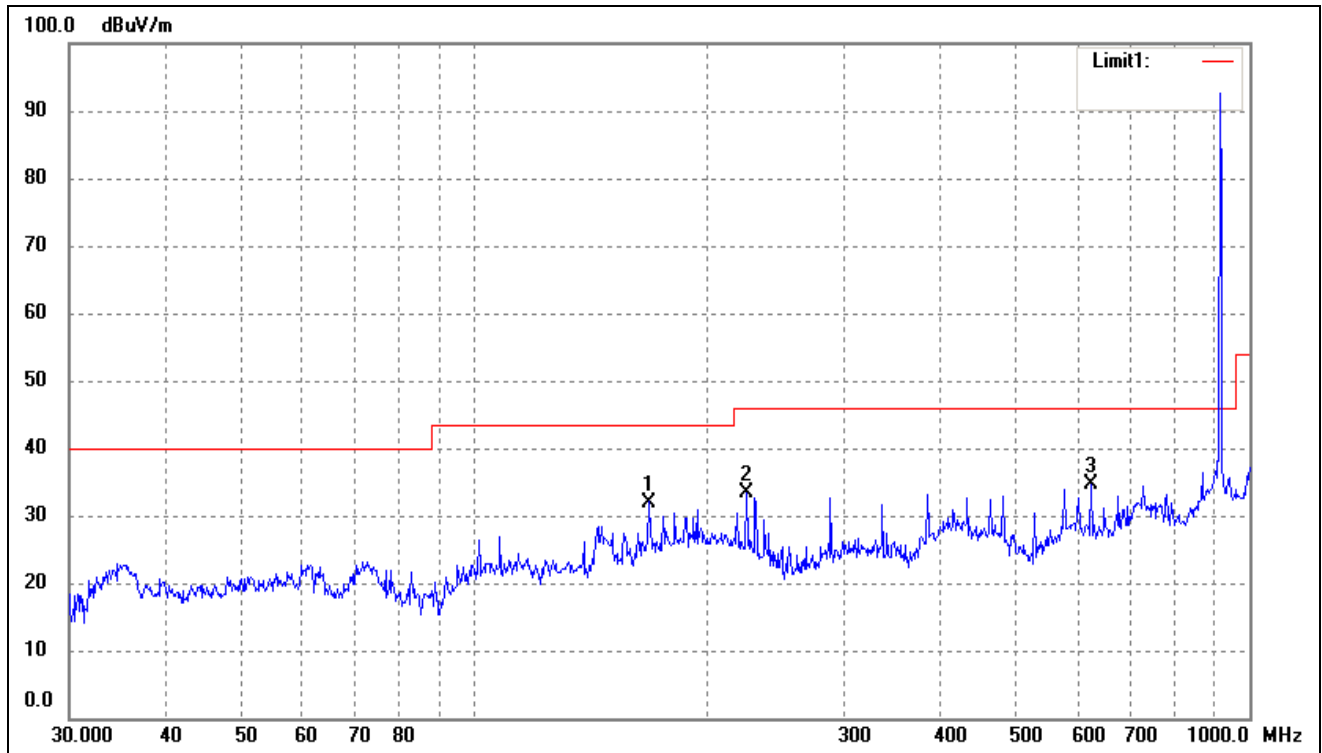


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	167.8241	30.10	1.90	32.00	43.50	-11.50	134	100	peak
2	224.5192	26.07	7.39	33.46	46.00	-12.54	226	100	peak
3	625.0778	18.37	16.33	34.70	46.00	-11.30	270	100	peak
4	916.0047	79.21	13.53	92.74	94.00	-1.26	133	100	QP(Fun)

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: Netatmo Weather Station
Tested Model: NWS03IN
Operating Condition: Transmitting (916.800MHz)
Comment: AC120V /60Hz, Adapter DC 5V

Test Specification: Horizontal

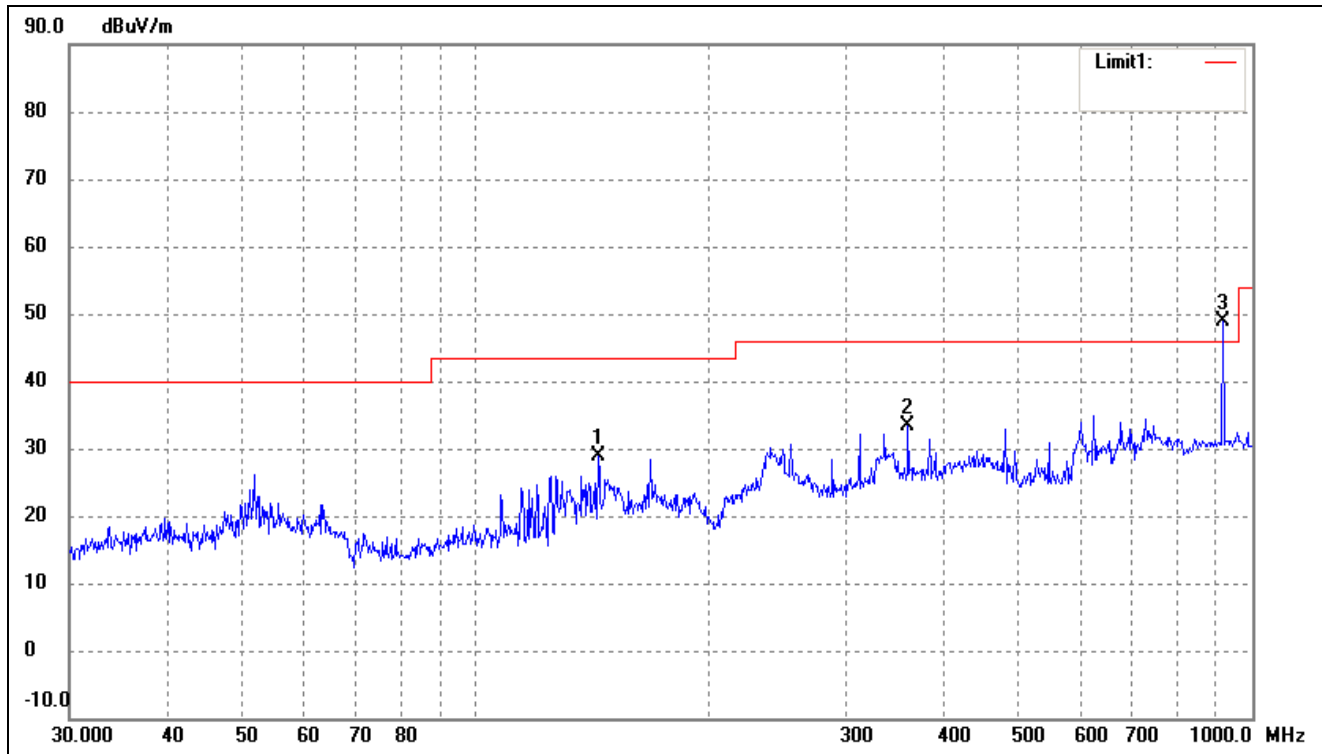

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	143.8292	26.32	2.57	28.89	43.50	-14.61	182	100	peak
2	360.4476	22.31	11.02	33.33	46.00	-12.67	278	100	peak
3	916.8012	35.30	13.52	48.82	94.00	45.18	133	100	QP(Fun)

Test Specification: Vertical

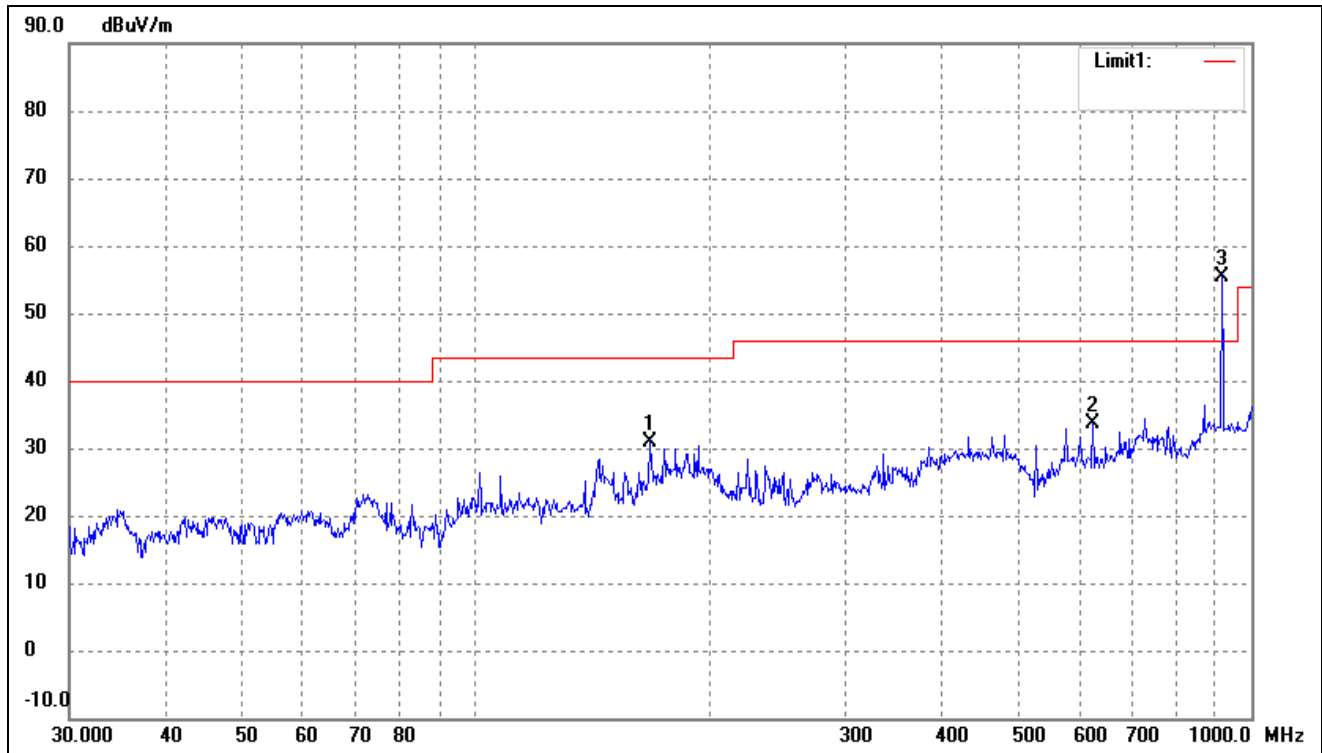

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	167.8240	29.10	1.90	31.00	43.50	-12.50	226	100	peak
2	625.0778	17.37	16.33	33.70	46.00	-12.30	180	100	peak
3	916.8012	41.98	13.52	55.50	94.00	38.50	134	100	QP(Fun)

Spurious Emissions Above 1GHz

For 916.000MHz Transmitting

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
1832.000	65.83	-14.32	51.51	74.00	-22.49	H	PK
1832.000	49.82	-14.32	35.50	54.00	-18.50	H	AV
2748.000	50.64	-16.42	34.22	74.00	-39.78	H	PK
2748.000	35.45	-16.42	19.03	54.00	-34.97	H	AV
1832.000	65.83	-14.32	51.51	74.00	-22.49	V	PK
1832.000	49.82	-14.32	35.50	54.00	-18.50	V	AV
2748.000	50.64	-16.42	34.22	74.00	-39.78	V	PK
2748.000	35.45	-16.42	19.03	54.00	-34.97	V	AV

For 916.800MHz Transmitting

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
1833.600	57.27	-14.32	42.95	74	-31.05	H	PK
1833.600	49.09	-14.32	34.77	54	-19.23	H	AV
2750.400	54.55	-16.42	38.13	74	-35.87	H	PK
2750.400	46.36	-16.42	29.94	54	-24.06	H	AV
1833.600	56.36	-3.49	52.87	74	-21.13	V	PK
1833.600	44.55	-3.49	41.06	54	-12.94	V	AV
2750.400	55.45	-0.47	54.98	74	-19.02	V	PK
2750.400	40.00	-0.47	39.53	54	-14.47	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz.

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 902MHz to 928MHz, than mark the higher-level emission for comparing with the FCC rules.

5.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

5.4 Summary of Test Results/Plots


Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	902	<46 dBuV	Pass
Highest	928	<46 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.

Please refer to the test plots as below.

For 916.000MHz


Horizontal (Worst case)

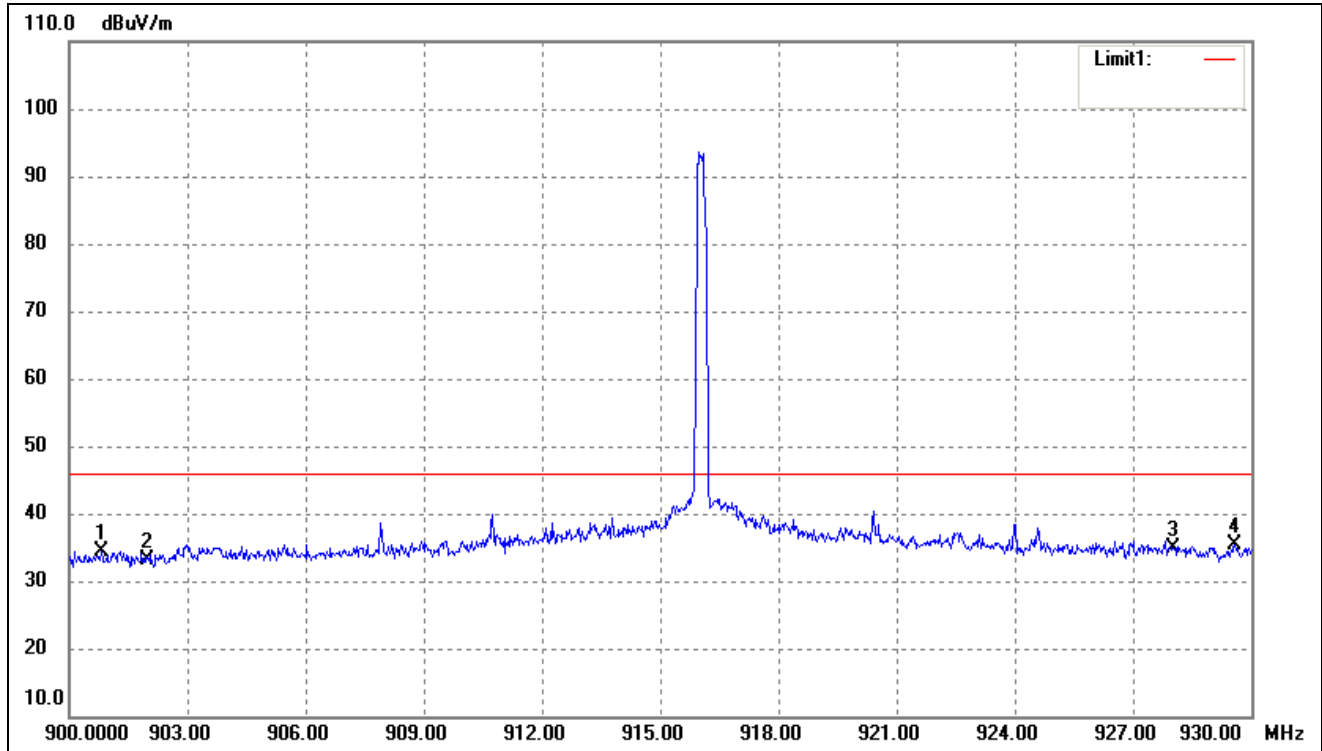

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	900.8098	31.14	3.17	34.31	46.00	-11.69	133	100	peak
2	902.0000	29.98	3.20	33.18	46.00	-12.82	133	100	peak
3	928.0000	30.85	3.91	34.76	46.00	-11.24	133	100	peak
4	929.5800	31.49	3.95	35.44	46.00	-10.56	133	100	peak

For 916.800MHz

Horizontal (Worst case)

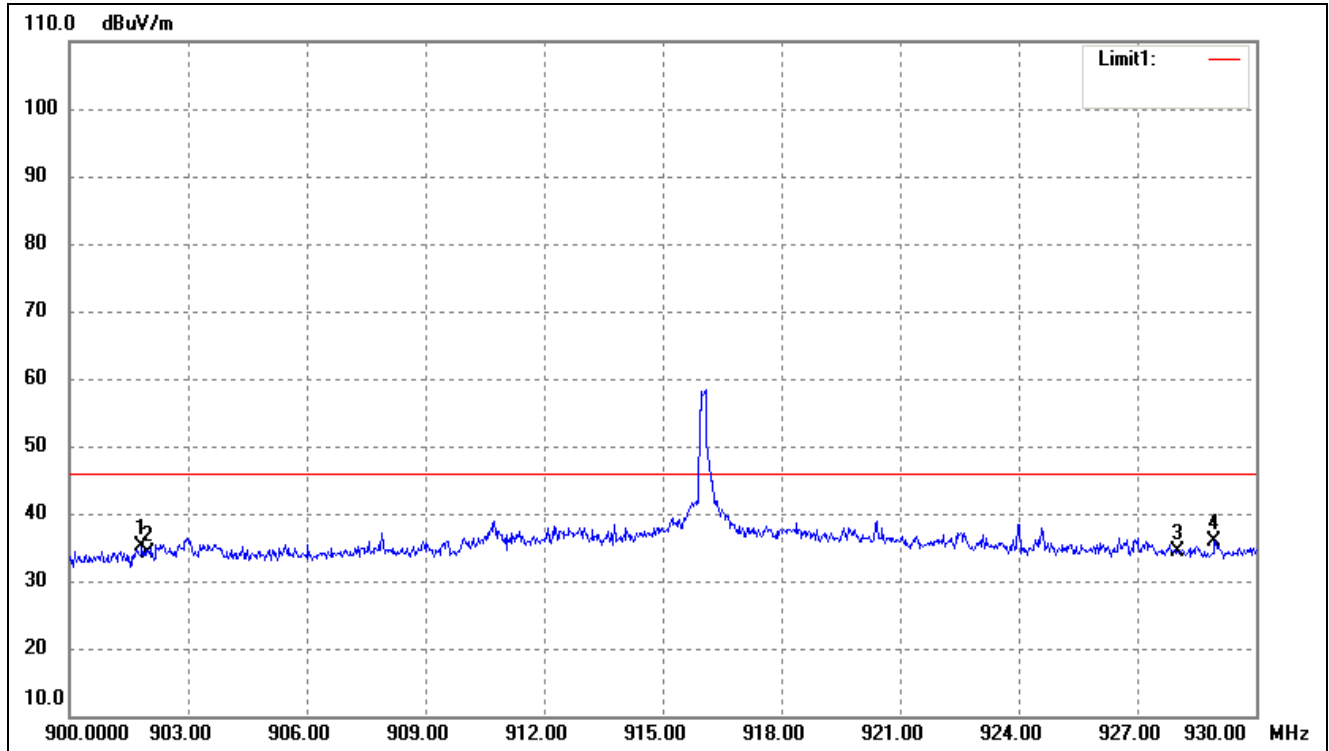

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	901.8300	31.86	3.20	35.06	46.00	-10.94	135	100	peak
2	902.0000	30.98	3.20	34.18	46.00	-11.82	135	100	peak
3	928.0000	30.35	3.91	34.26	46.00	-11.74	135	100	peak
4	928.9500	31.96	3.93	35.89	46.00	-10.11	135	100	peak

6. Emission Bandwidth

6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW $\geq$ 1% 20dB Bandwidth, VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.3 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots


Channel	Frequency MHz	20dB Bandwidth kHz	99% Bandwidth kHz
1	916.000MHz	170.103	173.7000
2	916.800MHz	171.143	175.8732

Please refer to the following test plots

916.000MHz

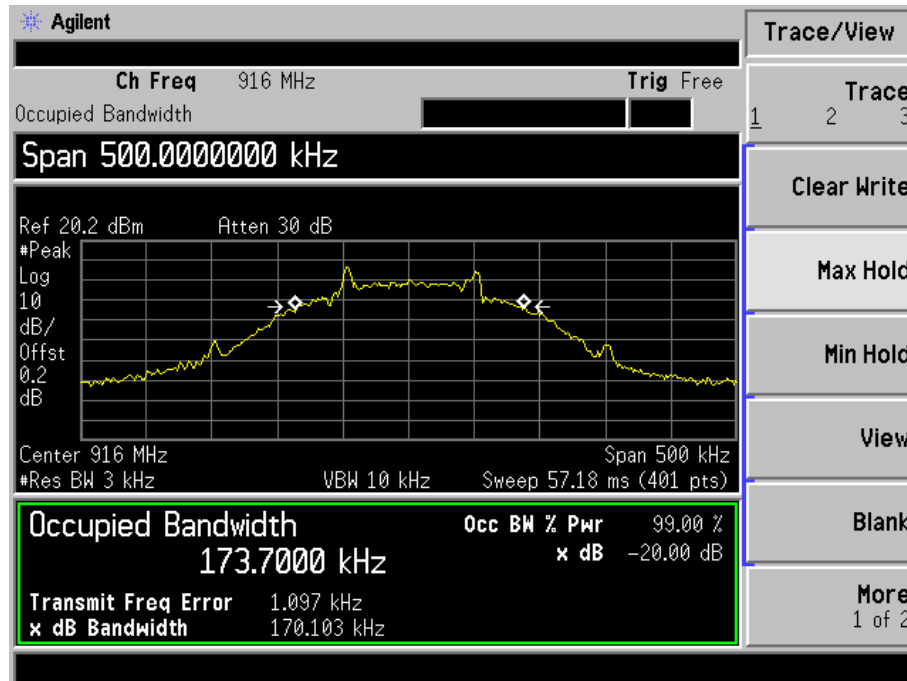

916.800MHz

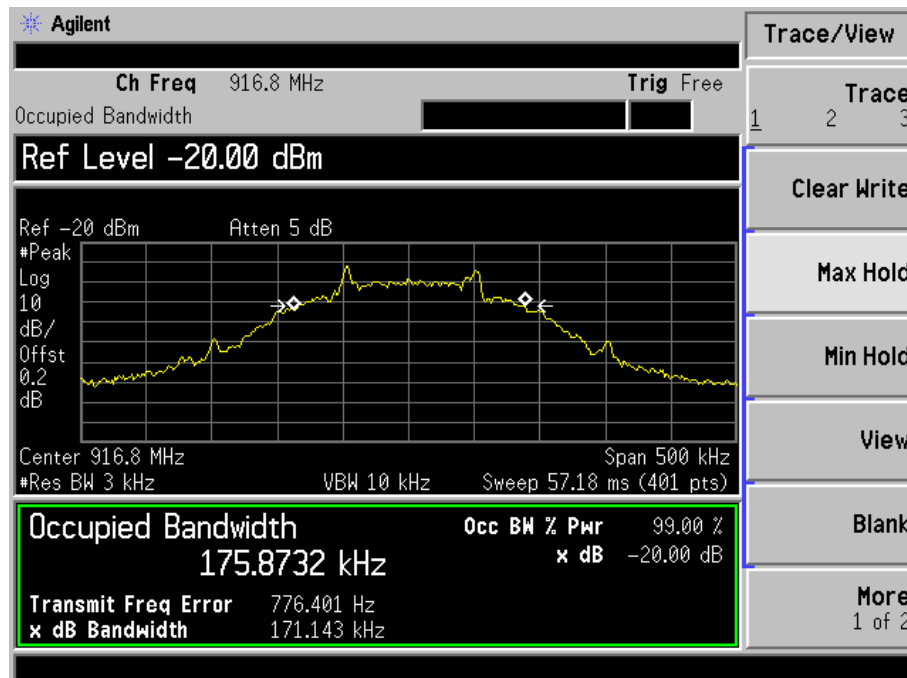


7. Conducted Emissions

7.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

7.2 Basic Test Setup Block Diagram

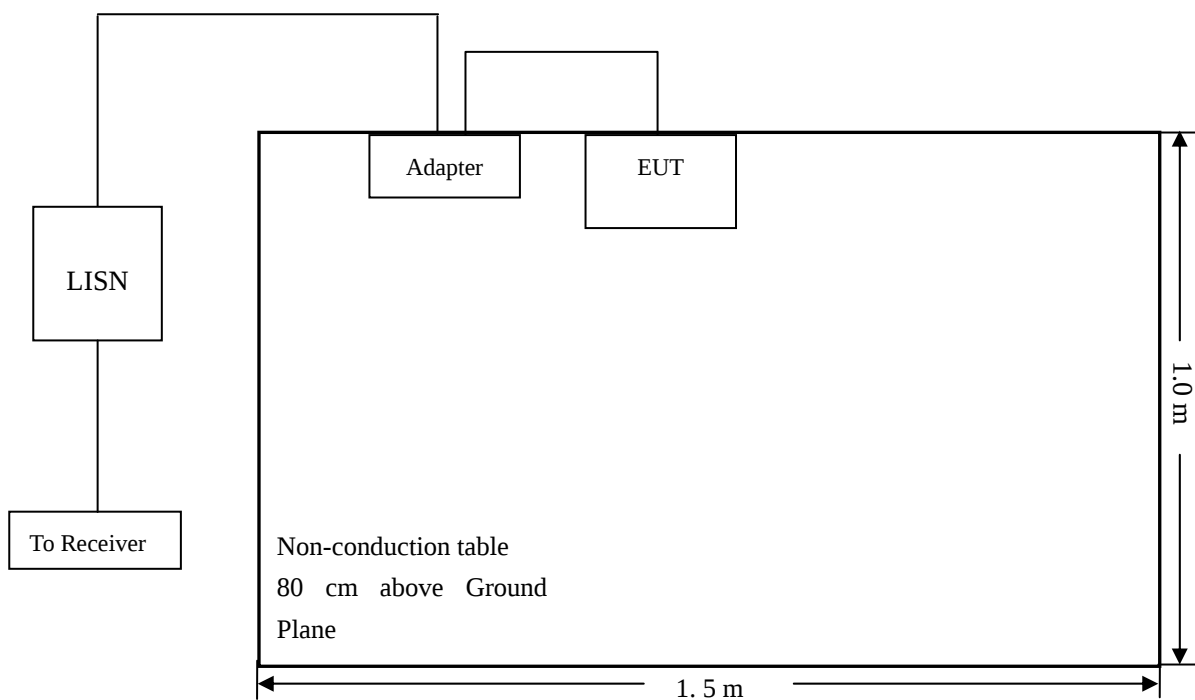

7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

7.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

7.5 Summary of Test Results/Plots

According to the data in section 7.6, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:


-5.42 dB at 26.0020 MHz in the Neutral mode, peak detector, 0.15-30MHz

7.6 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: Netatmo Weather Station
Tested Model: NWS03
Operating Condition: Transmitting
Comment: AC120V/60Hz, Adapter DC 5V

Test Specification: Neutral

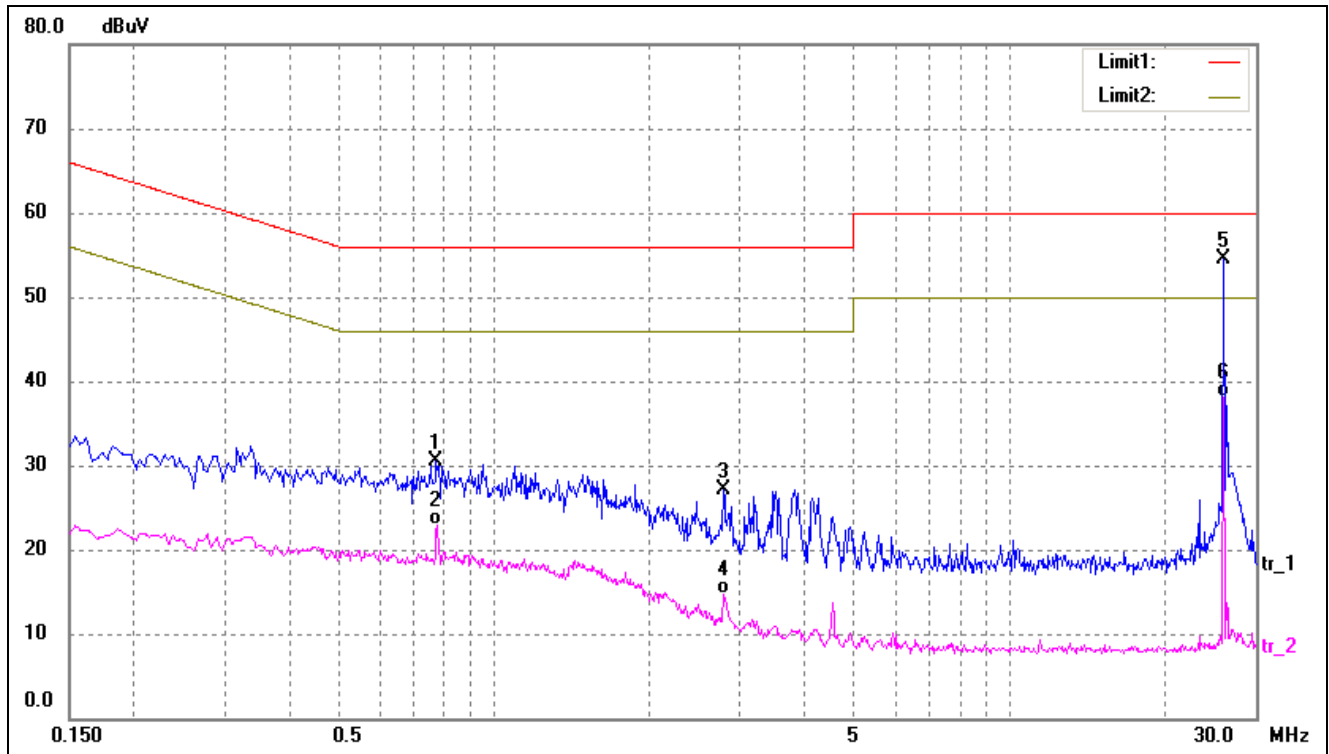

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.7740	20.87	9.63	30.50	56.00	-25.50	peak
2	0.7780	13.35	9.63	22.98	46.00	-23.02	AVG
3	2.7900	17.18	9.93	27.11	56.00	-28.89	peak
4	2.7900	4.77	9.93	14.70	46.00	-31.30	AVG
5*	26.0020	44.03	10.55	54.58	60.00	-5.42	peak
6	26.0020	27.64	10.55	38.19	50.00	-11.81	AVG

Test Specification: Line

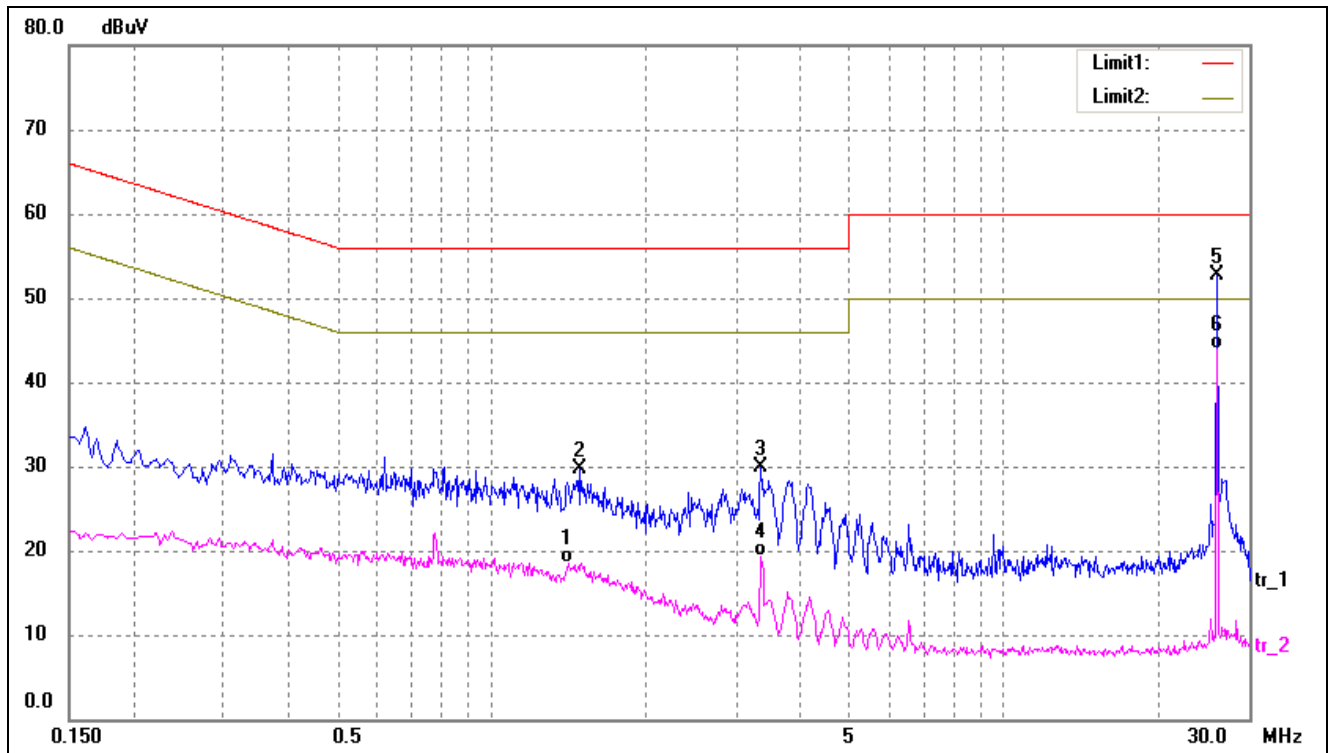

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	1.4180	8.72	9.74	18.46	46.00	-27.54	AVG
2	1.4820	19.97	9.75	29.72	56.00	-26.28	peak
3	3.3620	19.88	10.01	29.89	56.00	-26.11	peak
4	3.3620	9.21	10.01	19.22	46.00	-26.78	AVG
5	26.0020	42.12	10.55	52.67	60.00	-7.33	peak
6*	26.0020	33.35	10.55	43.90	50.00	-6.10	AVG

***** END OF REPORT *****