

# TEST REPORT FROM RADIO FREQUENCY INVESTIGATION LTD.

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997  
(Intentional Radiators)  
Subpart C. Section 15.231

**Test Report Serial No:**  
RFI/EMCB1/RP38788A

|                                                                                                                                                                                  |                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>This Test Report Is Issued Under The Authority Of Brian Watson Technical Director:</b><br> | <b>Checked By:</b><br> |
| <b>Tested By:</b><br>                                                                         | <b>Release Version No: PDF01</b>                                                                           |
| <b>Issue Date: 8 June 1999</b>                                                                                                                                                   | <b>Test Date: 8 April 1999 to 23 April 1999</b>                                                            |

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields. Furthermore, the date of creation must match the issue date stated above.  
This report may be copied in full.

**RADIO FREQUENCY INVESTIGATION LTD.**

**EMC Department**

**Test Of: Basys Technology Ltd.  
418MHz PAT**

**To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231**

**TEST REPORT**

**S.No: RFI/EMCB1/RP38788A**

**Page 2 of 34**

**Issue Date: 8 June 1999**

---

This page has been left intentionally blank.

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## Table of Contents

|                                                         |    |
|---------------------------------------------------------|----|
| 1. Client Information .....                             | 4  |
| 2. Equipment Under Test (EUT) .....                     | 5  |
| 3. Test Specification, Methods And Procedures .....     | 7  |
| 4. Deviations From The Test Specification .....         | 8  |
| 5. Operation Of The EUT During Testing .....            | 9  |
| 6. Summary Of Test Results .....                        | 10 |
| 7. Measurements, Examinations And Derived Results ..... | 11 |
| 8. Measurement Uncertainty .....                        | 21 |
| Appendix 1. Test Equipment Used .....                   | 22 |
| Appendix 2. Measurement Methods .....                   | 23 |
| Appendix 3. Test Configuration Drawings .....           | 27 |
| Appendix 4. Graphical Test Results .....                | 30 |
| Appendix 5. Photographs of EUT .....                    | 33 |

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## 1. Client Information

|                      |                                                |
|----------------------|------------------------------------------------|
| <b>Company Name:</b> | Basys Technology Ltd                           |
| <b>Address:</b>      | Mumby Road<br>Gosport<br>Hampshire<br>PO12 1AF |
| <b>Contact Name:</b> | Mr S Grant                                     |

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **2. Equipment Under Test (EUT)**

The client has supplied the following information (with the exception of the Date of Receipt):

### **2.1. Identification Of Equipment Under Test (EUT)**

|                             |                                   |
|-----------------------------|-----------------------------------|
| Brand Name:                 | Basys Technology Ltd              |
| Model Name or Number:       | 418MHz PAT                        |
| Unique Type Identification: | 63-20-36                          |
| Serial Number:              | None stated by client             |
| Country of Manufacture:     | UK                                |
| FCC ID Number:              | Awaiting Certification by the FCC |
| Date of Receipt:            | 4 May 1999                        |

|                             |                                                    |
|-----------------------------|----------------------------------------------------|
| Brand Name:                 | Basys Technology Ltd                               |
| Model Name or Number:       | 418MHz PAT (Modified unit for continuous transmit) |
| Unique Type Identification: | 63-20-36                                           |
| Serial Number:              | None stated by client                              |
| Country of Manufacture:     | UK                                                 |
| FCC ID Number:              | Awaiting Certification by the FCC                  |
| Date of Receipt:            | 4 May 1999                                         |

### **2.2. Description Of EUT**

The equipment under test was a radio based short to long range tagging system for the protection and monitoring of assets and the management of personnel movement.

### **2.3. Modifications Incorporated In EUT**

Two EUT samples were supplied for test purposes. The first device was left unmodified to enable bandwidth and timing measurement tests to be performed. The second device was modified to enable a continuous transmit unmodulated carrier which would enable electric field strength measurements to be performed.

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

#### **2.4. Additional Information Related To Testing**

|                                 |                                  |
|---------------------------------|----------------------------------|
| Power Supply Requirement:       | Internal battery supply of 3.0 V |
| Intended Operating Environment: | Commercial premises              |
| Weight:                         | 0.071 Kg                         |
| Dimensions:                     | 60 mm x 107 mm x 25 mm           |
| Interface Ports:                | None                             |

#### **2.5. Support Equipment**

No support equipment was used to exercise the EUT during testing.

---

**Test Of:** Basys Technology Ltd.  
418MHz PAT

**To:** F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

### **3. Test Specification, Methods And Procedures**

#### **3.1. Test Specification**

|                         |                                                                                                                                                                                       |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Reference:</b>       | FCC Part 15:1997 Subpart C. Section 15.231 (Intentional Radiators)                                                                                                                    |
| <b>Title:</b>           | Code of Federal Regulations, Part 15 (47CFR15)<br>Radio Frequency Devices: Digital Devices.                                                                                           |
| <b>Comments:</b>        | A description of the test facility used for this test is on file with, and has been accepted by, the Federal Communications Commission as required by Section 2.948 of Federal Rules. |
| <b>Purpose of Test:</b> | To determine whether the equipment complied with the requirements of the specification for the purposes of certification.                                                             |

#### **3.2. Methods And Procedures**

The methods and procedures used were as detailed in:

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (1992)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16 (1987)

Title: Specification for Radio Interference measuring apparatus and measurement methods.

#### **3.3. Definition Of Measurement Equipment**

The measurement equipment used complied with the requirements of the standards referenced in the Methods & Procedures section above. Appendix 1 contains a list of the test equipment used.

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

#### **4. Deviations From The Test Specification**

None.

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **5. Operation Of The EUT During Testing**

### **5.1. Operating Conditions**

The EUT was tested in a normal laboratory environment. During testing, the EUT was powered by an internal battery supply of 3.0 V.

### **5.2. Operating Modes**

The EUT was tested in the following operating modes:

- 1- Continuous Transmit Mode: The EUT was set to operate in a continuous transmit mode at 2 different output levels (high and low). When the EUT was set for high power, this simulated both 'shock' and 'tamper' modes. When the EUT was set for low power, this simulated the 'routine report' mode. Continuous transmit modes were enabled to allow accurate field strength measurements to be performed.
- 2- Idle Mode: The EUT was set to operate in an idle condition, with no alarm condition set.
- 3- Normal Operating Mode: The EUT was set to operate as intended, to allow bandwidth and timing measurements to be performed in each operating condition.

### **5.3. Configuration And Peripherals**

Throughout testing, the EUT was configured as a standalone device.

The reason for choosing this configuration was that it was defined by the client as being likely to be the worst case with regards EMC.

---

**Test Of: Basys Technology Ltd.  
418MHz PAT****To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231**

---

## **6. Summary Of Test Results**

### **6.1. Radiated Emissions**

| <b>Range Of Measurements</b>                  | <b>Specification Reference</b>              | <b>Compliance Status</b> |
|-----------------------------------------------|---------------------------------------------|--------------------------|
| Electric Field Strength,<br>30 MHz to 5.0 GHz | Section 15 of C.F.R. 47: 1997 Clause 15.231 | Complied                 |
| Occupied Bandwidth                            | Section 15 of C.F.R. 47: 1997 Clause 15.231 | Complied                 |
| Transmit Operation Time                       | Section 15 of C.F.R. 47: 1997 Clause 15.231 | Complied                 |

### **6.2. Location Of Tests**

All the measurements described in this report were performed at the premises of Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire. RG26 5RQ. England..

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **7. Measurements, Examinations And Derived Results**

### **7.1. General Comments**

7.1.1. Tests for radiated emissions were performed in 4 operating modes as stated in section 5.2 of this test report. This section contains test results only. Details of the test methods and procedures can be found in Appendix 2 of this report.

7.1.2. The measurement uncertainties stated were calculated in accordance with the requirements of NAMAS Document NIS 81 with a confidence level of 95%. Please refer to Section 8 for details of measurement uncertainties.

7.1.3. As the EUT was powered only from an internal 3V battery, no conducted AC emissions measurements were applicable.

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **7.2. Test Results For Radiated Emissions: Continuous Transmit**

### **7.2.1. Electric Field Strength Measurements: Fundamental Frequency**

7.2.1.1. The client has stated that the fundamental frequency of the EUT is 418 MHz.

7.2.1.2. Electric field strength measurements were performed with the EUT operated in both high and low power modes as stated in section 5.2 of this test report.

7.2.1.3. For high power operation, radiated emission limits stated in section 15.231 (b) were followed: Field strength limit for the fundamental is 3750  $\mu\text{V/m}$  at 260 MHz rising linearly to 12500  $\mu\text{V/m}$  at 470 MHz. Therefore this gives a limit at 418 MHz of 10351.4  $\mu\text{V/m}$ . This level equates to 80.3 dB $\mu\text{V/m}$ . This limit is specified using an Average detector at a test distance of 3m.

7.2.1.4. For low power operation, radiated emission limits stated in section 15.231 (e) were followed: Field strength limit for the fundamental is 1500  $\mu\text{V/m}$  at 260 MHz rising linearly to 5000  $\mu\text{V/m}$  at 470 MHz. Therefore this gives a limit at 418 MHz of 4133.4  $\mu\text{V/m}$ . This level equates to 72.3 dB $\mu\text{V/m}$ . This limit is specified using an Average detector at a test distance of 3m.

7.2.1.5. Plots of the initial scans can be found in Appendix 4.

7.2.1.6. The following table lists frequencies at which emissions were measured using an Average detector (results incorporate antenna factors and cable losses).

#### **High Power**

| Frequency (MHz) | Ant. Pol. | Average Level (dB $\mu\text{V/m}$ ) | Average Limit (dB $\mu\text{V/m}$ ) | Margin (dB) | Result   |
|-----------------|-----------|-------------------------------------|-------------------------------------|-------------|----------|
| 417.994         | Vert      | 73.8                                | 80.3                                | 6.5         | Complied |

#### **Low Power**

| Frequency (MHz) | Ant. Pol. | Average Level (dB $\mu\text{V/m}$ ) | Average Limit (dB $\mu\text{V/m}$ ) | Margin (dB) | Result   |
|-----------------|-----------|-------------------------------------|-------------------------------------|-------------|----------|
| 418.007         | Vert      | 71.2                                | 72.3                                | 1.1         | Complied |

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

### **7.3. Test Results For Radiated Emissions: Continuous Transmit**

#### **7.3.1. Electric Field Strength Measurements (30 to 1000 MHz)**

7.3.1.1. The client has stated that the highest clock frequency for the EUT was 418 MHz. Therefore tests were performed up to 5000 MHz.

7.3.1.2. Radiated emission spurious limits stated in section 15.231 (b) and 15.231 (e) shall not exceed a level of 20dB below the fundamental carrier limit, or the limit specified in section 15.209, whichever is the higher limit. If the frequency of the spurious emission is located in one of the Restricted Bands of operation stated in section 15.205, then the level of emissions shall not exceed the limit specified in section 15.209.

7.3.1.3. Plots of the initial scans can be found in Appendix 4.

7.3.1.4. Final radiated emission measurements were performed on frequencies found to be within 20dB of the reference limit line.

7.3.1.5. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector (results incorporate antenna factors and cable losses).

#### **High Power**

| Frequency (MHz) | Ant. Pol. | Quasi-Peak Level (dBmV/m) | Quasi-Peak Limit (dBmV/m) | Margin (dB) | Result   |
|-----------------|-----------|---------------------------|---------------------------|-------------|----------|
| 836.010         | Horiz.    | 39.5                      | 60.3                      | 20.8        | Complied |

#### **Low Power**

| Frequency (MHz) | Ant. Pol. | Quasi-Peak Level (dBmV/m) | Quasi-Peak Limit (dBmV/m) | Margin (dB) | Result   |
|-----------------|-----------|---------------------------|---------------------------|-------------|----------|
| 836.010         | Horiz.    | 36.7                      | 52.3                      | 15.6        | Complied |

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

#### **7.4. Test Results For Radiated Emissions: Idle Mode**

##### **7.4.1. Electric Field Strength Measurements (30 to 1000 MHz)**

7.4.1.1. When the EUT was set to operate in idle mode, all spurious emissions were greater than 20dB from the reference limit line and therefore no final measurements were performed.

7.4.1.2. Plots of the initial scans can be found in Appendix 4.

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **7.5. Test Results For Radiated Emissions: Continuous Transmit**

### **7.5.1. Electric Field Strength Measurements (1000 to 5000 MHz)**

7.5.1.1. The client has stated that the highest clock frequency for the EUT was 418 MHz. Therefore tests were performed up to 5000 MHz.

7.5.1.2. Radiated emission spurious limits stated in section 15.231 (b) and 15.231 (e) shall not exceed a level of 20dB below the fundamental carrier limit, or the limit specified in section 15.209, whichever is the higher limit. If the frequency of the spurious emission is located in one of the Restricted Bands of operation stated in section 15.205, then the level of emissions shall not exceed the limit specified in section 15.209.

7.5.1.3. Plots of the initial scans can be found in Appendix 4.

7.5.1.4. Final radiated emission measurements were performed on frequencies found to be within 10dB of the reference limit line.

7.5.1.5. The following table lists frequencies at which emissions were measured using an Average and Peak detector.

#### **High Power: Average Levels**

| Frequency (GHz) | Antenna Polarity (H/V) | Average Detector level (dBmV) | Antenna factor (dB) | Cable loss (dB) | Actual Average Level (dBmV/m) | Average Limit (dBmV/m) | Average Margin (dB) | Result   |
|-----------------|------------------------|-------------------------------|---------------------|-----------------|-------------------------------|------------------------|---------------------|----------|
| 1.25396         | Vert.                  | 20.5                          | 21.7                | 0.8             | 43.0                          | 60.3                   | 17.3                | Complied |
| 1.92000         | Vert                   | 27.5                          | 22.2                | 0.9             | 50.6                          | 60.3                   | 9.7                 | Complied |

#### **High Power: Peak Levels**

| Frequency (GHz) | Antenna Polarity (H/V) | Peak Detector level (dBmV) | Antenna factor (dB) | Cable loss (dB) | Actual Peak Level (dBmV/m) | Peak Limit (dBmV/m) | Peak Margin (dB) | Result   |
|-----------------|------------------------|----------------------------|---------------------|-----------------|----------------------------|---------------------|------------------|----------|
| 1.25396         | Vert.                  | 24.2                       | 21.7                | 0.8             | 46.7                       | 80.3                | 33.6             | Complied |
| 1.92000         | Vert                   | 29.4                       | 22.2                | 0.9             | 52.5                       | 80.3                | 27.8             | Complied |

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

**Results (continued)****Low Power: Average Levels**

| Frequency (GHz) | Antenna Polarity (H/V) | Average Detector level (dBmV) | Antenna factor (dB) | Cable loss (dB) | Actual Average Level (dBmV/m) | Average Limit (dBmV/m) | Average Margin (dB) | Result   |
|-----------------|------------------------|-------------------------------|---------------------|-----------------|-------------------------------|------------------------|---------------------|----------|
| 1.25396         | Vert.                  | 5.8                           | 21.7                | 0.8             | 28.3                          | 52.3                   | 24.0                | Complied |
| 1.92000         | Vert                   | 9.3                           | 22.2                | 0.9             | 31.9                          | 52.3                   | 20.4                | Complied |

**Low Power: Peak Levels**

| Frequency (GHz) | Antenna Polarity (H/V) | Peak Detector level (dBmV) | Antenna factor (dB) | Cable loss (dB) | Actual Peak Level (dBmV/m) | Peak Limit (dBmV/m) | Peak Margin (dB) | Result   |
|-----------------|------------------------|----------------------------|---------------------|-----------------|----------------------------|---------------------|------------------|----------|
| 1.25396         | Vert.                  | 15.0                       | 21.7                | 0.8             | 37.5                       | 72.3                | 34.8             | Complied |
| 1.92000         | Vert                   | 19.8                       | 22.2                | 0.9             | 42.9                       | 72.3                | 29.4             | Complied |

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **7.6. Test Results For Radiated Emissions: Idle Mode**

### **7.6.1. Electric Field Strength Measurements (1000 to 5000 MHz)**

7.6.1.1. When the EUT was set to operate in idle mode, all spurious emissions were greater than 20dB from the reference limit line and therefore no final measurements were performed.

7.6.1.2. Plots of the initial scans can be found in Appendix 4.

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

### **7.7. Fundamental Bandwidth Measurement.**

7.7.1. Section 15.231 (c) states that the bandwidth of the emission must not exceed 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz. The bandwidth is determined at the points 20dB down from the modulated carrier.

7.7.2. Measurements on the fundamental frequency (418 MHz) were measured with a resolution bandwidth of 120 kHz with the EUT operated in both of the alarm conditions, as stated in section 5.2.

7.7.3. The operating frequency of the EUT is 418 MHz, and therefore the allowable bandwidth for this EUT is 1.045 MHz.

7.7.4. Scans showing the fundamental bandwidth measurements can be seen in Appendix 4 of this test report.

### **Fundamental Bandwidth**

| EUT Operating Mode                            | Bandwidth (MHz) | Result   |
|-----------------------------------------------|-----------------|----------|
| Shock Mode (Move Mode) (modulated)            | 0.262           | Complied |
| Tamper Mode (modulated)                       | 0.257           | Complied |
| Continuous Transmit (Unmodulated). High Power | 0.262           | Complied |
| Continuous Transmit (Unmodulated). Low Power  | 0.269           | Complied |

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **7.8. Transmitter Operating Time.**

### **7.8.1. Tamper and Shock Mode.**

7.8.1.1. Section 15.231 states that a transmitter on/off time measurement is required to be performed. The transmitter used in this device is automatically activated and deactivated within a designated time frame. Therefore, as stated in section 15.231 (a(2)), this transmitter must cease transmission within 5 seconds after activation.

7.8.1.2. Once the transmitter has automatically activated and deactivated, the EUT returns to the standby condition.

7.8.1.3. A plot showing compliance with the above can be seen in Appendix 4 of this test report.

| Mode of Operation | Operation Time in Seconds |
|-------------------|---------------------------|
| Shock Mode        | 4.422                     |
| Tamper Mode       | 4.400                     |

**Note-** When in shock mode, if the EUT is continuously triggered the alarm condition will be permanently activated.

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **7.9. Transmitter Operating Time. (continued)**

### **7.9.1. Routine Report Mode.**

7.9.1.1. When the EUT is operated in the routine report mode, the timing requirements of 15.231 (e) are applicable.

7.9.1.2. The client has stated that the 'routine report' transmission is effective for approximately 0.9 seconds, once every 60 minutes ( $\pm 10$  minutes).

7.9.1.3. Tests were performed to determine the EUT meet the requirements of section 15.231 (e). It is stated that each transmission must not be greater than 1 second and the silent period between transmissions shall be at least 30 times the duration of the transmission, but in no case less than 10 seconds.

7.9.1.4. Due to the very short transmission time of the EUT over a large period of time it was virtually impossible to show compliance with this specification. Therefore it was decided that as the client has specified that the EUT transmits only for 0.9 seconds this would be used as the basis for the test.

| Timing Requirement                            | Limit                                     | Result |
|-----------------------------------------------|-------------------------------------------|--------|
| Client specified Transmit on for 0.9 seconds. | 1.0 second                                | Pass   |
| Silent Period                                 | At Least 30 times Transmit.<br>27 seconds | Pass   |

The EUT was monitored for a period of 60 seconds, and during this time no transmission of the device was noted. Therefore the EUT is deemed to meet the requirements of the specification.

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **8. Measurement Uncertainty**

8.1. Company Policy, as based on the NAMAS Accreditation Standard, M10, paragraph 12.11 (o), states that Test Reports shall include estimated uncertainty of the calibration or test result (this information need only appear in test reports and test certificates where it is relevant to the validity or application of the test result, where a client's instructions so require or where uncertainty affects compliance to a specification or limit).

8.2. The global uncertainties have been calculated in accordance with NAMAS NIS 81 (Edition 1, May 1994) as follows:

| Measurement Type   | Range              | Confidence Level | Calculated Uncertainty |
|--------------------|--------------------|------------------|------------------------|
| Radiated Emissions | 30 MHz to 1000 MHz | 95%              | +/- 4.9 dB             |
| Radiated Emissions | 1 GHz to 5 GHz     | 95%              | +/- 4.4 dB             |

8.3. Measurement uncertainties have been applied in accordance with NAMAS document NIS 81 (edition 1, May 1994), and in the absence of any specification criteria, guidance, or code of practice, compliance has been judged on the basis of shared risk.

8.4. In the case of emissions tests, the measured value of the disturbance from the product sample shall be compared directly with the limits. If the measured value is equal to or less than the limit the product is deemed to pass the test.

8.5. In the case of immunity tests, the equipment is deemed to pass the test if it fulfils the stated performance criteria at the required or a higher severity level. The measurement uncertainty has been taken into account in the calibration procedures stated in the relevant basic standard.

8.6. The methods used to calculate the above uncertainties are in line with those used for calibration laboratories contained in NAMAS document NIS 3003 Edition 8 "The Expression of Uncertainty and Confidence in Measurement" May 1995, which align with international recommendations "Guide to the Expression of Uncertainty in Measurement" ISO/IEC/OIML/BIPM (Prepared by ISO/TAG 4: January 1993).

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **Appendix 1. Test Equipment Used**

| Instrument                                                                               | Manufacturer | Model                | RFI No. |
|------------------------------------------------------------------------------------------|--------------|----------------------|---------|
| <b>Radiated Electric Field Screened Room Scans / Occupied Bandwidth / Operating Time</b> |              |                      |         |
| EMI Receiver                                                                             | R & S        | ESBI                 | M090    |
| Bilog Antenna                                                                            | Chase        | CBL6112B             | A1037   |
| 1 to 2 GHz Horn                                                                          | Eaton        | 9188-2               | A028    |
| 2 to 4 GHz Horn                                                                          | Eaton        | 91889-2              | A031    |
| 4 to 6 GHz Horn                                                                          | Flann        | 12240-20             | A428    |
| Cable                                                                                    | Rosenberger  | UFA210A-1-1181-70x70 | C344    |
| <b>Open Area Test Site</b>                                                               |              |                      |         |
| EMI Receiver                                                                             | R & S        | ESBI                 | M090    |
| Bilog Antenna                                                                            | Chase        | CBL6112              | A259    |
| 1 to 2 GHz Horn                                                                          | Eaton        | 9188-2               | A028    |
| Test Receiver                                                                            | R & S        | ESVP                 | M002    |
| Spectrum Monitor                                                                         | R & S        | EZM                  | M003    |
| Cable                                                                                    | Rosenberger  | UFA210A-1-1181-70x70 | C344    |

**NB** In accordance with NAMAS requirements, all the measurement equipment is on a calibration schedule.

---

**Test Of:** Basys Technology Ltd.  
418MHz PAT

**To:** F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **Appendix 2. Measurement Methods**

### **A2.1. Radiated Emissions: FCC Part 15**

A2.1.1. Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

A2.1.2. Initial measurements covering the entire measurement band in the form of swept scans in a shielded enclosure were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which the EUT should be re-measured in full on the open area test site. In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

A2.1.3. The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. Following the initial scans, graphs were produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested on the open area test site, at the appropriate distance, using a measuring receivers with a Quasi-Peak or Average detector (below 1000 MHz) where applicable, for measurements above 1000 MHz average and peak detectors were used.

A2.1.4. For the main (final) measurements the EUT was arranged on a non-conducting table on an open area test site, as detailed in the specification.

A2.1.5. All measurements on the open area test site were performed using broadband antennas.

A2.1.6. On the open area test site, at each frequency where a signal was found, the levels were maximised by initially rotating the turntable through 360°. For frequencies below 1000 MHz, the antenna was varied in height between 1 m and 4 m. For frequencies above 1000 MHz, the antenna was fixed at a height of 1.5m. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

A2.1.7. The test equipment settings for radiated emissions measurements were as follows:

| Receiver Function | Initial Scan<br>Below 1GHz | Final Measurements<br>Below 1GHz |
|-------------------|----------------------------|----------------------------------|
| Detector Type:    | Peak                       | Quasi-Peak (CISPR) or Average    |
| Mode:             | Max Hold                   | Not applicable                   |
| Bandwidth:        | 100 kHz                    | 120 kHz                          |
| Amplitude Range:  | 60 dB                      | 20 dB                            |
| Measurement Time: | Not applicable             | > 1 s                            |
| Observation Time: | Not applicable             | > 15 s                           |
| Step Size:        | Continuous sweep           | Not applicable                   |
| Sweep Time:       | Coupled                    | Not applicable                   |

| Receiver Function | Initial Scan<br>Above 1 GHz | Final Measurements<br>Above 1 GHz |
|-------------------|-----------------------------|-----------------------------------|
| Detector Type:    | Peak                        | Peak/Average                      |
| Mode:             | Max Hold                    | Not applicable                    |
| Bandwidth:        | 1 MHz                       | 1 MHz                             |
| Amplitude Range:  | 60 dB                       | 20 dB (typical)                   |
| Measurement Time: | Not applicable              | > 1 s                             |
| Observation Time: | Not applicable              | > 15 s                            |
| Step Size:        | Continuous sweep            | Not applicable                    |
| Sweep Time:       | Coupled                     | Not applicable                    |

Spurious radiated emissions were measured against the limits specified in Section 15.209 of C.F.R. 47 Part 15 Subpart C - Intentional Radiators OR those of Section 15.231 depending upon whichever permitted a higher field strength. Unless otherwise stated, the limits given in this report correspond to those specified in Section 15.209 as these are the most stringent.

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

## **A2.2. Occupied Bandwidth**

A2.2.1. Measurements were performed to determine the occupied bandwidth of the fundamental frequency of the EUT.

A2.2.2. The EUT was set to operate in each of the operating modes detailed in section 5.2 of this test report, and also set to a continuous transmit unmodulated carrier.

A2.2.3. A peak, max hold scan was produced of the emission, and the bandwidth was determined at the points 20dB down from the peak level of the transmission.

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

### **A2.3. Transmitter Operation Time**

A2.3.1. Measurements were performed to determine the transmitter operation time as specified in section 15.231(a(2)) and the automatic time limiting as specified in section 15.231 (e).

A2.3.2. For measurements concerning the transmitter operation time, the EUT was set to operate in a normal mode of operation at all times. The EUT was activated in each alarm condition and a scan of the time incurred was produced to show the deactivation time of the transmission.

A2.3.3. For measurements concerning the automatic time limiting, the EUT was set to operate in a normal mode of operation at all times. For this measurement the EUT was set to idle mode. The test receiver was set to display any spurious emission transmitted by the EUT. A scan of any spurious transmissions was produced.

---

### **Appendix 3. Test Configuration Drawings**


This appendix contains the following drawings:

| Drawing Reference Number  | Title                                                                                        |
|---------------------------|----------------------------------------------------------------------------------------------|
| DRG\38788JD01ETF01\EMIRAD | Test configuration for measurement of radiated emissions                                     |
| DRG\38788JD01ETF01\001    | Schematic diagram of the EUT, support equipment and interconnecting cables used for the test |

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

DRG\38788JD01ETF01\EMIRAD

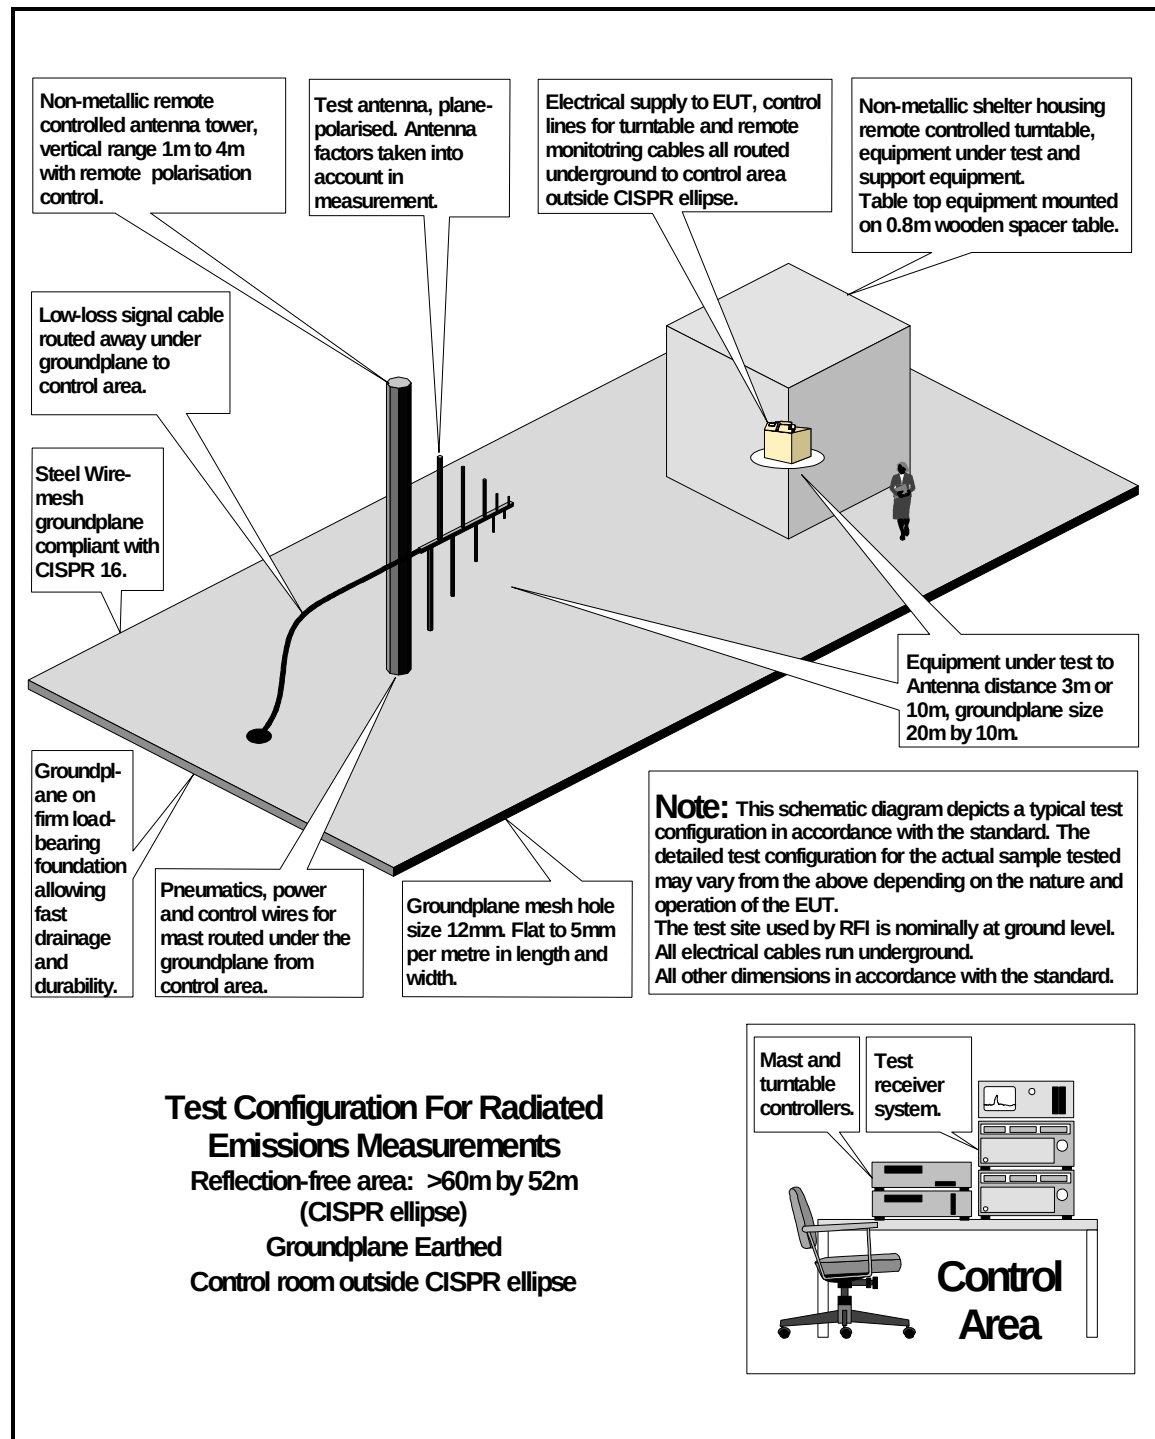


Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

DRG\38788JD01ETF01\001

### Configuration of EUT and Local Support Equipment



EUT

Configuration of Remote Support Equipment

---

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

## **Appendix 4. Graphical Test Results**

This appendix contains the following graphs:

| <b>Graph Reference Number</b> | <b>Title</b>                                                                                      |
|-------------------------------|---------------------------------------------------------------------------------------------------|
| GPH\38788JD01\001             | Scan of Radiated Electric Field: (30 to 1000 MHz).<br>Continuous Transmit. High Power Transmit.   |
| GPH\38788JD01\002             | Scan of Radiated Electric Field.(30 to 1000 MHz).<br>Continuous Transmit. Low Power Transmit.     |
| GPH\38788JD01\003             | Scan of Radiated Electric Field.(1000 to 2000 MHz).<br>Continuous Transmit. Low Power Transmit.   |
| GPH\38788JD01\004             | Scan of Radiated Electric Field: (1000 to 2000 MHz).<br>Continuous Transmit. High Power Transmit. |
| GPH\38788JD01\005             | Scan of Radiated Electric Field: (2000 to 4000 MHz).<br>Continuous Transmit. High Power Transmit. |
| GPH\38788JD01\006             | Scan of Radiated Electric Field.(2000 to 4000 MHz).<br>Continuous Transmit. Low Power Transmit.   |
| GPH\38788JD01\007             | Scan of Radiated Electric Field: (4000 to 5000 MHz).<br>Continuous Transmit. High Power Transmit. |
| GPH\38788JD01\008             | Scan of Radiated Electric Field.(4000 to 5000 MHz).<br>Continuous Transmit. Low Power Transmit.   |
| GPH\38788JD01\009             | Scan of Radiated Electric Field: (30 to 1000 MHz).<br>Idle Mode.                                  |
| GPH\38788JD01\010             | Scan of Radiated Electric Field: (2000 to 4000 MHz).<br>Idle Mode.                                |
| GPH\38788JD01\011             | Scan of Radiated Electric Field: (1000 to 2000 MHz).<br>Idle Mode.                                |
| GPH\38788JD01\012             | Scan of Radiated Electric Field: (4000 to 5000 MHz).<br>Idle Mode.                                |
| GPH\38788JD01\013             | Occupied Bandwidth. 418 MHz. Tamper Mode                                                          |
| GPH\38788JD01\013A            | Occupied Bandwidth. 418 MHz. Shock (Move) Mode                                                    |
| GPH\38788JD01\016             | Occupied Bandwidth. 418 MHz. High Power Transmit<br>Unmodulated Carrier                           |
| GPH\38788JD01\017             | Occupied Bandwidth. 418 MHz. Low Power Transmit<br>Unmodulated Carrier                            |

**Test Of: Basys Technology Ltd.  
418MHz PAT**

**To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231**

---

**Graphical Test Results (continued)**

| <b>Graph Reference Number</b> | <b>Title</b>                                                                                |
|-------------------------------|---------------------------------------------------------------------------------------------|
| GPH\38788JD01\022             | Periodic Measurements. 418 MHz. Transmit Operation Time. Tamper Mode.                       |
| GPH\38788JD01\023             | Periodic Measurements. 418 MHz. Transmit Operation Time. Shock (Move) Mode.                 |
| GPH\38788JD01\032             | Duration Measurements. 418 MHz. Routine Report Mode. Scan to show 15.231(e) is complied to. |

**These pages are not included in the total number of pages for this report.**

---

**RADIO FREQUENCY INVESTIGATION LTD.**

**EMC Department**

**Test Of: Basys Technology Ltd.  
418MHz PAT**

**To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231**

---

**TEST REPORT**

**S.No: RFI/EMCB1/RP38788A**

**Page 32 of 34**

**Issue Date: 8 June 1999**

This page has been left intentionally blank.

---




Date 08.Apr.'99 Time 10:40:59

Ref.Lvl 80.00 dBx

Marker 74.04 dBx  
417.8 MHz

Res.Bw 120 kHz [imp]  
TG.Lvl off  
CF.Stp 97.000 MHz

Vid.Bw 100 kHz  
RF.Att 0 dB  
Unit [dB $\mu$ V/m]

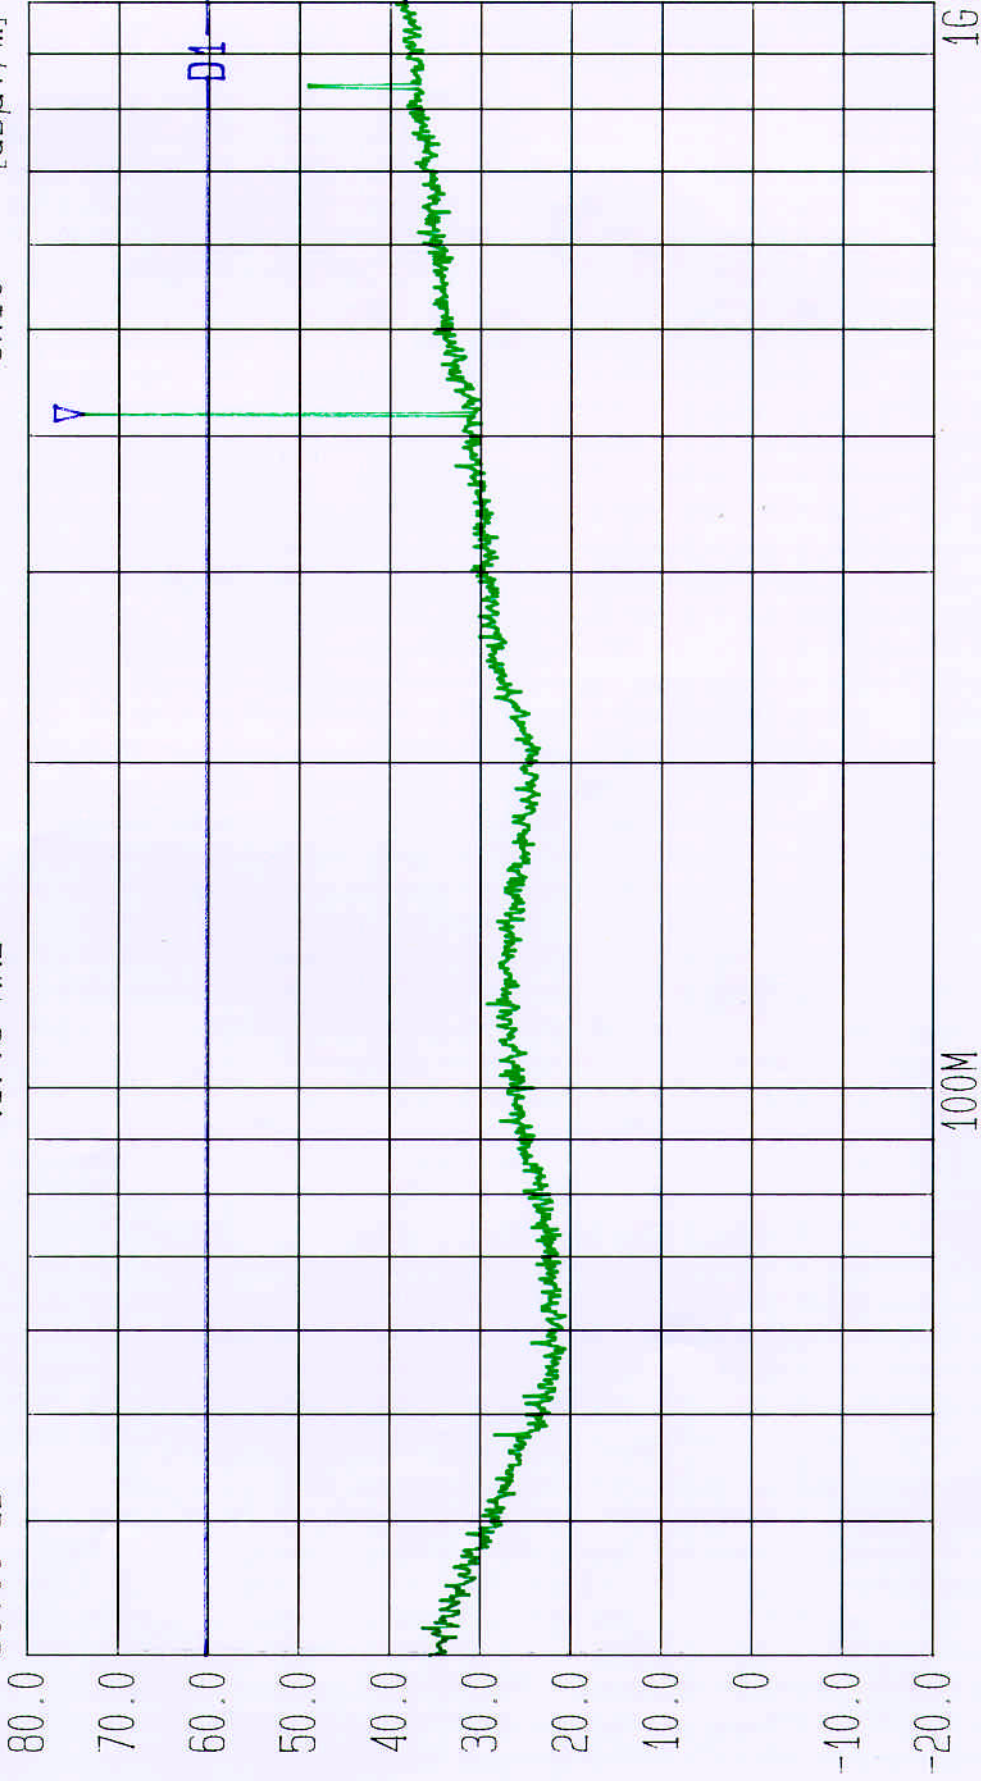

Start 30 MHz

Span 970 MHz

Center 173.2 MHz

Sweep 80 ms

Stop 1 GHz

Radiated. Tested By RFI for Basys Technology Ltd. EUT: High Power Tx. FCC Part 15:98  
Limit 15.231(b). Tx CW Mode at Full Power. GPH/38788/JD01/001



Date 08.Apr.'99 Time 10:54:01

Ref.Lvl 80.00 dB\*

Marker 73.17 dB\*

417.8 MHz

Res.Bw 120 kHz [imp]


TG.Lvl off

CF.Stp 97.000 MHz

Vid.Bw 100 kHz

RF.Att 0 dB

Unit [dBμV/m]

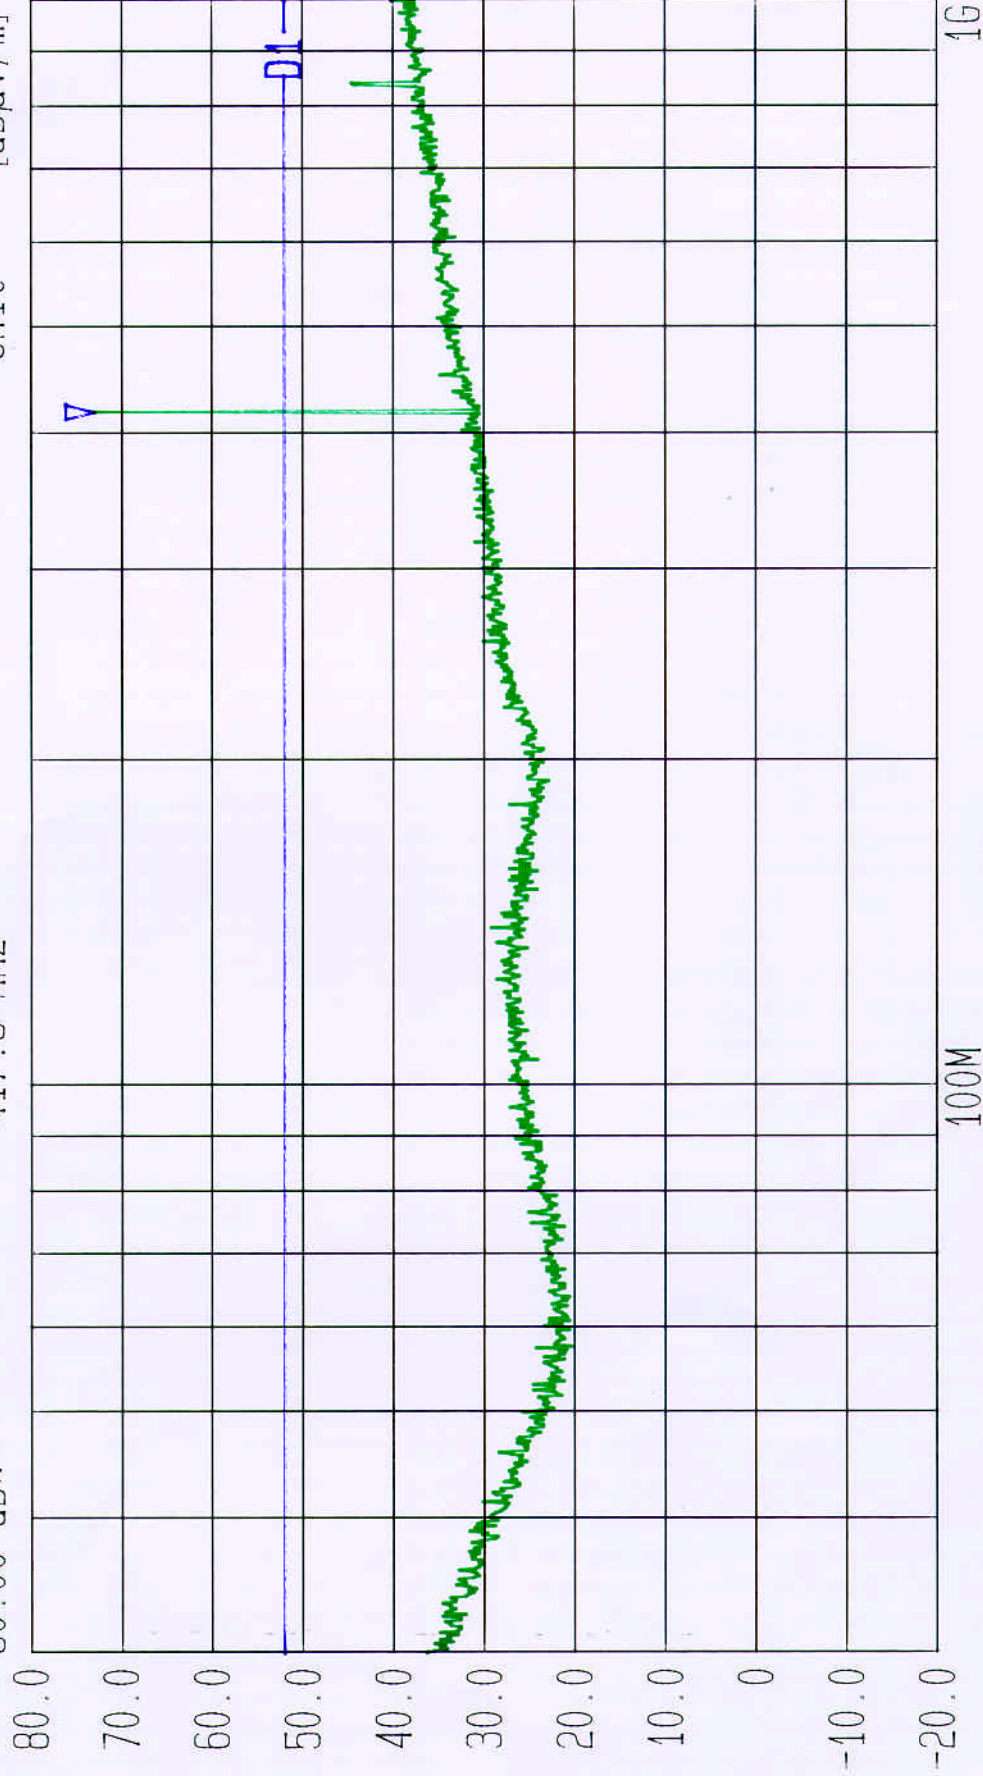

Start 30 MHz

Span 970 MHz

Center 173.2 MHz

Sweep 80 ms

Stop 1 GHz


Radiated. Tested By RFI for Basys Technology Ltd. EUT: Low Power Tx. FCC Part 15:98  
Limit 15.231(e). Tx CW Mode at Full Power. GPH/38788/JD01/002



Date 08.Apr.'99 Time 12:04:53

Ref.Lvl 70.00 dB\*  
Marker 46.92 dB\*  
1.6722 GHz

Res.Bw 1 MHz [imp]  
TG.Lvl off  
CF.Stp 100.000 MHz  
Vid.Bw 1 MHz  
RF.Att 0 dB  
Unit [dBμV/m]

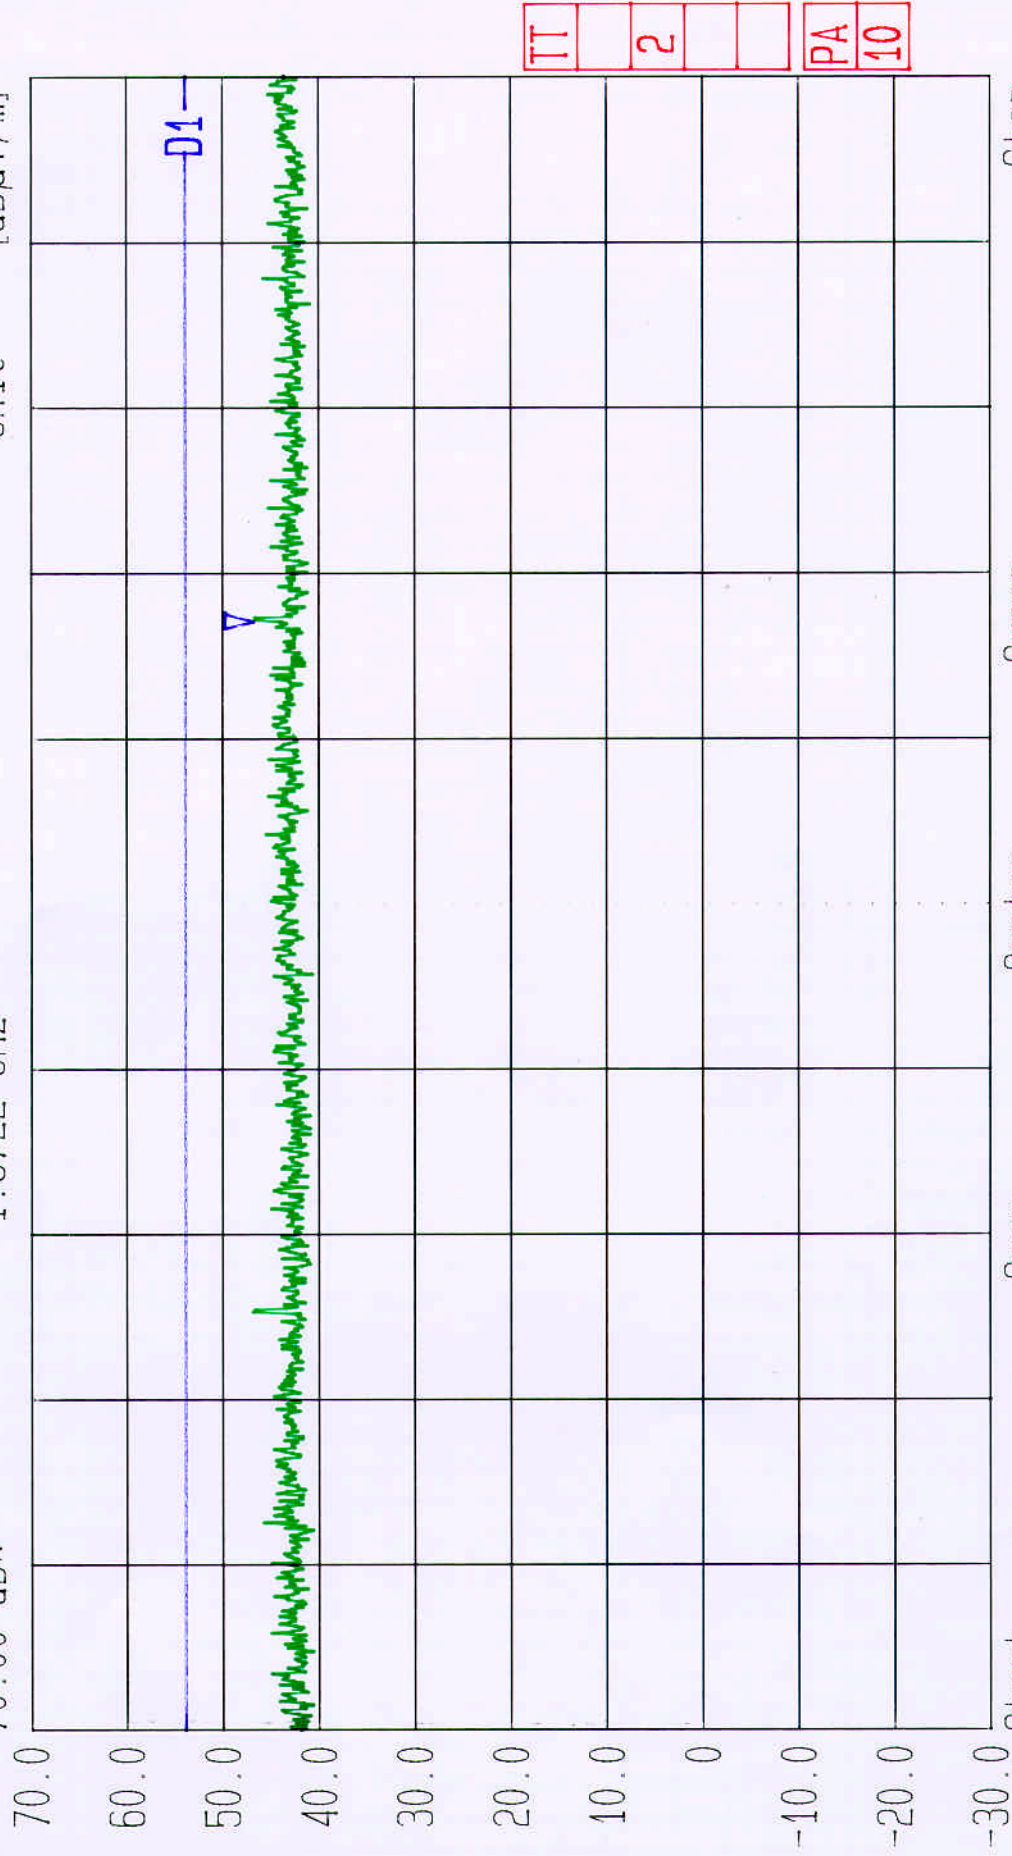

Radiated. Tested By RFI for Basys Technology Ltd. EUT: Low Power Tx. FCC Part 15:98  
Limit 15.231(e). Tx CW Mode at Full Power. GPH/38788/JD01/003



Date 08.Apr.'99 Time 12:17:33

Ref.Lvl

70.00 dB\*

Marker

56.88 dB\*

1.6722 GHz

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

off

100.000 MHz

Vid.Bw

1 MHz

RF.Att

0 dB

Unit [dBuV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

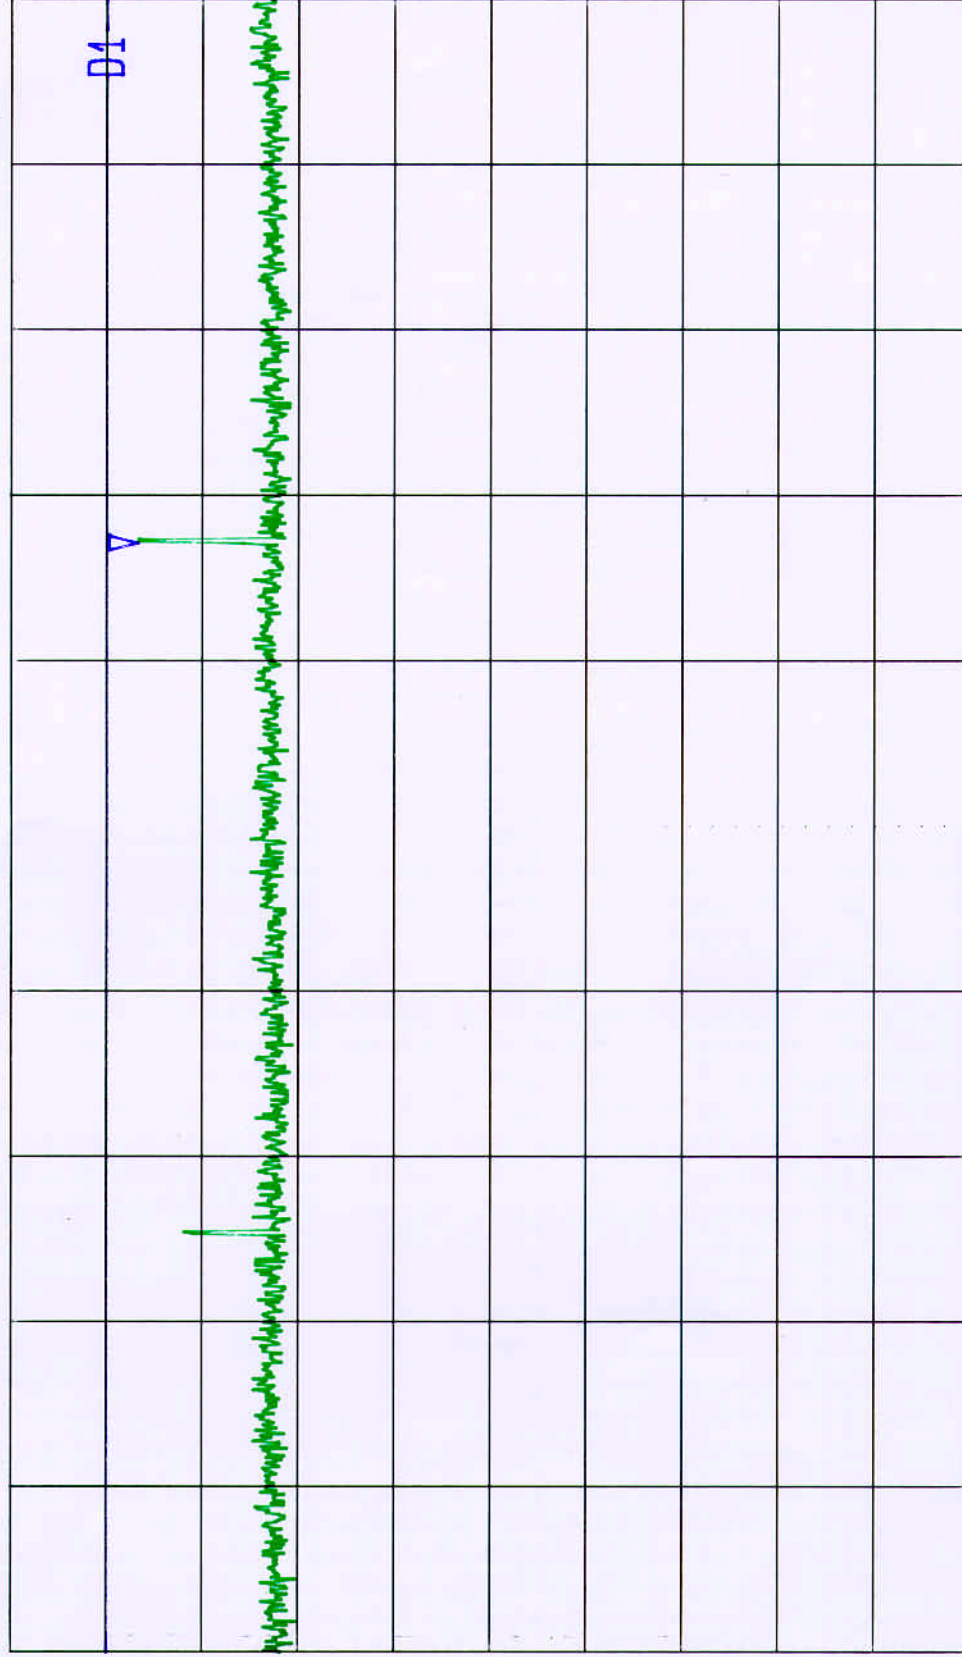

Start

1 GHz

Span

1 GHz

Center

1.5 GHz

Sweep

20 ms

Stop

2 GHz

Radiated. Tested By RFI for Basys Technology Ltd. EUT: High Power Tx. FCC Part 15:98  
Limit 15.231 (b). Tx CW Mode at Full Power. GPH/38788/JD01/004



Date 08.Apr.'99 Time 12:48:46

Ref.Lvl

70.00 dBx

Marker

44.64 dBx

2.0000 GHz

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

off

200.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz

0 dB

[dBuV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

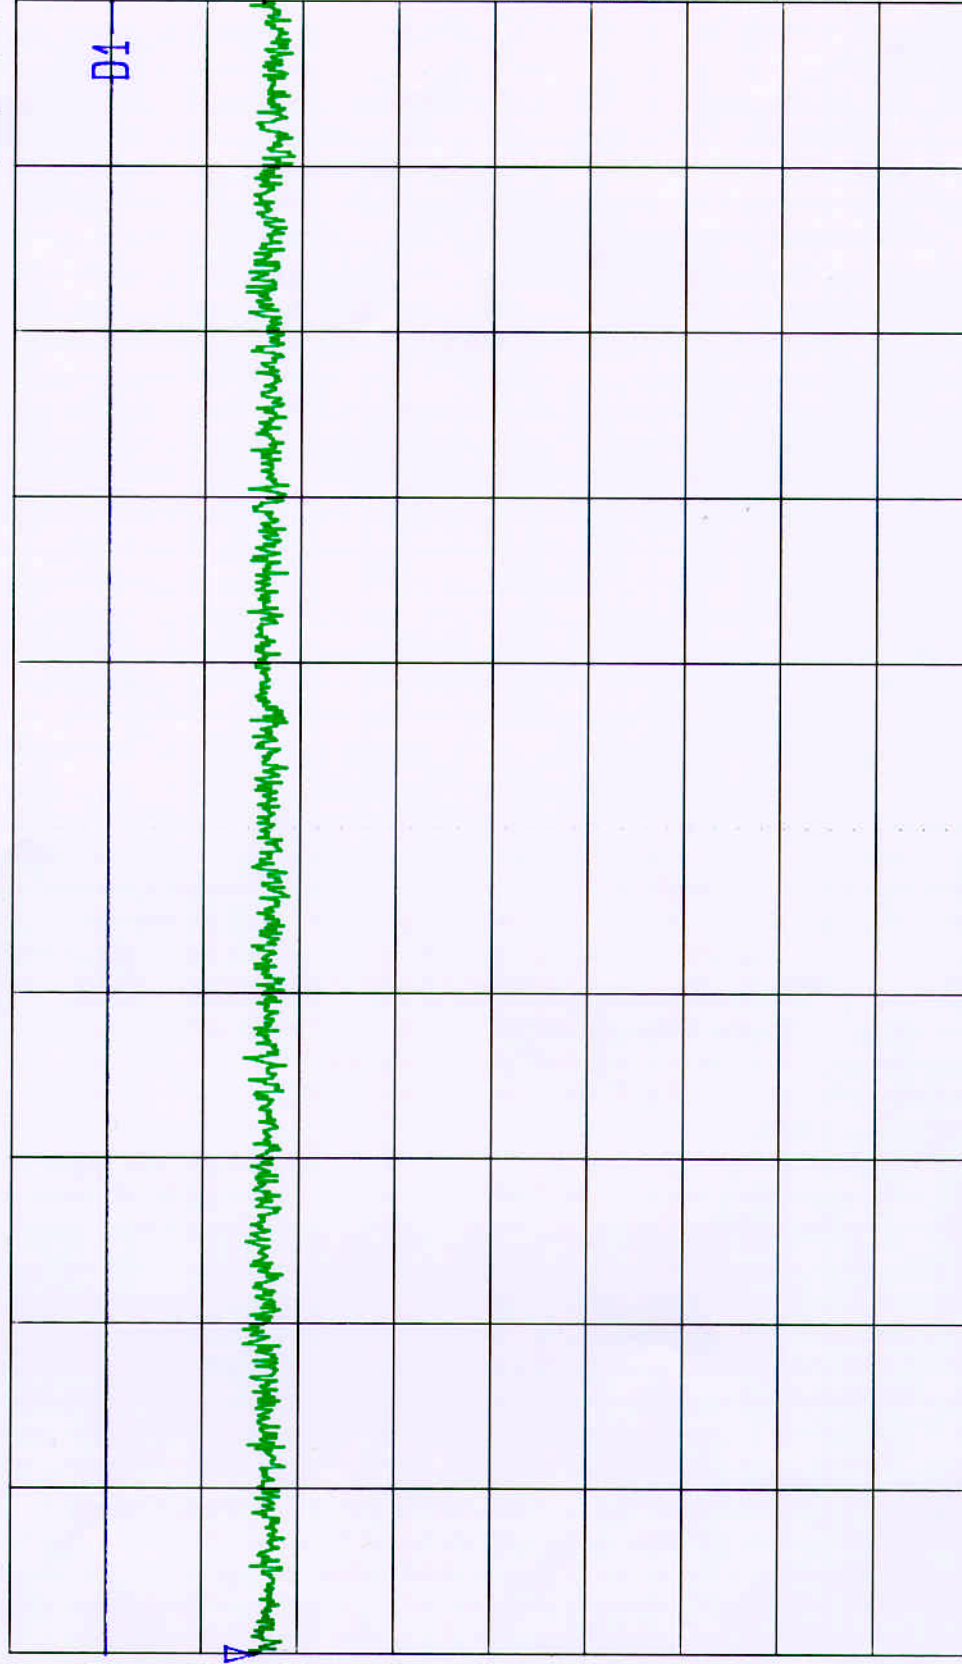

TT  
2  
PA  
10

Start  
2 GHz

Span  
2 GHz

Center  
3 GHz

Sweep  
20 ms

Stop  
4 GHz

Radiated. Tested By RFI for Basys Technology Ltd. EUT: High Power Tx. FCC Part 15:98  
Limit 15.231 (b). Tx CW Mode at Full Power. GPH/38788/JD01/005



Date 08.Apr.'99 Time 13:00:29

Ref.Lvl

Marker

46.03 dB\*

70.00 dB\*

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

off

200.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz

0 dB

[dB $\mu$ V/m]

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0

-10.0

-20.0

-30.0

Start

2 GHz

Span

2 GHz

Center

3 GHz

Sweep

20 ms

Stop

4 GHz

D1

V

TT

2

PA

10

Radiated. Tested By RFI for Basys Technology Ltd. EUT: Low Power Tx. FCC Part 15:98  
Limit 15.231 (e). Tx CW Mode at Full Power. GPH/38788/JD01/006



Date 08.Apr.'99 Time 13:08:04

Ref.Lvl

70.00 dB\*

Marker

51.09 dB\*

4.9955 GHz

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

off

100.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz

0 dB

[dBuV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

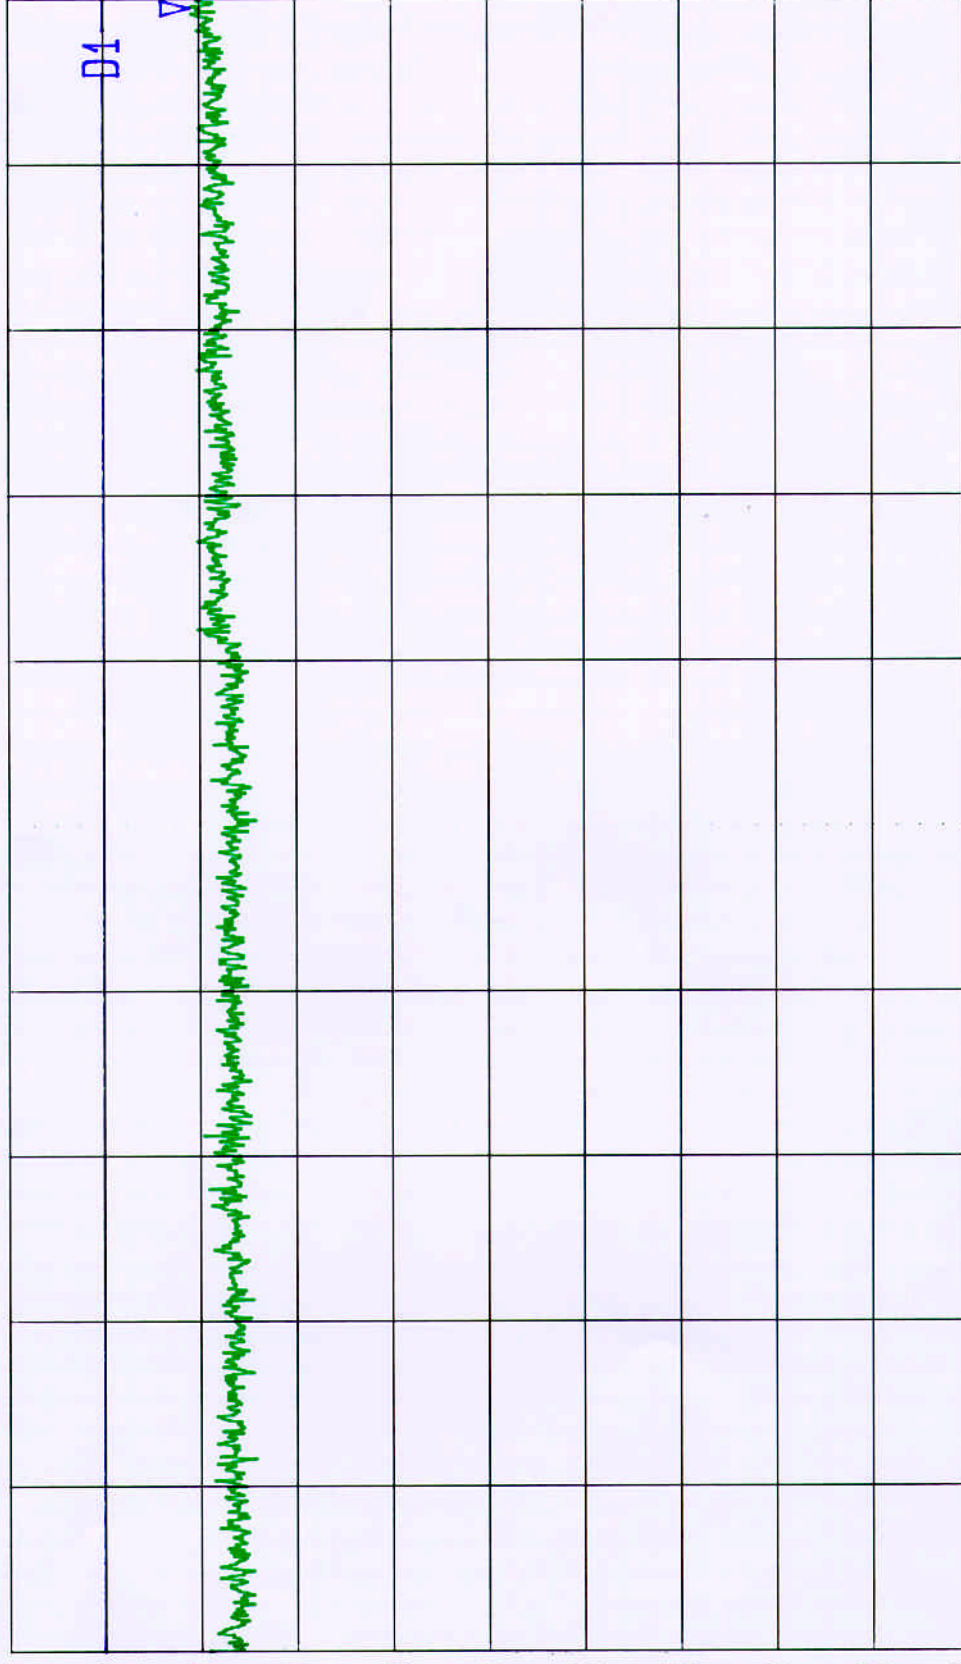

TT

2

PA

10

Start

4 GHz

Span

1 GHz

Center

4.5 GHz

Sweep

20 ms

Stop

5 GHz

Radiated. Tested By RFI for Basys Technology Ltd. EUT: High Power Tx. FCC Part 15:98  
Limit 15.231 (b). Tx CW Mode at Full Power. GPH/38788/JD01/007



Date 08.Apr.'99 Time 13:15:07

Ref.Lvl 70.00 dB\*


Marker 51.24 dB\*

4.9966 GHz

Res.Bw  
TG.Lvl  
CF.Stp

1 MHz [imp]  
off  
100.000 MHz

Vid.Bw 1 MHz  
RF.Att 0 dB  
Unit [dBμV/m]

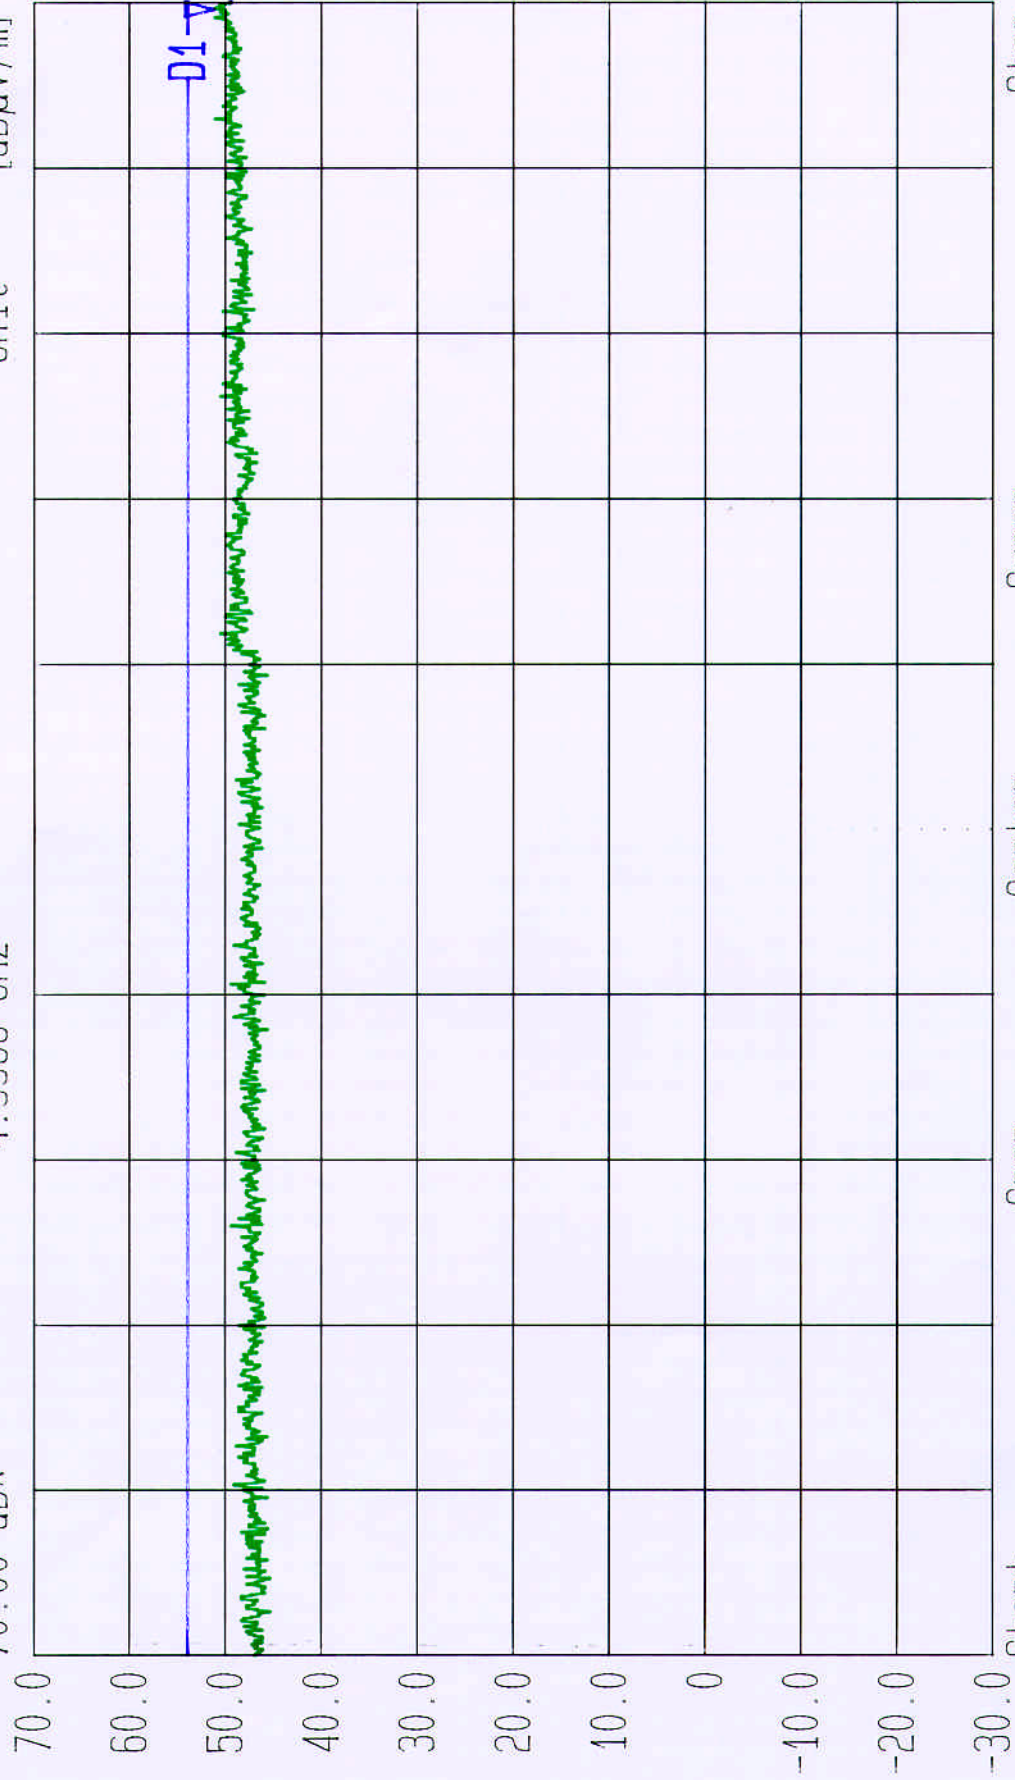


TT  
2  
PA  
10

Radiated. Tested By RFI for Basys Technology Ltd. EUT: Low Power Tx. FCC Part 15:98  
Limit 15.231 (e). Tx CW Mode at Full Power. GPH/38788/JD01/008



Date 08.Apr.'99 Time 13:51:40  
Ref.Lvl 80.00 dB\*  
Marker 36.84 dB\*  
965.5 MHz

| Res.Bw | 120 kHz [imp] | Vid.Bw | 100 kHz  |
|--------|---------------|--------|----------|
| TG.Lvl | off           | RF.Att | 0 dB     |
| CF.Stp | 97.000 MHz    | Unit   | [dBuV/m] |

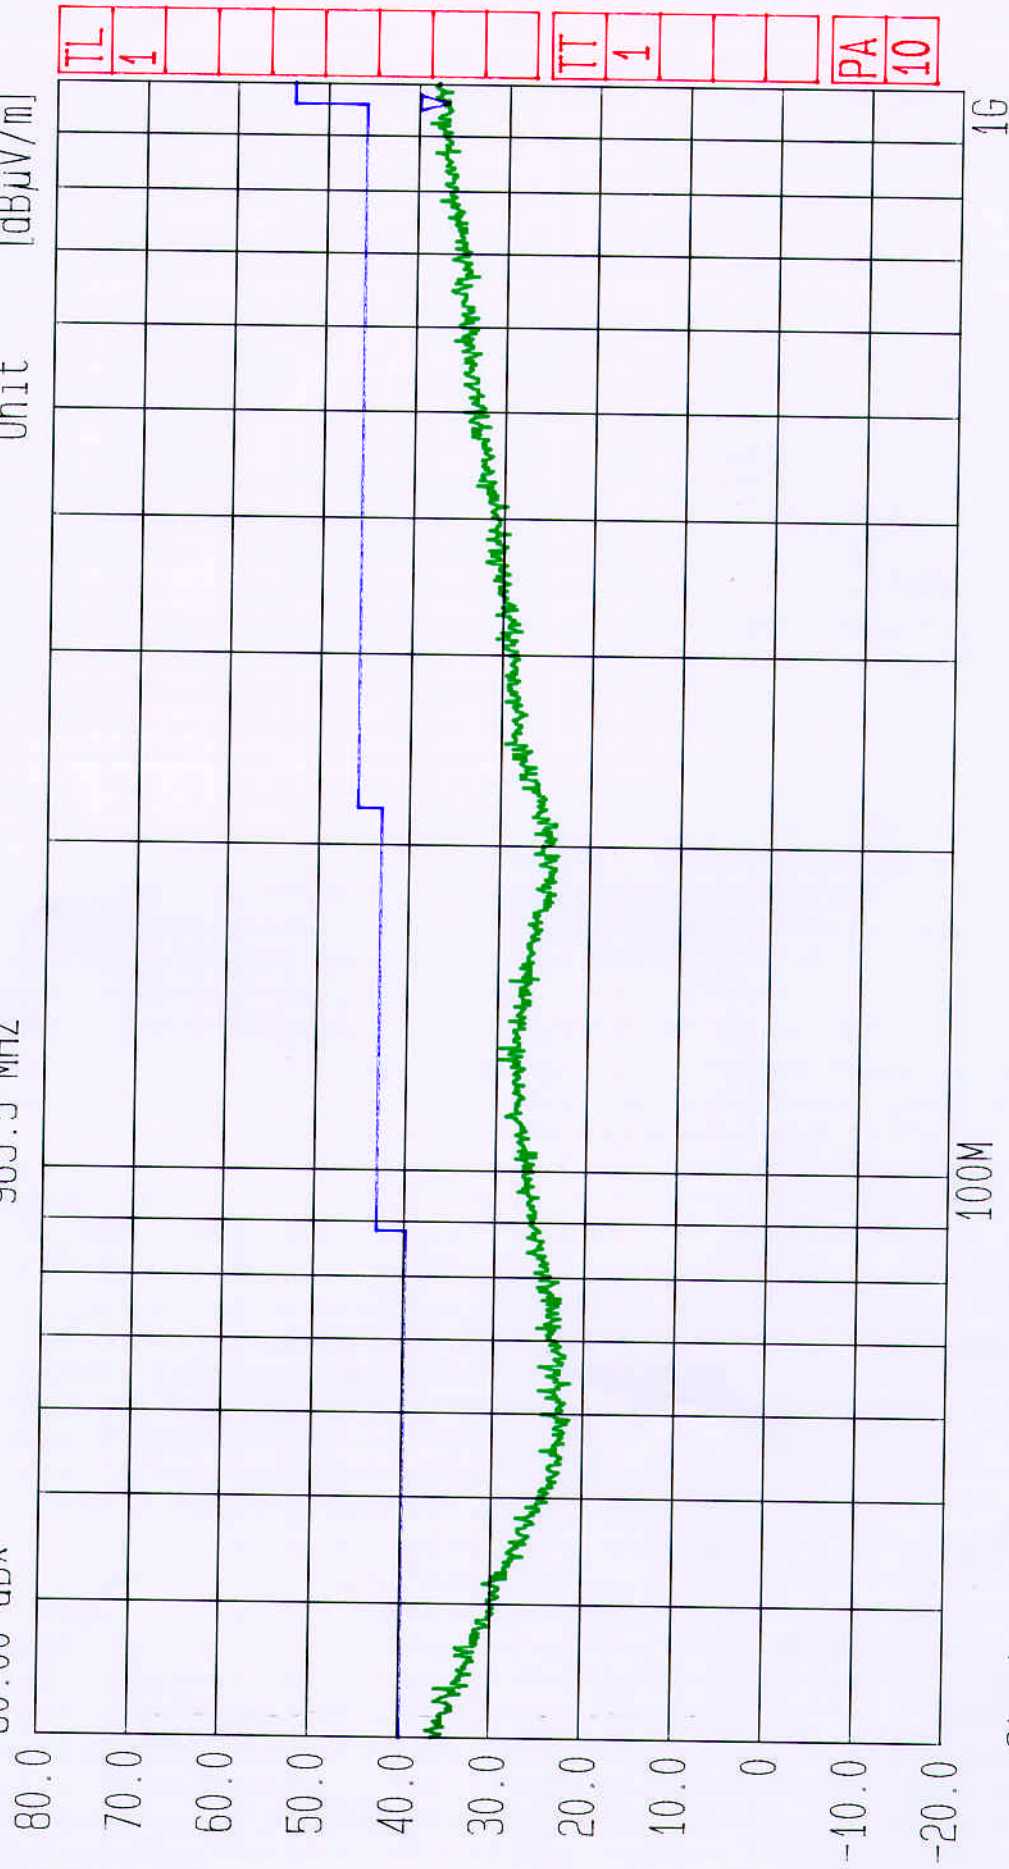

| Start  | Span    | Center    | Sweep  | Stop  |
|--------|---------|-----------|--------|-------|
| 30 MHz | 970 MHz | 173.2 MHz | 440 ms | 1 GHz |

Radiated. Tested By RFI for Basys Technology Ltd. EUT: Low Power Tx. FCC Part 15:98  
Limit Class B. Standby Mode. GPH/38788/JD01/009




Date 08.Apr.'99 Time 14:07:07

Ref.Lvl 80.00 dBx

Marker 48.24 dBx  
2.5733 GHz

Res.Bw 1 MHz [imp]  
TG.Lvl off  
CF.Stp 200.000 MHz

Vid.Bw 1 MHz  
RF.Att 0 dB  
Unit [dBμV/m]

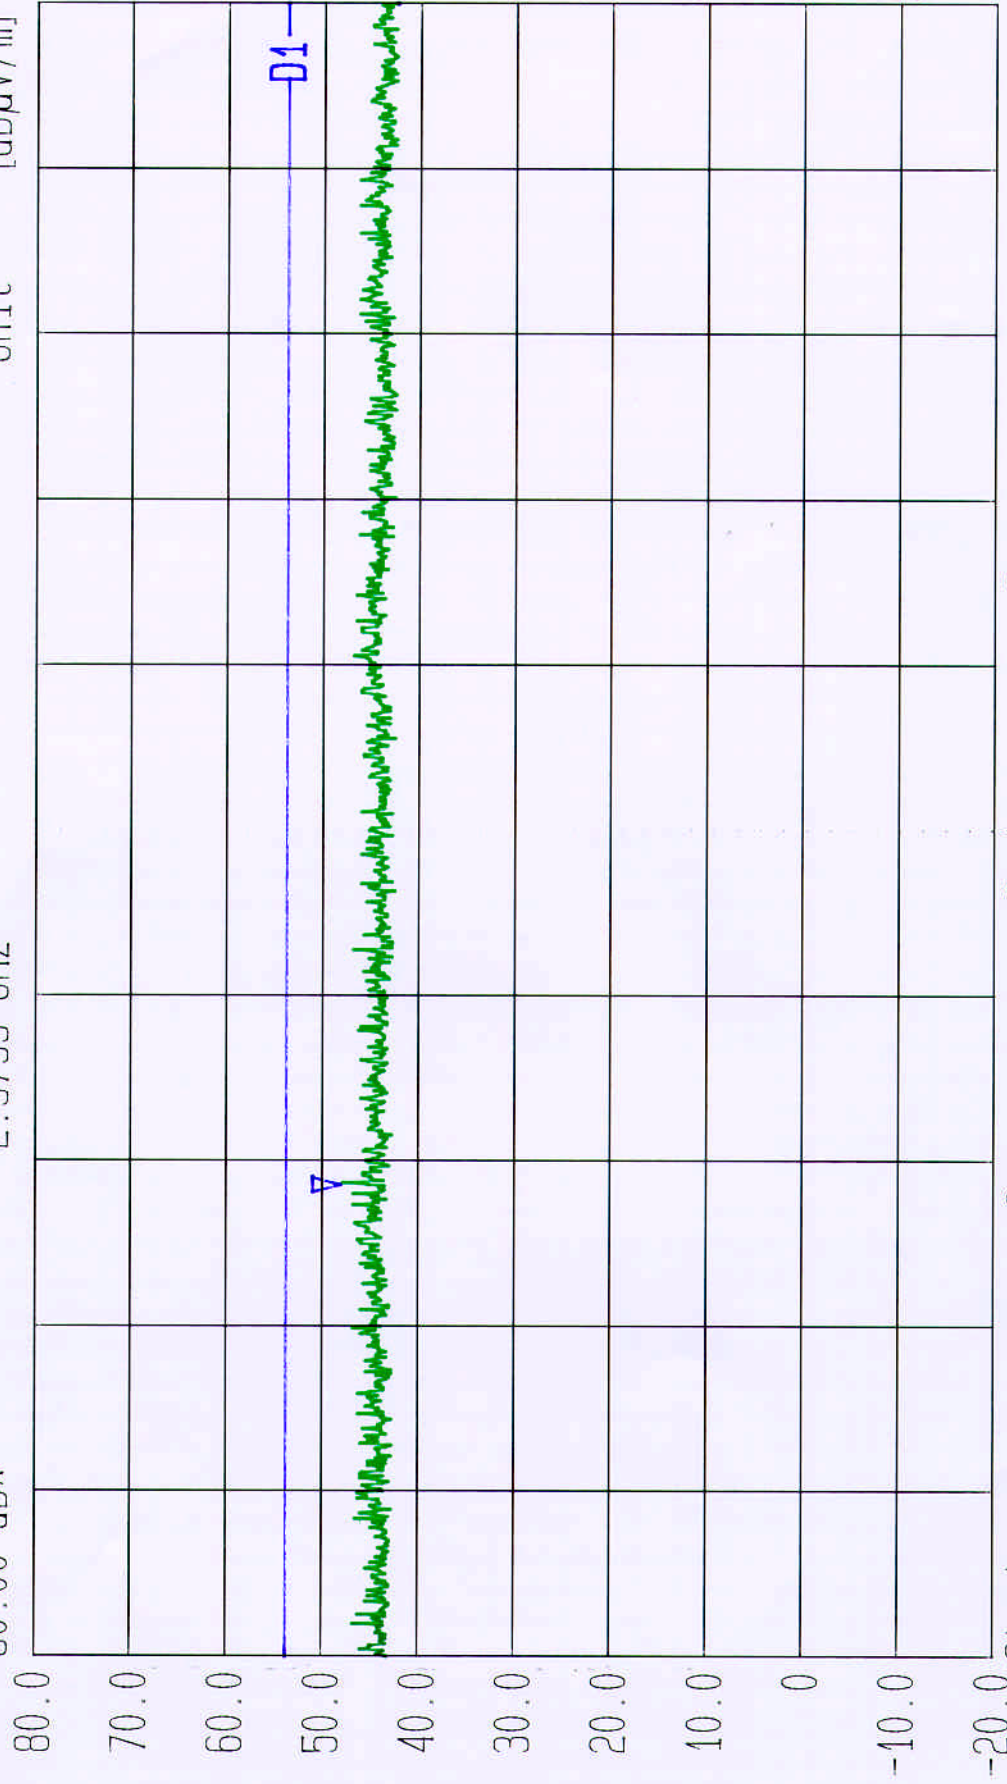

TT  
2  
PA  
10


Radiated. Tested By RFI for Basys Technology Ltd. EUT: Low Power Tx. FCC Part 15:98  
Limit Class B. GPH/38788/JD01/010  
Standby Mode.



Date 08.Apr.'99 Time 14:15:36

Ref.Lvl 80.00 dB\*  
Marker 46.71 dB\*  
1.9766 GHz

Res.Bw 1 MHz [imp]  
TG.Lvl off  
CF.Stp 100.000 MHz  
Vid.Bw 1 MHz  
RF.Att 0 dB  
Unit [dBμV/m]

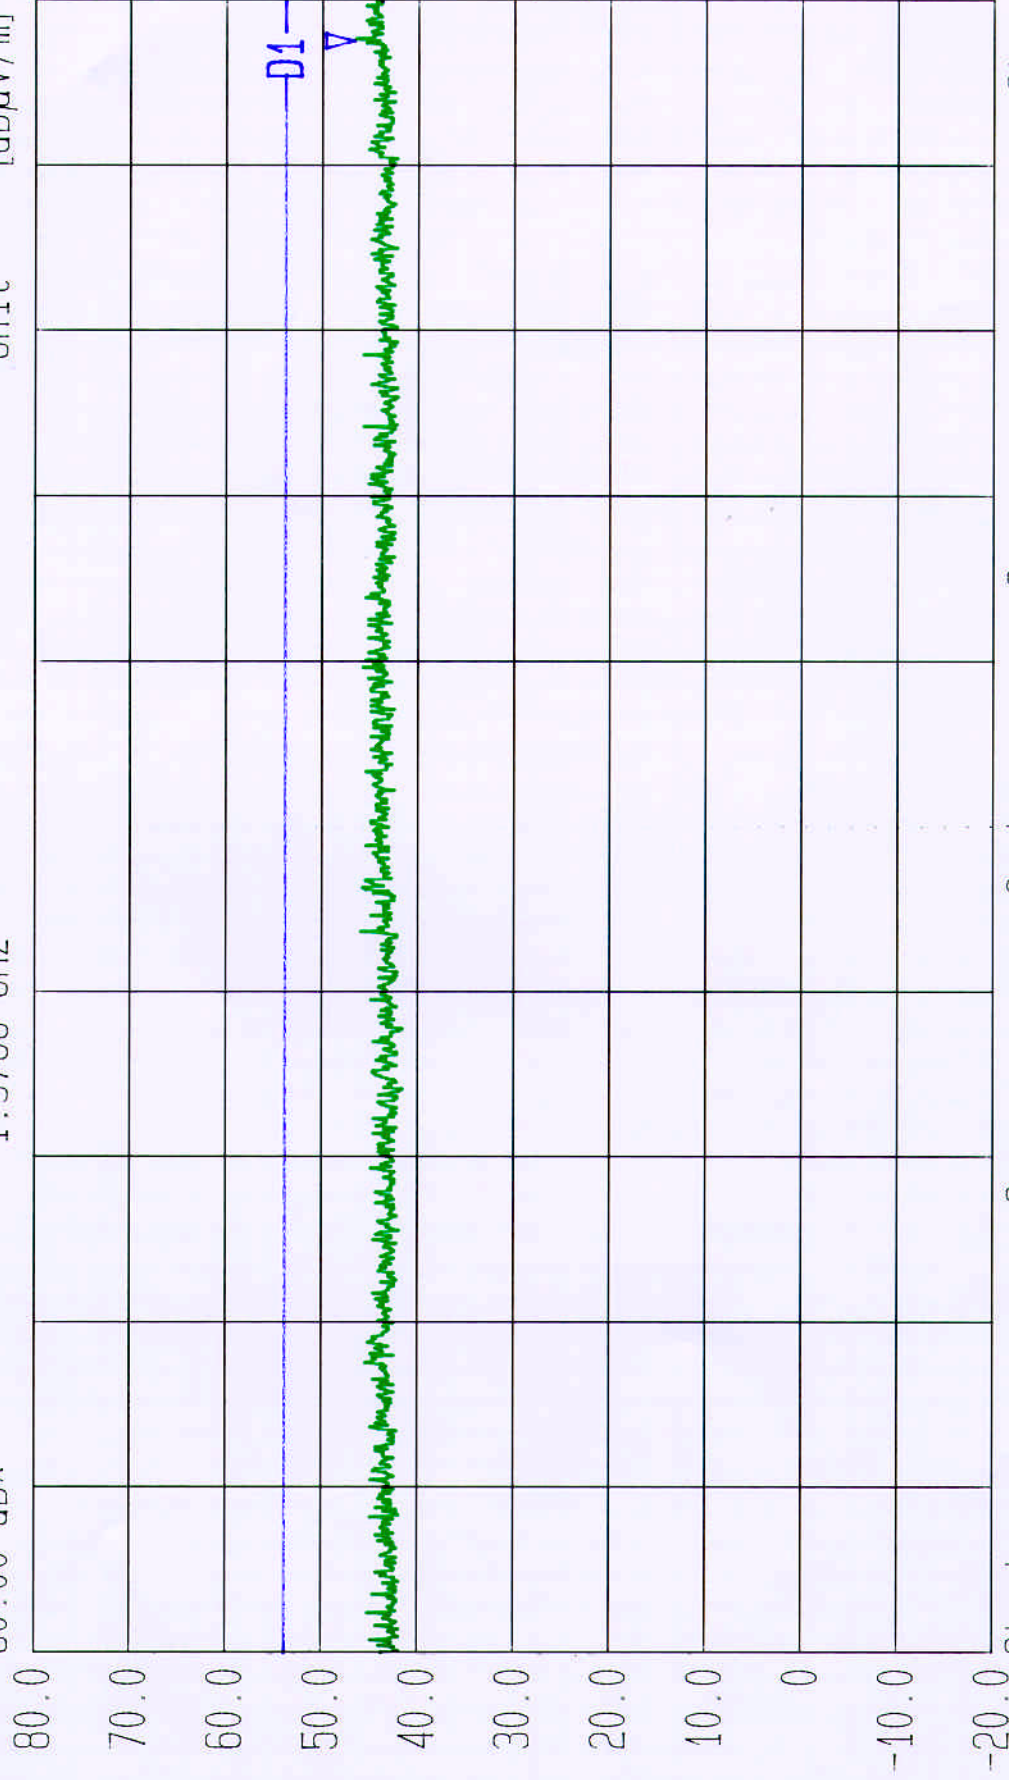

TT  
2  
PA  
10

Radiated. Tested By RFI for Basys Technology Ltd. EUT: Low Power Standby Mode.  
FCC Part 15:98  
GPH/38788/JD01/011



Date 08.Apr.'99 Time 13:40:25


Ref.: LVI  
Marker

51.14 dB\*  
4.9900 GHz

Res. Bw  
TG. Lvl  
CF. Stp

1 MHz [imp]  
off  
100.000 MHz

|        |          |
|--------|----------|
| Vid.Bw | 1 MHz    |
| RF.Att | 0 dB     |
| Unit   | [dBμV/m] |

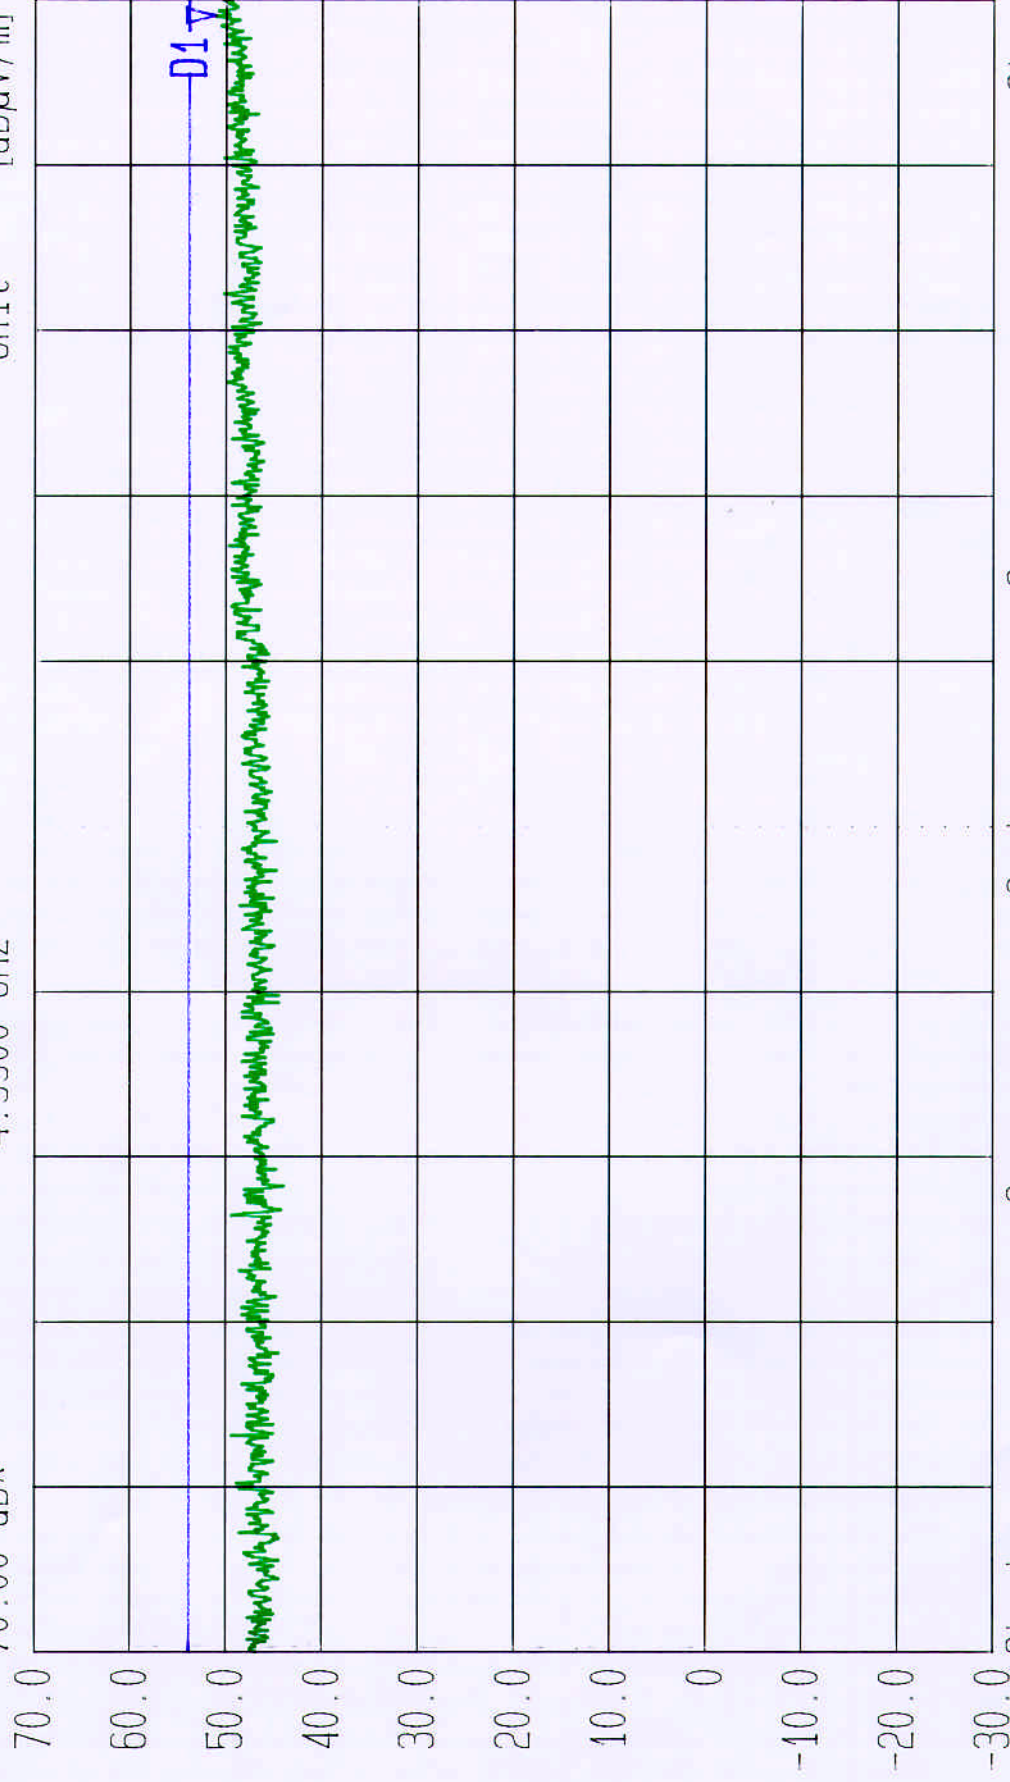

Start  
4 GHz

Span  
1 GHzCenter  
4.5 GHz

20 ms Sweep

Stop  
5 GHz

Radiated. Tested By RFI for Basys Technology Ltd. EUT: Low Power Tx. FCC Part 15:98  
Limit Class B. Standby Mode. GPH/38788/JD01/012



Date 23.Apr.'99 Time 09:07:39

Ref.Lvl 90.00 dB\*

Marker


75.45 dB\*  
418.004 MHz

Res.Bw 120 kHz [imp]  
TG.Lvl off  
CF.Stp 200.000 kHz

Vid.Bw 100 kHz  
RF.Att 0 dB  
Unit [dBμV/m]

F1 418.1333330 MHz D1  
F2 417.8755554 MHz D2  
F2-F1 257.77776 kHz D1-D2

75.45 dB\*  
55.45 dB\*  
-20.00 dB

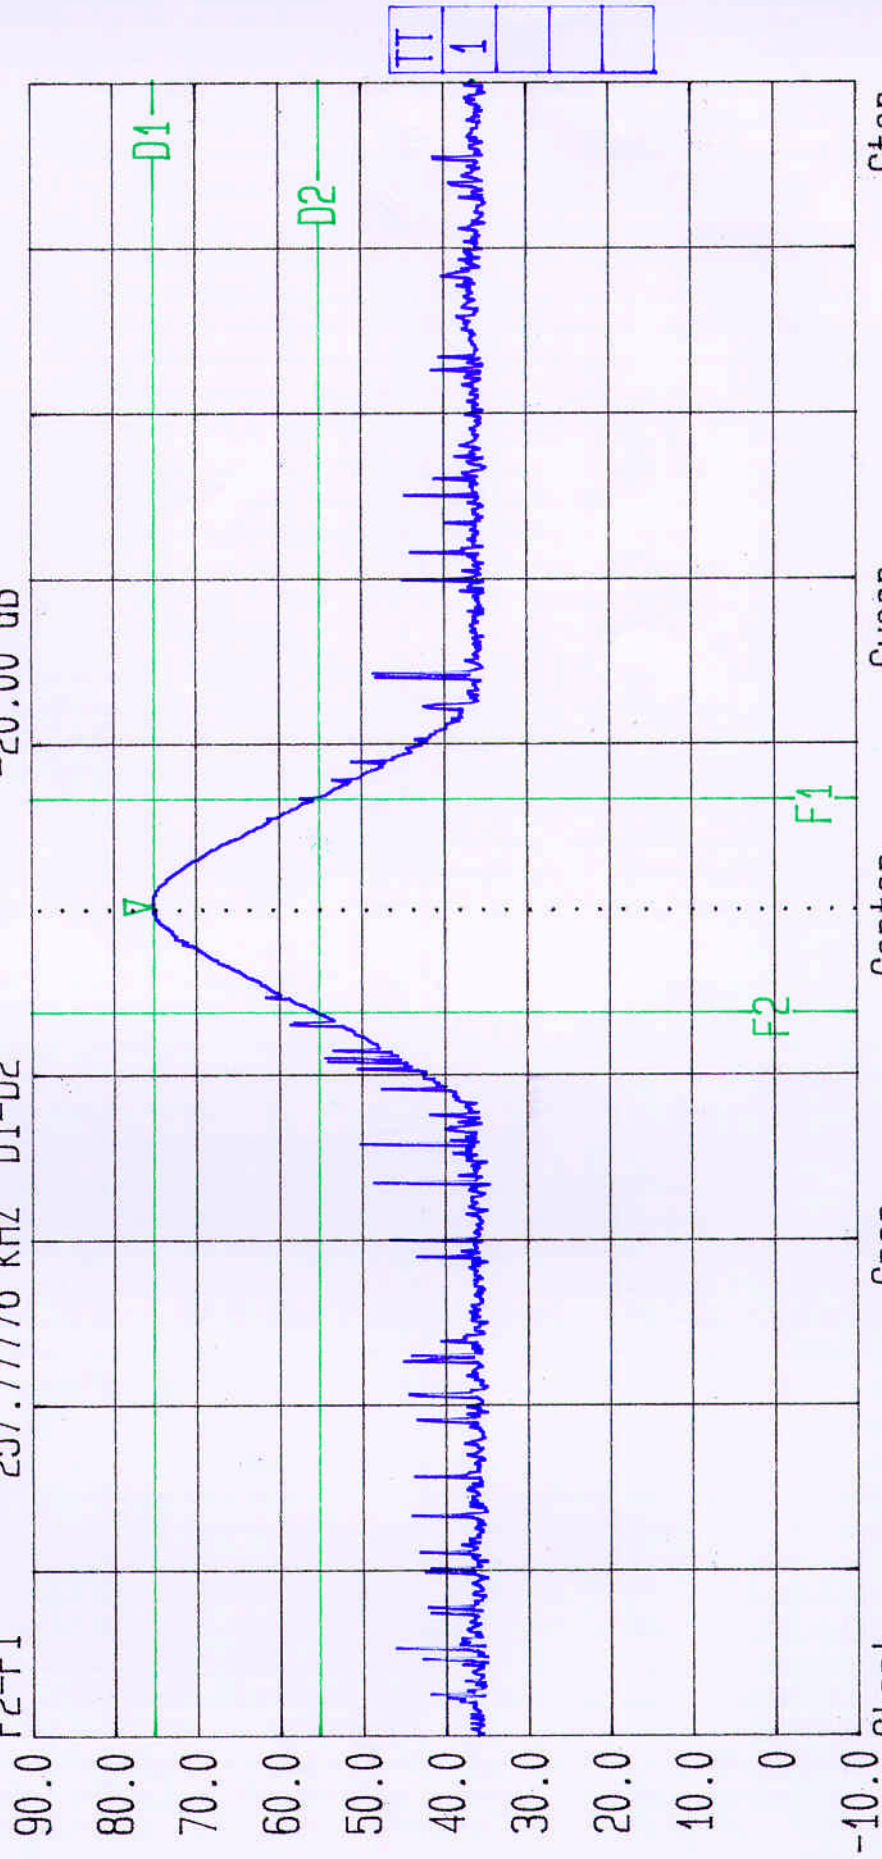

Start 417 MHz

Span 2 MHz

Center 418 MHz

Sweep 20 ms

Stop 419 MHz

Occupied Bandwidth. Tested by RFI for Basys Technology Ltd.

FCC Part 15 Subpart C. 15.231(c). Limit: 1.045MHz. Tamper Mode. GPH/38788/JD01/013

EUT: PAT



Date 23.Apr. '99 Time 09:00:39

Ref.Lvl

90.00 dBx


F1 418.1288886 MHz D1  
F2 417.8666666 MHz D2  
F2-F1 262.22220 kHz D1-D2

Res.Bw  
TG.Lvl  
CF.Stp

120 kHz [imp]  
off  
200.000 kHz

Vid.Bw 100 kHz  
RF.Att 0 dB  
Unit [dBμV/m]

73.88 dBx  
53.88 dBx  
-20.00 dB

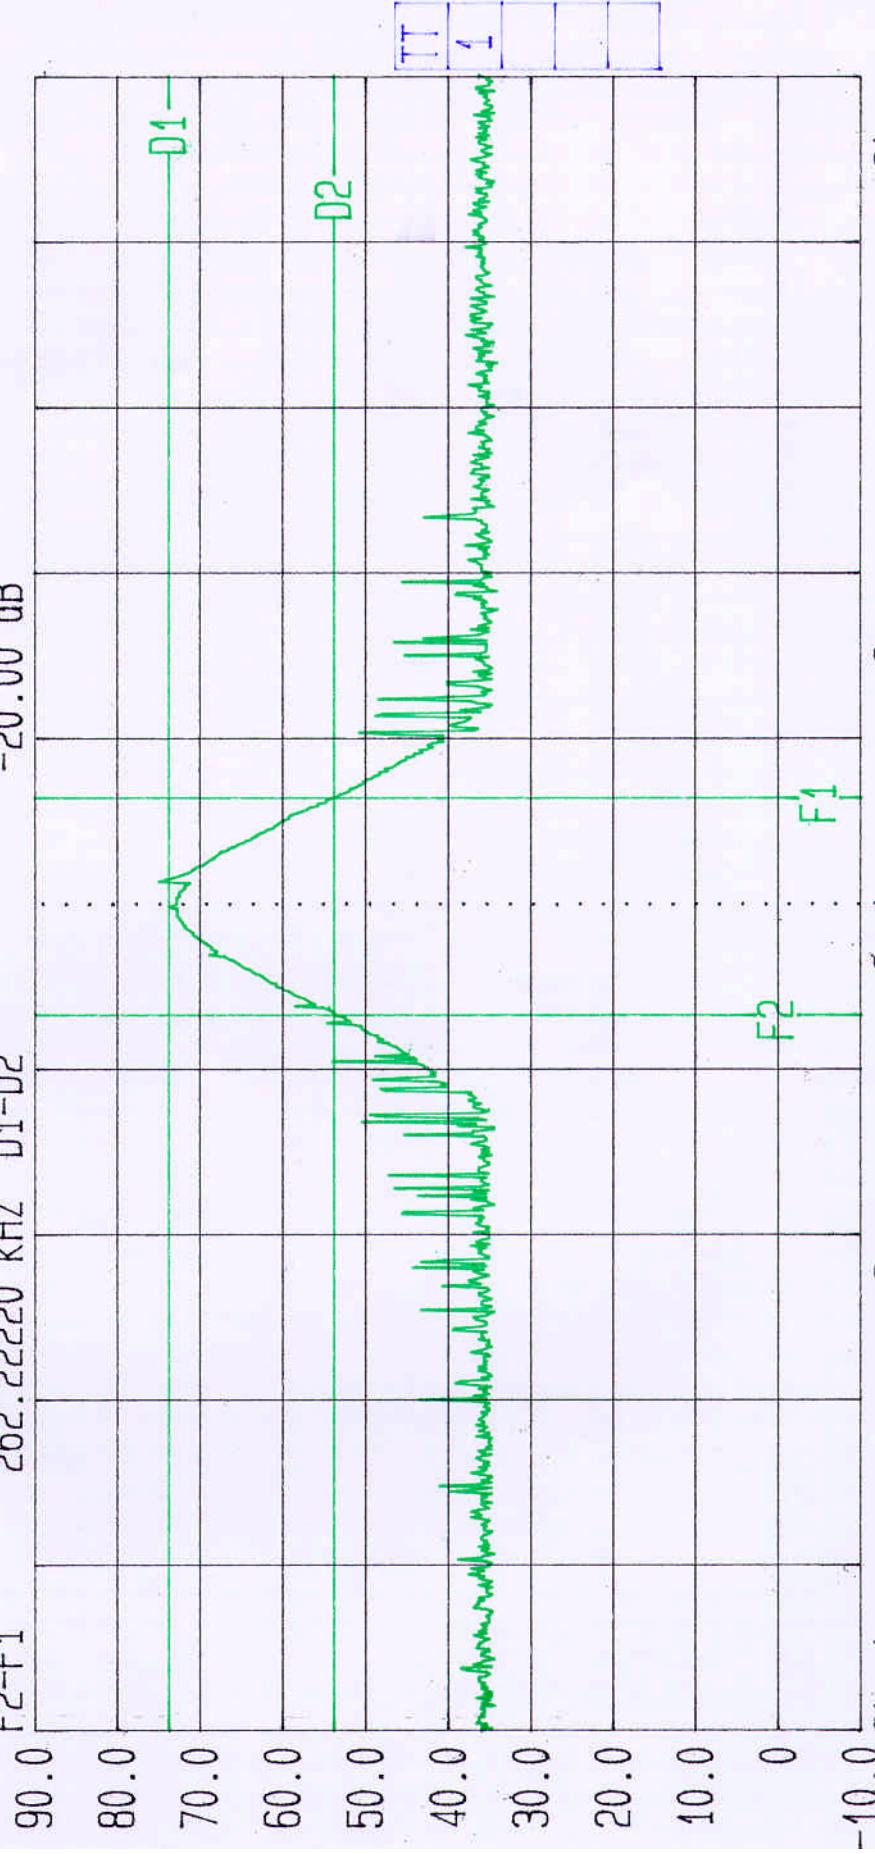

Start  
417 MHz

Span  
2 MHz

Center  
418 MHz

Sweep  
20 ms

Stop  
419 MHz

Occupied Bandwidth. Tested by RFI for Basys Technology Ltd.  
CC Part 15 Subpart C. 15.231(c). Limit. 1.045MHz. Move Mode.

EUT: ~~HAT~~ PAT  
GPH/38788/JD01/012 D4.

013A




Date 23.Apr.'99 Time 09:31:55

Ref.Lvl  
90.00 dB\*

F1 418.0999995 MHz D1  
F2 417.8377776 MHz D2  
F2-F1 262.22219 kHz D1-D2

Res.Bw 120 kHz [imp] off  
TG.Lvl  
CF.Stp  
Vid.Bw 100 kHz  
RF.Att 0 dB  
Unit [dBμV/m]

90.0  
80.0  
70.0  
60.0  
50.0  
40.0  
30.0  
20.0  
10.0  
0  
-10.0

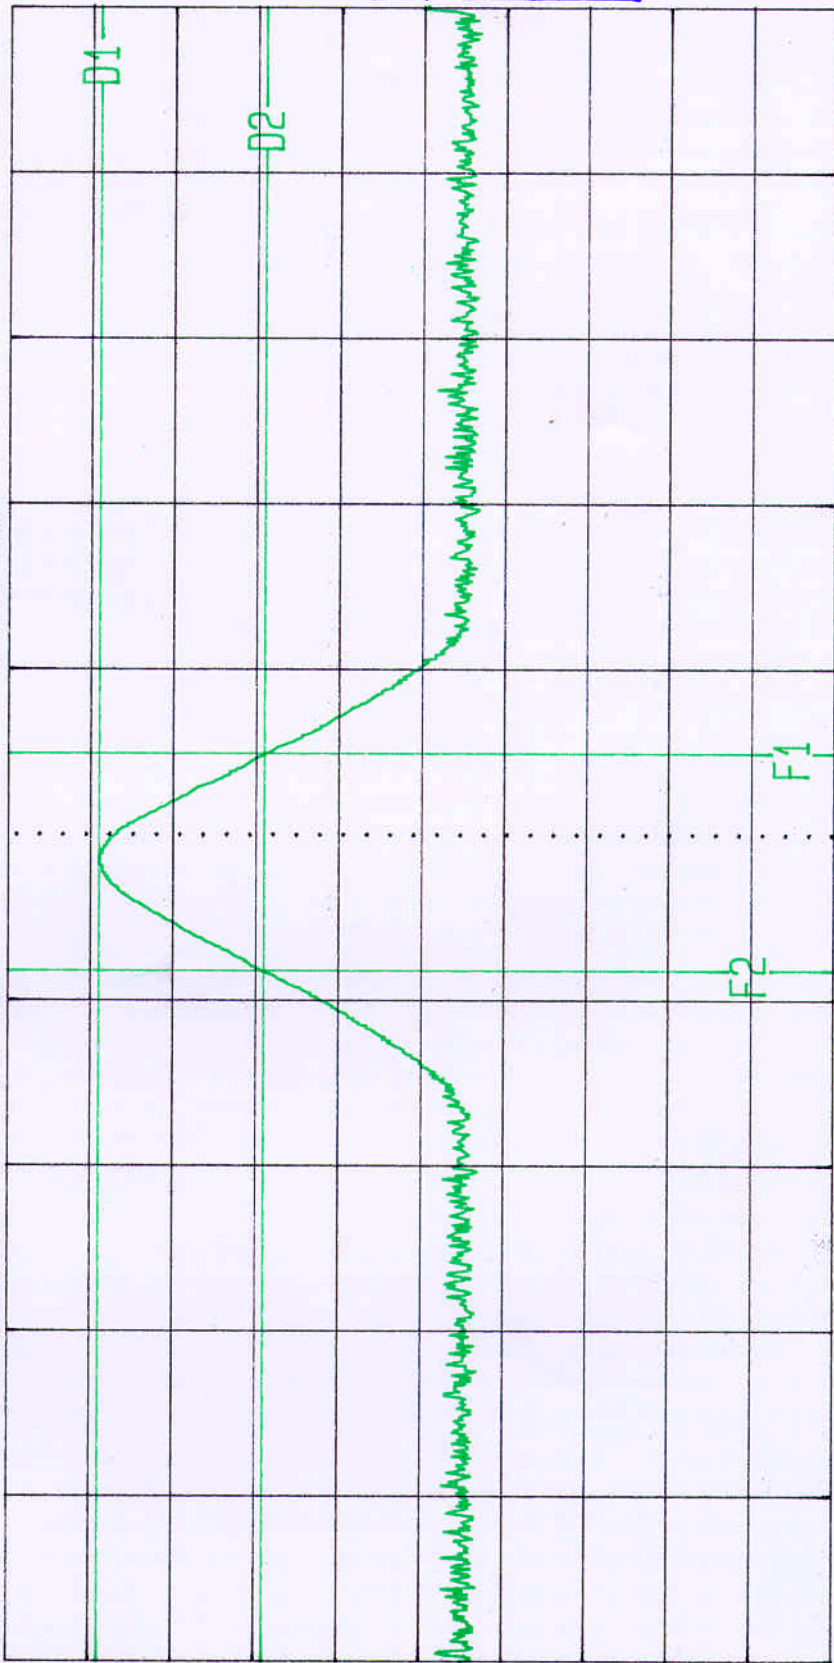

|    |
|----|
| TT |
| 1  |
|    |
|    |

Start 417 MHz Stop 419 MHz  
Span 2 MHz Sweep 20 ms  
Center 418 MHz

Occupied Bandwidth. Tested by RFI for Basys Technology Ltd.  
EUT: High Power Tx  
-CC Part 15 Subpart C. 15.231 (c). Limit. 1.045MHz.  
GPH/38788/JD01/016




Date 23.Apr.'99 Time 10:01:31

Ref.Lvl 90.00 dB\*  
Marker 72.20 dB\*  
417.977 MHz

F1 418.1155549 MHz D1  
F2 417.8466666 MHz D2  
F2-F1 268.88883 kHz D1-D2

Res.Bw 120 kHz [imp] off  
TG.Lvl  
CF.Stp 200.000 kHz  
Vid.Bw 100 kHz  
RF.Att 0 dB  
Unit [dBμV/m]

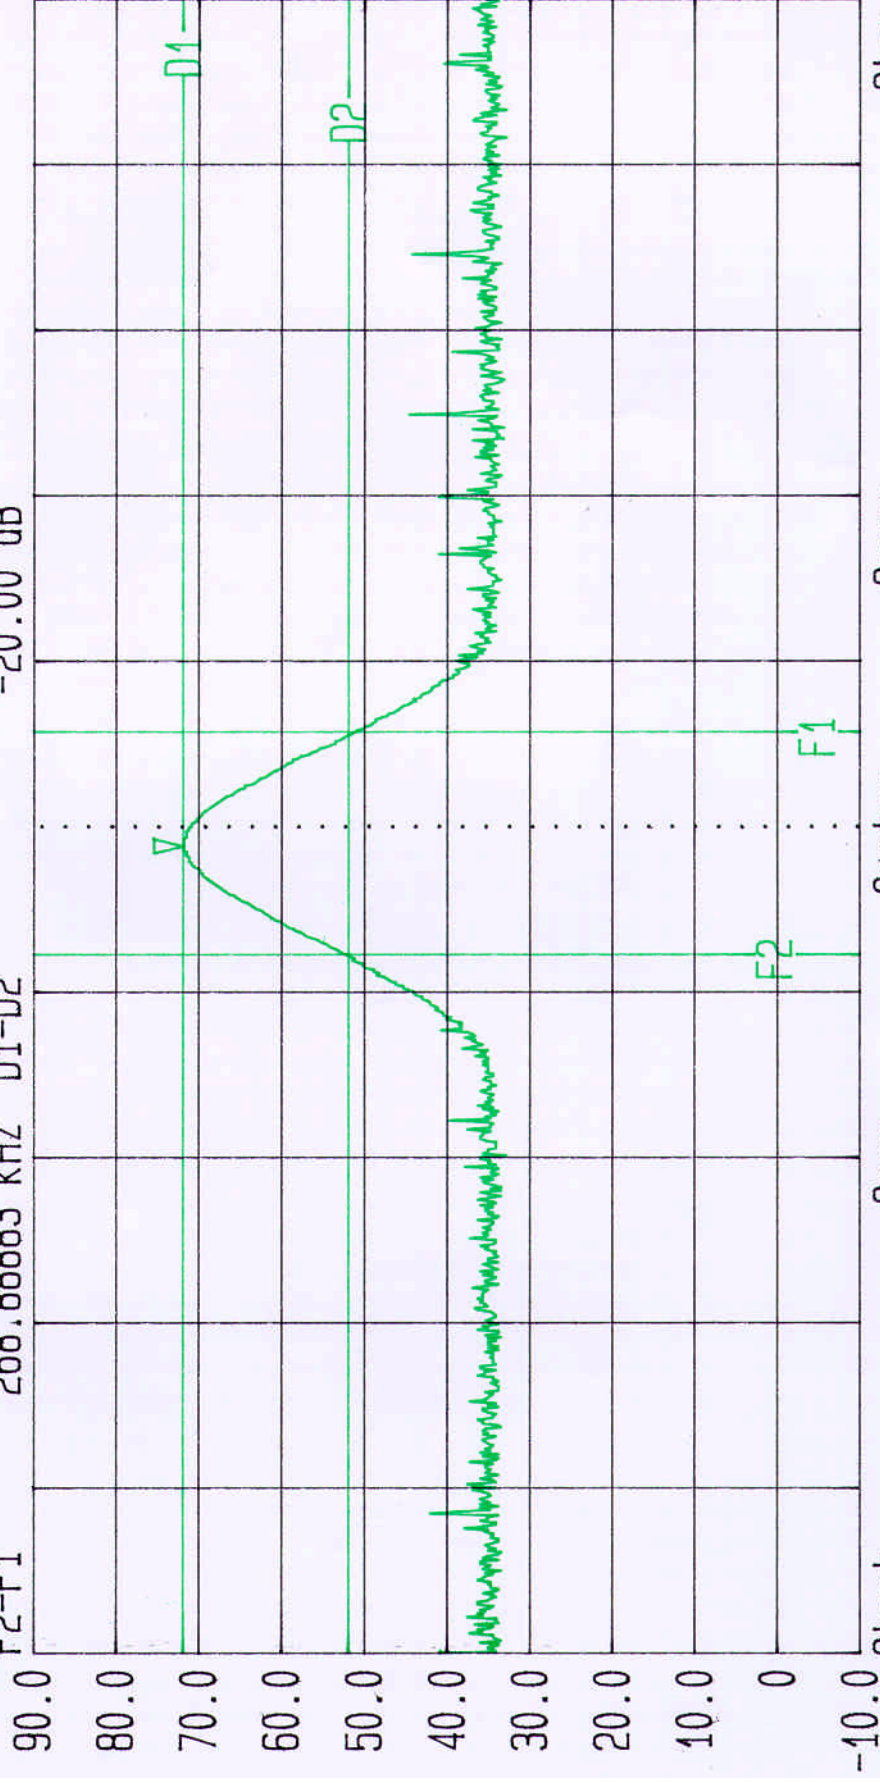

Start 417 MHz Span 2 MHz Center 418 MHz Sweep 20 ms Stop 419 MHz

Occupied Bandwidth. Tested by RFI for Basys Technology Ltd.  
-CC Part 15 Subpart C. 15.231(c). Limit. 1.045MHz.

EUT: Low Power Tx  
GPH/38788/JD01/017




Date 23.Apr.'99 Time 11:02:19

Ref.Lvl  
90.00 dB\*

Res.Bw 120 kHz [imp]  
TG.Lvl off  
CF.Stp 12.000 kHz  
Vid.Bw 100 kHz  
RF.Att 0 dB  
Unit [dBuV/m]

T1 2.288 s D1  
T2 6.688 s D2  
T1-T2 4.400 s D1-D2

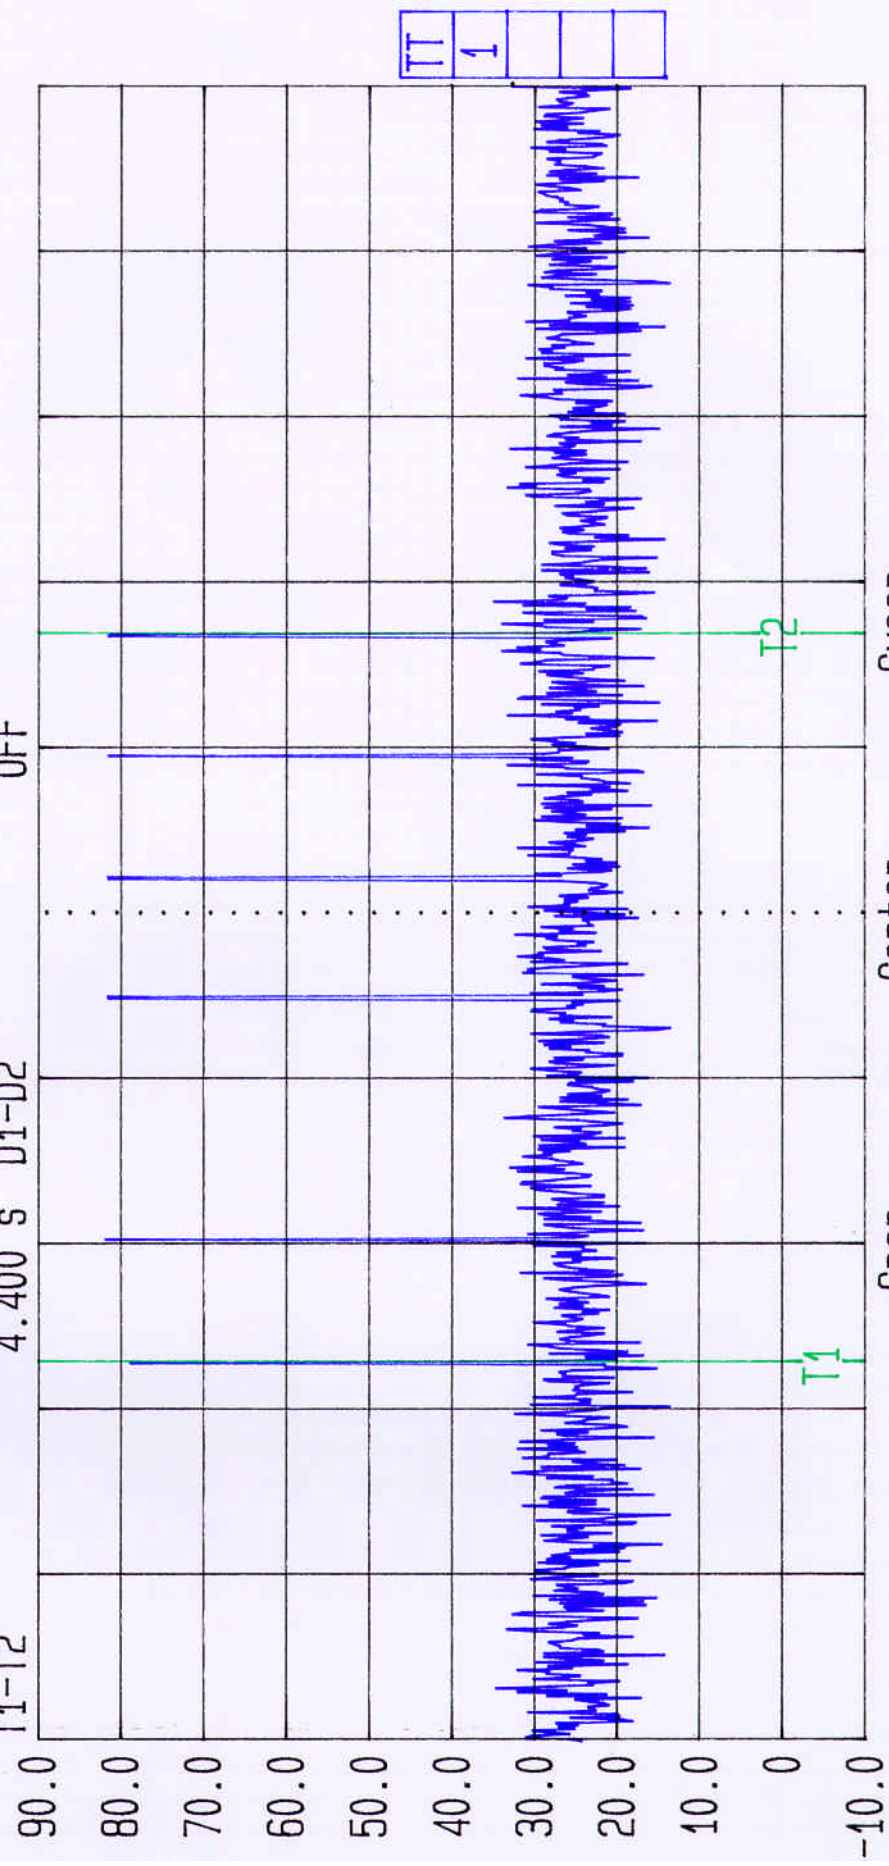

Span 0 Hz  
Center 418 MHz  
Sweep 10.0 s

Periodic Measurements Tested by RFI for Basys Technology Ltd. EUT: Pat  
FCC Part 15 Subpart C. 15.231(a). Limit. 1.045MHz. Tamper Mode GPH/38788/JD01/022




Date 23.Apr.'99 Time 11:14:42

Ref.Lvl  
90.00 dB\*

Res.Bw 120 kHz [imp]  
TG.Lvl off  
CF.Stp 12.000 kHz  
Vid.Bw 100 kHz  
RF.Att 0 dB  
Unit [dBμV/m]

T1 2.744 s D1  
T2 7.166 s D2  
T1-T2 4.422 s D1-D2

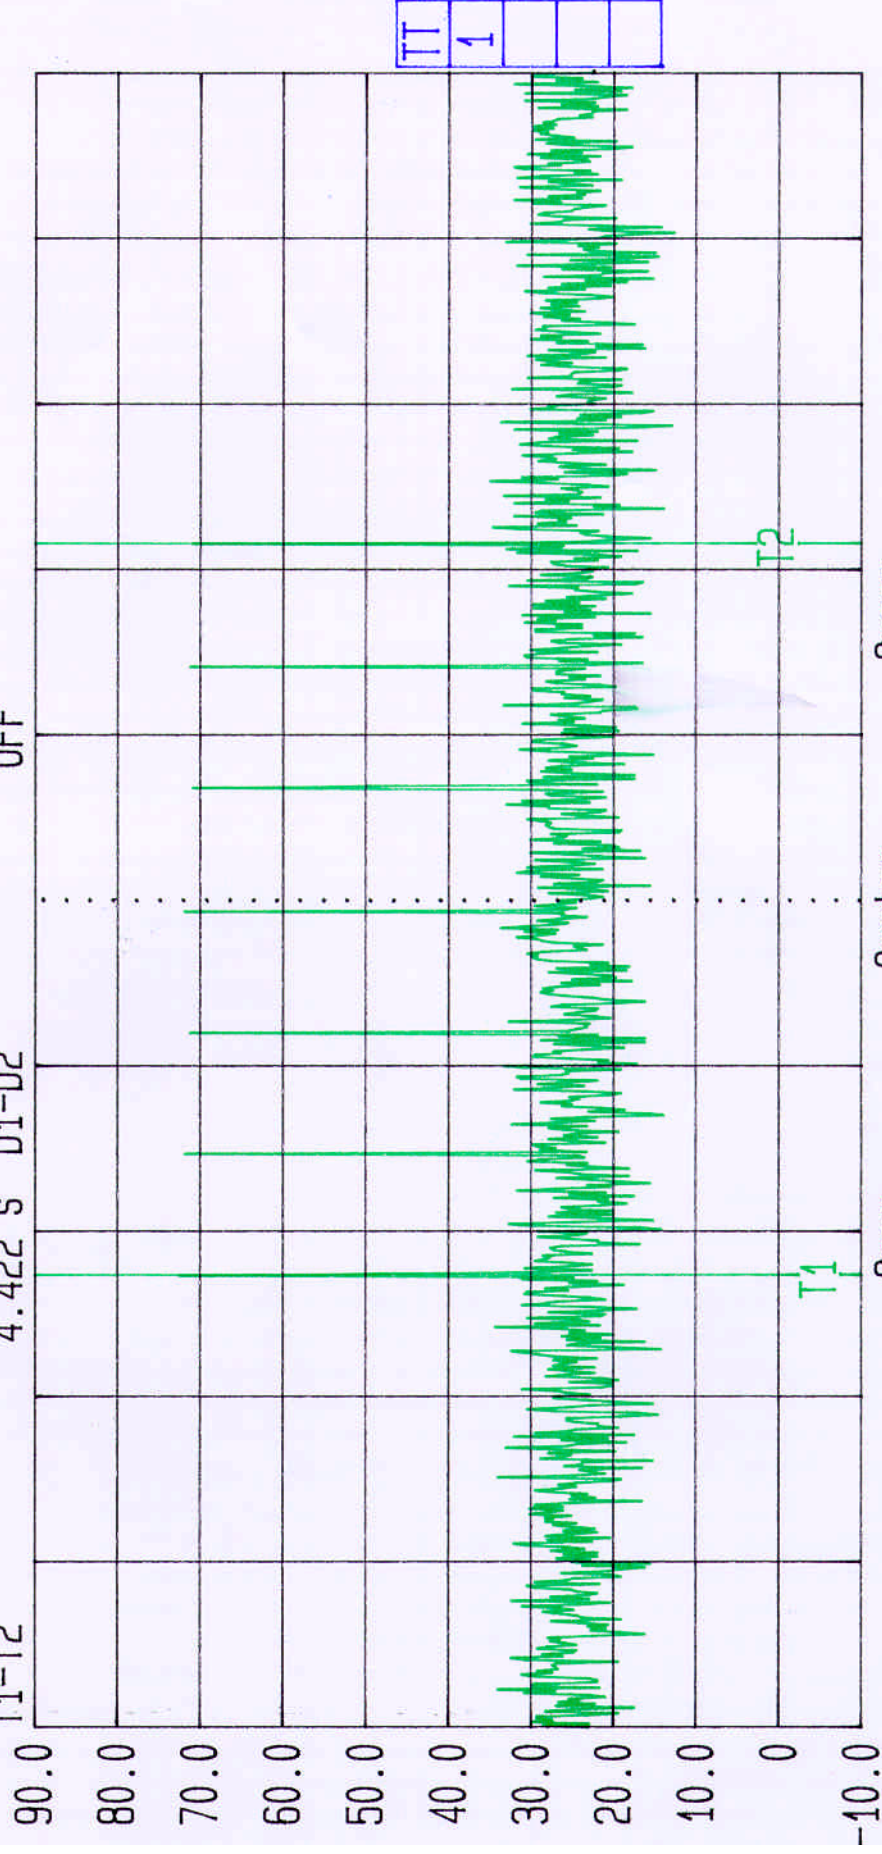

Span 0 Hz  
Center 418 MHz  
Sweep 10.0 s


periodic Measurements Tested by RFI for Basys Technology Ltd.  
CC Part 15 Subpart C. 15.231(a). Limit. 1.045MHz. Move Mode EUT: Pat  
GPH/38788/JD01/023



Date 05.May.'99 Time 14:36:41

Ref.Lvl  
90.00 dB\*

Res.Bw 120.8 kHz [3dB]  
TG.Lvl off  
CF.Stp 12.089 kHz  
Vid.Bw 100 kHz  
RF:Att 0 dB  
Unit [dB $\mu$ V/m]

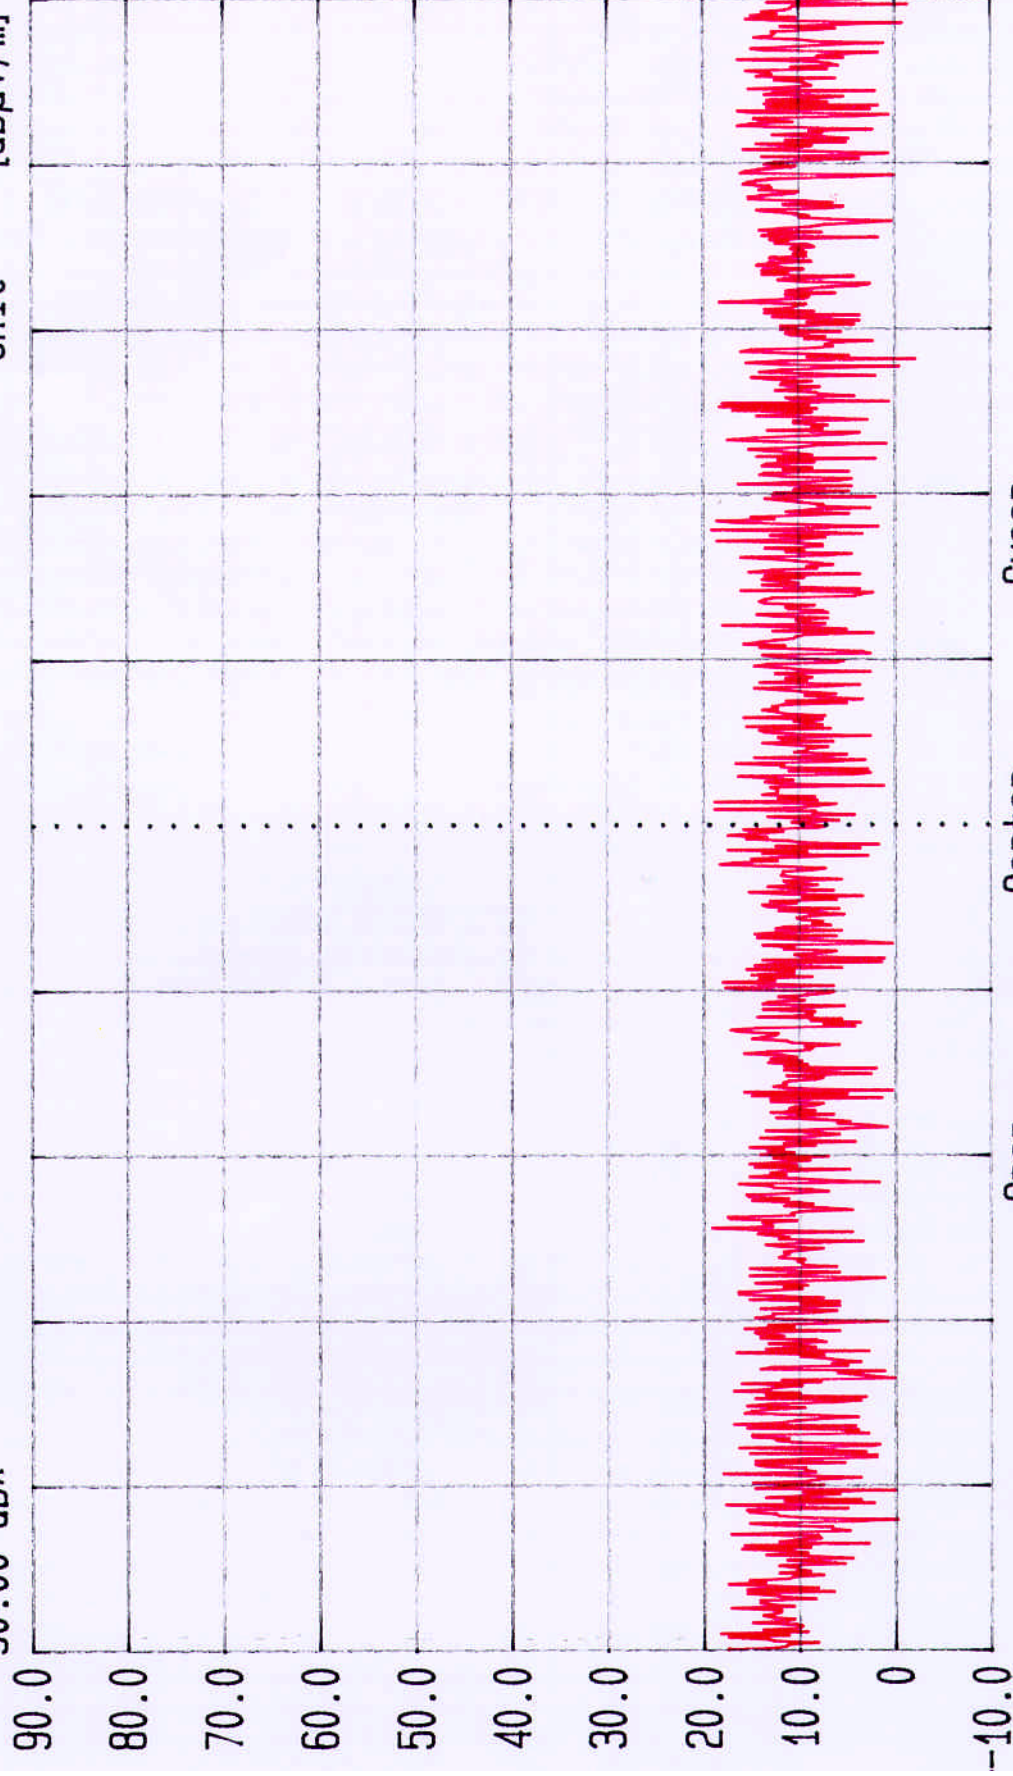

Duration Measurements.

Tested By RFI for Basys Ltd.

EUT: PAT

ICC Part 15 Subpart C. 15.231 (e). Limit 1.045MHz Standby mode GPH/38788/JD01/32

## **Appendix 5. Photographs of EUT**

This appendix contains the following photographs:

| Photo Reference Number | Title                               |
|------------------------|-------------------------------------|
| PHT\38788\001          | Front view of equipment under test. |
| PHT\38788\002          | Rear view of equipment under test.  |

These pages are not included in the total number of pages for this report.

---

**RADIO FREQUENCY INVESTIGATION LTD.**

**EMC Department**

**Test Of: Basys Technology Ltd.  
418MHz PAT**

**To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231**

---

**TEST REPORT**

**S.No: RFI/EMCB1/RP38788A**

**Page 34 of 34**

**Issue Date: 8 June 1999**

This page has been left intentionally blank.

---

EMC Department

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

PHT\38788\001 Front view of equipment under test.



EMC Department

Test Of: Basys Technology Ltd.  
418MHz PAT

To: F.C.C. Part 15: 1997 Subpart C (Intentional Radiators) Section 15.231

---

PHT\38788\002 Rear view of equipment under test.

