

PSR-78-8527 User Manual

Version 0.1



3116 West Vanowen St.
Burbank, CA 91505
Tel: 818-840-8131
Fax: 818-840-8138

www.adrftech.com



*Information in this document is subject to change without notice.
Advanced RF Technologies, Inc. 1996-2020.
All rights reserved.*

Please send comments to:

E-Mail: info@adrfttech.com

Phone: (818) 840-8131
(800) 313-9345

Fax: (818) 840-8138

Address:

Advanced RF Technologies, Inc.
Attention: Technical Publications Department
3116 Vanowen St.
Burbank, CA 91505
USA
www.adrfttech.com

REVISION HISTORY

Version	Author	Descriptions	Date
0.1	YH Ko	Initial Release	09/15/2020

CHANGE LIST

Version	Change list	Contents

TABLE OF CONTENTS

1.	Introduction	7
1.1	Highlights	7
1.2	Parts List.....	8
1.3	Quick View	9
1.4	Warnings and Hazards	10
2.	Installation	14
2.1	Cable Installation	14
3.	Overview	15
3.1	LED	15
3.2	Cable Connection	16
3.2.1	AC Power	16
3.2.2	External Alarm	17
3.2.3	RF	18
3.2.4	Battery Backup Port.....	19
3.2.5	Grounding	20
4.	Alarms	21
4.1	Message Board Alarms and Notifications	21
4.2	External Alarms.....	22
4.2.1	External Alarm Output interface	22
5.	Repeater Installation.....	23
5.1	Installation Procedures	23
5.1.1	Wall Mount Procedure	23
5.2	Antenna Separation/Isolation.....	24
6.	Maintenance Guide for PSR-78-8527 Repeater	26
6.1	Periodic Inspection Checklist	26
6.2	Preventive Measures for Optimal Operation	26
6.2.1	Recommendations.....	26
6.2.2	Precautions.....	26
7.	Warranty and Repair Policy	26
7.1	General Warranty	26
7.2	Limitations of Warranty	26
7.3	Limitation of Damages	26
7.4	No Consequential Damages.....	26
7.5	Additional Limitation on Warranty	26
7.6	Return Material Authorization (RMA)	27
8.	Specifications	28
8.1	Electrical Specifications	28
9.	Mechanical Drawing	29

FIGURES

Figure 1-1	PSR-78-8527 Repeater Parts List	8
Figure 1-2	PSR-78-8527 External Ground Terminal	9
Figure 1-3	PSR-78-8527 Quick View (Bottom)	9
Figure 2-1	Conduit holes	14
Figure 3-1	LED Panel	15
Figure 3-2	AC On/Off Switch	16
Figure 3-3	AC Connector	16
Figure 3-4	AC Terminal of the PSU	16
Figure 3-5	AC Cutout Hole (0.87 in)	17
Figure 3-6	External Alarm Cutout Hole (0.87 in)	17
Figure 3-7	RF Ports	18
Figure 3-8	Battery Backup Cut-out hole (0.87 in)	19
Figure 3-9	Battery Switch	19
Figure 3-10	Ground Cable Terminal	20
Figure 5-1	Wall Mount	23
Figure 5-2	RF Repeater Oscillation	24
Figure 9-1	PSR-78-8527 Mechanical Drawing	29

TABLES

Table 1-1	Parts List	8
Table 2-1	Conduit hole size and labels	14
Table 3-1	LED Specifications	15
Table 3-2	External Alarm Description	17
Table 4-1	Message Board Alarms and Notifications	21
Table 8-1	Electrical Specifications	28

Terms and Abbreviations

The following is a list of abbreviations and terms used throughout this document.

Abbreviation/Term	Definition
AGC	Automatic Gain Control
ALC	Automatic Level Control
AROMS	ADRF Repeater Operation and Management System
BDA	Bi-Directional Amplifier
BTS	Base Transceiver Station
CDMA	Code Division Multiple Access
CFR	Crest Factor Reduction
CP	Cyclic Prefix
CW	Continuous Wave (un-modulated signal)
DAS	Distributed Antenna System
DL	Downlink
FACP	Fire Alarm Control Panel
HPA	High Power Amplifier
HW	Hardware
IF	Intermediate Frequency
LNA	Low Noise Amplifier
LTE	Long Term Evolution
MS	Mobile Station
OFDM	Orthogonal Frequency-Division Multiplexing
OFDMA	Orthogonal Frequency-Division Multiple Access
PAR (PAPR)	Peak to Average Power Ratio (Crest Factor)
PLL	Phase Locked Loop
PSU	Power Supply Unit
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase Shift Keying
RB	Resource Block
RF	Radio Frequency
SC-FDMA	Single Carrier-Frequency Division Multiple Access
SQE	Signal Quality Estimate
SW	Software
UE	User Equipment
UL	Uplink
VSWR	Voltage Standing Wave Ratio

1. INTRODUCTION

PSR-78-8527 bi-directional amplifiers (BDAs) extend the coverage area of radio communications in buildings and RF shadow environments.

Product Features

- Alarming output to supervised circuits for: antenna, amplifier, power supply, battery, and charger failure
- Up to 85dB of gain and up to 27 dBm downlink output power per band and up to 24 dBm uplink output power shared
- Software defined filtering of up to 2 non-contiguous wide band support

1.1 Highlights

- Supports both 700MHz and 800MHz Public Safety Frequencies in a single repeater
- Supports a total of 2 wideband non-contiguous channels per frequency band (700/800)
- Air convection cooling without fans
- Sharp Filter Roll-off performance (Wide: 60dBc @ Filter Bandwidth Edge + 1MHz)
- Web-based GUI Interface; No 3rd party GUI software required
- Web-GUI connectivity via DHCP in host mode
- External Alarm Function supporting dry contacts (10 outputs, 1 input)

1.2 Parts List

Table 1-1 Parts List

Label	Quantity	Description
A	1	PSR-78-8527
B	1	Wall Mount Bracket
C	1	Mounting Bracket Template
D	1	AAI Alarm Cable
E	1	Battery Cable
F	1	AC Cable
G	1	Ethernet Cable (Crossover)
H	4	Anchor Bolt

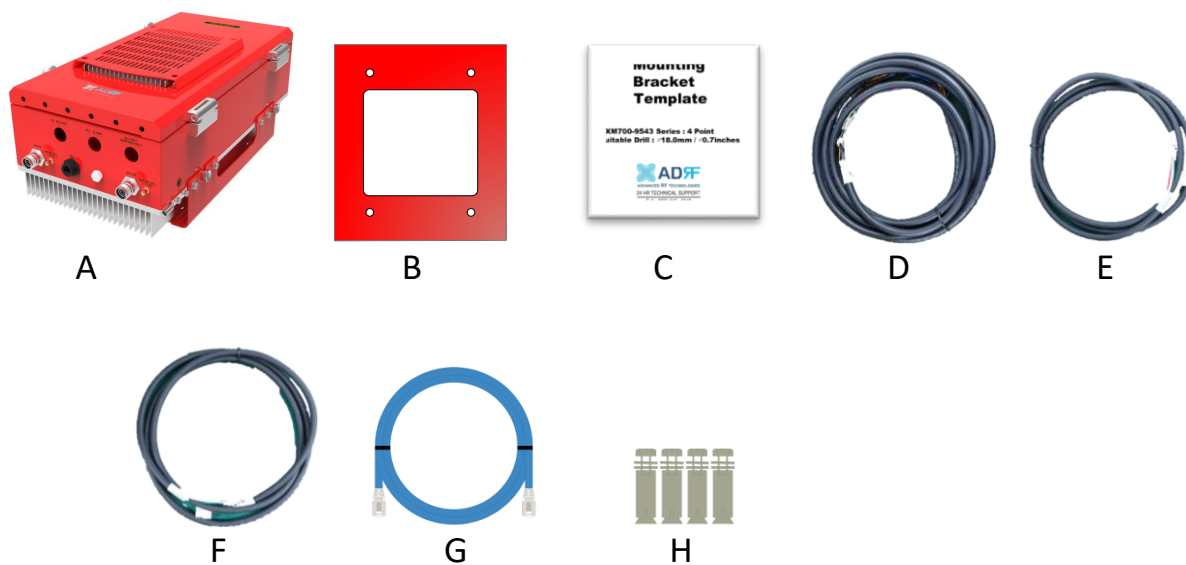


Figure 1-1 PSR-78-8527 Repeater Parts List

1.3 Quick View



Figure 1-2 PSR-78-8527 External Ground Terminal

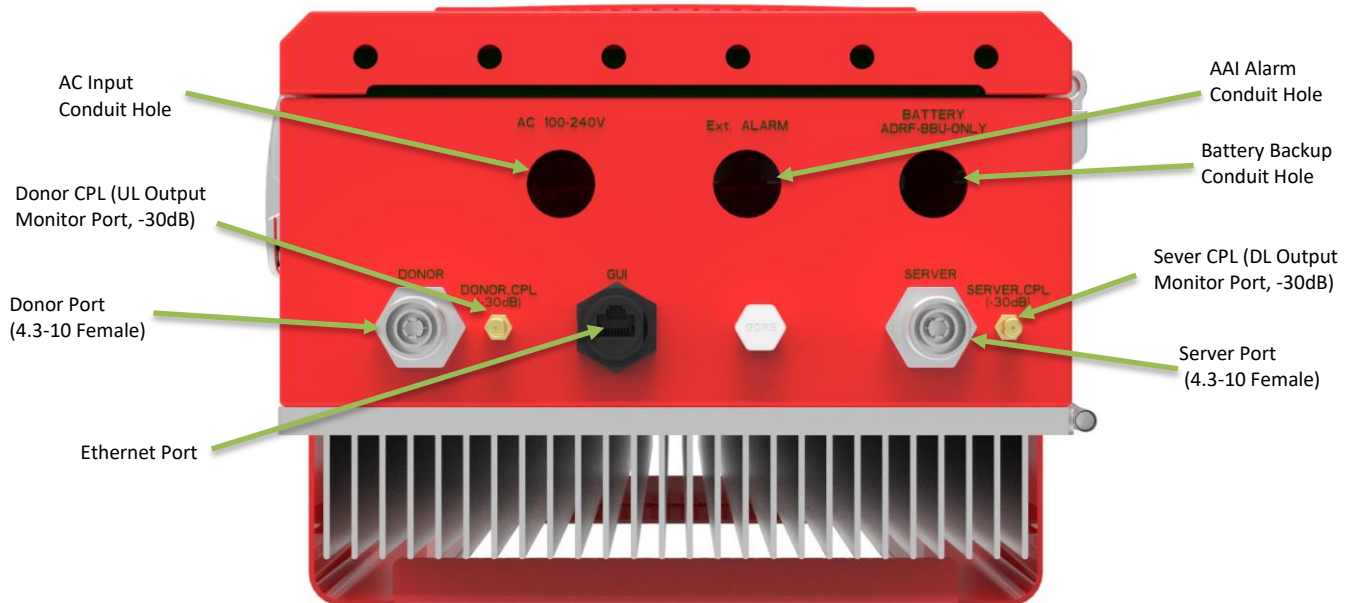


Figure 1-3 PSR-78-8527 Quick View (Bottom)

1.4 Warnings and Hazards




WARNING! ELECTRIC SHOCK

Opening the PSR-78-8527 could result in electric shock and may cause severe injury.



WARNING! EXPOSURE TO RF

Working with the repeater while in operation, may expose the technician to RF electromagnetic fields that exceed FCC rules for human exposure. Visit the FCC website at www.fcc.gov/oet/rfsafety to learn more about the effects of exposure to RF electromagnetic fields.



WARNING! DAMAGE TO REPEATER

Operating the PSR-78-8527 with antennas in very close proximity facing each other could lead to severe damage to the repeater.

RF EXPOSURE & ANTENNA PLACEMENT Guidelines

Actual separation distance is determined upon gain of antenna used.

Please maintain a minimum safe distance of DL: 30 cm, UL: 70 cm while operating near the donor and the server antennas. Also, the donor antenna needs to be mounted outdoors on a permanent structure. In accordance with the FCC regulations, this device must meet 5W ERP requirements. To satisfy this, the antenna cable name we propose is LMR200, If available and the antenna length must be at least of 6.8m (antenna cable loss at 6.8m is about 2 dBi). If you use another antenna cable, the cable loss must be considered to more than 2 dBi for UL. So, the maximum antenna gain after accounting for any cable losses should be up to UL: 14 dBi, Panel antenna.

WARRANTY

Opening or tampering the PSR-78-8527 will void all warranties.

Lithium Battery: CAUTION. RISK OF EXPLOSION IF BATTERY IS REPLACED BY INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO INSTRUCTIONS. CR2032 BATTERY MUST BE USED AS A REPLACEMENT ON THE CONTROL BOARD WHICH IS USED FOR REAL-TIME CLOCK (RTC) BACKUP.

Ethernet Instructions: This equipment is for indoor use only. All cabling should be limited to inside the building. Ethernet connection can only be used for programming/troubleshooting purposes only and is not to be connected during normal operation.

Preclude indications that Home/ personal use are prohibited.

Use of unauthorized antennas, cables, and/or coupling devices not conforming with ERP/EIRP is prohibited.

Regulatory Warning Statement

FCC RF Radiation Exposure Statement:

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of DL: 30 cm, UL: 70 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

FCC Part 90 Class B

WARNING. THIS is NOT a CONSUMER device. It is designed for installation by FCC LICENSEES and QUALIFIED INSTALLERS. You MUST have an FCC LICENSE or express consent of an FCC Licensee to operate this device. You MUST register Class B signal boosters (as defined in 47 CFR 90.219) online at www.fcc.gov/signal-boosters/registration. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each continuing violation.

FCC Part 15.21

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

RSS-GEN, Sec. 7.1.2– (transmitters)

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada.

Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

RSS-GEN, Sec. 7.1.2– (detachable antennas)

This radio transmitter (identify the device by certification number, or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio (identifier le dispositif par son numéro de certification ou son numéro de modèle s'il fait partie du matériel de catégorie I) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

RF Radiation Exposure

This equipment complies with RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of DL: 25 cm, UL: 60 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. RF exposure will be addressed at time of installation and the use of higher gain antennas require larger separation distances.

Maximum antenna gain after accounting for any cable losses should be up to UL: 14 dBi, Pannel antenna (antenna cable loss: more than 2dBi) to meet ERP 5W.

L'antenne (ou les antennes) doit être installée de façon à maintenir à tout instant une distance minimum de au moins DL: 25 cm, UL: 60 cm entre la source de radiation (l'antenne) et toute personne

2. INSTALLATION

2.1 Cable Installation

The bottom of the PSR-78-8527 has three conduit holes.

Table 2-1 Conduit hole size and labels

Silkscreen Label	Location	Diameter
AC 100-240V	LEFT	22.2mm (7/8")
Ext. ALARM	CENTER	22.2mm (7/8")
BATTERY ADRF-BBU ONLY	RIGHT	22.2mm (7/8")



Figure 2-1 Conduit holes

3. OVERVIEW

3.1 LED

PSR-78-8527 LED indicator lights are located on the inside of the repeater towards the bottom. Below the LED indicators is a button that is used to trigger the door open alarm.



Figure 3-1 LED Panel

Table 3-1 LED Specifications

POWER	DL	UL	ALARM
AC Fail DC Fail Battery Fail Low Battery Battery Not Charge Battery Not Connected Over Current	DL Signal Not Detected DL Signal Low Detected DL RF Power DL Out-Band Overload DL Input Overload DL Over Input DL Over Power DL Return Power DL PLL Fail	UL Out-Band Overload UL Input Overload UL Over Input UL Over Power UL Return Power UL PLL Fail	Power-Related Alarms RF DL Path Related Alarms RF UL Path Related Alarms Over Temperature DSP Communication Door Open System Halt

LED Indicator	Specifications
Solid Green	Normal operation
Solid Yellow	Soft Fail alarm exists in the system
Solid Red	Hard Fail alarm exists in the system

3.2 Cable Connection

3.2.1 AC Power



Figure 3-2 AC On/Off Switch

The AC Power on/off switch is on the left-hand of the PSU which is located inside of the repeater.



Figure 3-3 AC Connector

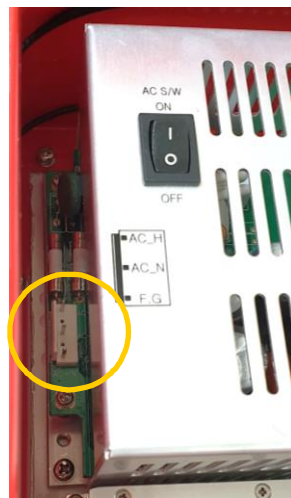


Figure 3-4 AC Terminal of the PSU

The AC terminal is at the left-hand side of the PSU. The repeater has a free-voltage range input of 100-240V AC. The AC connector of the AC cable must be connected to the AC terminal of the PSU, and the other end of the AC cable exits through the AC conduit hole and connects to AC power.



Figure 3-5 AC Cutout Hole (0.87 in)

3.2.2 External Alarm



Figure 3-6 External Alarm Cutout Hole (0.87 in)

External Alarm port should be connected only to the fire alarm control panel. The default length of the cable that is provided to connect to an FACP is 6m (19.5ft). The EXT alarm wiring cannot exceed 30m (98.5ft).

Table 3-2 External Alarm Description

Color	Pin Description (24 pins)	ADRF External Alarm Box Pin Description	Alarm Type
Black	Donor antenna malfunction_P	1-POS	Output
Black	Donor antenna malfunction_N	1-NEG	Output
Brown	Active RF device malfunction_P	2-POS	Output
Brown	Active RF device malfunction_N	2-NEG	Output
Red	Low battery capacity (70%)_P	3-POS	Output
Red	Low battery capacity (70%)_N	3-NEG	Output
Orange	System component malfunction_P	4-POS	Output
Orange	System component malfunction_N	4-NEG	Output
Yellow	Normal AC Power_P	5-POS	Output
Yellow	Normal AC Power_N	5-NEG	Output
Green	Loss of normal AC Power_P	6-POS	Output
Green	Loss of normal AC Power_N	6-NEG	Output
Blue	Battery charger failure_P	7-POS	Output

Blue	Battery charger failure_N	7-NEG	Output
Purple	Summary Alarm_P	8-POS	Output
Purple	Summary Alarm_N	8-NEG	Output
Grey	Donor Antenna Disconnect_P	9-POS	Output
Grey	Donor Antenna Disconnect_N	9-NEG	Output
White	Oscillation Alarm_P	10-POS	Output
White	Oscillation Alarm_N	10-NEG	Output
Light Blue	Alarm-In	-	Input
Light Blue	GND(Alarm-In)	-	Input

3.2.3 RF



Figure 3-7 RF Ports

The RF connections are made via two 4.3-10 female connectors. The RF connector labeled “DONOR” must be connected to the antenna pointing towards the base station. The DONOR port can receive both 700 and 800MHz public safety signals. The RF connection labeled “SERVER” must be connected to the antenna facing the area to be covered by the BDA. The repeater has a single SERVER port that supports both 700 and 800MHz public safety signals.

The RF connections must be made using cables with an impedance of 50 ohms.

The separation between the antennas is necessary to prevent oscillation. Oscillation occurs when the signal entering the system continually re-enters, due to the lack of separation between the donor and server antennas. In other words, the signal is being fed back into the system. This creates a constant amplification of the same signal. As a result, the noise level rises above the signal level.

To prevent feedback, the donor and server antennas must be separated by an appropriate distance to provide sufficient isolation. Isolation is attained by separating antennas a sufficient distance so that the output of one antenna does not reach the input of the other. This distance is dependent on the gain of the repeater.

DONOR – 4.3-10 female which is used to connect the donor antenna (700MHz + 800MHz PS)
DONOR_CPL (30dB) – SMA female 30 dB coupling port which is used to monitor the output of UL signal
SERVER_CPL (30dB) – SMA female 30 dB coupling port which is used to monitor the output of DL signal
SERVER – 4.3-10 female which is used to connect the server antenna (700MHz + 800MHz PS)

3.2.4 Battery Backup Port

This port connects to the ADRF-BBS/BBL-24 (24V battery backup unit) via a dedicated cable provided by the ADRF.



Figure 3-8 Battery Backup Cut-out hole (0.87 in)

When the ADRF-BBS/BBL-24 is connected to the repeater, the battery switch on the PSU must be switched to the ON position. This will enable the repeater to charge the ADRF-BBS/BBL-24 battery backup unit when AC power is present.



Figure 3-9 Battery Switch

Connect the ADRF-BBS/BBL-24 to the PSR-78-8527 via the external battery port to provide continuous power to the repeater during a power failure.

(WARNING: The circuit breaker switch on the ADRF-BBS/BBL-24 must be set to OFF before connecting it to the PSR-78-8527 to prevent damage to the repeater or the ADRF-BBS/BBL-24 and personal injury.)

Note: Please contact ADRF Technical Support for assistance if you are unfamiliar with the installation procedure of the battery box.

3.2.5 Grounding

The grounding terminal is located at the lower right-hand side of the BDA. A grounding cable should be properly connected before powering on the equipment.



Figure 3-10 Ground Cable Terminal

Ground terminals located on the side of the repeater and can support a ground cable up to 1.25mm² (16AWG) in diameter and should be permanently connected to a grounding bar.

4. ALARMS

4.1 Message Board Alarms and Notifications


Table 4-1 Message Board Alarms and Notifications

Alarm	Alarm Description	Trigger Condition
AC Fail	AC Input is outside of operating range	The power supply is not operating within specs.
DC Fail	DC Output is outside of operating range	The power supply is not operating within specs.
Temperature	The module is above/below the normal operating temperature	The module is above the normal operating temperature.
Current	PSU is providing more than the max current	The power supply is not operating within specs. Over Current [Above 10A]
System Halt	The system is in a shutdown state due to a hard fail alarm	The system is in a shutdown state due to a hard fail alarm. (10 cycles)
DSP Fault	The system has detected an issue with the internal DSP	The system has detected an issue with the DSP.
OSC	Oscillation detected	Oscillation detected.
DL Signal not detected	DL signal is below the specified level	DL signal is below the specified level.
DL Signal Low	DL signal is below the specified level	DL signal is below the specified level.
Input Overload	Incoming in-band DL or UL signal is too strong	Input signal is above the threshold.
Out of band Overload	Incoming out-band DL or UL signal is too strong	Out of band signal is above the threshold.
Synthesizer Lock Fail	There is an issue with the internal PLL	There is an issue with internal PLL.
DL RF Power	Input + gain does not match the output level (above delta of 6 dB)	Input + gain does not match the output level.
Overpower	The output level is above the max output levels	The output level is above the max output levels.
VSWR	Power is being reflected back to the repeater	Power is being reflected back to the repeater.
Reboot	Soft reboot performed	Reboot is performed from the Control tab.
Factory setting	Factory default settings restored	Factory setting is set from the Control tab.
Door	Door alarm set/clear	Door alarm set: Door open Door alarm clear: Door close

4.2 External Alarms

The PSR-78-8527 supports dry contact alarms and can be connected to a fire alarm control panel (FACP). The user can program the repeater to either create an open or closed circuit when an alarm is present in the system. The repeater must be installed within 30m (98.4ft) from the FACP.

4.2.1 External Alarm Output interface

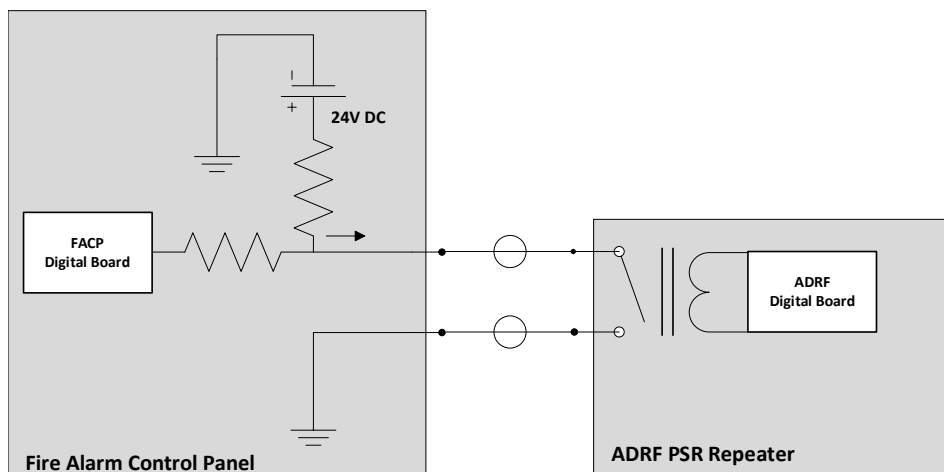

External Alarm Name	Set Condition	Likely Causes
Donor Antenna Malfunction	- UL Return Power Fail	- Damaged Donor Antenna
Active RF Device Malfunction	- RF Power Fail - DL Return Power Fail - DL/UL Over Power Fail - DL/UL Input Fail	- Degrading Amplifier - Open or Disconnected Server Port - Oscillation - Strong RF Input Signal
Low Battery Capacity (70% depleted)	- Low Battery Fail	- Battery Depleted
System Component Malfunction	- Over Current Fail - Over Temperature Fail - DSP Fail - Out-band Overload Fail	- Faulty or Damaged PSU - Ambient Temperature - DSP Filter Fault - Strong RF Input Signal
Normal AC Power	- AC Normal Set - AC Fail Clear	- Powered by AC Power - Powered by DC Power
Loss of Normal AC Power	- AC Fail Set - AC Normal Clear	- Powered by DC Power - Powered by AC Power
Battery Charger Failure	- Battery Fail - Battery Not Connected fail - Battery Not Charge Fail	- Low Battery Charging Voltage - Battery Cable Disconnected - Degraded Batteries
Summary Alarm	- Any Active Alarm	- Any Active Alarm Present in the System
Donor Antenna Disconnect	- No DL Signal Detected	- Disconnected Donor Line
Oscillation Alarm	- Oscillation	- Gain Set Too High or Lack of Isolation

5. REPEATER INSTALLATION

5.1 Installation Procedures

5.1.1 Wall Mount Procedure

- Verify that the PSR-78-8527 and mounting holes are in good condition
- Place the PSR-78-8527 mounting bracket template up against the wall and mark off mounting holes
- Drill the appropriate size holes and install the included wall anchors
- Remove the wall mount bracket from the repeater and bolt the wall mount bracket to the wall
- Place the repeater onto the wall mount bracket and secure the bracket to the repeater
- Connect the GND cable
- Connect the Antenna cables
- Connect the Power cable

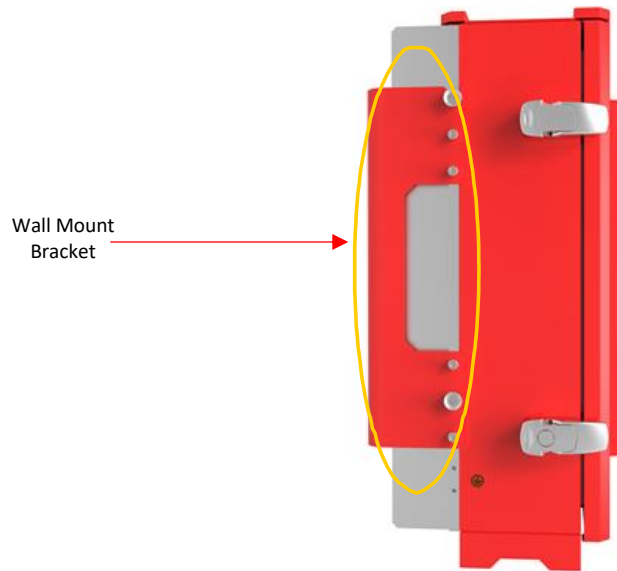


Figure 5-1 Wall Mount

5.2 Antenna Separation/Isolation

The separation between the donor and server antennas is necessary to prevent oscillation. Oscillation occurs when the signal entering the system continually re-enters, due to the lack of separation between the donor and server antennas. In other words, the signal is being fed back into the system. This creates a constant amplification of the same signal. As a result, the noise level rises above the signal level.



Figure 5-2 RF Repeater Oscillation

To prevent feedback, the donor and server antennas must be separated by an appropriate distance to provide sufficient isolation. Isolation can be attained by separating antennas at a sufficient distance so that the output of one antenna does not reach the input of the other. This distance is dependent on the gain of the repeater.

Recommended isolation value is 15dB greater than the user-set gain of the repeater. For example, if the user-set gain of the repeater is 70dB, then isolation of 85dB or greater is required. In the same manner, to utilize the maximum gain of 85dB of the PSR-78-8527, antenna isolation of at least 100dB is required.



WARNING. This is **NOT** a **CONSUMER** device. It is designed for installation by **FCC LICENSEES** and **QUALIFIED INSTALLERS**. You **MUST** have an **FCC LICENSE** or express consent of an FCC Licensee to operate this device. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each continuing violation.

DO NOT APPLY AC POWER TO THE BDA UNTIL CABLES ARE CONNECTED TO BOTH PORTS OF THE BDA AND THE ANTENNAS.

- Prior to equipment use, the device must be registered with the FCC. This can be done through the FCC's website at <https://signalboosters.fcc.gov/signal-boosters>
- 1. To mount on a wall, use the appropriate screws and anchors to attach the BDA to the wall using the four mounting holes with the included wall mount bracket.
- 2. Ensure that the isolation between the donor antenna and the serving antennas is at least 15 dB greater than the BDA gain.
- 3. Connect the cable from the donor antenna to the BDA connector labeled "DONOR" and the cable from the serving antennas to the BDA connector labeled "SERVER".
- 4. Wire the AC power source to the AC terminal block inside of the wiring compartment of the BDA and secure the line using the appropriate conduit and conduit hub connectors.
- 5. Power on the repeater by flipping the AC switch to the ON position located on the left side of the PSU.
- 6. Installation of the BDA is now complete. Adjust the gain controls to suit the specific signal environment through the GUI on your PC.

6. MAINTENANCE GUIDE FOR PSR-78-8527 REPEATER

6.1 Periodic Inspection Checklist

1. Repeater
 - a. Log into the ADRF unit and check for any alarms in the system
 - b. Address any outstanding alarms
 - c. Check for loose connections to the repeaters/remotes and antennas. If connections are loose, make sure that all connections are tightly fastened.
 - d. Check that cables and connectors are in good condition.
 - e. Ensure that the repeater/remote brackets are in good condition and that the repeater/remote is securely fastened.
 - f. Verify that the repeater has 3" of clearance on all sides to ensure proper ventilation.

6.2 Preventive Measures for Optimal Operation

6.2.1 Recommendations

Perform the *Periodic Inspection Checklist* on a semi-annually basis.

6.2.2 Precautions

Do not operate the repeater with the antennas in extremely close proximity to one another as this may cause damage to the repeater.

Do not change the parameters unless instructed to do so by an authorized supervisor.

Do not move the repeater unless instructed to do so by an authorized supervisor.

Do not detach any cables to the repeater unless repair of respective components is necessary.

7. WARRANTY AND REPAIR POLICY

7.1 General Warranty

The PSR-78-8527 carries a Standard Warranty period of two years unless indicated otherwise on the package or in the acknowledgment of the purchase order.

7.2 Limitations of Warranty

Your exclusive remedy for any defective product is limited to the repair or replacement of the defective product. Advanced RF Technologies, Inc. may elect which remedy or combination of remedies to provide in its sole discretion. Advanced RF Technologies, Inc. shall have a reasonable time after determining that a defective product exists to repair or replace the problem unit. Advanced RF Technologies, Inc. warranty applies to repaired or replaced products for the balance of the applicable period of the original warranty or ninety days from the date of shipment of a repaired or replaced product, whichever is longer.

7.3 Limitation of Damages

The liability for any defective product shall in no event exceed the purchase price for the defective product.

7.4 No Consequential Damages

Advanced RF Technologies, Inc. has no liability for general, consequential, incidental or special damages.

7.5 Additional Limitation on Warranty

Advanced RF Technologies, Inc. standard warranty does not cover products which have been received improperly packaged, altered, or physically damaged. For example, broken warranty seal, labels exhibiting tampering, physically abused enclosure, broken pins on connectors, any modifications made without Advanced RF Technologies, Inc. authorization, will void all warranty.

7.6 Return Material Authorization (RMA)

No product may be returned directly to Advanced RF Technologies, Inc. without first getting approval from Advanced RF Technologies, Inc. If it is determined that the product may be defective, you will be given an RMA number and instructions on how to return the product. An unauthorized return, i.e., one for which an RMA number has not been issued will be returned to you at your expense. Authorized returns are to be shipped to the address on the RMA in an approved shipping container. You will be given our courier information. It is suggested that the original box and packaging materials should be kept if an occasion arises where a defective product needs to be shipped back to Advanced RF Technologies, Inc. To request an RMA, please call (800) 313-9345 or send an email to techsupport@adrfttech.com.

8. SPECIFICATIONS

8.1 System Specifications

Table 8-1 System Specifications

Parameters		Specifications		Remarks
		DL	UL	
Frequency Range (MHz)	700	758-768 (FCC & IC) 769-775 (FCC only)	788-798 (FCC & IC) 799 -805 (FCC only)	
	800	851-861 (FCC only)	806-816 (FCC only)	
Composite Output Power		27 dBm	24 dBm	In case of 700/800 simultaneous output, the 3dB rule is adapted * Tolerance : +/-1 dB
System Gain (dB)		55-85	55-85	* Tolerance : +/-1 dB
Gain Control Range/Step(dB)		30/0.5	30/0.5	
ALC range(dB)		30	30	
Support of Filter BW		2 non-contiguous Sub-band of 3/5/6/10/17/18(MHz)		75 kHz ~ 325 kHz (851-854 MHz, 806-809 MHz)
Filter Roll-off		60dBc@Filter Bandwidth Edge +1MHz		
Squelch (UL)		-95~-80dBm in 5dB steps		
Spurious		FCC meet		
Passband Ripple		±2 dB		
Noise Figure @ Max gain		≤7dB		
System Group Delay		≤7us		
Power		110 -240 VAC, 60 Hz (Free Voltage)		
Power Consumption		<130W		
No damage Max Input Power		+10dBm		
Impedance		50 Ohm		
VSWR		< 1.5:1		
Operating at Ambient Temperature		-22°F to +122°F (-30°C to +50°C)		
Dimensions W x D x H		10.13x7.56x19.7 in (257x192x500 mm)		w/o mount bracket
Weight		35.7 lbs (16.2kg)		w/o mount bracket
RF Connector		4.3-10 (Female, 2EA) : Donor Ant, Server Ant SMA (Female, 2EA) : -30dB Output Monitor		
1/2" Liquid Tight Conduit Connector Hole		AC Line, Battery Line, External Alarm Line(AAI)		Hole size : 7/8"
Enclosure		IP66		

9. MECHANICAL DRAWING

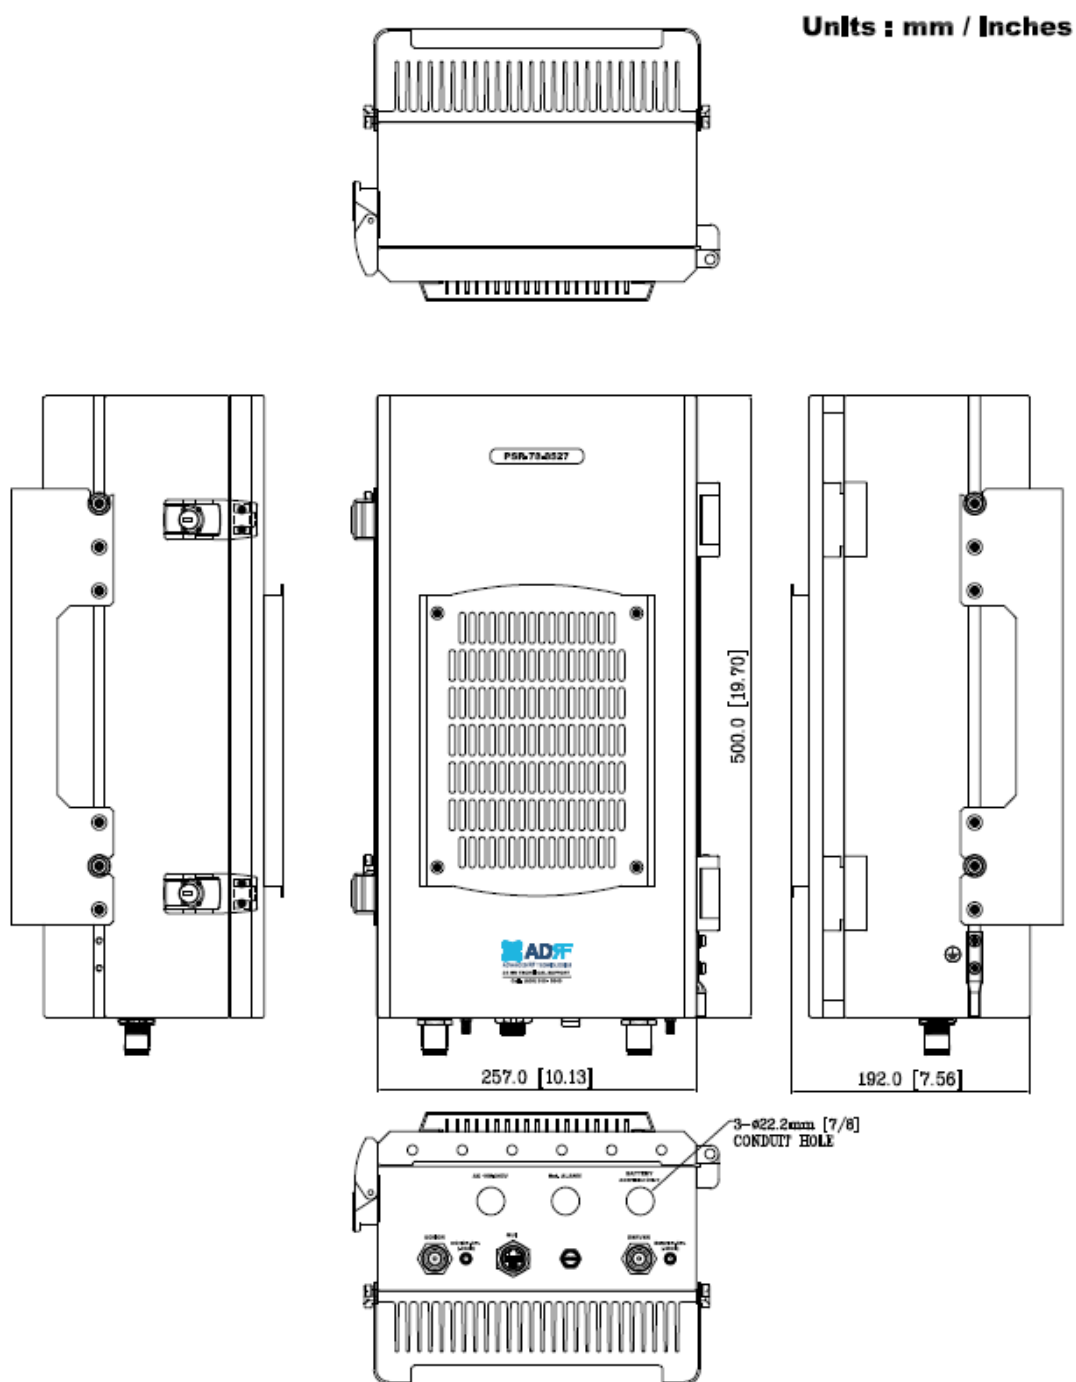


Figure 9-1 PSR-78-8527 Mechanical Drawing