

Dee

cn=Michael Dorongovski,
o=CTC advanced GmbH,
ou=DOR-210422,
email=Michael.Dorongovski
@ctcadvanced.com, c=DE
2021.12.02 10:08:59 +01'00'

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.65	dBm	INFO
Ref. Frequency	---	---	2460.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.65 15.92 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-6.37	dBm/3KHz	PASS

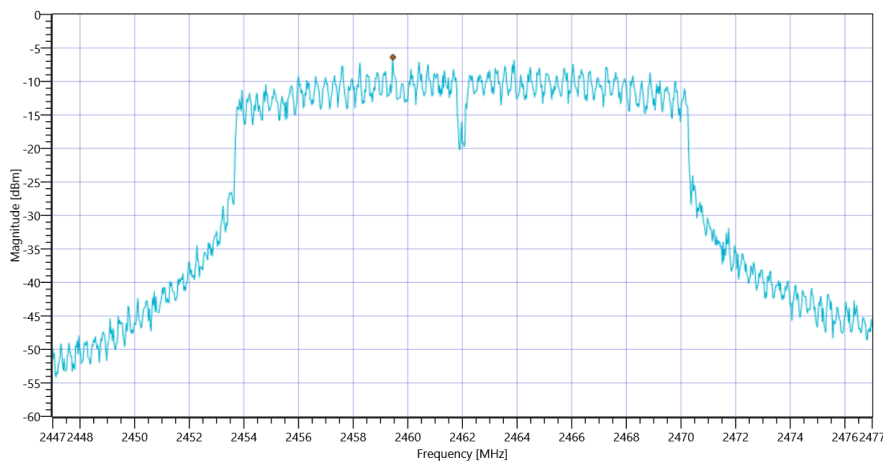

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

Test References

TC Start	06.05.2021 11:24:01
Ambit Temp [°C] Humidity [rel%]	24.9 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.78	dBm	INFO
Ref. Frequency	---	---	2410.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.78 16.15 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-6.02	dBm/3KHz	PASS

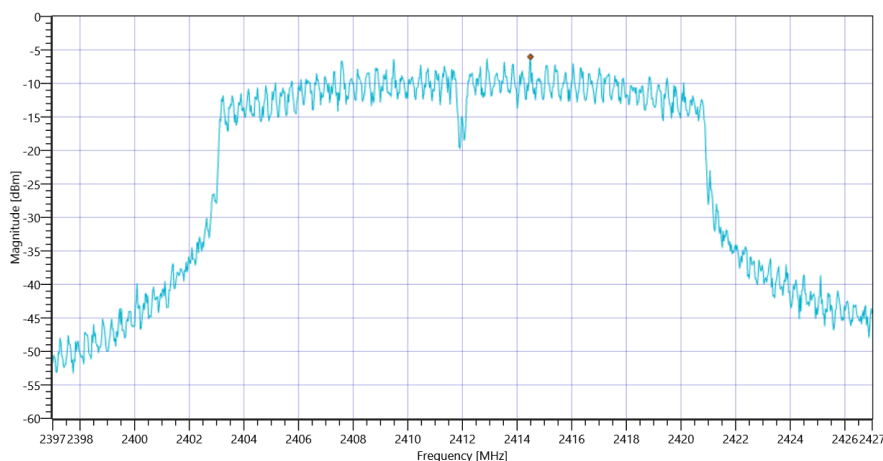

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

Test References	
TC Start	06.05.2021 11:35:33
Ambit Temp [°C] Humidity [rel%]	24.9 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	14.73	dBm	INFO
Ref. Frequency	---	---	2439.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.73 16.02 20
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-6.86	dBm/3KHz	PASS

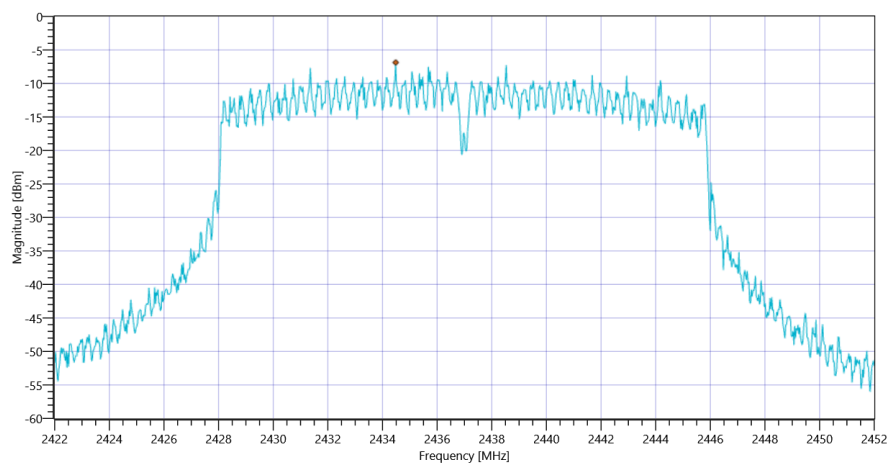

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

Test References

TC Start	06.05.2021 11:46:36
Ambit Temp [°C] Humidity [rel%]	25.0 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.11	dBm	INFO
Ref. Frequency	---	---	2465.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.11 15.92 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-6.92	dBm/3KHz	PASS

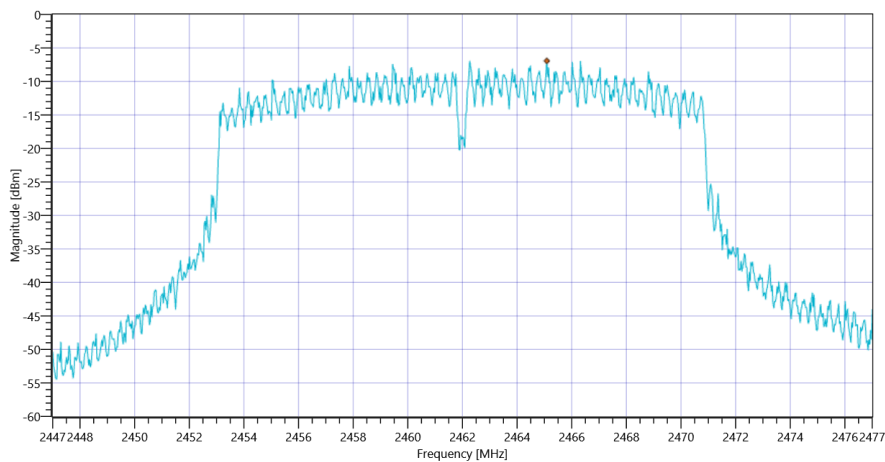

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

Test References

TC Start	06.05.2021 11:59:33
Ambit Temp [°C] Humidity [rel%]	25.0 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2422 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.06	dBm	INFO
Ref. Frequency	---	---	2416.910	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.06 16.1 20
Start [MHz] Stop [MHz]	2392.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-10.29	dBm/3KHz	PASS

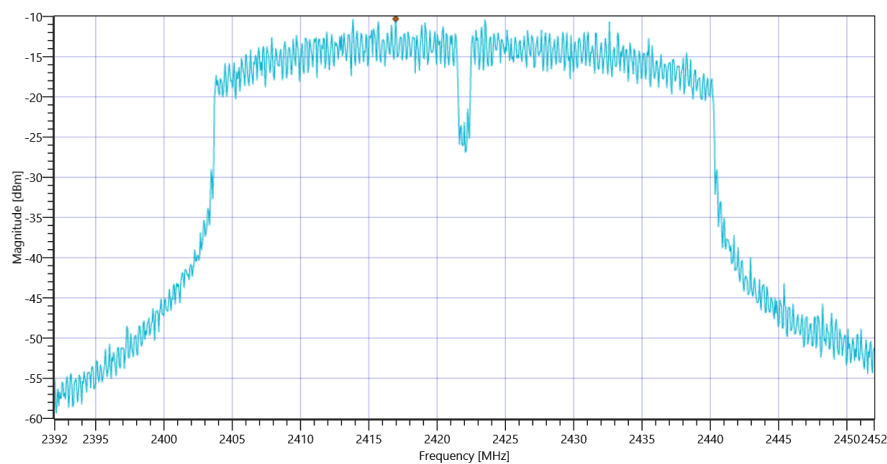

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

Test References

TC Start	06.05.2021 12:11:00
Ambit Temp [°C] Humidity [rel%]	25.1 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	11.03	dBm	INFO
Ref. Frequency	---	---	2432.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.03 16.02 20
Start [MHz] Stop [MHz]	2407.000 2467.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-10.98	dBm/3KHz	PASS

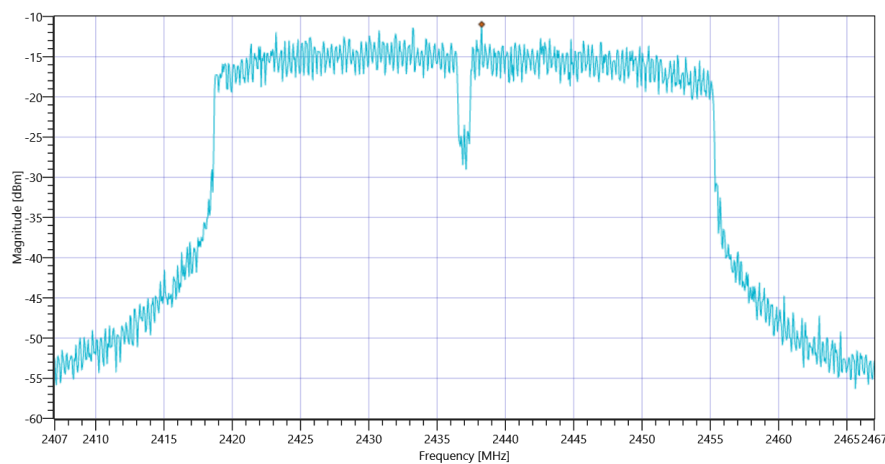

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

General verdict

PASS

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

Test References

TC Start	06.05.2021 12:23:20
Ambit Temp [°C] Humidity [rel%]	25.1 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2452 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	10.51	dBm	INFO
Ref. Frequency	---	---	2461.690	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.51 15.95 15
Start [MHz] Stop [MHz]	2422.000 2482.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-11.36	dBm/3KHz	PASS

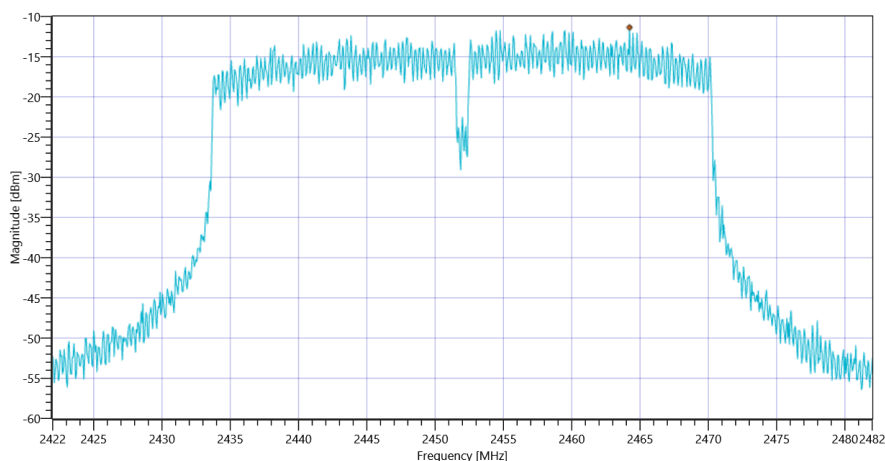

FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT40-mode

General verdict

PASS

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 b-mode


Test References	
TC Start	06.05.2021 09:40:21
Ambit Temp [°C] Humidity [rel%]	24.5 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Antenna Gain Table	
Freq [MHz]	Gain [dBi]
2402	-4.7
6000	-4.7

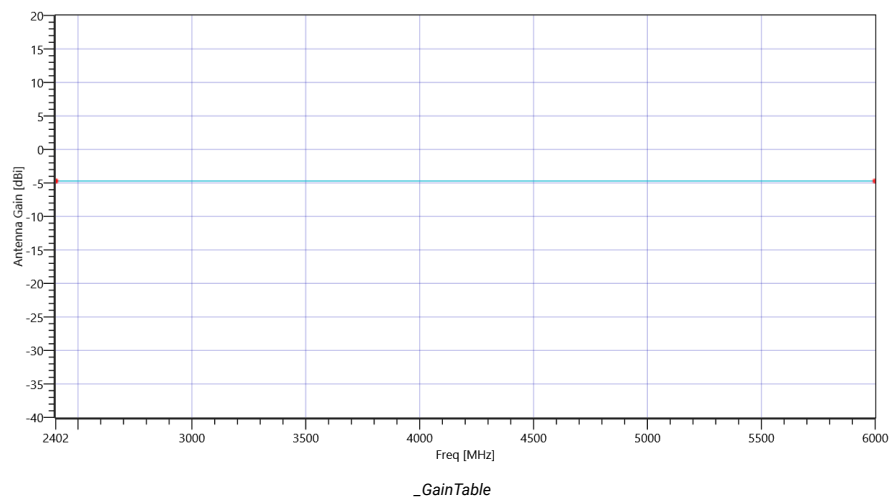

Test at TX 2412 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	16.05	dBm	INFO
Ref. Frequency	---	---	2413.100	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:7					
Duty Cycle (Burst Ratio) max	---	---	0.99	---	INFO
Duty Cycle max	---	---	0.044	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.984	---	INFO
Duty Cycle min	---	---	0.07	dB	INFO
Max TX Burst Length	---	---	12.175	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.2	ms	INFO

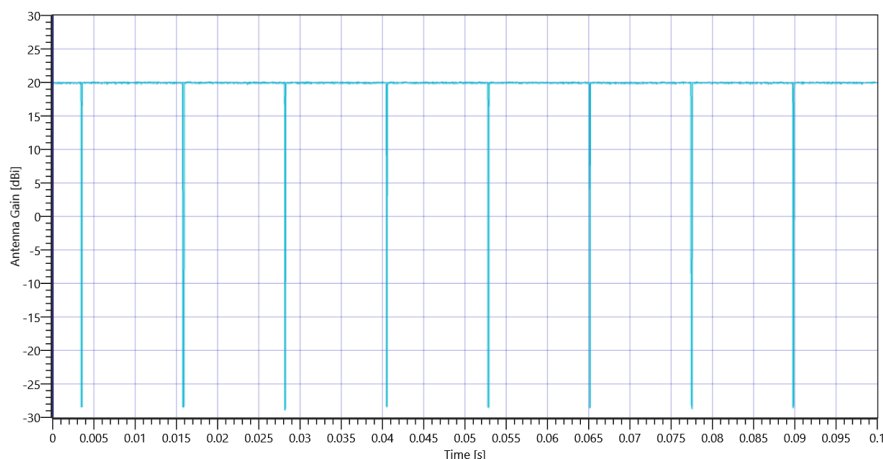

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirr) ~ WLAN2G4 b-mode 2412 MHz - DutyCycle

Band Edge conducted


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	26.05 16.15 25
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

Antenna Gain

Considered Antenna Gain: [dBi]: -4.7 @ 2389.5MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0.07	dB	INFO
Band Power Avg	---	---	-48.96	dBm	INFO
Band Power Avg DC corrected	---	---	-48.89	dBm	PASS

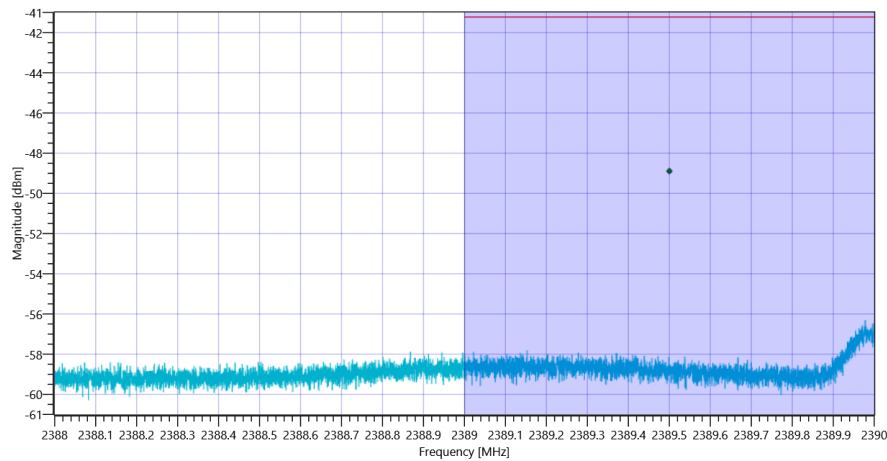

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ WLAN2G4 b-mode

General verdict	PASS
-----------------	------

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 b-mode

Test References

TC Start	06.05.2021 10:15:43
Ambit Temp [°C] Humidity [rel%]	24.7 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter


Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI

Antenna Gain Table

Freq [MHz]	Gain [dBi]
2402	-4.7
6000	-4.7

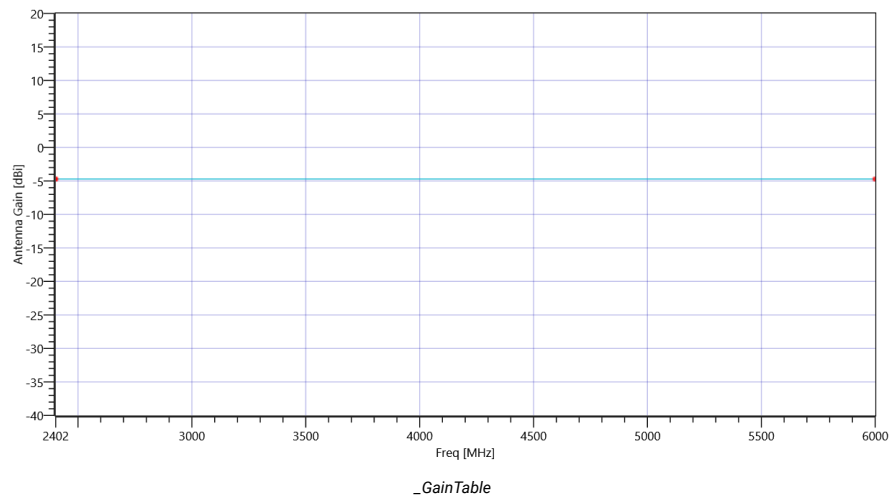

Test at TX 2462 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.12	dBm	INFO
Ref. Frequency	---	---	2463.200	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:7					
Duty Cycle (Burst Ratio) max	---	---	0.99	---	INFO
Duty Cycle max	---	---	0.044	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.984	---	INFO
Duty Cycle min	---	---	0.07	dB	INFO
Max TX Burst Length	---	---	12.175	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.2	ms	INFO

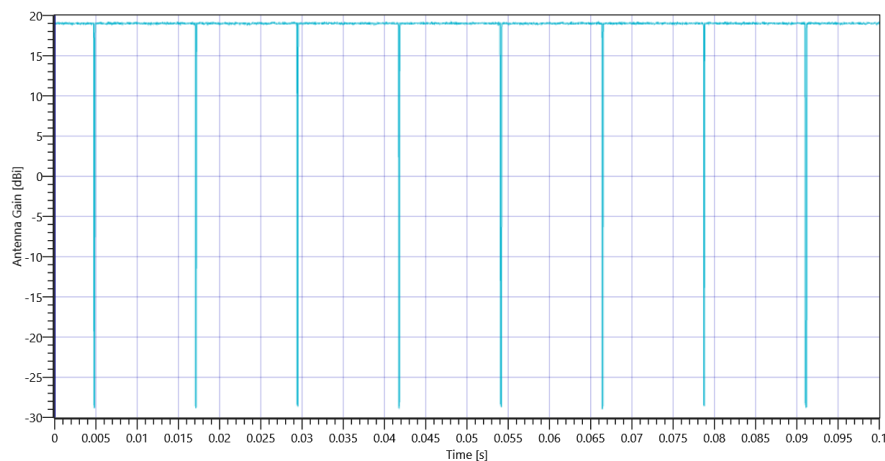

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirr) ~ WLAN2G4 b-mode 2462 MHz - DutyCycle

Band Edge conducted


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.12 15.92 25
Start [MHz] Stop [MHz]	2483.500 2485.500
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

Antenna Gain

Considered Antenna Gain: [dBi]: -4.7 @ 2484MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0.07	dB	INFO
Band Power Avg	---	---	-48.93	dBm	INFO
Band Power Avg DC corrected	---	---	-48.86	dBm	PASS

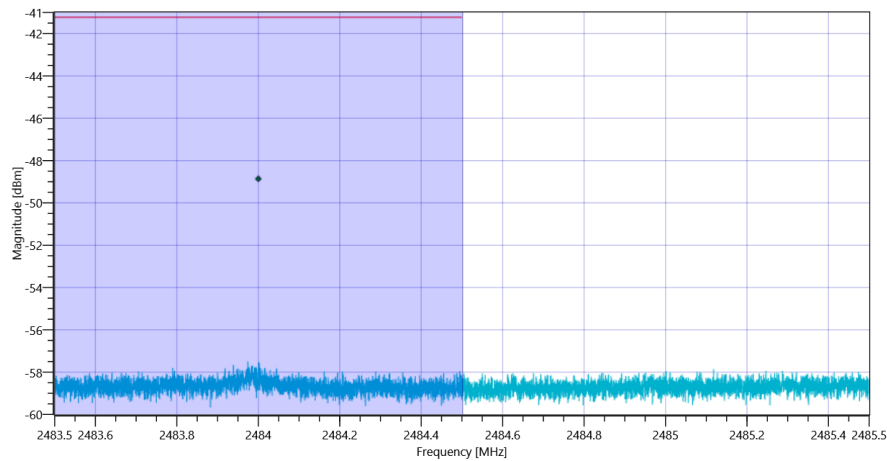

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ WLAN2G4 b-mode

General verdict

PASS

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode


Test References	
TC Start	06.05.2021 10:38:12
Ambit Temp [°C] Humidity [rel%]	24.8 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Antenna Gain Table	
Freq [MHz]	Gain [dBi]
2402	-4.7
6000	-4.7

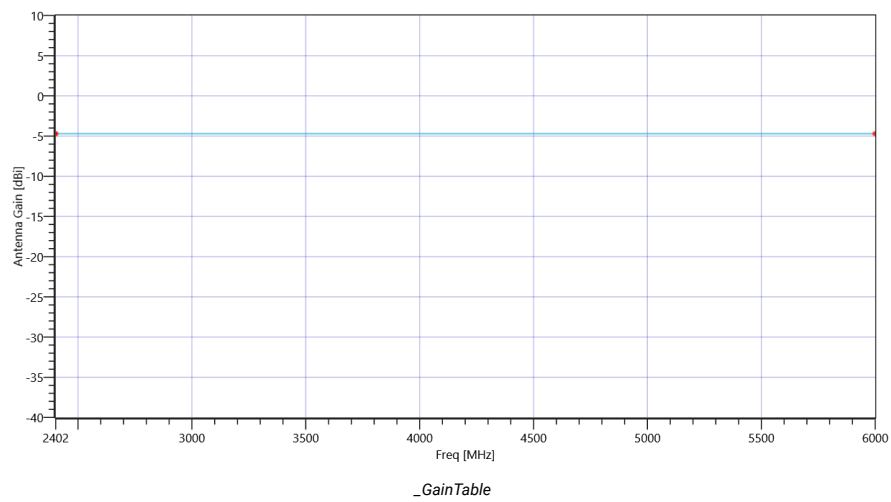

Test at TX 2412 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.98	dBm	INFO
Ref. Frequency	---	---	2414.600	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:45					
Duty Cycle (Burst Ratio) max	---	---	0.941	---	INFO
Duty Cycle max	---	---	0.264	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.899	---	INFO
Duty Cycle min	---	---	0.462	dB	INFO
Max TX Burst Length	---	---	2	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.225	ms	INFO

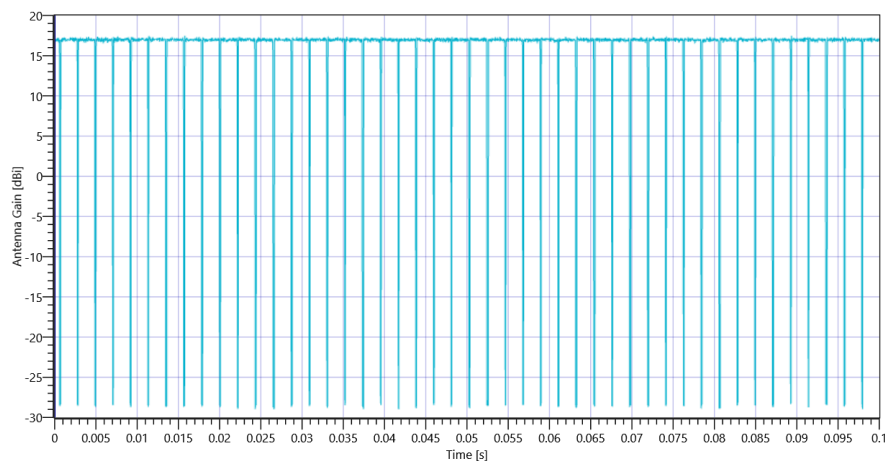

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ WLAN2G4 g-mode 2412 MHz - DutyCycle

Band Edge conducted


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.98 16.15 25
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

Antenna Gain

Considered Antenna Gain: [dBi]: -4.7 @ 2389.5MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0.46	dB	INFO
Band Power Avg	---	---	-48.09	dBm	INFO
Band Power Avg DC corrected	---	---	-47.63	dBm	PASS

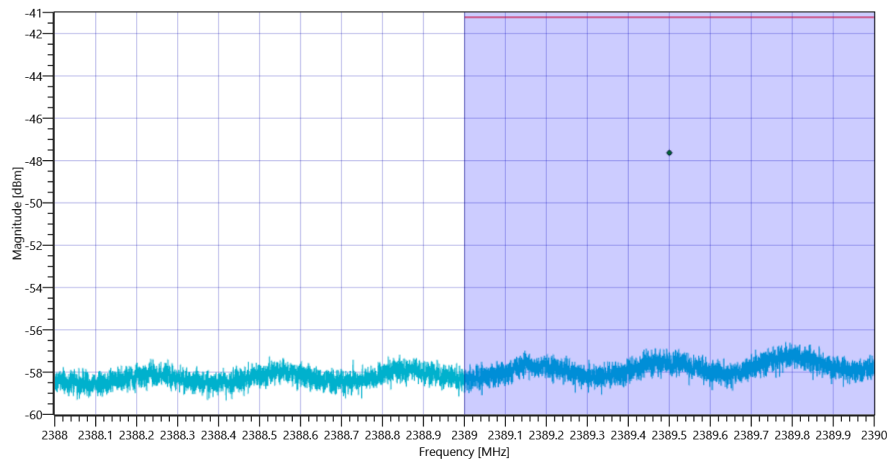

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ WLAN2G4 g-mode

General verdict	PASS
-----------------	------

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 g-mode

Test References

TC Start	06.05.2021 11:06:41
Ambit Temp [°C] Humidity [rel%]	24.9 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter


Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI

Antenna Gain Table

Freq [MHz]	Gain [dBi]
2402	-4.7
6000	-4.7

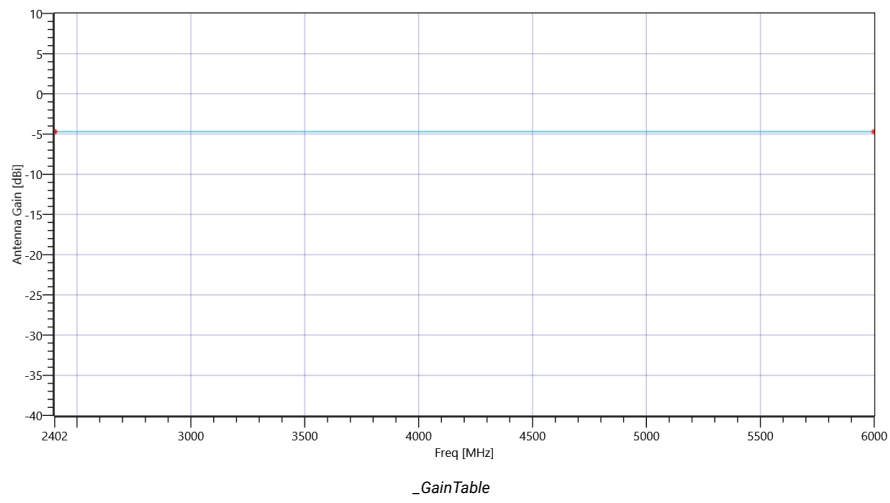

Test at TX 2462 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	14.81	dBm	INFO
Ref. Frequency	---	---	2467.390	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:45					
Duty Cycle (Burst Ratio) max	---	---	0.941	---	INFO
Duty Cycle max	---	---	0.264	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.899	---	INFO
Duty Cycle min	---	---	0.462	dB	INFO
Max TX Burst Length	---	---	2	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.225	ms	INFO

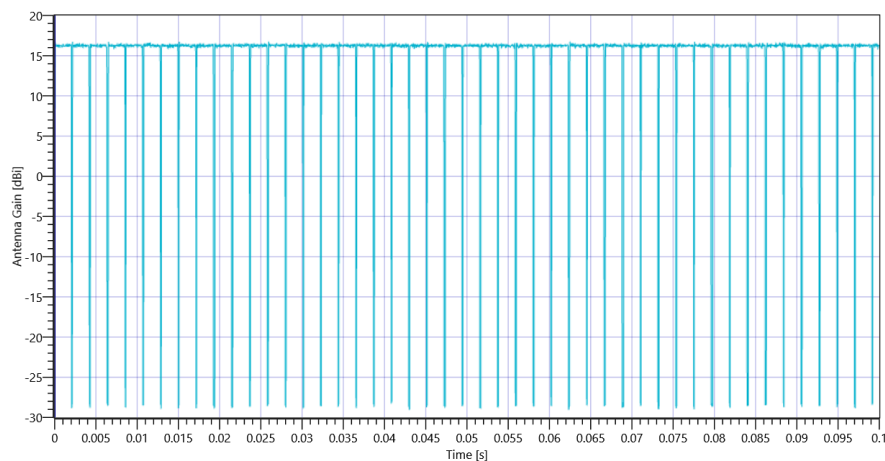

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirr) ~ WLAN2G4 g-mode 2462 MHz - DutyCycle

Band Edge conducted


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	24.81 15.92 25
Start [MHz] Stop [MHz]	2483.500 2485.500
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

Antenna Gain

Considered Antenna Gain: [dBi]: -4.7 @ 2484MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0.46	dB	INFO
Band Power Avg	---	---	-45.42	dBm	INFO
Band Power Avg DC corrected	---	---	-44.96	dBm	PASS

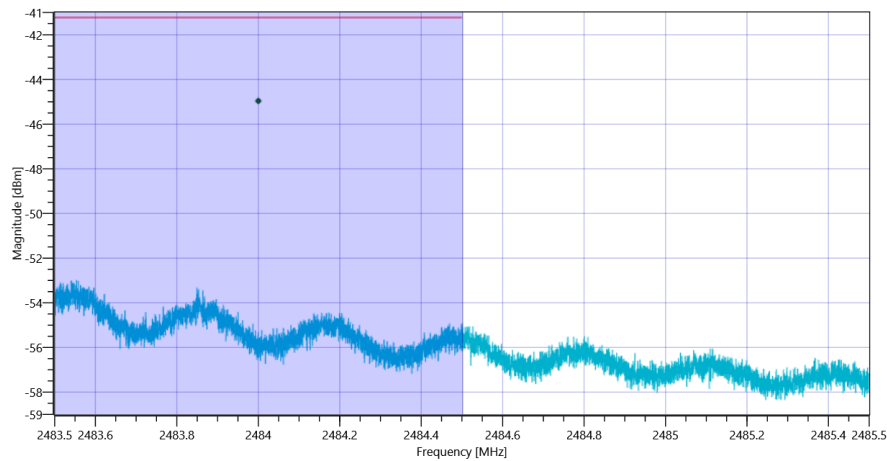

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ WLAN2G4 g-mode

General verdict	PASS
-----------------	------

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode

Test References

TC Start	06.05.2021 11:31:54
Ambit Temp [°C] Humidity [rel%]	24.8 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter


Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI

Antenna Gain Table

Freq [MHz]	Gain [dBi]
2402	-4.7
6000	-4.7

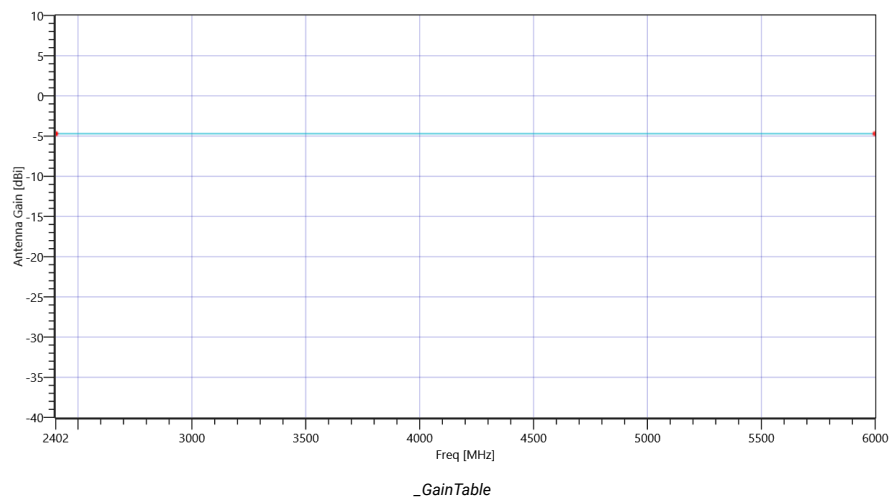

Test at TX 2412 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.78	dBm	INFO
Ref. Frequency	---	---	2415.000	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:49					
Duty Cycle (Burst Ratio) max	---	---	0.938	---	INFO
Duty Cycle max	---	---	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.892	---	INFO
Duty Cycle min	---	---	0.496	dB	INFO
Max TX Burst Length	---	---	1.875	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.225	ms	INFO

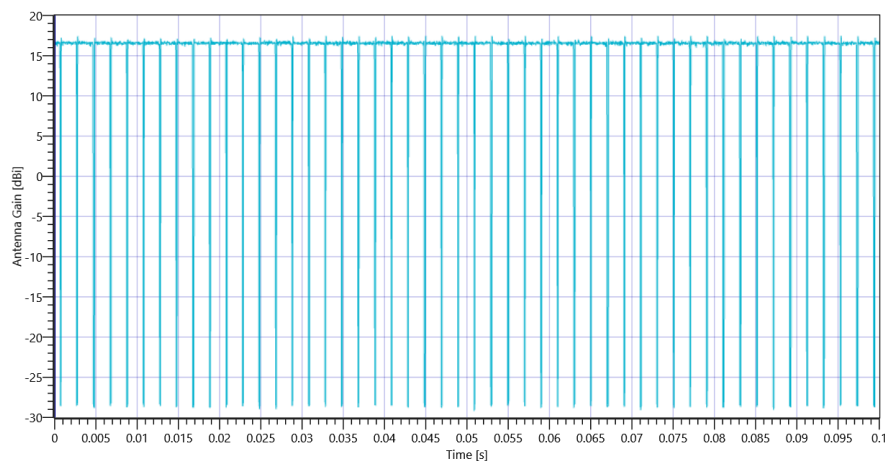

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirr) ~ WLAN2G4 nHT20-mode 2412 MHz - DutyCycle

Band Edge conducted


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.78 16.15 25
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

Antenna Gain

Considered Antenna Gain: [dBi]: -4.7 @ 2389.5MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0.5	dB	INFO
Band Power Avg	---	---	-47.96	dBm	INFO
Band Power Avg DC corrected	---	---	-47.46	dBm	PASS

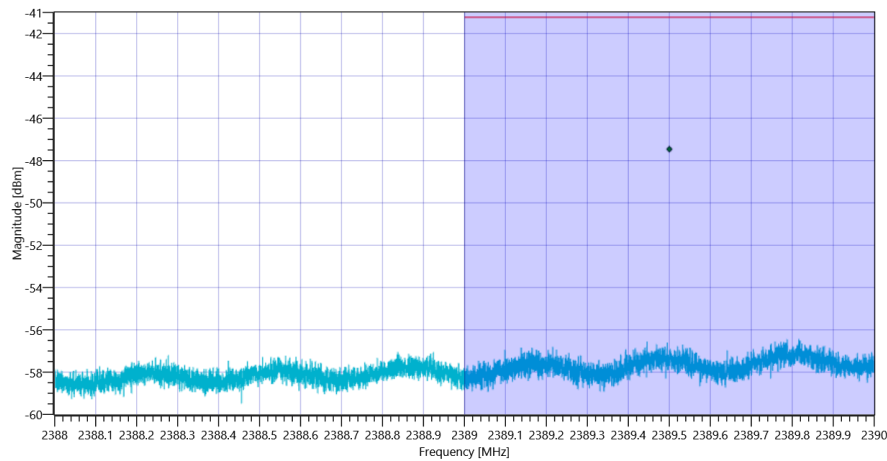

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ WLAN2G4 nHT20-mode

General verdict

PASS

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT20-mode


Test References	
TC Start	06.05.2021 11:54:31
Ambit Temp [°C] Humidity [rel%]	24.9 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Antenna Gain Table	
Freq [MHz]	Gain [dBi]
2402	-4.7
6000	-4.7

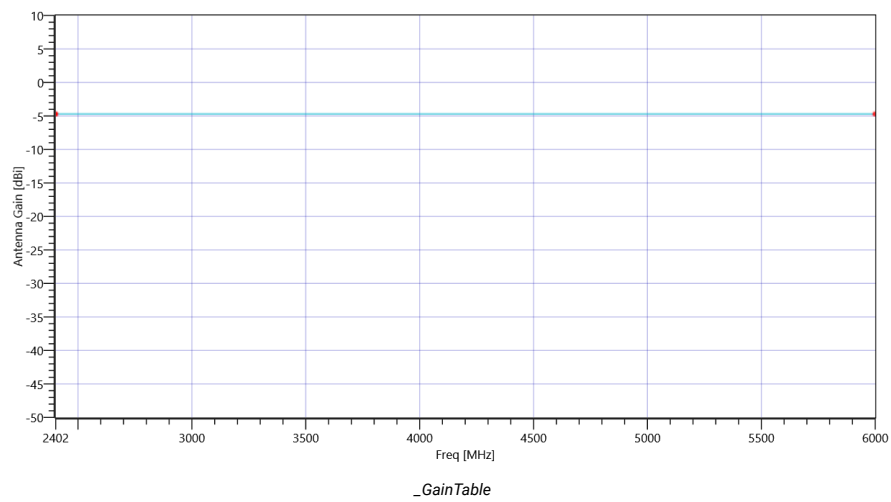

Test at TX 2462 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.34	dBm	INFO
Ref. Frequency	---	---	2465.700	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:47					
Duty Cycle (Burst Ratio) max	---	---	0.938	---	INFO
Duty Cycle max	---	---	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.708	---	INFO
Duty Cycle min	---	---	1.5	dB	INFO
Max TX Burst Length	---	---	1.875	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.775	ms	INFO

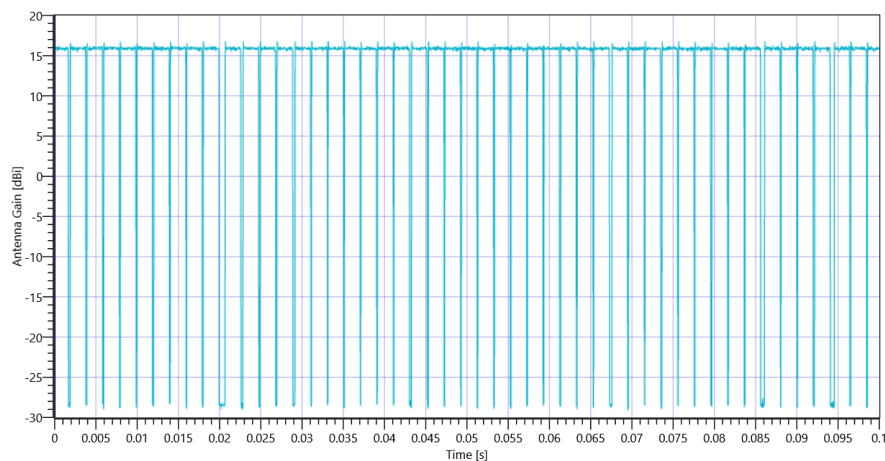

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirr) ~ WLAN2G4 nHT20-mode 2462 MHz - DutyCycle

Band Edge conducted


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.34 15.92 25
Start [MHz] Stop [MHz]	2483.500 2485.500
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

Antenna Gain

Considered Antenna Gain: [dBi]: -4.7 @ 2484MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	1.5	dB	INFO
Band Power Avg	---	---	-44.38	dBm	INFO
Band Power Avg DC corrected	---	---	-42.88	dBm	PASS

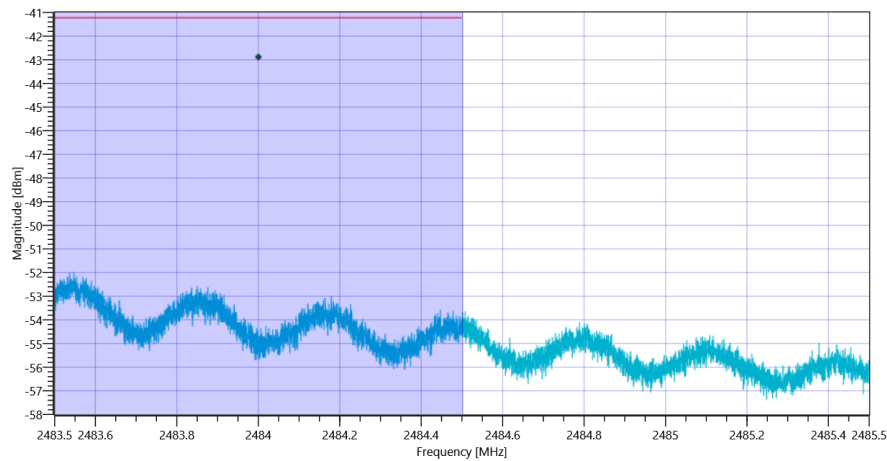

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ WLAN2G4 nHT20-mode

General verdict

PASS

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT40-mode

Test References

TC Start	06.05.2021 12:07:30
Ambit Temp [°C] Humidity [rel%]	25.1 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter


Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI

Antenna Gain Table

Freq [MHz]	Gain [dBi]
2402	-4.7
6000	-4.7

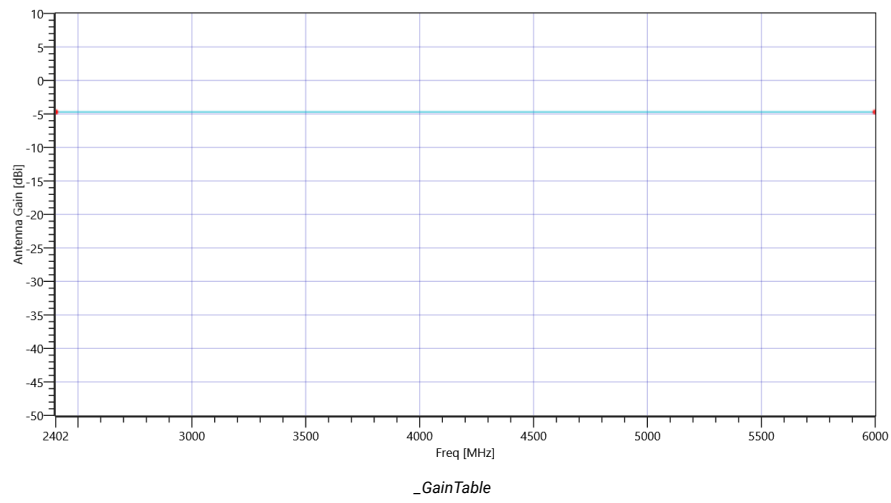

Test at TX 2422 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	12.26	dBm	INFO
Ref. Frequency	---	---	2417.800	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:93					
Duty Cycle (Burst Ratio) max	---	---	0.878	---	INFO
Duty Cycle max	---	---	0.565	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.8	---	INFO
Duty Cycle min	---	---	0.969	dB	INFO
Max TX Burst Length	---	---	0.9	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.225	ms	INFO

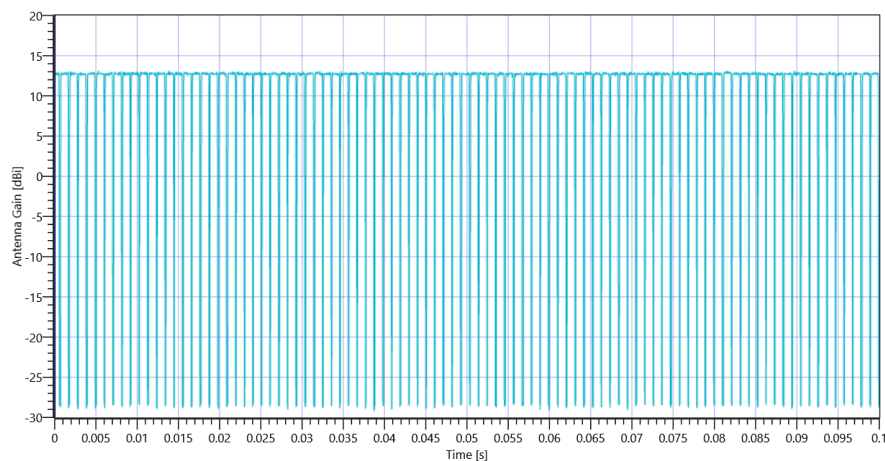

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirr) ~ WLAN2G4 nHT40-mode 2422 MHz - DutyCycle

Band Edge conducted


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	22.26 16.1 25
Start [MHz] Stop [MHz]	2388.000 2390.000
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

Antenna Gain

Considered Antenna Gain: [dBi]: -4.7 @ 2389.5MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0.97	dB	INFO
Band Power Avg	---	---	-46.59	dBm	INFO
Band Power Avg DC corrected	---	---	-45.62	dBm	PASS

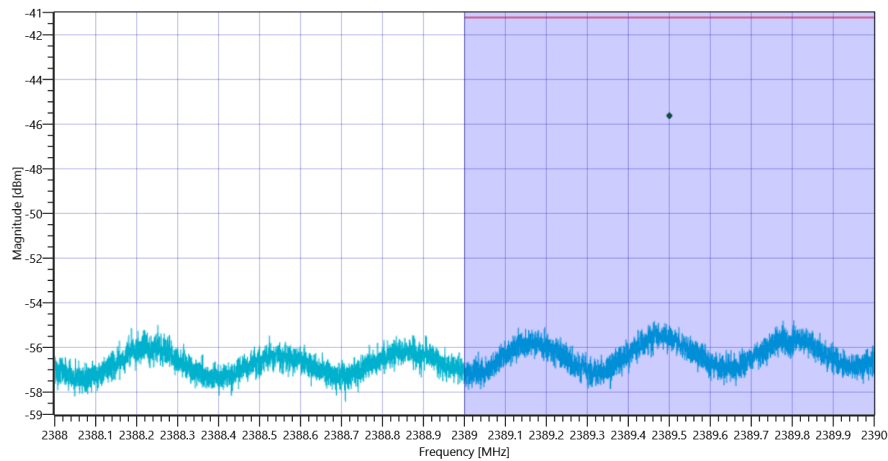

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ WLAN2G4 nHT40-mode

General verdict

PASS

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS ~ WLAN2G4 nHT40-mode


Test References	
TC Start	06.05.2021 12:31:19
Ambit Temp [°C] Humidity [rel%]	25.1 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction
TC Version	0.0.1
My Description	FCC 15.247 Restricted Band Edge Cond. Avg DC corrected DTS - WLAN 2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Antenna Gain Table	
Freq [MHz]	Gain [dBi]
2402	-4.7
6000	-4.7

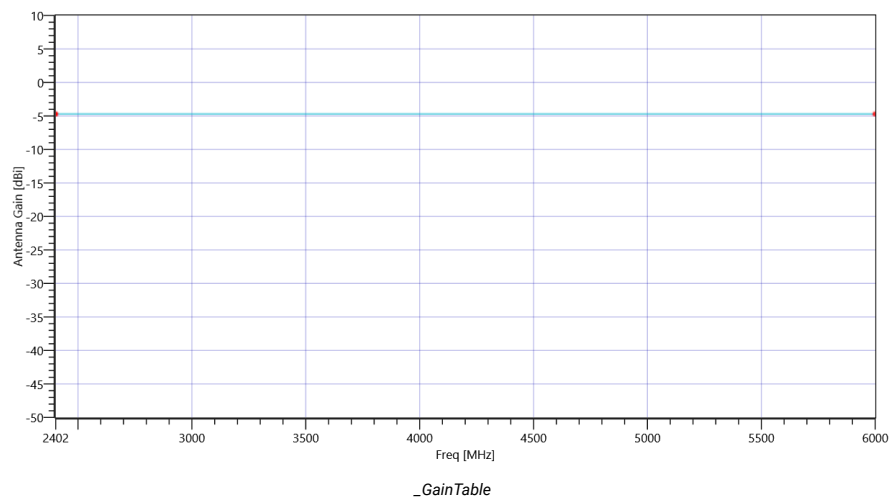

Test at TX 2452 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	10.64	dBm	INFO
Ref. Frequency	---	---	2458.490	MHz	INFO

Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:94					
Duty Cycle (Burst Ratio) max	---	---	0.878	---	INFO
Duty Cycle max	---	---	0.565	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.814	---	INFO
Duty Cycle min	---	---	0.894	dB	INFO
Max TX Burst Length	---	---	0.9	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.2	ms	INFO

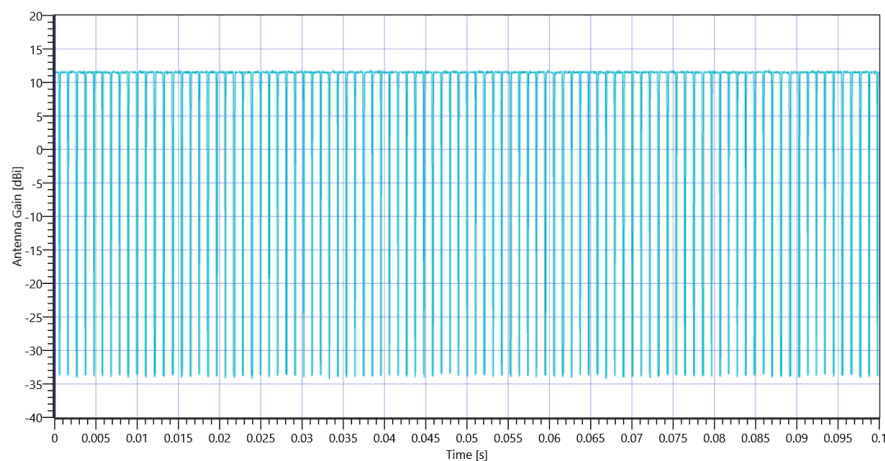

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirr) ~ WLAN2G4 nHT40-mode 2452 MHz - DutyCycle

Band Edge conducted


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.64 15.95 20
Start [MHz] Stop [MHz]	2483.500 2485.500
RBW [MHz] VBW [MHz]	0.100000 0.500000
Detector TraceMode	RMS AVER
Sweep: Time [ms] Count Points per Section Type	32 300 32000 SWE

Antenna Gain

Considered Antenna Gain: [dBi]: -4.7 @ 2484MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle worst case	---	---	0.89	dB	INFO
Band Power Avg	---	---	-42.9	dBm	INFO
Band Power Avg DC corrected	---	---	-42.01	dBm	PASS

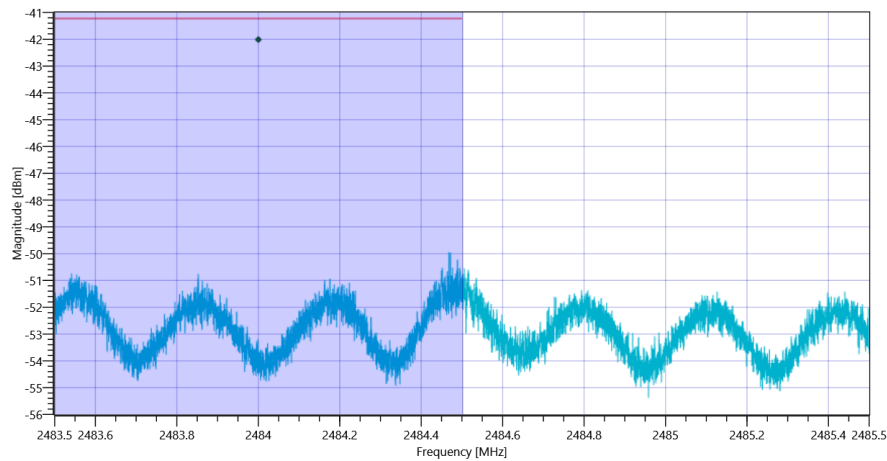

FCC Part 15.247 Restricted Band Edge Conducted Avg DC corrected DTS (eirp) ~ WLAN2G4 nHT40-mode

General verdict	PASS
-----------------	------

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode

Test References	
TC Start	06.05.2021 09:34:14
Ambit Temp [°C] Humidity [rel%]	24.5 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	16.18	dBm	INFO
Ref. Frequency	---	---	2413.100	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.18 0 35
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2411.00 MHz	---	---	12.46	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 22379.333 MHz	0	---	17.28	dB	INFO

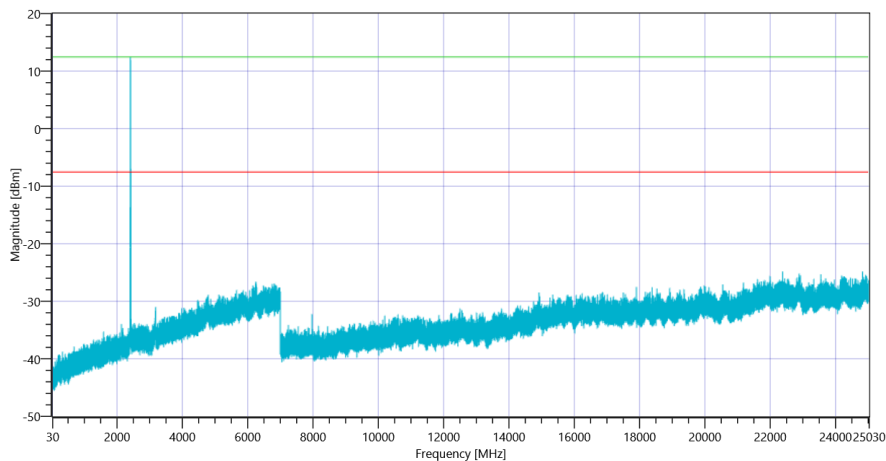

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2412

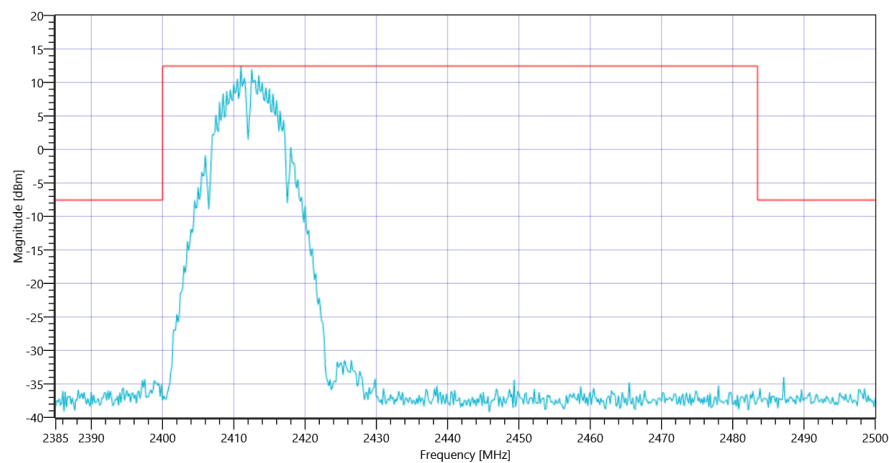

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2412

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode

Test References	
TC Start	06.05.2021 09:58:36
Ambit Temp [°C] Humidity [rel%]	24.6 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	14.44	dBm	INFO
Ref. Frequency	---	---	2438.100	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.44 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2436.50 MHz	---	---	11.00	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-152.55	dB	INFO

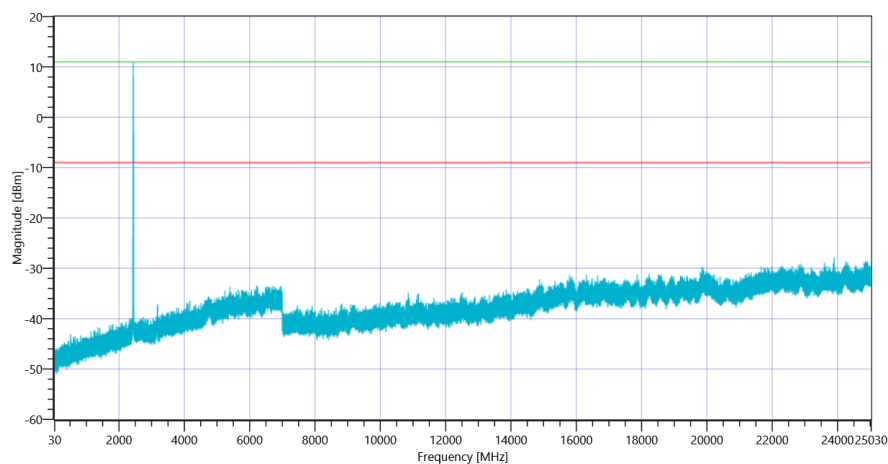

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2437

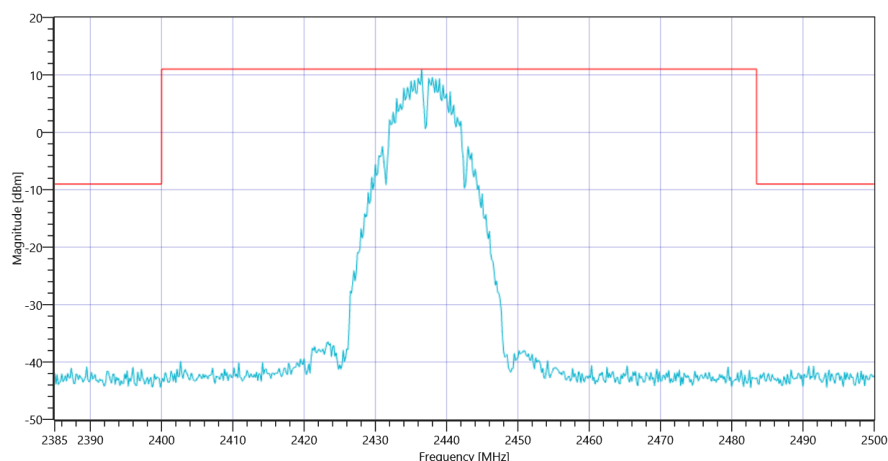

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2437

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode

Test References	
TC Start	06.05.2021 10:09:39
Ambit Temp [°C] Humidity [rel%]	24.7 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 b-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.13	dBm	INFO
Ref. Frequency	---	---	2463.200	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.13 0 35
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2463.00 MHz	---	---	11.40	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-158.03	dB	INFO

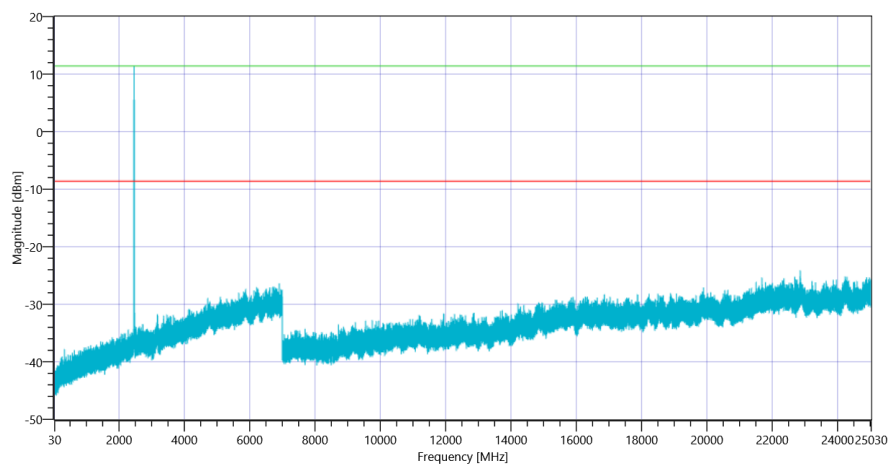

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2462

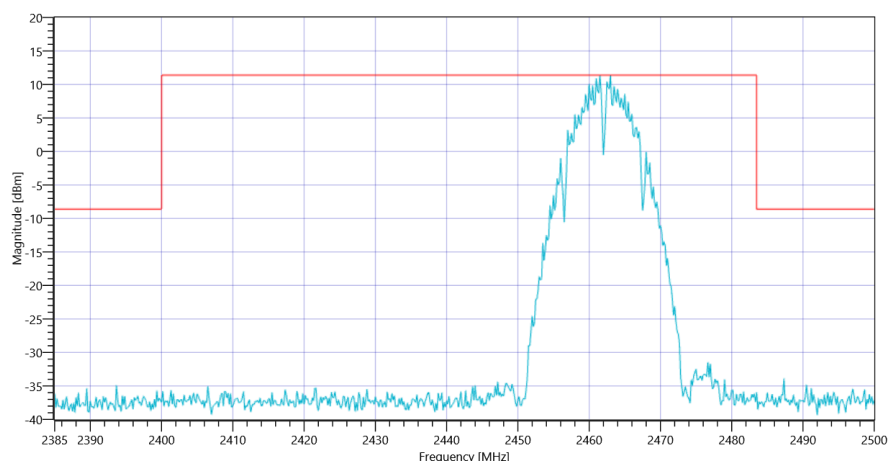

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 b-mode 2462

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode

Test References	
TC Start	06.05.2021 10:32:05
Ambit Temp [°C] Humidity [rel%]	24.8 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	16.55	dBm	INFO
Ref. Frequency	---	---	2413.700	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.55 0 35
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2408.33 MHz	---	---	7.37	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 22901.5 MHz	0	---	11.97	dB	INFO

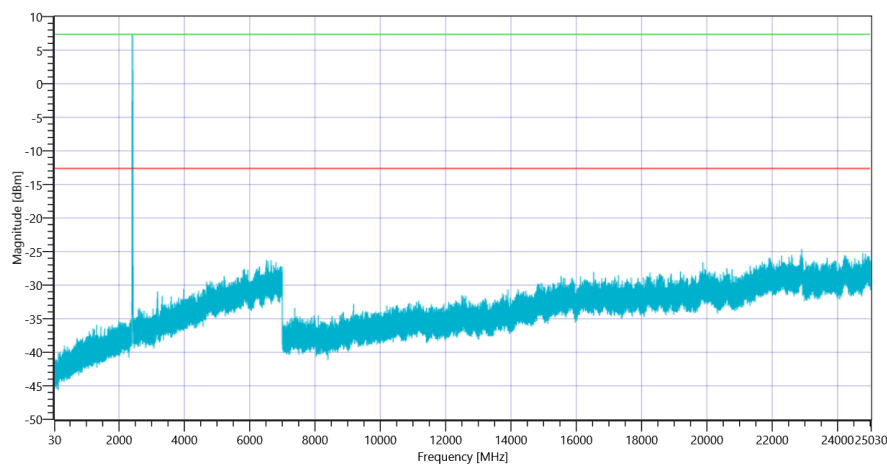

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2412

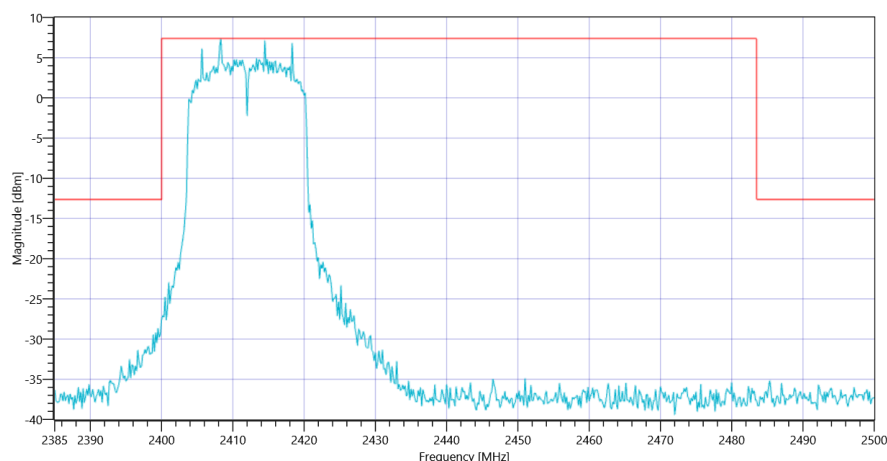

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2412

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode

Test References	
TC Start	06.05.2021 10:47:09
Ambit Temp [°C] Humidity [rel%]	24.9 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	14.08	dBm	INFO
Ref. Frequency	---	---	2434.100	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.08 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2442.00 MHz	---	---	6.24	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 22436.333 MHz	0	---	14.61	dB	INFO

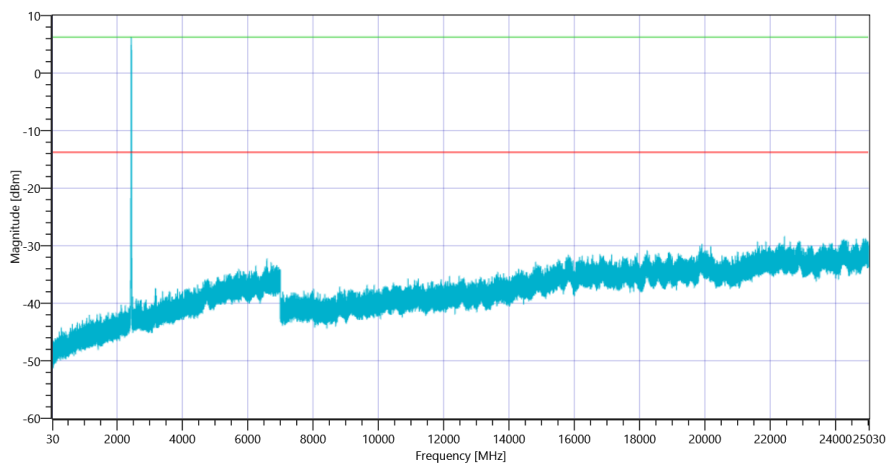

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2437

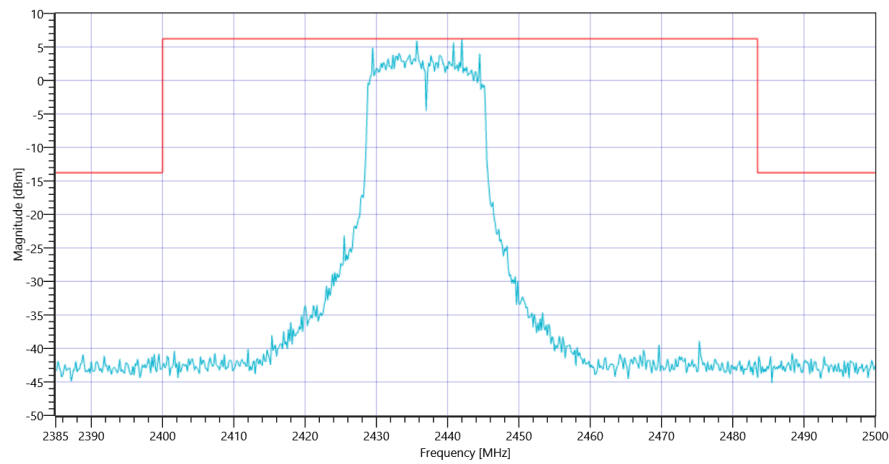

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2437

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode

Test References	
TC Start	06.05.2021 11:00:35
Ambit Temp [°C] Humidity [rel%]	24.9 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 g-mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.49	dBm	INFO
Ref. Frequency	---	---	2464.100	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.49 0 35
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2464.50 MHz	---	---	7.88	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-157.64	dB	INFO

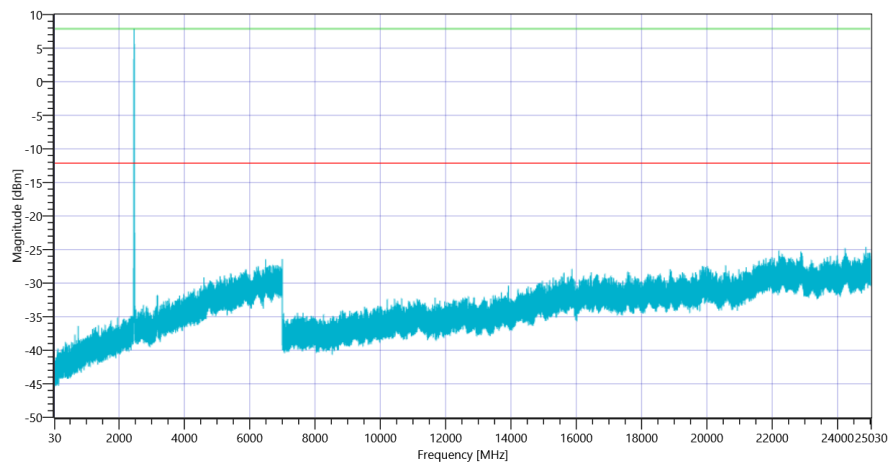

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2462

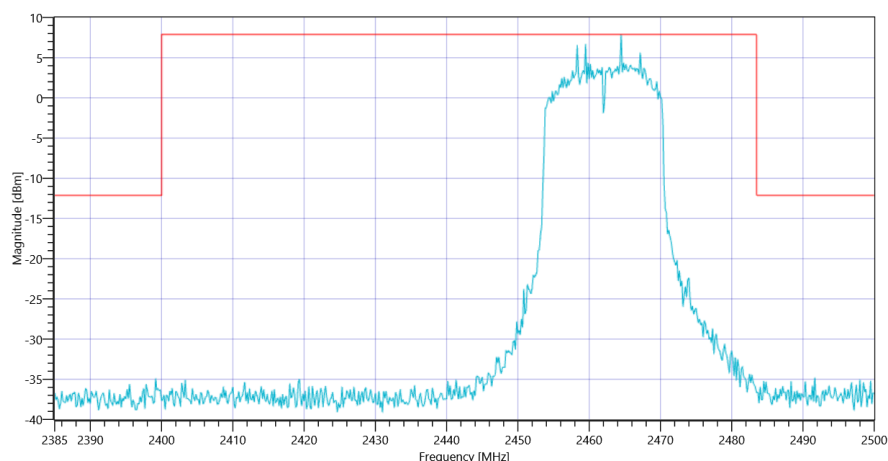

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2462

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode

Test References	
TC Start	06.05.2021 11:25:49
Ambit Temp [°C] Humidity [rel%]	24.9 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	15.76	dBm	INFO
Ref. Frequency	---	---	2409.400	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.76 0 35
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2414.50 MHz	---	---	8.38	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24864.5 MHz	0	---	12.99	dB	INFO

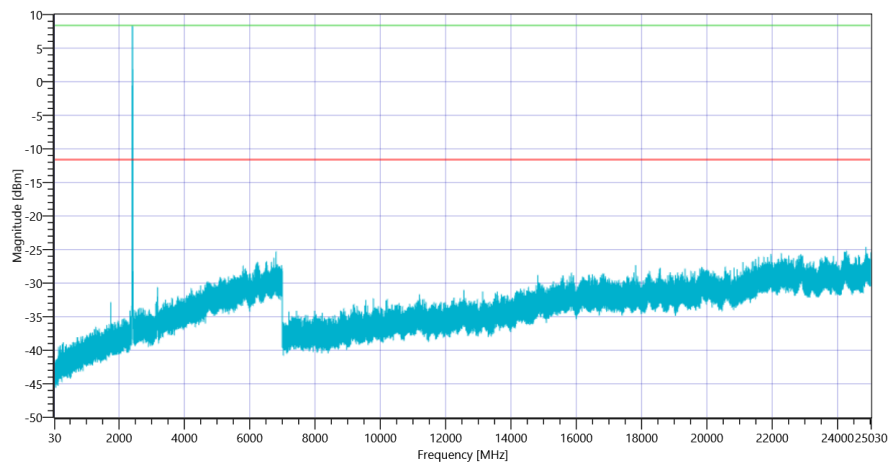

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2412

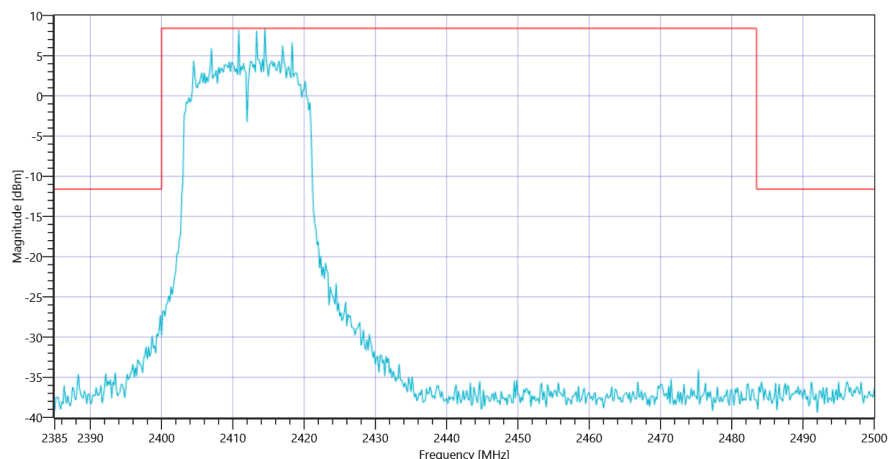

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2412

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode

Test References	
TC Start	06.05.2021 11:37:20
Ambit Temp [°C] Humidity [rel%]	24.9 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	14.33	dBm	INFO
Ref. Frequency	---	---	2432.800	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.33 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2439.50 MHz	---	---	6.88	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24244.667 MHz	0	---	15.62	dB	INFO

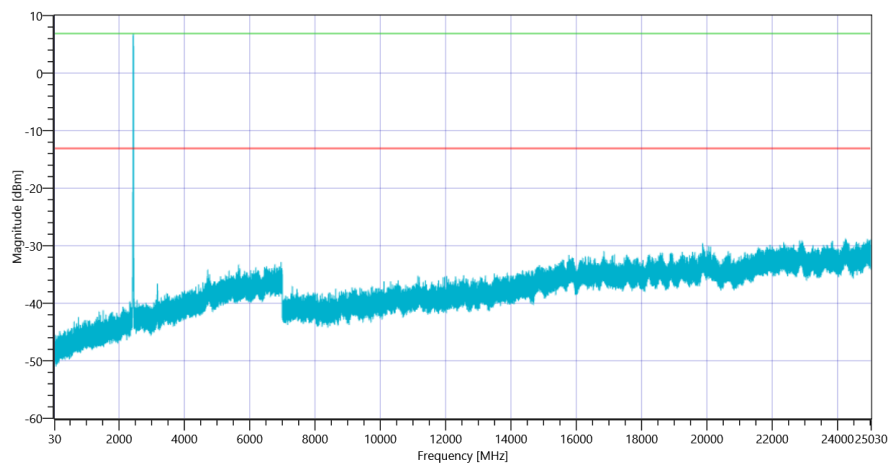

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2437

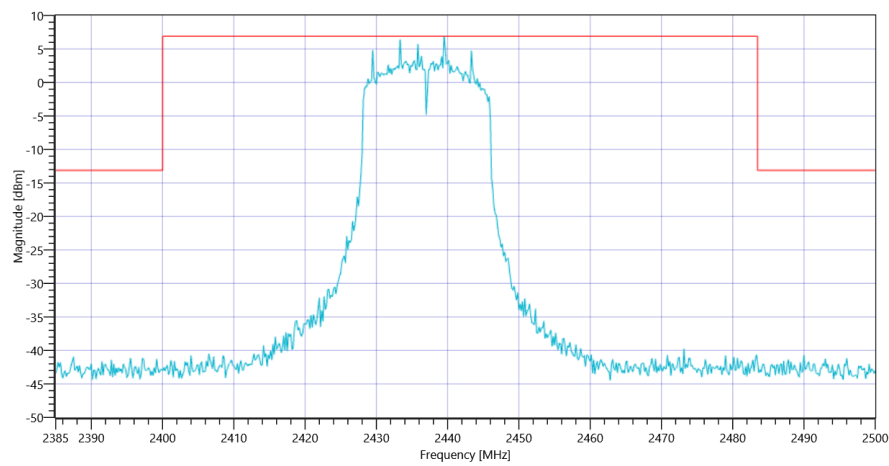

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2437

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode

Test References	
TC Start	06.05.2021 11:48:24
Ambit Temp [°C] Humidity [rel%]	25.0 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	14.58	dBm	INFO
Ref. Frequency	---	---	2465.100	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.58 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2459.67 MHz	---	---	6.15	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24995.5 MHz	0	---	13.97	dB	INFO

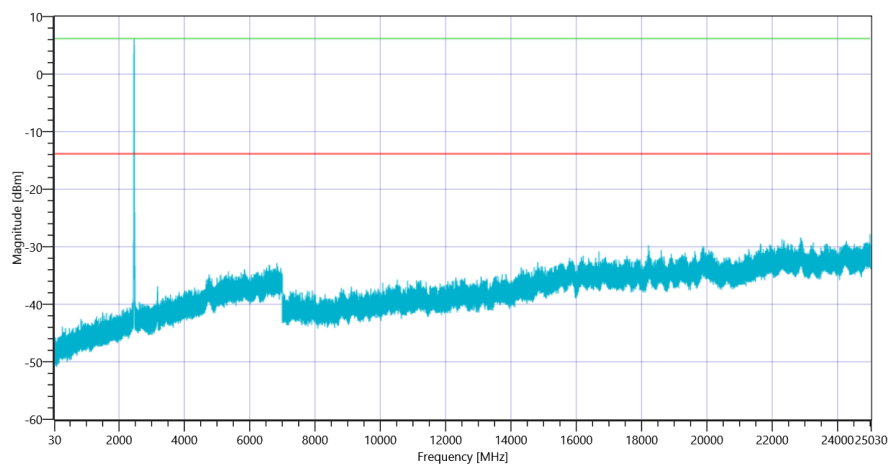

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2462

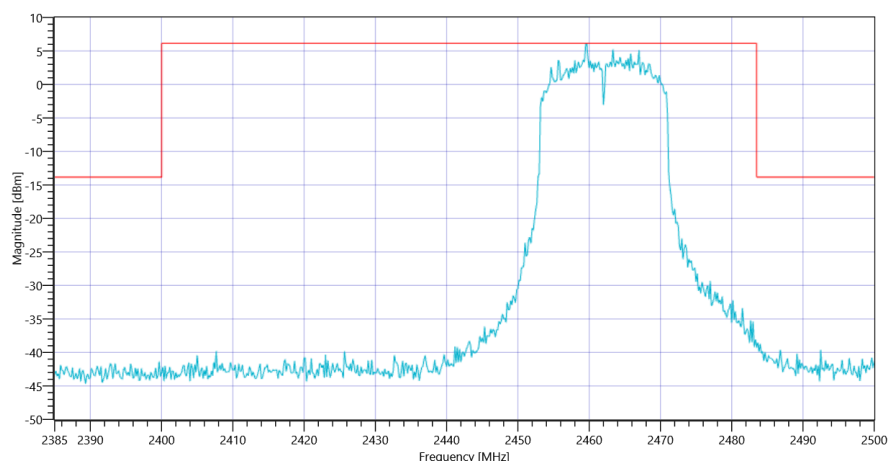

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2462

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode

Test References	
TC Start	06.05.2021 12:01:23
Ambit Temp [°C] Humidity [rel%]	25.0 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2422 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	11.69	dBm	INFO
Ref. Frequency	---	---	2417.600	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.69 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2417.00 MHz	---	---	4.12	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24777 MHz	0	---	12.53	dB	INFO

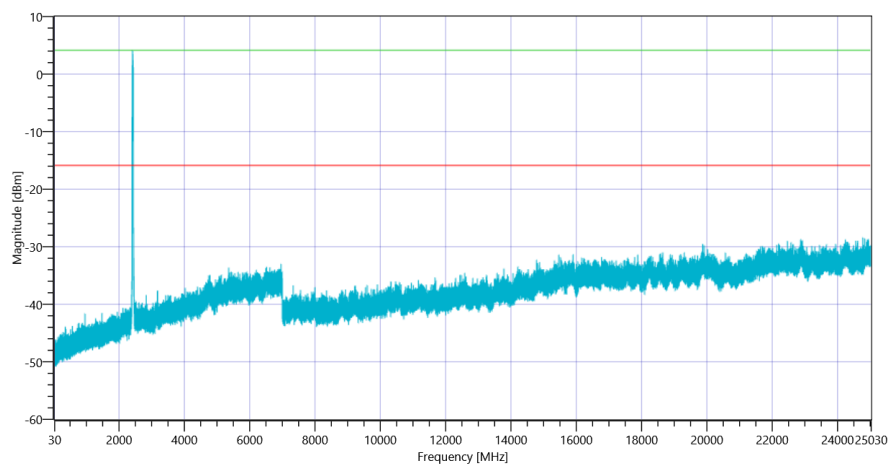

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode 2422

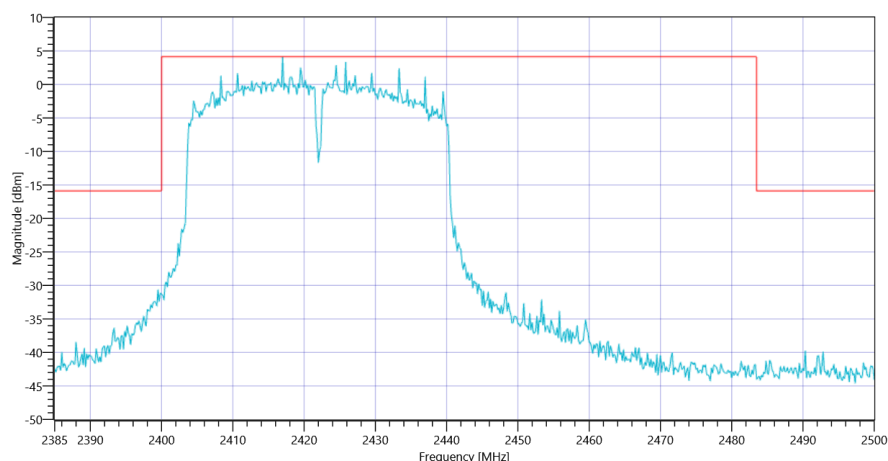

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode 2422

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode

Test References	
TC Start	06.05.2021 12:12:50
Ambit Temp [°C] Humidity [rel%]	25.0 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	10.91	dBm	INFO
Ref. Frequency	---	---	2430.210	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.91 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2430.83 MHz	---	---	2.36	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24966.333 MHz	0	---	10.55	dB	INFO

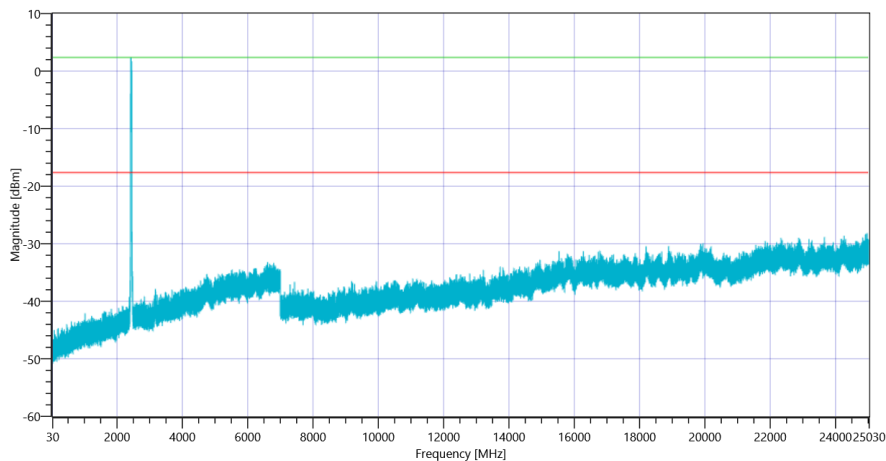

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode 2437

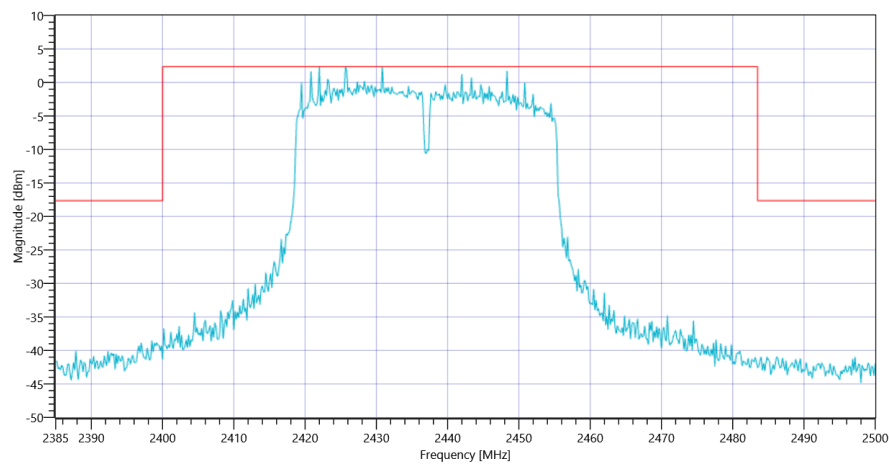

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode 2437

General verdict

PASS

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode

Test References	
TC Start	06.05.2021 12:25:11
Ambit Temp [°C] Humidity [rel%]	25.1 28
System Version	3.0.1.0
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60	
SwitchMatrix: CTCadvanced,SPM-4 NI DAQ,28016133,NI	

Test at TX 2452 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	10.60	dBm	INFO
Ref. Frequency	---	---	2460.890	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.60 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2460.83 MHz	---	---	2.95	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24257.167 MHz	0	---	11.5	dB	INFO

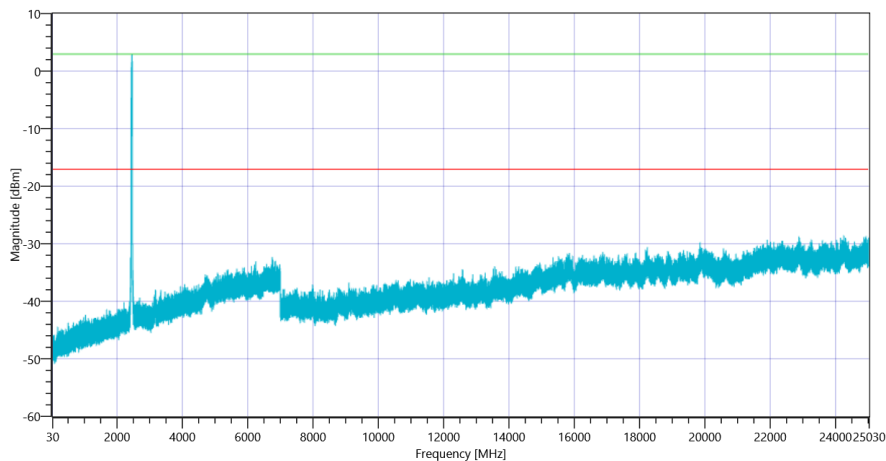

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode 2452

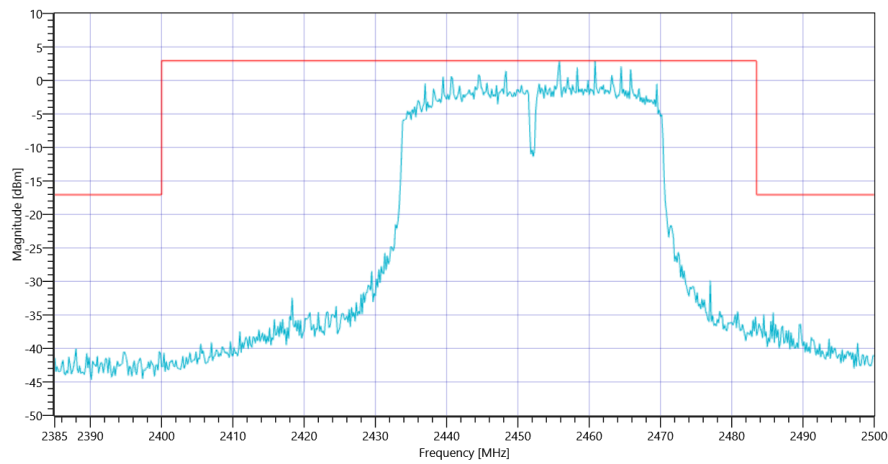

FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode 2452

General verdict

PASS

- END OF DOCUMENT -