verify No.151891024438

위변조방지/진위확인
www.docuqr.com

TEST REPORT

Eurofins KCTL Co.,Ltd.
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

eurofins | KCTL

1. Client

- Name : Golfzon. co., LTD
- Address : GOLFZON TOWER SEOUL 10~11F, 13F~17F, 19F, 735, Yeongdong-daero, Gangnam, Seoul, Republic of Korea
- Date of Receipt : 2022-07-21

2. Use of Report : Certification

3. Name of Product / Model : Portable Golfsensor_RADAR / GZ-GWRS-22

4. Manufacturer / Country of Origin : Teravalue Inc., / Korea

5. FCC ID : N5Y-GZ-GWRS-22

6. Date of Test : 2022-08-09 to 2022-11-24

7. Location of Test : ■ Permanent Testing Lab ☐ On Site Testing
(Address:65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

8. Test method used : FCC Part 15 Subpart C, 15.247

9. Test Result : Refer to the test result in the test report

Affirmation	Tested by Name : Taeyoung Kim (Signature)	Technical Manager Name : Harim Lee (Signature)

2023-02-15

Eurofins KCTL Co.,Ltd.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.

REPORT REVISION HISTORY

Date	Revision	Page No
2023-02-15	Originally issued	-

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ **Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:**

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ **Statement not required by the standard or client used for type testing**

CONTENTS

1. General information 4
2. Device information 4
2.1. Accessory information 4
2.2. Frequency/channel operations 5
2.3. Duty Cycle Factor 5
3. Antenna requirement 6
4. Summary of tests 7
5. Measurement uncertainty 8
6. Measurement results explanation example 9
7. Test results 10
7.1. Maximum peak output power 10
7.2. Peak Power Spectral Density 14
7.3. 6 dB Bandwidth(DTS Channel Bandwidth) 16
7.4. Spurious Emission, Band Edge and Restricted bands 18
7.5. Conducted Spurious Emission 30
7.6. AC Conducted emission 32
8. Measurement equipment 34

1. General information

Client	:	Golfzon. co., LTD
Address	:	GOLFZON TOWER SEOUL 10~11F, 13F~17F, 19F, 735, Yeongdong-daero, Gangnam, Seoul, Republic of Korea
Manufacturer	:	Teravalue Inc.,
Address	:	70, Gasan digital 2-ro, Geumcheon-gu, Seoul, Republic of Korea
Laboratory	:	Eurofins KCTL Co.,Ltd.
Address	:	65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations	:	FCC Site Designation No: KR0040, FCC Site Registration No: 687132 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056 CAB Identifier: KR0040, ISED Number: 8035A KOLAS No.: KT231

2. Device information

Equipment under test	:	Portable Golfsensor_RADAR
Model	:	GZ-GWRS-22
Frequency range	:	2 412 ㎒ ~ 2 462 ㎒ (WIFI_802.11b/g/n_HT20) 2 402 ㎒ ~ 2 480 ㎒ (Bluetooth Low Energy) 24 150 ㎒ (24 ㎓ radar sensor)
Modulation technique	:	WIFI (802.11b/g/n20)_DSSS, OFDM GFSK (Bluetooth Low Energy) CW (24 ㎓ radar sensor)
Number of channels	:	11 ch (WIFI_802.11b/g/n_HT20) 40 ch (Bluetooth Low Energy)
Power source	:	DC 7.2 V
Antenna specification	:	Cable dipole antenna (WIFI, Bluetooth Low Energy) Patch Array antenna (24 ㎓ radar sensor)
Antenna gain	:	-8.68 ㏈i (WIFI, Bluetooth Low Energy) 2.37 ㏈i (24 ㎓ radar sensor)
Software version	:	Wave-R1-230201-146
Hardware version	:	Wave Radar V1.0
Operation temperature	:	-10 ℃ ~ 50 ℃

2.1. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
AC Adapter	Channel Well Technology	KPL-040F-VI	N/A	Input : 100-240V / 50/60Hz 1.7A Output : 12.0V/3.33A

2.2. Frequency/channel operations

This device contains the following capabilities:
Bluetooth Low Energy, WIFI (802.11b/g/n HT20), 24 GHz radar sensor

Ch.	Frequency (MHz)
00	2 402
. .	. .
19	2 440
. .	. .
39	2 480

Table 2.2.1. Bluetooth Low Energy

2.3. Duty Cycle Factor

Test mode	Period (ms)	T_{on} time (ms)	Duty cycle		Duty Cycle Factor (dB)
			(Linear)	(%)	
1M Bits/s, 37 Packet	0.625 6	0.389 6	0.608 2	62.28	2.056 8

Notes.

1. Duty cycle (Linear) = T_{on} time / Period
2. DCF(Duty cycle factor) = 10_{log}(1/duty cycle)

1M Bits/s, 37 Packet

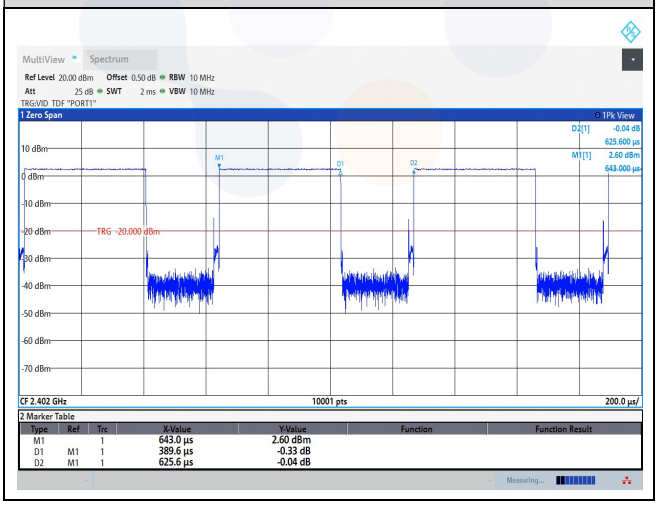

3. Antenna requirement

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4. Summary of tests

FCC Part section(s)	Parameter	Test condition	Test results
15.247(b)(3)	Maximum Peak Output Power	Conducted	Pass
15.247(e)	Peak Power Spectral Density		Pass
15.247(a)(2)	6 dB Channel Bandwidth		Pass
15.207(a)	AC Conducted Emissions		Pass
15.247(d)	Conducted Spurious Emissions		Pass
15.205(a), 15.209(a)	Spurious emission	Radiated	Pass
	Band-edge, restricted band		Pass

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. According to exploratory test no any obvious emission were detected from 9 ㎑ to 30 ㎒. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
3. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation
4. The device supports only packet length 37 Bytes in 1Mbps.
5. The test procedure(s) in this report were performed in accordance as following.
   - ANSI C63.10-2013
   - KDB 558074 D01 v05r02

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of k=2 to indicated a 95 % level of confidence. The measurement data shown herein meets of exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty (±)	
Conducted RF power	0.9 dB	
Conducted spurious emissions	1.1 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz	2.4 dB
	30 MHz ~ 1 000 MHz	2.3 dB
	1 000 MHz ~ 18 000 MHz	5.6 dB
	Above 18 000 GHz	5.7 dB
Conducted emissions	9 kHz ~ 150 kHz	1.6 dB
	150 kHz ~ 30 MHz	1.7 dB

6. Measurement results explanation example

Frequency (㎒)	Factor(㏈)	Frequency (㎒)	Factor(㏈)
30	9.73	9 000	12.73
50	9.72	10 000	12.76
100	9.82	11 000	13.18
200	9.98	12 000	13.19
300	10.07	13 000	13.36
400	10.16	14 000	13.43
500	10.23	15 000	14.09
600	10.31	16 000	13.77
700	10.36	17 000	13.85
800	10.41	18 000	14.49
900	10.51	19 000	13.79
1 000	10.55	20 000	14.06
2 000	10.91	21 000	14.33
3 000	11.23	22 000	14.80
4 000	11.49	23 000	14.80
5 000	11.70	24 000	14.56
6 000	11.97	25 000	14.55
7 000	12.05	26 000	14.76
8 000	12.44	26 500	14.93

Note : Offset(㏈) = RF cable loss(㏈) + Attenuator(㏈)

7. Test results

7.1. Maximum peak output power

Test setup



Limit

According to §15.247(b)(3), For systems using digital modulation in the 902-928 ㎒, 2 400-2 483.5 ㎒, and 5 725-5 850 ㎒ bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 ㏈i. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 ㏈i are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in ㏈ that the directional gain of the antenna exceeds 6 ㏈i.

Test procedure

ANSI C63.10 - Section 11.9
Used test method is section 11.9.1.3 and 11.9.2.3.1

Test settings

General
Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth (see ANSI C63.10 for measurement guidance).

When using a spectrum analyzer or EMI receiver to perform these measurements, it shall be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW to set a bin-to-bin spacing of ≤ RBW/2 so that narrowband signals are not lost between frequency bins.

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level. The intent is to test at 100 % duty cycle; however a small reduction in duty cycle (to no lower than 98 %) is permitted, if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

If continuous transmission (or at least 98 % duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level, with the transmit duration as long as possible, and the duty cycle as high as possible during which sweep triggering/signal gating techniques may be used to perform the measurement over the transmission duration.

11.9.1. Maximum peak conducted output power
One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

11.9.1.1. RBW ≥ DTS bandwidth
The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

a) Set the RBW ≥ DTS bandwidth.
b) Set VBW ≥ [3 × RBW].
c) Set span ≥ [3 × RBW].
d) Sweep time = auto couple.
e) Detector = peak.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use peak marker function to determine the peak amplitude level.

11.9.1.3. PKPM1 Peak power meter method
The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth an shall use a fast-responding diode detector.

11.9.2.3.1. Measurement using a power meter (PM)

Method AVGPM is a measurement using an RF average power meter, as follows:

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied:
   1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
   2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
   3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in 11.6.

c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.

d) Adjust the measurement in dBm by adding [10 log(1/D)], where D is the duty cycle

Notes:

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

Test results

Frequency (MHz)	Data rate	Packet length	Measured output power(dBm)		Limit(dBm)
	(Bits/s)	(Bytes)	Peak	Average	
2 402	1M	37	2.90	2.63	30.00
2 440	1M	37	2.52	2.26	
2 480	1M	37	3.10	2.06	

Notes:

1. Measured output power(Average) = reading value of average power + D.C.F

7.2. Peak Power Spectral Density

Test setup



Limit

According to §15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 �dBm in any 3 ㎑ band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test procedure

ANSI C63.10 - Section 11.10.2

Test settings

Method PKPSD (peak PSD)

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1) Set analyzer center frequency to DTS channel center frequency.
2) Set the span to 1.5 times the DTS bandwidth.
3) Set the RBW to: 3 ㎑ ≤ RBW ≤ 100 ㎑.
4) Set the VBW ≥ 3 x RBW.
5) Detector = peak.
6) Sweep time = auto couple.
7) Trace mode = max hold.
8) Allow trace to fully stabilize.
9) Use the peak marker function to determine the maximum amplitude level within the RBW.
10) If measured value exceeds limit, reduce RBW (no less than 3 ㎑) and repeat.

Test results

Frequency(㎒)	Data rate (Bits/s)	Packet length (Bytes)	PSD(dBm/3 ㎑)	Limit(dBm/3 ㎑)
2 402	1M	37	-11.51	8.00
2 440			-12.39	
2 480			-11.43	

BLE_1 MBits/s

2 402 ㎒

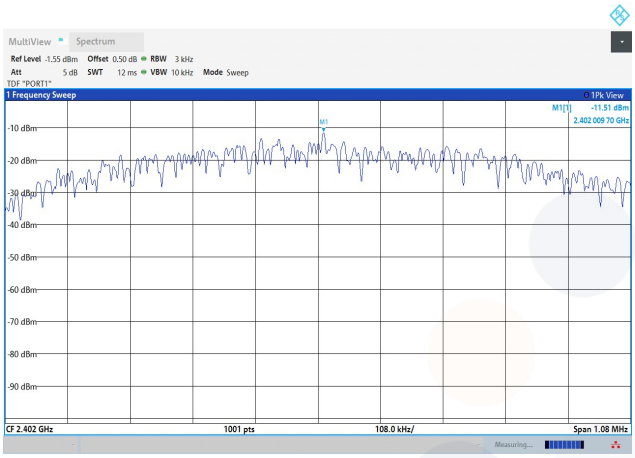

2 440 ㎒

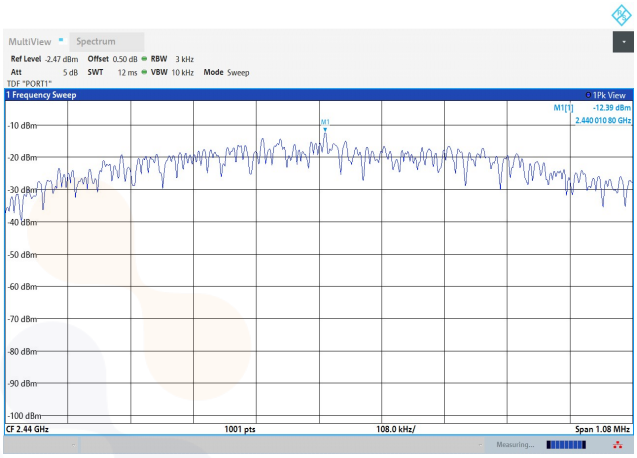

2 480 ㎒

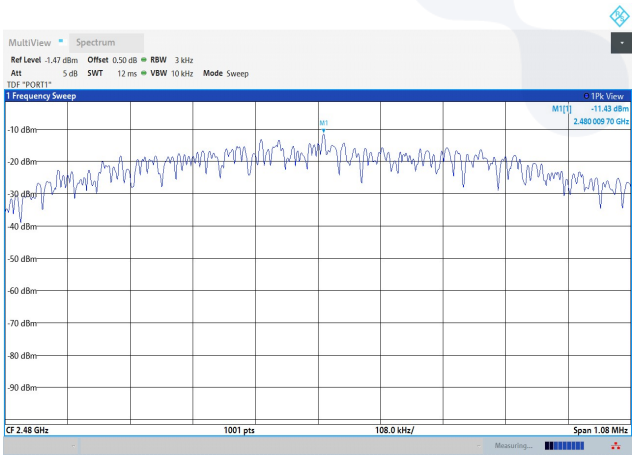

Blank

7.3. 6 dB Bandwidth(DTS Channel Bandwidth)

Test setup



Limit

According to §15.247(a)(2), For Systems using digital modulation techniques may operate in the 902–928 ㎒, 2 400–2 483.5 ㎒, and 5 725–5 850 ㎒ bands. The minimum 6 ㏈ bandwidth shall be at least 500 ㎑.

Test procedure

ANSI C63.10 – Section 11.8.2

Test settings

DTS bandwidth

One of the following procedures may be used to determine the modulated DTS bandwidth.

Option 1

1) Set RBW = 100 ㎑.
2) Set the video bandwidth (VBW) ≥ 3 x RBW.
3) Detector = Peak.
4) Trace mode = max hold.
5) Sweep = auto couple.
6) Allow the trace to stabilize.
7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 ㏈ relative to the maximum level measured in the fundamental emission.

Option 2

The automatic bandwidth measurement capability of an instrument may be employed using the X ㏈ bandwidth mode with X set to 6 ㏈, if the functionality described in 11.8.1 (i.e., RBW = 100 ㎑, VBW ≥ 3 × RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥6 ㏈.

Test results

Frequency(㎒)	Data rate (Bits/s)	Packet length (Bytes)	6 ㏈ bandwidth (㎒)
2 402	1M	37	0.72
2 440			0.72
2 480			0.72

6 ㏈ bandwidth

BLE_1MBits/s

2 402 ㎒

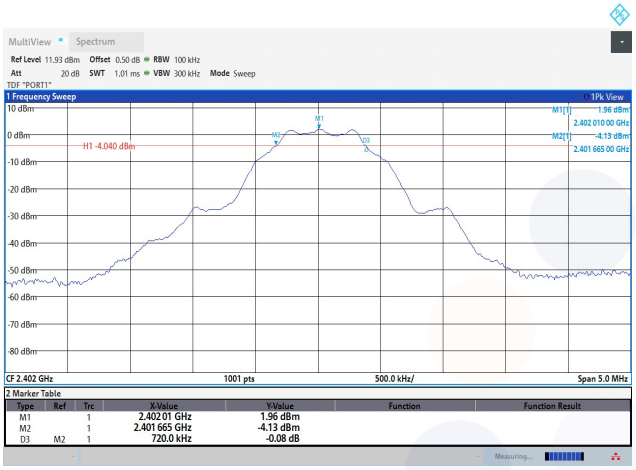

2 440 ㎒

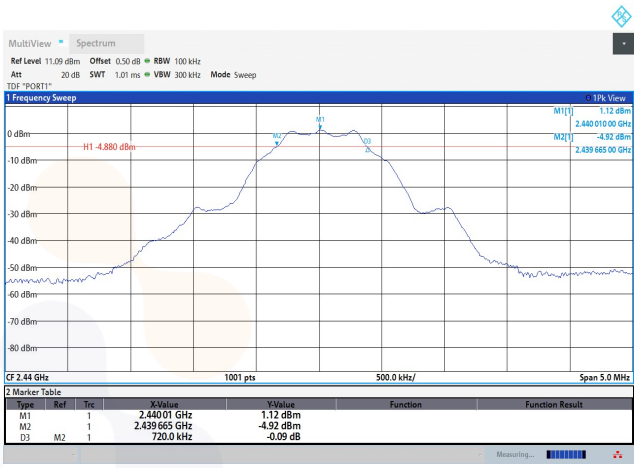

2 480 ㎒

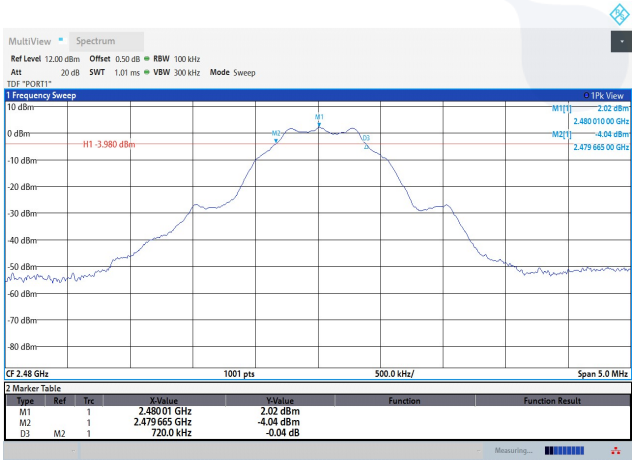

Blank