

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBHVI-WTW-P24080204B-3 R1

FCC ID: N6C-PCEBE

Product: Wi-Fi 7/BT combo module

Brand: Silex Technology

Model No.: SX-PCEBE

Received Date: 2024/8/12

Test Date: 2025/3/28 ~ 2025/9/1; 2026/2/10

Issued Date: 2026/2/10

Applicant: Silex Technology, Inc.

Address: 2-3-1 Hikaridai, Seika-cho, Soraku-gun, Kyoto 619-0237, Japan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

FCC Registration / 723255 / TW2022

Designation Number:

Approved by: _____

May Chen / Manager

, Date: _____

2026/2/10

This test report consists of 63 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by: Vito Lung / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	8
3.3 Channel List.....	9
3.4 Test Mode Applicability and Tested Channel Detail.....	12
3.5 Duty Cycle of Test Signal.....	13
3.6 Test Program Used and Operation Descriptions	14
3.7 Connection Diagram of EUT and Peripheral Devices	14
3.8 Configuration of Peripheral Devices and Cable Connections	15
4 Test Instruments	16
4.1 Maximum RF Output Power	16
4.2 AC Power Conducted Emissions	16
4.3 Unwanted Emissions below 1 GHz	17
4.4 Unwanted Emissions above 1 GHz.....	18
4.5 APC (Automatic Power Control) and Proper Power Adjustment.....	19
5 Limits of Test Items.....	20
5.1 Maximum RF Output Power	20
5.2 AC Power Conducted Emissions	20
5.3 Unwanted Emissions below 1 GHz	20
5.4 Unwanted Emissions above 1 GHz.....	21
5.5 APC (Automatic Power Control) and Proper Power Adjustment.....	21
6 Test Arrangements.....	22
6.1 Maximum RF Output Power	22
6.1.1 Test Setup	22
6.1.2 Test Procedure.....	22
6.2 AC Power Conducted Emissions	22
6.2.1 Test Setup	22
6.2.2 Test Procedure.....	22
6.3 Unwanted Emissions below 1 GHz	23
6.3.1 Test Setup	23
6.3.2 Test Procedure.....	24
6.4 Unwanted Emissions above 1 GHz.....	26
6.4.1 Test Setup	26
6.4.2 Test Procedure.....	26
6.5 APC (Automatic Power Control) and Proper Power Adjustment.....	28
6.5.1 Test Setup	28
6.5.2 Test Procedure.....	29
7 Test Results of Test Item	30
7.1 Maximum RF Output Power	30
7.2 AC Power Conducted Emissions	31
7.3 Unwanted Emissions below 1 GHz	33
7.4 Unwanted Emissions above 1 GHz.....	36
7.5 APC (Automatic Power Control) and Proper Power Adjustment.....	60
8 Pictures of Test Arrangements	62
9 Information of the Testing Laboratories	63

Release Control Record

Issue No.	Description	Date Issued
RFBHVI-WTW-P24080204B-3	Original release.	2025/9/25
RFBHVI-WTW-P24080204B-3 R1	Add APC (Automatic Power Control) and Proper Power Adjustment test item.	2026/2/10

1 Certificate

Product: Wi-Fi 7/BT combo module

Brand: Silex Technology

Test Model: SX-PCEBE

Sample Status: Engineering sample

Applicant: Silex Technology, Inc.

Test Date: 2025/3/28 ~ 2025/9/1; 2026/2/10

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: ANSI C63.10-2013
KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(7) 15.407(a)(8)	Maximum RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(7) 15.407(a)(8)	Maximum Power Spectral Density	N/A	Refer to Note 1 below
15.407(a)(11)	Emission Bandwidth	N/A	Refer to Note 1 below
---	Occupied Bandwidth	N/A	Refer to Note 1 below
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -9.30 dB at 25.15234 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -2.6 dB at 398.33 MHz
15.407(b)(6) 15.407(b)(10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.02 dB at 5924.98 MHz
15.407(b)(7)	In-Band Emission Mask	N/A	Refer to Note 1 below
15.407(d)(6)	Contention-based Protocol	N/A	Refer to Note 1 below
15.407(a)(7)	APC (Automatic Power Control) and Proper Power Adjustment	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is MHF 4L not a standard connector.

Note:

- Only Maximum RF Output Power, AC Power Conducted Emissions, Unwanted Emissions and APC (Automatic Power Control) and Proper Power Adjustment test items were performed for this addendum. The others testing data refer to original test report. (Original FCC ID: J9C-QCNCM825).
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
Maximum RF Output Power	-	1.1 dB
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.5 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wi-Fi 7/BT combo module
Brand	Silex Technology
Test Model	SX-PCEBE
Status of EUT	Engineering sample
Power Supply Rating	3.3 Vdc from host equipment
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 4096QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: up to 54 Mbps 802.11ax: up to 2969.7 Mbps 802.11be: up to 5764.7 Mbps
Operating Frequency	5.935 GHz ~ 7.115 GHz
Number of Channel	802.11a, 802.11ax (HE20), 802.11be (EHT20): 60 802.11ax (HE40), 802.11be (EHT40): 29 802.11ax (HE80), 802.11be (EHT80): 14 802.11ax (HE160), 802.11be (EHT160): 7
Resource Unit (RU)	Single RU: 26-tone, 52-tone, 106-tone, 242-tone, 484-tone, 996-tone, 2 * 996-tone, 4 * 996-tone Multi-RU (Small RU): 52-tone + 26-tone, 106-tone + 26-tone Multi-RU (Large RU): 484-tone + 242-tone, 996-tone + 484-tone, 996-tone + 484-tone + 242-tone, 2 * 996 + 484-tone, 3 * 996-tone, 3 * 996 + 484-tone
Channel Puncturing (Large RU)	80 MHz punctured by 20 MHz, 160 MHz punctured by 20 MHz, 160 MHz punctured by 40 MHz
Output Power	(under the control of a low-power indoor AP): EIRP: 103.848 mW (20.16 dBm) (under the control of a standard-power access point) EIRP: 352.811 mW (25.48 dBm)
Equipment Class	6CD: 15E 6 GHz Dual client

Note:

1. This report is prepared for FCC class II permissive change. The difference compared with the Report No.: RFBHVI-WTW-P24080244A-3 as the following:

◆ Add variant chip QCC2076

Original	
SKU No.	Difference
1	Chip WCN7851
Newly	
2	Chip QCC2076
From the above SKUs, the SKUs 2 was selected as representative model for the test and its data was recorded in this report.	

2. The Grantee confirmed that variant chip (QCC2076) is identical to the original chip version (WCN7851). The new chip component is pin-for-pin compatible. The new chip has the same basic function as the old chip, and supports identical technologies / bands / modulations as the original, except 320MHz bandwidth mode is not supported for 6GHz WLAN. No other change in radio parameters has occurred.

Following spot check verification, it was confirmed that the power of the new variant chip (QCC2076) is lower than the original reported values. In consideration of this, partial test items including RF Output Power, AC Power Conducted Emissions, and Unwanted Emissions are presented as representative data.

3. There are Bluetooth (EDR, BLE, QHS) and WLAN (2.4 GHz & 5 GHz & 6 GHz) technology used for the EUT.
4. Simultaneously transmission combination.

Combination	Technology	
1	WLAN(2.4 GHz)_Ant 0+1	WLAN(5 GHz)_Ant 0+1
2	WLAN(2.4 GHz)_Ant 0+1	WLAN(6 GHz)_Ant 0+1
3	WLAN(5 GHz)_Ant 0+1	Bluetooth_Ant 0
4	WLAN(5 GHz)_Ant 0+1	Bluetooth_Ant 1
5	WLAN(5 GHz)_Ant 0+1	Bluetooth_Ant 0+1
6	WLAN(6 GHz)_Ant 0+1	Bluetooth_Ant 0
7	WLAN(6 GHz)_Ant 0+1	Bluetooth_Ant 1
8	WLAN(6 GHz)_Ant 0+1	Bluetooth_Ant 0+1
9	WLAN(2.4 GHz)_Ant 0	Bluetooth_Ant 1
10	WLAN(2.4 GHz)_Ant 1	Bluetooth_Ant 0

5. The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified.
6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Set	RF Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Cable Loss (dB)	Antenna Type	Connector Type	Cable Length (mm)
1	Chain0/1	Hong-Bo	260-25094	3.53	2.4~2.4835	0.74	PIFA	MHF 4L	300
				3.06	5.15~5.25	1.16			
				3.07	5.25~5.35	1.18			
				4.81	5.47~5.725	1.26			
				4.2	5.725~5.850	1.28			
2	Chain0/1	Hong-Bo	260-25083	5.09	5.850~5.895	1.29	PIFA	MHF 4L	300
				5.14	5.925~6.425	1.35			
				5.09	6.425~6.525	1.38			
				5.16	6.525~6.875	1.45			
				5.12	6.875~7.125	1.50			
3	Chain0/1	Hong-Bo	260-25084	3.22	2.4~2.4835	0.49	Monopole	MHF 4L	200
				3.35	5.150~5.250	0.76			
				3.42	5.250~5.350	0.77			
				4.77	5.470~5.725	0.80			
				4.72	5.725~5.850	0.84			
				4.71	5.850~5.895	0.84			
				4.75	5.925~6.425	0.86			
				4.29	6.425~6.525	0.91			
				4.81	6.525~6.875	0.96			
				4.74	6.875~7.125	0.98			

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

6 GHz Band		
Modulation Mode	Tx & Rx Configuration	
802.11a	2Tx	2Rx
802.11ax (HE20)	2Tx	2Rx
802.11ax (HE40)	2Tx	2Rx
802.11ax (HE80)	2Tx	2Rx
802.11ax (HE160)	2Tx	2Rx
802.11be (EHT20)	2Tx	2Rx
802.11be (EHT40)	2Tx	2Rx
802.11be (EHT80)	2Tx	2Rx
802.11be (EHT160)	2Tx	2Rx
802.11ax (RU26/52/106/242/484/996/2*996)	2Tx	2Rx
802.11be (RU26/52/106/242/484/996/2*996/4*996/ MRU52+26/106+26/484+242/996+484/ 996+484+242/ 2*996+484/3*996/3*996+484)	2Tx	2Rx

Note: The modulation and bandwidth are similar for 802.11ax/be mode for 20 MHz (40 MHz, 80 MHz, 160 MHz).

3.3 Channel List

U-NII-5:

25 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
2	5935 MHz	1	5955 MHz	5	5975 MHz	9	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz	25	6075 MHz
29	6095 MHz	33	6115 MHz	37	6135 MHz	41	6155 MHz
45	6175 MHz	49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz	73	6315 MHz
77	6335 MHz	81	6355 MHz	85	6375 MHz	89	6395 MHz
93	6415 MHz						

12 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz	27	6085 MHz
35	6125 MHz	43	6165 MHz	51	6205 MHz	59	6245 MHz
67	6285 MHz	75	6325 MHz	83	6365 MHz	91	6405 MHz

6 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz	55	6225 MHz
71	6305 MHz	87	6385 MHz				

3 channels are provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz

U-NII-6: (under control of a low-power indoor access point only)

5 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
97	6435 MHz	101	6455 MHz	105	6475 MHz	109	6495 MHz
113	6515 MHz						

3 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
99	6445 MHz	107	6485 MHz	*115	6525 MHz

1 channel is provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
103	6465 MHz

1 channel is provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
*111	6505 MHz

U-NII-7:

17 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
117	6535 MHz	121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz	145	6675 MHz
149	6695 MHz	153	6715 MHz	157	6735 MHz	161	6755 MHz
165	6775 MHz	169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz						

8 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
123	6565 MHz	131	6605 MHz	139	6645 MHz	147	6685 MHz
155	6725 MHz	163	6765 MHz	171	6805 MHz	179	6845 MHz

5 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
*119	6545 MHz	135	6625 MHz	151	6705 MHz	167	6785 MHz
*183	6865 MHz						

2 channels are provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency	Channel	Frequency
143	6665 MHz	*175	6825 MHz

U-NII-8: (under control of a low-power indoor access point only)

13 channels are provided for 802.11a, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
185	6875 MHz	189	6895 MHz	193	6915 MHz	197	6935 MHz
201	6955 MHz	205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz	229	7095 MHz
233	7115 MHz						

6 channels are provided for 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
187	6885 MHz	195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz				

2 channels are provided for 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
199	6945 MHz	215	7025 MHz

1 channel is provided for 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
207	6985 MHz

Note: * mean these are straddle channels and operating under control by under control of a low-power indoor access point only.

3.4 Test Mode Applicability and Tested Channel Detail


Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Category	Tested Channel	Modulation	Data Rate Parameter
Maximum RF Output Power	A	802.11be (EHT20)	6CD Outdoor client	2, 1, 45, 93, 117, 149 ,181	BPSK	MCS0
AC Power Conducted Emissions	E	802.11be (EHT20)	6CD Outdoor client	1	BPSK	MCS0
Unwanted Emissions below 1 GHz	C, D	802.11be (EHT20)	6CD Outdoor client	1	BPSK	MCS0
Unwanted Emissions above 1 GHz	A, B	802.11be (EHT20)	6CD Outdoor client	2, 1, 45, 93, 117, 149 ,181	BPSK	MCS0
APC (Automatic Power Control) and Proper Power Adjustment	-	802.11be (EHT20)	-	21	BPSK	MCS0
EUT Configure Mode:	A	EUT only (w/o antenna)_outdoor client_Nss 1 with CDD				
	B	EUT with 50 ohm terminator_outdoor client_Nss 1 with CDD				
	C	EUT only (w/o antenna)_outdoor client with Nss2 with MIMO (SDM)				
	D	EUT with 50 ohm terminator_outdoor client with Nss2 with MIMO (SDM)				
	E	EUT with antenna set 2 (Model: 260-25083)				

3.5 Duty Cycle of Test Signal

Mode A outdoor client

802.11be (EHT20): Duty cycle = 5.4 ms / 5.425 ms x 100% = 99.5%

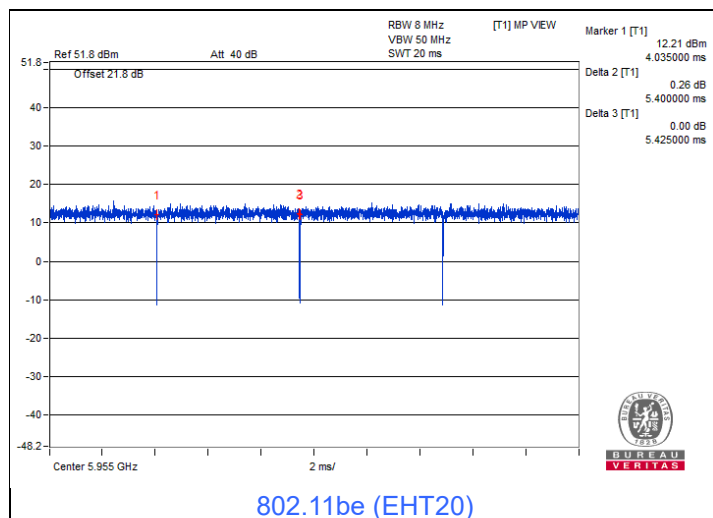


3.6 Test Program Used and Operation Descriptions


Controlling software (QRCT 1.0.00098) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

For Unwanted Emissions test:

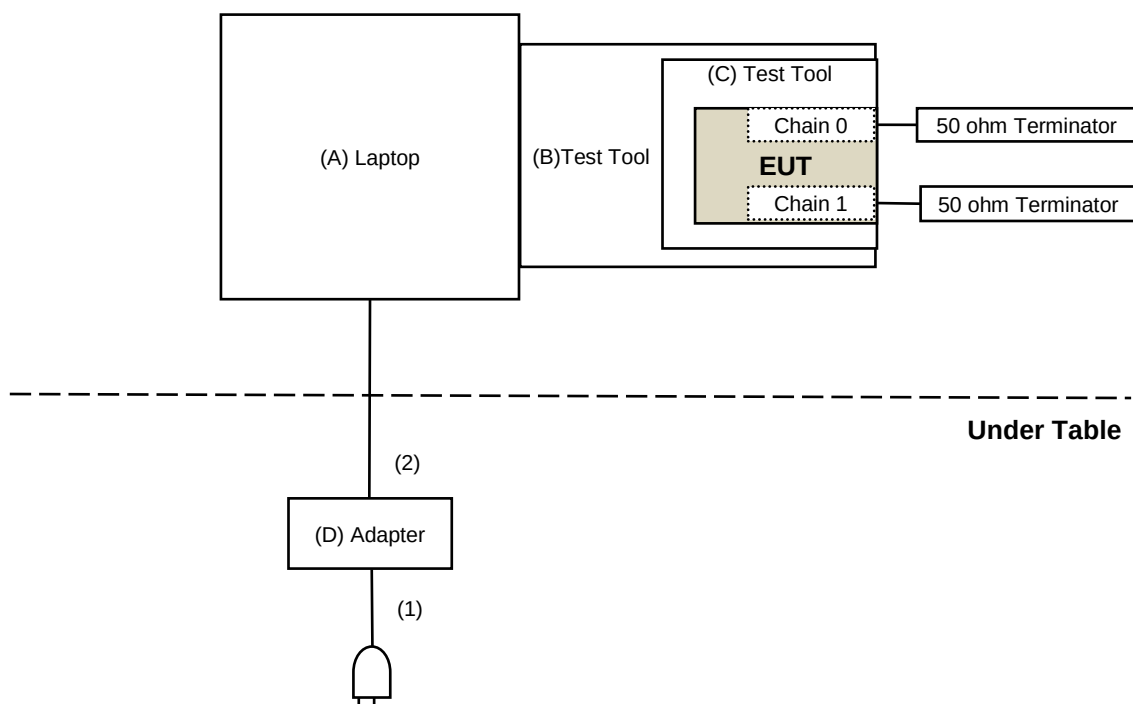

For AC Power Conducted Emission test:

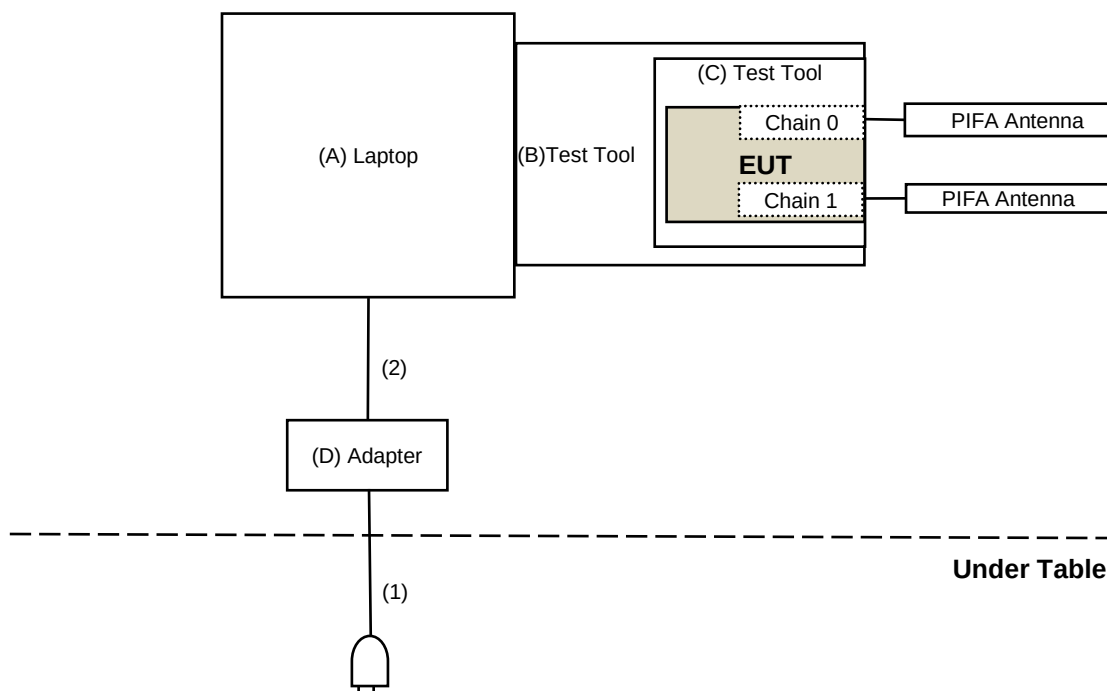

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	HP	HSN-Q32C-5	N/A	N/A	Supplied by applicant
B	Test Tool	Silex	NGFF(A+E) TO Mini PCI-E Adapter	N/A	N/A	Supplied by applicant
C	Test Tool	Silex	PW105500XX	N/A	N/A	Supplied by applicant
D	Adapter	HP	TPN-DA22	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	AC Cable	1	0.85	No	0	Supplied by applicant
2	DC Cable	1	1.6	No	0	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Maximum RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-20	00800A1K01A-20-02	2025/5/23	2026/5/22
Pulse Power Sensor Anritsu	MA2411B	1726434	2025/6/3	2026/6/2
RF Power Meter Anritsu	ML2495A	1529002	2025/6/3	2026/6/2

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2025/8/25

4.2 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance Telegartner	50 ohm	3	2024/11/1	2025/10/31
EMI Test Receiver R&S	ESCS 30	100375	2024/5/20	2025/5/19
Fixed Attenuator STI	STI02-2200-10	005	2025/2/17	2026/2/16
LISN R&S	ESH3-Z5	835239/001	2025/3/27	2026/3/26
		848773/004	2024/10/7	2025/10/6
RF Coaxial Cable JYEBAO	5D-FB	COCCAB-001	2025/2/17	2026/2/16
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2025/5/19

4.3 Unwanted Emissions below 1 GHz

Mode C

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2025/5/23	2026/5/22
PXA Signal Analyzer Keysight	N9030A	MY55330160	2025/1/16	2026/1/15
Software	ADT_RF Test Software V8	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2025/8/25

Mode D

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-406	2024/10/8	2025/10/7
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	2025/2/15	2026/2/14
Loop Antenna TESEQ	HLA 6121	63620	2024/10/17	2025/10/16
MXE EMI Receiver Agilent	N9038A	MY51210202	2024/7/29	2025/7/28
Preamplifier EMCI	EMC330N	980701	2025/2/15	2026/2/14
	EMC001340	980142	2025/2/17	2026/2/16
RF Coaxial Cable mTJ	100100-CFD400LW-200	CFD400-200	2025/2/15	2026/2/14
	100100-CFD400LW-400	CFD400-400	2025/2/15	2026/2/14
	100100-CFD400LW-800	CFD400-800	2025/2/15	2026/2/14
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 4.
2. Tested Date: 2025/5/16

4.4 Unwanted Emissions above 1 GHz

Mode A

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2024/5/29	2025/5/28
PXA Signal Analyzer Keysight	N9030A	MY55330160	2025/1/16	2026/1/15
Software	ADT_RF Test Software V8	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2025/3/28 ~ 2025/3/29

Mode B

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-783	2024/11/10	2025/11/9
	BBHA 9170	9170-739	2024/11/10	2025/11/9
MXA Signal Analyzer Keysight	N9020B	MY60112410	2025/3/17	2026/3/16
Preamplifier EMCI	EMC12630SE	980688	2025/8/7	2026/8/6
	EMC184045SE	980387	2025/8/7	2026/8/6
RF Coaxial Cable EMCI	EMC102-KM-KM-1200	160924	2025/1/24	2026/1/23
	EMC102-KM-KM-4000	200214	2025/1/24	2026/1/23
	EMC104-SM-SM-1200	160922	2025/1/14	2026/1/13
	EMC104-SM-SM-2000	180502	2025/1/14	2026/1/13
	EMC104-SM-SM-6000	210704	2024/10/30	2025/10/29
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 4.
2. Tested Date: 2025/9/1

4.5 APC (Automatic Power Control) and Proper Power Adjustment

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Wireless Connectivity Test Set Anritsu	MT8862A	6261883625	2028/8/20	2026/8/19
PXA Signal Analyzer Keysight	N9030A	MY54490570	2025/6/5	2026/6/4
Power Divider MVE	MVE8596	B400028	2025/3/18	2026/3/17
Dual Directional Coupler Pulsar	CS20-18-436/16	1139	2025/8/7	2026/8/6

Notes:

1. The test was performed in Oven room 1.
2. Tested Date: 2026/2/10

5 Limits of Test Items

5.1 Maximum RF Output Power

Operation Band	Equipment Class	Limit
		Maximum Average Power
U-NII-5 U-NII-6 U-NII-7 U-NII-8	6CD: 15E 6 GHz Dual client (under control of a low-power indoor access point)	EIRP 24 dBm
U-NII-5 U-NII-7	6CD: 15E 6 GHz Dual client (under control of a Standard power access point)	EIRP 30 dBm

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	1. 56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.3 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	$2400/F(\text{kHz})$	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).

5.4 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Frequencies (MHz)	EIRP Limit	Equivalent Field Strength at 3 m
5925 MHz > F > 7125 MHz	Peak: -7 (dBm/MHz)	88.2 (dBuV/m)
	Average: -27 (dBm/MHz)	68.2 (dBuV/m)

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$


5.5 APC (Automatic Power Control) and Proper Power Adjustment

The maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point.

6 Test Arrangements

6.1 Maximum RF Output Power

6.1.1 Test Setup

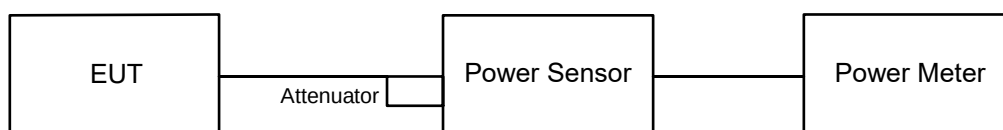


6.1.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

6.2 AC Power Conducted Emissions

6.2.1 Test Setup

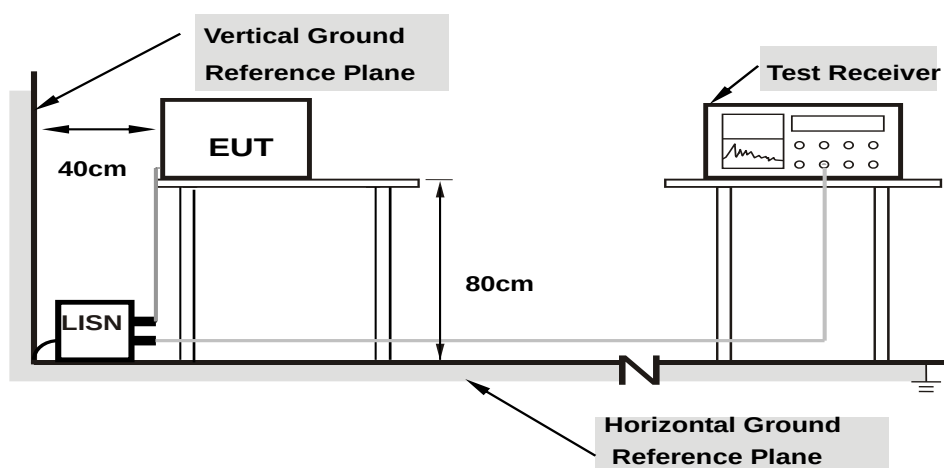

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.2.2 Test Procedure

- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.


Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.

6.3 Unwanted Emissions below 1 GHz


6.3.1 Test Setup

For Radiated Configuration:


For Radiated emission below 30 MHz

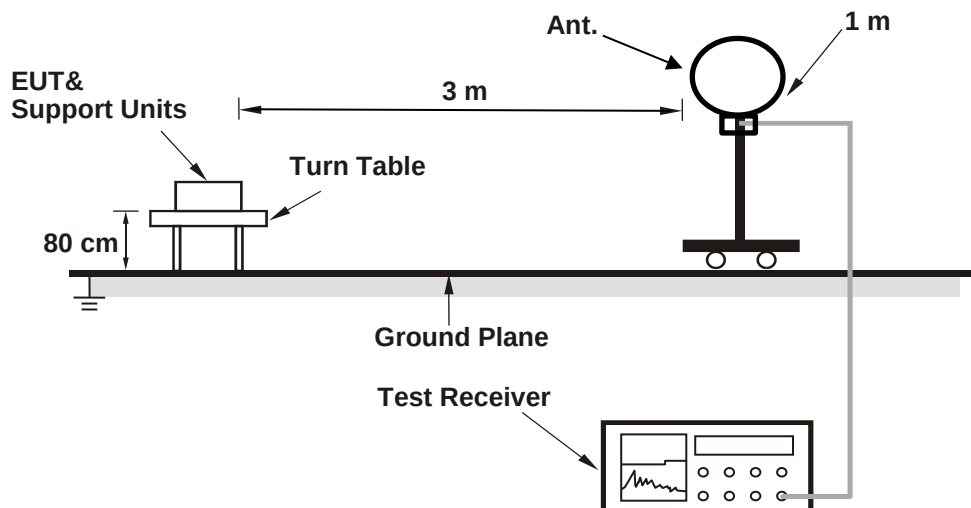

For Radiated emission above 30 MHz

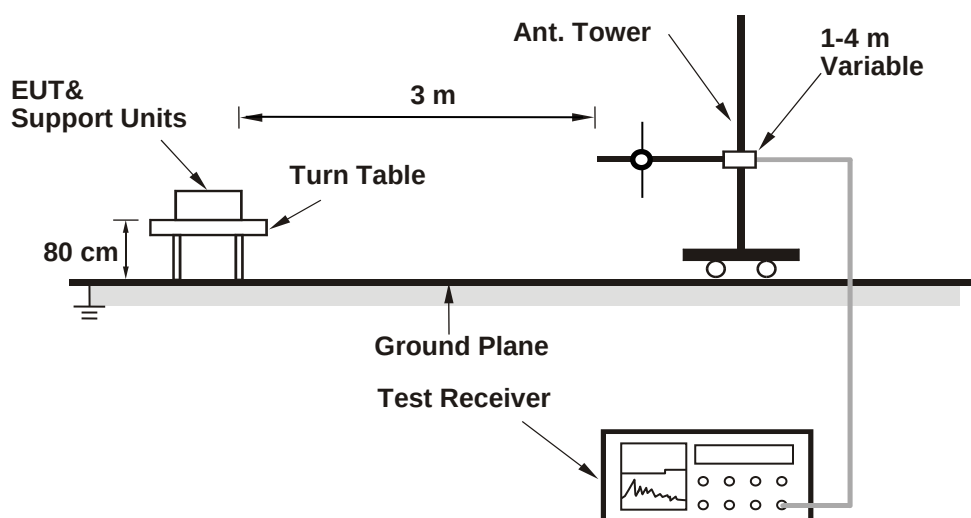

For Conducted Configuration:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.3.2 Test Procedure

Radiated versus Conducted Measurement.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- e. For all of Radiation emission test

For Radiated emission below 30 MHz

- e-1.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-1.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-1.3. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- e-1.4. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-1.5. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz

- e-2.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-2.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-2.3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e-2.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-2.5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Unwanted Emission Convert Formula

- a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8
d = measurement distance in 3 meters.
- b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB)
- c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal.
For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.
For the band edge the gain for the specific band may have been used.


Notes:

1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection:
For frequencies between 30 MHz and 1000 MHz, add 4.7 dB.
2. The conducted emission test was considered some factor to compute test result.


6.4 Unwanted Emissions above 1 GHz

6.4.1 Test Setup

For Radiated Configuration:

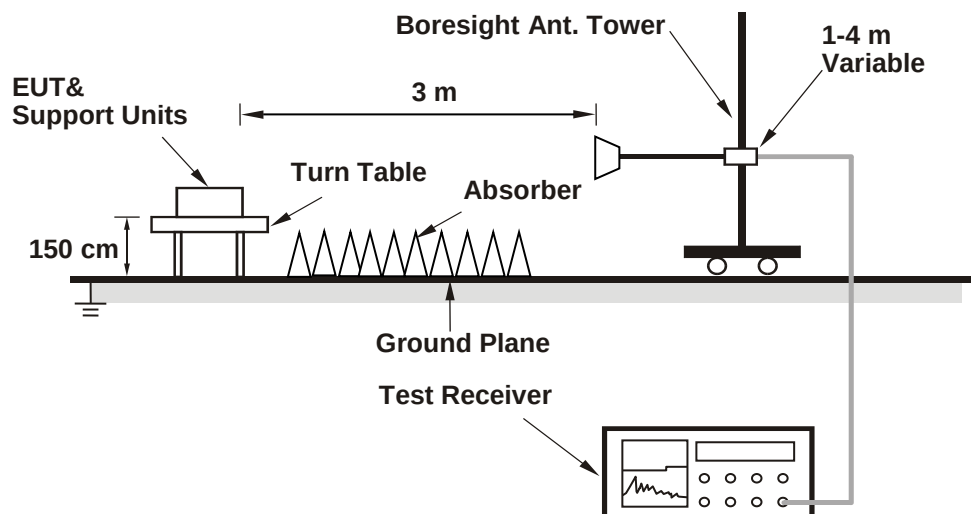

For Conducted Configuration:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.4.2 Test Procedure

Radiated versus Conducted Measurement.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)
- For all of Radiation emission test
 - The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
 - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

- e-3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e-4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-5. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
2. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

For Verified radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

Conducted Unwanted Emission Convert Formula

a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB).

c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal.

For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.


For the band edge the gain for the specific band may have been used.

Note: The conducted emission test was considered some factor to compute test result.


6.5 APC (Automatic Power Control) and Proper Power Adjustment

6.5.1 Test Setup

Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

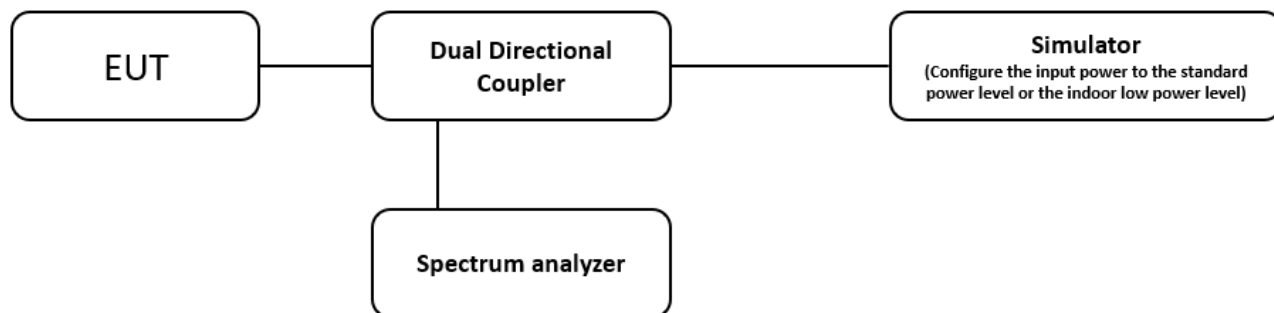

Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)

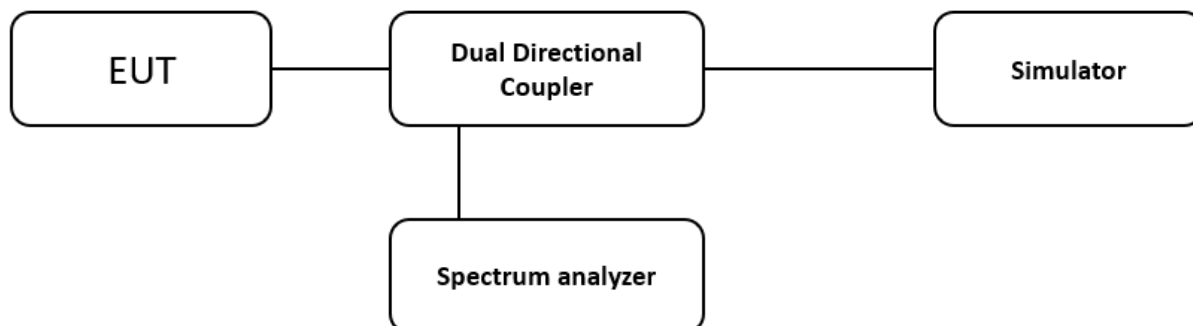

6.5.2 Test Procedure

Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

Measurement method reference KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01 Part II Measurement Procedure Clause K.

The detailed test process is as follows:

- f. Connect equipment as shown in Figure 6 below.
- g. Adjust Atten 2 to Std Power AP so as to facilitate error free communication with the Client (Atten 1 should be set to High on the RF path to the Low Power AP).
- h. Configure the Client and APs so that they associate and start sending data (stream data). It is important that the client is configured to transmit at its highest power level. Initially, because the attenuation on Atten 1 is set high, the Client will only associate with the Std Power AP.
- i. Verify transmission between Client and Std Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices.
- j. Gradually increase Atten 2 while at the same time decreasing Atten 1. This simulates the Client moving from outdoors to indoors. At some level of attenuation the Client should associate with the Low Power indoor AP. Verify transmission between Client and Low Power AP.
- k. Measure the RF power of the Client device using the same method as in step 4. Verify the power is no more than 24 dBm EIRP.

Note – measuring Client RF power reliably from a directional coupler measurement port may be tricky. Due to coupling, some energy from the AP will show up on the measurement port. Signal isolation techniques on the measurement analyzer will need to be used.

Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)

Measurement method reference KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01 Part II Measurement Procedure Clause L.

The detailed test process is as follows:

- l. Connect equipment as shown in Figure 7 below.
- m. Adjust Atten 1 to Std Power AP so as to facilitate error free communication with the Client but protect the Client receiver from overload or damage.
- n. Configure the Client and AP so that they associate and start sending data (stream data). The AP should be configured such that its registered power is 36 dBm EIRP.
- o. Verify transmission between Client and Std Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices. Use this power, along with its antenna gain, to calculate the Client EIRP.
- p. The Client EIRP should be minimally 6 dB lower than that of the AP.
- q. Repeat Steps 2 through 5 at two other selected measurement points – the first at the midpoint and the second at the lowest rated power of the client as declared by the manufacturer.

7 Test Results of Test Item

7.1 Maximum RF Output Power

Input Power:	3.3 Vdc	Environmental Conditions:	22°C, 64% RH	Tested By:	Katina Lu
--------------	---------	---------------------------	--------------	------------	-----------

Mode A

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1							
2	5935	-15.04	-17.11	0.05079	-12.94	5.14	0.1659	-7.8	30	Pass
1	5955	17.72	15.90	98.061	19.91	5.14	320.255	25.05	30	Pass
45	6175	17.23	15.48	88.163	19.45	5.14	287.93	24.59	30	Pass
93	6415	16.96	15.55	85.551	19.32	5.14	279.399	24.46	30	Pass
117	6535	18.04	16.42	107.533	20.32	5.16	352.811	25.48	30	Pass
149	6695	17.20	16.49	97.046	19.87	5.16	318.403	25.03	30	Pass
181	6855	16.72	16.12	87.915	19.44	5.16	288.445	24.6	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-5, The maximum gain is 5.14 dBi.
3. For U-NII-7, The maximum gain is 5.16 dBi.

7.2 AC Power Conducted Emissions


Mode E

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15011	10.00	37.65	21.15	47.65	31.15	65.99	55.99	-18.34	-24.84
2	0.18516	10.02	30.80	18.71	40.82	28.73	64.25	54.25	-23.43	-25.52
3	0.42344	10.04	29.23	24.08	39.27	34.12	57.38	47.38	-18.11	-13.26
4	4.57422	10.34	15.64	5.67	25.98	16.01	56.00	46.00	-30.02	-29.99
5	7.52344	10.53	17.21	12.21	27.74	22.74	60.00	50.00	-32.26	-27.26
6	25.15625	11.20	30.73	26.38	41.93	37.58	60.00	50.00	-18.07	-12.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

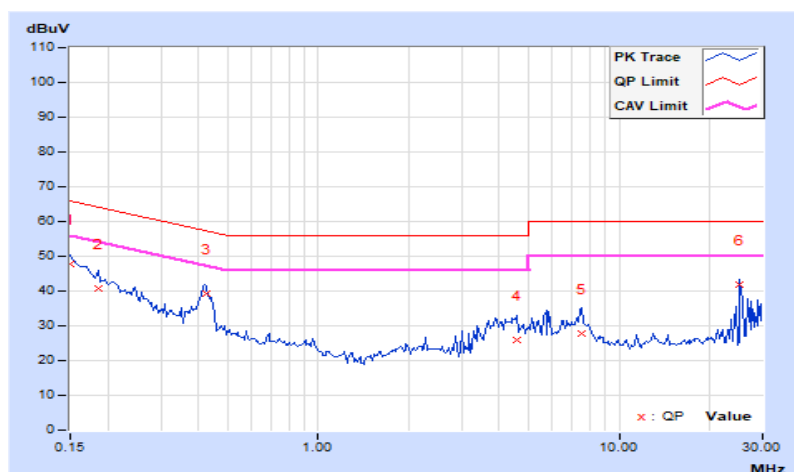


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.02	36.33	21.08	46.35	31.10	65.58	55.58	-19.23	-24.48
2	0.17734	10.02	33.28	17.09	43.30	27.11	64.61	54.61	-21.31	-27.50
3	0.42344	10.02	28.67	23.90	38.69	33.92	57.38	47.38	-18.69	-13.46
4	4.15625	10.28	16.53	7.16	26.81	17.44	56.00	46.00	-29.19	-28.56
5	7.84375	10.49	15.98	11.87	26.47	22.36	60.00	50.00	-33.53	-27.64
6	25.15234	11.00	31.98	29.70	42.98	40.70	60.00	50.00	-17.02	-9.30

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

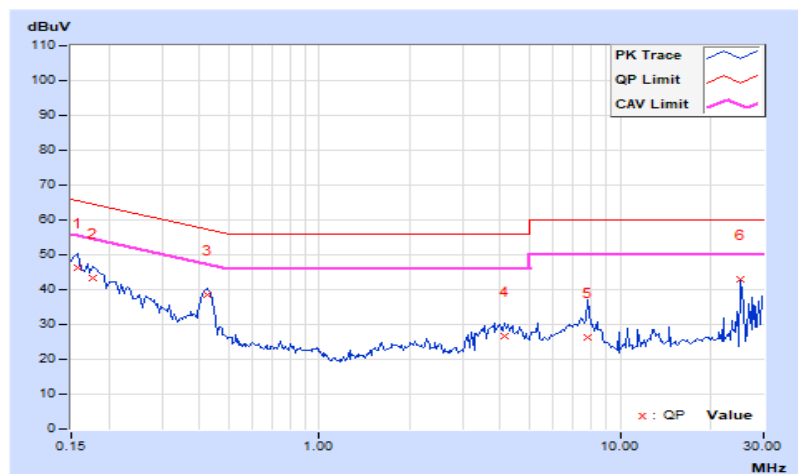

7.3 Unwanted Emissions below 1 GHz


Mode C

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	27°C, 63% RH
Tested By	Katina Lu		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	82.86	25.12 PK	40	-14.88	-83.47	-82.6	9.86	-70.14
2	130.64	25.24 PK	43.5	-18.26	-81.3	-85.43	9.86	-70.02
3	326.7	25.4 PK	46	-20.6	-81.29	-84.89	9.86	-69.86
4	588.48	26.24 PK	46	-19.76	-83.05	-80.98	9.86	-69.02
5	766.11	26.92 PK	46	-19.08	-82.33	-80.32	9.86	-68.34
6	949.56	26.95 PK	46	-19.05	-82.85	-79.98	9.86	-68.31

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

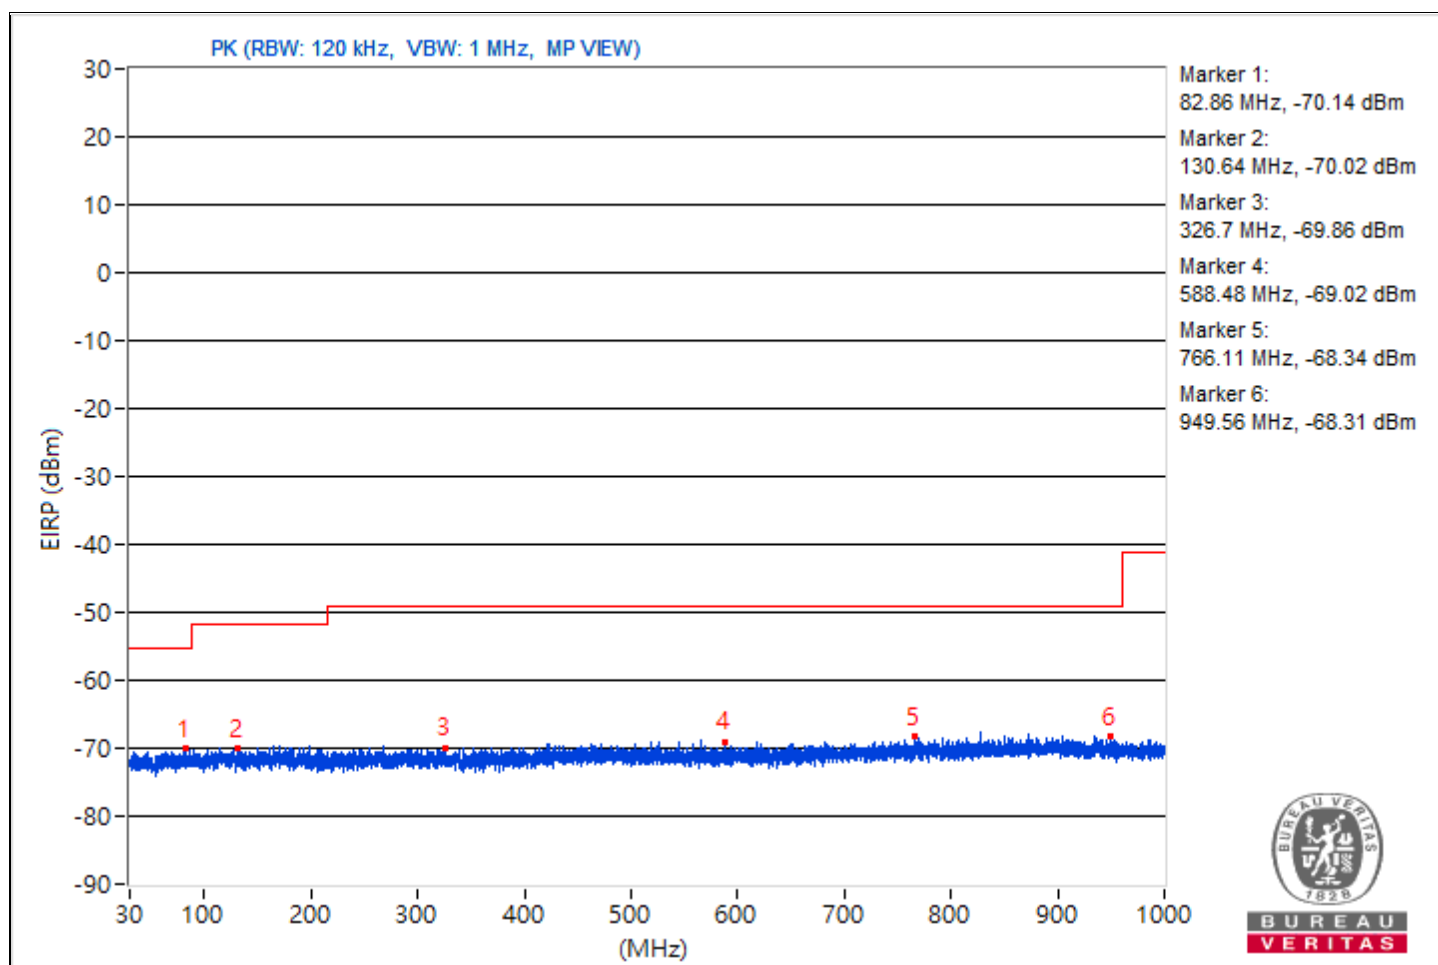


Mode D

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.20	27.3 QP	40.0	-12.7	4.00 H	111	41.1	-13.8
2	106.61	34.8 QP	43.5	-8.7	3.00 H	296	50.9	-16.1
3	199.19	35.4 QP	43.5	-8.1	2.00 H	120	51.6	-16.2
4	263.75	42.9 QP	46.0	-3.1	1.00 H	202	56.5	-13.6
5	398.33	43.4 QP	46.0	-2.6	3.01 H	360	53.3	-9.9
6	799.87	40.5 QP	46.0	-5.5	1.00 H	281	41.8	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

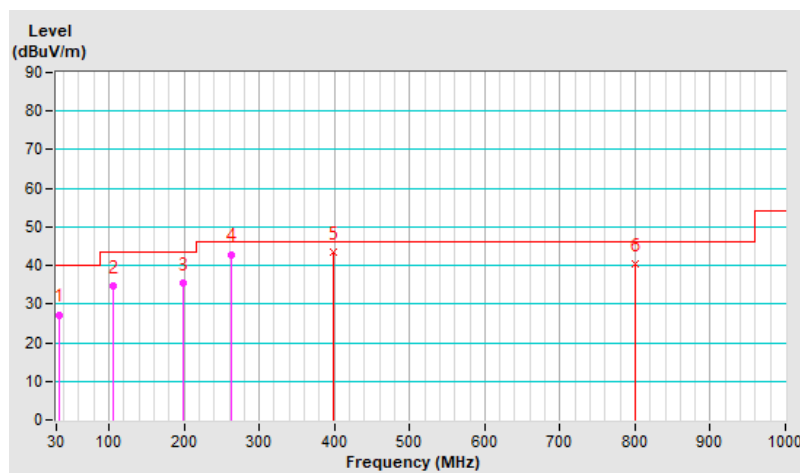


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 65% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.11	31.8 QP	40.0	-8.2	1.00 V	19	45.0	-13.2
2	172.66	29.8 QP	43.5	-13.7	1.00 V	124	43.5	-13.7
3	319.62	40.4 QP	46.0	-5.6	2.00 V	255	52.1	-11.7
4	398.36	40.9 QP	46.0	-5.1	1.00 V	30	50.7	-9.8
5	418.92	40.1 QP	46.0	-5.9	1.00 V	196	49.2	-9.1
6	796.57	39.8 QP	46.0	-6.2	2.00 V	110	41.3	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

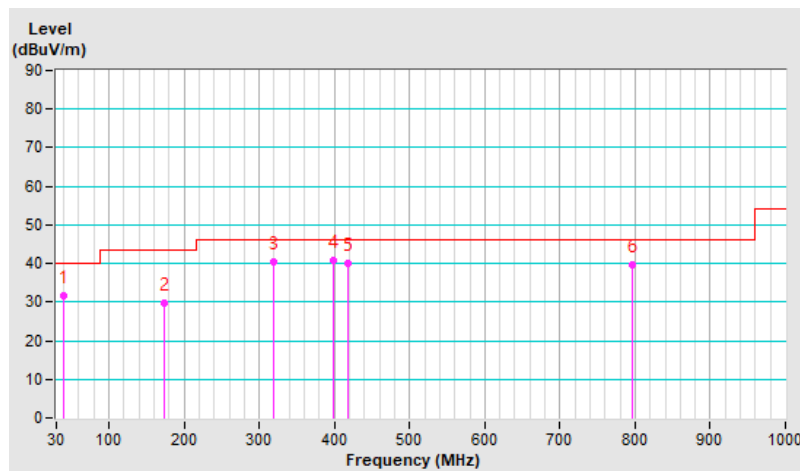

7.4 Unwanted Emissions above 1 GHz



Mode A

Conducted Unwanted Emissions

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.66	59.11 PK	74	-14.89	-49.17	-46.05	8.17	-36.15
2	3789.66	51.09 AV	54	-2.91	-55.53	-55.18	8.17	-44.17
3	14478.67	55.66 PK	74	-18.34	-51.28	-50.33	8.17	-39.6
4	14478.67	49.62 AV	54	-4.38	-56.54	-57.12	8.17	-45.64
5	20132.5	56.96 PK	74	-17.04	-51.73	-48.01	8.17	-38.3
6	20132.5	51.84 AV	54	-2.16	-55.02	-54.23	8.17	-43.42
7	23817.8	61.43 PK	74	-12.57	-44.88	-45.14	8.17	-33.83
8	23817.8	53.61 AV	54	-0.39	-53.02	-52.65	8.17	-41.65
9	38790.76	54.35 PK	74	-19.65	-53.62	-50.96	8.17	-40.91
10	38790.76	48.1 AV	54	-5.9	-58.71	-58	8.17	-47.16


Note: Margin value = Emission Level - Limit value

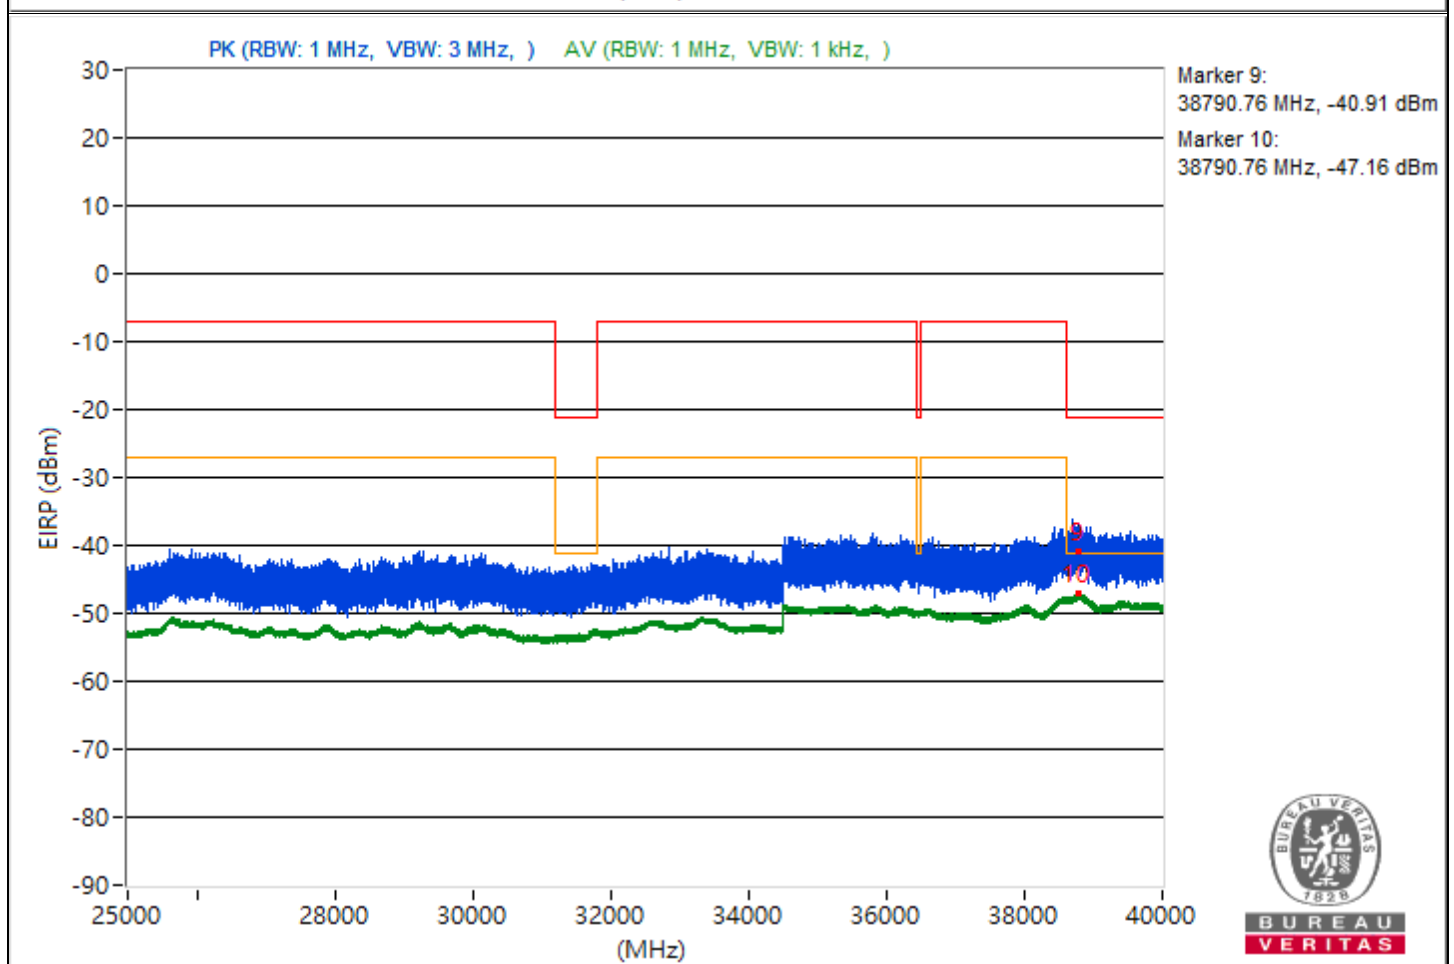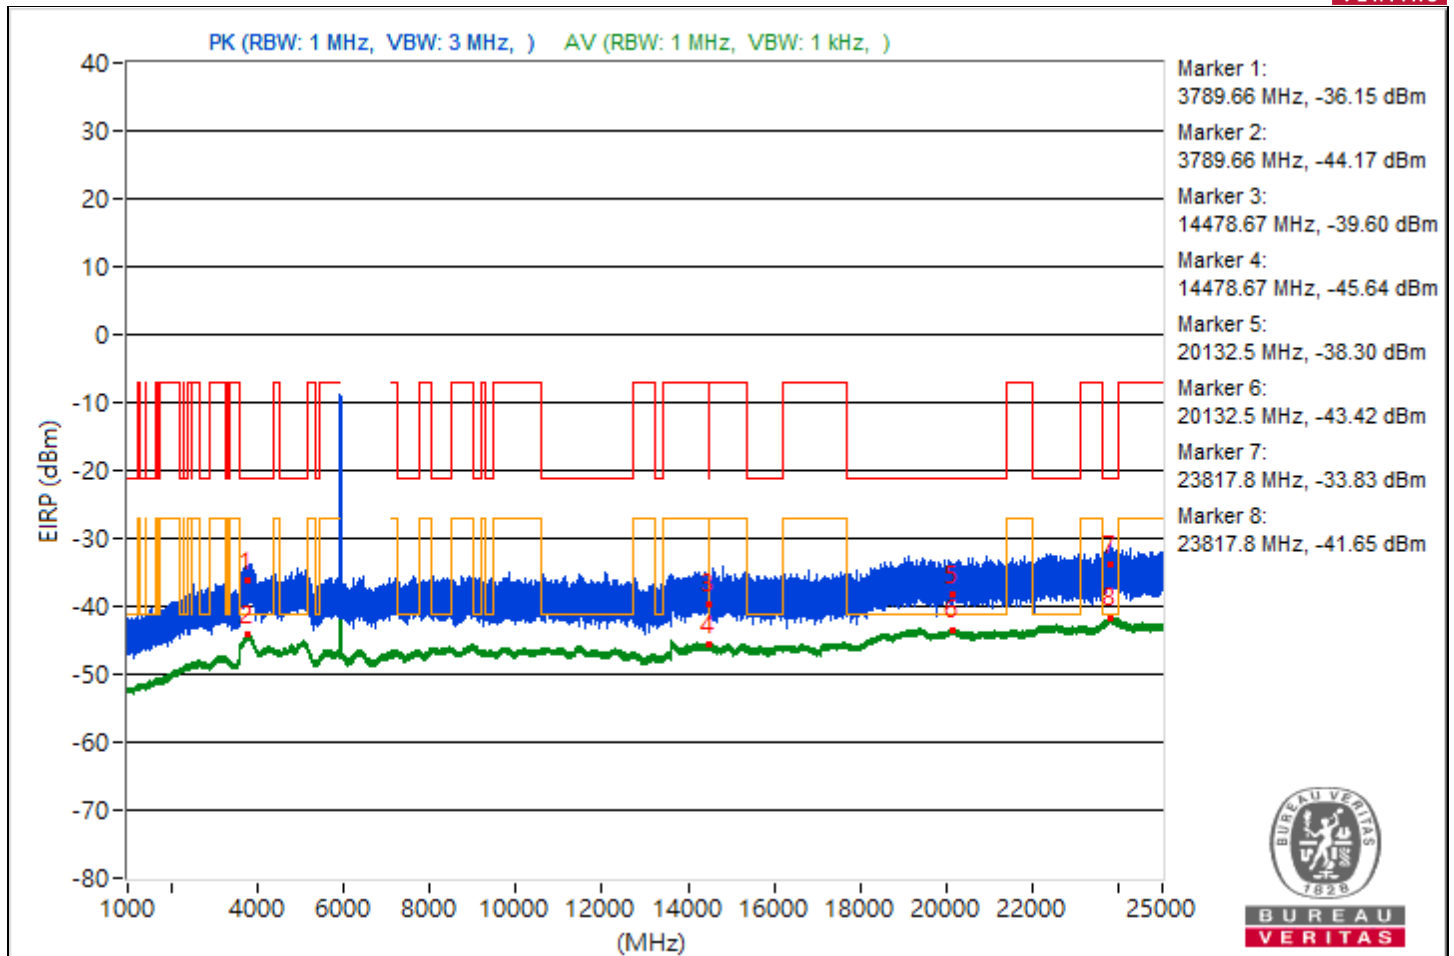


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.7	59.76 PK	74	-14.24	-46.61	-46.74	8.17	-35.5
2	3807.7	51.11 AV	54	-2.89	-55.19	-55.49	8.17	-44.15
3	14489.07	56.92 PK	74	-17.08	-50.62	-48.64	8.17	-38.34
4	14489.07	49.47 AV	54	-4.53	-56.7	-57.25	8.17	-45.79
5	20112.9	59.71 PK	74	-14.29	-45.81	-47.91	8.17	-35.55
6	20112.9	51.79 AV	54	-2.21	-55.02	-54.31	8.17	-43.47
7	23836.8	61.39 PK	74	-12.61	-44.59	-45.56	8.17	-33.87
8	23836.8	53.69 AV	54	-0.31	-52.55	-52.96	8.17	-41.57
9	38798.76	55.43 PK	74	-18.57	-50.23	-51.96	8.17	-39.83
10	38798.76	47.98 AV	54	-6.02	-58.72	-58.22	8.17	-47.28

Note: Margin value = Emission Level - Limit value

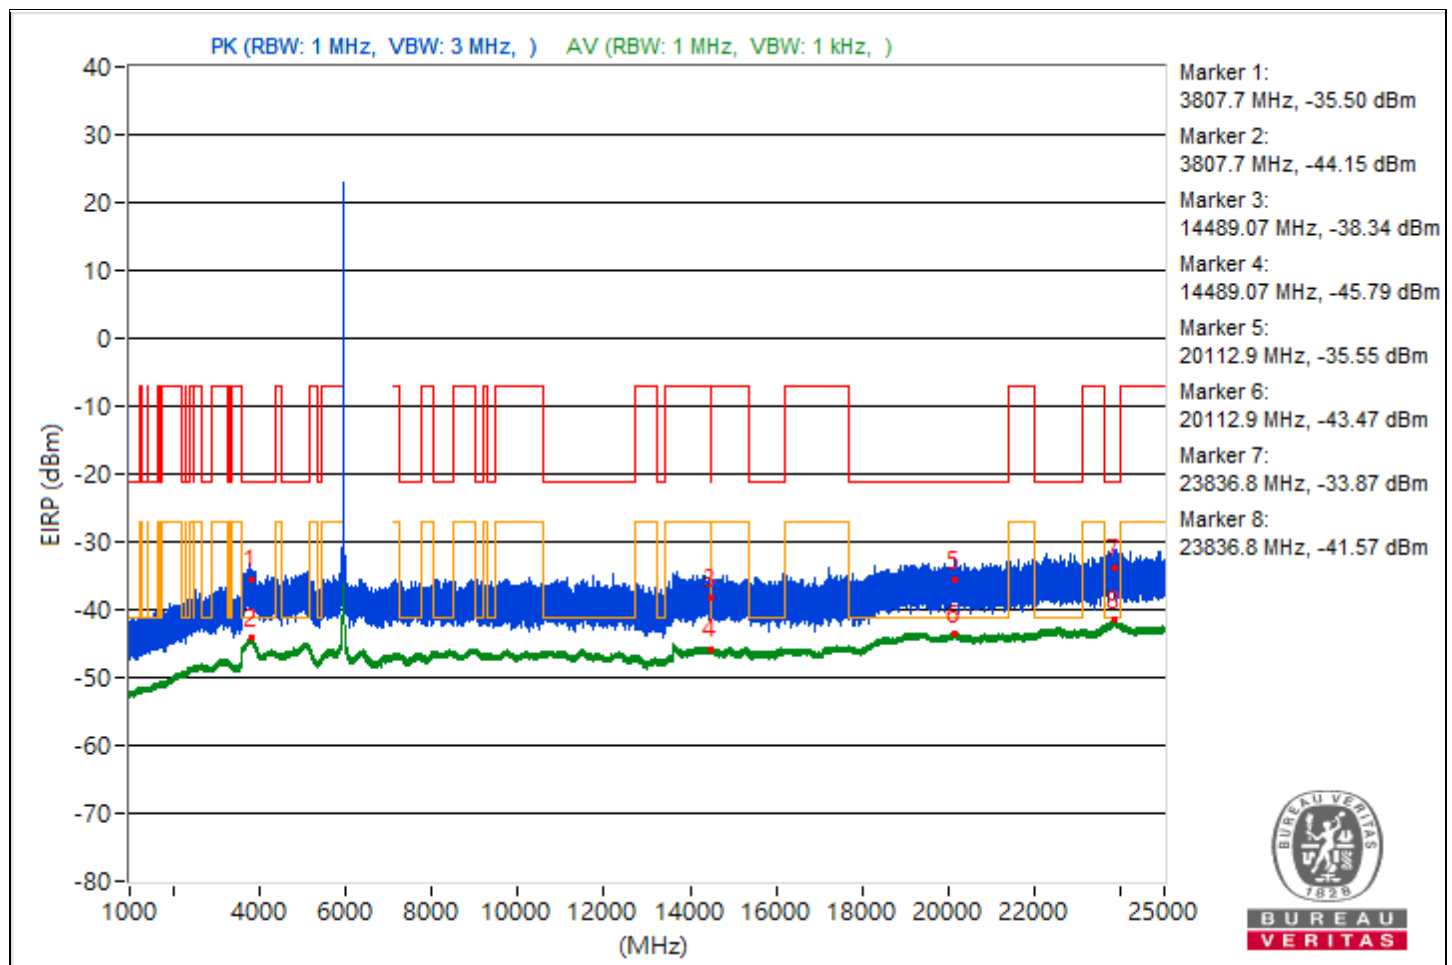


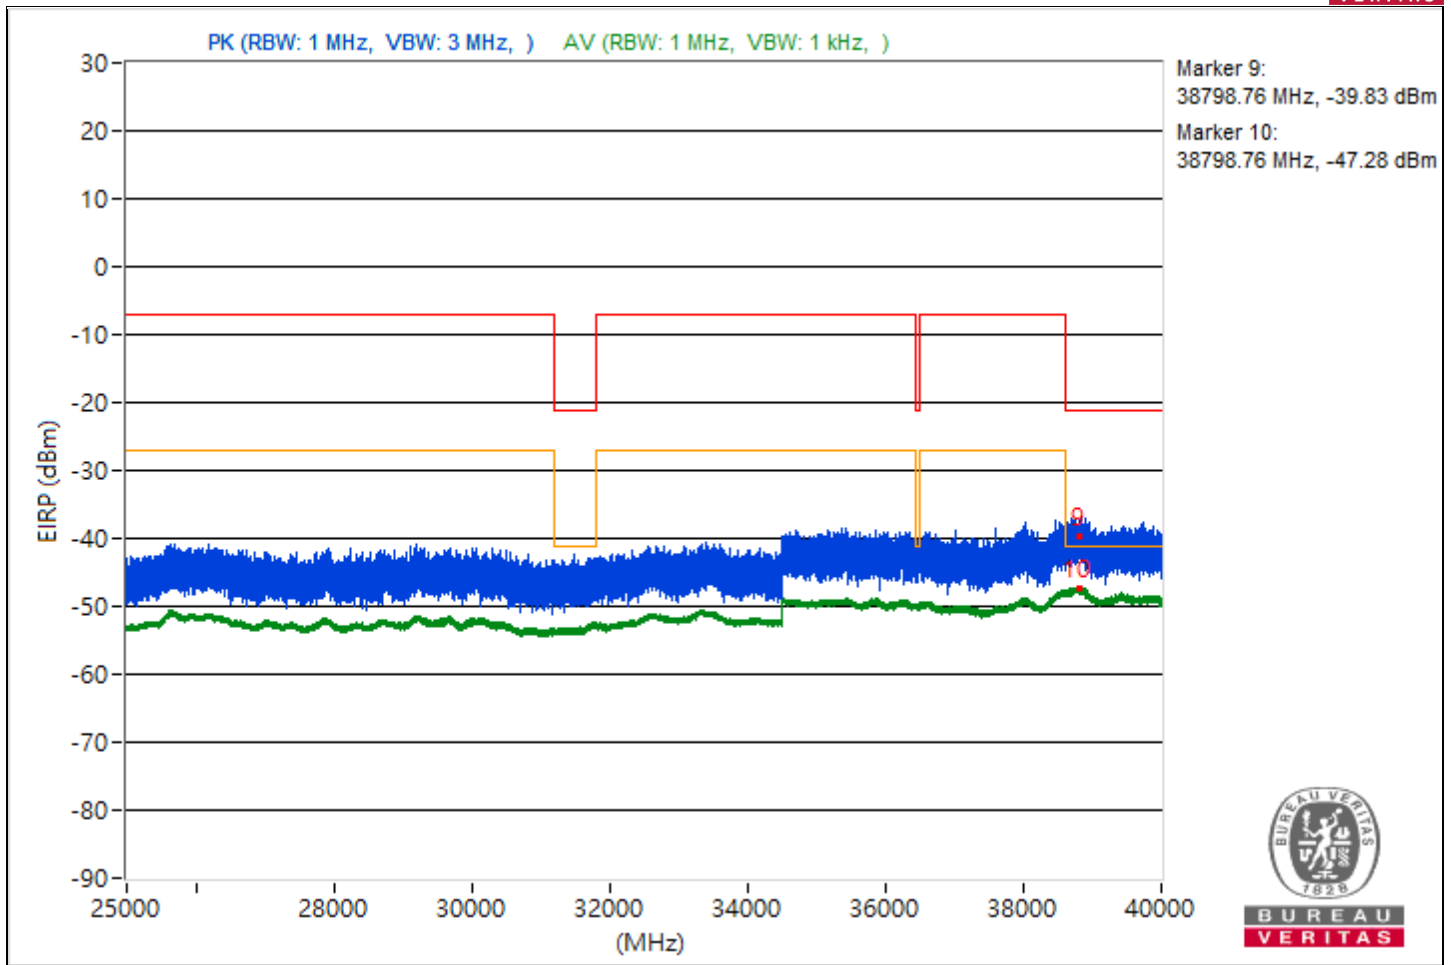


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.28	59.46 PK	74	-14.54	-49.33	-45.46	8.17	-35.8
2	3790.28	51.04 AV	54	-2.96	-55.23	-55.59	8.17	-44.22
3	14475.2	58.64 PK	74	-15.36	-48.26	-47.38	8.17	-36.62
4	14475.2	49.5 AV	54	-4.5	-57.22	-56.67	8.17	-45.76
5	20159.4	59.49 PK	74	-14.51	-45.79	-48.56	8.17	-35.77
6	20159.4	51.75 AV	54	-2.25	-54.35	-55.07	8.17	-43.51
7	23879.7	62.07 PK	74	-11.93	-43.72	-45.13	8.17	-33.19
8	23879.7	53.59 AV	54	-0.41	-52.54	-53.17	8.17	-41.67
9	38806.67	55.32 PK	74	-18.68	-51.13	-51.1	8.17	-39.94
10	38806.67	47.86 AV	54	-6.14	-58.07	-59.14	8.17	-47.4

Note: Margin value = Emission Level - Limit value

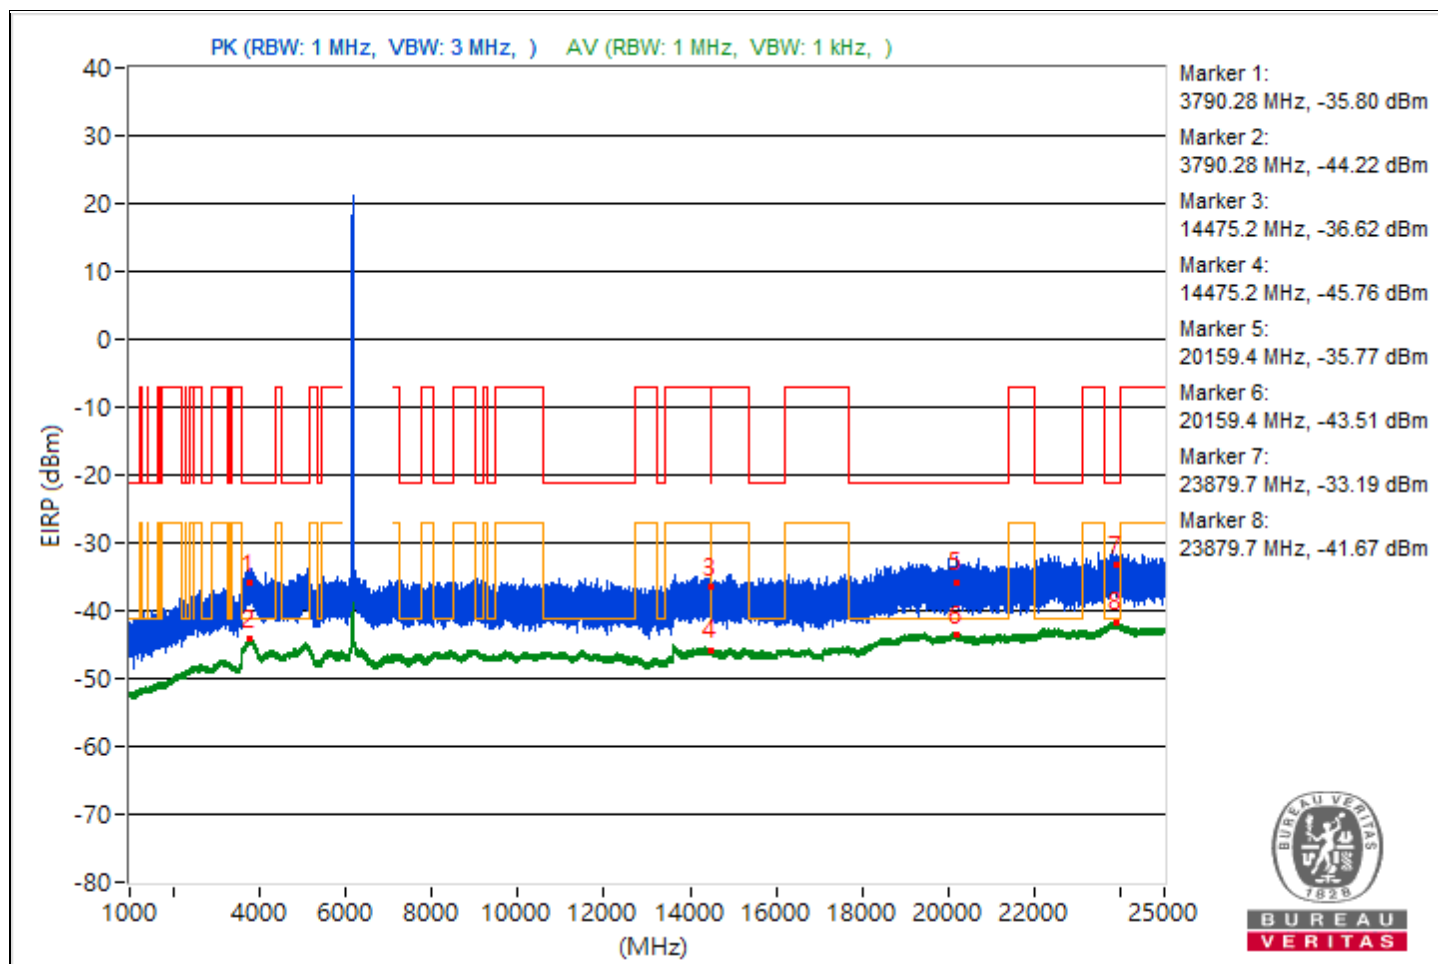


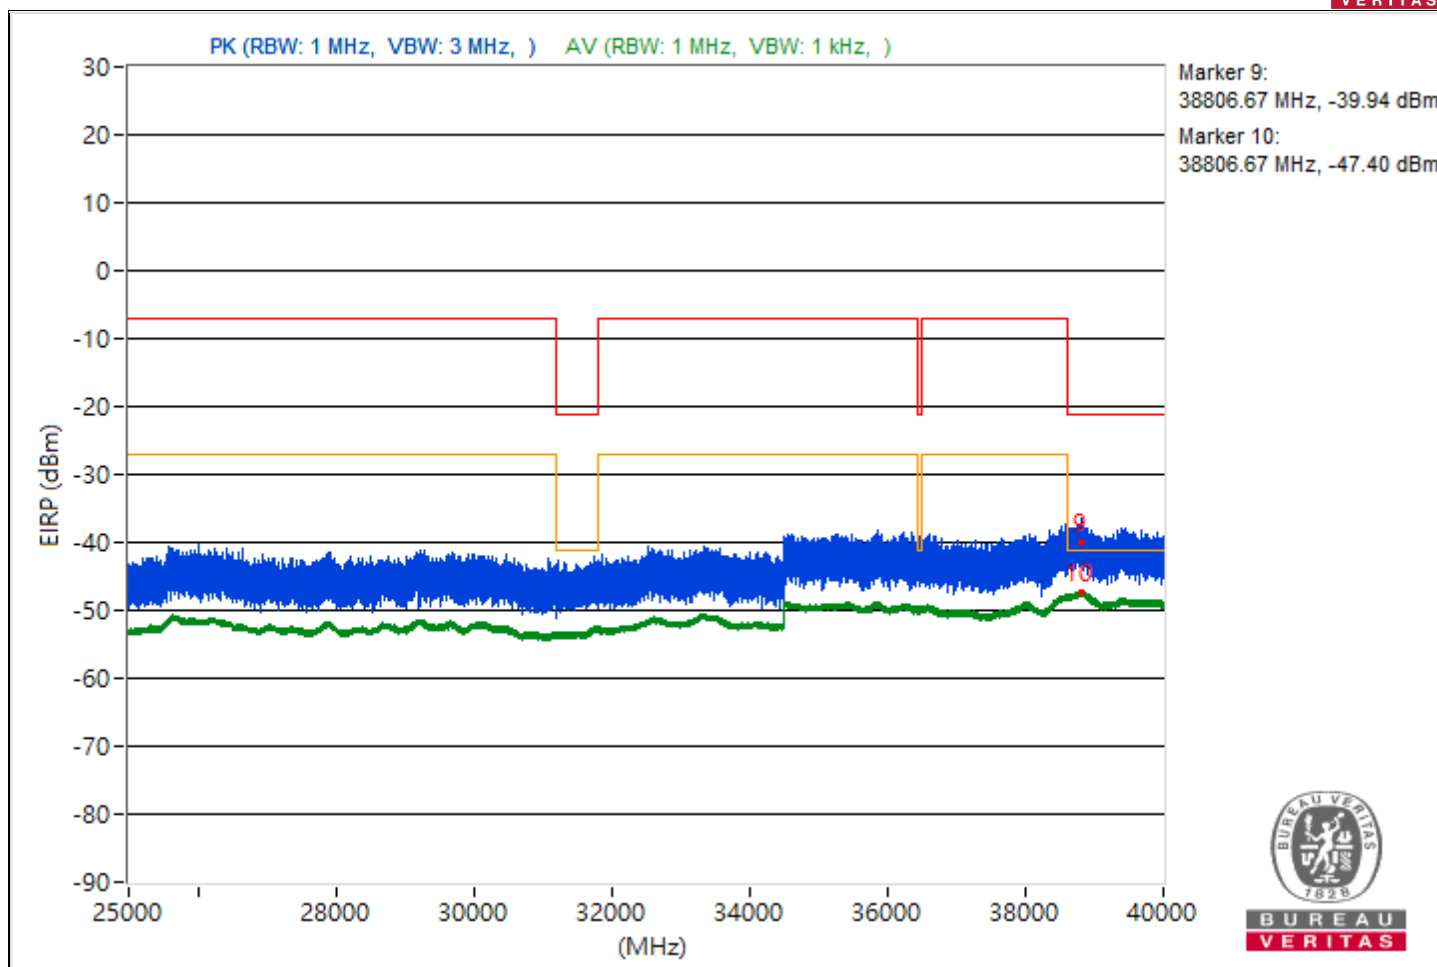


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3784.13	58.42 PK	74	-15.58	-48.61	-47.49	8.17	-36.84
2	3784.13	51.01 AV	54	-2.99	-55.09	-55.8	8.17	-44.25
3	14486.04	57.43 PK	74	-16.57	-48.23	-49.97	8.17	-37.83
4	14486.04	49.59 AV	54	-4.41	-56.68	-57.03	8.17	-45.67
5	20113.4	59.51 PK	74	-14.49	-47.11	-46.76	8.17	-35.75
6	20113.4	51.87 AV	54	-2.13	-54.23	-54.94	8.17	-43.39
7	23841.2	61.09 PK	74	-12.91	-46.42	-44.49	8.17	-34.17
8	23841.2	53.66 AV	54	-0.34	-52.6	-52.98	8.17	-41.6
9	38782.13	54.29 PK	74	-19.71	-54.71	-50.55	8.17	-40.97
10	38782.13	48.07 AV	54	-5.93	-58.04	-58.72	8.17	-47.19

Note: Margin value = Emission Level - Limit value

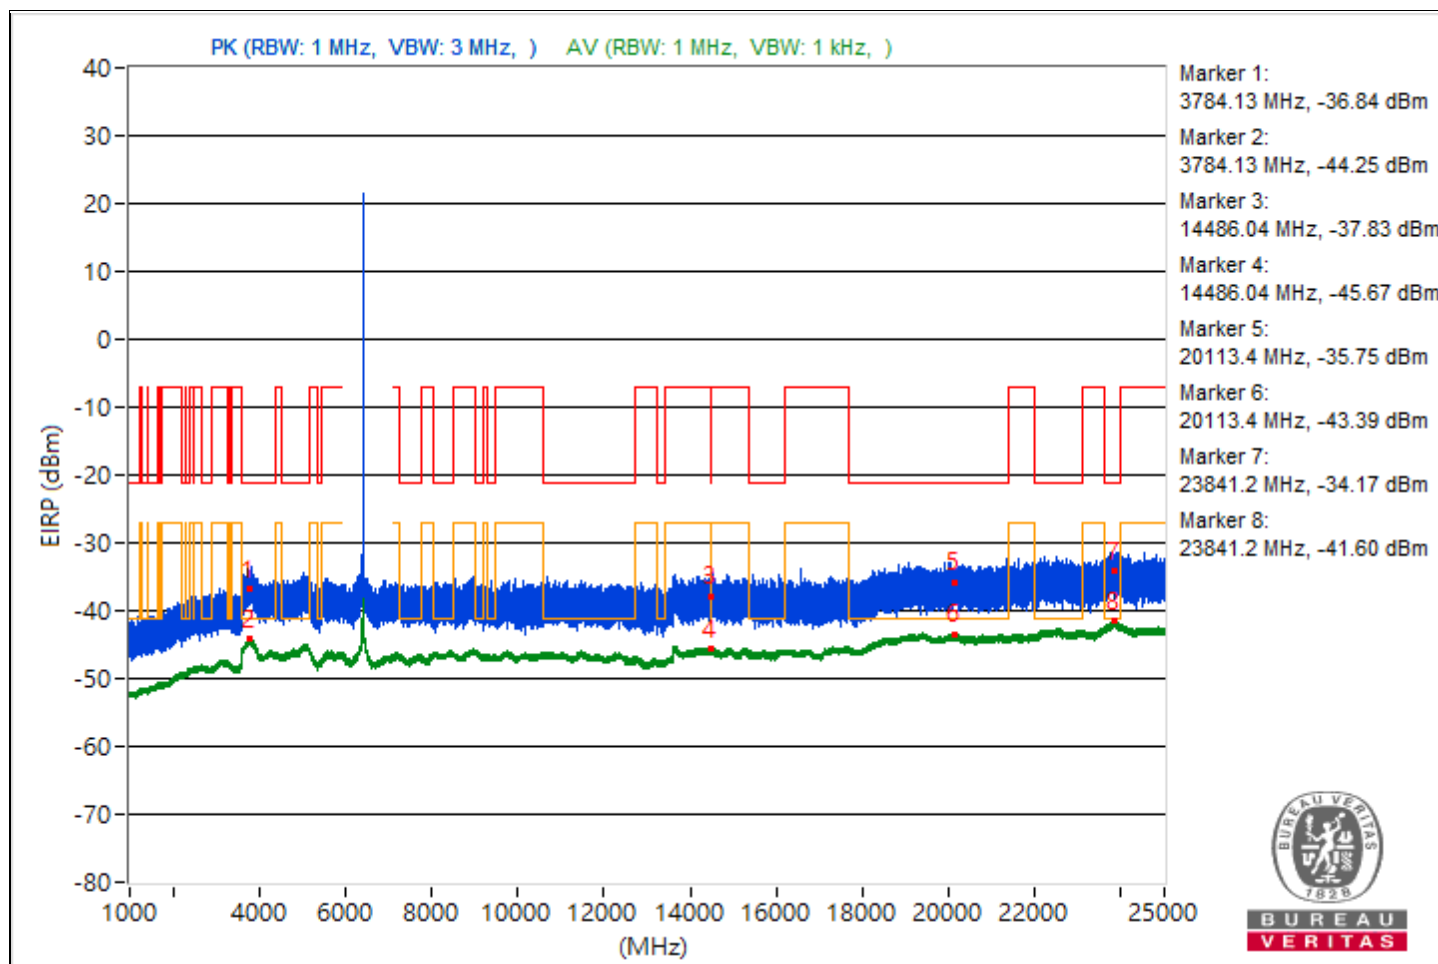


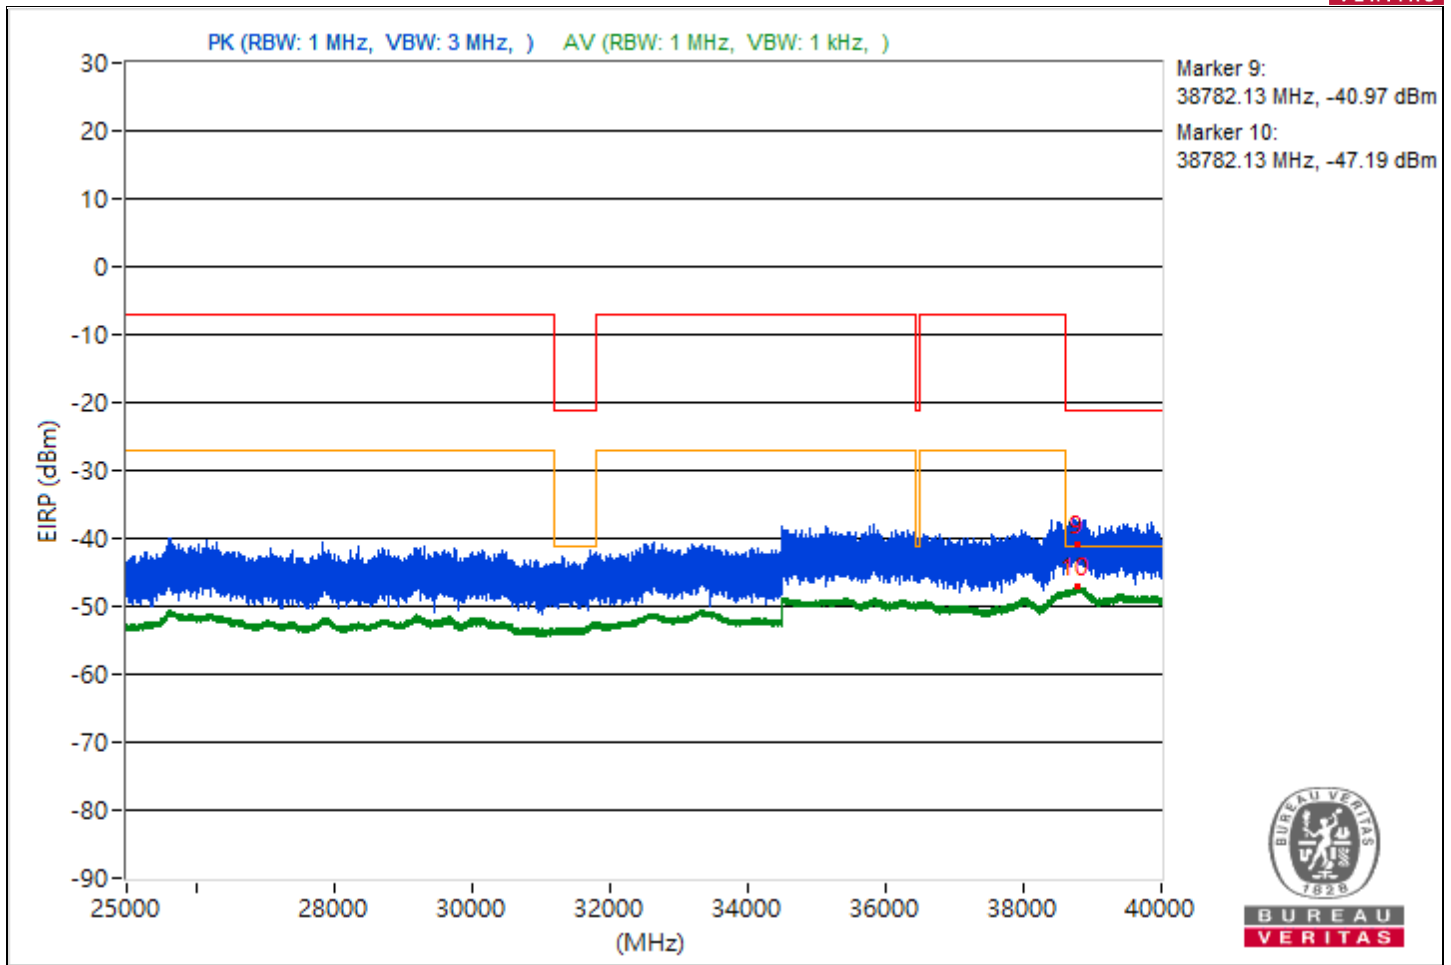


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3764.38	57.42 PK	74	-16.58	-49.32	-48.75	8.17	-37.84
2	3764.38	50.92 AV	54	-3.08	-55.95	-55.13	8.17	-44.34
3	14484.09	55.46 PK	74	-18.54	-50.46	-51.58	8.17	-39.8
4	14484.09	49.49 AV	54	-4.51	-56.72	-57.2	8.17	-45.77
5	19404.3	59.27 PK	74	-14.73	-46.78	-47.6	8.17	-35.99
6	19404.3	52 AV	54	-2	-54.6	-54.28	8.17	-43.26
7	23775.6	60.49 PK	74	-13.51	-46.88	-45.19	8.17	-34.77
8	23775.6	53.68 AV	54	-0.32	-52.52	-53.01	8.17	-41.58
9	38785.69	52.45 PK	74	-21.55	-53.59	-54.43	8.17	-42.81
10	38785.69	48.04 AV	54	-5.96	-58.82	-58.01	8.17	-47.22

Note: Margin value = Emission Level - Limit value

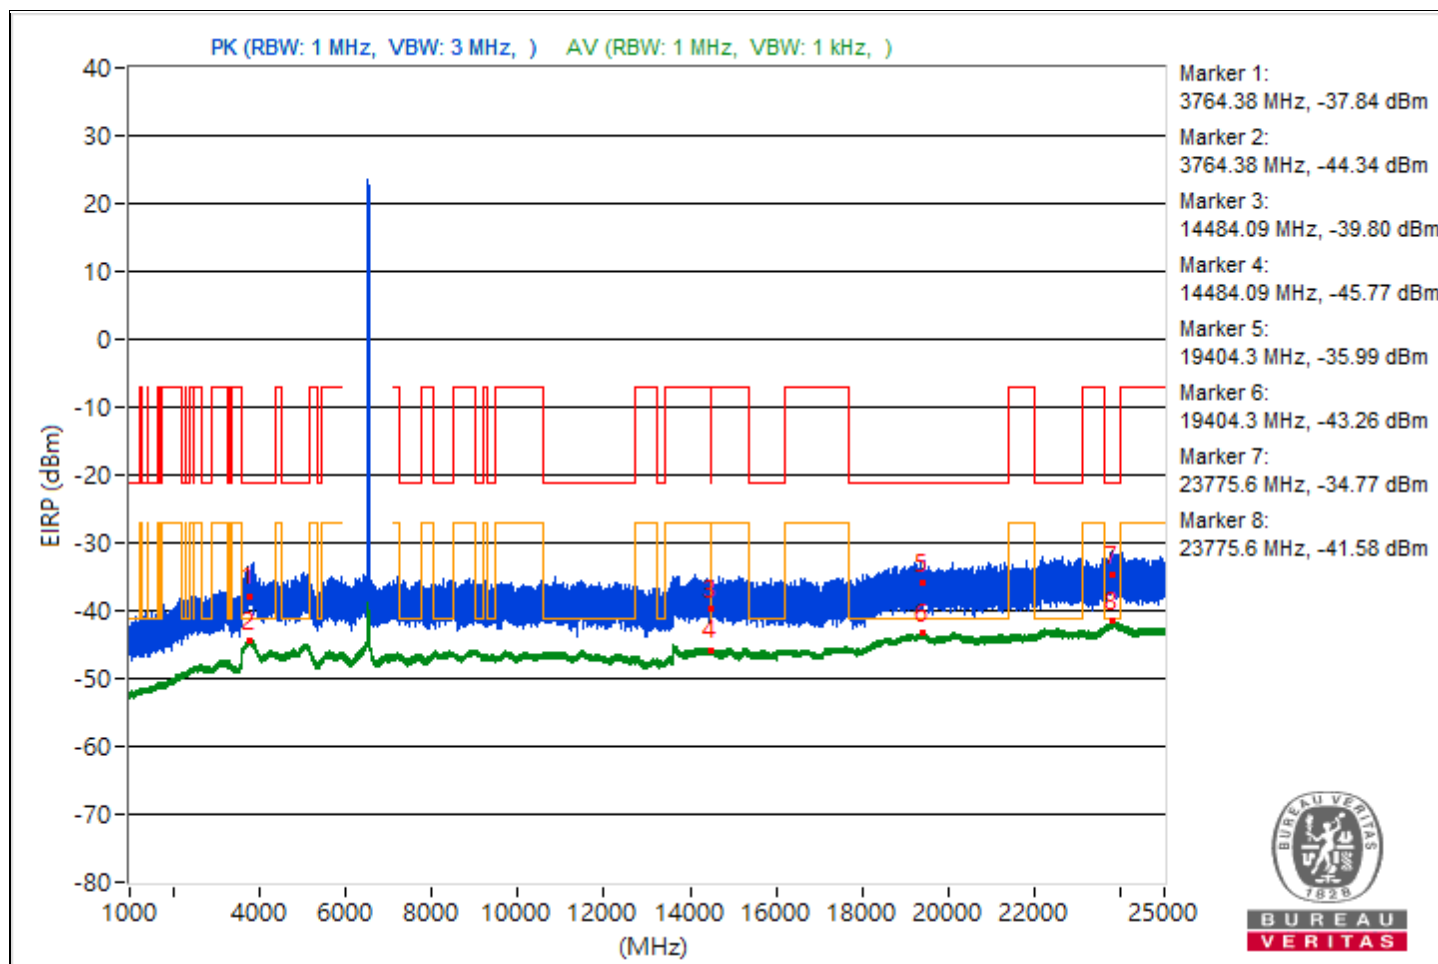


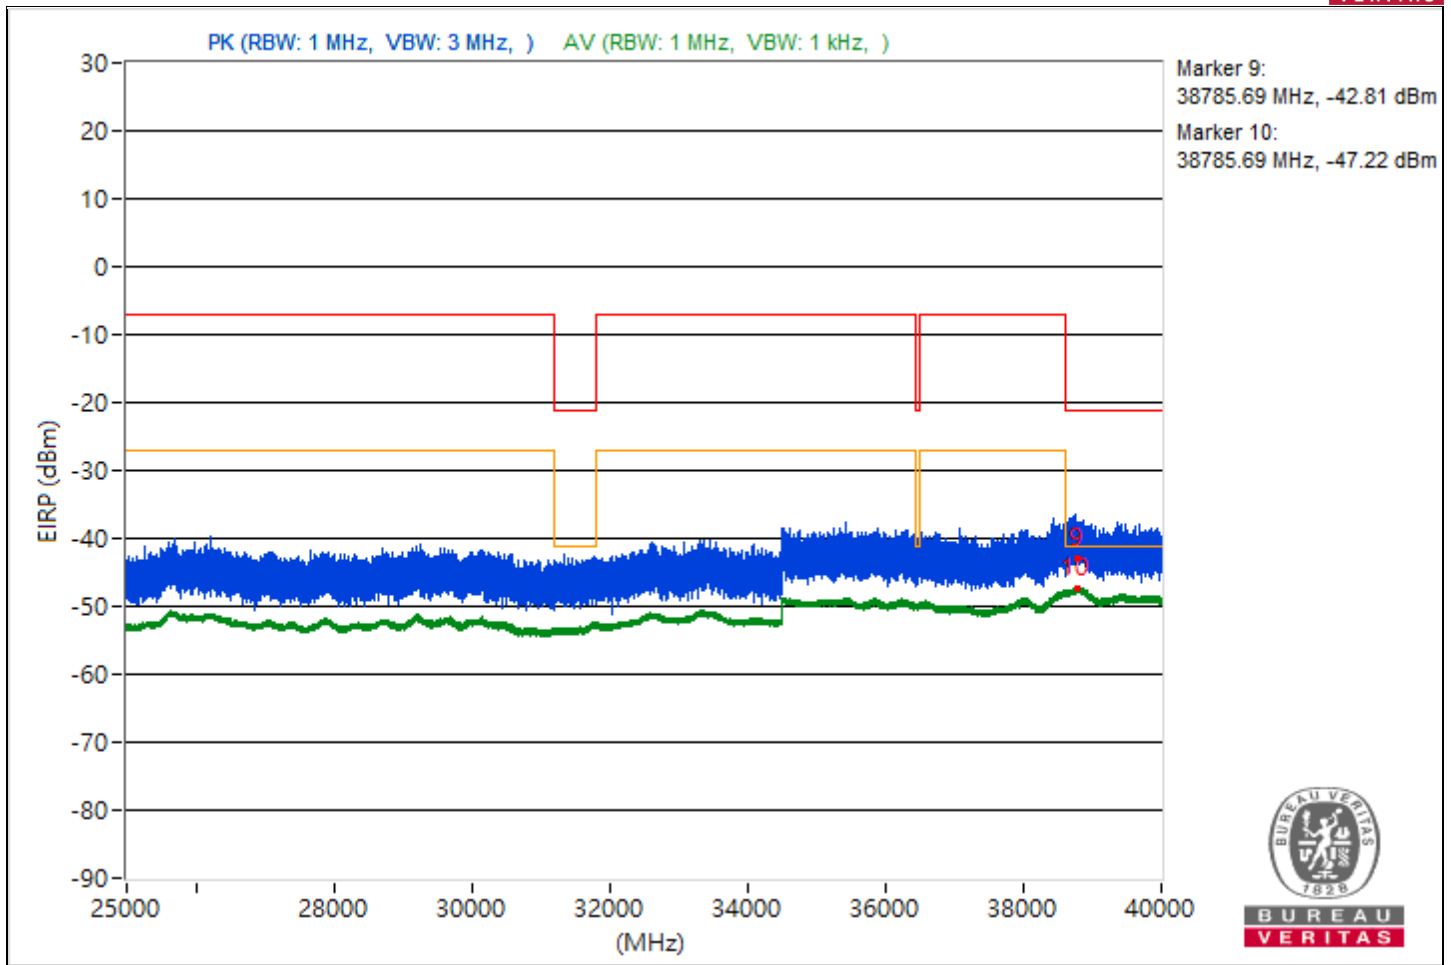


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3788.18	58.46 PK	74	-15.54	-47.29	-48.81	8.17	-36.8
2	3788.18	50.98 AV	54	-3.02	-55.18	-55.76	8.17	-44.28
3	14495.56	57.8 PK	74	-16.2	-47.75	-49.76	8.17	-37.46
4	14495.56	49.66 AV	54	-4.34	-56.92	-56.63	8.17	-45.6
5	19413.9	58.57 PK	74	-15.43	-47.68	-48.07	8.17	-36.69
6	19413.9	51.87 AV	54	-2.13	-54.78	-54.36	8.17	-43.39
7	23834.4	59.75 PK	74	-14.25	-47.25	-46.19	8.17	-35.51
8	23834.4	53.67 AV	54	-0.33	-52.53	-53.03	8.17	-41.59
9	38802.31	56.11 PK	74	-17.89	-50.63	-50.05	8.17	-39.15
10	38802.31	48.04 AV	54	-5.96	-58.75	-58.07	8.17	-47.22

Note: Margin value = Emission Level - Limit value

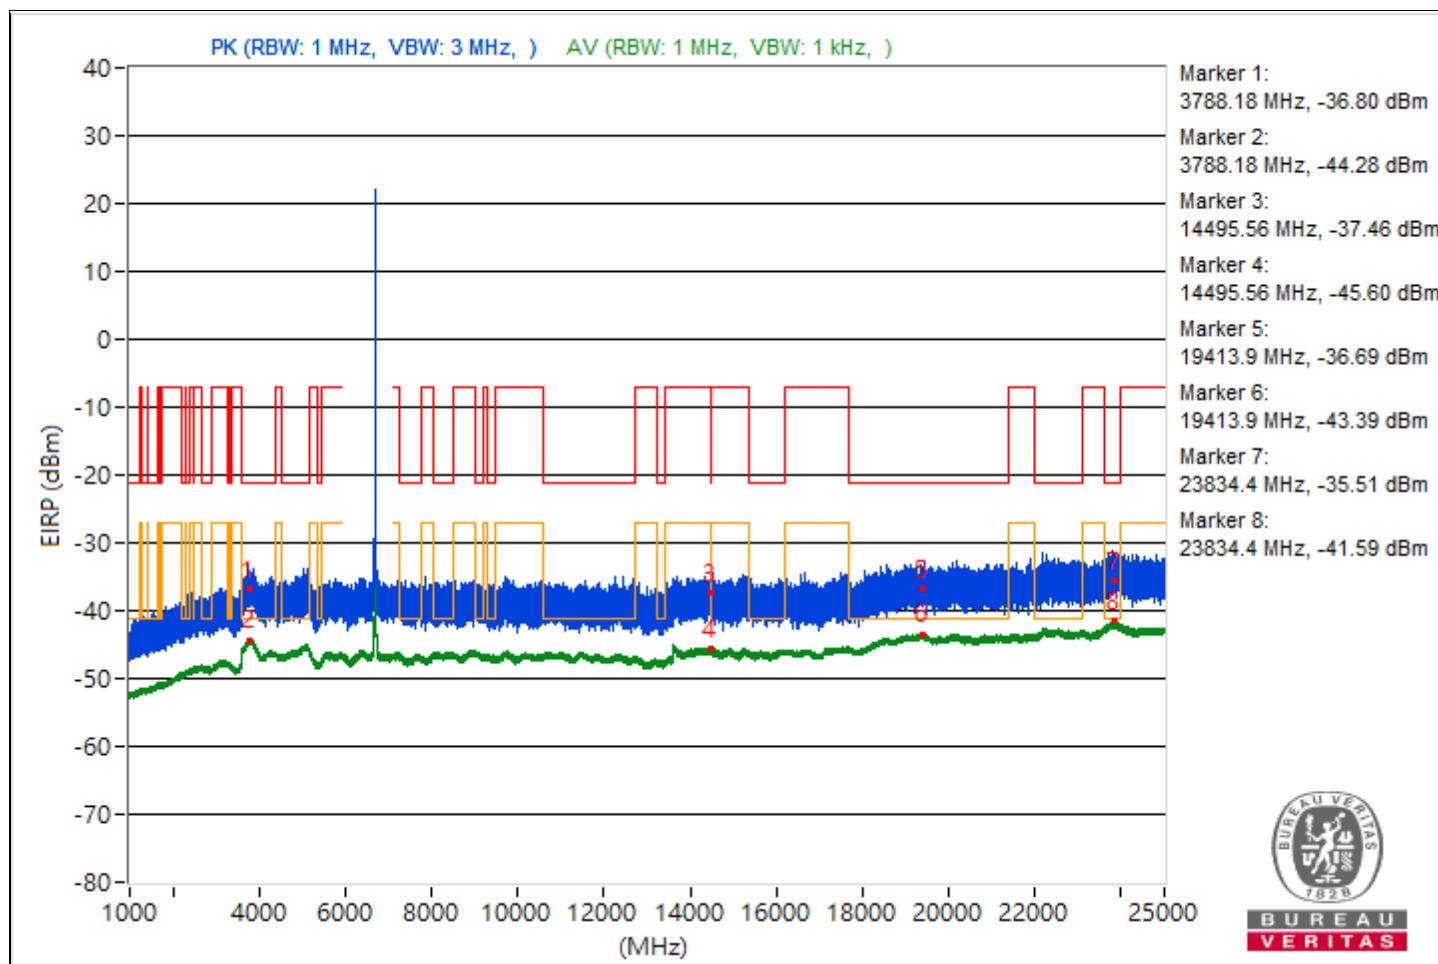


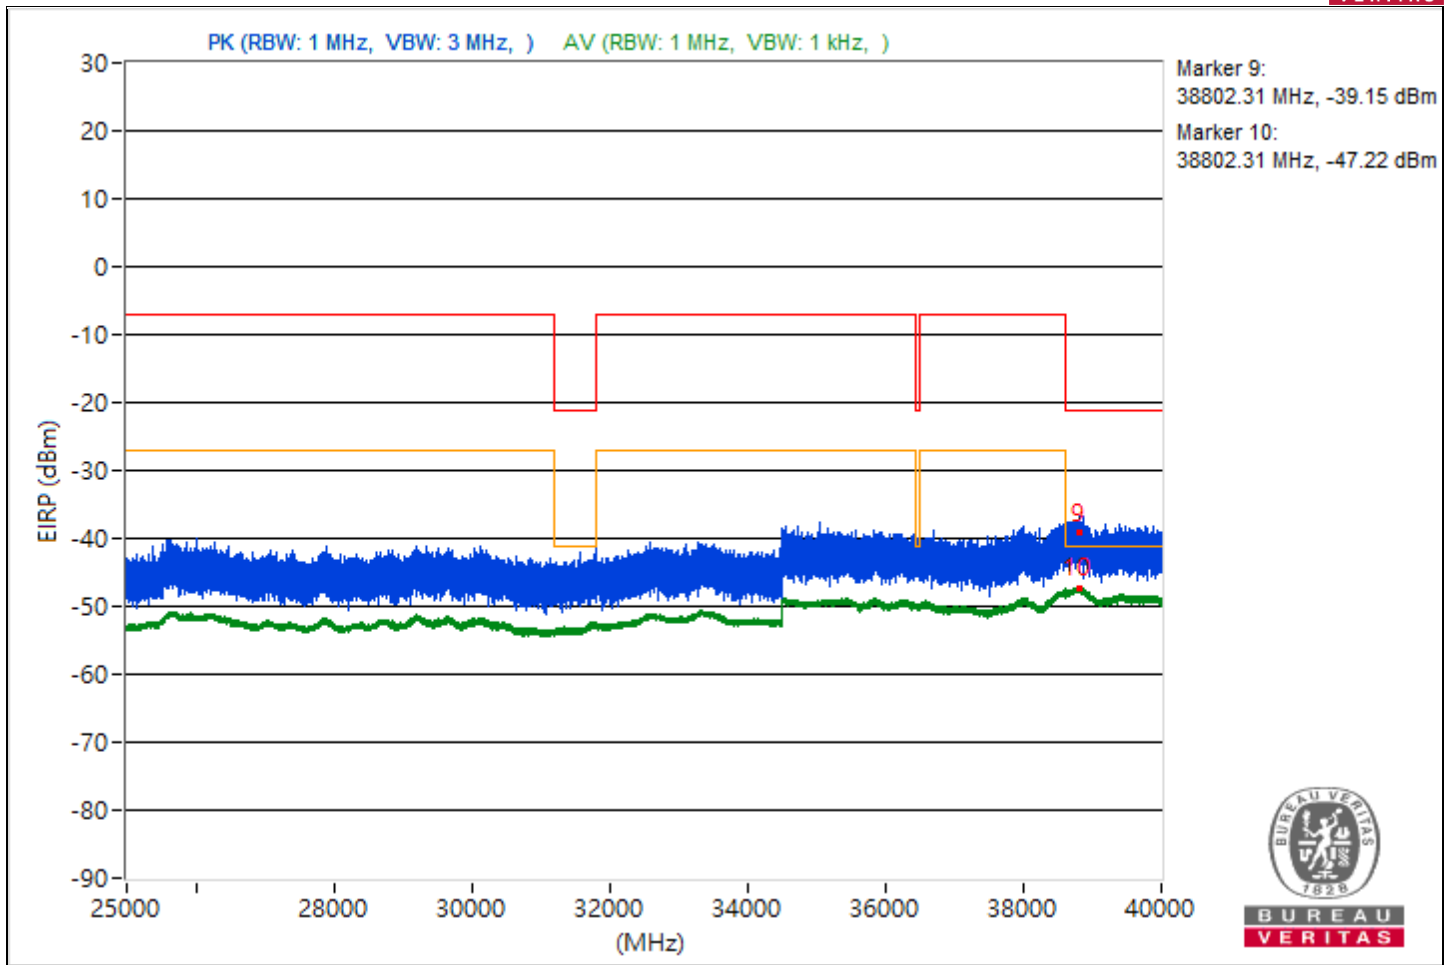


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3831.73	58.92 PK	74	-15.08	-49.3	-46.26	8.17	-36.34
2	3831.73	50.92 AV	54	-3.08	-55.8	-55.26	8.17	-44.34
3	14490.58	57.3 PK	74	-16.7	-49.21	-49.08	8.17	-37.96
4	14490.58	49.47 AV	54	-4.53	-56.71	-57.25	8.17	-45.79
5	19411.9	56.32 PK	74	-17.68	-48.7	-52.24	8.17	-38.94
6	19411.9	51.76 AV	54	-2.24	-55.05	-54.34	8.17	-43.5
7	23774.5	59.88 PK	74	-14.12	-46.03	-47.16	8.17	-35.38
8	23774.5	53.48 AV	54	-0.52	-53.35	-52.61	8.17	-41.78
9	38797.51	54.39 PK	74	-19.61	-51.72	-52.4	8.17	-40.87
10	38797.51	48.08 AV	54	-5.92	-58.5	-58.22	8.17	-47.18

Note: Margin value = Emission Level - Limit value

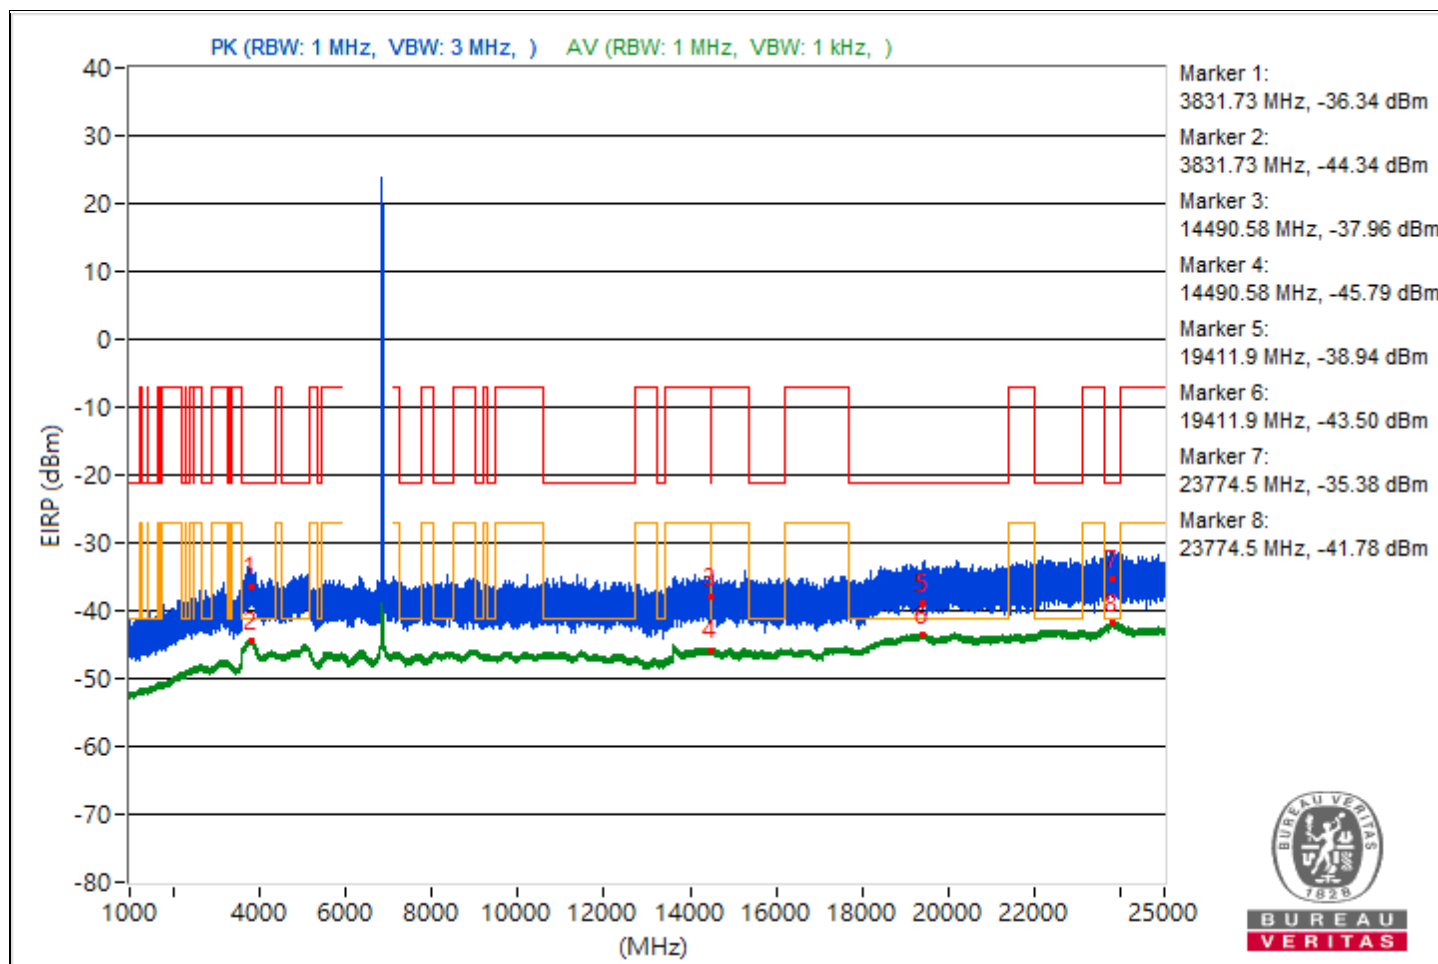

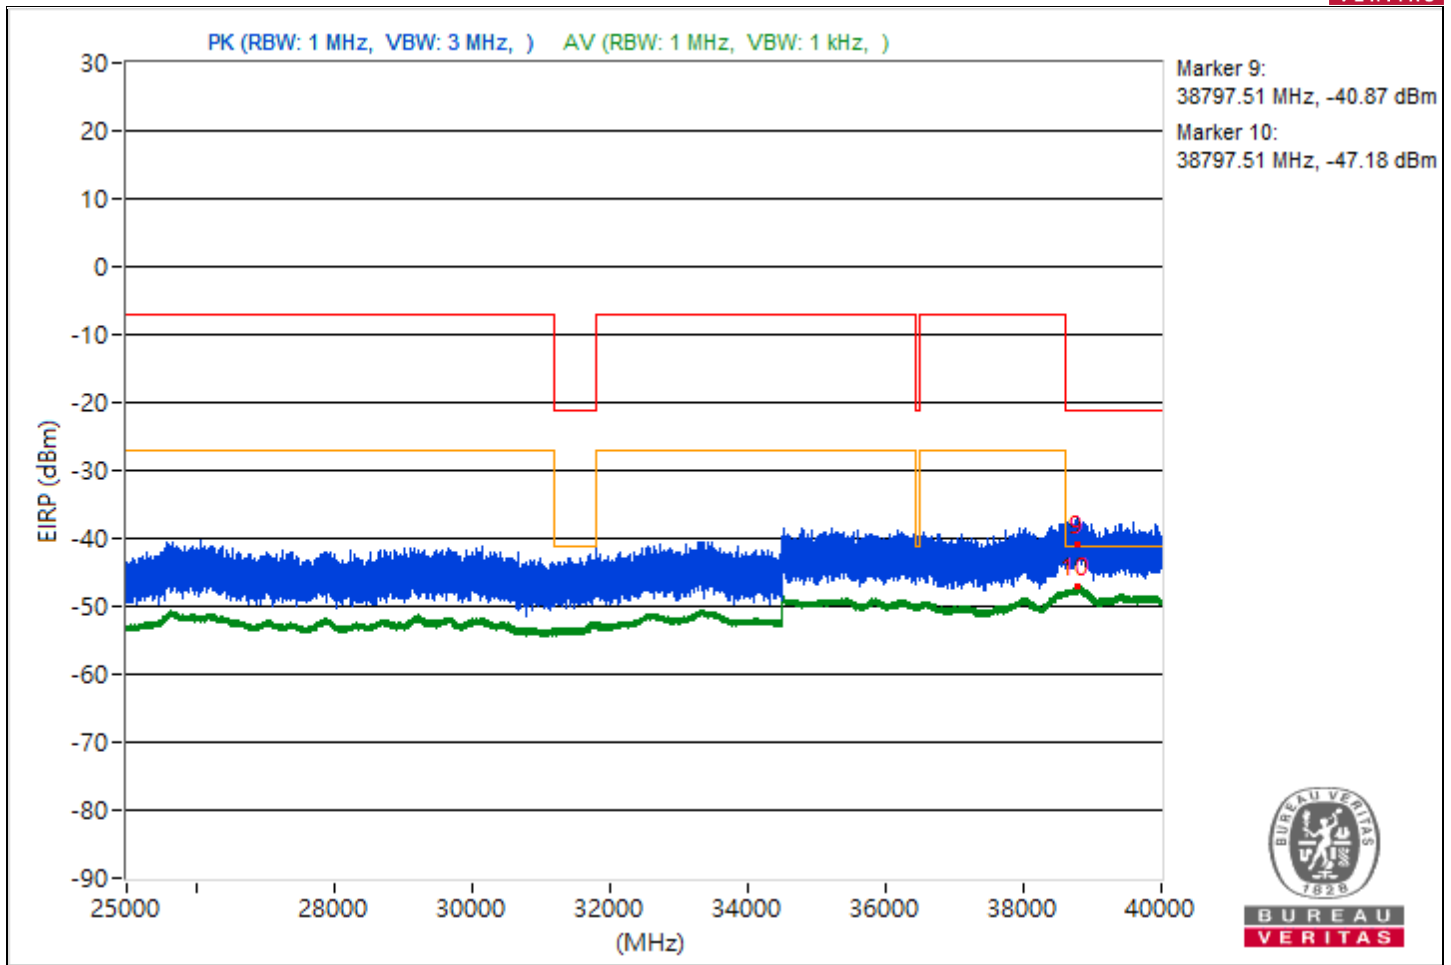


Conducted Band Edges

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5934	88.53 PK			-16.16	-20.81	8.15	-6.73
2	*5934	78.79 AV			-26.65	-28.91	8.15	-16.47
3	#5924.98	77.05 PK	88.26	-11.21	-28.38	-30.65	8.15	-18.21
4	#5924.98	68.24 AV	68.26	-0.02	-37.17	-39.5	8.15	-27.02

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

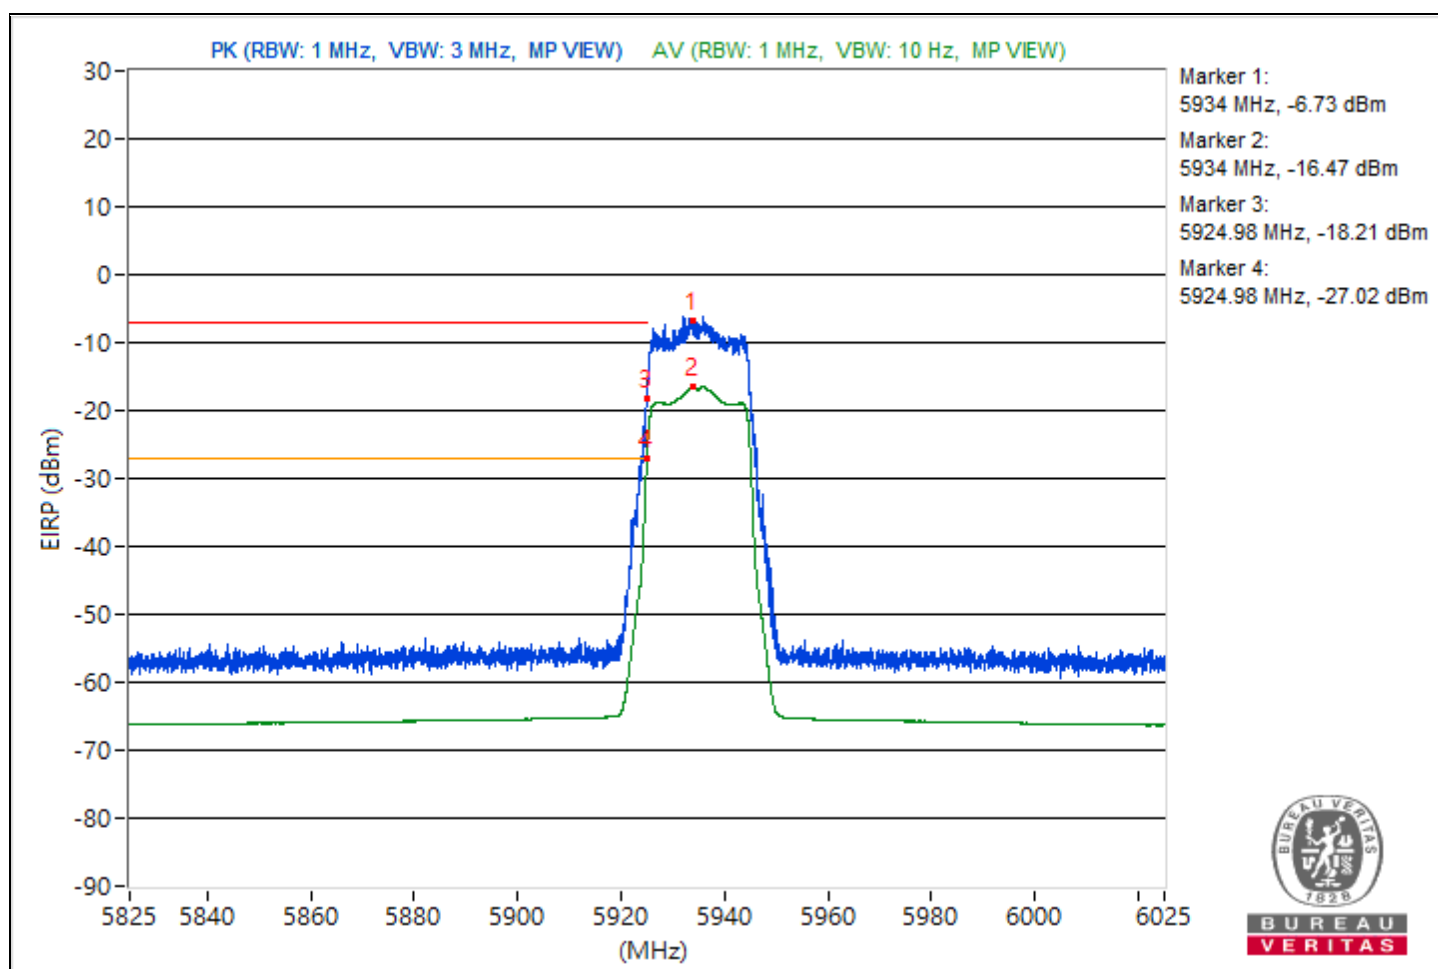


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.15	119 PK			13.33	11.66	8.15	23.74
2	*5954.15	110.11 AV			4.53	2.66	8.15	14.85
3	#5924.98	66.11 PK	88.26	-22.15	-38.05	-45.28	8.15	-29.15
4	#5924.98	55.33 AV	68.26	-12.93	-49.36	-54	8.15	-39.93

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

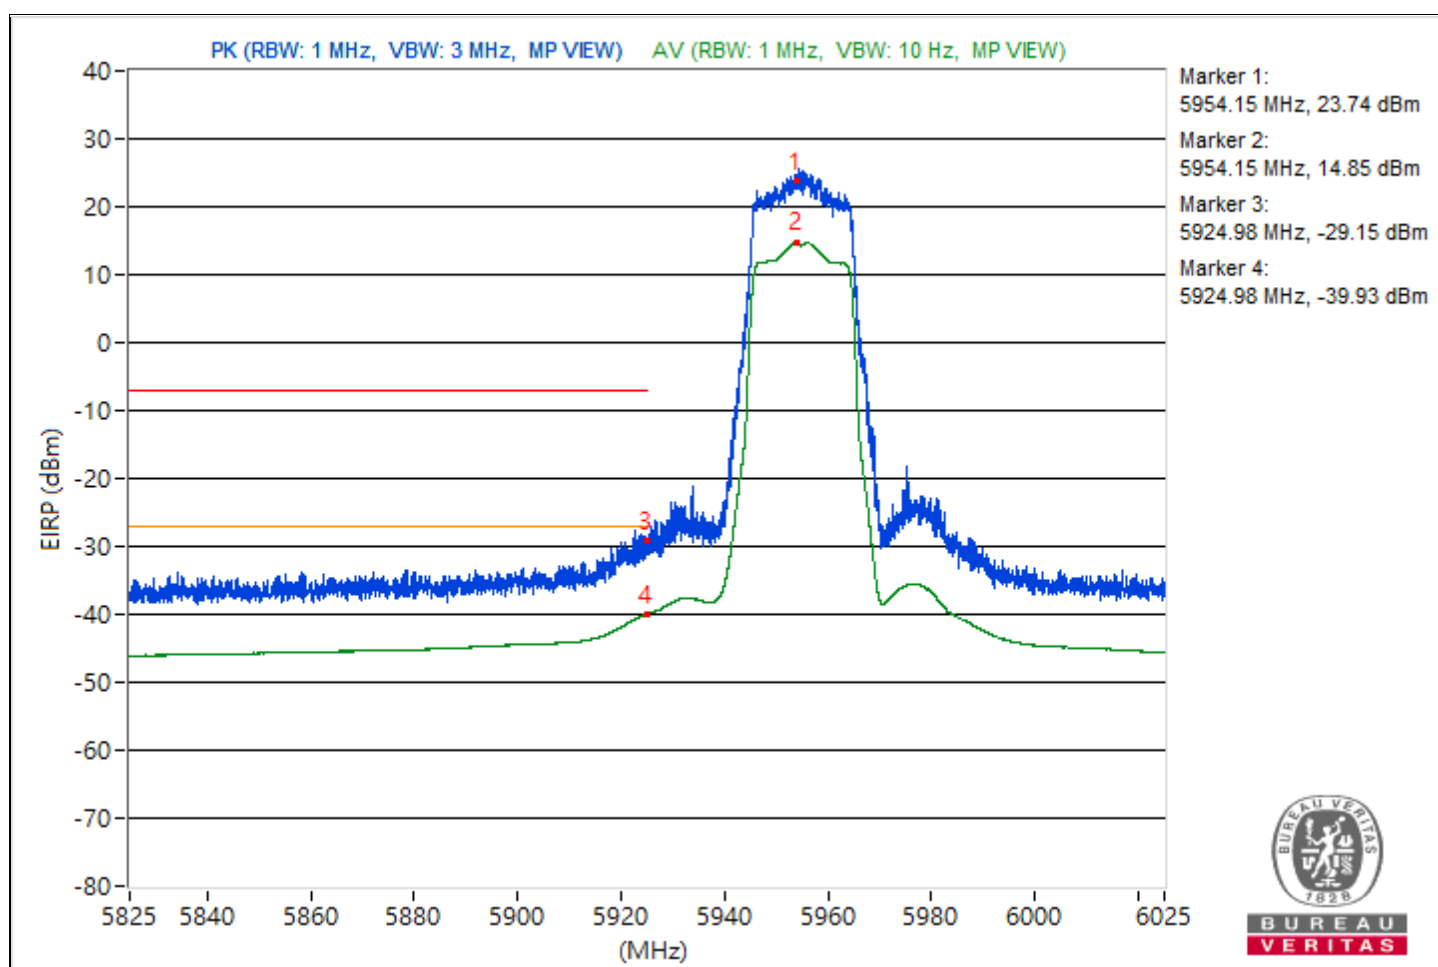


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	6.7 GHz ~ 7.225 GHz	Environmental Conditions	20°C, 60% RH
Tested By	Henry		

Conducted Band Edge								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6854.02	122.45 PK			16.25	15.76	8.17	27.19
2	*6854.02	113.46 AV			7.07	6.96	8.17	18.2
3	#7214.76	67.05 PK	88.26	-21.21	-39.2	-39.59	8.17	-28.21
4	#7214.76	59.23 AV	68.26	-9.03	-47.25	-47.16	8.17	-36.03

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

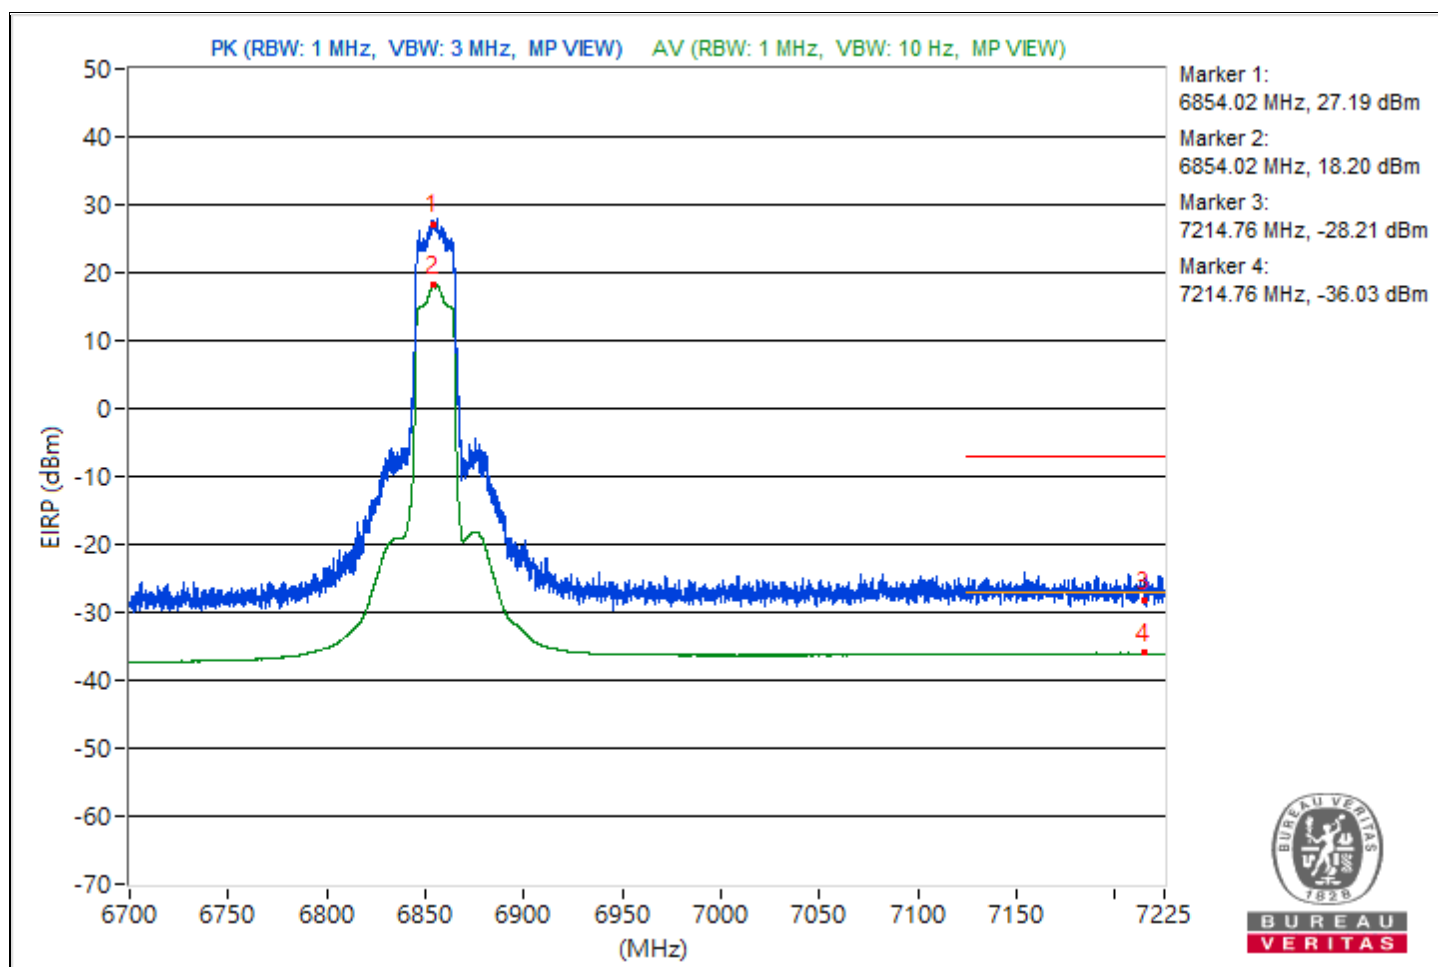

Mode B

RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	49.3 PK	74.0	-24.7	1.58 H	192	34.1	15.2
2	11870.00	36.5 AV	54.0	-17.5	1.58 H	192	21.3	15.2
3	17805.00	47.3 PK	74.0	-26.7	1.43 H	168	20.5	26.8
4	17805.00	36.1 AV	54.0	-17.9	1.43 H	168	9.3	26.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	49.9 PK	74.0	-24.1	1.97 V	292	34.7	15.2
2	11870.00	37.2 AV	54.0	-16.8	1.97 V	292	22.0	15.2
3	17805.00	48.1 PK	74.0	-25.9	1.55 V	319	21.3	26.8
4	17805.00	37.4 AV	54.0	-16.6	1.55 V	319	10.6	26.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	50.1 PK	74.0	-23.9	1.57 H	190	34.9	15.2
2	11910.00	37.1 AV	54.0	-16.9	1.57 H	190	21.9	15.2
3	17865.00	47.5 PK	74.0	-26.5	1.45 H	158	19.5	28.0
4	17865.00	36.5 AV	54.0	-17.5	1.45 H	158	8.5	28.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	51.1 PK	74.0	-22.9	1.95 V	297	35.9	15.2
2	11910.00	39.3 AV	54.0	-14.7	1.95 V	297	24.1	15.2
3	17865.00	49.8 PK	74.0	-24.2	1.57 V	316	21.8	28.0
4	17865.00	38.1 AV	54.0	-15.9	1.57 V	316	10.1	28.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	50.1 PK	74.0	-23.9	1.63 H	164	35.0	15.1
2	12350.00	37.2 AV	54.0	-16.8	1.63 H	164	22.1	15.1
3	18525.00	47.7 PK	74.0	-26.3	1.38 H	152	52.4	-4.7
4	18525.00	36.7 AV	54.0	-17.3	1.38 H	152	41.4	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	51.3 PK	74.0	-22.7	2.01 V	291	36.2	15.1
2	12350.00	39.2 AV	54.0	-14.8	2.01 V	291	24.1	15.1
3	18525.00	49.3 PK	74.0	-24.7	1.62 V	307	54.0	-4.7
4	18525.00	37.7 AV	54.0	-16.3	1.62 V	307	42.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	49.9 PK	88.2	-38.3	1.65 H	172	34.3	15.6
2	#12830.00	36.9 AV	68.2	-31.3	1.65 H	172	21.3	15.6
3	19245.00	47.7 PK	74.0	-26.3	1.40 H	154	51.7	-4.0
4	19245.00	36.5 AV	54.0	-17.5	1.40 H	154	40.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	51.1 PK	88.2	-37.1	2.03 V	297	35.5	15.6
2	#12830.00	39.3 AV	68.2	-28.9	2.03 V	297	23.7	15.6
3	19245.00	49.1 PK	74.0	-24.9	1.67 V	298	53.1	-4.0
4	19245.00	37.6 AV	54.0	-16.4	1.67 V	298	41.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	50.2 PK	88.2	-38.0	1.57 H	164	34.4	15.8
2	#13070.00	37.0 AV	68.2	-31.2	1.57 H	164	21.2	15.8
3	19605.00	47.3 PK	74.0	-26.7	1.40 H	147	51.3	-4.0
4	19605.00	35.9 AV	54.0	-18.1	1.40 H	147	39.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	51.3 PK	88.2	-36.9	2.06 V	279	35.5	15.8
2	#13070.00	39.2 AV	68.2	-29.0	2.06 V	279	23.4	15.8
3	19605.00	49.5 PK	74.0	-24.5	1.58 V	301	53.5	-4.0
4	19605.00	37.6 AV	54.0	-16.4	1.58 V	301	41.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	49.9 PK	74.0	-24.1	1.60 H	184	32.2	17.7
2	13390.00	36.8 AV	54.0	-17.2	1.60 H	184	19.1	17.7
3	20085.00	47.0 PK	74.0	-27.0	1.46 H	158	50.4	-3.4
4	20085.00	36.1 AV	54.0	-17.9	1.46 H	158	39.5	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	50.9 PK	74.0	-23.1	2.10 V	274	33.2	17.7
2	13390.00	39.0 AV	54.0	-15.0	2.10 V	274	21.3	17.7
3	20085.00	48.4 PK	74.0	-25.6	1.72 V	304	51.8	-3.4
4	20085.00	37.1 AV	54.0	-16.9	1.72 V	304	40.5	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	49.7 PK	88.2	-38.5	1.62 H	196	31.1	18.6
2	#13710.00	36.6 AV	68.2	-31.6	1.62 H	196	18.0	18.6
3	20565.00	46.6 PK	74.0	-27.4	1.40 H	144	49.8	-3.2
4	20565.00	35.9 AV	54.0	-18.1	1.40 H	144	39.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	50.5 PK	88.2	-37.7	2.07 V	273	31.9	18.6
2	#13710.00	38.5 AV	68.2	-29.7	2.07 V	273	19.9	18.6
3	20565.00	47.6 PK	74.0	-26.4	1.72 V	315	50.8	-3.2
4	20565.00	36.6 AV	54.0	-17.4	1.72 V	315	39.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

7.5 APC (Automatic Power Control) and Proper Power Adjustment


For Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP 802.11be (EHT20)

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Matthew Yang
--------------	---------	---------------------------	--------------	------------	--------------


Chan.	Chan. Freq. (MHz)	Associated AP Type	Conducted Power (dBm)		Total Power (dBm)	Directional Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
			Chain 0	Chain 1					
21	6055	Standard Power	10.19	10.73	13.48	5.14	18.62	30	Pass
		Low Power	5.89	5.86	8.89	5.14	14.03	24	Pass

Note: EIRP (dBm) = Conducted Power (dBm) + Directional Gain (dBi)

Client Plot of Power when associated with Standard Power AP

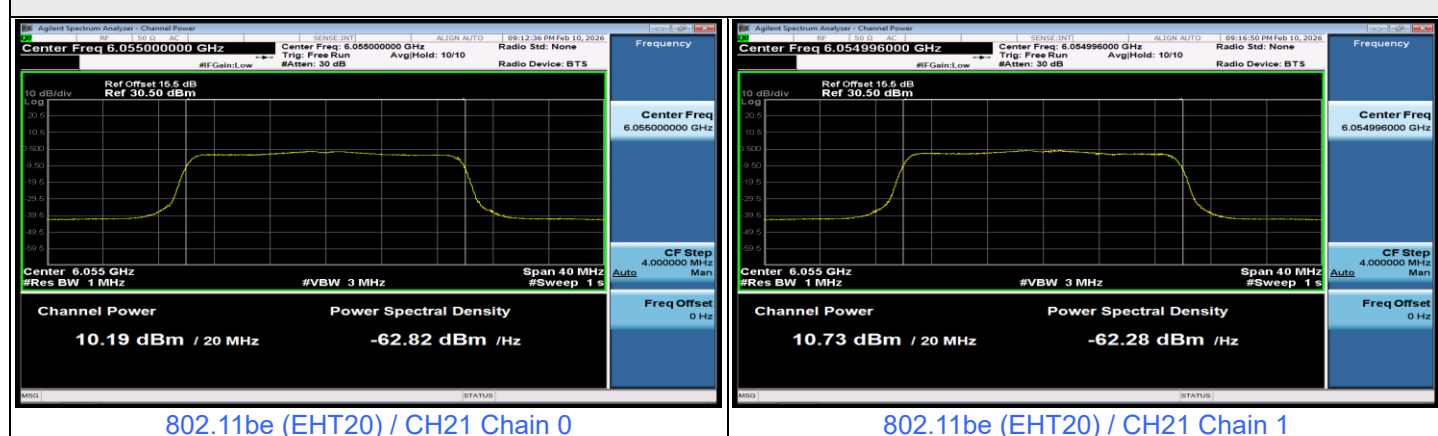

Client Plot of Power when associated with Low Power Indoor AP

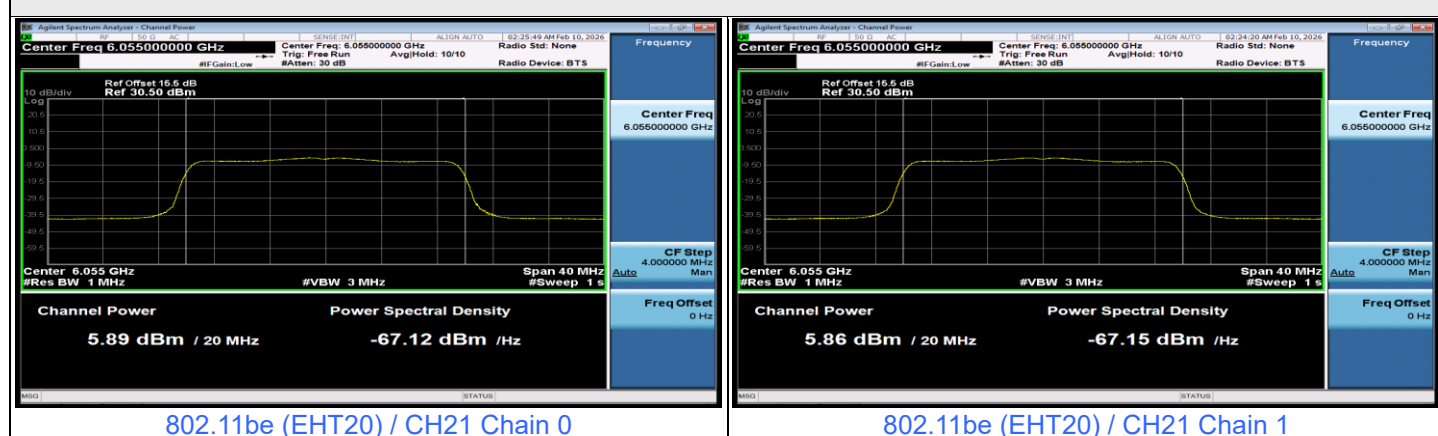

Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)


802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Standard AP Registered EIRP (dBm)	Standard Client							Test Result
			Conducted Power (dBm)		Total Power (dBm)	Directional Gain (dBi)	EIRP (dBm)	Adjust Power Level (dB)	Adjust Power Level Limit (dB)	
			Chain 0	Chain 1						
21	6055	24.2	5.35	5.58	8.48	5.14	13.62	10.58	> 6	Pass
21	6055	29	5.56	5.53	8.56	5.14	13.7	15.3	> 6	Pass
21	6055	34.3	10.19	10.73	13.48	5.14	18.62	15.68	> 6	Pass


Notes:

1. EIRP (dBm) = Conducted Power (dBm) + Directional Gain (dBi)
2. Standard Client Adjust Power Level (dB) = Standard AP Registered EIRP (dBm) - Standard Client EIRP (dBm)

Plot of Standard Client Conducted Power when Standard AP Registered EIRP is 24.2 dBm

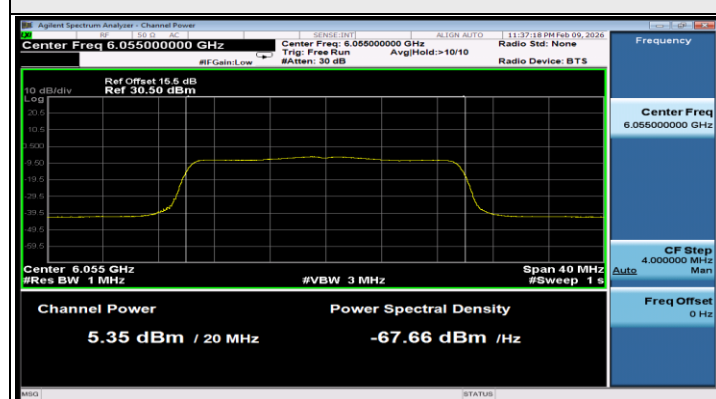

802.11be (EHT20) / CH21 Chain 0

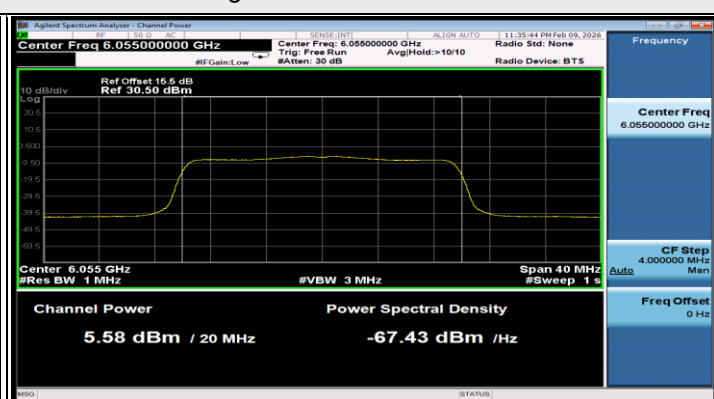

802.11be (EHT20) / CH21 Chain 1

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---