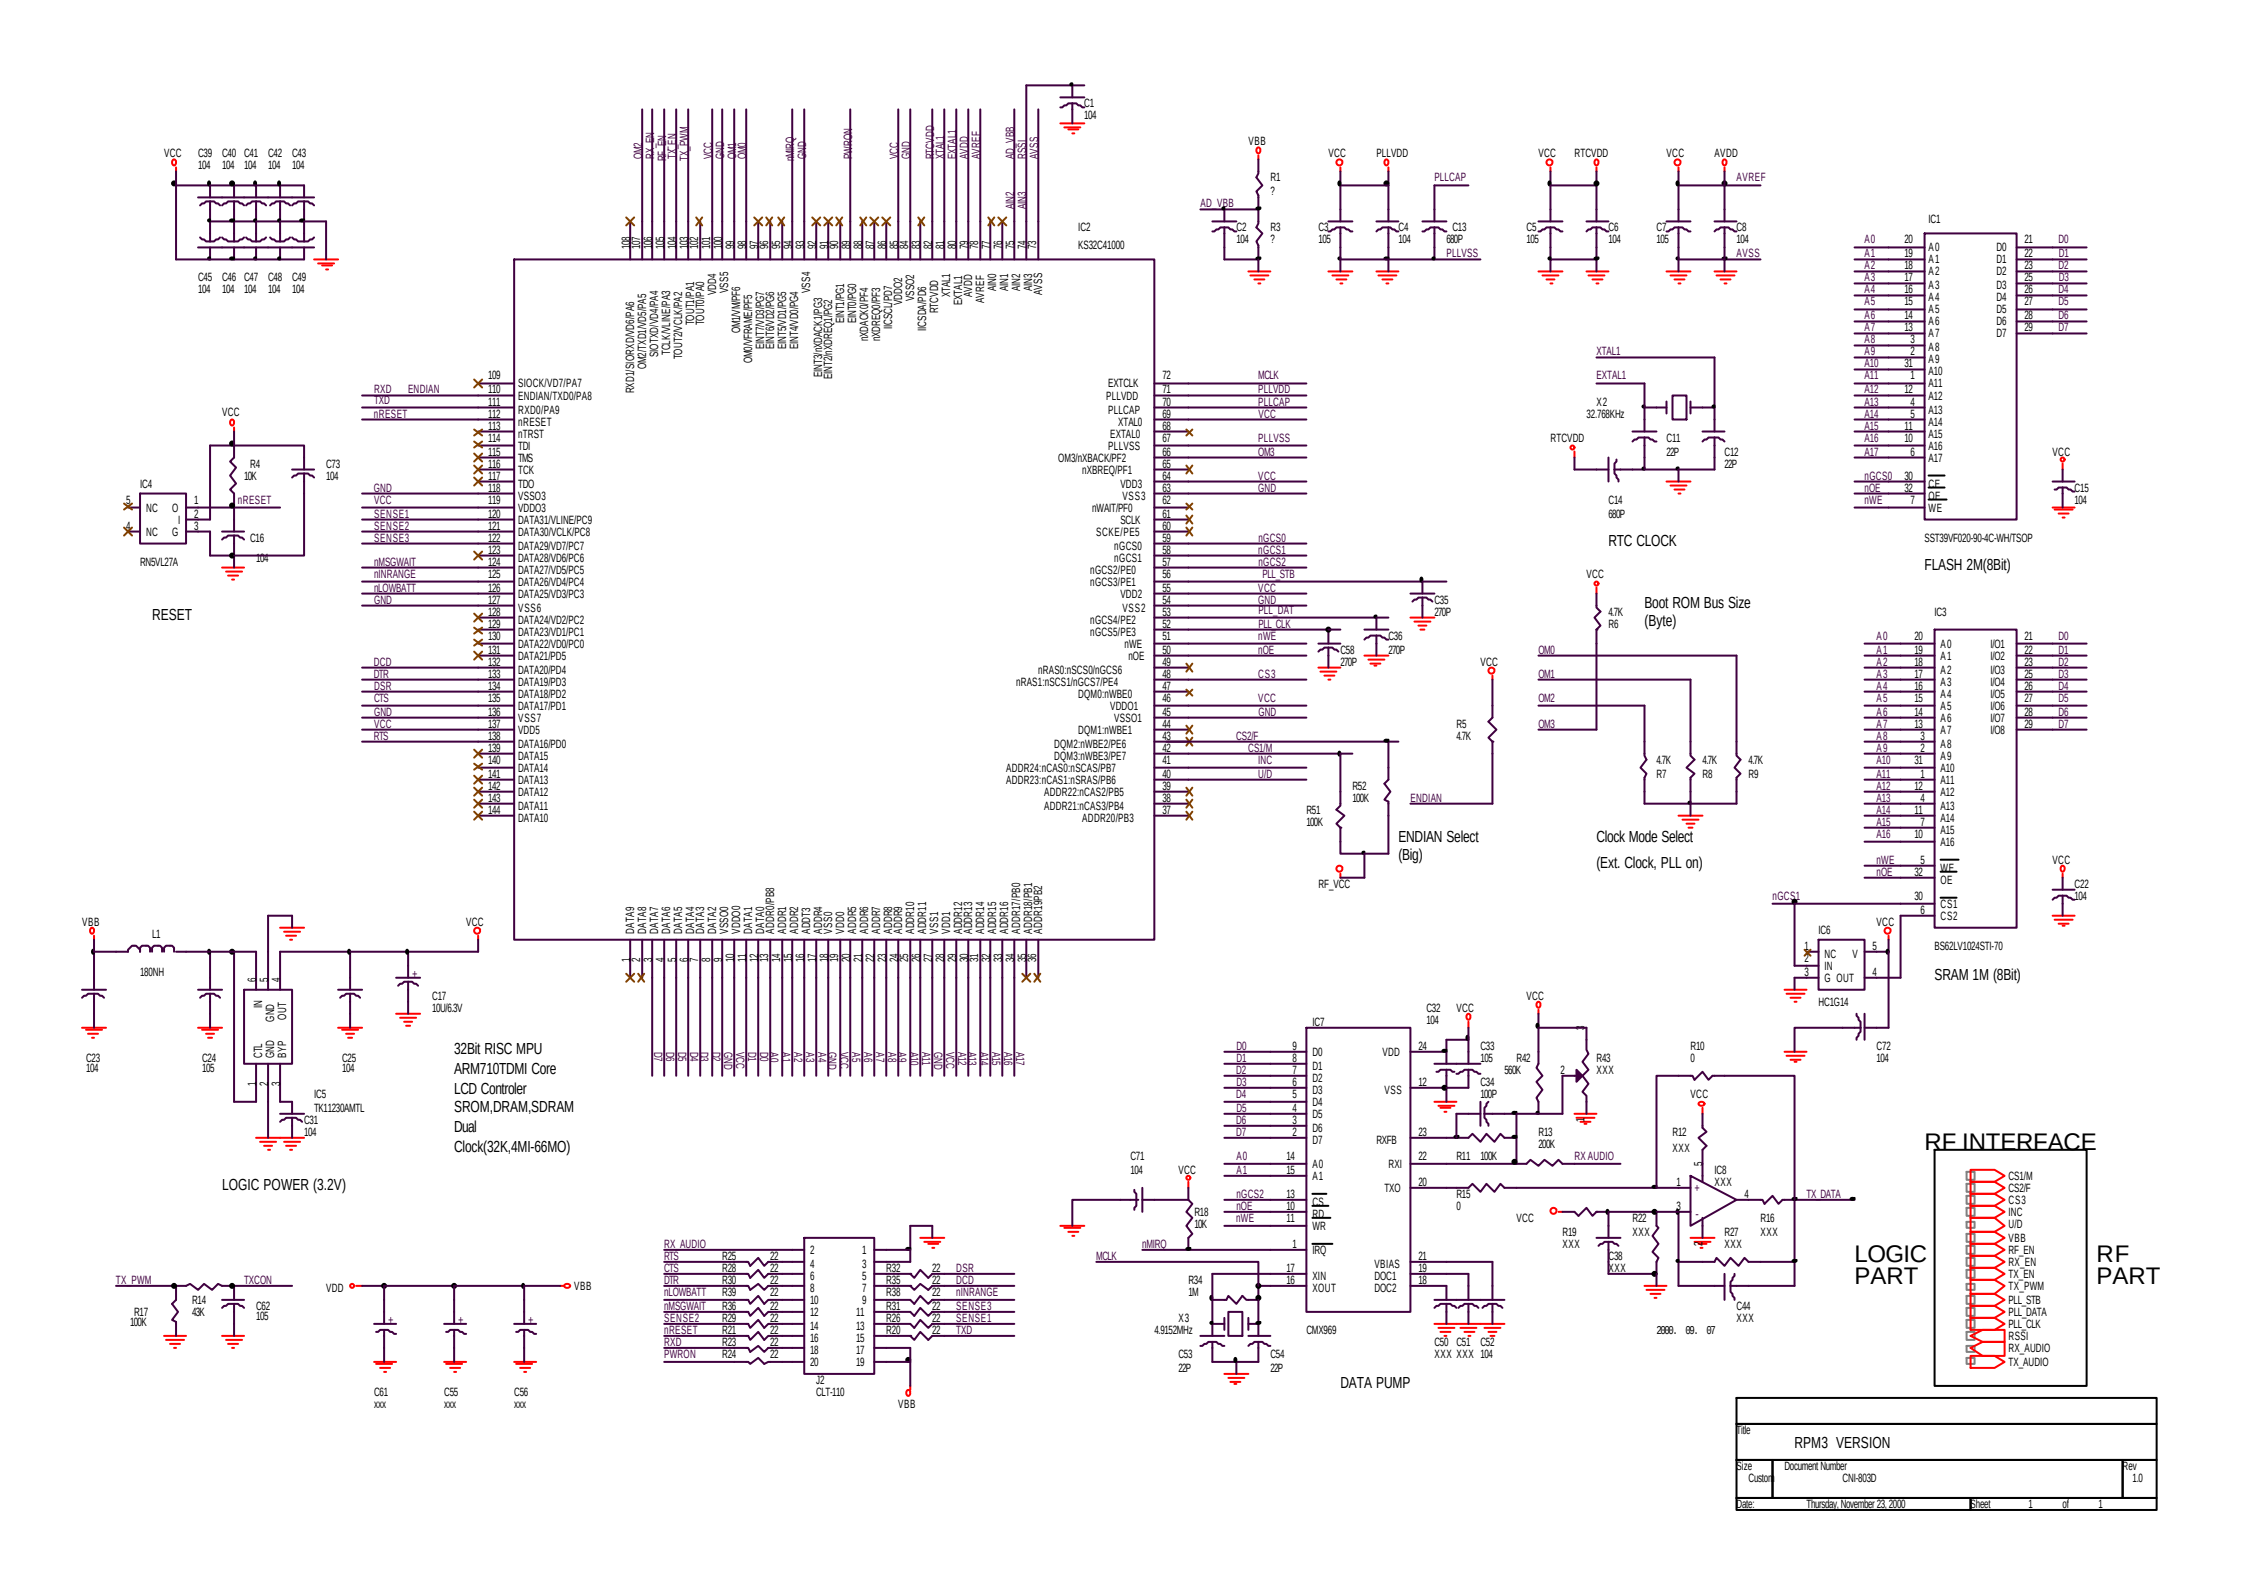

IC2
KS32C41000
RESET
RNSVL27A
LOGIC POWER (3.2V)
32Bit RISC MPU
ARM710TDMI Core
LCD Controler
SROM,DRAM,SDRAM
Dual
Clock(32K,4MI-66MO)
RTC CLOCK
FLASH 2M(8Bit)
SST39VF020-90-4C-WH/TSOP
Boot ROM Bus Size
(Byte)
Clock Mode Select
(Ext. Clock, PLL on)
ENDIAN Select
(Big)
SRAM 1M (8Bit)
BS62LV1024STI-70
HC1G14
DATA PUMP
CMX969
RF INTERFACE
LOGIC
PART
RF
PART
RPM3 VERSION
Thursday, November 23, 2000