

1. Feature and Application

- . dipole antenna design
- . small size / high gain / omni-directional radiation pattern
- . IEEE 802.11 b / g WLAN AP (Access Point) application
- . Bluetooth / HomeRF / ISM Band and other 2.4 GHz wireless communication application

2. Specification


1. Frequency Range	2400 ~ 2500 MHz
2. V.S.W.R.	< 2.0
3. Antenna Gain	2.0 dBi
4. Antenna Radiation Pattern	Omni-directional
5. Impedance	50 ohm
6. Color of Outer Cover	Black
7. Material of Outer Cover	TPE
8. Material of Hinge	PC
9. Operation Temperature	-40°C ~ + 90 ℃
10. Storage Temperature	-30°C ~ + 75 ℃

Antenna with SMA Male Reverse Connector




3. S11 Return Loss / V.S.W.R. / Impedance Testing Data

Antenna is 90 degree:

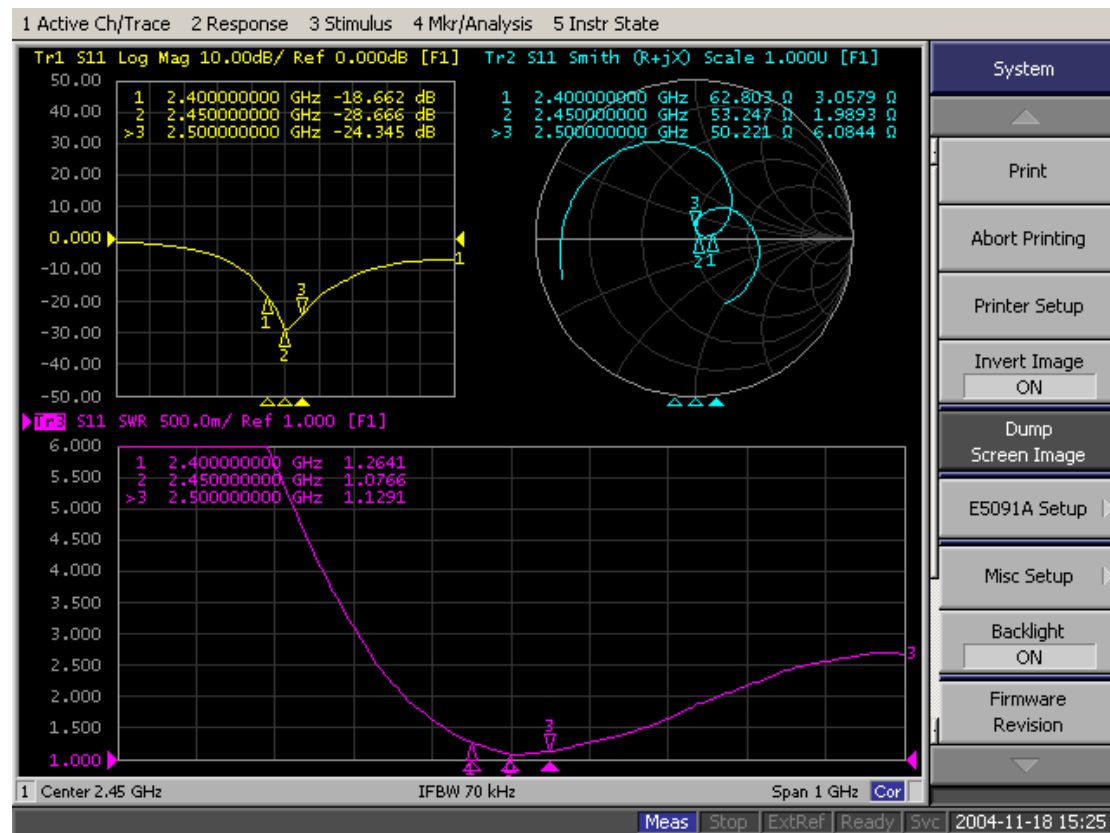


Antenna is 180 degree:

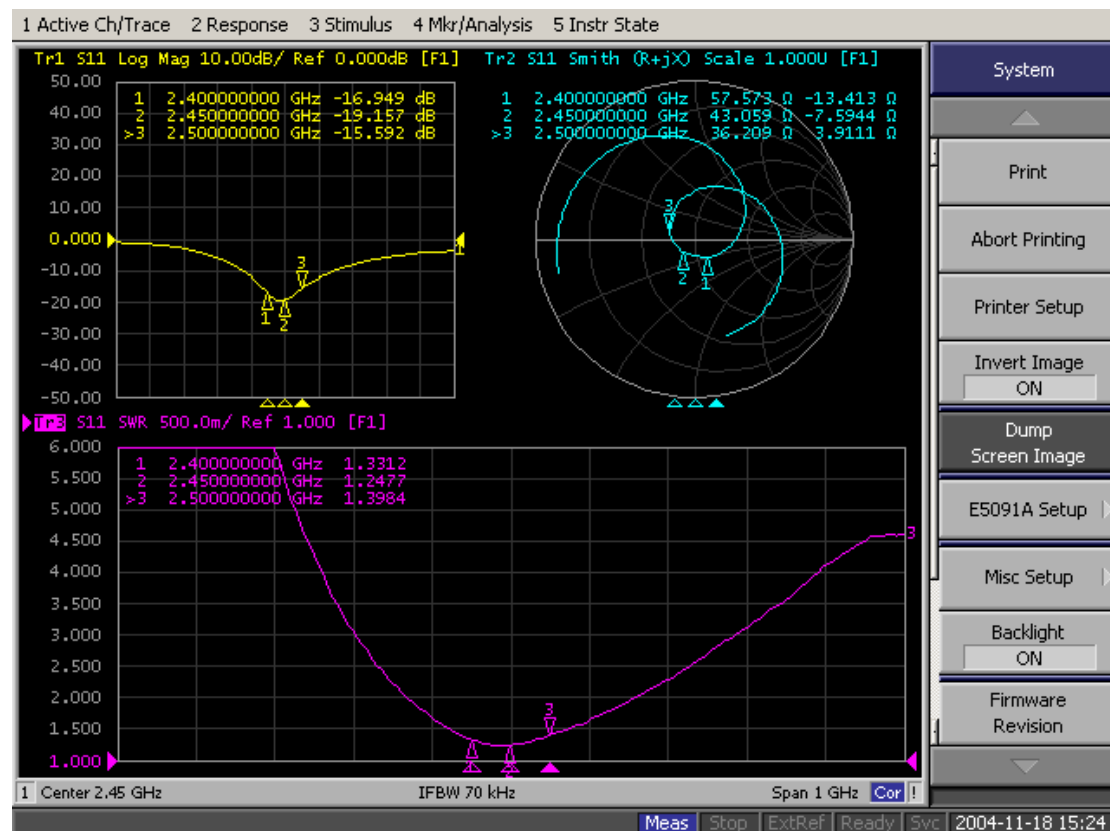


4. Antenna Radiation Pattern


4-1. Angle Definition

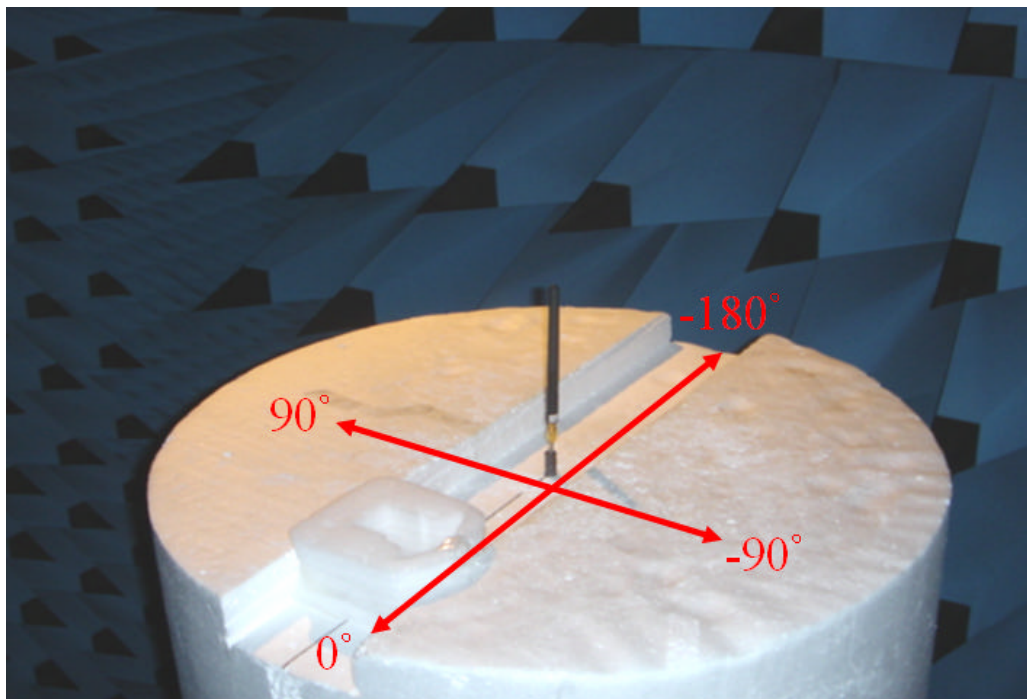


2400MHz Radiation Pattern

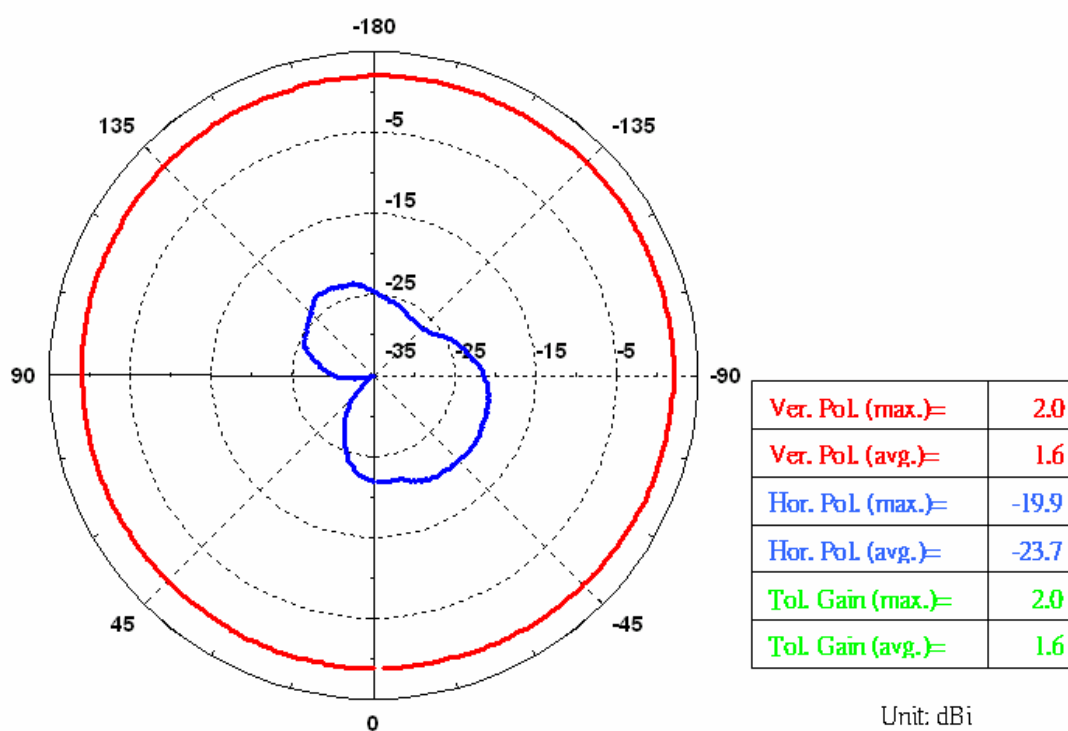


2450MHz Radiation Pattern

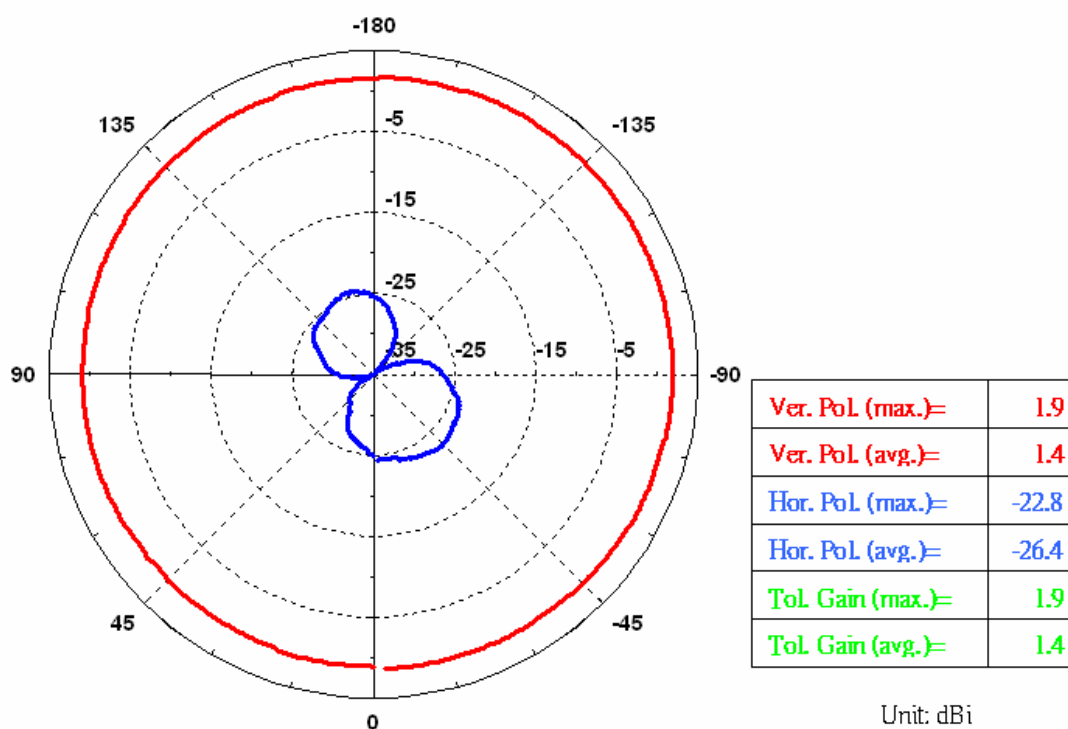


2500MHz Radiation Pattern

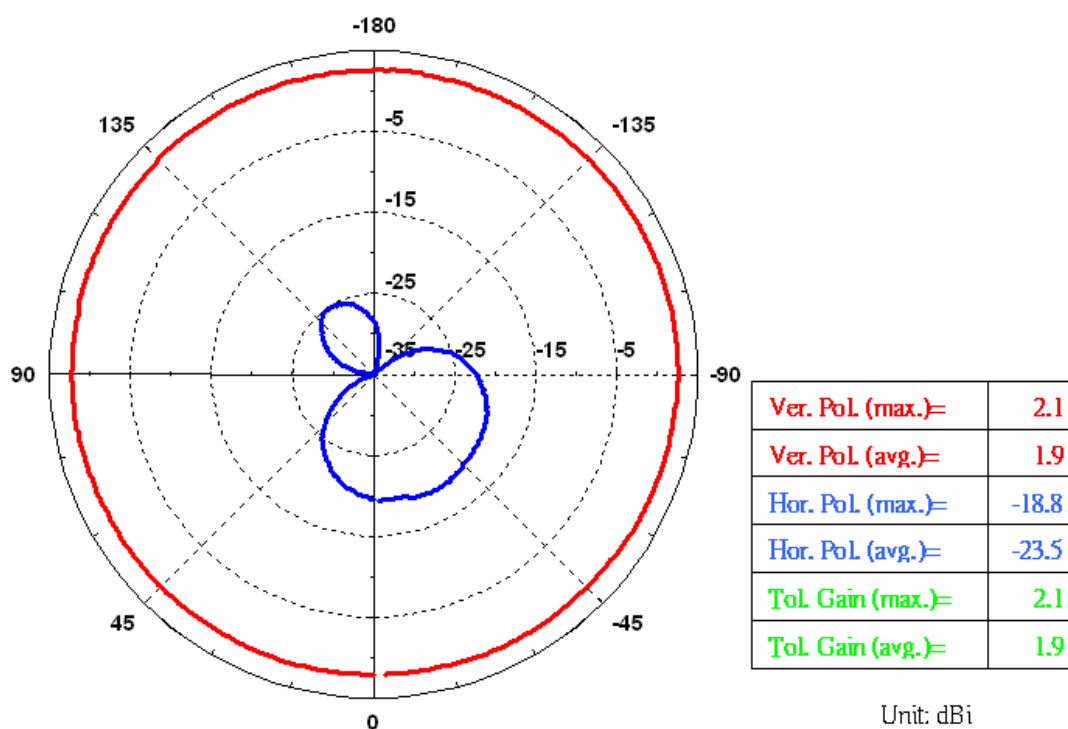


4-2. Angle Definition

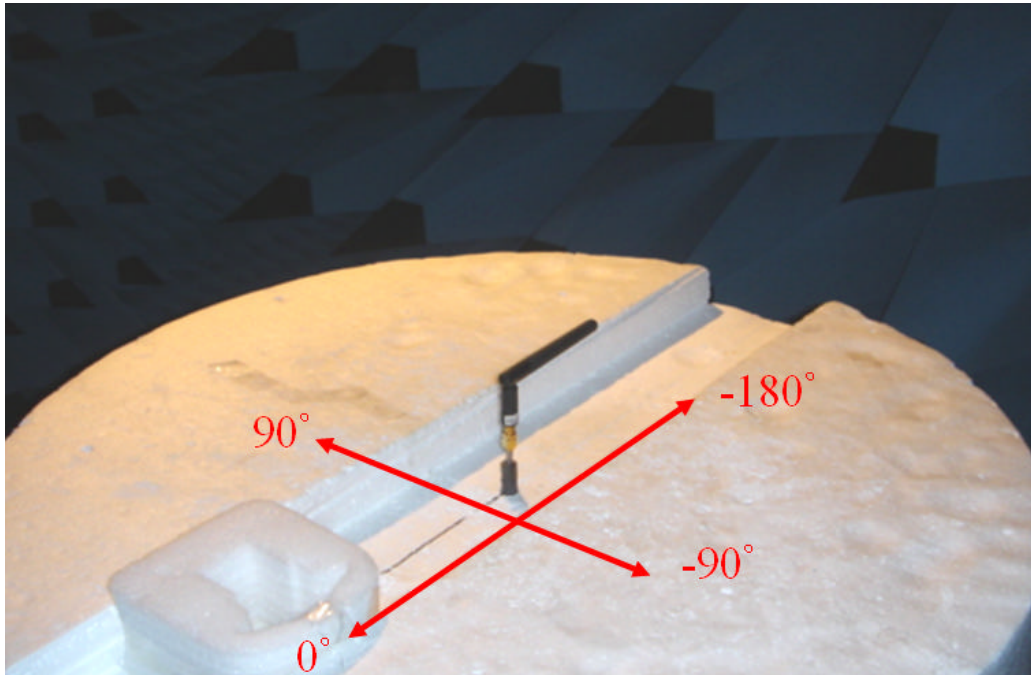


2400MHz Radiation Pattern

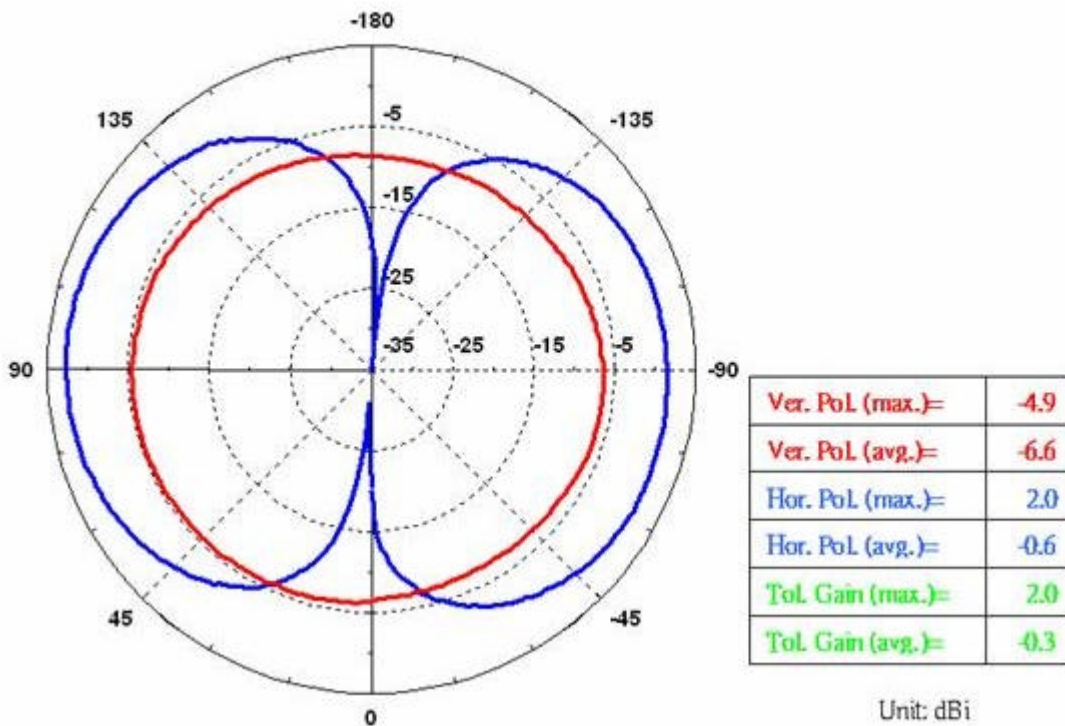


2450 MHz Radiation Pattern

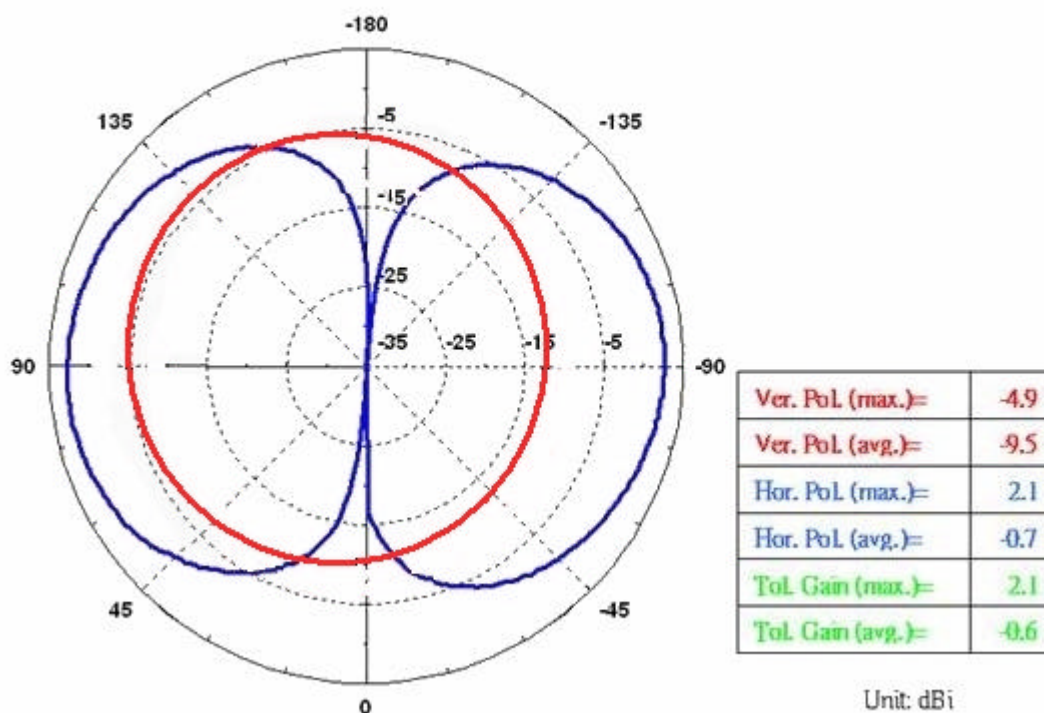

2500MHz Radiation Pattern

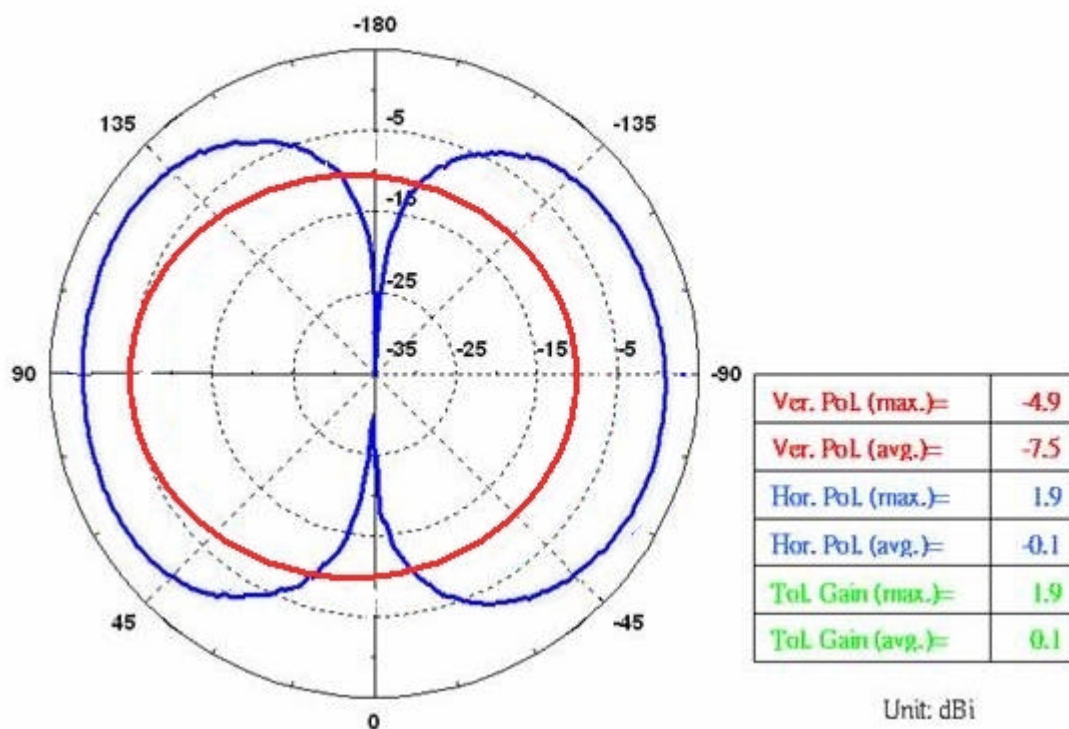

5. Mechanical Dimension Drawing

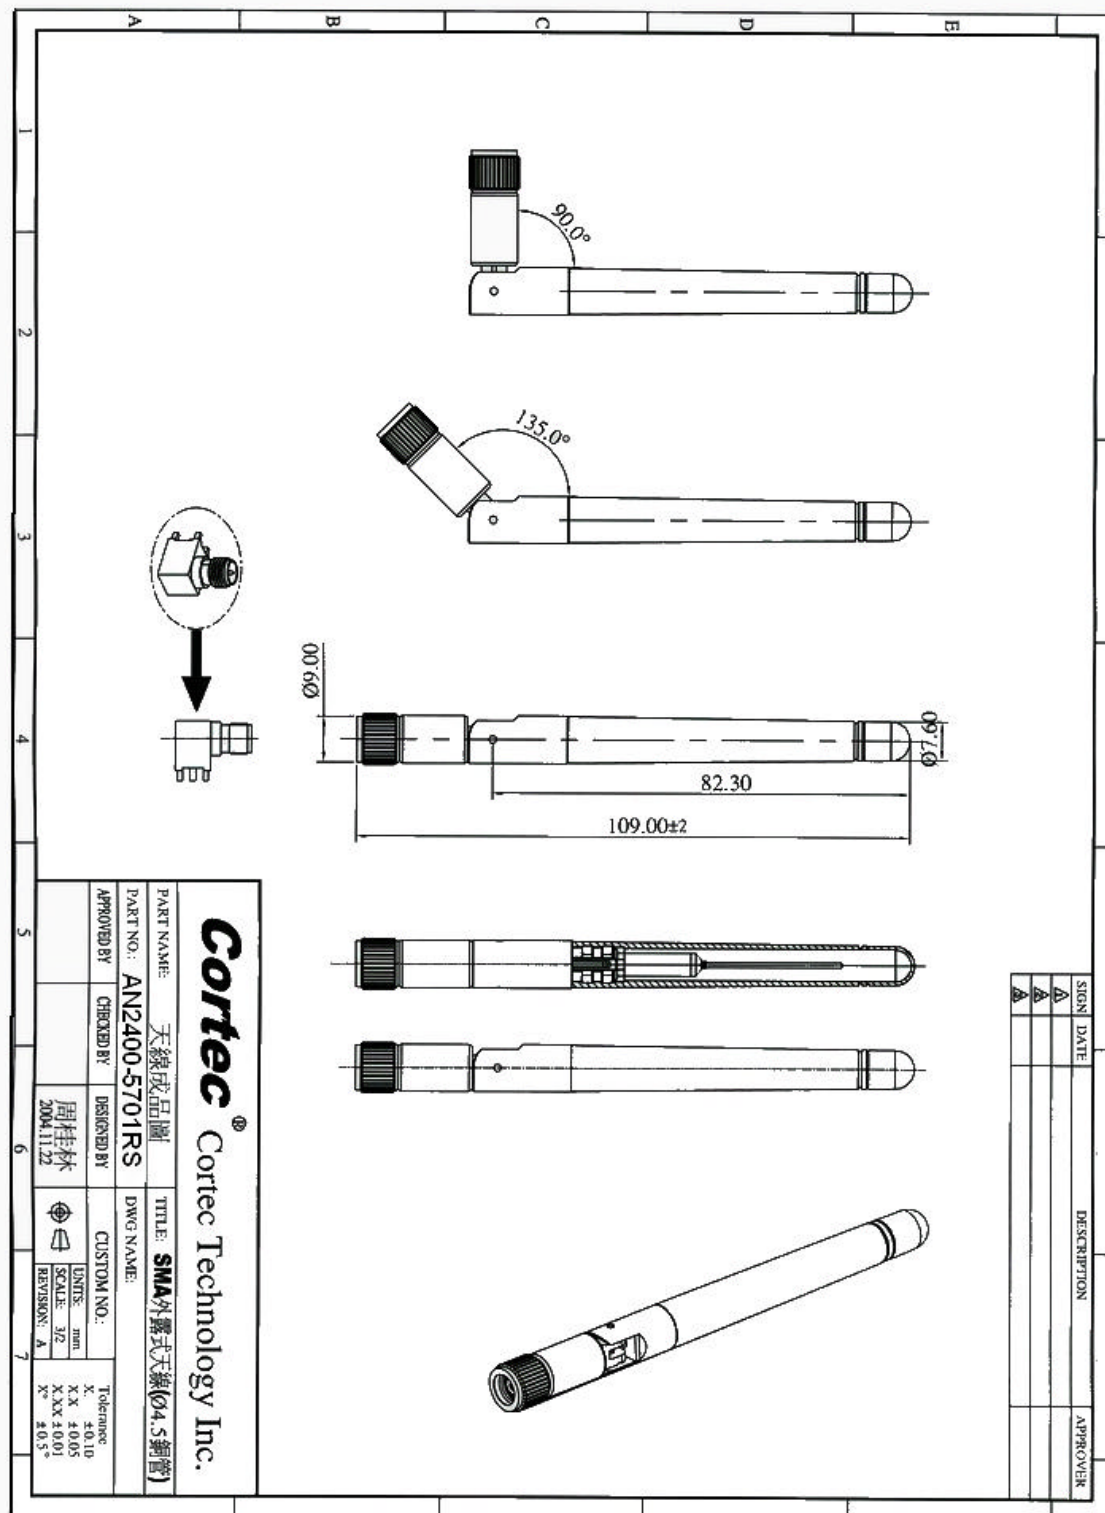

6. Plastic Parts Material Specification

物性項目 Property	單位 Unit	ASTM 試驗法 Test Method	TPE
比重 Specific Gravity	---	D792	0.88
模具收縮率 Shrinkage	%	D955	0.8-2.5
斷裂拉伸強度 Tensile Strength	Kg/ cm ³	D638	3.1
扭曲強度 Flexural Strength	Kg/ cm ³	D790	---
衝擊強度缺口 23°C Impact Strength	Kg om/om	D256	---
硬度 Hardness	A Shore	---	13
熱變形溫度 0.45 MPa Heat Deflection Temp.	°C	D648	80
熔融指數 Melt Flow Index	G/ min ²	D1238	10
燃燒性 Flammability	---	UL94	HB
Testing Data from 東莞市合春塑料有限公司 Tel:86-0769-2774772 台灣大雅國際股份有限公司 Tel:886-02-27775232			

TEIJIN POLYCARBONATE SINGAPORE PTE LTD

#01-01 111 SAKRA AVE. SINGAPORE 627881 SINGAPORE

Material Designation: L-1250#(f2), L-1250U#, L-1250V#, L-1250Z#

Product Description: Polycarbonate (PC)

Color	Min. thick. (mm)	Flame Class	HWI	HAI	RTI. Elec.	RTI. Imp.	RTI. Str.
ALL	0.40	V-2	4	3	80	80	80
	0.84	V-2	4	3	80	80	80
	1.5	HB	4	0	125	115	125
	3.0	HB	1	0	125	115	125
	6.0	HB	1	0	125	115	125
CXT:2, HVTR:2, D495:5							

Material designation may be suffixed with any one or two letters.

Subjected to one or more of the following tests; Ultraviolet Light,
Water Exposure in accordance with UL 746C, where the
acceptability for outdoor use is to be determined by UL Inc.

Report Date: 1999-07-29

7. Coaxial Cable RG-178 Data Sheet

RG-178 Coaxial Cable Specification		
1. Cable Type	MIL – C – 17 / RG-178	
2. Impedance	50 $\pm$ 3 ohm	
3. Inner Conductor	Material	silver-coated cooper
	Conductor Numbers	7
	Conductor Size	0.102 mm
	Outer Diameter	0.3 mm
4. Dielectric Layer	Material	FEP
	Color	Clear
	Average Thickness	0.28 mm
	Diameter	0.86 mm
5. Braid (Shielding)	Material	silver-coated cooper
	Construction	16-3-0.1 mm
	Coverage	95 %
6. Outer Cover	Material	FEP
	Color	Brown
	Average Thickness	0.25 mm
	Diameter	1.80 $\pm$ 0.05 mm
7. V.S.W.R Testing (DC ~ 6GHz)	< 1.3	
8. Attenuation (dB / 100 meter)	100 MHz	46
	900 MHz	155
	1800 MHz	295
	2400 MHz	340
	5200 MHz	505
	6000 MHz	550
9. Capacitance	97 $\pm$ 3 (pF / meter)	
10. Maximum Power	30 dBm	
11. Spark Test	2.0 KV	
12. Rating Temp. and Voltage	200 $\text{^{\circ}}$ C / 30V	
13. Conductor Resistance	335 ohm / KM / 20 $\text{^{\circ}}$ C max.	

14. Dielectric Resistance	3 G ohm / KM / 20℃ min.
---------------------------	-------------------------

8. Reliability Testing on Antenna Body

Test Item	Procedure	Requirement
1. Visual inspection and dimension check	Applicable methods using x5 magnification	follow Specification
2. Rapid changing of temperature	-40℃ (30minutes) to 90℃ (30minutes); 120 cycles	After 2 hours recovery: 1. no visible damage 2. bandwidth tolerance < ±5%
3. Damp Heat	500 hours at 60℃; 90 ~ 95% RH	After 2 hours recovery: 1. no visible damage 2. bandwidth tolerance < ±5%
4. Endurance	500 hours at 90℃	After 2 hours recovery: 1. no visible damage 2. bandwidth tolerance < ±5%



Test Report

INVAX SYSTEM & TRADING CORP.
CORTEC TECHNOLOGY INC.
4F, No.815, CHUNG HSAIO EAST RD. SEC.5,
TAIPEI, TAIWAN, R.O.C.

Report No. : CE/2004/C1640A
Date : 2004/12/16
Page : 1 of 5


The following merchandise was (were) submitted and identified by the client as :

Type of Product : ANTENNA
Style/Item No. : EM SERIES; IM SERIES; NB SERIES; AN SERIES
Sample Received : 2004/01/05 & 2004/04/23 & 2004/06/11 & 2004/06/24 &
2004/12/09 & 2005/01/26
Testing Date : 2004/01/05 TO 2004/01/06 & 2004/04/23 TO 2004/04/28 &
2004/06/11 TO 2004/06/21 & 2004/06/24 TO 2004/07/01 &
2004/12/09 TO 2004/12/16 & 2005/01/26 TO 2005/01/28

=====

Test Result : - Please see the next page -

*This report is combined with reports of SZTYR050102512/LP & CE/2004/62767 &
GZSCR040100230/LP & CE/2004/61520 & GZSCR040413274/LP*


Daniel Yen, M.R. / Operation Manager
Signed for and on behalf of
SGS TAIWAN LTD.

The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company



Test Report

INVAX SYSTEM & TRADING CORP.
CORTEC TECHNOLOGY INC.
4F. No.815, CHUNG HSAIO EAST RD. SEC.5,
TAIPEI, TAIWAN, R.O.C.

Report No. : CE/2004/C1640A
Date : 2004/12/16
Page : 2 of 5

Test Result

PART NAME NO.1 : BRASSY COLOR METAL BAR(SZTYR050102512/LP)
PART NAME NO.2 : BLACK PLASTIC SHEET(GZSCR040100230/LP)
PART NAME NO.3 : TAN TRANSPARENT LIQUID(GZSCR040413274/LP)
PART NAME NO.4 : BLACK PLASTIC JACKET(KHCX-32AWG-SB-TA)(CE/2004/61520)
PART NAME NO.5 : TRANSPARENT FEP JACKET(CE/2004/C1640)
PART NAME NO.6 : WHITE PALSTIC(CE/2004/62767)

Test Item (s):	Unit	Method	MDL	Result				
				No.1	No.2	No.3	No.4	No.5
PBBs(Polybrominated biphenyls)(CAS NO:059536-65-1)	%	With reference to USEPA3540C or USEPA3550C. Analysis was performed by HPLC/DAD, LC/MS or GC/MS. (prohibited by 2002/95/EC (RoHS), 83/264/EEC, and 76/769/EEC)	0.0005	---	---	---	N.D.	N.D.
PBBs(PBDEs)(Polybrominated biphenyl ethers)	%	With reference to USEPA3540C or USEPA3550C. Analysis was performed by HPLC/DAD, LC/MS or GC/MS. (prohibited by 2002/95/EC (RoHS), 83/264/EEC, and 76/769/EEC)	0.0005	---	---	---	N.D.	N.D.

Test Item (s):	Unit	Method	MDL	Result				
				No.1	No.2	No.3	No.4	No.5
Chromium VI (Cr+6)	ppm	As per US EPA 7196A and US EPA 3060A.	2	N.D.	---	N.D.	N.D.	N.D.
Cadmium (Cd)	ppm	ICP-AES after as per EN 1122, method B:2001 or other acid digestion.	2	22.0	N.D.	N.D.	N.D.	N.D.

The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company



Test Report

INVAX SYSTEM & TRADING CORP.
CORTEC TECHNOLOGY INC.
4F. No.815, CHUNG HSAIO EAST RD. SEC.5,
TAIPEI, TAIWAN, R.O.C.

Report No. : CE/2004/C1640A
Date : 2004/12/16
Page : 3 of 5

Test Item (s):	Unit	Method	MDL	Result				
				No.1	No.2	No.3	No.4	No.5
Lead (Pb)	ppm	ICP-AES after as per US EPA 3050B or other acid digestion.	2	24600.0	6.0	N.D.	N.D.	N.D.
Mercury (Hg)	ppm	ICP-AES after as per US EPA 3052 or other acid digestion.	2	N.D.	---	N.D.	N.D.	N.D.

Test Item (s):	Unit	Method	MDL	Result
				No.6
AZO		As per LMBG 8202-2		
4-AMINODIPHENYL (CAS NO.92-67-1)	ppm	Analysis was performed by GC/MS.	3	N.D.
BENZIDINE (CAS NO.92-87-5)	ppm	Analysis was performed by GC/MS.	3	N.D.
4-CHLORO-O-TOLUIDINE (CAS NO.95-69-2)	ppm	Analysis was performed by GC/MS.	3	N.D.
2-NAPHTHYLAMINE (CAS NO.91-59-8)	ppm	Analysis was performed by GC/MS.	3	N.D.
O-AMINOAZOTOLUENE (CAS NO.97-56-3)	ppm	Analysis was performed by GC/MS.	3	N.D.
2-AMINO-4-NITROTOLUENE (CAS NO.106-47-8)	ppm	Analysis was performed by GC/MS.	3	N.D.
2,4-DIAMINOANISOLE (CAS NO.615-05-4)	ppm	Analysis was performed by GC/MS.	3	N.D.
4,4-DIAMINODIPHENYLMETHANE (CAS NO.101-77-9)	ppm	Analysis was performed by GC/MS.	3	N.D.
3,3-DICHLOROBENZIDINE (CAS NO.91-94-1)	ppm	Analysis was performed by GC/MS.	3	N.D.
3,3-DIMETHOXYBENZIDINE (CAS NO.119-90-4)	ppm	Analysis was performed by GC/MS.	3	N.D.
3,3-DIMETHYLBENZIDINE (CAS NO.119-93-7)	ppm	Analysis was performed by GC/MS.	3	N.D.

The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.



Test Report

INVAX SYSTEM & TRADING CORP.
CORTEC TECHNOLOGY INC.
4F, No.815, CHUNG HSAIO EAST RD. SEC.5,
TAIPEI, TAIWAN, R.O.C.

Report No. : CE/2004/C1640A
Date : 2004/12/16
Page : 4 of 5

Test Item (s):	Unit	Method	MDL	Result
				No.6
3,3-DIMETHYL-4,4-DIAMINODIPHENYLMETHANE (CAS NO.838-88-0)	ppm	Analysis was performed by GC/MS.	3	N.D.
P-CRESIDINE(2-METHOXY-5-METHYLANILINE) (CAS NO.120-71-8)	ppm	Analysis was performed by GC/MS.	3	N.D.
4,4-METHYLENE-BIS-(2-CHLORANILINE) (CAS NO.101-14-4)	ppm	Analysis was performed by GC/MS.	3	N.D.
4,4-OXYDIANILINE (CAS NO.101-80-4)	ppm	Analysis was performed by GC/MS.	3	N.D.
4,4-THIODIANILINE (CAS NO.139-65-1)	ppm	Analysis was performed by GC/MS.	3	N.D.
O-TOLUIDINE (CAS NO.95-53-4)	ppm	Analysis was performed by GC/MS.	3	N.D.
2,4-TOLUYLENDIAMINE (CAS NO.95-80-7)	ppm	Analysis was performed by GC/MS.	3	N.D.
2,4,5-TRIMETHYLANILINE (CAS NO.137-17-7)	ppm	Analysis was performed by GC/MS.	3	N.D.
O-ANISIDINE (CAS NO.90-04-0)	ppm	Analysis was performed by GC/MS.	3	N.D.
P-AMINOAZOBENZENE (CAS NO.60-09-3)	ppm	Analysis was performed by GC/MS.	3	N.D.

Test Item (s):	Unit	Method	MDL	Result
				No.6
Mirex(CAS NO:002385-85-5)	ppm	Analysis was performed by GC/MS.	4	N.D.

Test Item (s):	Unit	Method	MDL	Result
				No.6
PCBs(Polychlorinated Biphenyls)(CAS NO:001336-36-3)	ppm	With reference to USEPA 8082A. Analysis was performed by GC/ECD/MS.	0.5	N.D.

The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company



Test Report

INVAX SYSTEM & TRADING CORP.
CORTEC TECHNOLOGY INC.
4F. No.815, CHUNG HSAIO EAST RD. SEC.5,
TAIPEI, TAIWAN, R.O.C.

Report No. : CE/2004/C1640A
Date : 2004/12/16
Page : 5 of 5

Test Item (s):	Unit	Method	MDL	Result
				No.6
PBBs(Polybrominated biphenyls)(CAS NO:059536-65-1)	%	With reference to USEPA3540C or USEPA3550C. Analysis was performed by HPLC/DAD, LC/MS or GC/MS. (prohibited by 2002/95/EC (RoHS), 83/264/EEC, and 76/769/EEC)	0.0005	N.D.
PBBs(PBDEs)(Polybrominated biphenyl ethers)	%	With reference to USEPA3540C or USEPA3550C. Analysis was performed by HPLC/DAD, LC/MS or GC/MS. (prohibited by 2002/95/EC (RoHS), 83/264/EEC, and 76/769/EEC)	0.0005	N.D.

Test Item (s):	Unit	Method	MDL	Result
				No.6
Cadmium (Cd)	ppm	ICP-AES after as per EN 1122, method B:2001 or other acid digestion.	2	N.D.
Lead (Pb)	ppm	ICP-AES after as per US EPA 3050B or other acid digestion.	2	N.D.

- NOTE: (1) N.D. = Not detected (<MDL)
(2) ppm = mg/kg
(3) MDL = Method Detection Limit
(4) " --- " = Not Applicable
(5) " - " = No Regulation
(6) * = Results shown are of the adjusted analytical results
(7) ** = Qualitative analysis (No Unit)
(8) Negative = Undetectable / Positive = Detectable
(9) The MDL is 5ppm for the single compound of CP

The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company