



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250800214102

Page: 1 of 38

TEST REPORT

Application No.: SHCR2508002141HS
FCC ID: N82-KOHLER060
Applicant: Kohler Co.
Address of Applicant: 444 Highland Dr. Kohler WI 53044 United States of America
Manufacturer: Shanghai Kohler Electronics., Ltd
Address of Manufacturer: No.1955, Fengxiang Road, Baoshan District, Shanghai, PRC
Factory: Shanghai Kohler Electronics., Ltd
Address of Factory: No.1955, Fengxiang Road, Baoshan District, Shanghai, PRC
Equipment Under Test (EUT):
EUT Name: 2.4G and BLE dual-mode wireless communication module
Model No.: 1649103
Standard(s) : 47 CFR Part 15, Subpart C 15.249
Date of Receipt: 2025-08-19
Date of Test: 2025-08-20 to 2025-09-17
Date of Issue: 2025-09-22

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Member of the SGS Group (SGS SA)

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250800214102

Page: 2 of 38

Revision Record			
Version	Description	Date	Remark
00	Original	2025-09-22	/

Authorized for issue by:				
Tested By		Bill Wu		
		Bill Wu/Project Engineer		
Approved By		Parlam Zhan		
		Parlam Zhan / Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.249	N/A	47 CFR Part 15, Subpart C 15.203	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Field Strength of the Fundamental Signal (15.249(a))	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2020) Section 6.5&6.6	47 CFR Part 15, Subpart C 15.249(a)	Pass
Restricted Band Around Fundamental Frequency		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209	Pass
Radiated Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4&6.5	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass
Radiated Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass
20dB Bandwidth		ANSI C63.10 (2020) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary.....	3
3 Contents	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Description of Support Units.....	5
4.3 Power level setting using in test.....	5
4.4 Measurement Uncertainty	5
4.5 Test Location	6
4.6 Test Facility.....	6
4.7 Deviation from Standards	6
4.8 Abnormalities from Standard Conditions.....	6
5 Equipment List	7
6 Radio Spectrum Technical Requirement.....	8
6.1 Antenna Requirement	8
6.1.1 Test Requirement:	8
6.1.2 Conclusion	8
7 Radio Spectrum Matter Test Results.....	9
7.1 Field Strength of the Fundamental Signal (15.249(a))	9
7.1.1 E.U.T. Operation	9
7.1.2 Test Mode Description	9
7.1.3 Test Setup Diagram	9
7.1.4 Measurement Procedure and Data.....	10
7.2 Restricted Band Around Fundamental Frequency.....	11
7.2.1 E.U.T. Operation	11
7.2.2 Test Mode Description	11
7.2.3 Test Setup Diagram	11
7.2.4 Measurement Procedure and Data.....	12
7.3 Radiated Emissions Below 1GHz	17
7.3.1 E.U.T. Operation	17
7.3.2 Test Mode Description	17
7.3.3 Test Setup Diagram	17
7.3.4 Measurement Procedure and Data.....	18
7.4 Radiated Emissions Above 1GHz.....	21
7.4.1 E.U.T. Operation	21
7.4.2 Test Mode Description	21
7.4.3 Test Setup Diagram	21
7.4.4 Measurement Procedure and Data.....	22
7.5 20dB Bandwidth	35
7.5.1 E.U.T. Operation	35
7.5.2 Test Mode Description	35
7.5.3 Test Setup Diagram	35
7.5.4 Measurement Procedure and Data.....	35
8 Test Setup Photo.....	38
9 EUT Constructional Details (EUT Photos).....	38

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 2.7-5.5V
Test Voltage:	DC 3.3V
Channel List:	2405MHz,2450MHz,2470MHz
Number of Channels:	3
Antenna Type:	PCB Antenna
Antenna Gain:	-1.65 dBi (Provided by manufacturer)

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	LENOVO	L460	-
Serial port adapter plate	-	Test Plate 3	-

4.3 Power level setting using in test

Channel	Power setting
2405	-0.2
2450	-0.2
2470	-0.2

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty cycle	0.4%
4	Occupied Bandwidth	3%
5	RF conducted power	0.6dB
6	RF power density	2.9dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious emission test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-6GHz)
		5.4dB (6GHz-18GHz)
10	Temperature test	1°C
11	Humidity test	3%
12	Supply voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc) is provided by the applicant. (if applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

- **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.
Company Number: 8617A

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Conducted Test					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2024/12/18	2025-12-17
Spectrum Analyzer	Keysight	N9020B	SHEM241-1	2024/12/18	2025-12-17
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2025-04-30	2026-04-29
Signal Generator	R&S	SMR20	SHEM006-1	2025-07-30	2026-07-29
Signal Generator	Agilent	N5182A	SHEM182-1	2025-07-30	2026-07-29
Communication Tester	R&S	CMW270	SHEM183-1	2025-04-30	2026-04-29
Communication Tester	R&S	CMW500	SHEM268-1	2025-04-30	2026-04-29
Power Sensor	Keysight	U2021XA * 4	SHEM293-1	2025-07-30	2026-07-29
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2024-11-05	2026-11-04
AC Power Stabilizer	APC	KDF-31020T-V0-F0	SHEM216-1	2024/12/18	2025-12-17
DC Power Supply	HP	6010A	SHEM222-1	2024/12/18	2025-12-17
Conducted test Cable	/	RF01~RF04	/	2024/12/18	2025-12-17
Switcher	Tonscend	JS0806	SHEM293-1	2025-07-30	2026-07-29
Test software	Tonscend	JS Tonscend BT/WIFI System	Version: 2.6	/	/
Switcher+Power Sensor	TST	TSPS2023R	SHEM263-1	2025-07-30	2026-07-29
Test software	TST	TST PASS	Version: 2.0	/	/
RF Radiated Test					
EMI test Receiver	R&S	ESU40	SHEM051-1	2024/12/18	2025-12-17
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2024/12/18	2025-12-17
Communication Tester	R&S	CMW500	SHEM268-1	2025-04-30	2026-04-29
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2024/12/18	2025-12-17
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2023-09-03	2025-09-02
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2025-08-31	2027-08-30
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM202-1	2025-04-12	2027-04-11
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2024-08-05	2026-08-04
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2023-09-03	2025-09-02
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2025-08-31	2027-08-30
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2023-09-03	2025-09-02
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2025-08-31	2027-08-30
Pre-Amplifier	HP	8447D	SHEM236-1	2024/12/18	2025-12-17
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2024/12/18	2025-12-17
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023-05-06	2026-05-05
RE test Cable	/	PT18-NMNM-10M	SHEM217-2	2024/12/18	2025-12-17
Test software	ESE	E3	Version: 6.111221a	/	/

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is PCB antenna and no consideration of replacement. The best case gain of the antenna is -1.65 dBi.

Antenna location: Refer to Internal photos

7 Radio Spectrum Matter Test Results

7.1 Field Strength of the Fundamental Signal (15.249(a))

Test Requirement 47 CFR Part 15, Subpart C 15.249(a)

Test Method: ANSI C63.10 (2020) Section 6.5&6.6

Measurement Distance: 3m

Limit:

Fundamental frequency(MHz)	Field strength of fundamental(millivolts/meter)	Field strength of harmonics(microvolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

Remark: The frequencies above 1000MHz are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

For fundamental frequency in "902-928MHz", the field strength of fundamental is based on Quasi-Peak.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_ Keep the EUT in transmitting with modulation mode.

7.1.3 Test Setup Diagram

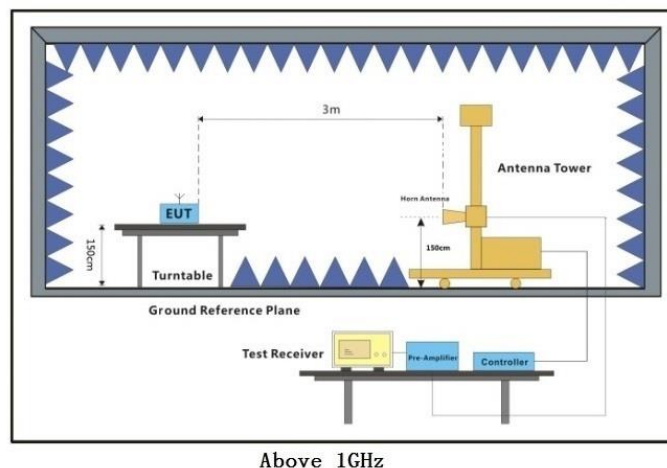

7.1.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
2405	96.85	-2.97	92.88	94	-1.12	Peak	Horizontal
	90.21	-2.97	87.24	94	-6.76	Peak	Vertical

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
2450	96.62	-2.83	92.79	94	-1.21	Peak	Horizontal
	91.35	-2.83	88.52	94	-5.48	Peak	Vertical

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
2470	96.48	-2.79	92.69	94	-1.31	Peak	Horizontal
	91.87	-2.79	89.08	94	-4.92	Peak	Vertical

Remark:

- 1) The basic equation with a sample calculation is as follows: Level = Read Level + Factor.

(The Factor is calculated by adding the Antenna Factor, Cable Loss and Preamp Factor)

If the Peak value below the Average Limit, the Average test doesn't perform for this submission.

7.2 Restricted Band Around Fundamental Frequency

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
Above 1GHz	74.0	Peak Value

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in transmitting with modulation mode.

7.2.3 Test Setup Diagram

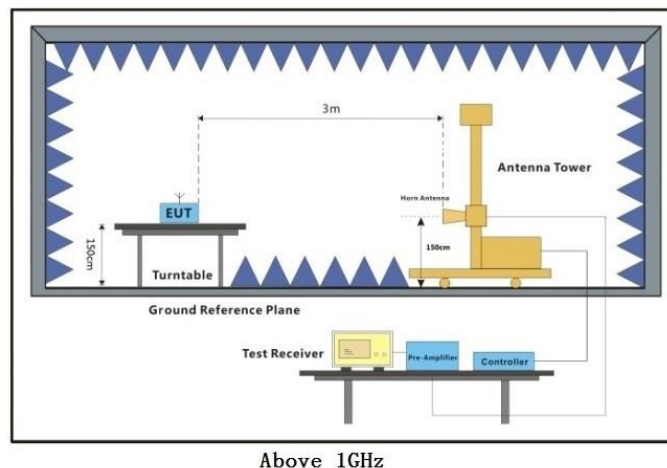


7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

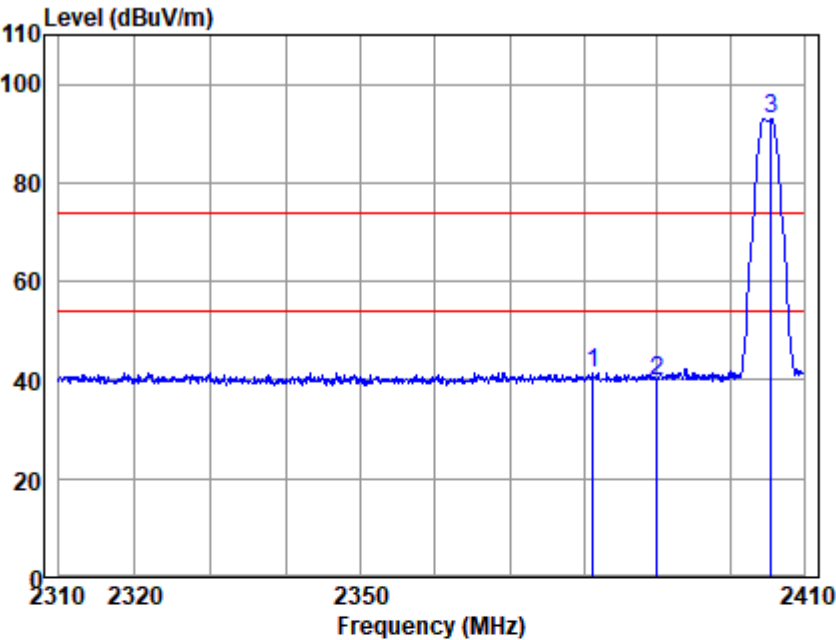


Antenna Polarity :HORIZONTAL
EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2381.269	44.53	28.76	3.32	35.17	41.44	74.00	-32.56	Peak
2390.000	42.86	28.80	3.33	35.18	39.81	74.00	-34.19	Peak
2405.510	95.85	28.89	3.34	35.20	92.88	74.00	18.88	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

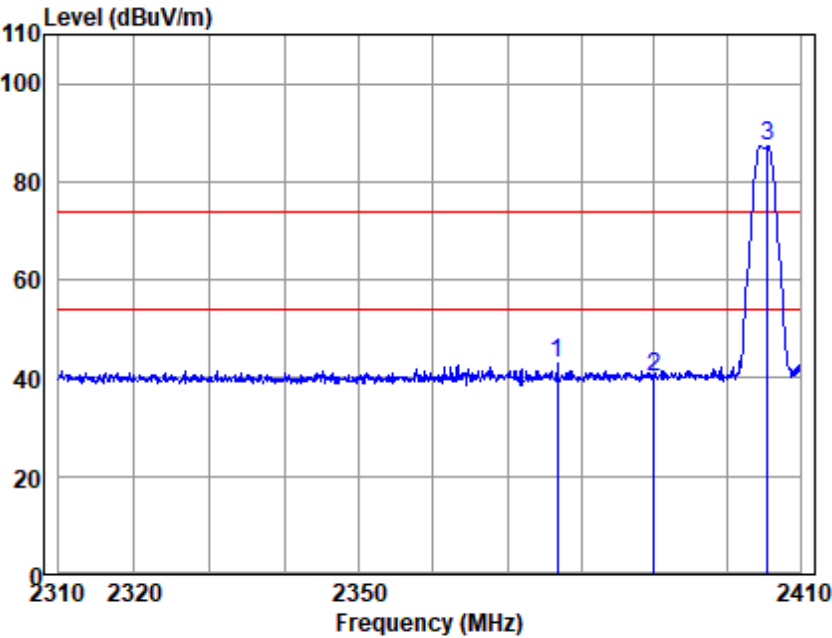


Antenna Polarity :VERTICAL
EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2376.732	45.95	28.76	3.32	35.17	42.86	74.00	-31.14	Peak
2390.000	43.38	28.80	3.33	35.18	40.33	74.00	-33.67	Peak
2405.510	90.21	28.89	3.34	35.20	87.24	74.00	13.24	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

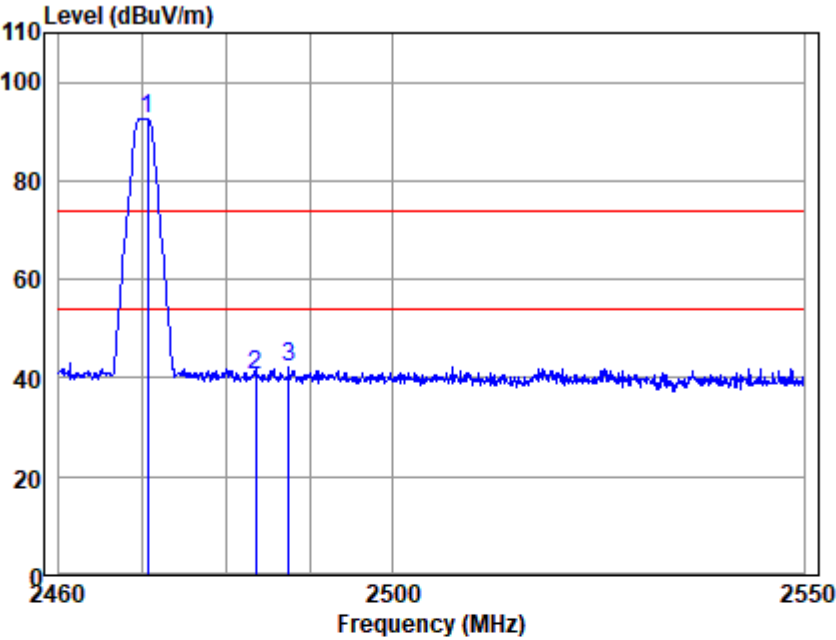


Antenna Polarity :HORIZONTAL
EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2470.541	95.48	29.06	3.40	35.25	92.69	74.00	18.69	Peak
2483.500	43.45	29.09	3.41	35.26	40.69	74.00	-33.31	Peak
2487.376	45.09	29.09	3.41	35.26	42.33	74.00	-31.67	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

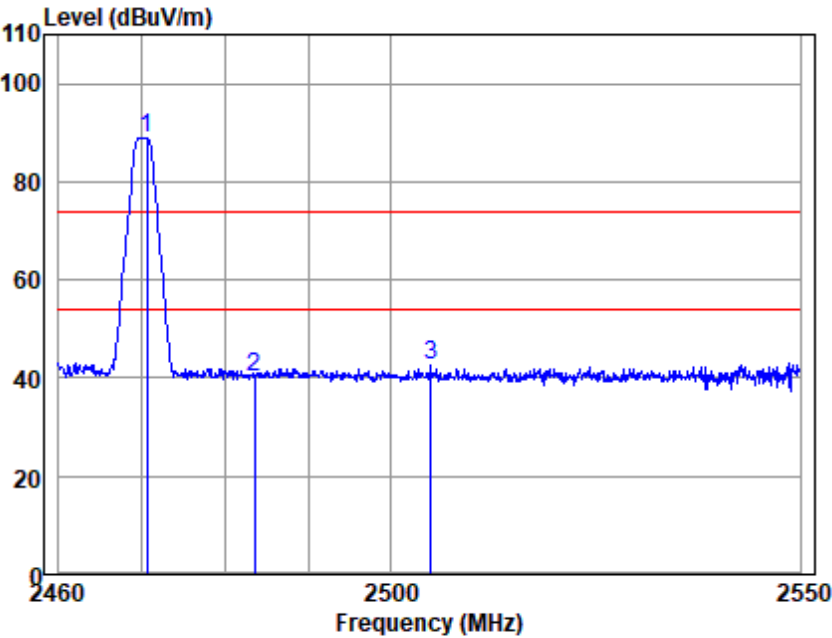

Antenna Polarity :VERTICAL
EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2470.541	91.87	29.06	3.40	35.25	89.08	74.00	15.08	Peak
2483.500	43.08	29.09	3.41	35.26	40.32	74.00	-33.68	Peak
2504.776	45.37	29.13	3.43	35.28	42.65	74.00	-31.35	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.3 Radiated Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)

Test Method: ANSI C63.10 (2020) Section 6.4&6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.2 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in transmitting with modulation mode.

7.3.3 Test Setup Diagram

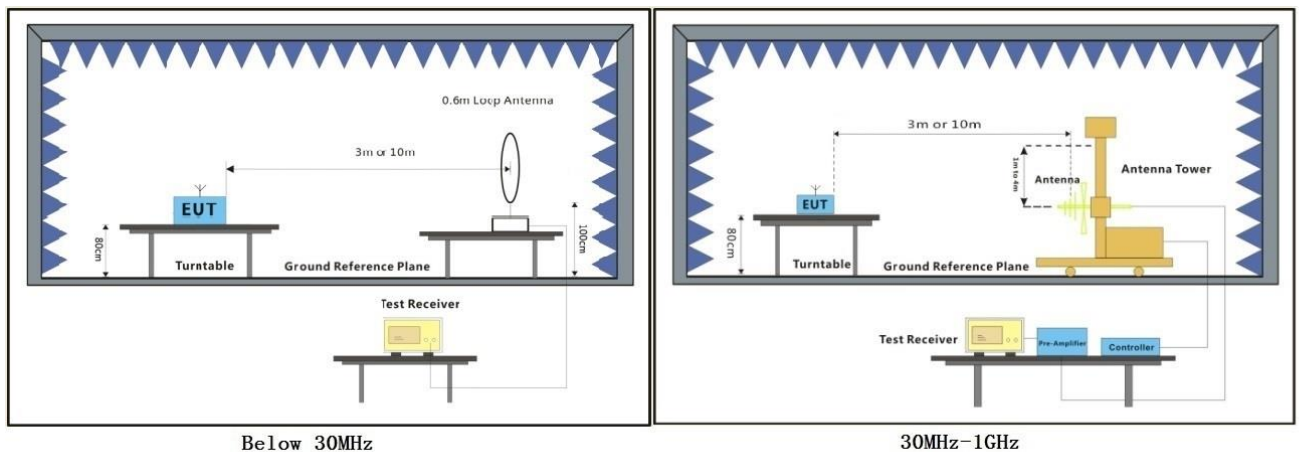


7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 00; Polarity: Horizontal

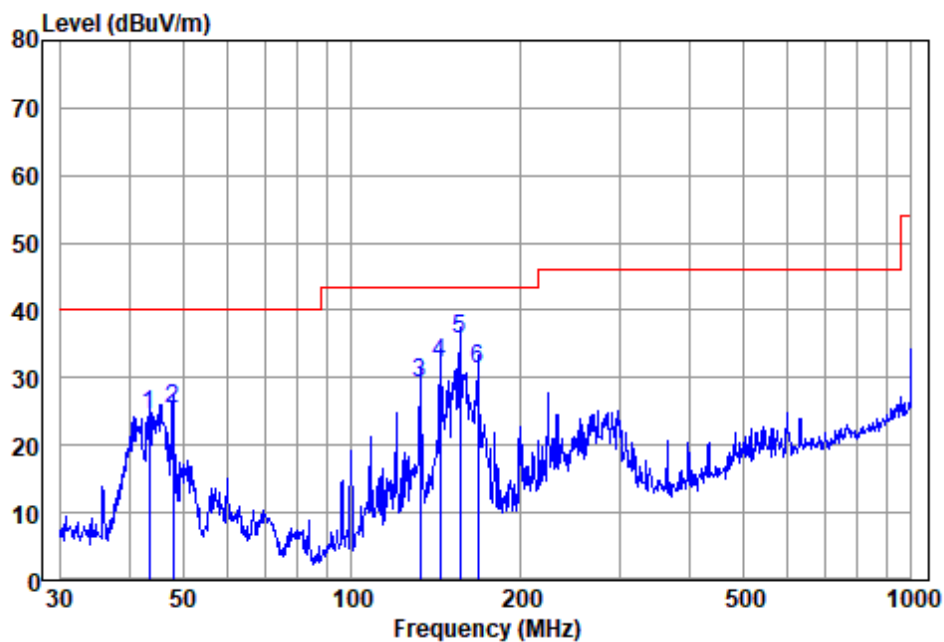

Antenna Polarity :HORIZONTAL


EUT/Project :2141HS

Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	43.506	42.61	13.75	1.32	33.20	24.48	40.00	-15.52	QP
2	47.994	43.06	14.10	1.38	33.20	25.34	40.00	-14.66	QP
3	132.685	47.73	12.25	2.37	33.06	29.29	43.50	-14.21	QP
4	143.830	49.30	13.50	2.47	33.02	32.25	43.50	-11.25	QP
5	155.910	52.23	13.80	2.58	33.00	35.61	43.50	-7.89	QP
6	167.824	48.81	12.90	2.67	33.00	31.38	43.50	-12.12	QP

Note1:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical

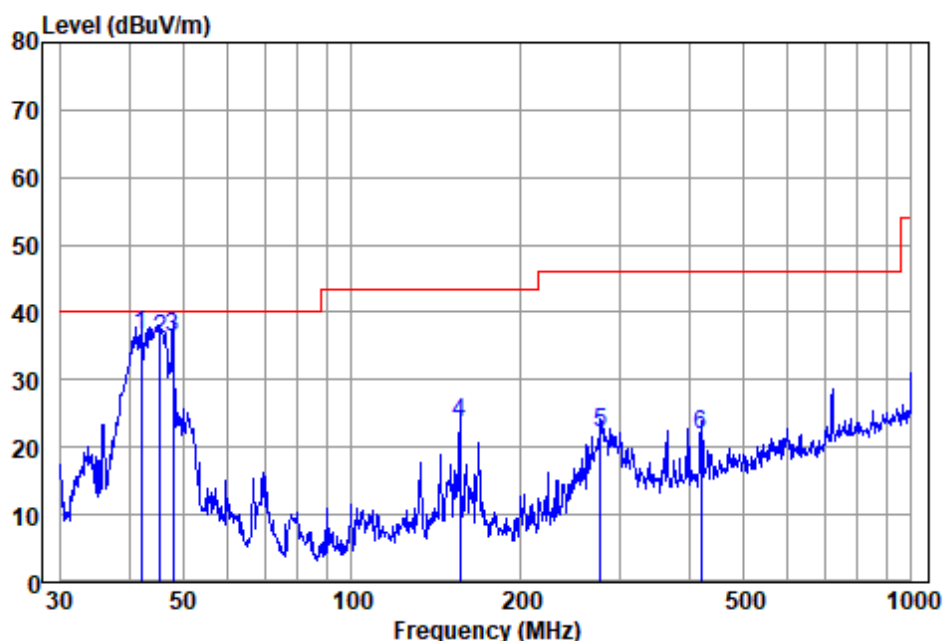

Antenna Polarity :VERTICAL

EUT/Project :2141HS

Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	42.007	54.87	13.60	1.30	33.20	36.57	40.00	-3.43	QP
2	45.375	54.22	13.73	1.35	33.20	36.10	40.00	-3.90	QP
3	47.994	54.10	14.10	1.38	33.20	36.38	40.00	-3.62	QP
4	155.910	40.10	13.80	2.58	33.00	23.48	43.50	-20.02	QP
5	278.067	38.86	12.70	3.48	32.86	22.18	46.00	-23.82	QP
6	420.580	34.19	16.20	4.33	32.76	21.96	46.00	-24.04	QP

Note1:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.4 Radiated Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)

Test Method: ANSI C63.10 (2020) Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in transmitting with modulation mode.

7.4.3 Test Setup Diagram

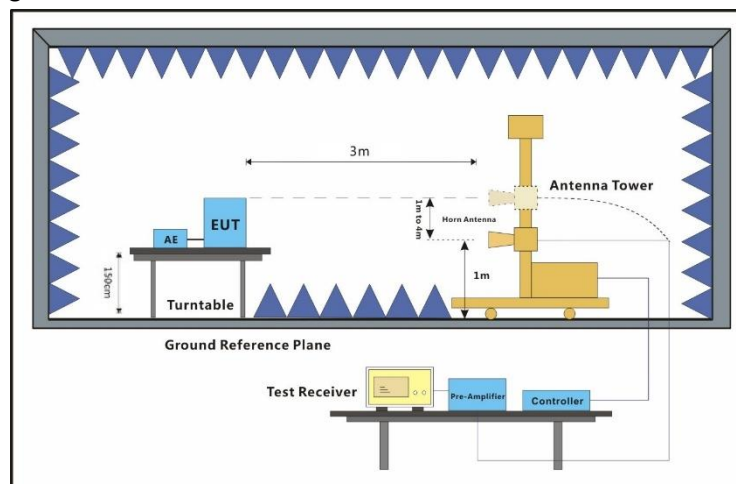


7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

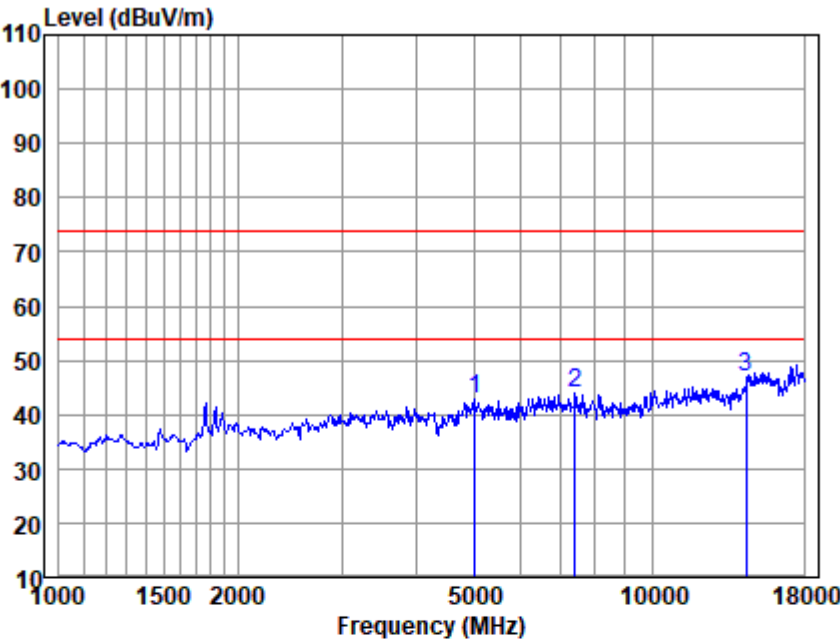


Antenna Polarity :HORIZONTAL
EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
5031.499	40.50	33.69	5.40	36.85	42.74	74.00	-31.26	Peak
7411.461	37.42	36.34	7.51	37.35	43.92	74.00	-30.08	Peak
14408.430	36.07	41.03	11.64	41.85	46.89	74.00	-27.11	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

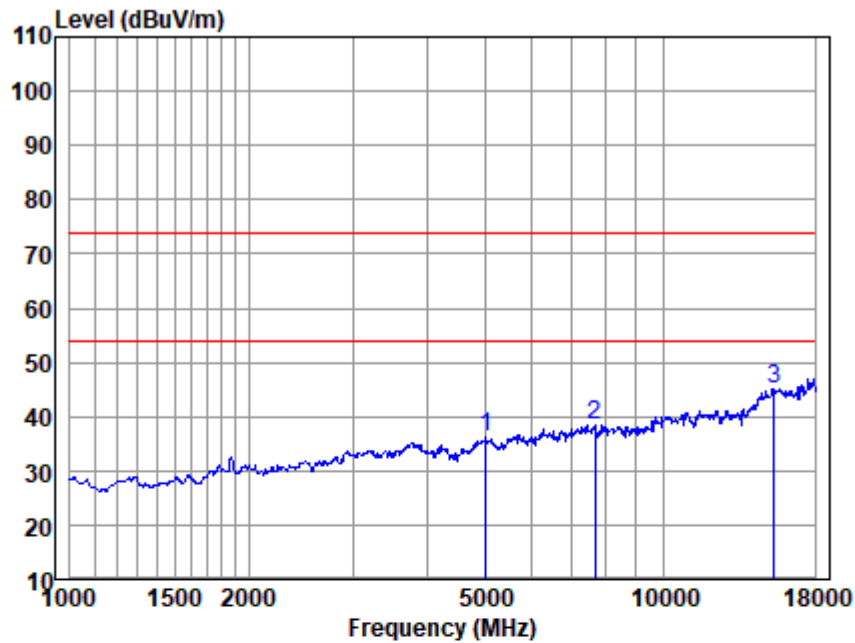


Antenna Polarity :HORIZONTAL
EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5016.977	33.99	33.69	5.39	36.84	36.23	54.00	-17.77	Average
7673.034	31.75	36.14	7.73	37.14	38.48	54.00	-15.52	Average
15398.830	31.09	43.68	12.26	41.83	45.20	54.00	-8.80	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

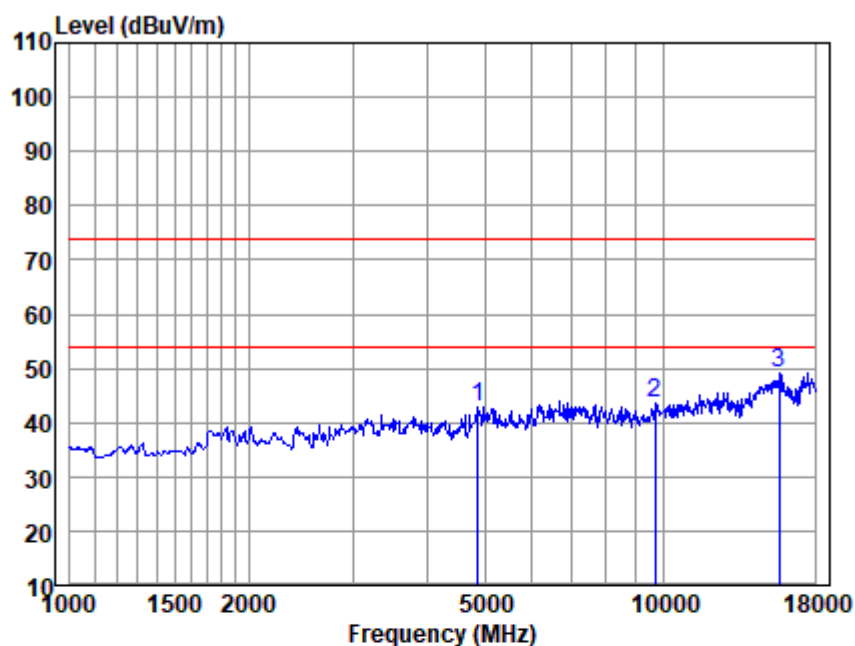


Antenna Polarity :VERTICAL

EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4874.043	40.82	33.66	5.28	36.81	42.95	74.00	-31.05	Peak
9697.151	34.69	37.62	8.78	37.53	43.56	74.00	-30.44	Peak
15668.210	34.36	43.09	12.42	40.81	49.06	74.00	-24.94	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

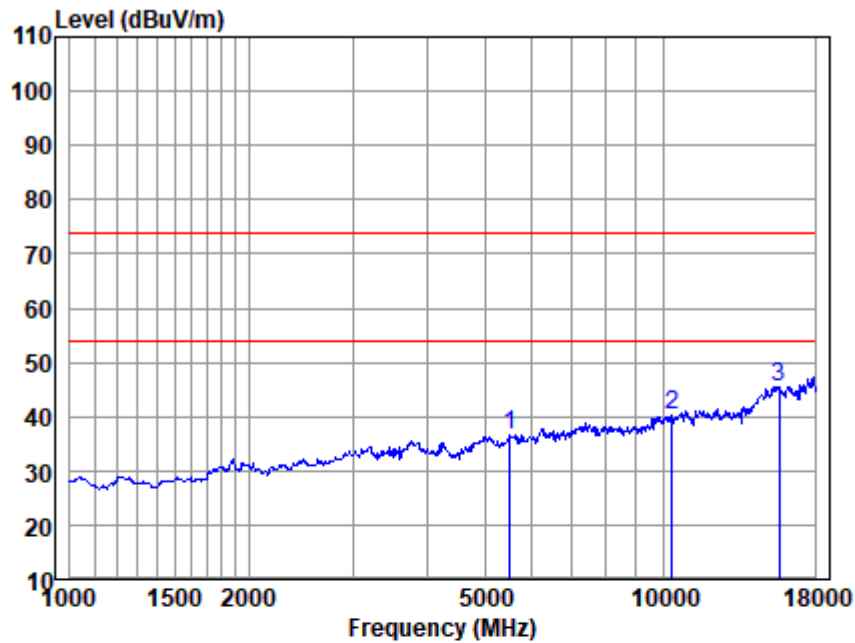


Antenna Polarity :VERTICAL

EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5519.072	33.48	34.52	5.73	36.98	36.75	54.00	-17.25	Average
10363.710	30.84	37.89	9.06	37.56	40.23	54.00	-13.77	Average
15668.210	30.83	43.09	12.42	40.81	45.53	54.00	-8.47	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:middle

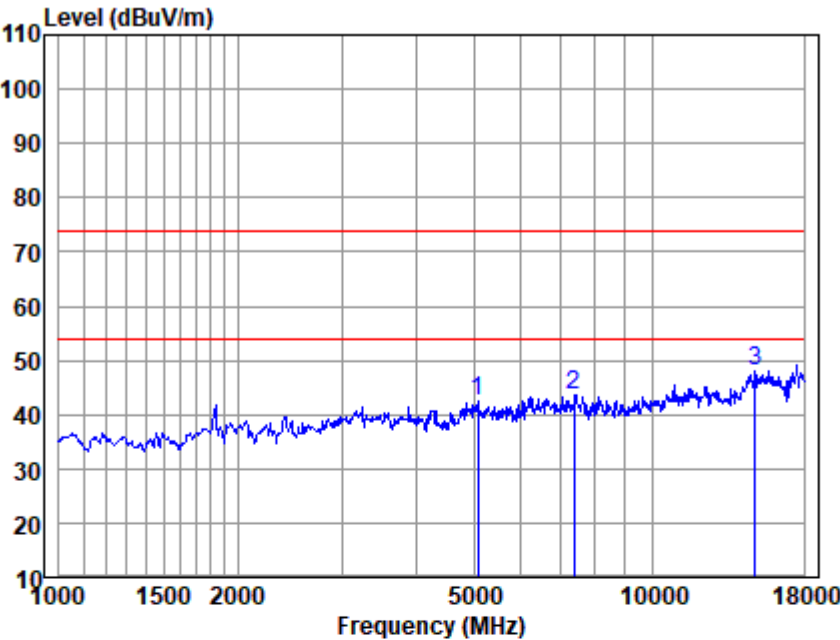


Antenna Polarity :HORIZONTAL
EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
5075.317	40.31	33.68	5.43	36.86	42.56	74.00	-31.44	Peak
7390.070	37.24	36.36	7.49	37.37	43.72	74.00	-30.28	Peak
14916.940	34.49	42.65	11.97	40.99	48.12	74.00	-25.88	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:middle

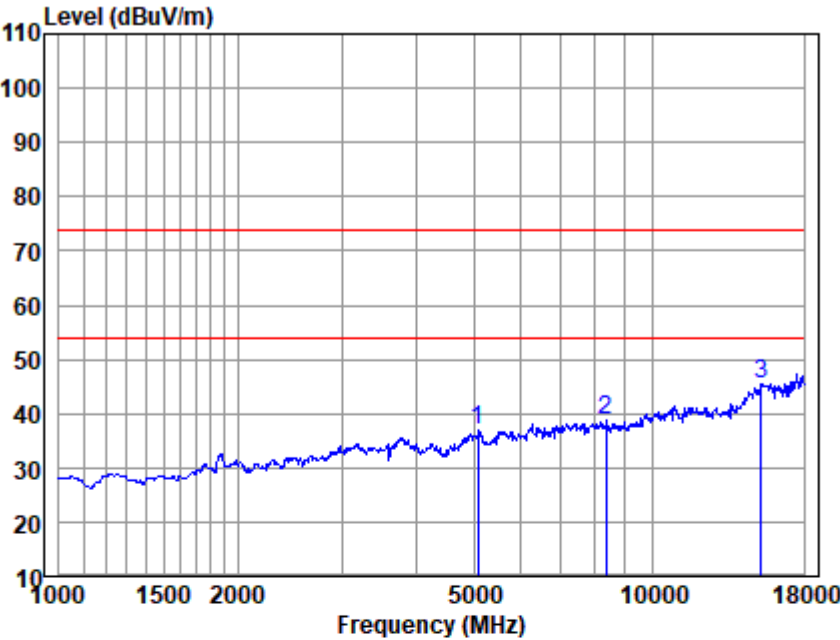


Antenna Polarity :HORIZONTAL
EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
5090.007	34.75	33.67	5.44	36.87	36.99	54.00	-17.01	Average
8368.069	32.22	36.97	8.17	38.52	38.84	54.00	-15.16	Average
15265.880	31.85	43.33	12.18	41.83	45.53	54.00	-8.47	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

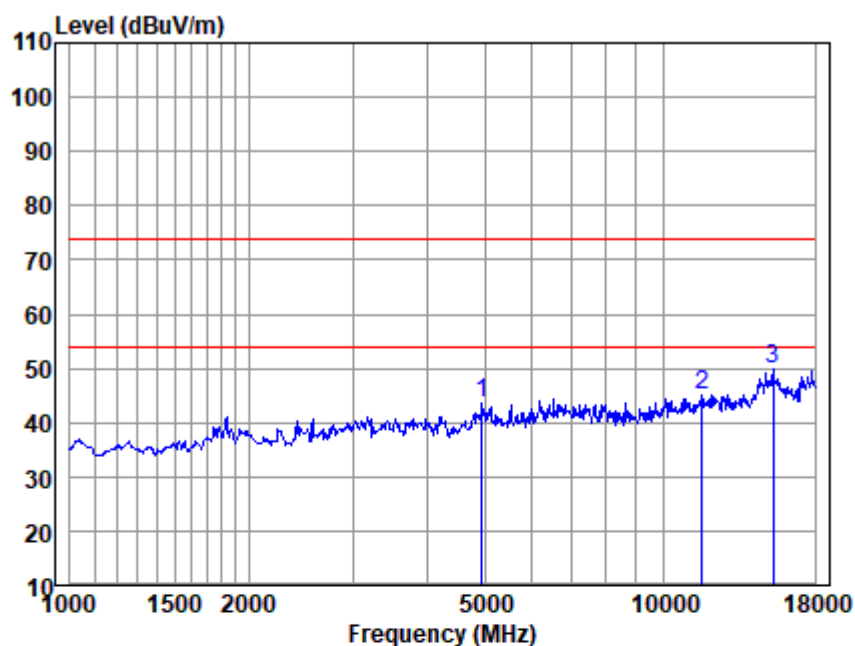


Antenna Polarity :VERTICAL

EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4944.993	41.40	33.63	5.33	36.82	43.54	74.00	-30.46	Peak
11633.930	34.52	38.29	9.66	37.31	45.16	74.00	-28.84	Peak
15310.070	35.90	43.48	12.21	41.83	49.76	74.00	-24.24	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

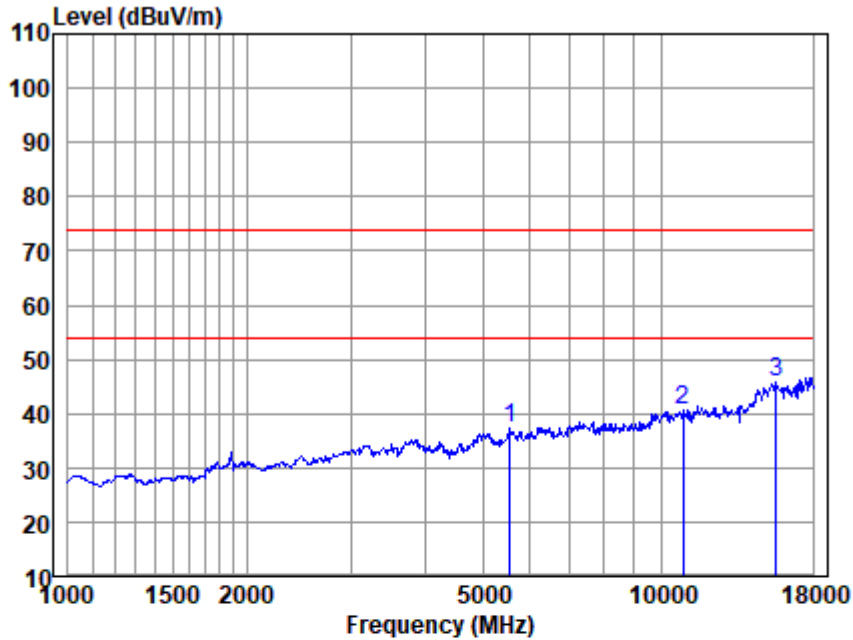


Antenna Polarity :VERTICAL

EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5567.137	34.17	34.52	5.76	36.99	37.46	54.00	-16.54	Average
10885.670	30.07	38.28	9.26	36.84	40.77	54.00	-13.23	Average
15622.990	31.02	43.19	12.40	40.81	45.80	54.00	-8.20	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

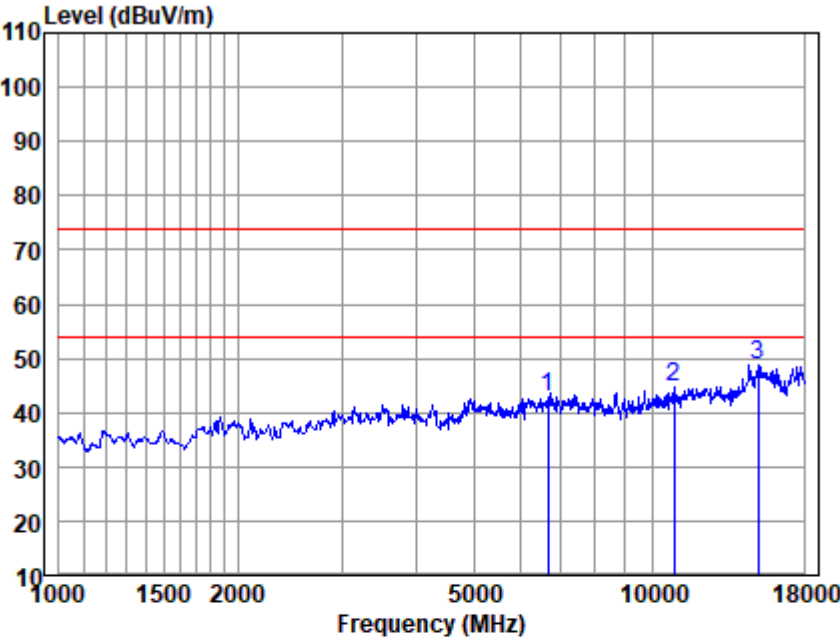


Antenna Polarity :HORIZONTAL
EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
6659.763	37.60	35.65	6.83	37.14	42.94	74.00	-31.06	Peak
10885.670	33.85	38.28	9.26	36.84	44.55	74.00	-29.45	Peak
15090.400	35.65	42.99	12.07	41.84	48.87	74.00	-25.13	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

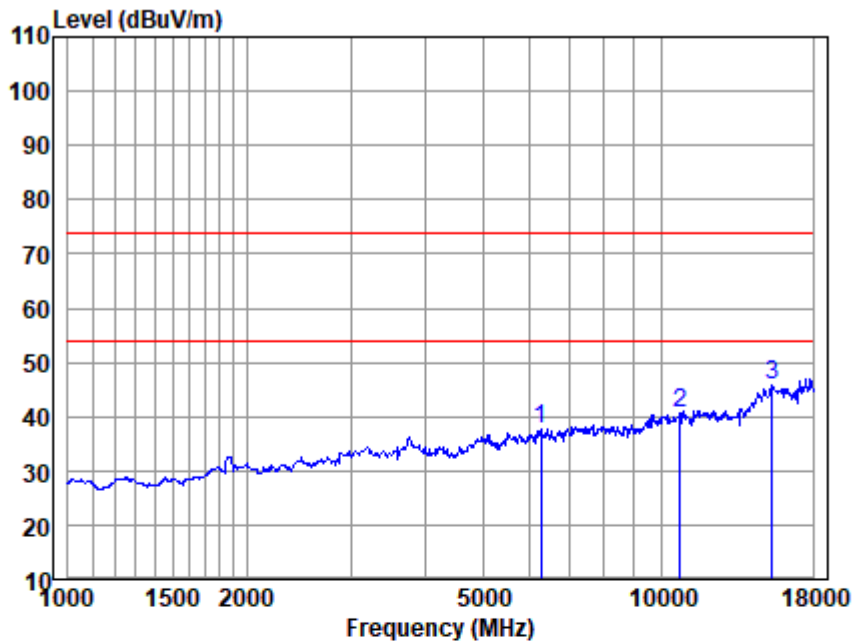


Antenna Polarity :HORIZONTAL
EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
6267.553	32.34	35.51	6.45	36.68	37.62	54.00	-16.38	Average
10760.540	30.95	38.14	9.21	37.78	40.52	54.00	-13.48	Average
15398.830	31.62	43.68	12.26	41.83	45.73	54.00	-8.27	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

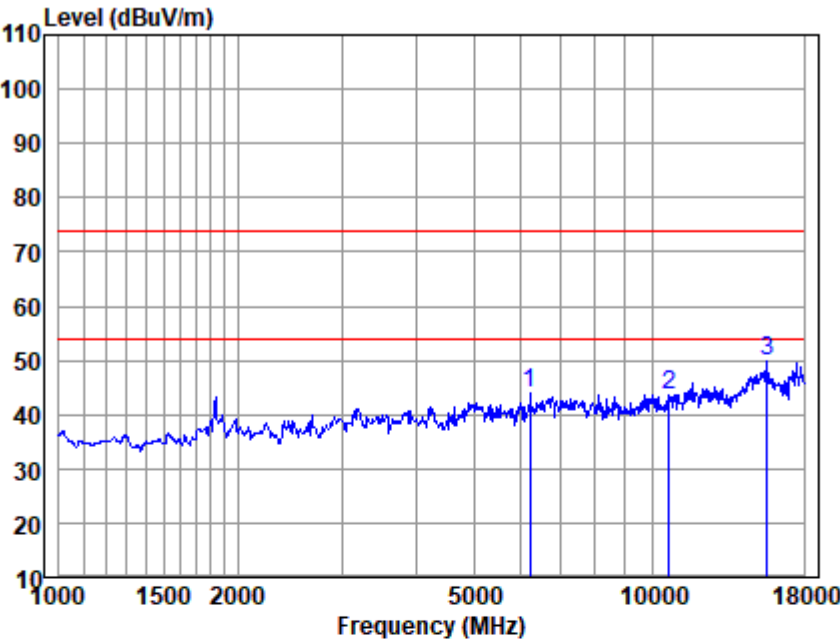


Antenna Polarity :VERTICAL
EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
6231.427	38.68	35.49	6.41	36.73	43.85	74.00	-30.15	Peak
10667.640	34.17	38.04	9.18	37.73	43.66	74.00	-30.34	Peak
15622.990	34.90	43.19	12.40	40.81	49.68	74.00	-24.32	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

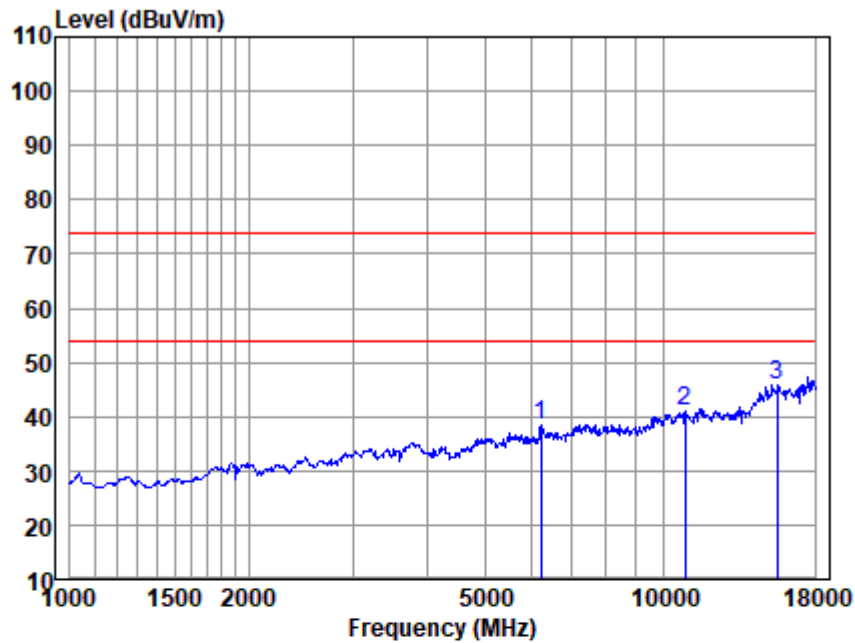

Antenna Polarity :VERTICAL

EUT/Project :2141HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
6213.441	33.19	35.48	6.39	36.75	38.31	54.00	-15.69	Average
10885.670	30.31	38.28	9.26	36.84	41.01	54.00	-12.99	Average
15577.900	30.93	43.29	12.37	40.81	45.78	54.00	-8.22	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.5 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215
 Test Method: ANSI C63.10 (2020) Section 6.9
 Measurement Distance: 3m

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in transmitting with modulation mode.

7.5.3 Test Setup Diagram

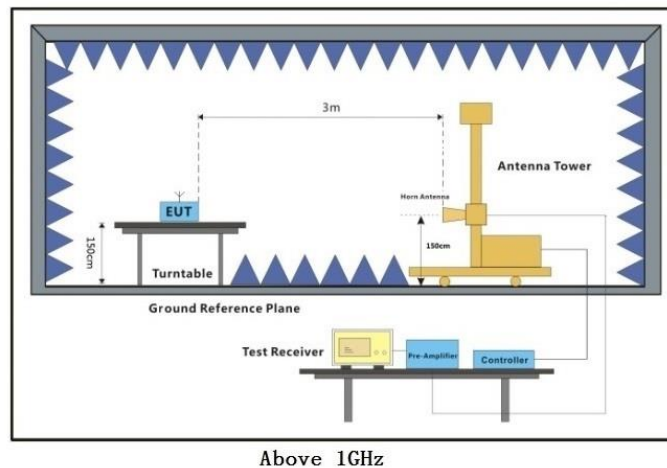

7.5.4 Measurement Procedure and Data

Frequency (MHz)	Bandwidth (MHz)	Result
2405	2.308	PASS
2450	2.262	PASS
2470	2.328	PASS

Test plot as follows:

Channel: 2405MHz



Channel: 2450MHz



Channel: 2470MHz





SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250800214102

Page: 38 of 38

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SHCR2508002141HS

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for SHCR2508002141HS

- End of the Report -