



Tested By:Hong, Report No.:0404514

Scan Settings (1 Range)

----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV


Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No. Start Stop Name

21 9k 30M EW0698

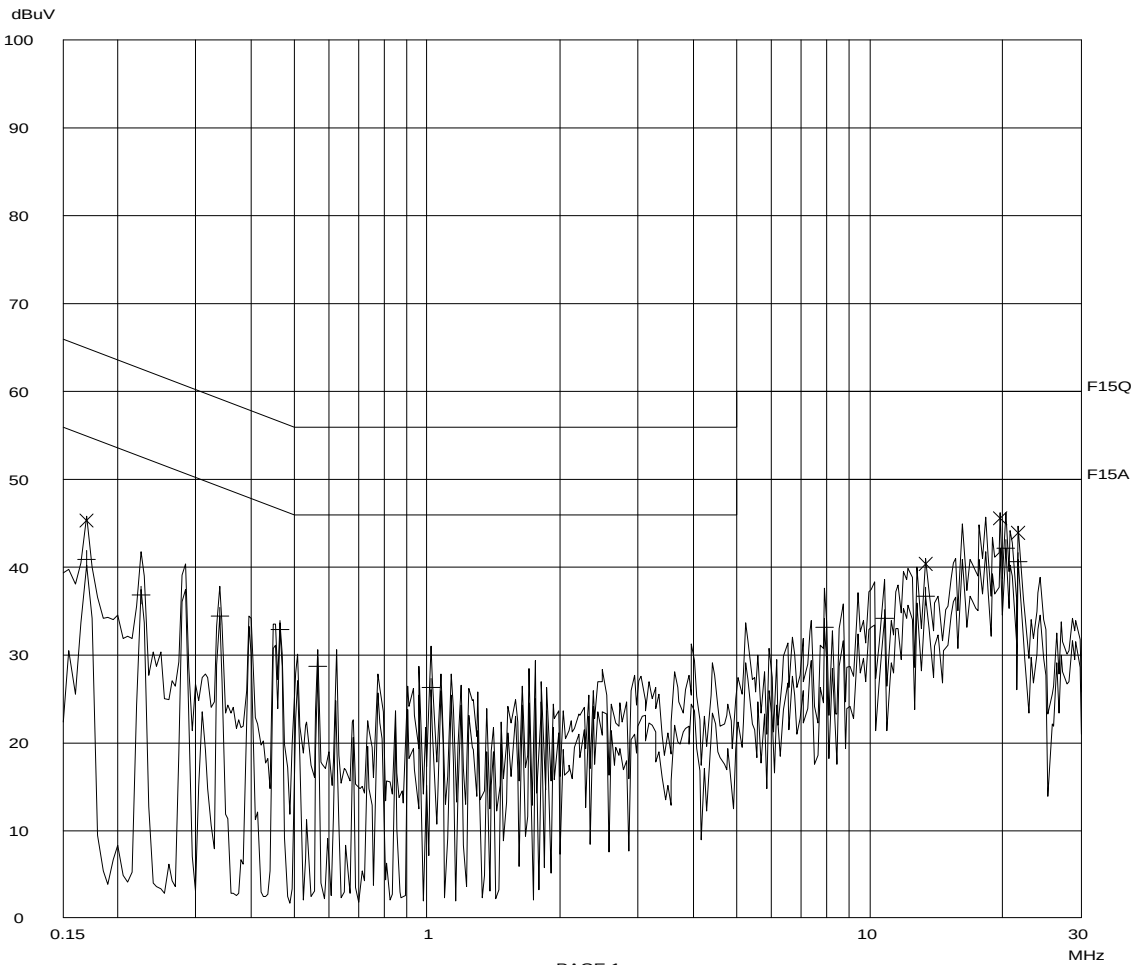

Tested By: Hong, Report No.: 0404514

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement

Frequency QP Level QP Limit

MHz	dBuV	dBuV
-----	------	------

0.17000	45.3	65.0
13.42000	40.3	60.0
19.71000	45.6	60.0
21.66500	43.9	60.0

Frequency AV Level AV Limit

MHz	dBuV	dBuV
-----	------	------

0.17000	40.9	55.0
0.22500	36.8	52.7
0.34000	34.3	49.2
0.46500	32.9	46.6
0.56500	28.6	46.0
1.02000	26.2	46.0
7.92500	33.1	50.0
10.79500	34.2	50.0
13.36000	36.6	50.0
20.26000	42.2	50.0
21.66500	40.6	50.0

* limit



Tested By:Hong, Report No.:0404514

Scan Settings (1 Range)

----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV


Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No. Start Stop Name

21 9k 30M EW0698

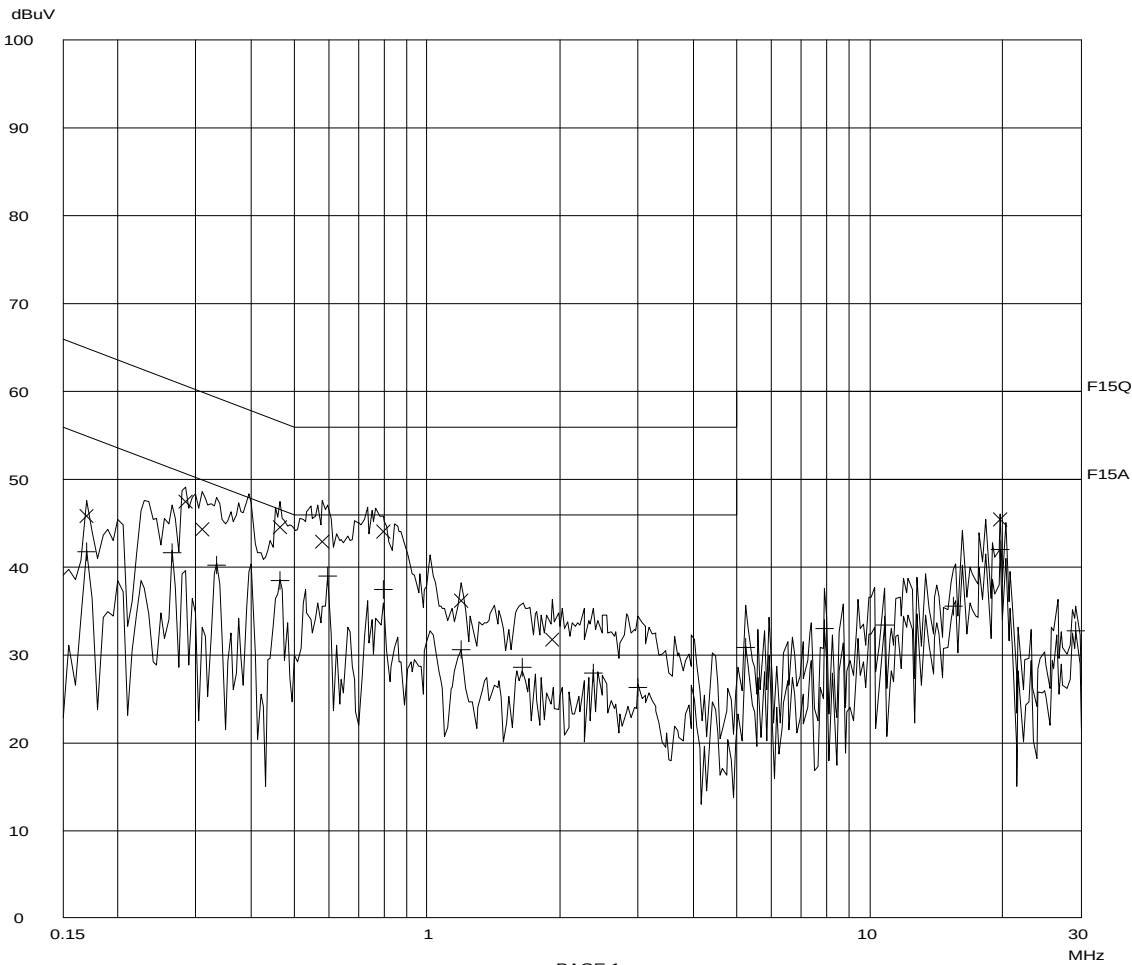

Tested By: Hong, Report No.: 0404514

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.17000	45.8	65.0
0.28500	47.4	60.7
0.31000	44.3	60.0
0.46500	44.5	56.6
0.58000	42.9	56.0
0.79500	44.1	56.0
1.19000	36.2	56.0
1.92000	31.7	56.0
19.71000	45.4	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.17000	41.7	55.0
0.26500	41.6	51.3
0.33500	40.2	49.4
0.46500	38.4	46.6
0.59500	38.9	46.0
0.79500	37.4	46.0
1.19000	30.6	46.0
1.64000	28.5	46.0
2.37500	28.0	46.0
3.00000	26.3	46.0
5.23500	30.9	50.0
7.92500	32.9	50.0
10.79500	33.4	50.0
15.43500	35.5	50.0
19.71000	42.0	50.0
29.24000	32.8	50.0

* limit