

FCC TEST REPORT

Report Number : **60/790.14.001.01** Date of Issue: March 5, 2014

Model : **DJControlWave**

Product type : **DJ Control Player**

FCC ID : **NAM5091215**

Applicant : **GUILLEMOT CORPORATION S.A.**

Address : **Place Du Granier - B.P. 97143,35571 CHANTEPIE CEDEX, FRANCE**

Production Facility : **--**

Address : **--**

Test Result : ☒ **Positive** ☐ **Negative** Total Pages: **19**

Prepared by:



CHAN Kwong Ngai



Reviewed by:



Edmond FUNG

TÜV SÜD Hong Kong Ltd. is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Hong Kong Ltd. reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Hong Kong Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Hong Kong Ltd. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

TABLE OF CONTENTS

1	General Information	3
1.1	Summary of Test Result	3
1.2	Measurement Uncertainty	3
1.3	Measurement Uncertainty	3
2	EUT Description	4
3	Test Methodology	5
3.1	Decision of Test Mode	5
3.2	Configuration of Test System Details	5
3.3	Test Site Environment	5
4	Emission Test	6
4.1	Conducted Emission Measurement	6
4.2	Radiated Interference Measurement	11

1 General Information

1.1 Summary of Test Result

FCC Rules	IC Rules	Description of Test	Result	Remark
FCC § 15.107	ICES-003 § 6.1	AC Line Conducted Emissions	PASS	Meet Class B limit
FCC § 15.109	ICES-003 § 6.2	Radiated Emission	PASS	Meet Class B limit

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.26 dB.

Radiated Emission

The measurement uncertainty is evaluated as ± 3.19 dB.

1.3 Measurement Uncertainty

Details about the Test Laboratory

Test site 1

Company name: TÜV SÜD HONG KONG LTD.
3/F, West Wing, Lakeside 2,
10 Science Park West Avenue,
Science Park, Shatin
HK.

Telephone: 852 2776 1323

Fax: 852 2776 1372

Test site 2

Company name: TMC-Telecommunication Metrology Center of M.I.I.T
No 52 Hua Yuanbei Road, Haidian District, Beijing, P.R.China

2 EUT Description

Product	DJ Control Player
Model Number	DJControlWave
Applicant	GUILLEMOT CORPORATION S.A. Place Du Granier - B.P. 97143,35571 CHANTEPIE CEDEX, FRANCE
Manufacturer	---
Power Supply	Battery:DC 3.7V rechargeable battery Adapter: input AC 100-240V~50/60Hz 0.2A MAX Output DC 5.0V/1.0A

I/O Port Description:


I/O Port Types	Q'TY	Test Description
1). USB	1	Connected to computer, length 1.8m

3 Test Methodology

3.1 Decision of Test Mode

Pre-Test Mode	
EMC	Mode 1: Data transmitting with PC

3.2 Configuration of Test System Details

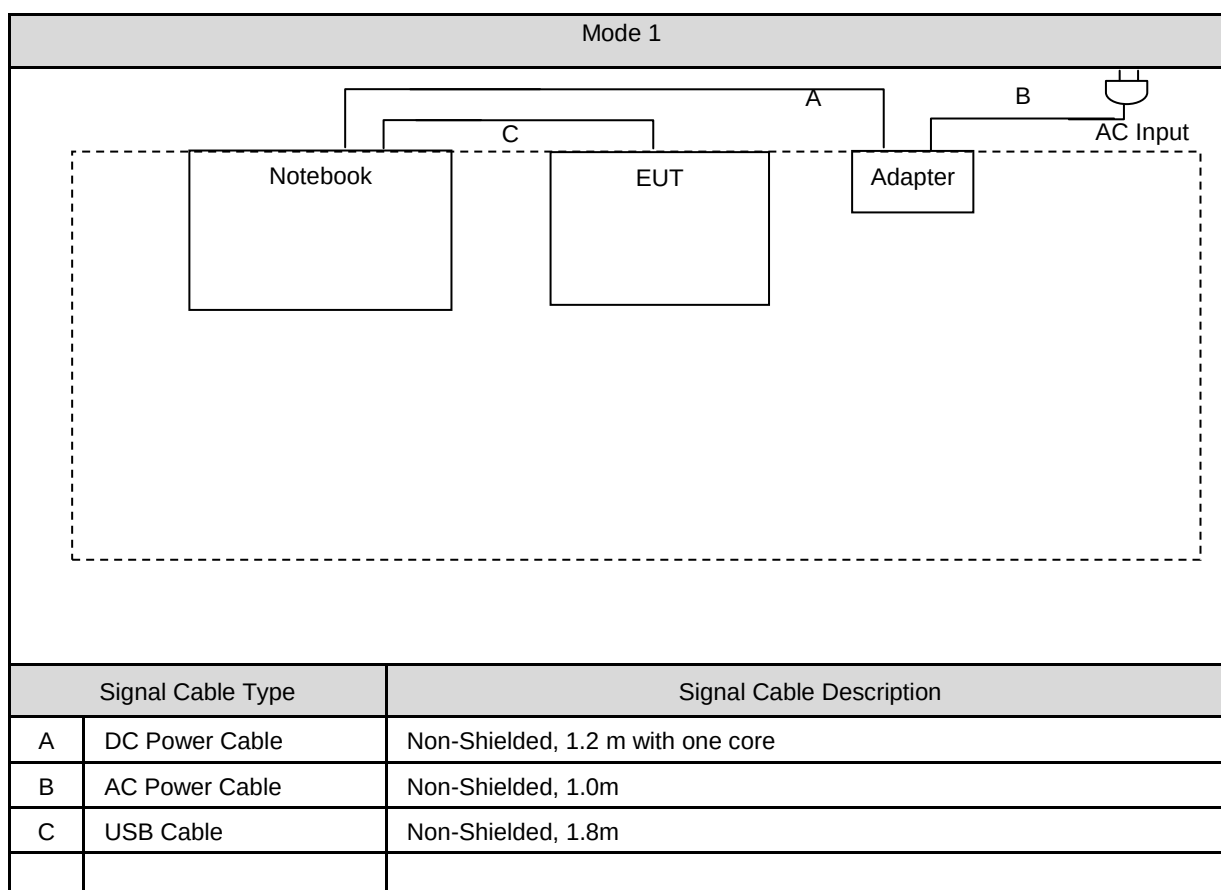

3.3 Test Site Environment

Items	Test Item	Actual
Temperature (°C)	Conducted Emission	25
Humidity (%RH)		66
Barometric pressure (mbar)		1006
Temperature (°C)	Radiated Emission	25
Humidity (%RH)		62
Barometric pressure (mbar)		1006

4 Emission Test

4.1 Conducted Emission Measurement

4.1.1 Limit

A.C. Mains Conducted Interference Limit

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

4.1.2 Test Instruments


Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/18/2013	(1)
LISN	R&S	ENV216	101040	03/07/2013	(1)
LISN	R&S	ENV216	101041	03/07/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

4.1.3 Test Setup

A.C. mains setup

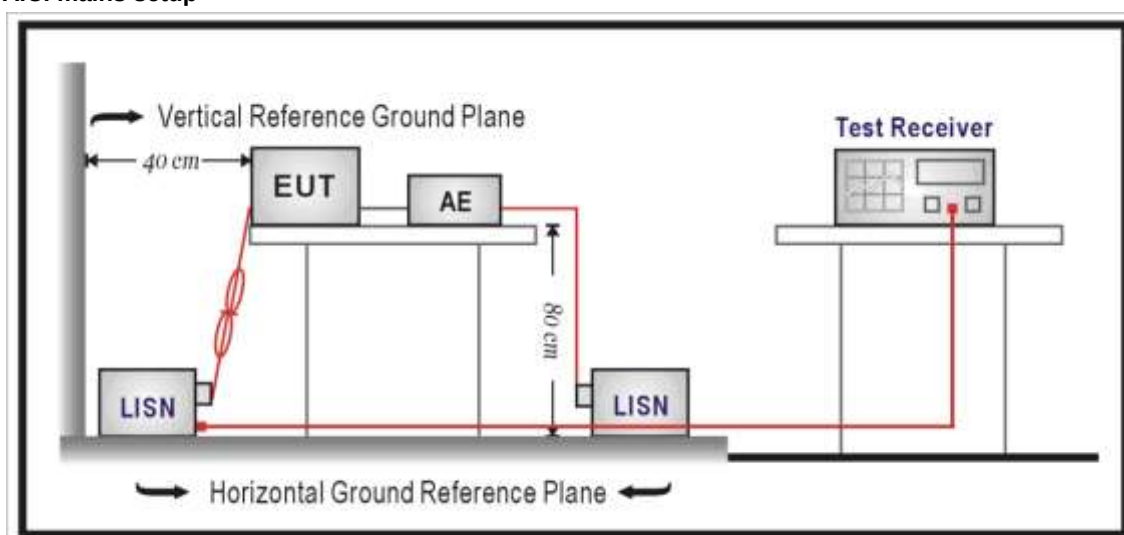

4.1.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.).

This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also

connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

The mains voltage shall be supplied to the EUT via the LISN when the measurement of telecommunication port is performed. The common mode disturbances at the telecommunication port shall be connected to the ISN.


For A.C. mains conducted interference, measured both sides of A.C. lines and carried out using quasi-peak and average detector receivers of maximum conducted interference.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz. The equipment under test (EUT) shall meet the limits in section 4.1.2, as applicable, including the average limit and the quasi-peak limit when using respectively (A.C. mains and telecommunication port), an average detector and quasi-peak detector measured in accordance with the methods described of related standard. Either the voltage limits or the current limits shall be met. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.1.5 Test Result

Standard:	FCC 15.107	Line:	L
Test item:	Conducted Emission	Power:	AC120V 60Hz
Model Number:	DJControlWave	Date:	2014/02/25
Mode:	1	Test By:	
Description:			

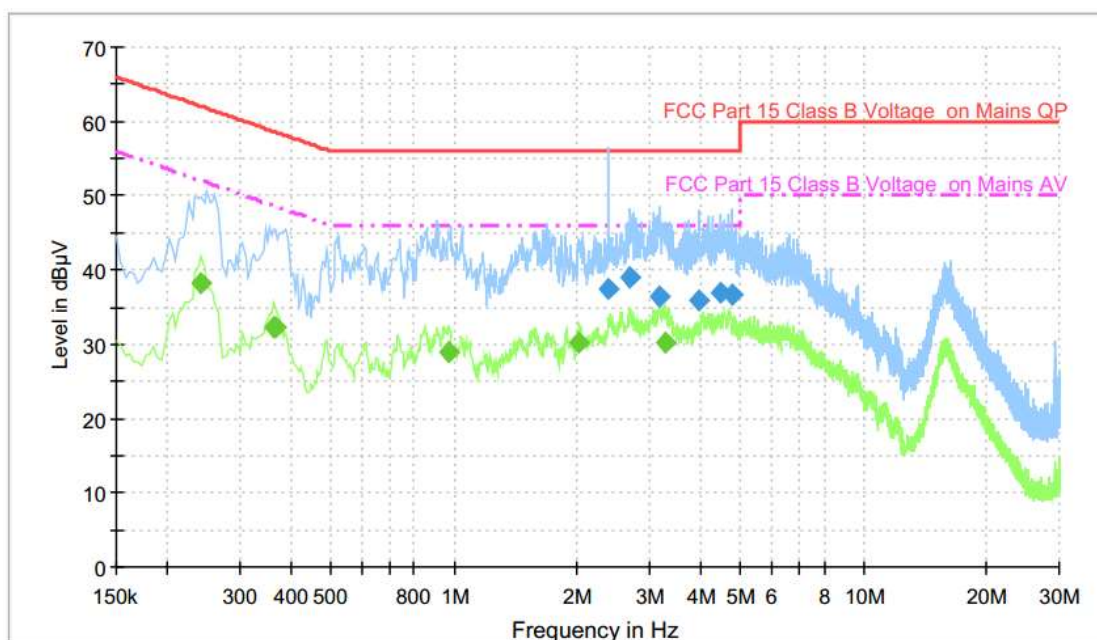

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.378000	37.4	FLO	N	10.2	18.6	56.0
2.702000	39.0	FLO	N	10.2	17.0	56.0
3.190000	36.3	FLO	N	10.2	19.7	56.0
3.950000	36.0	FLO	N	10.2	20.0	56.0
4.458000	37.0	FLO	N	10.2	19.0	56.0
4.758000	36.8	FLO	N	10.2	19.2	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.242000	38.2	FLO	N	10.0	13.9	52.0
0.362000	32.3	FLO	N	10.1	16.4	48.7
0.366000	32.2	FLO	N	10.1	16.4	48.6
0.970000	29.0	FLO	N	10.1	17.0	46.0
2.026000	30.3	FLO	N	10.1	15.7	46.0
3.270000	30.3	FLO	N	10.2	15.7	46.0

Standard:	FCC 15.107	Line:	N
Test item:	Conducted Emission	Power:	AC120V 60Hz
Model Number:	DJControlWave	Date:	2014/02/25
Mode:	1	Test By:	

Description:

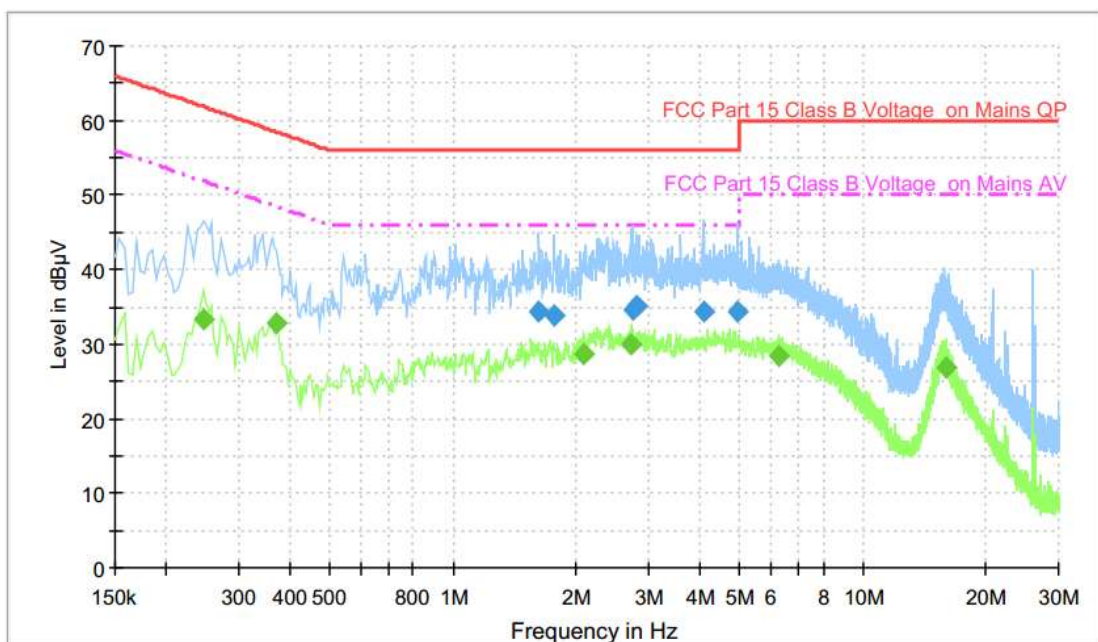

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.626000	34.4	FLO	L1	10.1	21.6	56.0
1.770000	33.8	FLO	L1	10.1	22.2	56.0
2.754000	34.5	FLO	L1	10.1	21.5	56.0
2.806000	35.1	FLO	L1	10.1	20.9	56.0
4.078000	34.3	FLO	L1	10.2	21.7	56.0
4.934000	34.2	FLO	L1	10.2	21.8	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.246000	33.3	FLO	N	10.1	18.6	51.9
0.370000	32.9	FLO	N	10.0	15.6	48.5
2.094000	28.7	FLO	N	10.2	17.3	46.0
2.718000	29.9	FLO	N	10.2	16.1	46.0
6.210000	28.4	FLO	L1	10.3	21.6	50.0
15.910000	26.8	FLO	N	10.5	23.2	50.0

4.1.6 Test Photograph

Test Mode: Mode 1

Description: Front View of Conducted Test



Test Mode: Mode 1

Description: Back View of Conducted Test



4.2 Radiated Interference Measurement

4.2.1 Limit

Under 1GHz test shall not exceed following value

FCC 47 CFR PART 15 SUBPART B				
Frequency range (MHz)	Class A		Class B	
	Distance (m)	dBuV/m	Distance (m)	dBuV/m
30 to 88	10	39	3	40
88 to 216	10	43.5	3	43.5
216 to 960	10	46.4	3	46
Above 960	10	49.5	3	54

- Remark: 1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
4. Peak detector limit is corresponding to 20 dB above the maximum permitted average limit.

According to FCC Part 15.33 (b), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

Highest frequency generated or used in the device or in which the device operated or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.75	30
1.75-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

4.2.2 Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Pre Amplifier	Agilent	8447D	2944A11120	01/10/2014	(1)
Pre Amplifier	Agilent	8447D	2944A11119	01/10/2014	(1)
Test Receiver	R&S	ESCI	100722	10/18/2013	(1)
Test Receiver	R&S	ESCI	101000	10/18/2013	(1)
Broadband Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB 9160	9160-3268	06/06/2013	(1)
Broadband Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB 9160	9160-3273	12/13/2013	(1)
Horn Antenna (1~18GHz)	ETS-Lindgren	3117	00128055	08/09/2013	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/21/2013	(1)

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.


Note: N.C.R. = No Calibration Request.

4.2.3 Setup

Below 1GHz

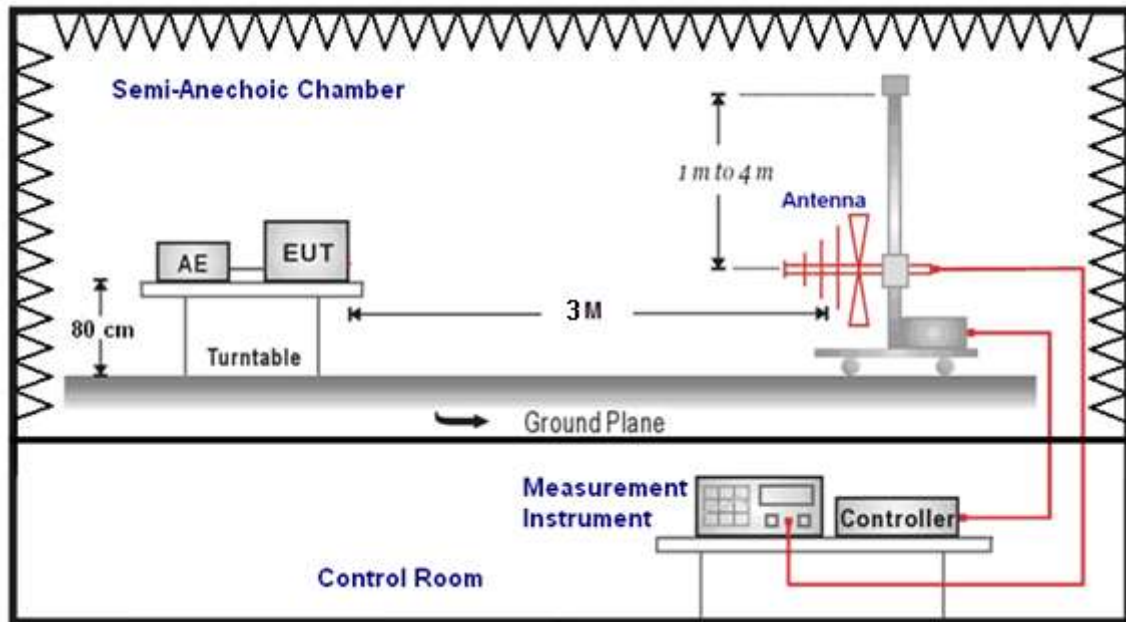


Above 1GHz

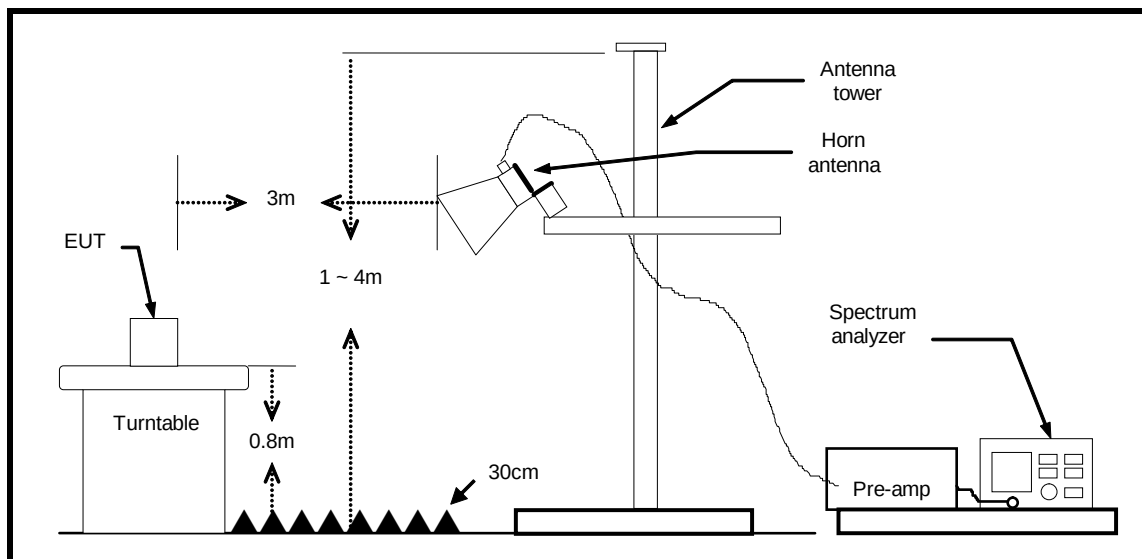


4.2.4 Test Result

Standard:	FCC 15.109	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	DJControlWave	Temp.(°C)/Hum.(%RH):	22(°C)/54%RH
Mode:	1	Date:	2014/02/27
Ant.Polar.:	Horizontal(30MHz-1GHz)		

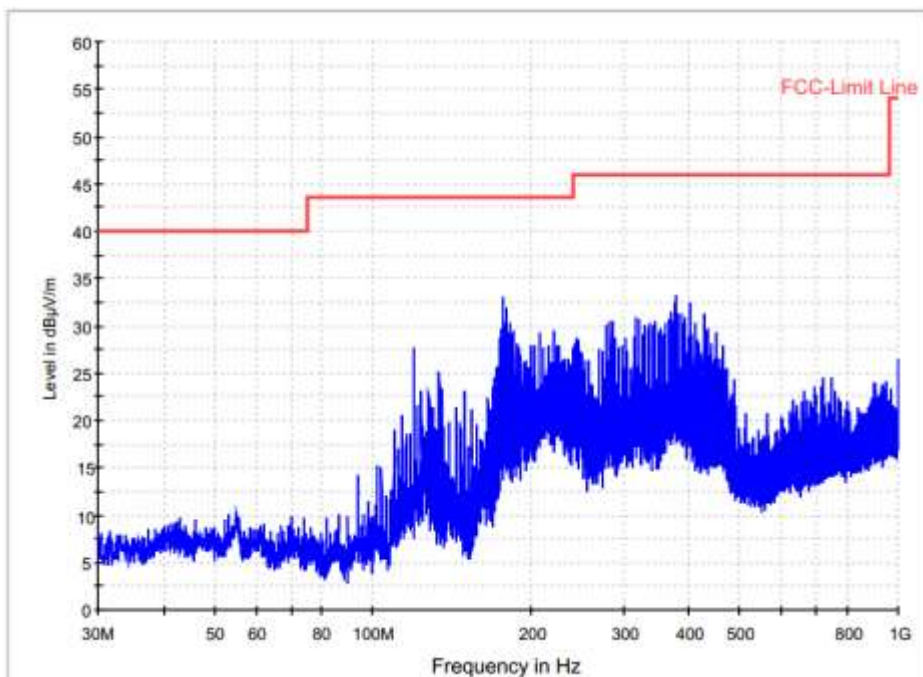


Ferquency (MHz)	QuasiPeak (dBμV/m)	Polarity (H/V)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)
55.08	10.39	H	-34.4	40.0	29.61
120.00	27.69	H	-37.4	43.5	15.81
177.78	33.01	H	-38.2	43.5	10.49
282.00	30.53	H	-33.8	46.0	15.47
377.94	33.36	H	-31.3	46.0	12.64
750.06	24.51	H	-24.2	46.0	21.49

Standard:	FCC 15.109	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	DJControlWave	Temp.(°C)/Hum.(%RH):	22(°C)/54%RH
Mode:	1	Date:	2014/02/27
Ant.Polar.:	Horizontal(1GHz-18GHz)		

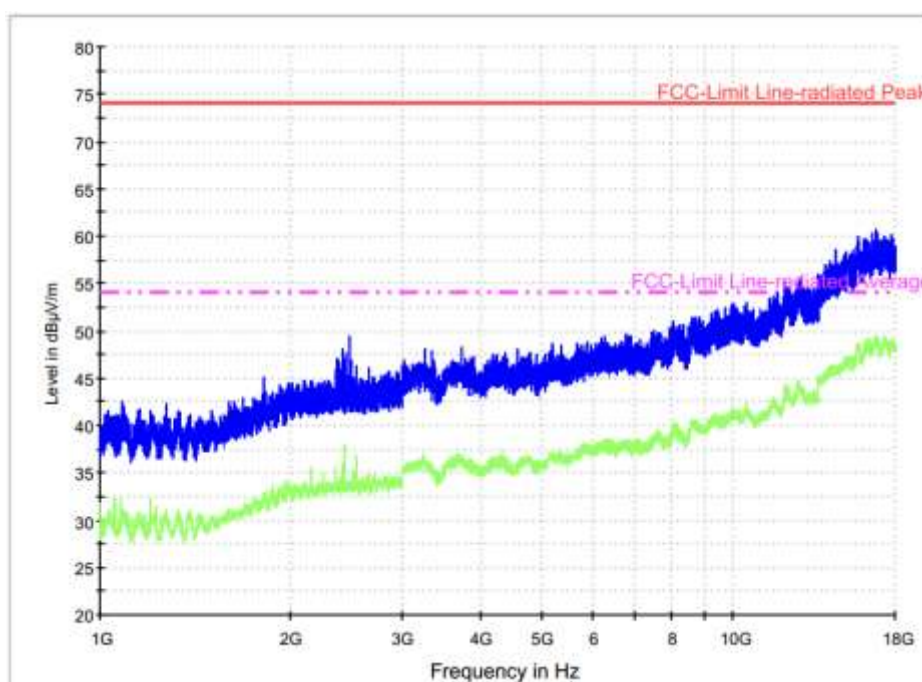


Ferquency (MHz)	Corr.Amp. (dBμV/m)	Detector (PK/Ave.)	Polarity (H/V)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)
1882.22	45.14	PK	H	0.0	74.0	28.86
1882.22	35.66	Ave.	H	0.0	54.0	18.34
2476.50	49.58	PK	H	1.9	74.0	24.42
2476.50	38.09	Ave.	H	1.9	54.0	15.91
3716.62	48.39	PK	H	4.0	74.0	25.61
3716.62	36.47	Ave.	H	4.0	54.0	17.53

Standard:	FCC 15.109	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	DJControlWave	Temp.(°C)/Hum.(%RH):	22(°C)/54%RH
Mode:	1	Date:	2014/02/27
Ant.Polar.:	Vertical(30MHz-1GHz)		

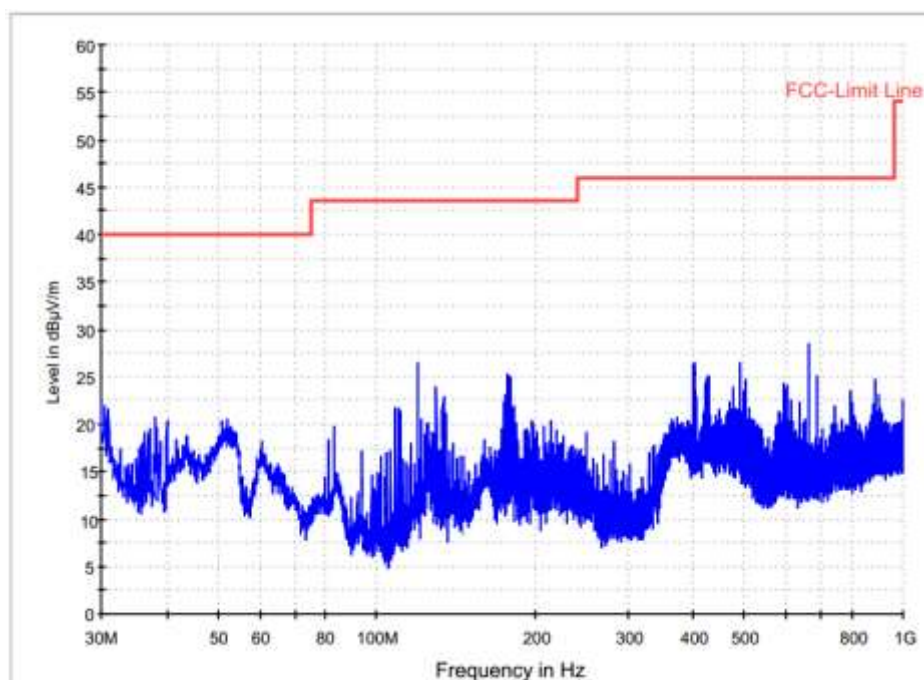

Ferquency (MHz)	QuasiPeak (dBμV/m)	Polarity (H/V)	Corr. (dB)	Limit (dBμV/m)	Margin (dB)
38.10	20.72	V	-35.3	40.0	19.28
83.16	19.71	V	-38.3	40.0	20.29
120.00	26.47	V	-37.0	43.5	17.03
178.92	25.06	V	-37.9	43.5	18.44
402.30	26.55	V	-31.1	46.0	19.45
662.76	27.14	V	-26.5	46.0	18.86

Standard:	FCC 15.109	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	DJControlWave	Temp.(°C)/Hum.(%RH):	22(°C)/54%RH
Mode:	1	Date:	2014/02/27
Ant.Polar.:	Vertical(1GHz-18GHz)		

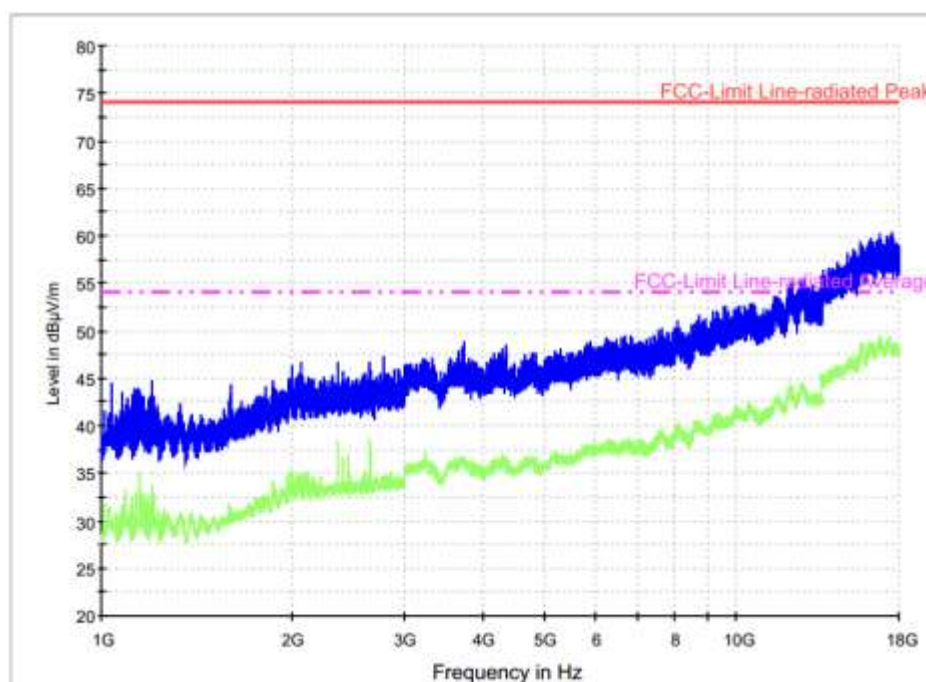

Frequency (MHz)	Corr.Amp. (dBµV/m)	Detector (PK/Ave.)	Polarity (H/V)	Corr. (dB)	Limit (dBµV/m)	Margin (dB)
1184.14	44.83	PK	V	-4.9	74.0	29.17
1184.14	33.80	Ave.	V	-4.9	54.0	20.20
2083.26	46.82	PK	V	1.1	74.0	27.18
2083.26	35.04	Ave.	V	1.1	54.0	18.96
3724.14	48.16	PK	V	4.1	74.0	25.84
3724.14	36.24	Ave.	V	4.1	54.0	17.76

Test Photograph

Test Mode: Mode 1

Description: View of Radiated Emission Test (30MH-1GHz)



Test Mode: Mode 1

Description: View of Radiated Emission Test (30MHz-1GHz)



Test Mode: Mode 1

Description: View of Radiated Emission Test (1GH-18GHz)



Test Mode: Mode 1

Description: View of Radiated Emission Test (1GHz-18GHz)

