
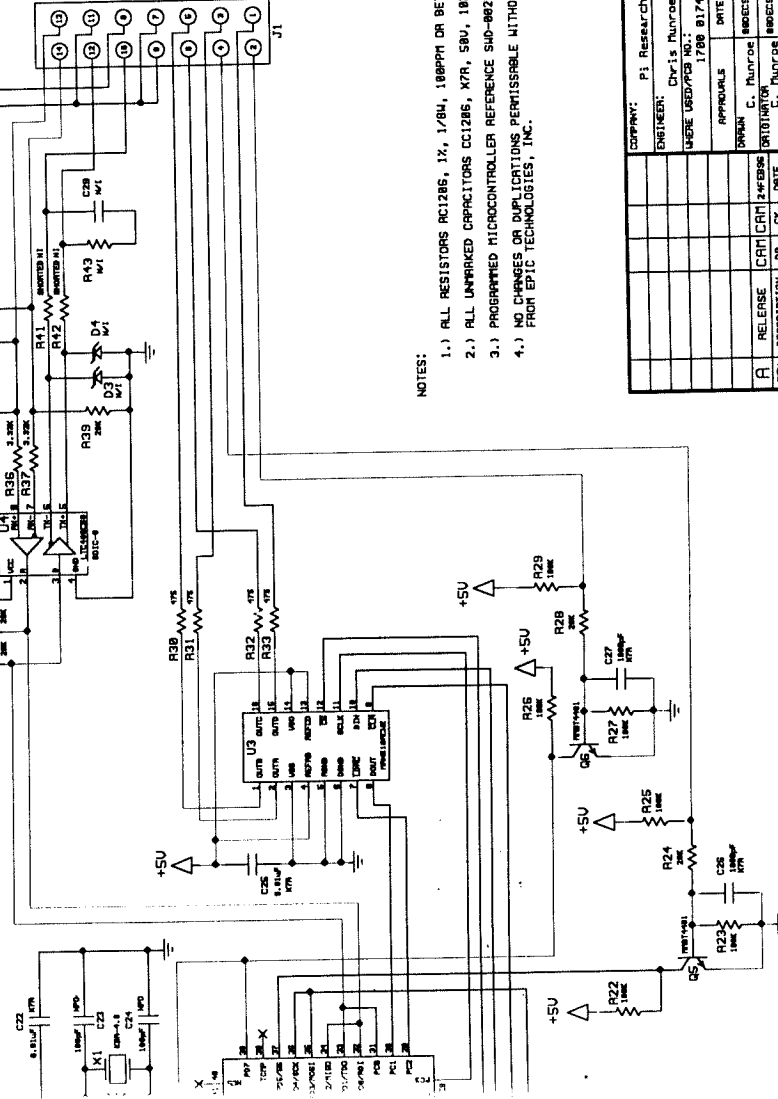


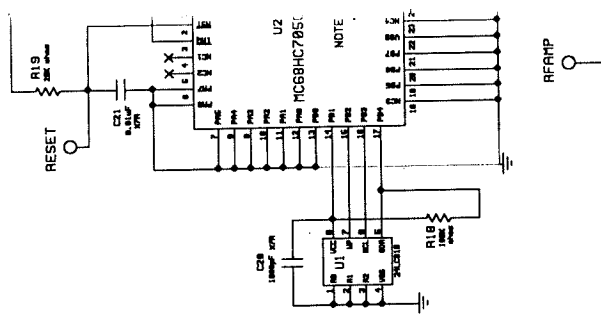

```

14 = RS422 RX (-)
13 = RS422 RX (+)
12 = RS422 TX (+)
11 = 0V GROUND
10 = RS422 TX (-)
09 = +V SUPPLY
08 = GROUND
07 = GROUND
06 = AF DAC OUT
05 = LR DAC OUT
04 = 9500/38400
03 = LF DAC OUT
02 = TICK INPUT
01 = RR DAC OUT

```

NOTES:

- 1.) ALL RESISTORS CC128S, 1%, 1/8W, 180PPM OR BETTER.
- 2.) ALL UNWRAPPED CAPACITORS CC128S, K7A, 50V, 10% OR BETTER.
- 3.) PROGRAMMED MICROCONTROLLER REFERENCE SHD-8029 FOR MICRO PROGRAM.
- 4.) NO CHANGES OR DUPLICATIONS PERMISSABLE WITHOUT WRITTEN PERMISSION FROM EPIC TECHNOLOGIES, INC.

[illegible]