

Exhibit 9

Minstrel S

Novatel Wireless Technologies Ltd.

FCC ID: NBZNRM6834

User's Manual

MINSTREL S™

Quick Start Guide

As shown below, your Minstrel S™ can be ready to download web pages and send and receive email in just a few steps. For more detailed information on setting up your Minstrel S, read the *Getting Started* section of the **Minstrel S User Guide**.

- 1 Insert the Minstrel S into the Springboard™ expansion slot of your Visor™.**

Remove the slot protector and insert the Minstrel S into the slot until the connectors are secure. The *Modem Manager* software, which controls the modem's connection to the Wireless IP network, will automatically launch.
- 2 Start the *Setup Wizard* utility to begin configuration of the Minstrel S.**

Once the **Minstrel** screen appears, tap the **Menu** icon and select **Setup Wizard** from the **Minstrel** menu.
- 3 Follow the directions on the screen to configure the Minstrel S.**

As directed, select the Wireless IP network provider you wish to use and contact the provider to set up an account. When prompted, enter the IP and DNS addresses and test the network registration.
- 4 Install email and web browsing applications on your Visor.**

Install any email and web browsing applications you would like to use on your Visor following the directions provided by the software manufacturer.
- 5 Charge the Minstrel S battery.**

The Minstrel S is shipped with a partially charged battery and, therefore, it is necessary to charge the battery before the modem is used. The battery status LED on the front of the Minstrel S flashes green when the battery is being charged and is solid green when the battery is fully charged.
- 6 Connect to the Wireless IP network.**

Once your Minstrel S has been configured, you can connect to the Wireless IP network simply by inserting your Minstrel S into the Visor's expansion slot. The *Modem Manager* software will automatically launch and register the modem to the network.
- 7 Congratulations!**

Now that your Minstrel S has registered to the Wireless IP network, you can send and receive data across the Internet using your Visor and just about any email or web browsing application you choose.



MINSTREL S™

Quick Start Guide

As shown below, your Minstrel S™ can be ready to download web pages and send and receive email in just a few steps. For more detailed information on setting up your Minstrel S, read the *Getting Started* section of the **Minstrel S User Guide**.

- 1 Insert the Minstrel S into the Springboard™ expansion slot of your Visor™.**

Remove the slot protector and insert the Minstrel S into the slot until the connectors are secure. The *Modem Manager* software, which controls the modem's connection to the Wireless IP network, will automatically launch.
- 2 Start the *Setup Wizard* utility to begin configuration of the Minstrel S.**

Once the **Minstrel** screen appears, tap the **Menu** icon and select **Setup Wizard** from the **Minstrel** menu.
- 3 Follow the directions on the screen to configure the Minstrel S.**

As directed, select the Wireless IP network provider you wish to use and contact the provider to set up an account. When prompted, enter the IP and DNS addresses and test the network registration.
- 4 Install email and web browsing applications on your Visor.**

Install any email and web browsing applications you would like to use on your Visor following the directions provided by the software manufacturer.
- 5 Charge the Minstrel S battery.**

The Minstrel S is shipped with a partially charged battery and, therefore, it is necessary to charge the battery before the modem is used. The battery status LED on the front of the Minstrel S flashes green when the battery is being charged and is solid green when the battery is fully charged.
- 6 Connect to the Wireless IP network.**

Once your Minstrel S has been configured, you can connect to the Wireless IP network simply by inserting your Minstrel S into the Visor's expansion slot. The *Modem Manager* software will automatically launch and register the modem to the network.
- 7 Congratulations!**

Now that your Minstrel S has registered to the Wireless IP network, you can send and receive data across the Internet using your Visor and just about any email or web browsing application you choose.





MINSTREL $\int$ TM

User Guide



The information contained in this document is subject to change without notice and should not be construed as a commitment by Novatel Wireless Inc. unless such commitment is expressly given in a covering document.

The information herein is the exclusive property of Novatel Wireless Inc. No part of this publication may be reproduced or transmitted in any form or by any means including electronic storage, reproduction, execution, or transmission without the prior written consent of Novatel Wireless Inc.

© 2000 Novatel Wireless, Inc. All rights reserved.



Getting Started	4
Welcome	5
Requirements	6
Overview of the Minstrel S Modem	7
Overview of the Minstrel S Software	10
Charging the Battery	11
Installing the Minstrel S Software	12
Connecting the Minstrel to the Visor	13
Configuring the Minstrel	14
Connecting to the Internet	15
Working with the Minstrel S	16
Managing the Network Connection	17
Using the Power Switch	19
Changing the Configuration	22
Updating the Flash	23
Using File Mover	26
Configuring the Button	34
Setup Wizard	37
Introduction to Setup Wizard	38
Starting Setup Wizard	39
Select Provider	41
Configure Palm Device	44
Contact a Provider	46
Settings	48
Confirm Settings	50
Auto Config	52
Check Network	54
Successful	56
Modem Manager	57
Introduction to Modem Manager	58
Starting Modem Manager	61
Minstrel	64
Config	67
Detailed Status	75
Push Message Configuration	79
Terminal	82
Ping	87
Glossary	90
Glossary A-H	91
Glossary I-R	92
Glossary S-V	93
Glossary W-Z	94
Index	95
Index A-Co	96
Index Co-Em	97
Index En-Ld	98
Index Le-Ou	99
Index Ov-R	100
Index S-St	101
Index Su-Z	102



Getting Started



Welcome

Welcome to the **Minstrel S User Guide**. This guide provides information on using the many components and features of your Minstrel S™ Wireless Springboard™ Modem, including the following:

- General information about the Minstrel S modem and software
- Instructions to help get you started with your Minstrel S so you can download web pages and send email almost immediately
- Detailed information about the software used to configure and control the operation of your Minstrel S

Caution

To satisfy FCC RF exposure compliance requirements for mobile transmitting devices, the user should generally maintain a separation distance of 20 cm between the person's body, and the device and its antenna. The hands and wrists have a higher exposure limit because they are extremities, and the device should be used in a hand-held, hand-operated configuration only.

This device has been tested for compliance with a separation distance of 4 cm from a person's body. The operating configurations of this device generally do not support normal transmissions while it is carried in pockets or holsters next to a person's body.

Technical Support

If you have any questions or comments about your Minstrel S, please contact the Novatel Wireless Technical Support Team.

WWW: www.novatelwireless.com/support/index.html

Email: support@novatelwireless.com

Phone: 1-888-888-9231



Requirements


The following is required to set up and use your Minstrel S for sending and receiving data across the Internet:

- A Handspring™ Visor™ handheld computer
- Desktop software that allows you to communicate between your desktop PC and the Visor
- Modem application software for the Visor (included with your Minstrel)
- An account with a Wireless IP network service provider in your area
- Application software for your Visor such as an email client and web browser

Wireless IP service is available from your local cellular carrier in most North American cities. Check your product packaging or www.novatelwireless.com for network provider contact information.

Overview of the Minstrel S Modem

The Minstrel S modem has many important features such as status indicator LEDs, a configurable button, and a DC jack for powering the unit with the supplied AC adapter.

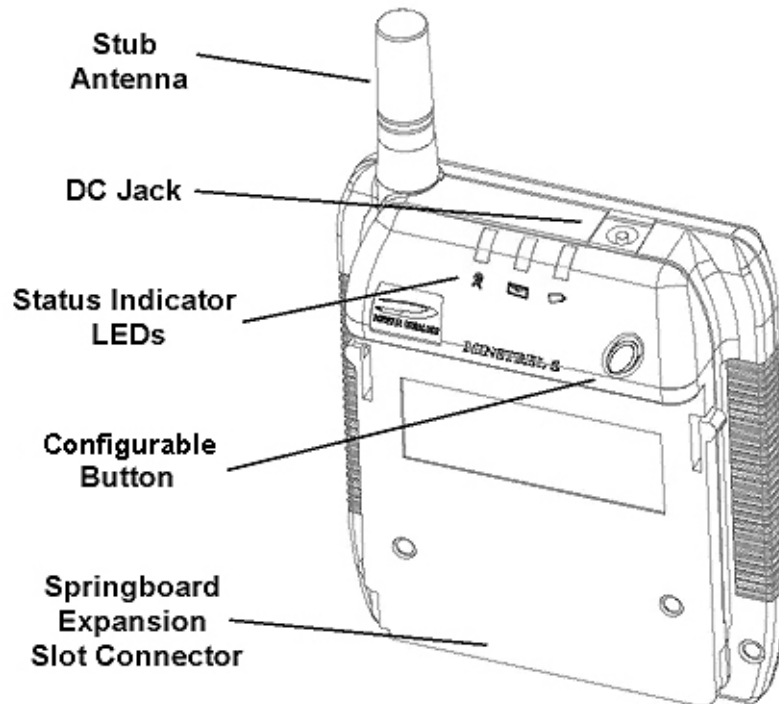

Information on the operation of the configurable button and status indicator LEDs are provided in the sections below.

Configurable Button

On the front of the Minstrel S there is a button that can be customized to launch any program when pressed. For information on how to customize this button, refer to ***Configuring the Button***.

Status Indicator LEDs

The Minstrel S has three LED indicators that allow you to easily determine the status of various modem parameters.

Service LED

The LED labeled with the icon below indicates the status of the connection to the Wireless IP network.



The table below explains the various states of this LED.

Color	State	Meaning
Green	Solid	The Minstrel is registered or connected to the Wireless IP network and, therefore, data can be sent and received across the Internet.
Green	Solid but flashes off every 5 seconds	The Minstrel is registered to the network but is in <i>sleep mode</i> .
Green	Flashing quickly	The Minstrel is attempting to register to the network.
Green	Flashing slowly	The Minstrel is attempting to locate a network provider.

Data/Message Waiting LED

The LED labeled with the icon shown below is used to indicate the transfer of data and provide notification of waiting messages.



The table below shows the various states of this LED and their meanings.

<i>Color</i>	<i>State</i>	<i>Meaning</i>
Green	Flashing	The Minstrel is sending or receiving data.
Red	Flashing	The Minstrel has received a “push” message notification. Push messaging must be enabled for this to occur. For more information, refer to <i>Push Message Configuration</i> .

Battery LED

The LED that indicates the state of the Minstrel's internal battery is labeled with the icon below.



The table below describes the various states of this LED.

<i>Color</i>	<i>State</i>	<i>Meaning</i>
Green	Flashing	The Minstrel's battery is being charged. The Minstrel is being powered by the AC adapter.
Green	Solid	The Minstrel's battery is fully charged but the AC adapter is still plugged in and, therefore, powering the unit.
Red	Flashing	The Minstrel's battery is low and requires charging.

For more information on charging the battery, refer to the section entitled ***Charging the Battery***.



Overview of the Minstrel S Software

In order for you to easily configure and operate your Minstrel S, there are two main software programs included with the Minstrel S modem. These programs, which are described below, are already installed on the flash memory of the unit.

Setup Wizard

The *Setup Wizard* utility is designed to guide you step-by-step through the setup of your Minstrel S. Once you have a Wireless IP account established with a network provider, you can use the *Setup Wizard* to enter and save the necessary settings to the Minstrel S modem and configure your Visor for use with the Minstrel S. For more information about this program and the configuration process refer to the ***Setup Wizard*** section of this document.


Modem Manager

The *Modem Manager* software provides you with complete status information about the Minstrel S and control over its connection to the Wireless IP network. It also contains screens for more advanced users to configure their modem without the use of *Setup Wizard*. For more information about this program and its many features, refer to the ***Modem Manager*** section of this document.

Charging the Battery

The Minstrel S contains a rechargeable Lithium-ion battery. This battery is shipped only partially charged, so it is necessary to charge the battery to its full capacity before using the unit.

To charge the battery, plug the AC adapter (supplied) into an outlet and insert the barrel connector into the DC jack found on the top of the Minstrel.

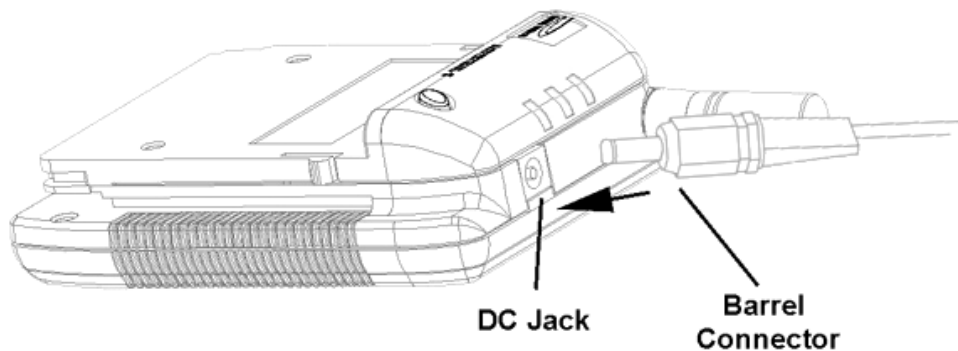

It will take approximately 3 hours to charge the battery from a zero charge state. With sleep mode enabled, the battery will provide power to the unit for many hours of web browsing.

Battery LED

When the Battery LED is flashing red, this indicates that the battery is low and requires charging. For more information about the Battery LED, refer to *Status Indicator LEDs* in the **Overview of the Minstrel S Modem** section.

NOTE: If the battery charge goes lower than a pre-set threshold, the modem will automatically disconnect from the network and power off in order to preserve the settings in its internal memory.



Installing the Minstrel S Software


The software necessary for configuring and operating the Minstrel S is already installed on the Minstrel's flash memory. In the future, there may be updates to this software which will be released at our web site (www.novatelwireless.com). For information on how to install these software updates, refer to the section entitled **Updating the Flash**.

Additional software such as email and web browsing applications may be required for accessing the Internet. For information on installing these applications, consult the software manufacturer's instructions.

Connecting the Minstrel to the Visor

The Minstrel S uses Handspring's Springboard™ technology to attach to and communicate with your Visor handheld computer. In order to configure and use your Minstrel S, you must first connect the Minstrel to the Visor by following the directions below.

First, remove the Visor's Springboard slot protector. Then, with the front of the Minstrel S facing the same direction as the front of the Visor, slide the Minstrel into the slot until the connectors are secure.

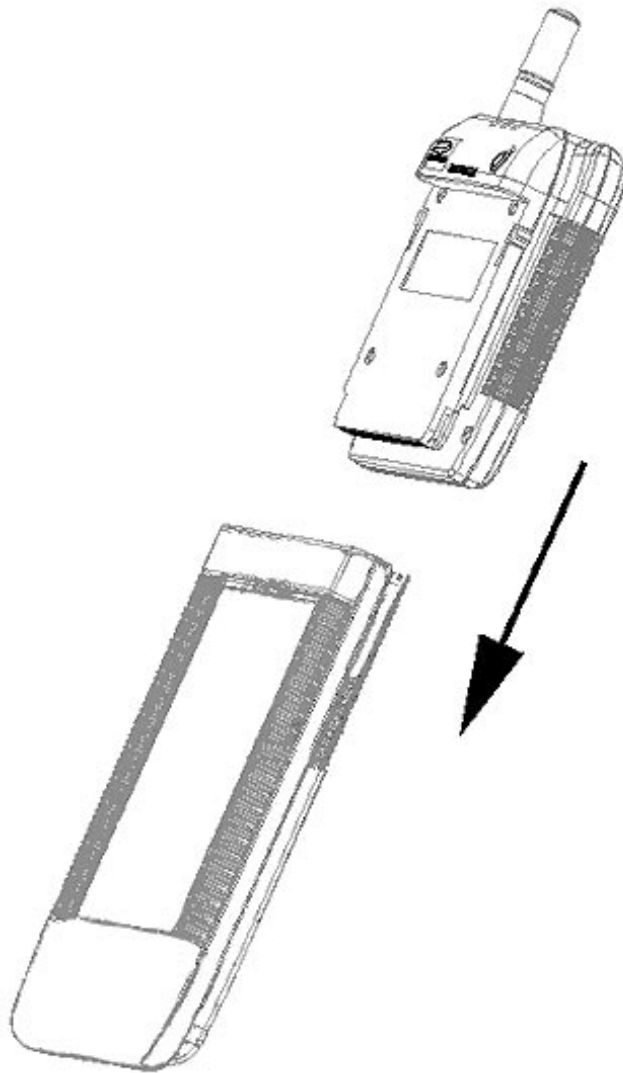

As soon as the Minstrel is inserted into the slot, the *Modem Manager* software will automatically start and attempt to establish a connection to the Wireless IP network.



Configuring the Minstrel

In order to connect to the Internet, the Minstrel S must first be configured with the necessary parameters to be able to register to the Wireless IP network.

To configure the Minstrel, first insert the Minstrel into the Visor's expansion slot as explained in **Connecting the Minstrel to the Visor**. The *Modem Manager* software will automatically start when this happens. Tap the **Menu** icon when the **Minstrel** screen appears and select **Setup Wizard** from the **Minstrel** menu.



For more information about starting *Setup Wizard* and the configuration process, refer to the section entitled **Setup Wizard**.

NOTE: In order to configure and use the Minstrel, an account must first be established with a Wireless IP network provider.



Connecting to the Internet

To send and receive data across the Internet using the Minstrel S, a connection to the Wireless IP network is required. To register to the network once configuration has been completed, simply insert your Minstrel S into the Springboard slot of your Visor. The *Modem Manager* program will automatically run, attempting to connect to the network.

Once the Minstrel is registered, you can use almost any Internet application on your Visor or Minstrel S to send and receive data, including downloading web pages and sending email.



Working with the Minstrel S


Managing the Network Connection

In order to send and receive data across the Internet, the modem must be connected or registered to the Wireless IP network. In the sections below, information is provided on how to

- establish the network connection
- disconnect from the network
- close the PPP session.

Connecting to the Network

To establish a connection, or register, to the Wireless IP network, simply insert the Minstrel S into the Visor's expansion slot. The *Modem Manager* will automatically launch and attempt to register to the Wireless IP network. If the Minstrel S is already inserted, tap the **Applications** icon and then the **Minstrel** icon to start the *Modem Manager* software.

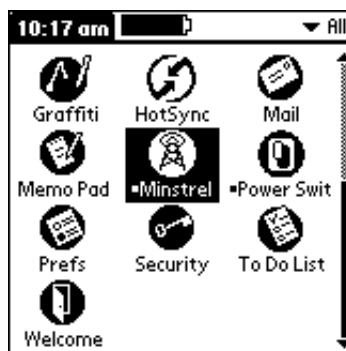

Disconnecting from the Network

To disconnect, or de-register, from the Wireless IP network and power off the modem, tap the **Shutdown** button at the bottom of the **Minstrel** screen of the *Modem Manager* software.





You can also tap the **Menu** icon and select **Shutdown** from the **Minstrel** menu to de-register and power off the unit or use the *Power Switch* utility, which is described in *Using the Power Switch*.



Closing the PPP Session

To close the active PPP session but remain registered to the Wireless IP network, tap the **Menu** icon and select **Disconnect** from the **Minstrel** menu.



Closing the PPP session means that you cannot send and receive data across the Internet but because the modem is registered it can still communicate with the Wireless IP network, including receiving push message notifications.

NOTE: If *Auto Power Off* is enabled, tapping **Disconnect** will close the active PPP session causing the modem to de-register from the Wireless IP network and power off. If *Auto Power Off* is disabled, tapping **Disconnect** will close the PPP session but the modem will remain registered to the Wireless IP network. For more information on the *Auto Power Off* feature, refer to *Auto Power Off* in the **Config** section.



Using the Power Switch


The *Power Switch* utility allows you to quickly power on and power off your Minstrel S with the tap of a button.

Starting Power Switch


To start the *Power Switch* utility, tap the **Applications** icon and then the **Power Switch** icon.



The **Power Switch** screen will show the current status of the Minstrel S. If the animated antenna is radiating power, the Minstrel S is powered on.




If the antenna is not radiating power, the Minstrel S is off.

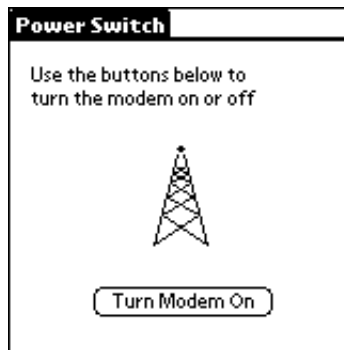

Powering On the Minstrel S


To power on the Minstrel S, start the *Power Switch* utility and tap the **Turn Modem On** button.



As soon as the Minstrel S is turned on, it will attempt to register to the Wireless IP network.

Powering Off the Minstrel S

To de-register and power off the Minstrel S, start the *Power Switch* utility and tap the **Turn Modem Off** button.





Changing the Configuration

Unless instructed to do so by your network provider or by Novatel Wireless, you will not need to change the configuration of your modem once the *Setup Wizard* has been run. In the event that you do need to change the configuration, you can either run the *Setup Wizard* utility again or directly edit the settings using the **Config** screen in the *Modem Manager* software.

Setup Wizard

The *Setup Wizard* utility will guide you step-by-step through the configuration. As before, you will be required to select the network provider. However, the saved network addresses will be displayed and you will only need to edit the specific addresses that need to be changed. For more information about the configuration process and starting *Setup Wizard*, refer to the **Setup Wizard** section of this document.


Config Screen

Using the **Config** screen, you can directly edit the configuration settings that need to be changed and then save the settings to the modem by tapping the **Save** button. For more information on the **Config** screen and changing any of the fields that it contains, refer to the section entitled **Config**.

Updating the Flash

In the future, software upgrades may be available for the Minstrel S. These upgrades will be available at our web site (www.novatelwireless.com) and will be in the form of a Minstrel S Updater .prc file.

To update the software on the flash, first install the *Minstrel S Updater* application on to your Visor as you would any other application and tap the **Applications** icon and then the **Minstrel S U** icon.

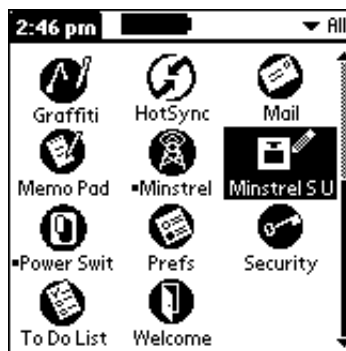

The **Minstrel S Updater** screen shows the software version of the update in the **Update:** field and the version currently installed on the Minstrel S in the **Module:** field.



To begin the software update, first ensure that the Minstrel S is inserted into the expansion slot, and then tap the **Update Now** button.


NOTE: Do not remove the Minstrel S from the Visor's expansion slot while using the *Updater* utility.



Tap **OK** when asked if you wish to continue.



The **Updating Minstrel S** screen will appear showing the progress of the software update. First, the currently installed software is erased from the flash.



Next, the updated software is written to the flash.



Once the update is complete, reset your Visor by tapping the **Reset** button when the window below appears.



NOTE: If the software currently installed on the Minstrel S is a more recent version than the update, the following message will appear when the **Update Now** button is tapped.



Tap **OK** to close the message.

Using File Mover

Since both the Visor and the Minstrel S have their own separate flash memory, the *File Mover* application has been included with the Minstrel S. This application allows you to delete items from the flash of either device or move items between the two devices.


Starting File Mover

To start this application, tap the **Applications** icon and then the **File Mover** icon.




Viewing the Contents of the Minstrel S Flash

To view the contents of the Minstrel's flash memory, start the *File Mover* application and tap the **Minstrel S** box in the top, right-hand corner of the screen.

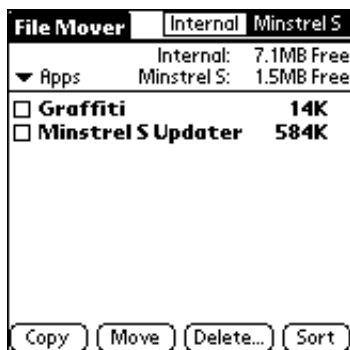



The pick list just above the list of contents controls whether applications, data, or both are displayed.

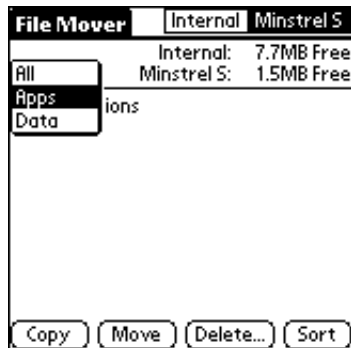

Tap the **Sort** button to change the way the memory contents are displayed.



The **Sort Options** window will open, allowing you to change the way the contents are sorted and what information is displayed using the **Sort by** and **Show** pick lists, respectively.





Moving or Copying Items to the Minstrel S

To move or copy items from the Visor's flash to the Minstrel S's flash, start *File Mover* and then tap the **Internal** box in the top, right-hand corner of the screen if it is not already selected.



Tap the check box beside the item(s) you wish to move or copy.



Once all the items to be moved or copied are checked, tap the **Move** or **Copy** button as required.



Tap **OK** when asked to confirm that you wish to either move or copy the items.



The following screen will appear, showing the status as the items are being moved or copied.



NOTE: Do not remove the Minstrel S from the Visor's expansion slot while transferring files.



Moving or Copying Items from the Minstrel S

To move data or applications from the Minstrel's flash to the Visor's flash, start the *File Mover* program and select the **Minstrel S** box in the top, right-hand corner.



Tap the check box beside the item(s) you wish to move or copy.



Once all the items to be moved or copied are checked, tap the **Move** or **Copy** button as required.



Tap **OK** when asked to confirm that you wish to either move or copy the items.



The following screen will appear, showing the status as the items are being moved or copied.



NOTE: Do not remove the Minstrel S from the Visor's expansion slot while transferring files.

Deleting Items from the Minstrel S

To delete items from the Minstrel S's flash, start the **File Mover** application and select the **Minstrel S** box in the top, right-hand corner.



Tap the check box beside the item(s) you wish to delete.



Once all the items you wish to delete are selected, tap the **Delete...** button.



Tap **OK** when asked to confirm that you wish to delete the items.



The following screen will appear, showing the status as the items are being deleted.



NOTE: Do not remove the Minstrel S from the Visor's expansion slot while deleting files.




Configuring the Button

The button found on the front of the Minstrel S can be customized to launch any application you choose when pressed. For example, you can configure this button to launch a web browsing application. Then, to access web pages, you will only need to insert your Minstrel S into the expansion slot and then press the button. Your Minstrel S will automatically register to the Wireless IP network and the web browser will be launched.


To configure the button to launch a specific application, tap the **Applications** icon and then the **Prefs** icon.



Once the **Preferences** panel is displayed, select **Buttons** from the pick list in the top, right-hand corner.



Then, tap **HotSync...**

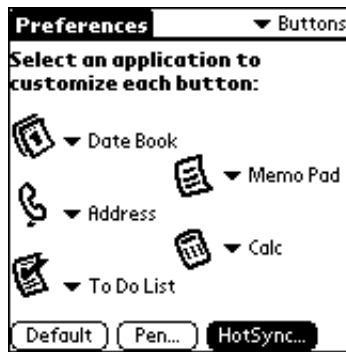

Tap to open the pick list to the right of the **Modem** icon.



Select the application you would like to have launched when the button is pressed from the list.





Once you have selected the application to launch and it is listed to the right of the **Modem** icon, tap the **OK** button.



The next time you press the button on the Minstrel S, the application you selected will automatically launch.



Setup Wizard



Introduction to Setup Wizard

Before the Minstrel S can register to the Wireless IP network and connect to the Internet, certain network properties must be configured. *Setup Wizard* is designed to guide the user step-by-step through this configuration. It includes instructions for setting the service provider and network connection properties. Once the required properties have been set, the software saves the configuration to the modem. *Setup Wizard* also helps you to configure your Visor to work with the Minstrel S.

Navigating Setup Wizard

To advance to the next step of the *Setup Wizard* utility at any time, tap the **Next>>** button, found at the bottom of the screen.



To advance to the previous step of the *Setup Wizard* utility, tap the **<<Back** button.



To exit from *Setup Wizard* without completing the configuration of your Minstrel S, tap the **Cancel** button.




If you do exit before the configuration is complete, you can re-start the *Setup Wizard* at a later date.



Starting Setup Wizard

The *Setup Wizard* utility is accessed through the *Modem Manager* software. Insert the Minstrel S into the Springboard expansion slot of your Visor to automatically start *Modem Manager*. If the Minstrel S is already inserted, tap the **Applications** icon and then the **Minstrel** icon to start *Modem Manager*.

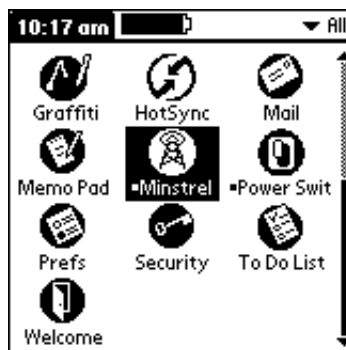

Once the **Minstrel** screen appears, select **Setup Wizard** from the **Minstrel** menu.





The following screen will appear when *Setup Wizard* has been started, giving information on the steps to be completed during the setup process.



To start with the first step in the configuration, tap the **Next>>** button.



Network Provider

In order to send and receive information across the Internet using your Minstrel S, an account with a Wireless IP network provider is required. The **Network Provider** screen contains a single pick list for you to select the network provider you would like to use.



Network Provider

Please select a Network Provider from the list:

▼ Wireless Provider

Choose 'Other' if you do not know your provider. Check www.novatelwireless.com for more information on Network Providers.

Cancel << Back Next >>

For information on service availability, contact a network provider in your area. To enter the network provider you have chosen, click on the pick list to view the entries.



Network Provider

Please select a Network Provider from the list:

▼ Wireless Provider

Choose 'Other' if you do not know your provider. Check www.novatelwireless.com for more information on Network Providers.

Cancel << Back Next >>

A list of available network providers opens.



Network Provider

Please select a Network Provider from the list:

AtlTel (505-326-0365)
Ameritech (888-907-DATA)
AT&T (888-328-2288)
Bell Atlantic (800-308-DATA)
BCTel (888-494-4422)
GoAmerica (888-462-4600)

information on Network Providers.

Cancel << Back Next >>

To display the bottom half of the list, tap the downward-pointing arrow or press the bottom scroll button.



Network Provider

Please select a Network Provider from the list:

- AllTel (505-326-0365)
- Ameritech (888-907-DATA)
- AT&T (888-328-2288)
- Bell Atlantic (800-308-DATA)
- BCTel (888-494-4422)
- GoAmerica (888-462-4600)

Ch... yo... ww... information on Network Providers.

Cancel << Back Next >>

Tap the name of the network provider you wish to use.



Network Provider


Please select a Network Provider from the list:

- BCTel (888-494-4422)
- GoAmerica (888-462-4600)
- GTE (800-483-8377)
- Novatel (877-784-0620)
- Telus (403-530-7413)
- Other

Ch... yo... ww... information on Network Providers.

Cancel << Back Next >>

If you would like to use a network provider not shown on the list, select **Other** and then enter the SPI of the chosen network provider on the dotted line in the **Other Entry** window.



Network Provider

Please select a Network Provider from the list:

▼ Other


Other Entry

Please enter the SPI of the Network Provider you want to use or accept 0 if you don't know the SPI.

SPI:

Done Cancel

NOTE: If you do not know the SPI of the network provider, enter 0.

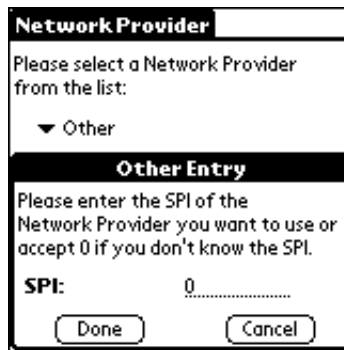

Network Provider

Please select a Network Provider from the list:

▼ Other


Other Entry

Please enter the SPI of the Network Provider you want to use or accept 0 if you don't know the SPI.

SPI: 0

Done Cancel

After you have entered the SPI, tap the **Done** button.



Network Provider

Please select a Network Provider from the list:

▼ Other

Other Entry

Please enter the SPI of the Network Provider you want to use or accept 0 if you don't know the SPI.

SPI: 0

Done Cancel

Once the correct network provider appears on the **Network Provider** screen, tap **Next>>** to advance to the next step.



Network Provider

Please select a Network Provider from the list:


▼ Novatel (877-784-0620)

Choose 'Other' if you do not know your provider. Check www.novatelwireless.com for more information on Network Providers.


Cancel << Back Next >>

Configure Palm Device

In order for your Visor to communicate properly with your Minstrel S, certain *Network Preferences* settings must be configured. The **Configure Palm Device** screen allows you to easily configure these settings.



To set the *Network Preferences* to the default values for the Minstrel S, tap the **Configure Preferences** button.





Once the *Network Preferences* have been set to their default values for the Minstrel S, the screen will show that the configuration is complete. Tap the **Next>>** button to advance to the next step in the setup.



If you do not wish to change your *Network Preferences* from their current settings, tap the **Next>>** button to advance to the next step in the Minstrel S setup.



If the modem is not already powered on, it will be powered on when **Next>>** is tapped so that the *Setup Wizard* can retrieve the current configuration settings from the modem to display in the next step.

For more information on the *Network Preferences*, consult your Visor documentation.



Contact a Provider

The next step in setting up your Minstrel S is contacting your chosen network provider to set up a Wireless IP service account. The network provider you selected previously and the EID of your Minstrel S are shown on the **Contact a Provider** screen.

A screenshot of the "Contact a Provider" screen from the Minstrel S Setup Wizard. The screen has a black header with the title "Contact a Provider" in white. The main text area is white with black text. It reads: "Please contact your Network Provider now to sign up for service. You will need to provide some personal information and your modem EID address shown below:" followed by "EID: 00.60.D6.05.02.28" and "NP: Novatel (877-784-0620)". Below this, it says: "You may proceed when the provider has given you an 'IP address' and two 'DNS Addresses'". At the bottom, there are three buttons: "Cancel", "<< Back", and "Next >>".

Contact a Provider

Please contact your Network Provider now to sign up for service. You will need to provide some personal information and your modem EID address shown below:

EID: 00.60.D6.05.02.28
NP: Novatel (877-784-0620)

You may proceed when the provider has given you an 'IP address' and two 'DNS Addresses'.

Cancel << Back Next >>

To set up a Wireless IP service account, contact the provider you have chosen using the phone number shown after the provider's name in the **NP:** field. Record the EID of your Minstrel S as you will have to provide the EID to the network provider when setting up the account.

Once your provider has given you an IP address and DNS addresses, you can advance to the next step by tapping the **Next>>** button.

A screenshot of the "Contact a Provider" screen, identical to the one above. In this version, the "Next >>" button is highlighted with a black background and white text, indicating it is the recommended action to take next.

Contact a Provider

Please contact your Network Provider now to sign up for service. You will need to provide some personal information and your modem EID address shown below:

EID: 00.60.D6.05.02.28
NP: Novatel (877-784-0620)

You may proceed when the provider has given you an 'IP address' and two 'DNS Addresses'.

Cancel << Back Next >>



If you wish to change the network provider, tap the **<<Back** button until you reach the **Network Provider** screen and then select another provider as explained in the section entitled **Network Provider**.





Settings

In order to configure your Minstrel S, you must enter the network addresses supplied by your network provider in the **Settings** screen.

Settings

Please enter the 'IP Address', 'Primary DNS Address' and 'Secondary DNS Address' given you by the carrier.

IP Address: 255 . 255 . 110 . 16...

Primary DNS: 255 . 254 . 109 . 15...

Secondary DNS: 255 . 254 . 109 . 14...

Cancel << Back Next >>

To enter the IP address, tap to select the first segment of the **IP Address:** field.

Settings

Please enter the 'IP Address', 'Primary DNS Address' and 'Secondary DNS Address' given you by the carrier.

IP Address: **255** . 255 . 110 . 16...

Primary DNS: 255 . 254 . 109 . 15...

Secondary DNS: 255 . 254 . 109 . 14...

Cancel << Back Next >>

Delete the selected text and enter in the first segment of the IP address as given to you by your network provider.

Settings

Please enter the 'IP Address', 'Primary DNS Address' and 'Secondary DNS Address' given you by the carrier.

IP Address: 171 . 255 . 110 . 16...

Primary DNS: 255 . 254 . 109 . 15...

Secondary DNS: 255 . 254 . 109 . 14...

Cancel << Back Next >>



Repeat this for the second, third, and fourth segments of the **IP Address:** field.

Enter the primary and secondary DNS addresses in the same way in the **Primary DNS:** and **Secondary DNS:** fields, respectively

Once the network addresses have been entered correctly, tap the **Next>>** button to advance to the next step.

A screenshot of a mobile application's 'Settings' screen. The screen has a white background with a black border. At the top, the word 'Settings' is in a bold, black font. Below it, a paragraph of text reads: 'Please enter the 'IP Address', 'Primary DNS Address' and 'Secondary DNS Address' given you by the carrier.' There are three input fields, each with a label and a text box. The first is 'IP Address:' followed by a text box containing '178 . 24 . 112 . 90'. The second is 'Primary DNS:' followed by a text box containing '178 . 14 . 162 . 72'. The third is 'Secondary DNS:' followed by a text box containing '178 . 14 . 162 . 75'. At the bottom of the screen, there are three buttons: 'Cancel', '<< Back', and 'Next >>'. The 'Next >>' button is highlighted with a black background and white text.



Confirm Settings

The **Confirm Settings** screen shows the network addresses entered in the previous step.

A screenshot of the "Confirm Settings" screen. It has a title bar "Confirm Settings" and a text area that says "Please confirm what you previously entered. Select 'Next' if the information is correct, or 'Back' if incorrect." Below this, it lists three items: "IP Address: 178.24.112.90", "Primary DNS: 178.14.162.72", and "Secondary DNS: 178.14.162.75". At the bottom are three buttons: "Cancel", "<< Back", and "Next >>".

Confirm Settings	
Please confirm what you previously entered. Select 'Next' if the information is correct, or 'Back' if incorrect.	
IP Address:	178.24.112.90
Primary DNS:	178.14.162.72
Secondary DNS:	178.14.162.75
Cancel << Back Next >>	

If the addresses are incorrect, tap **<<Back** to change the addresses.

A screenshot of the "Confirm Settings" screen, identical to the previous one, but with the "<< Back" button highlighted in black, indicating it is the recommended action.

Confirm Settings	
Please confirm what you previously entered. Select 'Next' if the information is correct, or 'Back' if incorrect.	
IP Address:	178.24.112.90
Primary DNS:	178.14.162.72
Secondary DNS:	178.14.162.75
Cancel << Back Next >>	

If the addresses shown are correct, tap **Next>>**.

A screenshot of the "Confirm Settings" screen, identical to the previous ones, but with the "Next >>" button highlighted in black, indicating it is the recommended action.

Confirm Settings	
Please confirm what you previously entered. Select 'Next' if the information is correct, or 'Back' if incorrect.	
IP Address:	178.24.112.90
Primary DNS:	178.14.162.72
Secondary DNS:	178.14.162.75
Cancel << Back Next >>	



The software will save the settings and power down the modem before moving on to the next step.





Auto Config

The **Auto Config** screen confirms that your Minstrel S has been configured.



The next step in configuration is testing the network registration. Because it may take some time for your network provider to activate your Wireless IP account, you may need to wait before advancing to the next step. Your network provider will tell you how long it will take when you set up your account. If you know your account has already been activated, tap the **Don't Wait** button to move to the next step.






If it will take some time to activate your account, wait the specified time and then tap the **Next>>** button to advance.



Check Network

The **Check Network** screen contains three check boxes which indicate the status as the network registration is tested.



The **Check Network** screen displays the following text and controls:

- Title bar: **Check Network**
- Status text: Waiting for your Minstrel to register with the network....
- Checkboxes:
 - Cellular Signal Present ☐
 - CDPD Service Detected ☐
 - Modem Ready²Registered ☐
- Buttons: Cancel, << Back, Next >>

When you first advance to this step, the modem will attempt to connect to the Wireless IP network, showing the progression of the connection in the **Service Connection Progress** window at the bottom of the screen.



The **Check Network** screen displays the following text and controls:

- Title bar: **Check Network**
- Status text: Waiting for your Minstrel to register with the network....
- Service Connection Progress window:
 - Title bar: **Service Connection Progress**
 - Icon: A small icon representing a document or screen.
 - Text: **Signing on**
 - Button: Cancel



When all three of the check boxes are checked, the modem has successfully registered to the network.

A screenshot of the "Check Network" dialog box. The title bar is black with "Check Network" in white. The main text says "Waiting for your Minstrel to register with the network....". Below this, there are three items, each with a checked checkbox: "Cellular Signal Present", "CDPD Service Detected", and "Modem Ready²Registered". At the bottom, there are three buttons: "Cancel", "<< Back", and "Next >>".

Check Network	
Waiting for your Minstrel to register with the network....	
Cellular Signal Present	☒
CDPD Service Detected	☒
Modem Ready²Registered	☒
Cancel << Back Next >>	

Once the modem has registered, tap **Next>>** to advance to the next step.

A screenshot of the "Check Network" dialog box, identical to the previous one, but with the "Next >>" button highlighted in black with white text.

Check Network	
Waiting for your Minstrel to register with the network....	
Cellular Signal Present	☒
CDPD Service Detected	☒
Modem Ready²Registered	☒
Cancel << Back Next >>	

If the modem is not able to register, you may need to contact your network provider to verify the addresses you entered and that your account is active. If you need to change any of the settings entered previously, tap the **<<Back** button.

A screenshot of the "Check Network" dialog box. The title bar is black with "Check Network" in white. The main text says "Waiting for your Minstrel to register with the network....". Below this, there are three items: "Cellular Signal Present" with a checked checkbox, "CDPD Service Detected" with an unchecked checkbox, and "Modem Ready²Registered" with an unchecked checkbox. At the bottom, there are three buttons: "Cancel", "<< Back", and "Next >>".

Check Network	
Waiting for your Minstrel to register with the network....	
Cellular Signal Present	☒
CDPD Service Detected	☐
Modem Ready²Registered	☐
Cancel << Back Next >>	



Successful

The **Successful** screen confirms that your Minstrel S has been successfully configured and provides information about third party applications.



Tap **Done** to close the *Setup Wizard* utility and return to *Modem Manager*, where the modem will register to the network.





Modem Manager



Introduction to Modem Manager

The *Modem Manager* software provides you with control over the connection to the Wireless IP network and status information about the Minstrel S.

Navigating Modem Manager

The **Minstrel** screen is the main interface used in the *Modem Manager* software. Tapping the **Menu** icon when you are in this screen opens the *Modem Manager* menu bar.



As described in the sections below, this menu bar provides access to the various features of the *Modem Manager* software, including detailed status information and commands for controlling the operation of the modem.

Minstrel Menu

The **Minstrel** menu includes commands used for controlling the network connection and configuring the modem.






The table below lists the commands that can be found in the **Minstrel** menu and the action that occurs when the command is selected.

<i>Command</i>	<i>Action</i>
Disconnect	The active PPP session is closed. If the <i>Auto Power Off</i> feature is disabled, the modem will stay registered to the Wireless IP network.
Shutdown	The modem de-registers from the Wireless IP network and powers off, closing any active PPP sessions.
Reconnect	The modem attempts to re-establish a connection to the Wireless IP network.
Network Prefs	The Network Preferences panel of the Palm OS is opened.
Setup Wizard	The <i>Setup Wizard</i> utility is started.

Advanced Menu

The **Advanced** menu provides access to more advanced features and controls for the Minstrel S.





The table below lists the commands that can be found in the **Advanced** menu and the action that occurs when the command is selected.

Command	Action
Config	The Config screen is opened.
Status	The Advanced Status screen is opened.
Push Config	The Push Message Configuration screen is opened.
Terminal	The Terminal screen is opened.
Ping	The Ping screen is opened.

Help Menu

The **Help** menu provides access to information about the software and hardware versions of your Minstrel S.



The table below lists the commands that can be found in the **Help** menu and the action that occurs when the command is selected.


Command	Action
Modem Info	A window containing information about the Minstrel S modem, including the EID and hardware and firmware version number, is displayed.
About	A window containing information about the <i>Modem Manager</i> software, including the software version number, is displayed.



Starting Modem Manager

If your Minstrel S is not inserted into the Visor's Springboard expansion slot, simply insert the Minstrel S and the *Modem Manager* software will start, automatically connecting you to the Wireless IP network.

If your Minstrel S is already attached to the Visor, tap the **Applications** icon and then the **Minstrel** icon to start *Modem Manager*.

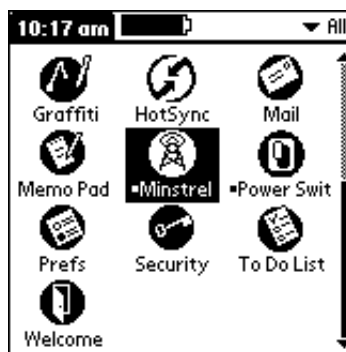

The following screen will appear briefly when *Modem Manager* launches.



The *Modem Manager* software will begin establishing a connection to a Wireless IP network provider by initializing the modem.



Then, the modem will attempt to find an available Wireless IP network provider.




Once the modem finds a Wireless IP provider, information is exchanged between the modem and the provider's network.





The network connection is established once the information exchange is complete.

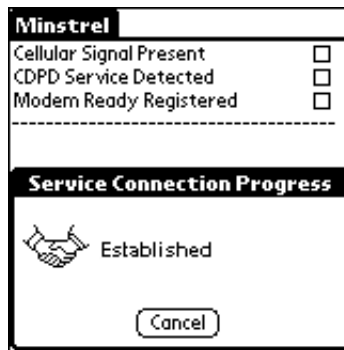

Once a connection to the network provider has been established, the **Minstrel** screen will appear, showing the status of the connection.



For more information on the **Minstrel** screen refer to the section entitled **Minstrel**.



Minstrel

The main screen of the *Modem Manager* program is labeled **Minstrel**. This screen shows basic modem and network connection status information and provides access to the other features and screens of the *Modem Manager* through a menu bar.



Fields

The fields shown in the **Minstrel** screen are listed below, along with a brief explanation of their meaning.

Field	Description
Cellular Signal Present	When this box is checked, the modem has found a cellular signal.
CDPD Service Detected	When the box is checked, it indicates the presence of Wireless IP service which the modem can use. This may not necessarily be the service provider with which you have a subscription, but shows that there is Wireless IP service available at your current location.
Modem Ready Registered	When this box is checked, the modem is connected to the Wireless IP network. Your modem is ready to send and receive data once the connection is made.
Minstrel Battery	The battery status bar shows the amount of charge left on the Minstrel's battery.
RSSI	This status bar shows the strength of the signal being received from the Wireless IP network.



<i>Field</i>	<i>Description</i>
Error Detect	When this box is checked, an error in communications with the Wireless IP network has been detected. The modem will attempt to re-establish the communication with the network.
System Busy	This box will be checked when the Wireless IP network is busy. The cause is normally too many users on the network. You may notice a decline in the performance of sending and receiving data.
Wireless Provider	When registered, this text field shows the identifier (SPI) of the Wireless IP network provider being used.
RF Channel	This text field shows the number of the Wireless IP channel which you are currently using to send and receive data. Each channel number represents a range of frequencies. If the unit is not registered or is searching for a channel, the value displayed will be either Searching A or Searching B , depending on which side of the Wireless IP network is being scanned.
Registration Error	This text field indicates whether or not an error has occurred during the attempt to register. If None is displayed, registration was successful. If a number is displayed, there was an error during registration. Each of the possible numbers, 1 through 7 , correspond to a specific registration error. To read an description of the error, tap on the text box of the Registration Error field. A window will open explaining the error.

Controls

Shutdown Button

In order to provide easy control over the network connection, there is also a **Shutdown** button at the bottom of the screen.



When this button is tapped, the modem de-registers from the Wireless IP network and powers off.

Menu Bar

By tapping the **Menu** icon, you can open the *Modem Manager* menu bar when the **Minstrel** screen is active. This menu bar provides access to various commands used to control and configure the modem.



For more information about the menu bar, refer to *Navigating Modem Manager* in the section **Introduction to Modem Manager**.



Config

The **Config** screen provides access to the configurable settings and features of the Minstrel S.

Config	
IP Address	166.132.47.12
Primary DNS	206.138.237.235
Secondary DNS	206.138.237.234
Auto Power Off	▼ Enabled
Sleep Mode	▼ Enabled
Network Provider	▼ Prefer A
SPI, SPNI, WASI	2976/0/0
Service ID Pref	▼ Any SvclD
Channel Hot List	Details
Hot List Operation	▼ Hybrid
[Defaults] [Save] [Done]	

Opening the Config Screen

To open this screen, tap the **Menu** icon when the **Minstrel** screen is open and select **Config** from the **Advanced** menu.

Minstrel	Advanced	Help
Cellular Signal	Config	✓C
CDPD Service	Status	✓T
Modem Read	Push Config	✓P
	Terminal	✓M
	Ping	✓G
Minstrel Batt		
RSSI		
Error Detect ☐	System Busy ☐	
Wireless Provider		
RF Channel		
Registration Error		
[Shutdown]		

Changing the Configuration

To change any of the configuration settings, tap on the text box or pick list for that field. For more information on each of the fields and their associated settings, refer to the **Fields** section.

Once the fields have been changed as required, tap the **Save** button to save the new settings to the Minstrel S.

NOTE: Unless instructed to do so by your service provider, you will not normally need to change any of these settings. If you wish, you can run the *Setup Wizard* program to guide you through the configuration changes.



Fields

IP Address

The **IP Address** text field shows the current IP address of your Minstrel S. This value should not be changed unless you are instructed to do so by your Wireless IP network provider.

To edit the IP address, tap the text of the **IP Address** field to open the **IP Address Entry** window. In this window, you can directly edit the IP address as you would normal text.

The screenshot shows a 'Config' window with the following settings:

IP Address	166.132.47.12
Primary DNS	206.138.237.235
Secondary DNS	206.138.237.234
Auto Power Off	▼ Enabled
Sleep Mode	▼ Enabled
Network Provider	▼ Prefer A

Below the settings is the 'IP Address Entry' dialog, which displays the current IP address '166.132.47.12' in a text field. At the bottom of the dialog are 'Done' and 'Cancel' buttons.

Primary DNS

The **Primary DNS** text field shows the current primary DNS address for your Minstrel S. This value should not be changed unless you are instructed to do so by your Wireless IP network provider.

To edit the primary DNS address, tap the text of the **Primary DNS** field to open the **Primary DNS Entry** window. In this window, you can directly edit the primary DNS address as you would normal text.

The screenshot shows the same 'Config' window as above. The 'Primary DNS Entry' dialog is now open, displaying the current primary DNS address '206.138.237.235' in a text field. At the bottom of the dialog are 'Done' and 'Cancel' buttons.



Secondary DNS

The **Secondary DNS** text field shows the current primary DNS address for your Minstrel S. This value should not be changed unless you are instructed to do so by your Wireless IP network provider.

To edit the primary DNS address, tap the text of the **Secondary DNS** field to open the **Secondary DNS Entry** window. In this window, you can directly edit the secondary DNS address as you would normal text.

The screenshot shows a 'Config' window with the following fields: IP Address (166.132.47.12), Primary DNS (206.138.237.235), Secondary DNS (206.138.237.234), Auto Power Off (Enabled), Sleep Mode (Enabled), and Network Provider (Prefer A). Below the config window is a 'Secondary DNS Entry' dialog with the text '206. 138. 237. 234' and 'Done' and 'Cancel' buttons.

Auto Power Off

The **Auto Power Off** field shows whether the *Auto Power Off* feature of the Minstrel S is enabled or disabled. If this feature is **Enabled**, any time the active PPP session is closed the modem will de-register from the network and power off. If it is **Disabled**, closing the PPP session will not cause the modem to de-register.

To change the setting for the **Auto Power Off** field, tap to open the pick list and then tap to select either **Disabled** or **Enabled** as desired.

The screenshot shows the 'Config' window with a pick list open for the 'Auto Power Off' field. The pick list shows 'Disabled' and 'Enabled' options. Other fields in the config window include IP Address (166.132.47.12), Primary DNS (206.138.237.235), Secondary DNS (206.), Sleep Mode (Enabled), Network Provider (Prefer A), SPI, SPNI, WASI (2976/0/0), Service ID Pref (Any Svcd), Channel Hot List (Details), and Hot List Operation (Hybrid). At the bottom are 'Defaults', 'Save', and 'Done' buttons.



Sleep Mode

The **Sleep Mode** field indicates whether sleep mode is disabled or enabled. If this feature is **Enabled**, when the modem is not actively sending or receiving data, it will enter a low current consumption mode called *sleep mode*. If it is **Disabled**, the modem will never enter this mode.

The screenshot shows a 'Config' window with the following settings: IP Address (166.132.47.12), Primary DNS (206.138.237.235), Secondary DNS (206.138.237.234), Auto Power Off (Disabled), Sleep Mode (Enabled), Network Provider (▼ Prefer A), SPI, SPNI, WASI (2976/0/0), Service ID Pref (▼ Any SvclD), Channel Hot List (Details), and Hot List Operation (▼ Hybrid). At the bottom are buttons for Defaults, Save, and Done.

To change the setting for the **Sleep Mode** field, tap to open the pick list and then tap to select either **Disabled** or **Enabled** as desired.

Network Provider

The **Network Provider** field indicates what side of the Wireless IP network your Minstrel S is configured to use. Each area of the Wireless IP network has an A side and a B side, with a single network provider assigned to each side. The side a network provider is assigned to may change between service areas. If the **Network Provider** field is set to **A Only**, the modem will only scan the A side of the network for usable channels. If it is set to **B Only**, only the B side will be used. Setting this field to **Prefer A** means that the modem will scan the A side first and then the B side. **Prefer B** sets the modem to scan side B and then A.

To change the setting for the **Network Provider** field, tap to open the pick list and select the new value you wish to have your modem configured with.

The screenshot shows the same 'Config' window as before, but with the Network Provider field set to 'Prefer A' in the pick list. The other settings remain the same.



SPI, SPNI, WASI

The **SPI, SPNI, WASI** field displays the current settings for the various network identifiers, separated by slashes. The first number shown is the *Service Provider Identifier*, or SPI. This number is a globally used identifier for the network provider the modem is currently using. The middle number is the *Service Provider Network Identifier*, or SPNI, which identifies the specific network region or domain you are currently in. The final number is the *Wide Area Service Identifier*, or WASI. The WASI represents a group of network providers that have agreed to provide service over a large geographic area.

To change any of these identifiers, tap the text field to open the **Service Group Entry** window. You can directly edit any of these values as you would normal text.

A screenshot of a mobile device screen showing a configuration window. The top section, titled "Config", contains fields for IP Address (166.132.47.12), Primary DNS (206.138.237.235), Secondary DNS (206.138.237.234), Auto Power Off (Enabled), and Sleep Mode (Enabled). Below this is a section titled "Service Group Entry" which contains three text input fields: SPI (2976), SPNI (0), and WASI (0). At the bottom of this section are two buttons: "Done" and "Cancel".

Config	
IP Address	166.132.47.12
Primary DNS	206.138.237.235
Secondary DNS	206.138.237.234
Auto Power Off	▼ Enabled
Sleep Mode	▼ Enabled

Service Group Entry	
SPI:	2976
SPNI:	0
WASI:	0

Done Cancel

Service ID Pref

Some network providers have set up roaming agreements, similar to that used by cellular phones, to expand their coverage areas. Therefore, you can use a different network provider than the one you have an account with if there is a roaming agreement in place. The **Service ID Pref** field controls how the modem uses your chosen network provider and other providers. If it is set to **Only SvcID**, the modem will only use the network provider entered during the initial configuration done using the *Setup Wizard* utility. **PreferSvcID** indicates that the modem will first try to register with your chosen network provider, but if it cannot, it will attempt to use another provider. Selecting **IgnoreSvcID** or **Any SvcID** tells the modem to use the first available network provider it finds.



To change the **Service ID Pref** setting, tap to open the pick list and select the setting you wish to use.

Config	
IP Address	166.132.47.12
Primary DNS	206.138.237.235
Secondary DNS	206.138.237.234
Auto Power Off	▼ Enabled
Sleep Mode	▼ Enabled
Network Provider	▼ Prefer A
SPI, SPNI, WASI	Only SvcID
Service ID Pref	Prefer SvcID
Channel Hot List	Ignore SvcID
Hot List Operation	Any SvcID
[Defaults] [Save] [Done]	

Channel Hot List

The **Channel Hot List** field contains a list of your most commonly used channels. A channel is a range of frequencies used for sending and receiving data that is represented by a number. How this list is used is determined by the setting of the **Hot List Operation** field.

This list is automatically updated by information provided by the Wireless IP network, but if you wish to change the channels in the **Channel Hot List** field, tap the **Details** box to open the **Channel Hot List** window where you can directly edit the list.

Config	
IP Address	166.132.47.12
Channel Hot List	
683,685,670,736,729,719,738,	
732,733,722,728,684,668,676,	
777,783,781,786,788,745,792,	
794,780,782,735,787,775,770,	
796,731,725,991	
[Done] [Cancel]	

Hot List Operation

The **Hot List Operation** field indicates how the channels in the **Channel Hot List** are used. If **Scan All** is selected, all available channels will be scanned. If **Use List** is selected, only the channels in the **Channel Hot List** will be used. When this field is set to **Hybrid**, first the channels in the **Channel Hot List** will be scanned. If no usable channels are found, the modem will scan all the other channels.



To change the **Hot List Operation** field, tap to open the pick list and select the setting you wish to use.

The screenshot shows a 'Config' window with the following settings:

IP Address	166.132.47.12
Primary DNS	206.138.237.235
Secondary DNS	206.138.237.234
Auto Power Off	▼ Enabled
Sleep Mode	▼ Enabled
Network Provider	▼ Prefer A
SPI, SPNI, WASI	2976/0/0
Service ID Pref	▼ Scan All
Channel Hot List	▼ Use List
Hot List Operation	▼ Hybrid

At the bottom are three buttons: Defaults, Save, and Done.

Controls

Defaults Button

Tap the **Defaults** button to change the settings shown in the **Config** screen back to their factory defaults.

This screenshot is identical to the previous one, but the 'Defaults' button at the bottom left is highlighted with a thick black border, indicating it is the active control.

NOTE: Using this button will change fields that are vital to maintaining registration, including the network addresses. If you use this feature, you will need to completely re-configure your modem using *Setup Wizard* before you can register to the Wireless IP network again. If you do tap this button accidentally, tap **Done** to close the window without saving the changes.



Save Button

Tap the **Save** button to save any changes you have made to the settings. The settings will be saved and the modem will power off and then on again to ensure the changes take effect.

A screenshot of the "Config" screen in the Modem Manager. The screen lists various settings: IP Address (166.132.47.12), Primary DNS (206.138.237.235), Secondary DNS (206.138.237.234), Auto Power Off (Enabled), Sleep Mode (Enabled), Network Provider (Prefer A), SPI, SPNI, WASI (2976/0/0), Service ID Pref (Any SvclD), Channel Hot List (Details), and Hot List Operation (Hybrid). At the bottom, there are three buttons: "Defaults", "Save", and "Done". The "Save" button is highlighted with a black background and white text.

Done Button

Tap the **Done** button to close the **Config** screen without saving any changes you have made to the settings.

A screenshot of the "Config" screen in the Modem Manager, identical to the one above. However, in this version, the "Done" button at the bottom is highlighted with a black background and white text, while the "Save" button is not.



Detailed Status

The **Detailed Status** screen shows more detailed status information about the network connection and the modem.

Detailed Status			
CDPD	ACQ'D	Side	A Side
RSSI	-70dBm	PL	6
Color	1	SPI	25
Chan	991	WASI	50
CellID	26	SPNI	999
FBLER	0%	PwrPrd	25
RBLER	No TX	BattLvl	3.92V
TEI 512009			
RegErr 0			
Link Locked			
IP 166.132.47.12			
EID 00.60.D6.07.16.FA			
Done			

Opening the Detailed Status Screen

To access this screen, tap the **Menu** icon when the **Minstrel** screen is open and select **Status** from the **Advanced** menu.

Minstrel	Advanced	Help
Cellular Signal	Config	✓C
CDPD Service	Status	✓T
Modem Read	Push Config	✓P
	Terminal	✓M
Minstrel Batt	Ping	✓G
RSSI		
Error Detect ☐	System Busy ☐	
Wireless Provider		
RF Channel		
Registration Error		
Shutdown		



Fields

The fields shown on this screen are listed in the table below along with an explanation of the value displayed.

Field	Description
CDPD	This text field indicates the status of communications between the modem and the Wireless IP or CDPD network. This field will show SEARCH when the modem is searching for an available network connection and ACQ'D when the modem has acquired a connection.
RSSI	This text field shows the strength of the signal currently being received in dBm.
Color	This field displays the color code of the service area you are currently in. Color codes are used by the Wireless IP network to coordinate channel usage and interference.
Chan	This field shows the Wireless IP channel being used for sending and receiving data. Each channel number represents a range of frequencies.
CellID	This field displays the identifier for the Wireless IP base station that the Minstrel is currently using.
FBLER	This field represents the rate of errors in data transmission from the Wireless IP network to your Minstrel S as a percentage of the data transferred.
RBLER	This field represents the rate of errors in data transmission from your Minstrel S to the Wireless IP network as a percentage of the data transferred.
Side	This field shows which side of the Wireless IP network is being used or scanned. Each area of the network has an A side and a B side, with a single network provider assigned to a side.
PL	This field will display an number between 2 and 7 . These numbers indicate the current power level your Minstrel S is transmitting at, with 2 being the highest power level and 7 being the lowest.
SPI	The SPI field shows an identifier for the network provider the Minstrel is currently registered to called the <i>Service Provider Identifier</i> . This number is used globally for each specific network provider.
WASI	The WASI, or <i>Wide Area Service Identifier</i> , field displays the unique identifier used for a group of network providers that have agreed to provide service over a large geographic area.



Field	Description
SPNI	This field shows the <i>Service Provider Network Identifier</i> , which is used to identify a specific network region or domain for a service provider.
PwrPrd	The value shown in this field is sent by the Wireless IP network to indicate the power the modem should transmit at.
BattLvl	The number shown for this field is the current voltage of the internal Lithium-Ion battery, which indicates the amount of charge left in the battery. The maximum battery voltage is approximately 4.2 V. If the battery voltage goes lower than about 3.0 V, the modem will automatically power off to maintain. The battery status indicator LED will start flashing red before this point.
TEI	This field indicates the <i>Temporary Equipment Identifier</i> that has been assigned to your Minstrel S by the Wireless IP network. As you move into different service areas, the TEI will change.
RegErr	This field will show a number between 0 and 7 indicating any errors in the registration process. Each number represents a specific error, with 0 indicating no registration error.
Link	This field indicates the current status of communications with the Wireless IP network. It will show Locked when the unit has synchronized to a channel and completed registration. Searching will be displayed if the modem is still searching for the Wireless IP network in the area.
IP	This field displays the IP address for your Minstrel S.
EID	This field displays the Equipment Identifier (EID) of your Minstrel S. The EID is a unique number assigned to your modem by the manufacturer.



Controls

Done Button


Tap the **Done** button to close the **Detailed Status** screen and return to the **Minstrel** screen.

Detailed Status			
CDPD	ACQ'D	Side	A Side
RSSI	-70dBm	PL	6
Color	1	SPI	25
Chan	991	WASI	50
CellID	26	SPNI	999
FBLER	0%	PwrPrd	25
RBLER	No TX	BattLvl	3.92V
TEI	512009		
RegErr	0		
Link	Locked		
IP	166.132.47.12		
EID	00.60.D6.07.16.FA		
Done			



Push Message Configuration

The **Push Message Configuration** screen allows you to enable or disable the push message feature of the Minstrel S.



Push messaging allows you to receive notification of messages even when a PPP session is not active.

Opening the Push Message Configuration Screen


To access this screen, tap the **Menu** icon when the main **Minstrel** screen is open and select **Push Config** from the **Advanced** menu.






Controls

To enable push messaging, tap the **Enabled** box.

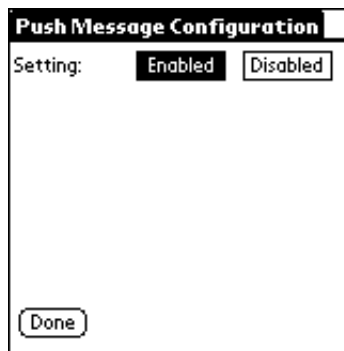


To disable push messaging, tap the **Disabled** box.

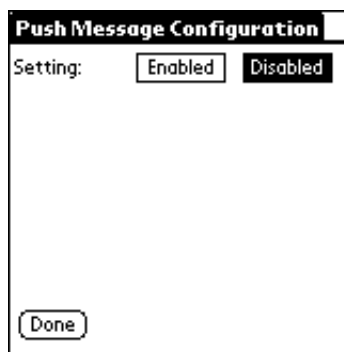

The new setting will automatically be saved to the modem as soon as the box is tapped. In order to save the settings, the modem must power off and then power on again.




To close the **Push Message Configuration** screen and return to the **Minstrel** screen, tap the **Done** button.





Terminal

The **Terminal** screen provides an internal terminal emulator for communication with the Minstrel S, allowing you to further customize the operation of your Minstrel using the AT command set. AT commands are commands used to control various types of modems. Wireless IP modems have their own set of AT commands, which contains some of the commands used by wireline modems but also includes commands specific to Wireless IP modems.



Opening the Terminal Screen

To access this screen, tap the **Menu** icon when the **Minstrel** screen is active and select **Terminal** from the **Advanced** menu.






Controls


OnLine Button

Tap the **OnLine** button to open communications with the Minstrel S.




OffLine Button

Tap the **OffLine** button to close communications between the terminal emulator and the Minstrel S.

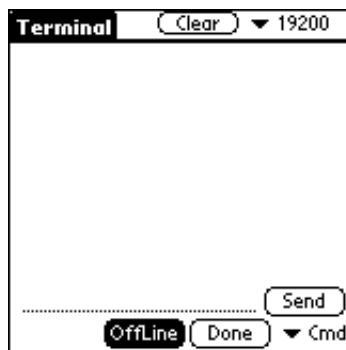


Cmd Pick List

In the bottom, right-hand corner of the **Terminal** screen there is a pick list labeled **Cmd**. This pick list contains some of the more common AT commands. To send one of these commands, simply tap to open the pick list and tap to select the command. It will automatically be sent to the Minstrel S.



Command Entry Line

At the bottom of the **Terminal** screen, right above the **OnLine**, **OffLine**, and **Done** buttons, there is a dotted line. By tapping on this line, you can make a cursor appear which allows you to enter any text you wish to send to the Minstrel S.

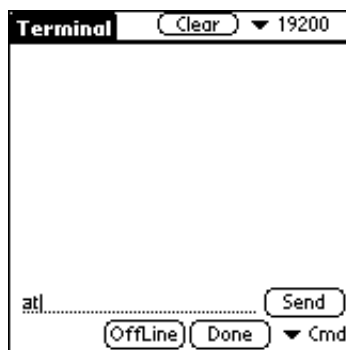


When entering commands this way, you must tap **Send** to send the command to the Minstrel, as it will not be sent automatically.




Send Button

Tap the **Send** button to send any commands entered on the **Command Entry Line** to the Minstrel S.



Clear Button


Tap the **Clear** button to clear any text from the text display area.






Baud Rate Pick List

In the top corner of the **Terminal** screen, there is a pick list that allows you to select the baud rate to be used between the Minstrel S and the terminal emulator. The Minstrel S is set to communicate at 19200 bps.




Done Button

Tap the **Done** button to close the **Terminal** and go back to the **Minstrel** screen.



Ping

The **Ping** screen enables you to *ping* another IP address to see if it is accessible.



Ping

Please enter the IP address and size of PING that you wish to send. The size of PING must be less than 100 bytes. Press SEND when all information is entered.

IP: ' ' '

Size: **Send**

Done

Opening the Ping Screen

To open this screen, tap the **Menu** icon when the Minstrel screen is open and select **Ping** from the **Advanced** menu.



Minstrel	Advanced	Help
Cellular Signal	Config	✓C
CDPD Service	Status	✓T
Modem Read	Push Config	✓P
-----	Terminal	✓M
Minstrel Batt	Ping	✓G
RSSI		
Error Detect ☐	System Busy ☐	
Wireless Provider		
RF Channel		
Registration Error		

Shutdown



Fields

IP

This **IP:** field displays the IP address you wish to ping. Each segment of this value can be edited by tapping on the dotted line and changing the text on that line.

A screenshot of a "Ping" dialog box. It has a title bar "Ping" and a text area with instructions: "Please enter the IP address and size of PING that you wish to send. The size of PING must be less than 100 bytes. Press SEND when all information is entered." Below the text, there are two input fields: "IP:" followed by a dotted line with the number "1" entered, and "Size:" followed by a dotted line. To the right of the "Size:" field is a "Send" button. At the bottom center is a "Done" button.

Size

The **Size:** field displays the size of the packet you wish to send to the chosen IP address. This value can be edited by tapping on the dotted line and changing the text on that line.

A screenshot of a "Ping" dialog box, similar to the one above. It has a title bar "Ping" and the same instructions. The "IP:" field now shows "123 . 207 . 55 . 109". The "Size:" field shows "2" followed by a dotted line. The "Send" and "Done" buttons are still present.

Status

The status of the ping will be shown below the **Size:** field.



Controls

Send Button

Once the IP address and size are entered, tap the **Send** button to *ping* the address.

A screenshot of the "Ping" screen. The title bar is black with "Ping" in white. The main text area contains instructions: "Please enter the IP address and size of PING that you wish to send. The size of PING must be less than 100 bytes. Press SEND when all information is entered." Below this, the "IP:" field is filled with "123. 207. 55. 109" and the "Size:" field is filled with "2". To the right of the "Size:" field is a black "Send" button. At the bottom center is a white "Done" button with a black border.

Done Button

Tap the **Done** button to close the **Ping** screen and return to the **Minstrel** screen.

A screenshot of the "Ping" screen, identical in layout to the previous one. The title bar is black with "Ping" in white. The main text area contains the same instructions. Below this, the "IP:" field is empty, showing four dots for each octet, and the "Size:" field is empty, showing a line of dots. To the right of the "Size:" field is a white "Send" button with a black border. At the bottom center is a black "Done" button with white text.



Glossary



Glossary A-H

AT commands

AT commands are commands used to control a modem. Wireless IP modems have their own set of AT command. This set of commands contains some of the commands used by wireline modems but also includes commands specific to Wireless IP modems.

auto power off

Auto power off is a feature of the Minstrel S that, when enabled, will cause the modem to de-register and power off whenever the active PPP session is closed.

CDPD

CDPD, or Cellular Digital Packet Data, is a Wireless IP technology developed for use on cellular phone frequencies. CDPD uses unused cellular channels to transmit data in packets. To send and receive data across the Internet, the Minstrel S must first register to the CDPD network.

channel

The range of Wireless IP frequencies used to transmit and receive data is broken up into channels, which act as individual paths for communication. Each of these channels is assigned a number.

de-registration

De-registration involves disconnecting and closing the communication path being used on the CDPD network. When the modem is de-registered, it can no longer send or receive data across the network.

Equipment Identifier (EID)

Every wireless IP modem manufactured has a unique serial number associated with it, which is referred to as the Equipment Identifier or EID. Each EID consists of six sets of two hexadecimal numbers that are often separated by a period ("."), as in the sample EID **00.60.D6.04.BC.FE**.

flash memory

Flash memory is a type of memory that is easily updatable and retains its contents when power is removed. The Minstrel S has its own flash memory which holds the Minstrel's software and has room to hold other applications and data. The *File Mover* utility can be used to move or copy items to the Minstrel's flash. The *Minstrel S Updater* utility writes updates to the Minstrel software to the flash.

hot list

The Minstrel S keeps a list of most recently used channels called the *hot list*. When the Minstrel S attempts to register, it will use this list as dictated by the **Hot List Operation** field in the **Config** screen.



Glossary I-R

IP address

As with personal computers that access the Internet, modems using CDPD technology also have a static Internet Protocol (IP) address, which is used to identify the node or access point for the modem on the Internet. The network provider assigns this IP address.

Network Preferences panel

The Network Preferences panel is part of the Palm OS and contains information regarding how the Visor communicates with other devices, including the Minstrel S. These preferences can be configured for the Minstrel S using the *Setup Wizard* utility.

network provider

The Minstrel S modem works with the Wireless IP network. To access the Internet using this network, an account with a network provider must be set up. For information on availability and rates, contact a network provider in the area.

ping

Ping stands for Packet Internet Groper and is a utility that is used to determine if a specific IP address is accessible. It works by sending a packet of data to the IP address in question and waits for a reply to.

PPP session

PPP, or Point-to-Point Protocol, is a method of connecting a device to the Internet. In order for the Minstrel S to send and receive information across the Internet, a PPP session must first be established. A session is automatically opened when the modem registers to the network.

primary DNS address

As with personal computers that access the Internet, modems using CDPD technology must also have access to a Domain Name Server (DNS). The DNS translates Universal Resource Locators (URLs) such as World Wide Web addresses or domain names into IP addresses and is shared by multiple devices. In order to get the translated IP addresses, the modem will try to connect to the server with the primary DNS address. If the modem cannot connect to this address, it will try to connect using the secondary DNS address.

push messaging

Push messaging is a technology that allows you to receive notification of a waiting message through the Wireless IP network without having a PPP session open. Auto power off mode must be disabled for this feature to work.

registration

In order to send and receive data across the Internet, a CDPD modem must first register to the CDPD network. This involves selection of an appropriate channel to use and interaction with various systems in the CDPD network to set up a path for communication.



Glossary S-V

scanning

The Minstrel S will look for the best cellular channel to use for data transmission by scanning through the channels. This involves measuring the signal strength of various channels to determine which is the strongest and, therefore, most reliable.

secondary DNS address

As with personal computers that access the Internet, modems using CDPD technology must also have access to a Domain Name Server (DNS). The DNS translates Universal Resource Locators (URLs) such as World Wide Web addresses or domain names into IP addresses and is shared by multiple devices. If the modem cannot connect to the DNS using the primary address, it will try to connect using the secondary DNS address.

segment

Each network address consists of four numeric segments, which are divided by a period (".").

side

Each Wireless IP service area is divided into two sides, which are labeled **A** and **B**. A single carrier or service provider is assigned to each side. How these sides are used is dictated by the setting of the **Network Provider** field in the **Config** screen. Note that the side associated with a selected service provider may change with the service area.

sleep mode

The Minstrel S can be configured to automatically enter sleep mode when the modem is not actively transmitting or receiving data. In this mode, the modem will consume very little power, thus extending the host device's battery life.

SPI

The SPI is an identifier for a Wireless IP network provider and is called the *Service Provider Identifier*. This number is used globally for each specific network provider.

SPNI

The SPNI is the *Service Provider Network Identifier*, which is used to identify a specific network region or domain for a Wireless IP network provider.

TEI

A TEI is a Temporary Equipment Identifier and is assigned to your Minstrel S by the Wireless IP network upon registration. The TEI changes as you move into different service areas.

terminal emulator

A terminal emulator allows you to communicate with a device directly. The **Terminal** screen provides this functionality.



Glossary W-Z

WASI

The WASI, or Wide Area Service Identifier, is a unique identifier for a group of network providers that have agreed to provide service over a large geographic area comprising of many SPNIs.

Wireless IP

Wireless IP is a group of wireless protocols used to access the Internet. CDPD, which is used by the Minstrel S, is one of the protocols.



Index



Index A-Co

A

About command 60
AC adapter 11
account
 activation time 52
 Wireless IP 14
Advanced menu 59
AT commands, definition 91
Auto Config screen 52
auto power off 18, 59
 definition 91
Auto Power Off field 69

B

battery 11
 level 77
battery LED 9
BattLvl field 77
baud rate 86
button 7
 configuring 34

C

CDPD, definition 91
CDPD field 76
CDPD Service Detected field 64
CellID field 76
Cellular Signal Present field 64
Chan field 76
changing the
 channels in the Hot List 72
 configuration 22, 67
 IP address 68
 primary DNS address 68
 secondary DNS address 69
 SPI 71
 SPNI 71
 WASI 71
 way the channel hot list is used 72
Channel Hot List field 72
channel, definition 91
charging the battery 11
Check Network screen 54
closing the PPP session 18
Color field 76
Config command 60



Index Co - Em

- Config* screen 22, 67
 - Defaults* button 73
 - Done* button 74
 - opening 67
 - Save* button 74
- configuration
 - changing 22, 67
 - successful 56
- configuring the
 - button 34
 - Minstrel 14
 - Visor 44
- confirming settings 50
- connecting the Minstrel to the Visor 13
- connecting to the
 - Internet 15
 - network 17
- contacting a network provider 46
- copying items
 - from the Minstrel S 30
 - to the Minstrel S 28
- customer support 5

D

- data LED 8
- DC jack 7, 11
- deleting items from the Minstrel S 32
- de-registering 17, 21
 - definition 91
- Detailed Status* screen 75
 - Done* button 78
- disabling
 - auto power off 69
 - push messaging 80
 - sleep mode 70
- Disconnect* command 59
- disconnecting from the network 17
- DNS addresses 48, 50
 - definition 92

E

- EID 60
 - definition 91
- EID* field 77

Index En-Ld

enabling
 auto power off 69
 push messaging 80
 sleep mode 70
entering commands manually 84
entering network addresses 48
Error Detect field 65
errors in registration 65
exiting *Setup Wizard* 38

F

*FBLE*R field 76
File Mover 26
 starting 26
flash memory 23, 26
 copying items 28, 30
 definition 91
 deleting items 32
 moving items 28, 30
 viewing contents 26

G

getting started 4

H

Help menu 60
Hot List Operation field 72
hot list, definition 91
HotSync button 35

I

inserting the Minstrel 13
installing the software 12
Internet 15
introduction to
 Modem Manager 58
 Setup Wizard 38
IP address 48, 50
 definition 92
IP Address field 68
IP field 77, 88

L

launching applications with the button 34

Index Le-Ou

LEDs 8
Link field 77

M

managing the network connection 17
menu bar 58, 66
message waiting LED 8
Minstrel Battery field 64
Minstrel menu 58
Minstrel S Updater 23
Minstrel screen 58, 64
Modem Info command 60
Modem Manager 10, 15, 39, 57
 introduction 58
 navigating 58
 starting 61
modem overview 7
Modem Ready Registered field 64
moving items
 from the *Minstrel S* 30
 to the *Minstrel S* 28

N

navigating
 Modem Manager 58
 Setup Wizard 38
network connection 17
Network Preferences panel 59
 definition 92
Network Prefs command 59
network provider 41, 52
 contacting 46
 definition 92
 selecting 41
Network Provider field 70
network registration, checking 54

O

opening the
 Config screen 67
 Detailed Status screen 75
 Ping screen 87
 Push Message Configuration screen 79
 Terminal screen 82



Index Ov-R

overview
 modem 7
 software 10

P

Ping screen 87
 Done button 89
 Ping command 60
 Send button 89
ping status 88
pinging 87
 definition 92
PL field 76
Power Switch 19
 starting 19
powering off the Minstrel S 21
powering on the Minstrel S 20
PPP session
 closing 18, 59
 definition 92
Preferences panel 34
primary DNS address 48, 50
 definition 92
Primary DNS field 68
Push Config command 60
Push Message Configuration screen 79
 Done button 81
push messaging 79
 definition 92
PwrPrd field 77

R

RBLER field 76
Reconnect command 59
RegErr field 77
registering 17, 20
Registration Error field 65
registration
 definition 92
 testing 54
requirements 6
RF Channel field 65
roaming 71
RSSI field 64, 76

Index S-St

S

- saving changes 67
- saving the configuration 51
- scanning, definition 93
- secondary DNS address 48, 50
 - definition 93
- Secondary DNS* field 69
- segment, definition 93
- Service ID Pref* field 71
- service LED 8
- Service Provider Identifier, definition 93
- Service Provider Network Identifier, definition 93
- settings
 - confirming 50
 - entering 48
- Setup Wizard* 10, 14, 22, 37
 - exiting 38
 - introduction 38
 - navigating 38
 - starting 39, 59
- Shutdown* button 66
- Shutdown* command 59
- Side* field 76
- sides, network 70
 - definition 93
- Size* field 88
- Sleep Mode* field 70
- sleep mode, definition 93
- software
 - overview 10
 - updates 23
 - installing 12
- SPI* field 76
- SPI, definition 93
- SPI, SPNI, WASI* field 71
- SPNI* field 77
- SPNI, definition 93
- Springboard expansion slot 13
- starting
 - File Mover* 26
 - Modem Manager* 61
 - Power Switch* 19
 - Setup Wizard* 39
- Status* command 60
- status indicator LEDs 7, 8
- status of ping 88
- stub antenna 7



Index Su-Z

successful configuration 56
support 5
System Busy field 65

T

technical support 5
TEI field 77
TEI, definition 93
Terminal command 60
terminal emulator 82
 definition 93
Terminal screen 82
 Clear button 85
 Cmd pick list 84
 Done button 86
 OffLine button 83
 OnLine button 83
 Send button 85

U

updating the flash 23

V

version
 hardware 60
 software 60
Visor 6, 13
 configuring 44

W

waiting for account activation 52
WASI field 76
WASI, definition 94
welcome 5
Wide Area Service Identifier, definition 94
wireless IP service 6
Wireless IP, definition 94
Wireless Provider field 65
working with the Minstrel S 16