

Test Report

Radio Frequency Devices – Intentional Radiators

Test Report – No.: 2225283KAU-005

Date of issue: 2016-09-13

Type: GAT NET.Writer 7000 F/ISO

Description of the EUT: RFID Reader and Writer

Serialnumber: 1517000763

Manufacturer and Applicant: GANTNER Electronic GmbH

Address: Montafonerstr. 8
6780 Schruns
Austria

Summary:

Referring to the emission limits and the operating mode during the tests specified in this report the equipment complies with the requirements according to 47 CFR Part 15, Subpart C, Intentional radiators, section 15.225 / RSS-210, Issue 9 and RSS-GEN, Issue 4

Test methods according to ANSI C63.10-2013

Test Laboratory:

Intertek Deutschland GmbH, Innovapark 20, 87600 Kaufbeuren

Compiled by:

U. Gronert
Senior Project Engineer

Approved by:

R. Dressler
Technical Manager EMC/ Radio



This test report consists of 23 pages. All measurement results exclusively refer to the equipment, which was tested. Reproduction of this report except in its entirety is not permitted without written approval of Intertek Deutschland GmbH.

Revision History

Edition	Date	Description
1	2016-09-13	First release

Details about Accreditation/ Acceptance

EMC/ Radio National



The Intertek Deutschland EMC-Lab is accredited by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

Registration Number (EMC general): **D-PL-12085-01-01**

Registration Number (EMC Med): **D-PL-12085-01-03**

International



The Intertek Deutschland EMC-Lab is accepted by the Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE)

CB Test Laboratory: **TL118**



The Intertek Deutschland EMC-Lab is accredited at the Federal Communications Commission (FCC)

Designation Number: **DE0014**

Test Firm Registration Number: **359260**



The *Bundesnetzagentur* recognizes Intertek Deutschland GmbH as Conformity Assessment Body in the sector electromagnetic compatibility (EMC).



The Intertek Deutschland EMC-Lab is listed at Industry Canada

No.**8882A-1** (OATS) and **8882A-2** (3 m alternative test site)

Automotive



The Intertek Deutschland EMC-Lab is recognized as technical service of the Kraftfahrt-Bundesamt (KBA)

Registration Number: **KBA-P 00046-03**

Table of Contents

1 Equipment under test (EUT)	6
1.1 Description of the EUT	6
1.2 Identification of the EUT according to the manufacturer/client declaration	6
1.3 Additional hardware information about the EUT	7
1.4 Peripheral equipment	7
1.5 Test signals	7
1.6 Modification during the tests	7
2 Test specifications	8
2.1 Standards	8
2.2 Additions, deviations and exclusions from standards and accreditation	8
2.3 Test site	8
2.4 Test set-up	9
2.5 Test conditions	9
3 Test summary	10
4 Field strength 13.110 MHz – 14.010 MHz (Emission Mask)	11
4.1 Requirement	11
4.2 Test setup details	11
4.3 Test data	12
4.4 Test equipment	12
5 Radiated test below 30 MHz	13
5.1 Requirement	13
5.2 Test setup details	13
5.3 Test data	14
6 Radiated emissions measurements from 30 MHz to 1000 MHz	15

6.1	Requirement.....	15
6.2	Test setup details	15
6.3	Test data	16
6.4	Test equipment	16
7	Frequency stability measurements	17
7.1	Requirement.....	17
7.2	Test data	17
7.3	Test equipment	17
8	Occupied Bandwidth.....	18
8.1	Requirement.....	18
8.2	Test setup details	18
8.3	Test data	18
8.4	Test equipment	19
9	Conducted emission 150 kHz - 30 MHz	20
9.1	Test equipment	22

1 Equipment under test (EUT)

1.1 Description of the EUT

The GAT NET.Writer 7000 F/ISO allows users to read and write information (data) from and to data carriers. Data carriers using MIFARE® and ISO 15693 technology are supported by the device.

1.2 Identification of the EUT according to the manufacturer/client declaration

Type/ Model:	GAT NET.Writer 7000 F/ISO	
Description of the EUT:	RFID Reader and Writer	
Transmitter frequency range:	13.56 MHz	
Frequency agile or hopping:	☐ Yes	☒ No
Antenna:	☒ Internal antenna	☐ External antenna
Antenna connector:	☒ None, internal antenna	☐ Yes, type
Type of modulation:	Transponder: ASK	
Temperature range:	☐ Category I (General): -20°C to +55°C ☐ Category II (Portable equipment): -10°C to +55°C ☐ Category III (Equipment for normal indoor use): +5°C to +35°C ☒ Other: 0°C to +50°C	
Power rating:	0,35 A (power supply via AC adaptor)	
Transmitter stand by mode supported:	☒ Yes	☐ No

1.3 Additional hardware information about the EUT

The EUT consists of the following units:

See 2.4

1.4 Peripheral equipment

Peripheral equipment is defined as equipment needed for correct operation of the EUT during the tests, but not included as a part of the testing and evaluation of the EUT.

See 2.4

1.5 Test signals

The radiated emission tests of the GAT NET.Writer 7000 F/ISO were done with modulation and with tag.

1.6 Modification during the tests

No modifications have been made during the tests.

2 Test specifications

2.1 Standards

47 CFR Part 15, Subpart C, Intentional radiators, section 15.207 and section 15.225 /
RSS-210, Issue 8 and RSS-GEN, Issue 4

Test methods in:

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices

2.2 Additions, deviations and exclusions from standards and accreditation

No additions, deviations or exclusions have been made from standards and accreditation.

2.3 Test site

Measurements were performed at:


Intertek Deutschland GmbH, Innovapark 20, 87600 Kaufbeuren

Test sites:

Measurement Chamber	Type of chamber	IC Site filing #
OATS	10m	8882A-1
ANECHOIC CHAMBER 1	Semi-anechoic 3m	8882A-2

2.4 Test set-up

This is the principle block diagram.



Power supply (notebook): PPP009H, HP Part No: 608425-002, S/N: F12921101316298

Notebook: HP, Compaq6730b, S/N: CNU9462Z4H

2.5 Test conditions

The radiated emission tests of the GAT NET.Writer 7000 F/ISO were done with modulation.
If not additionally specified, the tests were performed under the following environmental conditions:

Parameter	Normal
Supplying voltage AC	120 V _{AC} / 60 Hz

3 Test summary

The results in this report apply only to the tested sample:

Test	Result	Section in report	Note
Standard test methods			
AC power-line conducted tests	Pass	9	
Radiated test below 30 MHz	Pass	4, 5	
Radiated emissions measurements from 30 to 1000 MHz	Pass	6	
Determination of radiated and antenna conducted emissions above 1 GHz	NA		
Frequency Stability Test	Pass	7	
Occupied bandwidth test	Pass	8	
Output Power average symbol envelope power	NA		
Power Spectral Density < 40 GHz	NA		
Power Spectral Density > 40 GHz	NA		
In-situ measurements	NA		
Polar plot, main lobe and variation on radiated emissions test	NA		
Device-specific tests			
Measurement of cable locating equipment	NA		
Determining of cordless telephone handset security code	NA		
Determination of total input power	NA		
Procedure determining compliance for periodic operation [15.231, 15.240(b)]	NA		
Determining the average value of pulsed emissions per 15.35(c)	NA		
Comparison of limits per 15.231(b)(3)	NA		
Procedure to determine compliance of frequency pairing for 47 CFR 15.233(b)(2)	NA		
Determination of frequency hopping compliance per 47 CFR 15.247	NA		
Determination of digital modulation compliance per 47 CFR 15.247	NA		
Determination of peak conducted output unlicensed wireless device power [15.247(b), 15.255]	NA		
Determination of maximum conducted output power (15.247, 15-E)	NA		
Determination of MIMO compliance (2nd edition)	NA		
Determination of Smart antenna compliance (2nd edition)	NA		
Determination of antenna gains, including those emitting in multiple directions (15.247)	NA		
Determination of compliance with RF exposure limits	NA		
Millimeter wave test procedures for systems operating at 54GHz and greater	NA		
Determination of EIRP (15-F)	NA		
Determination Transmitter Etiquette FCC Part 15.255	NA		
Determination of Dynamic Frequency Selection (DFS) including Channel Move Time and In Service Monitoring	NA		
Determination of channel availability	NA		
Determination of Dynamic Frequency Selection including Channel Move Time	NA		
Determination of transmitter power control (TPC) (15-E)	NA		
Peak excursion measurement for UNII devices	NA		
Determination of UWB bandwidth	NA		
Determination of the center frequency, f_C , and highest radiated emissions, f_M (15-F)	NA		

NT = Not Tested, by request of the Client

NA = Not Applicable

4 Field strength 13.110 MHz – 14.010 MHz (Emission Mask)

Date of test:	2016-08-12	Test location:	Anechoic chamber 1
EUT Serial:	1517000763	Ambient temp.	24.6 °C
Tested by:	UGR	Relative humidity	41 %
Test result:	Pass	Margin:	> 40 dB

4.1 Requirement

Reference: FCC §15.225 (a) – (c) and IC RSS-210, Issue 9, section B4

Methods of measurement: ANSI C63.10, Clause 6.4 and RSS-Gen 6.13 / 8.9

The limits below 30 MHz are given for different measurement distances. The limits below 30 MHz are converted to 3 m by using the extrapolation factor 40 dB/decade (according to §15.31).

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)	Field strength (dBμV/m)	Measurement distance (m)
13.110 - 13.410	106	40.5	30	80.5	3
13.410 - 13.553	334	50.5	30	90.5	3
13.553 - 13.567	15848	84.0	30	124.0	3
13.567 - 13.710	334	50.5	30	90.5	3
13.710 - 14.010	106	40.5	30	80.5	3

4.2 Test setup details


Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to 10 kHz or 9 kHz CISPR. The video bandwidth shall be at least three times greater than the resolution bandwidth.

The test was carried out automatically by the test receiver.

The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

4.3 Test data

Overview sweeps performed with peak detectors

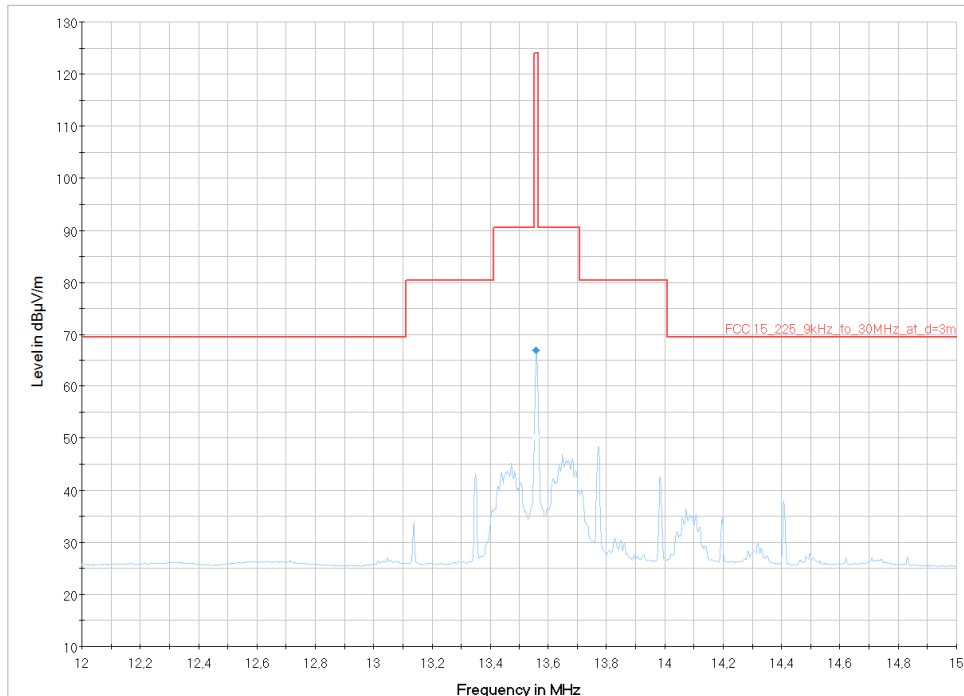

Frequency MHz	Disturbance Level dBμV/m	RBW kHz	Detector	Limit dBμV/m	Margin dB
13.56	67.0	9 (CISPR)	Peak	124	57.0

4.4 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Measurement software	Rohde & Schwarz	EMC 32	--	--
Receiver, 10 Hz- 7 GHz	Rohde & Schwarz	ESR 7	PM KF 2441	2017-08
Loop antenna, 9 kHz-30 MHz	Rohde & Schwarz	HFH2-Z2	PM KF 1401	2017-09

5 Radiated test below 30 MHz

Date of test:	2016-08-12	Test location:	Anechoic chamber 1
EUT Serial:	1517000763	Ambient temp.	24.6 °C
Tested by:	UGR	Relative humidity	41 %
Test result:	Pass	Margin:	>30 dB

5.1 Requirement

Reference: FCC §15.225 (d)/ §15.209 and IC RSS-210, Issue 9, section B4

Methods of measurement: ANSI C63.10, Clause 6.4 and RSS-Gen 6.13 / 8.9


The limits below 30 MHz are given for different measurement distances. The limits below 30 MHz are converted to 3 m by using the extrapolation factor 40 dB/decade (according to §15.31)

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	$67.6 - 20 \cdot \log(F(\text{kHz}))$	300
0.490 - 1.705	24000/F(kHz)	$87.6 - 20 \cdot \log(F(\text{kHz}))$	30
1.705 - 13.110	30	29.5	30
14.010 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			

5.2 Test setup details

see 4.2

5.3 Test data

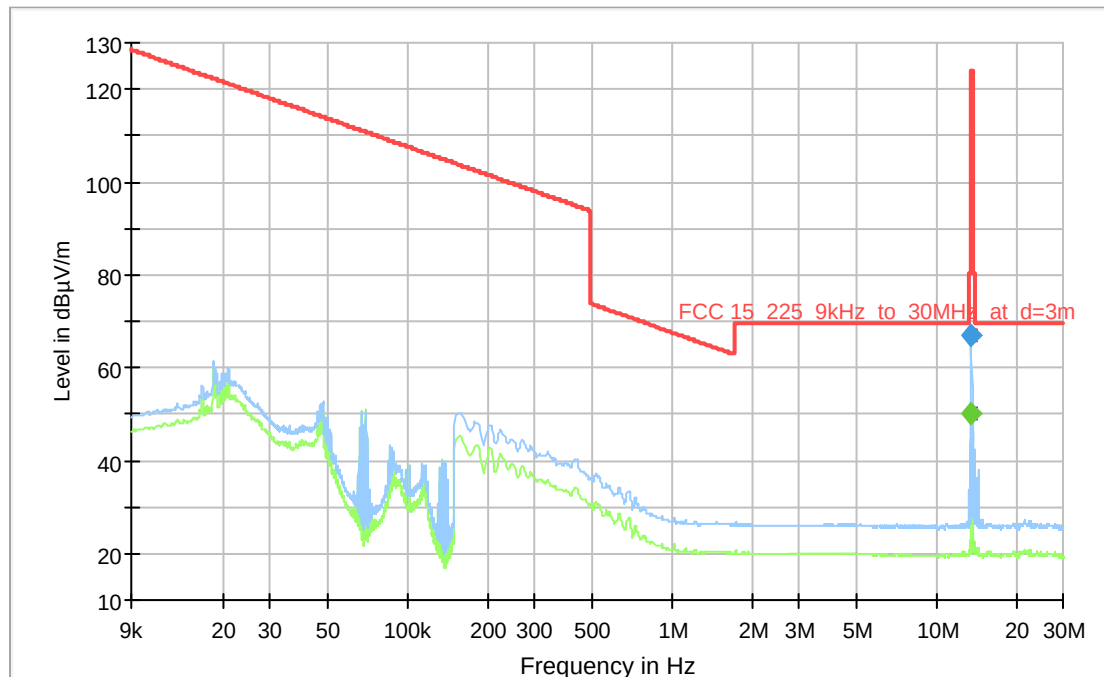

- Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-QPK [Preview Result 1.Result:1]
- * Preview Result 2-AVG [Preview Result 2.Result:2]
- Preview Result 1-QPK [Preview Result 1.Result:1]
- ◆ Critical_Freqs AVG [Critical_Freqs.Result:5]
- ◆ Critical_Freqs QPK [Critical_Freqs.Result:4]

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
13.560000	66.97	---	124.00	57.03	1000	9	100.0	V	176.0
13.560000	---	50.17	---	---	1000	9	100.0	V	176.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB)	Comment
13.560000	20.2	
13.560000	20.2	

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Measurement software	Rohde & Schwarz	EMC 32	--	--
Receiver, 10 Hz- 7 GHz	Rohde & Schwarz	ESR 7	PM KF 2441	2017-08
Loop antenna, 9 kHz- 30 MHz	Rohde & Schwarz	HFH2-Z2	PM KF 1401	2017-09

6 Radiated emissions measurements from 30 MHz to 1000 MHz

2015-08-11	2016-08-11	Test location:	Anechoic chamber 1
EUT Serial:	151700076325	Ambient temp.	27.1 °C
Tested by:	UGR	Relative humidity	28 %
Test result:	Pass	Margin:	7.3 dB

6.1 Requirement

Reference: FCC §15.225 (d)/ §15.209 and IC RSS-210, Issue 9, section B4
Methods of measurement: ANSI C63.10, Clause 6.5 and RSS-Gen 6.13 / 8.9


Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
30 – 88	100	40.0	3
88 – 216	150	43.5	3
216 – 960	200	46.0	3
Above 960	500	54.0	3

6.2 Test setup details

The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

6.3 Test data

Overview sweeps performed with peak detectors and final measurement with quasi-peak detectors.

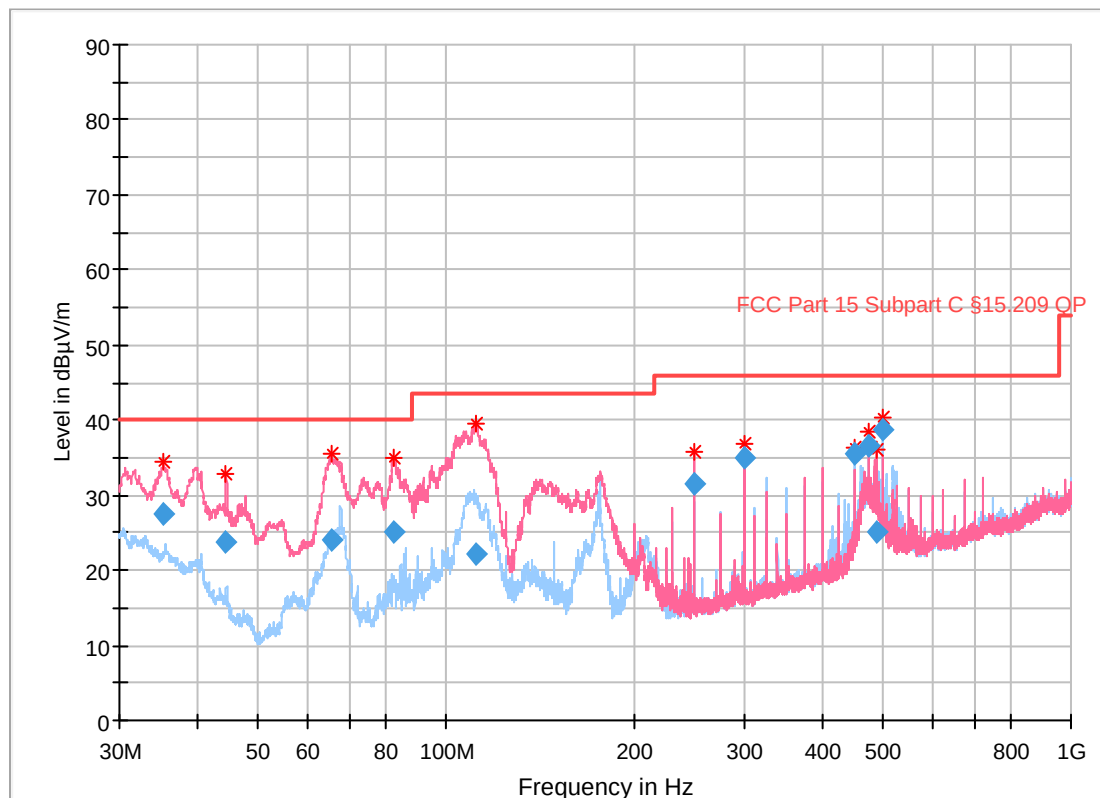

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
35.280000	27.40	40.00	12.60	1000.0	120.000	107.0	V	186.0	17.7
44.460000	23.67	40.00	16.33	1000.0	120.000	135.0	V	99.0	12.6
65.760000	24.16	40.00	15.84	1000.0	120.000	130.0	V	55.0	8.7
82.560000	25.18	40.00	14.82	1000.0	120.000	104.0	V	185.0	12.0
111.240000	22.09	43.50	21.41	1000.0	120.000	134.0	V	63.0	12.7
249.990000	31.49	46.00	14.51	1000.0	120.000	104.0	V	187.0	12.6
300.000000	35.03	46.00	10.97	1000.0	120.000	107.0	V	11.0	14.3
450.000000	35.49	46.00	10.51	1000.0	120.000	100.0	H	140.0	17.6
474.990000	36.70	46.00	9.30	1000.0	120.000	130.0	V	81.0	18.3
487.410000	25.19	46.00	20.81	1000.0	120.000	135.0	V	51.0	18.6
500.010000	38.68	46.00	7.32	1000.0	120.000	183.0	H	99.0	18.9

6.4 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Measurement software	Rohde & Schwarz	EMC 32	--	--
Receiver, 10 Hz- 7 GHz	Rohde & Schwarz	ESR 7	PM KF 2441	2017-08
Antenna, 30-3000 MHz	Rohde & Schwarz	HL 562	PM KF 1123	2018-02

7 Frequency stability measurements

Date of test:	2016-09-09	Test location:	Test place 4
EUT Serial:	1517000763	Ambient temp.	25.2 °C
Tested by:	UGR	Relative humidity	50 %
Test result:	Pass		

7.1 Requirement

Reference: FCC §15.225 (e) and IC RSS-210, Issue 9, section B4 / RSS-Gen Issue 4, section 6.11
Methods of measurement: ANSI C63.10, Clause 9.14

Limit:	The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (± 100 ppm) of the carrier frequency under nominal conditions.
Temperature range:	-30°C to +50°C (at normal supply voltage)
Voltage range:	102 to 138 VAC

7.2 Test data

Temperature °C	Carrier MHz	AC voltage 120 V _{AC}	
		Frequency deviation	
		Hz	%
-30	13.560592	592	0.004
-20	13.560644	644	0.005
-10	13.560662	662	0.005
0	13.560655	655	0.005
10	13.560622	622	0.005
20	13.560575	575	0.004
30	13.560522	522	0.004
40	13.560518	518	0.004
50	13.560499	499	0.004

At a temperature of 50°C the carrier level was reduced for 1.2 dB (minimum value).

At -30°C the carrier level was increased for 1.4 dB (maximum value).

The AC voltage variation from 102 to 138 V_{AC} had no influence on the frequency and the level of the carrier.

7.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Spectrum analyser, 10Hz- 40 GHz	Rohde & Schwarz	FSV 40	PM KF 2783	2016-10
Magnetic Field Pickup Coil	Rohde & Schwarz	HZ10	PM KF 0965	2016-10
Temperature chamber	Heraeus-Vötsch	HT4010	PM KF 1402	2017-02

8 Occupied Bandwidth

Date of test:	2016-09-08	Test location:	Test place 4
EUT Serial:	1517000763	Ambient temp.	25.3 °C
Tested by:	UGR	Relative humidity	47 %
Test result:	Pass		

8.1 Requirement


Reference: RSS-Gen, Issue 4, 6.6

8.2 Test setup details

The test setup was identical to the test setup at the radiated tests below 30 MHz.

8.3 Test data


Occupied bandwidth (20 dB)

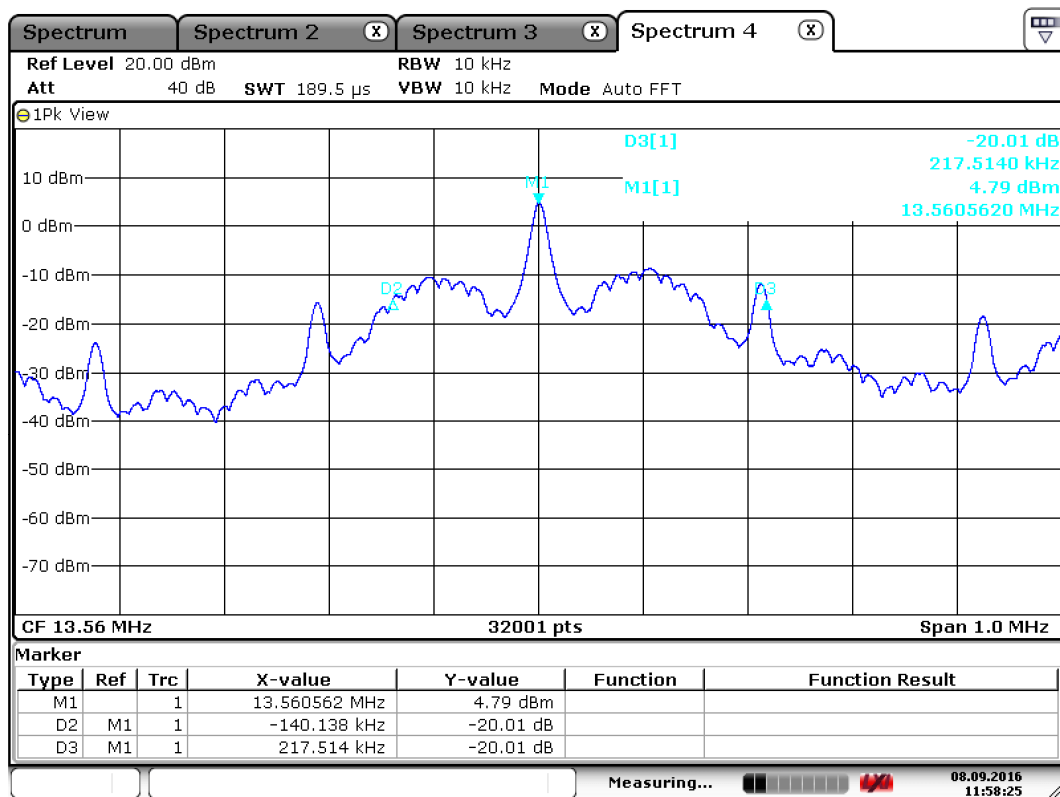

Date: 8.SEP.2016 11:58:26

Test result: The occupied bandwidth is 358 kHz

Occupied bandwidth (99%)

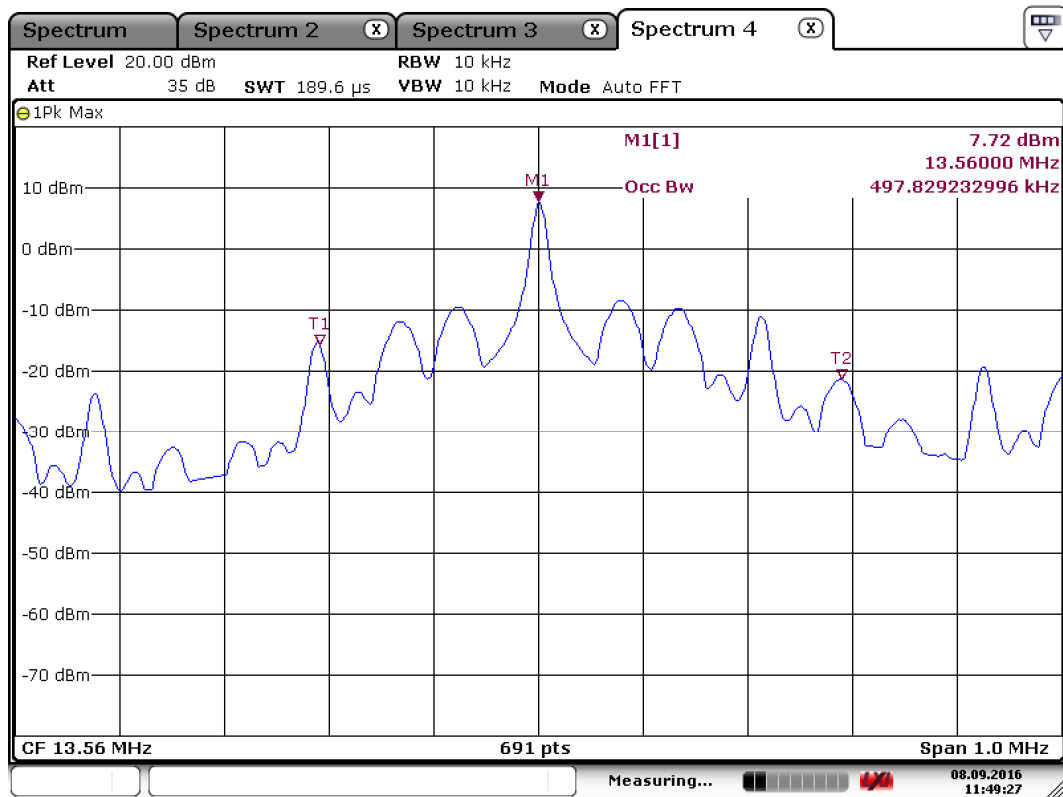

Date: 8.SEP.2016 11:49:27

Test result: The occupied bandwidth is 498 kHz

8.4 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Spectrum analyzer, 10 Hz- 40 GHz	Rohde & Schwarz	FSV 40	PM KF 2783	2016-10
Magnetic Field Pickup Coil	Rohde & Schwarz	HZ10	PM KF 0965	2016-10

9 Conducted emission 150 kHz - 30 MHz

Normative references

Limits according to:	FCC §15.207
Methods of measurement according to:	ANSI C63.10, Clause 6.2

Test requirement

Frequency range	150kHz - 30 MHz
-----------------	-----------------

Place of measurement

- ☒ Shielded cabin Siemens Matsushita CER Nr. C62128-A501-A945-1-0006
☐ Horizontal, vertical plane of reference

Test Procedure

The test was carried out automatically by the test receiver.
The EUT is a table-top EUT and was standing on a wooden table with the dimensions 1,5 m x 1,0 m x 0,8 m (Length x Width x Height).

Test result:

Test requirements ☒ **passed** ☐ **passed with modification** ☐ **not passed**

Comment


The conducted emissions between 150 kHz and 30 MHz are below the limits.
These data represent worst case emissions.

Measurement results - Conducted emission:

Intertek Conducted Emission Test Report

Common Information

Test Description: Conducted Emission
 Tested Device: Gantner GAT NET.Writer 7000 F/ISO
 Test Standard: FCC part 15.225 / FCC part 15.207
 Operating Conditions: Pulsed field
 Operator Name: UGR
 Comments: with antenna load (50 Ohm)
 Project Number: 25283
 Test Date: 2016-09-08

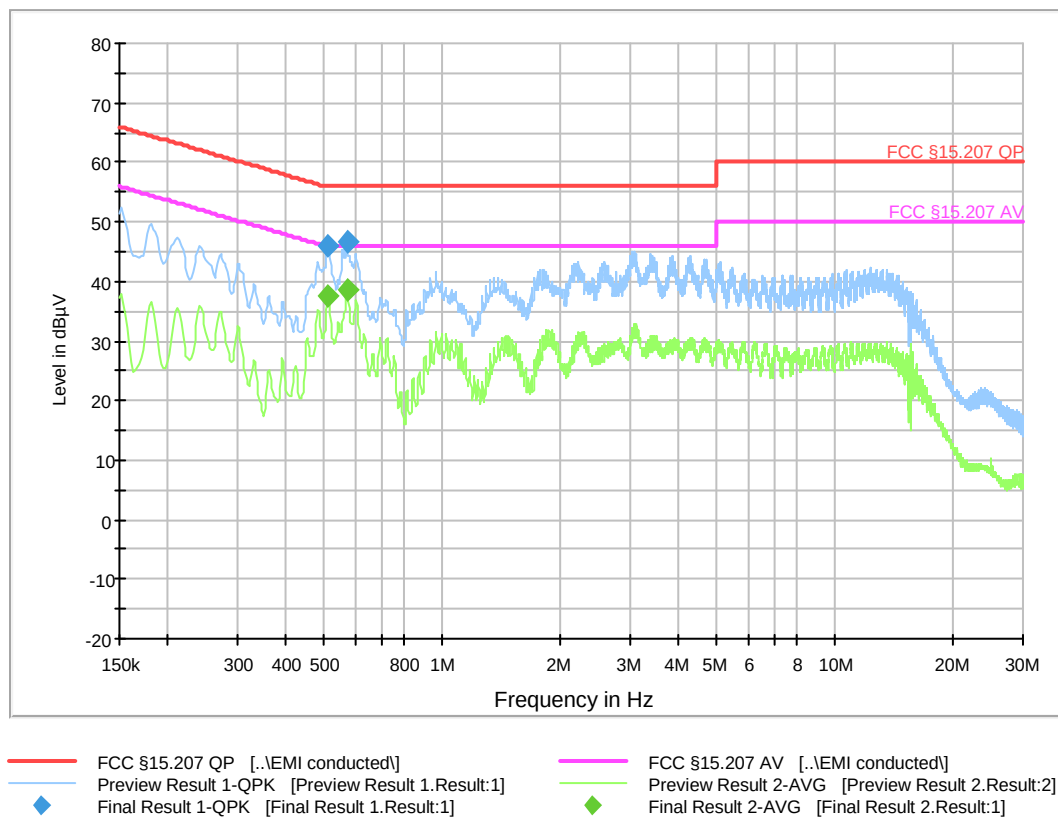

Final Result 1

Frequency (MHz)	QuasiPeak-ClearWrite (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.510000	46.1	GN	L1	0.2	9.9	56.0	
0.570750	46.8	GN	L1	0.2	9.2	56.0	

9.1 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Receiver, 10 Hz- 7 GHz	Rohde & Schwarz	ESR 7	PM KF 2441	2017-08
LISN	Rohde & Schwarz	ESH3-Z5	PM KF 0142	2017-10

=====

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.