



FCC PART 15.247
EMI MEASUREMENT AND TEST REPORT

For
CCT R & D Limited

18F., CCT Telecom Building, 11 Wo Shing Street,
Fo Tan, Shatin, N.T.

FCC ID: NC8MD751

This Report Concerns: ☒ Class II Permissive Change	Equipment Type: Digital 2.4/5.8GHz Cordless Telephone System w/ Caller ID – Base
 Test Engineer: Jerry Wang	
Report No.: R0509081(B)	
Report Date: 2004-09-14	
 Reviewed By: Daniel Deng	
Prepared By: Bay Area Compliance Laboratory Corporation (BACL) 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is specially limited to the above client company and this particular sample only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SPECIAL ACCESSORIES	5
SCHEMATICS / BLOCK DIAGRAM	5
EQUIPMENT MODIFICATIONS	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLING LIST AND DETAILS	5
CONFIGURATION OF TEST SYSTEM	6
TEST SETUP BLOCK DIAGRAM	6
SUMMARY OF TEST RESULTS FOR FCC PART 15.....	7
§15.205 & §15.209 - RADIATED EMISSION.....	8
MEASUREMENT UNCERTAINTY	8
TEST SETUP.....	8
SPECTRUM ANALYZER SETUP	8
TEST EQUIPMENT LIST AND DETAILS.....	8
ENVIRONMENTAL CONDITIONS	8
TEST PROCEDURE	9
CORRECTED AMPLITUDE & MARGIN CALCULATION	9
SUMMARY OF TEST RESULTS	9
RADIATED EMISSION TEST DATA.....	10

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *CCT R & D Limited's*, FCC ID: *NC8MD751*, or the "EUT" as referred to in this report is the base part of a Digital 2.4/5.8GHz Cordless Telephone System w/ Caller ID, which measures approximately 18.5mmL x 16mm W x 7mm H. The EUT is a DSS device, which operates at the frequency range of 5760.7190 – 5838.3117MHz.

** The test data gathered are from a production sample, S/N: 602VFR002D, provided by the manufacturer.*

Objective

This type approval report is prepared on behalf of *CCT R & D Limited* in accordance with Part 2, Subpart J, Part 15, Subparts A, B, and C of the Federal Communication Commissions rules.

This is a Class II Permissive Change report. The differences between the above-mentioned model and the tested model are: Change IC U1 from 'DH24RF17' to 'DH24RF17B' and Change IC U2 from 'SIT8825' to 'GP214D'. The manufacture declares that all design including electronic, electrical, mechanical, and cosmetics designs remain the same except the above-mentioned changes. The RF antenna of the above-mentioned model is identical in, construction, dimensions, and electrical circuits with the tested model. Due to the changes, the Spurious Radiated Emission had been retested. Please refer to BACL's testing report R0407072.

The objective is to determine compliance with FCC 15.247 rules:

- Spurious Emission
- Radiated Emission

Related Submittal(s)/Grant(s)

The original device was granted on 2004-08-16. For the original testing, please refer to BACL's testing report R0407072.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003.

Test Facility

The Open Area Test site used by BACL to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to ANSI C63.4 - 2003.

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the system components.

Once loaded, set the Tx channel to low, mid and high for testing.

Special Accessories

As shown in following test block diagram, all interface cables used for compliance testing are shielded.

Schematics / Block Diagram

Please refer to Appendix A.

Equipment Modifications

No modifications were made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
TELTONE CORP.	SIMULATOR	TLS-3B-01	80071	DOC
Southern Telecom	Telephone	None	None	None


External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
None-Shielded Telephone Cable	1.5	RJ11 Port/EUT	Telephone Simulator RJ11 Port
None-Shielded Telephone Cable	1.5	RJ11 Port/Simulator	Telephone RJ11Port/telephone

Configuration of Test System

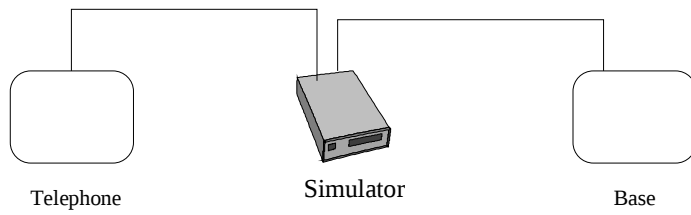

Test Setup Block Diagram

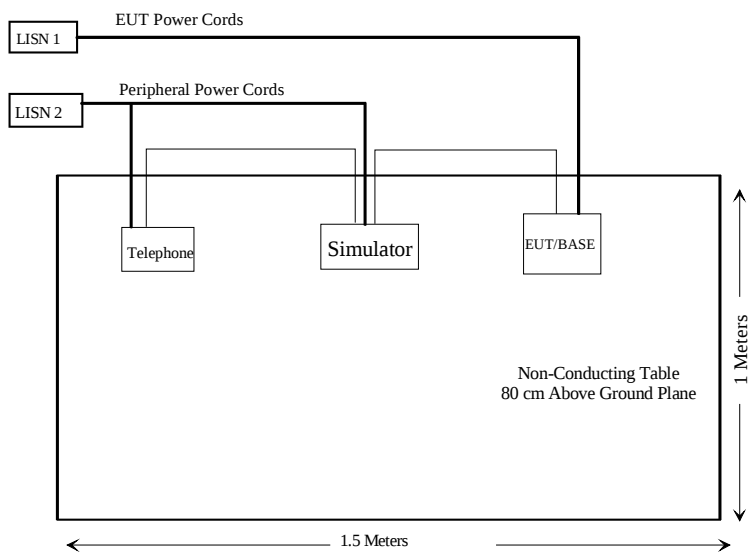

SUMMARY OF TEST RESULTS FOR FCC PART 15

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	N/A
§ 15.205	Restricted Bands	N/A
§15.209	Radiated Emission	Compliant*
§15.247 (a) (1)	Hopping Channel Separation	N/A
§15.247 (a) (1)	Channel Bandwidth	N/A
§15.247 (a) (1) (iii)	Number of Hopping Frequencies Used	N/A
§15.247 (a) (1) (iii)	Dwell Time of Each Frequency within a 35.2 Second Period of time (0.4 x Number of Channel)	N/A
§15.247 (b) (1)	Maximum Peak Output Power	N/A
§ 15.247 (b)(4) § 2.1093	RF Safety Requirements	N/A
§ 15.247 (d)	100 kHz Bandwidth of Frequency Band Edge	N/A
§ 2.1051	Spurious Emission at Antenna Port	N/A

**Test data was within the measurement of uncertainty.*

§15.205 & §15.209 - RADIATED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

Test Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with ANSI C63.4 - 2003. The specification used was the FCC 15 Subpart C limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The EUT was connected with 120Vac/60Hz power source.

Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 40GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
Sunol Science	Antenna	JB1	A013105-3	2005-02-11
HP	Amplifier, Pre	8447E	1937A01057	2005-08-04
HP	Analyzer, Spectrum	8565EC	3946A00131	2005-08-06
HP	Amplifier, Pre, microwave	8449B	3147A00400	2005-06-14
A.R.A.	Antenna, Horn, DRG	DRG-118/A	1132	2004-09-30

*** Statement of Traceability: BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	27° C
Relative Humidity:	47%
ATM Pressure:	1015 mbar

The testing was performed by Jerry Wang on 2005-09-13.

Test Procedure

For the radiated emissions test, both the laptop and all peripheral power cords were connected to the AC floor outlet since the power supply used in the laptop did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limits), and are distinguished with a "Qp" in the data table.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207, and 15.247, and had the worst margin of:

-3.10 dB at 17281.32 MHz in the **Horizontal** polarization, Low Channel.*

-3.90 dB at 17397.45 MHz in the **Vertical** polarization, Middle Channel.*

-3.46 dB at 17514.93 MHz in the **Horizontal** polarization, High Channel.*

-5.24 dB at 147.45 MHz in the **Vertical** polarization, Unintentional Emission.

**Test data was within the measurement of uncertainty.*

Radiated Emission Test Data

Indicated			Antenna	Antenna		Correction Factor			FCC 15 Subpart C		
Frequency	Ampl.	Direction	Height	Polar	Antenna	Cable Loss	Amp.	Corr. Ampl.	Limit	Margin	Comments
MHz	dBμV/m	Degree	Meter	H/V	dBμV/m	dBμV/m	dB	dBμV/m	dBμV/m	dB	
Low Channel											
5760.44	103.67	30	1.5	H	34.1	5.40	35.09	108.08			Fund/Peak
5760.44	104.67	30	1.5	V	34.1	5.40	35.09	109.08			Fund/Peak
5760.44	100.70	100	1.2	V	34.1	5.40	35.09	105.11			Ave
5760.44	97.70	100	1.2	H	34.1	5.40	35.09	102.11			Ave
17281.32	30.40	200	2.3	H	44.3	9.70	33.50	50.90	54	-3.10*	Ave
17281.32	29.50	200	1.5	V	44.3	9.70	33.50	50.00	54	-4.00	Ave
11520.88	34.50	270	2.4	V	39.1	7.78	34.83	46.55	54	-7.45	Ave
11520.88	33.30	180	2.2	H	39.1	7.78	34.83	45.35	54	-8.65	Ave
17281.32	43.20	300	1.2	V	44.3	9.70	33.50	63.70	74	-10.30	Peak
17281.32	42.60	200	2.3	H	44.3	9.70	33.50	63.10	74	-10.90	Peak
11520.88	49.80	180	2.2	H	39.1	7.78	34.83	61.85	74	-12.15	Peak
11520.88	47.80	300	1.5	V	39.1	7.78	34.83	59.85	74	-14.15	Peak
Middle Channel											
5799.15	100.33	200	1.2	V	34.1	5.40	35.09	104.74			Fund/Peak
5799.15	100.90	180	1.2	H	34.1	5.40	35.09	105.31			Fund/Peak
5799.15	97.84	180	1.2	V	34.1	5.40	35.09	102.25			Ave
5799.15	99.70	200	1.5	H	34.1	5.40	35.09	104.11			Ave
17397.45	29.60	270	1.6	V	44.3	9.70	33.50	50.10	54	-3.90*	Ave
17397.45	29.30	180	1.5	H	44.3	9.70	33.50	49.80	54	-4.20	Ave
11598.30	35.40	300	1.5	V	39.1	7.78	34.83	47.45	54	-6.55	Ave
11598.30	34.70	180	1.5	H	39.1	7.78	34.83	46.75	54	-7.25	Ave
17397.45	42.30	270	1.2	V	44.3	9.70	33.50	62.80	74	-11.20	Peak
17397.45	41.60	180	1.5	H	44.3	9.70	33.50	62.10	74	-11.90	Peak
11598.30	48.20	270	1.6	V	39.1	7.78	34.83	60.25	74	-13.75	Peak
11598.30	47.30	180	1.5	H	39.1	7.78	34.83	59.35	74	-14.65	Peak
High Channel											
5838.31	100.98	180	1.2	V	34.1	5.40	35.09	105.39			Fund/Peak
5838.31	98.80	180	1.2	H	34.1	5.40	35.09	103.21			Fund/Peak
5838.31	100.12	180	1.2	V	34.1	5.40	35.09	104.53			Ave
5838.31	96.90	200	1.5	H	34.1	5.40	35.09	101.31			Ave
17514.93	29.50	180	1.5	H	44.1	9.86	32.92	50.55	54	-3.46*	Ave
17514.93	29.10	200	1.2	V	44.1	9.86	32.92	50.15	54	-3.86*	Ave
11676.62	35.20	270	1.2	V	39.1	7.78	34.83	47.25	54	-6.75	Ave
11676.62	34.20	200	1.5	H	39.1	7.78	34.83	46.25	54	-7.75	Ave
17514.93	43.20	180	1.5	H	44.1	9.86	32.92	64.25	74	-9.76	Peak
17514.93	42.30	300	1.2	V	44.1	9.86	32.92	63.35	74	-10.66	Peak
11676.62	48.20	270	1.2	V	39.1	7.78	34.83	60.25	74	-13.75	Peak
11676.62	47.30	180	1.5	H	39.1	7.78	34.83	59.35	74	-14.65	Peak

*Test data was within the measurement of uncertainty.

Note:

FUND: Fundamental

AVG: Average

Unintentional Emission

Frequency MHz	Indicated		Antenna Height Meter	Antenna		Correction Factor			FCC 15 Subpart C	
	Ampl. dB μ V/m	Direction Degree		Polar H/V	Antenna dB μ V/m	Cable Loss dB μ V/ m	Amp. dB	Corr. Ampl. dB μ V/m	Limit dB μ V/m	Margin dB
147.45	52.5	200	1.2	V	12.55	1.65	28.44	38.26	43.5	-5.24
224.98	54.3	300	1.5	V	11.80	2.17	28.12	40.15	46.0	-5.85
221.18	54.3	200	1.2	V	11.80	2.17	28.12	40.15	46.0	-5.85
147.50	51.8	180	1.5	H	12.55	1.65	28.44	37.56	43.5	-5.94
221.18	53.8	180	1.2	H	11.80	2.17	28.12	39.65	46.0	-6.35
294.50	51.2	200	1.5	V	13.70	2.30	27.84	39.36	46.0	-6.64
294.50	50.3	120	1.5	H	13.70	2.30	27.84	38.46	46.0	-7.54
250.00	50.2	200	1.2	V	13.30	2.17	28.00	37.67	46.0	-8.33
48.00	47.4	200	1.5	H	11.05	1.10	28.90	30.65	40.0	-9.35
224.98	50.1	180	1.5	H	11.80	2.17	28.12	35.95	46.0	-10.05
240.00	45.3	200	1.5	H	13.80	2.17	28.04	33.23	46.0	-12.77
60.00	42.3	180	1.2	V	9.40	1.33	28.70	24.33	40.0	-15.67